

RADIO TEST REPORT

Product : IEEE 802.11ax/ac/a/b/g/n 2x2 WiFi with Bluetooth5.0 Combo Module

Model Name : WNFB265AX

FCC ID : VPQ-WNFB265AXIBT

Test Regulation : FCC 47 CFR Part 15 Subpart C (Section 15.247)

Received Date : 2023/6/29

Test Date : 2023/7/17 ~ 2023/12/8

Issued Date : 2023/12/11

Applicant : TRIXELL
460 Rue du Pommarin, 38430 Moirans

Issued By : Underwriters Laboratories Taiwan Co., Ltd.
Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd.,
Zhudong Township, Hsinchu County, Taiwan



The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.


Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1



Original Test Report No.: 4790860238-US-R2-V0

[illegible]

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Table of Contents

1. Attestation of Test Results.....	4
2. Summary of Test Results.....	5
3. Test Methodology and Reference Procedures	6
4. Facilities and Accreditation.....	6
5. Measurement Uncertainty.....	7
6. Equipment under Test	8
6.1. Description of EUT	8
6.2. Channel List.....	9
6.3. Test Condition	10
6.4. Description of Available Antennas.....	11
6.5. Test Mode Applicability and Tested Channel Detail	12
7. Test Equipment.....	13
8. Description of Test Setup.....	14
9. Test Results	16
9.1. Conducted Output Power.....	16
9.2. Radiated Spurious Emission.....	18

1. Attestation of Test Results

APPLICANT: TRIXELL
460 Rue du Pommarin, 38430 Moirans

MANUFACTURER: SparkLAN Communications, Inc.
8F., No.257, Sec. 2, Tiding Blvd., Neihu District, Taipei City 11493,
Taiwan (R.O.C.)

EUT DESCRIPTION: IEEE 802.11ax/ac/a/b/g/n 2x2 WiFi with Bluetooth5.0 Combo
Module

BRAND: TRIXELL

MODEL: WNFB265AX

SAMPLE STAGE: Engineering Verification Test sample


DATE of TESTED: 2023/7/17 ~ 2023/12/8

APPLICABLE STANDARDS	
STANDARD	Test Results
FCC 47 CFR PART 15 Subpart C (Section 15.247)	PASS

Underwriters Laboratories Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Prepared By:



Cindy Hsin
Project Handler

Date : 2023/12/11

Approved and Authorized By:



Eric Lee
Senior Laboratory Engineer

Date : 2023/12/11

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

2. Summary of Test Results

Summary of Test Results		
FCC Clause	Test Items	Result
15.247(a)(1) (iii)	Number of Hopping Frequency Used	See Note 1
15.247(a)(1) (iii)	Dwell Time on Each Channel	See Note 1
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	See Note 1
15.247(b)	Conducted Output Power	PASS
15.247(d)	Antenna Port Emission	See Note 1
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS
15.207	AC Power Conducted Emission	See Note 1
15.203	Antenna Requirement	See Note 1

Note:

1. This report is as a supplementary report of report no.: 4789558390-US-R3-V0.

3. Test Methodology and Reference Procedures

The tests documented in this report were performed in accordance with 47 CFR FCC Part 2, KDB558074 D01 Meas Guidance v05r02, KDB414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013.

4. Facilities and Accreditation

Test Location	Underwriters Laboratories Taiwan Co., Ltd.
Address	Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Accreditation Certificate	Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

5. Measurement Uncertainty

For statement of conformity, Simple acceptance (Section 3.1.4 of IEC Guide 115) was applied as decision rule for measurement in this test report.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Determining compliance based on the results of the compliance measurement, not considering measurement instrumentation uncertainty.

Measurement	Frequency	Uncertainty
Conducted disturbance at mains terminals ports	150kHz ~ 30MHz	3.1 dB
RF Conducted	9 kHz - 40GHz	2.3 dB
Radiated disturbance below 30MHz	9 kHz - 30 MHz	3.2 dB
Radiated disturbance below 1 GHz	30MHz ~ 1GHz	6.1 dB
Radiated disturbance above 1 GHz	1GHz ~ 40GHz	5.1 dB

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6. Equipment under Test

6.1. Description of EUT

Product	IEEE 802.11ax/ac/a/b/g/n 2x2 WiFi with Bluetooth5.0 Combo Module
Brand Name	TRIXELL
Model Name	WNFB265AX
Operating Frequency	2402MHz ~ 2480MHz
Modulation	GFSK, $\pi/4$ -DQPSK and 8DPSK
Transfer Rate	Up to 3 Mbps
Number of Channel	79
Maximum Output Power	8.89 dBm
Normal Voltage	3.3Vdc
Sample ID	6110881

Note:

1. The model number of this application: WNFB265AX, based on original FCC ID: RYK-WNFB265AXIBT, Model: WNFB-265AXI(BT) whose RF circuit are identical, only the RF antenna, applicant, brand and model number have been changed. According to the above changed, the radiated emission and conducted output power need to be performed, other test results are referred to the original report (Report No.: 4789558390-US-R3-V0).

2. The EUT contains following accessory devices:

Product	Brand	Model	Description
Antenna	TAOGLAS	FXP831.07.0100C	2.4GHz: 3dBi 5GHz: 5.5dBi I-PEX

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer the manufacturer's or user's manual, the laboratory shall not be held responsible.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6.2. Channel List

79 channels are provided for BT-EDR mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	-	-

6.3. Test Condition

Test Item	Test Site No.	Environmental Condition	Input Power	Test Date	Tested by
Radiated Spurious Emission	966-2	21~27°C/ 51~69%RH	3.3Vdc	2023/07/17~ 2023/12/08	Rex Chen
Antenna Port Conducted Measurement	SR4	21~27°C/ 51~69%RH	3.3Vdc	2023/07/17~ 2023/07/18	Rex Chen

FCC Test Firm Registration Number: 498077

Sample Calculation:

Antenna Port Conducted Measurement:

- Where relevant, the follow sample calculation is provided:
Result Value (dBm) = Reading Value (dBm) + Attenuator Factor (dB) + Cable Loss (dB).
Example: Result Value (10dBm) = Reading Value (-2dBm) + Attenuator Factor (10dB) + Cable Loss(2dB).
*Test plot only shown the “Result Value”.

Radiated Spurious Emission:

- Where relevant, the follow sample calculation is provided:
Result Value (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamp Factor (dB).
Example: Result Value (34.5dBuV/m) = Reading Value (40.1dBuV) + Antenna Factor (18.7dB/m) + Cable Loss (4.2dB) - Preamp Factor (28.5dB).

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

6.4. Description of Available Antennas

Ant. No.	Transmitter Circuit	Brand Name	Model Name	Ant. Type	Maximum Gain (dBi)
1	Chain (0)+(1)	TAOGLAS	FXP831.07.0100C	Dipole	2.4GHz: 3 5GHz: 5.5

Note: The above antenna information was provided from customer and for more detailed features description, please refer the manufacturer's specification or user's manual, the laboratory shall not be held responsible.

6.5. Test Mode Applicability and Tested Channel Detail

- The model number of this application: WNFB265AX, based on original FCC ID: RYK-WNFB265AXIBT, Model: WNFB-265AXI(BT) whose RF circuit are identical, only the RF antenna, applicant, brand and model number have been changed. According to the above changed, the radiated emission and conducted output power need to be performed, other test results are referred to the original report (Report No.: 4789558390-US-R3-V0).

Test Item	Modulation Type	Available Channel	Test Channel	Packet Type
Radiated Emissions (Above 1GHz)	GFSK	0 to 78	0,39,78	DH5
	8DPSK	0 to 78	0,39,78	3DH5
Radiated Emissions (Below 1GHz)	GFSK	0 to 78	0	DH5
Antenna Port Conducted Measurement	GFSK	0 to 78	0,39,78	DH5
	8DPSK	0 to 78	0,39,78	3DH5

7. Test Equipment

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired date
Radiated Spurious Emission					
Spectrum Analyzer	Keysight	N9010A	MY56070827	2023/4/7	2024/4/6
EMI Test Receiver	Rohde & Schwarz	ESR7	101754	2022/12/13	2023/12/12
Loop Antenna	ETS lindgren	6502	00213440	2023/1/4	2024/1/3
Trilog-Broadband Antenna with 5dB Attenuator	Schwarzbeck & EMCI	VULB 9168 & N-6-05	774 & AT-N0538	2023/2/13	2024/2/12
Preamplifier (30-1000 MHz)	EMCI	EMC330E	980405	2023/6/7	2024/6/6
Cables	Hanyitek	K1K50-UP0264-K1K50-2500	170214-4 & 170425-2	2022/12/1	2023/11/30
Cables	Hanyitek	K1K50-UP0264-K1K50-2500	170214-4 & 170425-2	2023/11/29	2024/11/28
Antenna Port Conducted Measurement					
Spectrum Analyzer	Keysight	N9010A	MY56070834	2022/10/24	2023/10/23
Attenuator	EMCI	EMC-40ATK2W10	17002	2022/12/9	2023/12/8
Pulse Power Sensor	Anritsu	MA2411B	1531202	2023/1/4	2024/1/3
Power Meter	Anritsu	ML2495A	1645002	2023/1/4	2024/1/3

UL Software		
Description	Name	Version
Radiated measurement	e3	6.191211 (V6)
Conducted measurement	RF-Conducted-FCC 15247	ver 1.0

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

8. Description of Test Setup

Support Equipment

ID	Equipment	Brand Name	Model Name	S/N	Remark
A	Test Tool	Broadcom	Bluetool	NA	Supplied by client
B	Monitor	Dell	SE2417HG	NA	Provide by lab
C	Computer	Gigabyte	H310M-S2P	BC00049	Supplied by client
D	Keyboard	Dell	KB216I	CH2-WD050	Provide by lab


I/O Cables

ID	Equipment	Brand Name	Model Name	Length (m)	Remark
1	Flexible Cable	Soliton	PEM-1LC	0.47	Supplied by client
2	Micro USB Cable	Centenary	US-26	1.8	Supplied by client
3	HDMI Cable	EATON	P568010	1.44	Provide by lab with two core

Test Setup

The EUT was worked in engineering mode to transmit signal.

Setup Diagram for Test

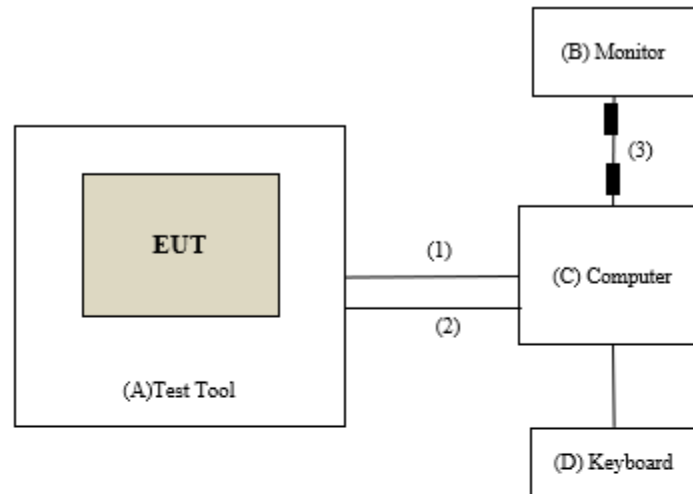

Under Table

Remote Site

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

9. Test Results

9.1. Conducted Output Power


Requirements

The Maximum Output Power Measurement is 125mW.

Test Procedure

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Test Setup



The loss between RF output port of the EUT and the input port of the Power Meter has been taken into consideration.

Test Data**Peak Power****BT GFSK**

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	3.819	5.82	20.97	PASS
39	2441	4.036	6.06	20.97	PASS
78	2480	3.999	6.02	20.97	PASS

BT 8DPSK

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
0	2402	5.808	7.64	20.97	PASS
39	2441	5.117	7.09	20.97	PASS
78	2480	5.794	7.63	20.97	PASS

Average Power (Reference Only)**BT GFSK**

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	3.606	5.57
39	2441	3.811	5.81
78	2480	3.776	5.77

BT 8DPSK

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	3.221	5.08
39	2441	2.838	4.53
78	2480	3.214	5.07

9.2. Radiated Spurious Emission

Requirements

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Test Procedures

[For 9 kHz ~ 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

[For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

Configuration	Average	
	RBW	VBW
Bluetooth	1MHz	Duty cycle refer to original report

4. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
5. Test data of Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
6. Test data of Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
7. Test data of Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamp Factor (dB).
8. Test data of Notation "@" = Fundamental Frequency
9. Test data of Notation "*" = The peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948


Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Setup

<Frequency Range 9 kHz ~ 30 MHz>

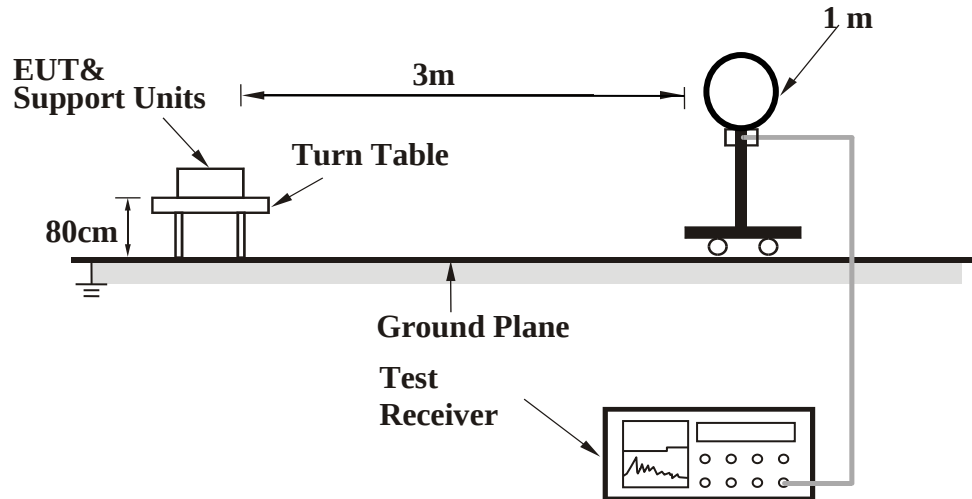

<Frequency Range 30 MHz ~ 1 GHz >

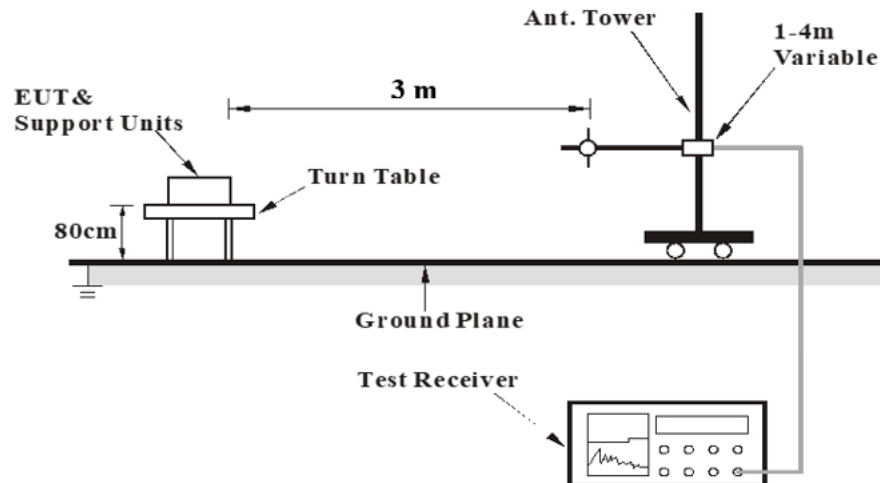

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

The diagram illustrates a reverberation chamber setup. Key components and labels include:

- EUT & Support Units:** Equipment Under Test and its supporting structure on the turn table.
- Turn Table:** A rotating platform for the EUT and support units.
- Absorber:** A series of triangular-shaped electromagnetic absorbers on the ground plane.
- Ground Plane:** The bottom surface of the chamber.
- Test Receiver:** A device connected to the ground plane to measure the signal.
- Ant. Tower:** An antenna tower positioned outside the chamber.
- 1-4m Variable:** A cable or distance measurement between the antenna tower and the ground plane.
- 3 m:** The distance between the turn table and the antenna tower.
- 150cm:** The height of the turn table above the ground plane.

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

Test Data

Above 1 GHz

Mode	GFSK	Channel	0
------	------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2322.35	41.16	16.1	57.26	74	-16.74	PK
		2376.12	30.07	16.15	46.22	54	-7.78	AVG
	@	2402	73.14	15.98	89.12	N/A	N/A	PK
	@	2402	72.97	15.98	88.95	N/A	N/A	AVG
	*	4804	37.14	5.07	42.21	74	-31.79	PK
Vertical		2354.08	41.11	16.34	57.45	74	-16.55	PK
		2375.74	30.6	16.15	46.75	54	-7.25	AVG
	@	2402	77.88	15.98	93.86	N/A	N/A	PK
	@	2402	77.38	15.98	93.36	N/A	N/A	AVG
	*	4804	38.07	5.07	43.14	74	-30.86	PK


Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

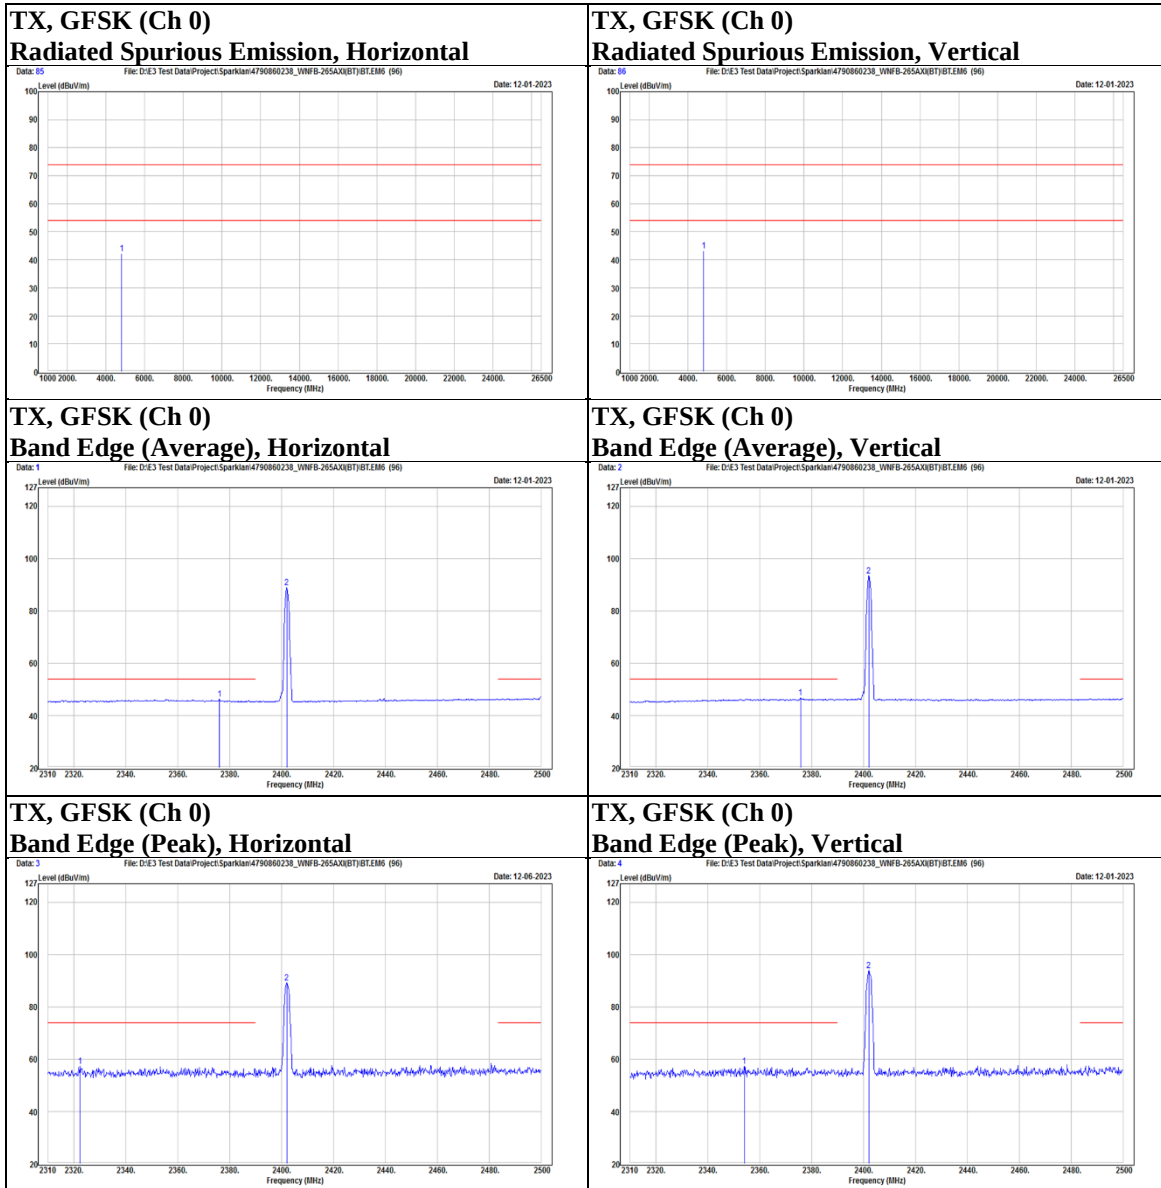

Mode	GFSK	Channel	39
------	------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2328.05	41.46	16.15	57.61	74	-16.39	PK
		2375.93	29.72	16.15	45.87	54	-8.13	AVG
	@	2441	71.51	16.43	87.94	N/A	N/A	PK
	@	2441	69.93	16.43	86.36	N/A	N/A	AVG
		2494.87	40.42	16.88	57.3	74	-16.7	PK
		2497.34	29.52	16.9	46.42	54	-7.58	AVG
	*	4882	36.89	5.31	42.2	74	-31.8	PK
Vertical		2336.22	40.85	16.24	57.09	74	-16.91	PK
		2375.93	30.44	16.15	46.59	54	-7.41	AVG
	@	2441	75.42	16.43	91.85	N/A	N/A	PK
	@	2441	75.15	16.43	91.58	N/A	N/A	AVG
		2486.7	41.04	16.82	57.86	74	-16.14	PK
		2500	29.31	16.92	46.23	54	-7.77	AVG
	*	4882	36.23	5.31	41.54	74	-32.46	PK

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000


Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1


TX, GFSK (Ch 39)
Radiated Spurious Emission, Horizontal

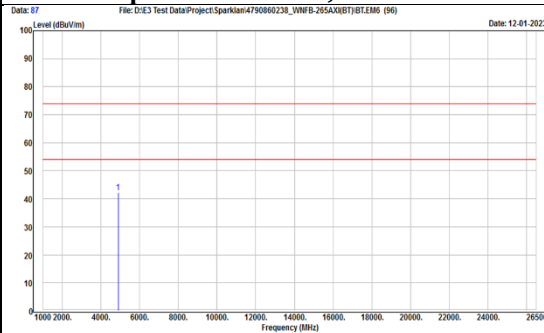


TX, GFSK (Ch 39)
Radiated Spurious Emission, Vertical

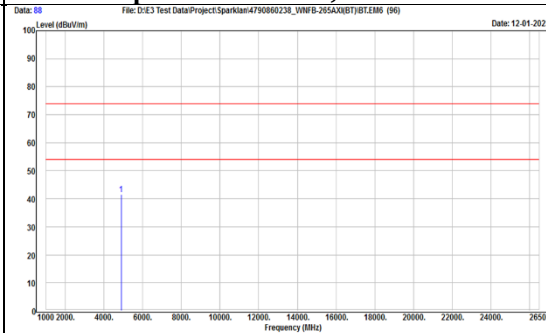


TX, GFSK (Ch 39)
Band Edge (Average), Horizontal

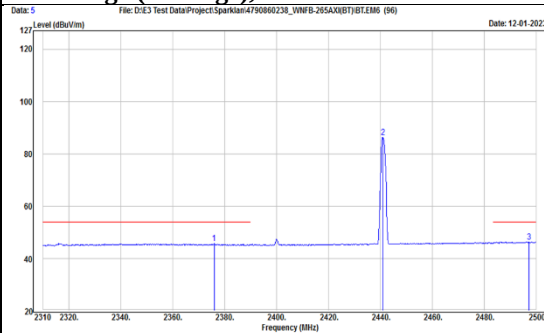


TX, GFSK (Ch 39)
Band Edge (Average), Vertical

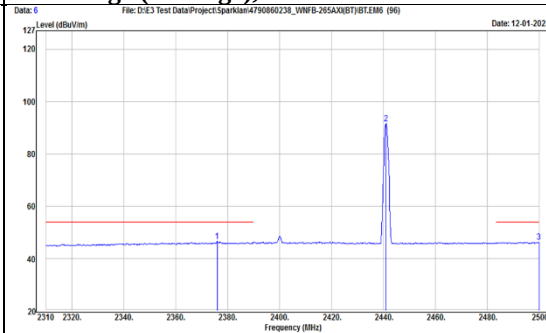

TX, GFSK (Ch 39)
Band Edge (Peak), Horizontal

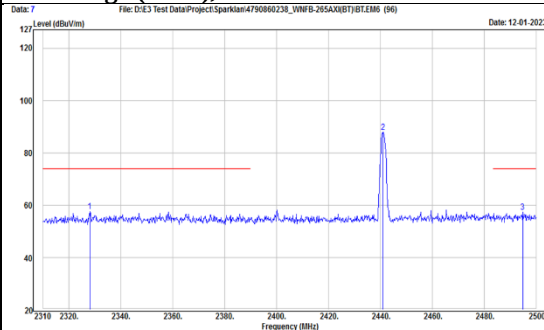

TX, GFSK (Ch 39)
Band Edge (Peak), Vertical

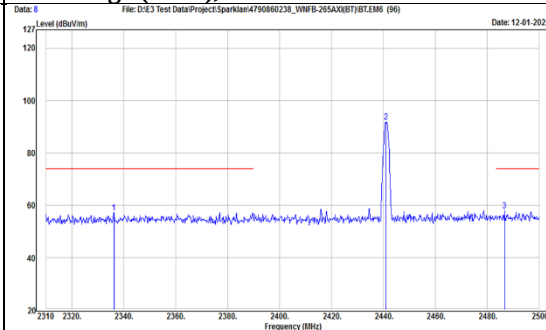

Mode	GFSK	Channel	78
------	------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	2480	76.02	16.76	92.78	N/A	N/A	PK
	@	2480	75.74	16.76	92.5	N/A	N/A	AVG
		2487.27	40.33	16.82	57.15	74	-16.85	PK
		2500	29.4	16.92	46.32	54	-7.68	AVG
	*	4960	37.07	5.42	42.49	74	-31.51	PK
Vertical	@	2480	74.42	16.76	91.18	N/A	N/A	PK
	@	2480	74.39	16.76	91.15	N/A	N/A	AVG
		2496.96	41.04	16.89	57.93	74	-16.07	PK
		2500	29.17	16.92	46.09	54	-7.91	AVG
	*	4960	38.72	5.42	44.14	74	-29.86	PK


Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

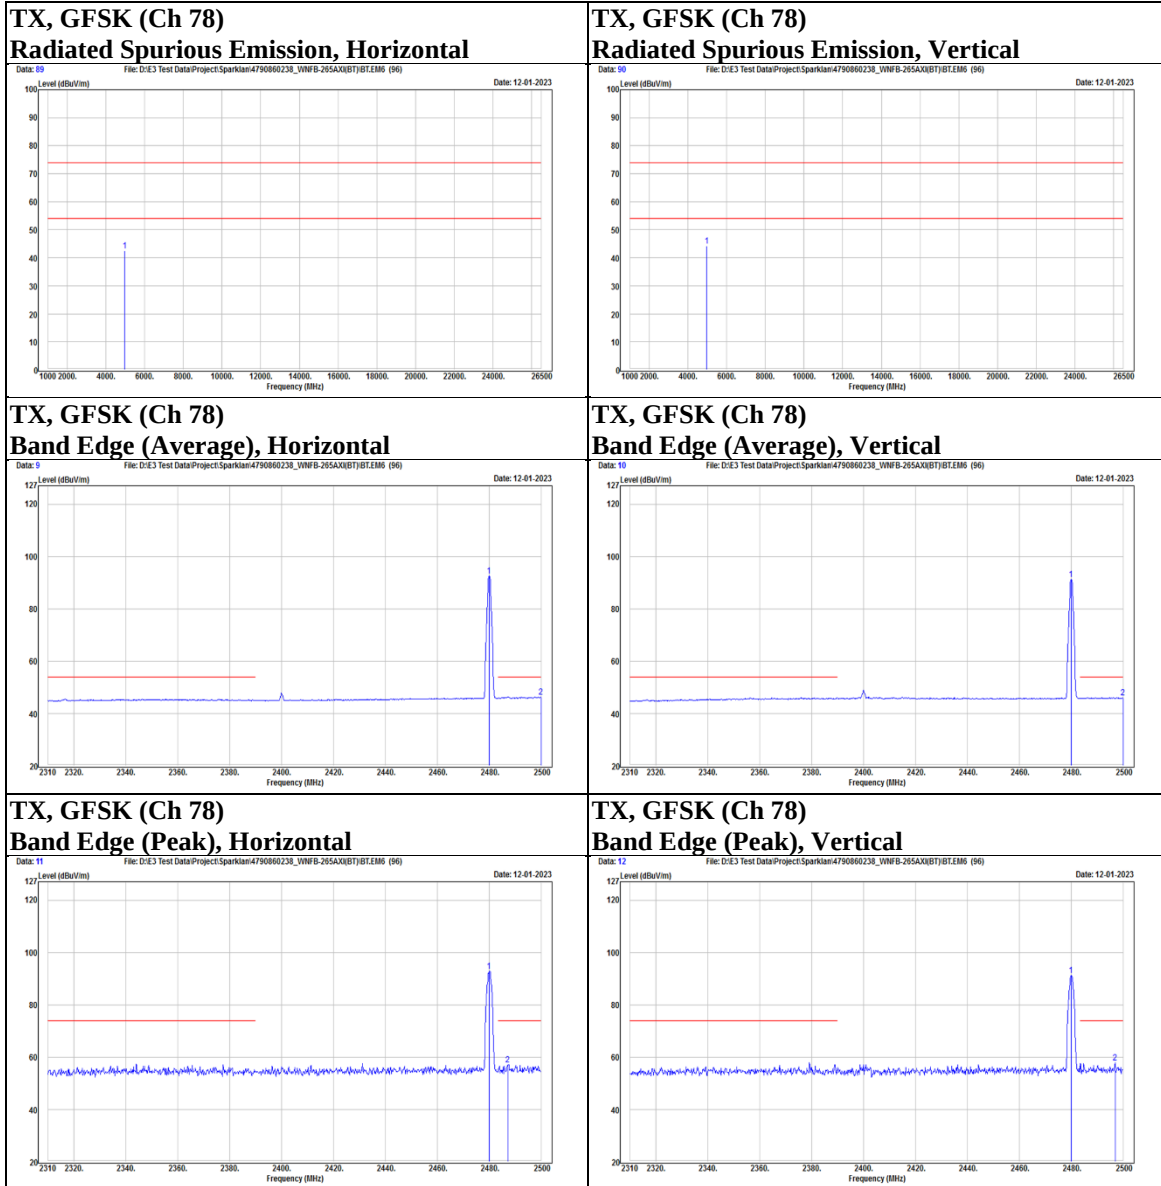

Mode	8DPSK	Channel	0
------	-------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2376.12	29.91	16.15	46.06	54	-7.94	AVG
		2378.21	41.4	16.14	57.54	74	-16.46	PK
	@	2402	71.15	15.98	87.13	N/A	N/A	PK
	@	2402	68.27	15.98	84.25	N/A	N/A	AVG
	*	4804	38.99	5.07	44.06	74	-29.94	PK
Vertical		2338.88	40.49	16.26	56.75	74	-17.25	PK
		2384.86	29.88	16.08	45.96	54	-8.04	AVG
	@	2402	77.87	15.98	93.85	N/A	N/A	PK
	@	2402	74.2	15.98	90.18	N/A	N/A	AVG
	*	4804	36.61	5.07	41.68	74	-32.32	PK


Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

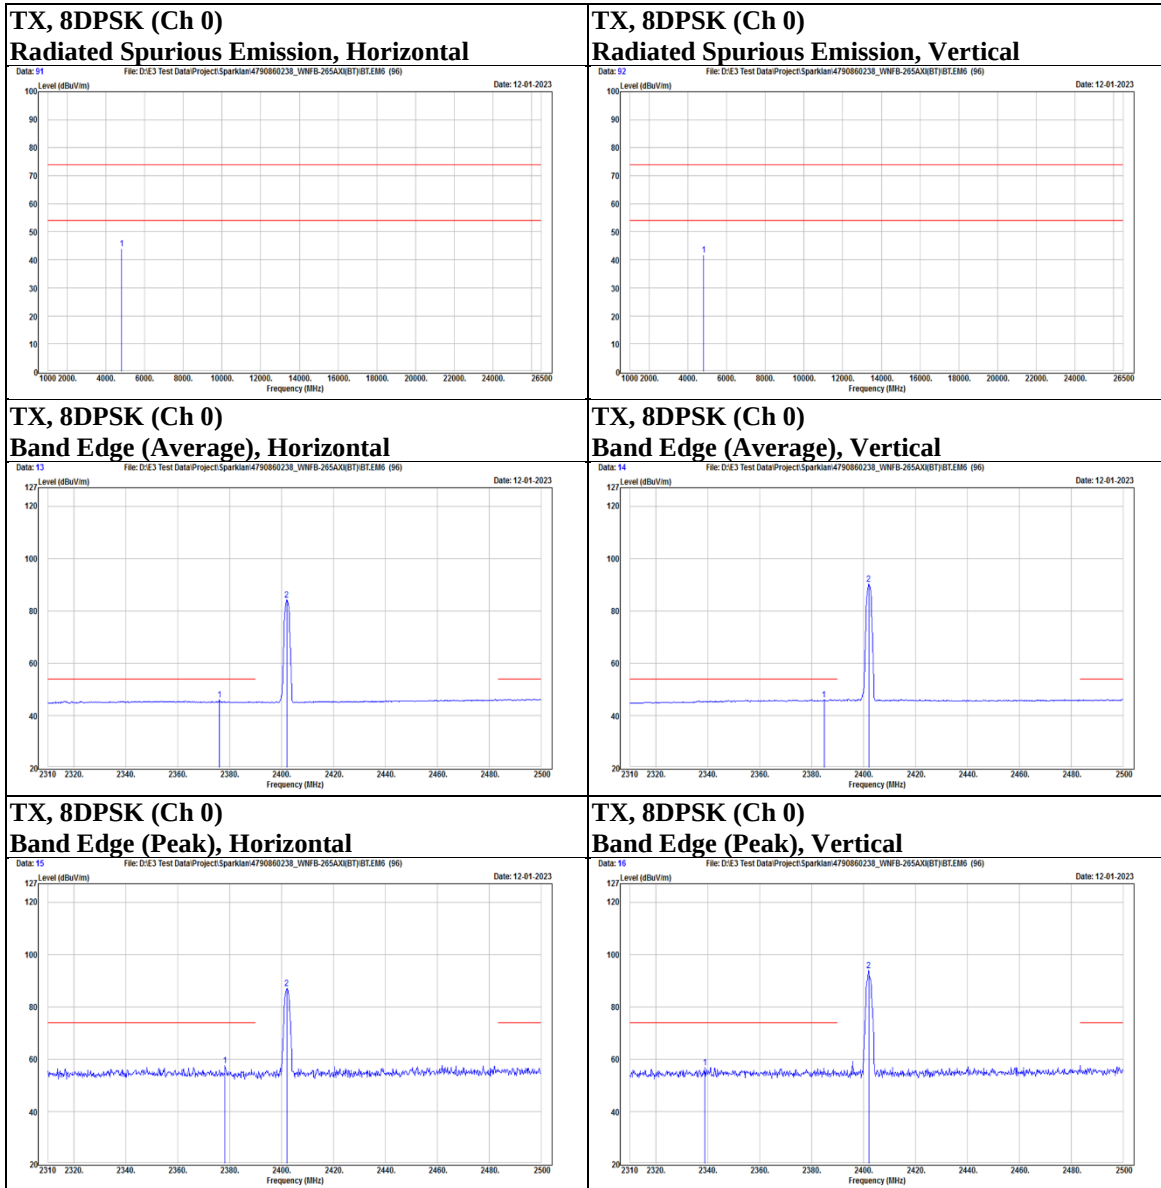

Mode	8DPSK	Channel	39
------	-------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		2316.27	29.58	16.04	45.62	54	-8.38	AVG
		2347.05	40.96	16.35	57.31	74	-16.69	PK
	@	2441	71.87	16.43	88.3	N/A	N/A	PK
	@	2441	67.91	16.43	84.34	N/A	N/A	AVG
		2486.13	41.1	16.82	57.92	74	-16.08	PK
		2494.11	29.53	16.87	46.4	54	-7.6	AVG
	*	4882	36.13	5.31	41.44	74	-32.56	PK
Vertical		2379.92	29.86	16.12	45.98	54	-8.02	AVG
		2384.86	41.13	16.08	57.21	74	-16.79	PK
	@	2441	74.61	16.43	91.04	N/A	N/A	PK
	@	2441	72.63	16.43	89.06	N/A	N/A	AVG
		2497.53	40.39	16.91	57.3	74	-16.7	PK
		2500	29.19	16.92	46.11	54	-7.89	AVG
	*	4882	36.8	5.31	42.11	74	-31.89	PK

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000


Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1


TX, 8DPSK (Ch 39)
Radiated Spurious Emission, Horizontal

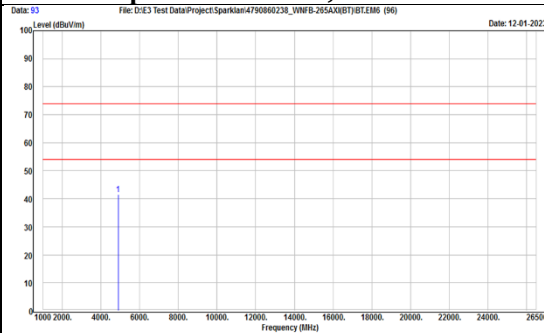


TX, 8DPSK (Ch 39)
Radiated Spurious Emission, Vertical

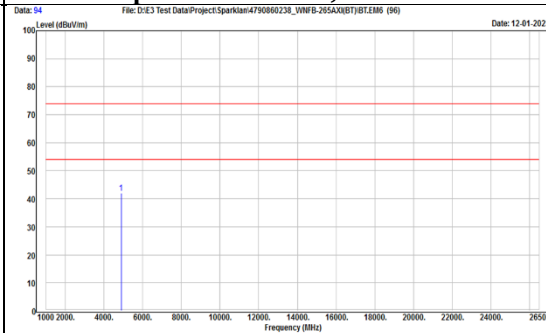


TX, 8DPSK (Ch 39)
Band Edge (Average), Horizontal

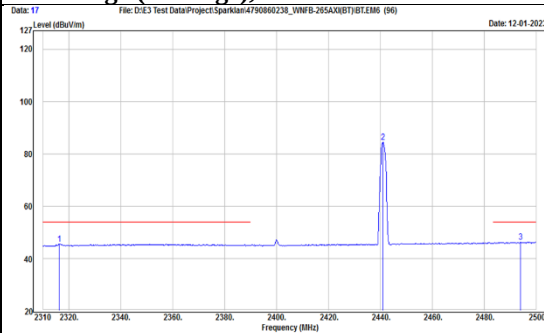


TX, 8DPSK (Ch 39)
Band Edge (Average), Vertical

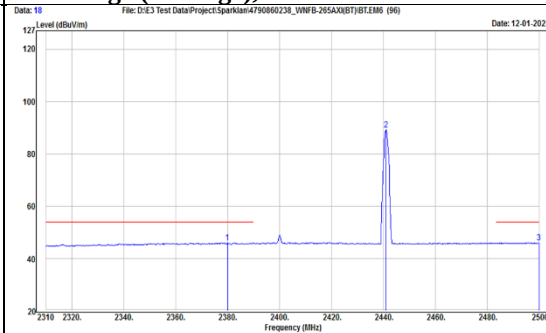

TX, 8DPSK (Ch 39)
Band Edge (Peak), Horizontal

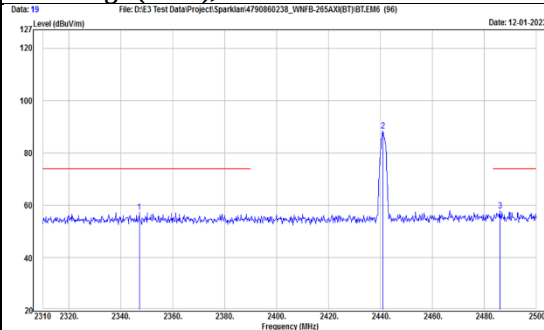

TX, 8DPSK (Ch 39)
Band Edge (Peak), Vertical

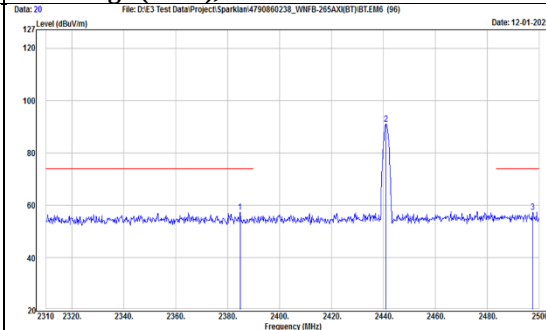

Mode	8DPSK	Channel	78
------	-------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	2480	74.3	16.76	91.06	N/A	N/A	PK
	@	2480	72.09	16.76	88.85	N/A	N/A	AVG
		2493.54	40	16.87	56.87	74	-17.13	PK
		2495.44	29.46	16.88	46.34	54	-7.66	AVG
	*	4960	38.13	5.42	43.55	74	-30.45	PK
Vertical	@	2480	73.25	16.76	90.01	N/A	N/A	PK
	@	2480	69.38	16.76	86.14	N/A	N/A	AVG
		2497.15	41.47	16.89	58.36	74	-15.64	PK
		2500	29.15	16.92	46.07	54	-7.93	AVG
	*	4960	37.65	5.42	43.07	74	-30.93	PK


Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948


Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1

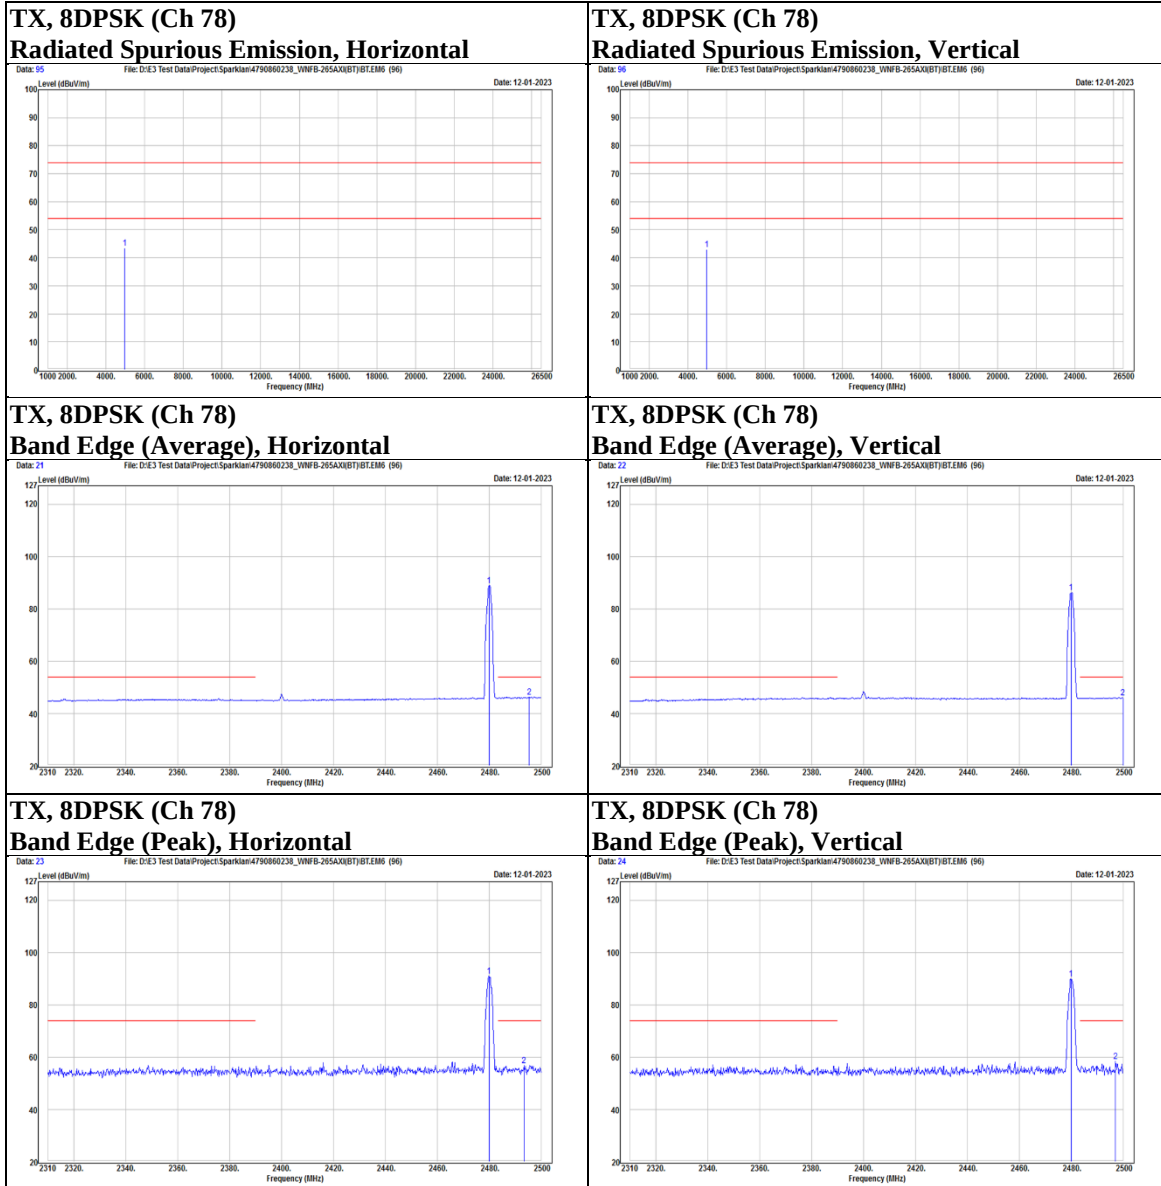

Below 1 GHz

Mode	GFSK	Channel	0
------	------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		167.74	53.9	-11.85	42.05	43.5	-1.45	PK
		233.7	55.84	-13.37	42.47	46	-3.53	PK
		408.3	49.89	-7.63	42.26	46	-3.74	PK
		466.5	47.91	-5.65	42.26	46	-3.74	PK
		566.41	45.51	-3.61	41.9	46	-4.1	PK
		600.36	46.37	-2.38	43.99	46	-2.01	PK
Vertical		167.74	54.63	-11.85	42.78	43.5	-0.72	PK
		199.75	53.39	-14.81	38.58	43.5	-4.92	PK
		312.27	49.81	-10.24	39.57	46	-6.43	PK
		408.3	47.8	-7.63	40.17	46	-5.83	PK
		499.48	44.07	-5.16	38.91	46	-7.09	PK
		600.36	45.15	-2.38	42.77	46	-3.23	PK

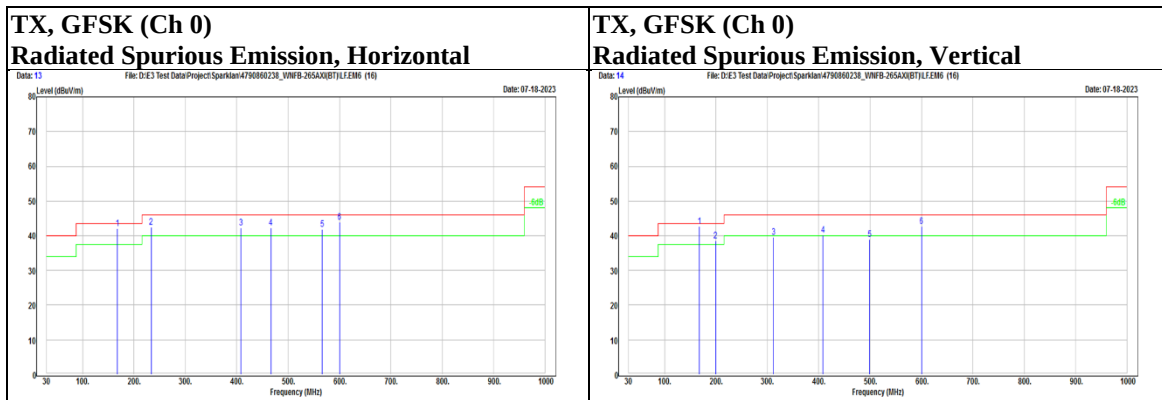

9 kHz ~ 30 MHz Data:

For 9 kHz to 30 MHz radiated emission have performed all modes of operation were investigated. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

No non-compliance noted:

KDB 414788 D01 OATS and Chamber Correlation Justification

- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.
- OATs and chamber correlation testing had been performed and chamber measured test results is the worst case test result.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

END OF REPORT**Underwriters Laboratories Taiwan Co., Ltd.**

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004737 (DCS:17-EM-F0876) / 6.1