

FCC TEST REPORT (15.407)

REPORT NO.: RF960920L02

MODEL NO.: Pixium FE 3543 pR

RECEIVED: Sep. 20, 2007

TESTED: Sep. 22 ~ Oct. 08, 2007

ISSUED: Oct. 16, 2007

APPLICANT: TRIXELL

ADDRESS: 460, rue du Pommarin 38430 MOIRANS -
FRANCE

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Kwei Shan Hsiang,
Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 51 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	6
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4	DESCRIPTION OF SUPPORT UNITS	11
4.	TEST TYPES AND RESULTS	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT	17
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	17
4.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	17
4.2.3	TEST INSTRUMENTS	18
4.2.4	TEST PROCEDURES	19
4.2.5	DEVIATION FROM TEST STANDARD	19
4.2.6	TEST SETUP	20
4.2.7	EUT OPERATING CONDITION	20
4.2.8	TEST RESULTS	21
4.3	PEAK TRANSMIT POWER MEASUREMENT	26
4.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	26
4.3.2	TEST INSTRUMENTS	26
4.3.3	TEST PROCEDURE	26
4.3.4	DEVIATION FROM TEST STANDARD	27
4.3.5	TEST SETUP	27
4.3.6	EUT OPERATING CONDITIONS	27
4.3.7	TEST RESULTS	28
4.4	PEAK POWER EXCURSION MEASUREMENT	32
4.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	32
4.4.2	TEST INSTRUMENTS	32
4.4.3	TEST PROCEDURE	32
4.4.4	DEVIATION FROM TEST STANDARD	33
4.4.5	TEST SETUP	33
4.4.6	EUT OPERATING CONDITIONS	33

4.4.7	TEST RESULTS	34
4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	36
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	36
4.5.2	TEST INSTRUMENTS	36
4.5.3	TEST PROCEDURES	36
4.5.4	DEVIATION FROM TEST STANDARD	36
4.5.5	TEST SETUP	37
4.5.6	EUT OPERATING CONDITIONS	37
4.5.7	TEST RESULTS	38
4.6	FREQUENCY STABILITY	40
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	40
4.6.2	TEST INSTRUMENTS	40
4.6.3	TEST PROCEDURE	40
4.6.4	DEVIATION FROM TEST STANDARD	41
4.6.5	TEST SETUP	41
4.6.6	EUT OPERATING CONDITION	41
4.6.7	TEST RESULTS	42
4.7	BAND EDGES MEASUREMENT	43
4.7.1	TEST INSTRUMENTS	43
4.7.2	TEST PROCEDURE	43
4.7.3	EUT OPERATING CONDITION	43
4.7.4	TEST RESULTS	43
4.8	ANTENNA REQUIREMENT	48
4.8.1	STANDARD APPLICABLE	48
4.8.2	ANTENNA CONNECTED CONSTRUCTION	48
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	49
6.	INFORMATION ON THE TESTING LABORATORIES	50
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	51

1. CERTIFICATION

PRODUCT: Front End

MODEL: Pixium FE 3543 pR

BRAND: TRIXELL

APPLICANT: TRIXELL

TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Sep. 22 ~ Oct. 08, 2007

STANDARDS: FCC Part 15, Subpart E (Section 15.407)

ANSI C63.4-2003

The above equipment (Model: Pixium FE 3543 pR) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Peggy Chen , **DATE:** Oct. 16, 2007
Peggy Chen / Specialist

TECHNICAL ACCEPTANCE : Long Chen , **DATE:** Oct. 16, 2007
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE:** Oct. 16, 2007
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -65.49dB at 1.354MHz.
15.407(b)(1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -2.34dB at 902.89MHz.
15.407(a)(1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Front End
MODEL NO.	Pixium FE 3543 pR
FCC ID	VPQPIXIUMFE3543PR
POWER SUPPLY	10.8Vdc from Li-ion battery
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11, 5.5, 2, 1Mbps 802.11g: up to 54Mbps 802.11a: 54, 48, 36, 24, 18, 12, 9, 6Mbps
FREQUENCY RANGE	2.4GHz: 2.400 ~ 2.4835GHz 5.0GHz: 5.15 ~ 5.25GHz & 5.725 ~ 5.850GHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g 5.0GHz: 5150 ~ 5250MHz: 4 for 802.11a 5725 ~ 5850MHz: 5 for 802.11a
OUTPUT POWER	28.576mW for 2400 ~ 2483.5MHz 15.101mW for 5150 ~ 5250MHz 45.394mW for 5725 ~ 5850MHz
ANTENNA TYPE	Patch antenna with +6.9dBi gain for 2.4 GHz Patch antenna with +10.7dBi gain for 5.0 GHz
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	NA

NOTE:

1. The following docking station was provided to this EUT.

BRAND	TRIXELL
MODEL	Pixium DS 3543 pR

2. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
3. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES


Operated in 5150 ~ 5250MHz

4 channels are provided for 802.11a:


CHANNEL	FREQUENCY
1	5180 MHz
2	5200 MHz
3	5220 MHz
4	5240 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Test Mode A

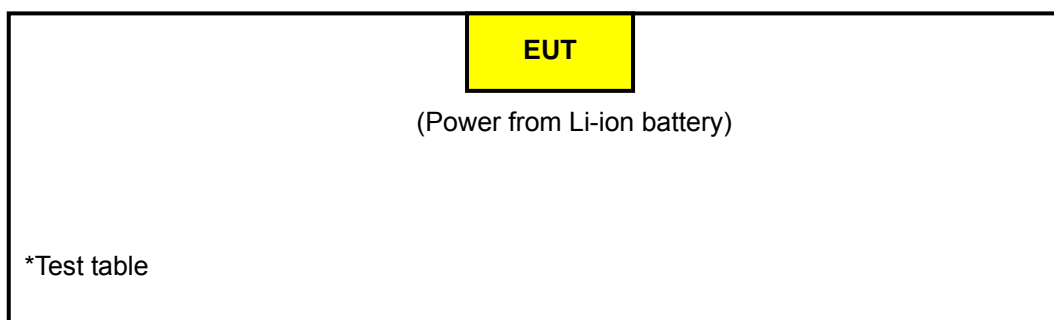

Test Mode B

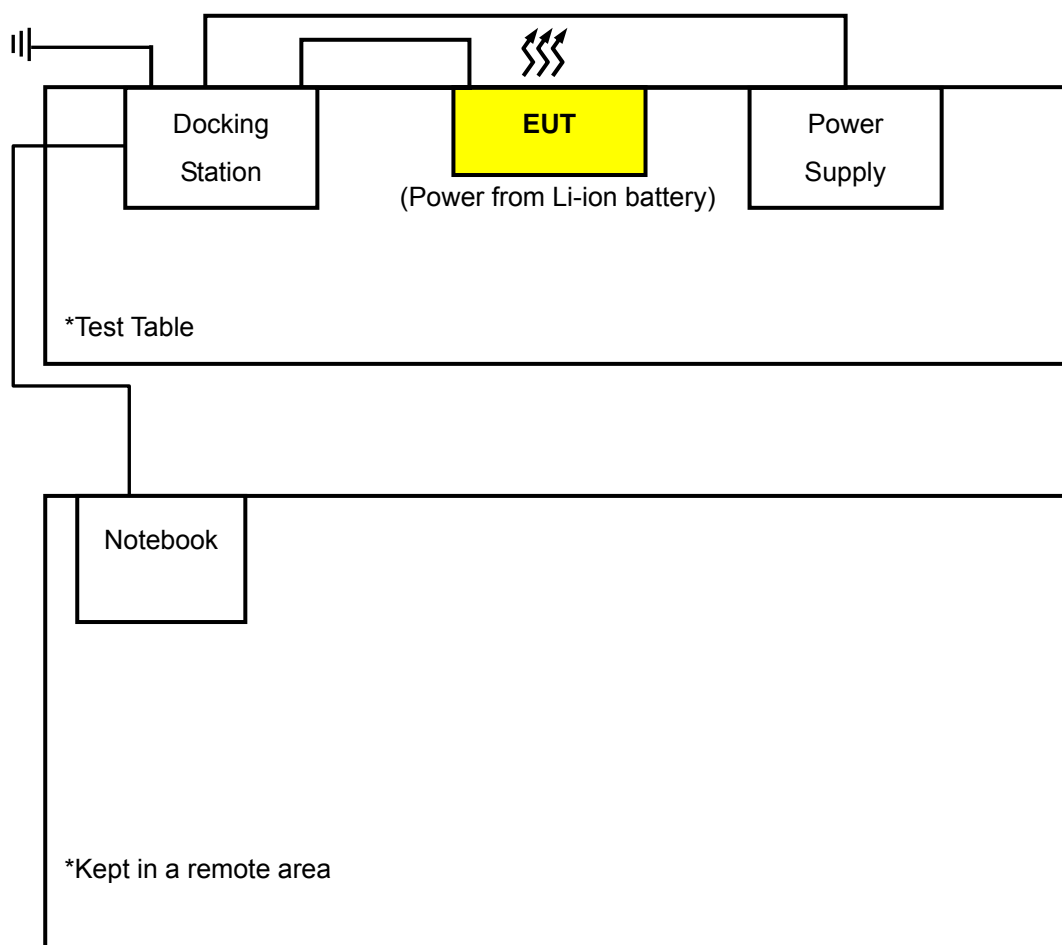

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE<1G	RE≥1G	APCM	
A	-	√	-	-	EUT only
B	√	√	√	√	EUT with Docking Station

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

“-”: Means no effect.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11a	1 to 4	1	OFDM	BPSK	6.0

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A, B	802.11a	1 to 4	1	OFDM	BPSK	6.0	X

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
B	802.11a	1 to 4	1, 2, 4	OFDM	BPSK	6.0	X

BANDEDGE MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11a	1 to 4	1, 4	OFDM	BPSK	6.0

ANTENNA PORT CONDUCTED MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11a	1 to 4	1, 2, 4	OFDM	BPSK	6.0

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DOCKING STATION	TRIXELL	Pixium DS 3543 pR	NA	VPQPIXIUMDS3543PR
2	POWER SUPPLY	ISO-TECH	IPS 303DD	NA	NA
3	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	2.0 m ground cable without core 7.0 m data cable without core
2	NA
3	NA

NOTE 1: All power cords of the above support units are non shielded (1.8m).

NOTE 2: Item 1 acted as communication partners to transfer data.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Dec. 08, 2007
RF signal cable Woken	5D-FB	Cable-HYCO3-01	Jan. 06, 2008
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 08, 2008
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 16, 2008
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

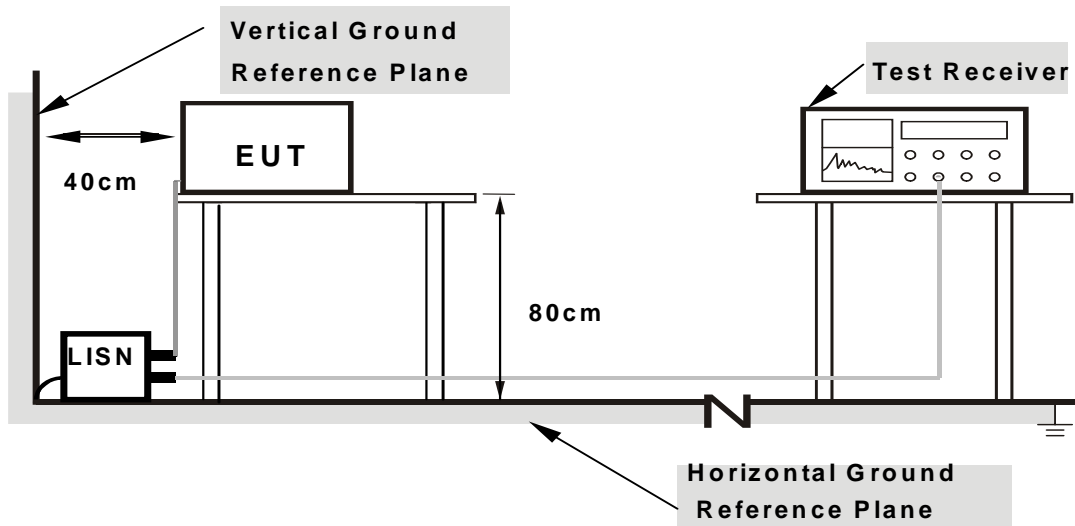

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- Connected EUT with docking station and placed them on a testing table.
- Prepared notebook computer and placed it outside of testing area to act as communication partner for EUT.
- The EUT ran a test program (provided by manufacturer) to enable all functions under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 802.11a OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	6dB BANDWIDTH	9kHz
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	-9.09	-	-8.99	-	66.00	56.00	-74.99	-
2	0.457	0.10	-10.88	-	-10.78	-	56.75	46.75	-67.53	-
3	1.354	0.15	-9.64	-	-9.49	-	56.00	46.00	-65.49	-
4	3.595	0.27	-10.02	-	-9.75	-	56.00	46.00	-65.75	-
5	7.529	0.31	-9.47	-	-9.16	-	60.00	50.00	-69.16	-
6	14.328	0.46	-8.99	-	-8.53	-	60.00	50.00	-68.53	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

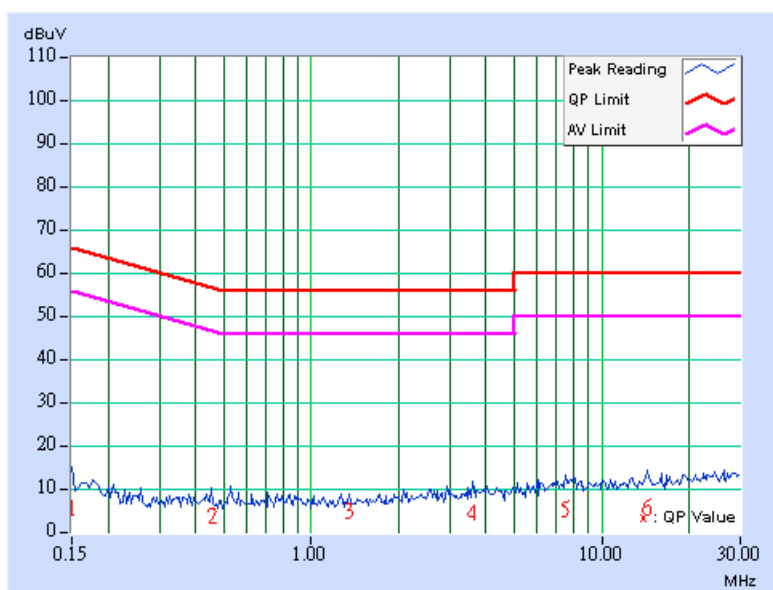

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	6dB BANDWIDTH	9kHz
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	-9.07	-	-8.97	-	66.00	56.00	-74.97	-
2	0.534	0.12	-11.06	-	-10.94	-	56.00	46.00	-66.94	-
3	1.400	0.21	-9.75	-	-9.54	-	56.00	46.00	-65.54	-
4	4.667	0.30	-10.14	-	-9.84	-	56.00	46.00	-65.84	-
5	7.514	0.37	-7.06	-	-6.69	-	60.00	50.00	-66.69	-
6	20.115	0.57	-7.76	-	-7.19	-	60.00	50.00	-67.19	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

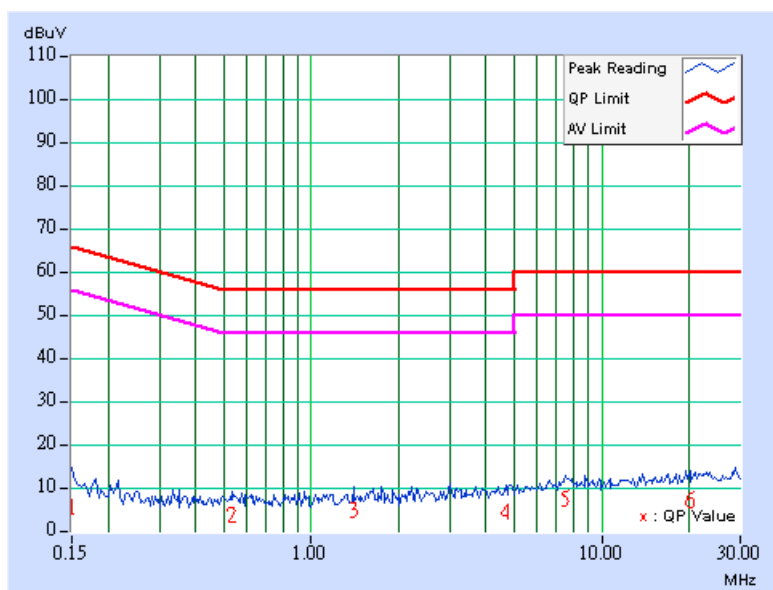

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

FREQUENCIES (MHz)	EIRP LIMIT (dBm)		EQUIVALENT FIELD STRENGTH AT 3m (dBμV/m) *NOTE 3	
	PK	AV	PK	AV
5150 ~ 5250	-7	-27	88.3	68.3
5250 ~ 5350	-7	-27	88.3	68.3
5470 ~ 5725	-7	-27	88.3	68.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Jul. 27, 2008
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 05, 2008
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Jan. 04, 2008
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Jul. 30, 2008
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 16, 2008
Preamplifier Agilent	8449B	3008A01910	Sep. 19, 2008
Preamplifier Agilent	8447D	2944A10638	Dec. 20, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218188/218189	Nov. 14, 2007
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008
Software	ADT_Radiated_V7.6	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Turn Table EMCO	2087-2.03	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	07026401	Apr. 23, 2008

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC3789B-9.

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

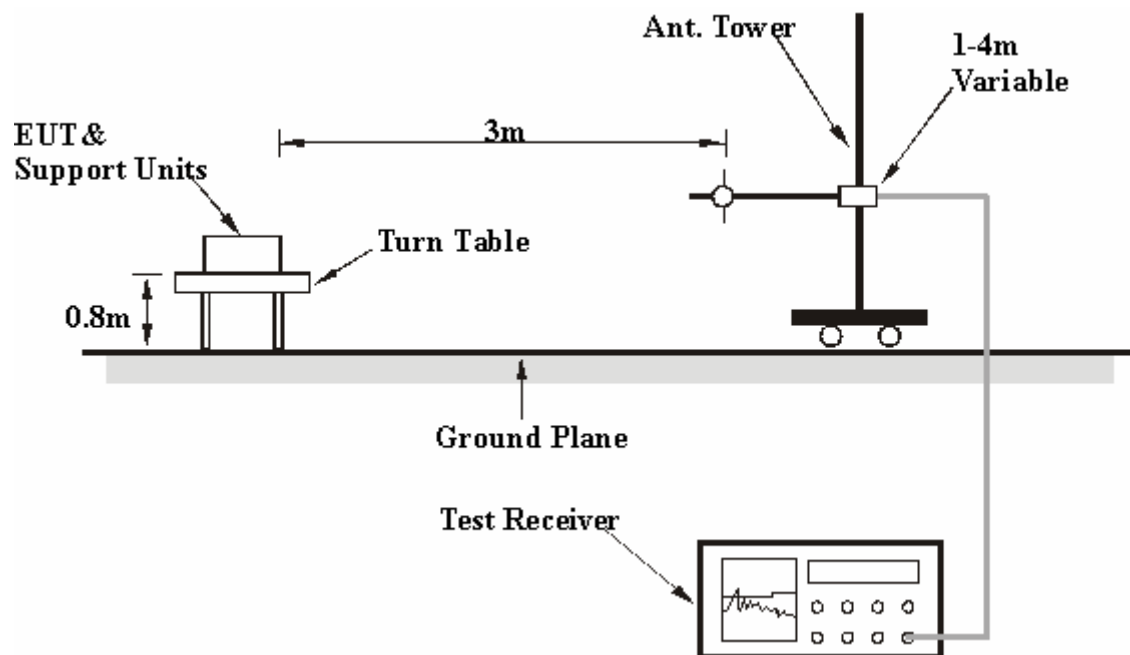

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA: 802.11a OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	A	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	401.26	39.54 QP	46.00	-6.46	1.00 H	58	23.79	15.75
2	601.52	37.36 QP	46.00	-8.64	2.00 H	346	16.25	21.11
3	702.62	39.24 QP	46.00	-6.76	1.50 H	265	17.18	22.06
4	803.73	36.01 QP	46.00	-9.99	1.50 H	223	11.61	24.40
5	902.89	43.66 QP	46.00	-2.34	1.50 H	211	18.32	25.34
6	955.38	38.54 QP	46.00	-7.46	1.00 H	34	12.79	25.75

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	68.79	36.07 QP	40.00	-3.93	1.00 V	208	24.46	11.61
2	105.73	33.42 QP	43.50	-10.08	1.50 V	313	23.58	9.84
3	401.26	39.35 QP	46.00	-6.65	1.50 V	271	23.60	15.75
4	601.52	40.82 QP	46.00	-5.18	1.00 V	313	19.71	21.11
5	702.62	41.02 QP	46.00	-4.98	1.00 V	235	18.97	22.06
6	803.73	37.45 QP	46.00	-8.55	1.50 V	133	13.05	24.40
7	834.84	35.25 QP	46.00	-10.75	1.00 V	154	10.55	24.70
8	869.83	35.37 QP	46.00	-10.63	1.00 V	160	10.34	25.03
9	902.89	42.88 QP	46.00	-3.12	1.00 V	157	17.53	25.34
10	957.33	39.56 QP	46.00	-6.44	1.00 V	187	13.81	25.75

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Quasi-Peak
TEST MODE	B	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	70.73	31.79 QP	40.00	-8.21	1.50 H	220	20.66	11.13
2	199.05	38.90 QP	43.50	-4.60	1.00 H	271	28.50	10.40
3	333.21	34.36 QP	46.00	-11.64	1.00 H	139	20.20	14.16
4	399.31	32.99 QP	46.00	-13.01	2.00 H	1	17.30	15.69
5	599.58	38.19 QP	46.00	-7.81	1.50 H	34	17.10	21.09
6	700.68	37.91 QP	46.00	-8.09	1.00 H	10	15.91	22.01
7	799.84	36.59 QP	46.00	-9.41	1.00 H	187	12.23	24.36
8	900.94	32.04 QP	46.00	-13.96	1.50 H	274	6.71	25.32

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.23	34.27 QP	40.00	-5.73	1.00 V	49	20.71	13.55
2	70.73	35.64 QP	40.00	-4.36	2.00 V	190	24.51	11.13
3	129.06	33.36 QP	43.50	-10.14	1.00 V	109	21.46	11.90
4	333.21	35.07 QP	46.00	-10.93	1.00 V	64	20.91	14.16
5	599.58	41.03 QP	46.00	-4.97	1.00 V	10	19.94	21.09
6	700.68	36.24 QP	46.00	-9.76	1.00 V	229	14.23	22.01
7	799.84	35.13 QP	46.00	-10.87	2.00 V	199	10.77	24.36
8	900.94	33.83 QP	46.00	-12.17	1.00 V	199	8.50	25.32

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

ABOVE 1GHz DATA: 802.11a OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40GHz
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak (PK) Average (AV)
TEST MODE	B	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3453.00	44.93 PK	88.30	-43.37	1.20 H	3	11.09	33.84
2	3453.00	35.94 AV	68.30	-32.36	1.20 H	3	2.10	33.84
3	#5150.00	53.66 PK	74.00	-20.34	1.00 H	349	15.07	38.59
4	#5150.00	43.12 AV	54.00	-10.88	1.00 H	349	4.53	38.59
5	*5180.00	110.59 PK			1.00 H	349	71.95	38.64
6	*5180.00	99.06 AV			1.00 H	349	60.42	38.64
7	10360.00	59.44 PK	88.30	-28.86	1.08 H	145	10.74	48.70
8	10360.00	45.97 AV	68.30	-22.33	1.08 H	145	-2.73	48.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3453.00	44.74 PK	88.30	-43.56	1.13 V	30	10.90	33.84
2	3453.00	33.32 AV	68.30	-34.98	1.13 V	30	-0.52	33.84
3	#5150.00	51.34 PK	74.00	-22.66	1.35 V	360	12.75	38.59
4	#5150.00	40.87 AV	54.00	-13.13	1.35 V	360	2.28	38.59
5	*5180.00	102.07 PK			1.35 V	360	63.43	38.64
6	*5180.00	90.08 AV			1.35 V	360	51.44	38.64
7	10360.00	59.18 PK	88.30	-29.12	1.08 V	360	10.48	48.70
8	10360.00	45.98 AV	68.30	-22.32	1.08 V	360	-2.72	48.70

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 2	FREQUENCY RANGE	1 ~ 40GHz
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak (PK) Average (AV)
TEST MODE	B	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	110.74 PK			1.00 H	38	72.07	38.67
2	*5200.00	98.89 AV			1.00 H	38	60.22	38.67
3	10400.00	54.96 PK	88.30	-33.34	1.00 H	333	6.19	48.77
4	10400.00	45.21 AV	68.30	-23.09	1.00 H	333	-3.56	48.77

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	101.16 PK			1.35 V	117	62.49	38.67
2	*5200.00	89.63 AV			1.35 V	117	50.96	38.67
3	10400.00	55.96 PK	88.30	-32.34	1.21 V	0	7.19	48.77
4	10400.00	44.56 AV	68.30	-23.74	1.21 V	0	-4.21	48.77

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 40GHz
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak (PK) Average (AV)
TEST MODE	B	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	110.97 PK			1.00 H	216	72.26	38.71
2	*5240.00	100.04 AV			1.00 H	216	61.33	38.71
3	#5350.00	46.66 PK	74.00	-27.34	1.00 H	216	7.85	38.81
4	#5350.00	37.49 AV	54.00	-16.51	1.00 H	216	-1.32	38.81
5	10480.00	55.28 PK	88.30	-33.02	1.00 H	15	6.27	49.01
6	10480.00	45.66 AV	68.30	-22.64	1.00 H	15	-3.35	49.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	103.11 PK			1.40 V	15	64.40	38.71
2	*5240.00	91.77 AV			1.40 V	15	53.06	38.71
3	#5350.00	46.24 PK	74.00	-27.76	1.40 V	15	7.43	38.81
4	#5350.00	37.17 AV	54.00	-16.83	1.40 V	15	-1.64	38.81
5	10480.00	45.35 PK	88.30	-42.95	1.01 V	360	-3.66	49.01
6	10480.00	45.04 AV	68.30	-23.26	1.01 V	360	-3.97	49.01

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency falling in the restricted band.

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.150 ~ 5.250GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.250 ~ 5.350GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.470 ~ 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 300kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.


NOTE: The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 3 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

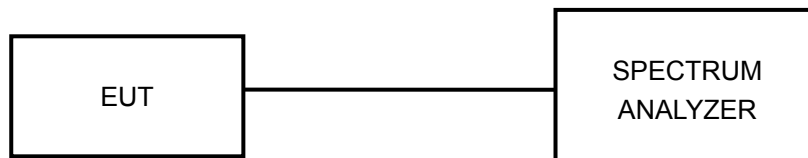

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


4.3.7 TEST RESULTS

PEAK POWER OUTPUT: 802.11a OFDM MODULATION:


MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
INPUT POWER	120Vac, 60Hz	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	5180	14.928	11.74	12.30	PASS
2	5200	15.101	11.79	12.30	PASS
4	5240	14.825	11.71	12.30	PASS


CH 1

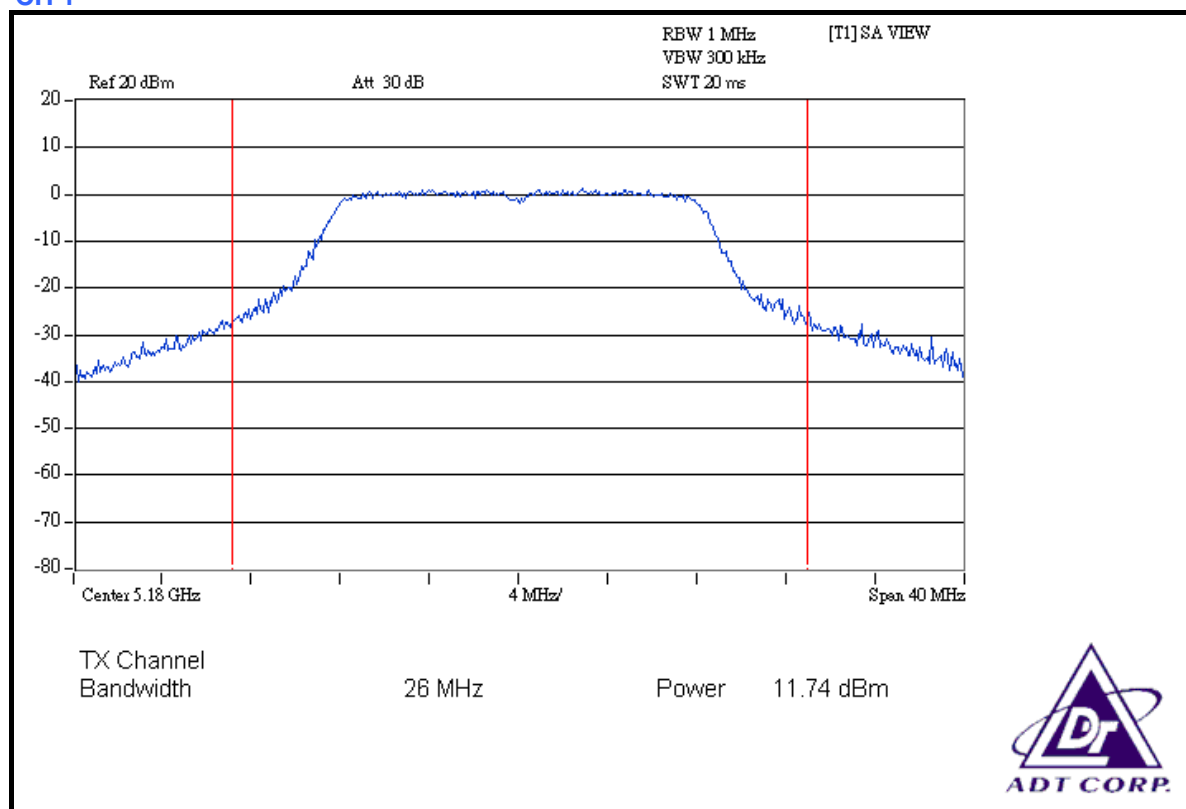

CH 2

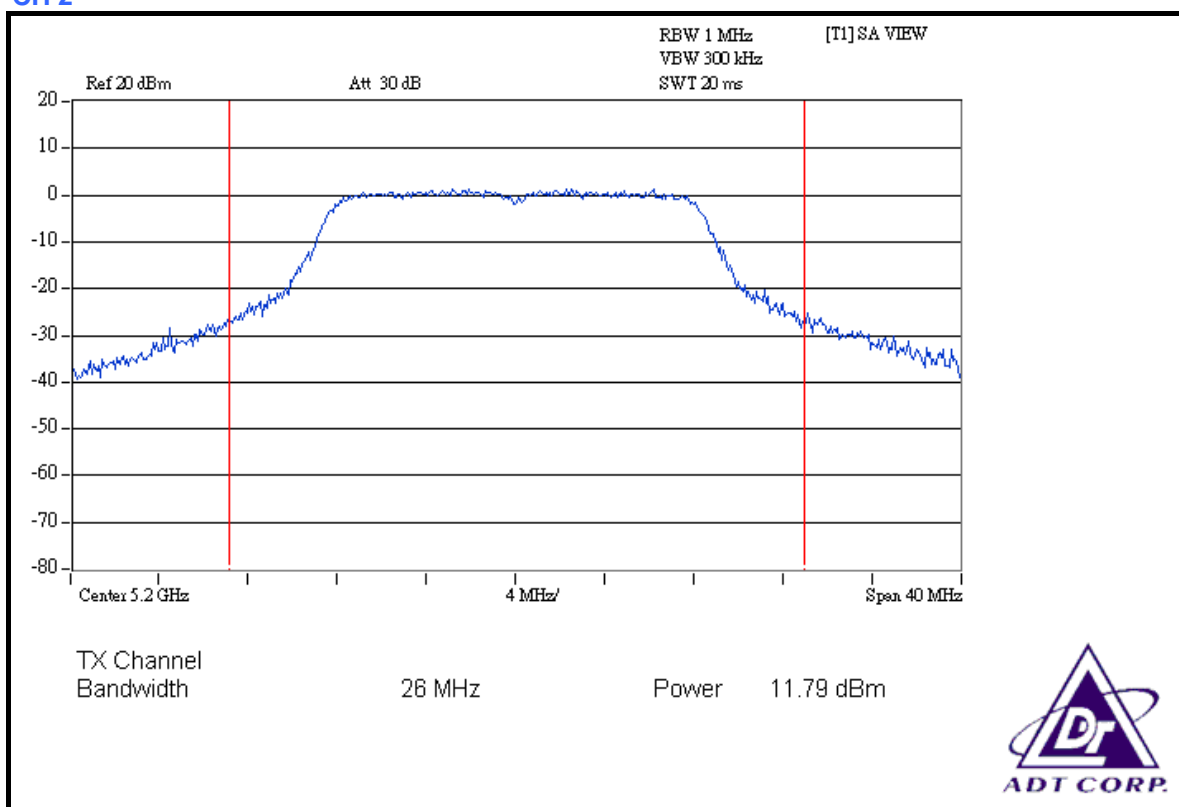

CH 4

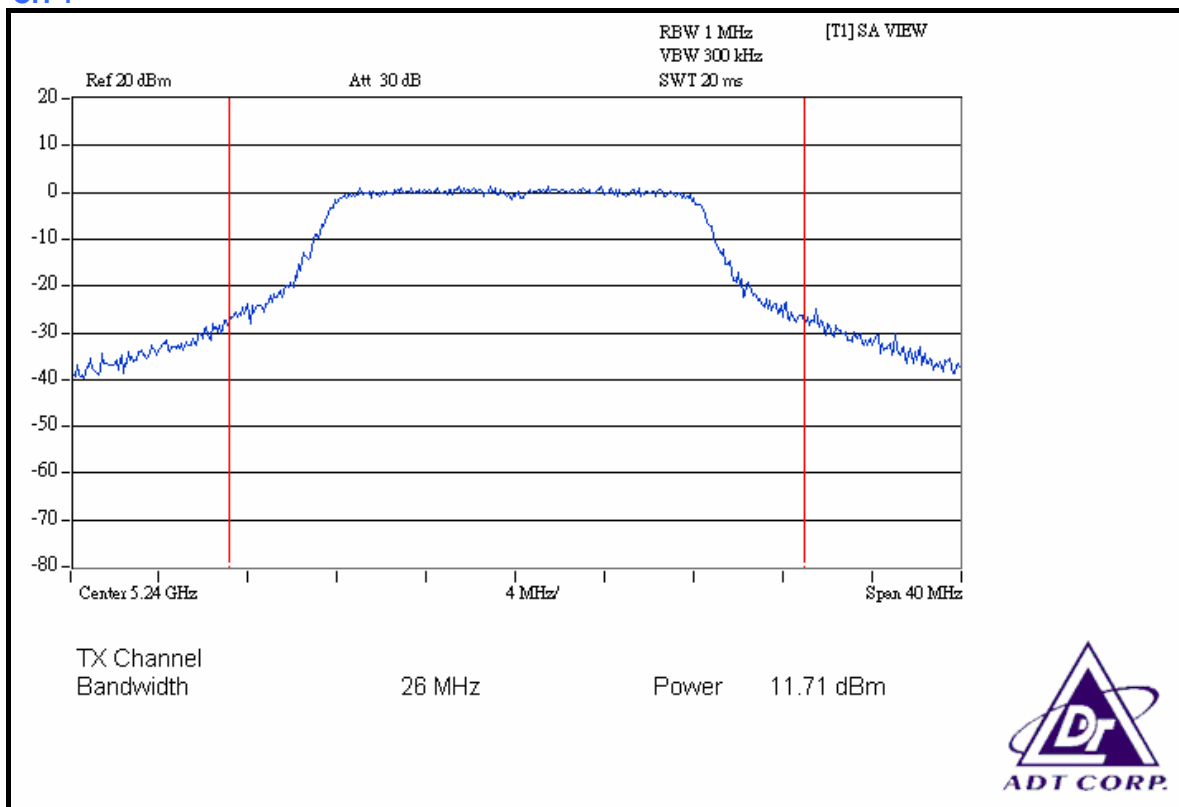


26dB OCCUPIED BANDWIDTH: 802.11a OFDM MODULATION:


MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	26deg.C, 67%RH, 991hPa
INPUT POWER	120Vac, 60Hz	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)	PASS / FAIL
1	5180	25.22	PASS
2	5200	25.56	PASS
4	5240	25.81	PASS


CH 1

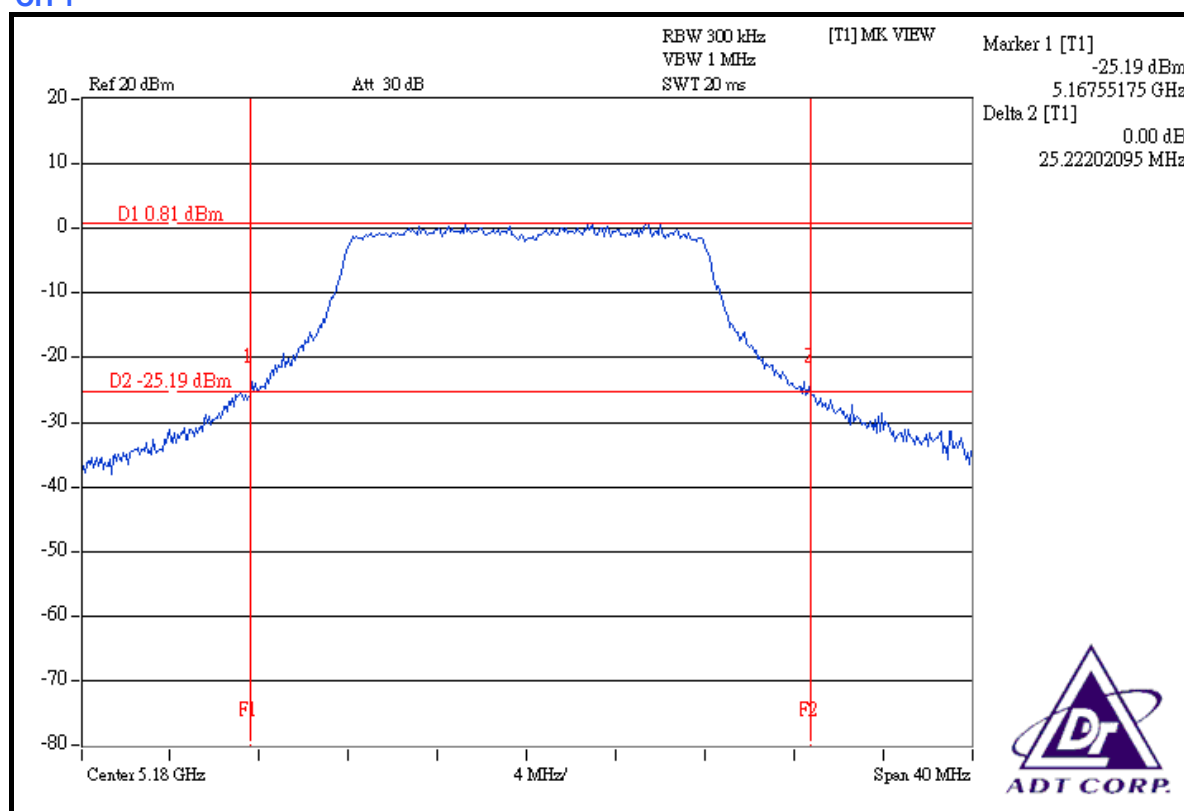

CH 2

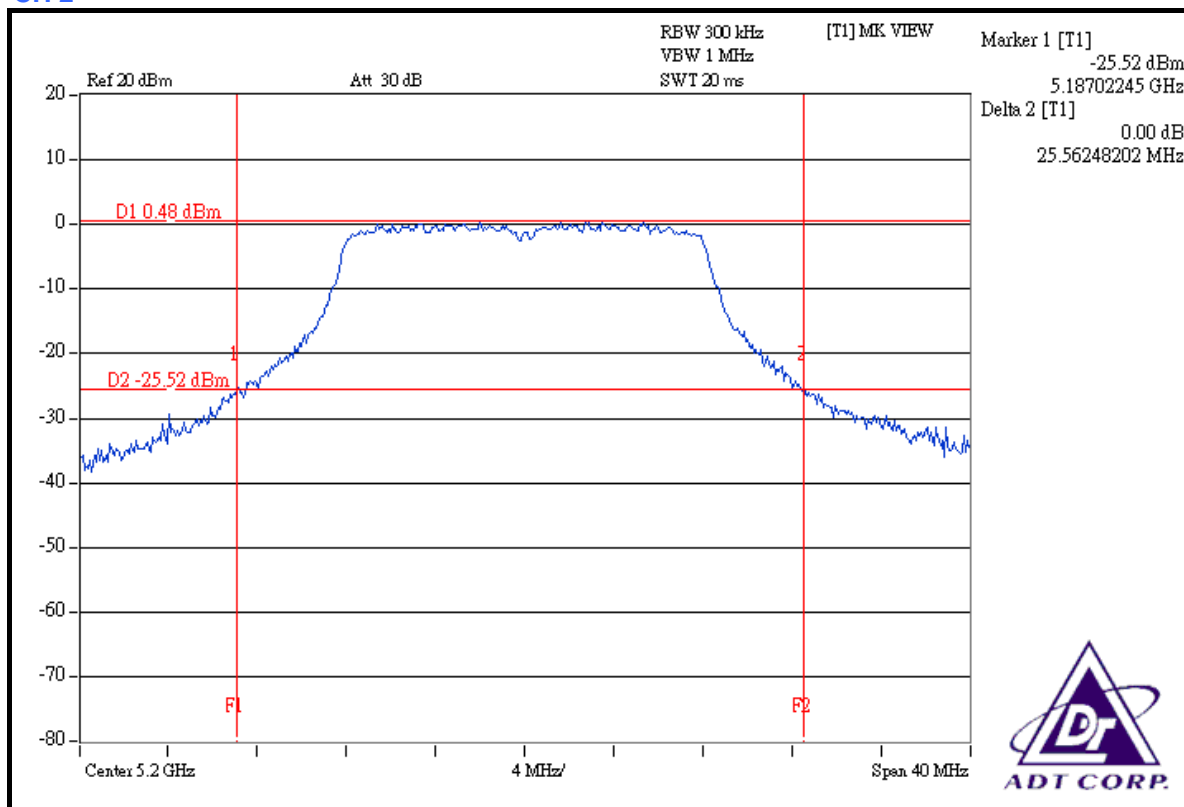

CH 4

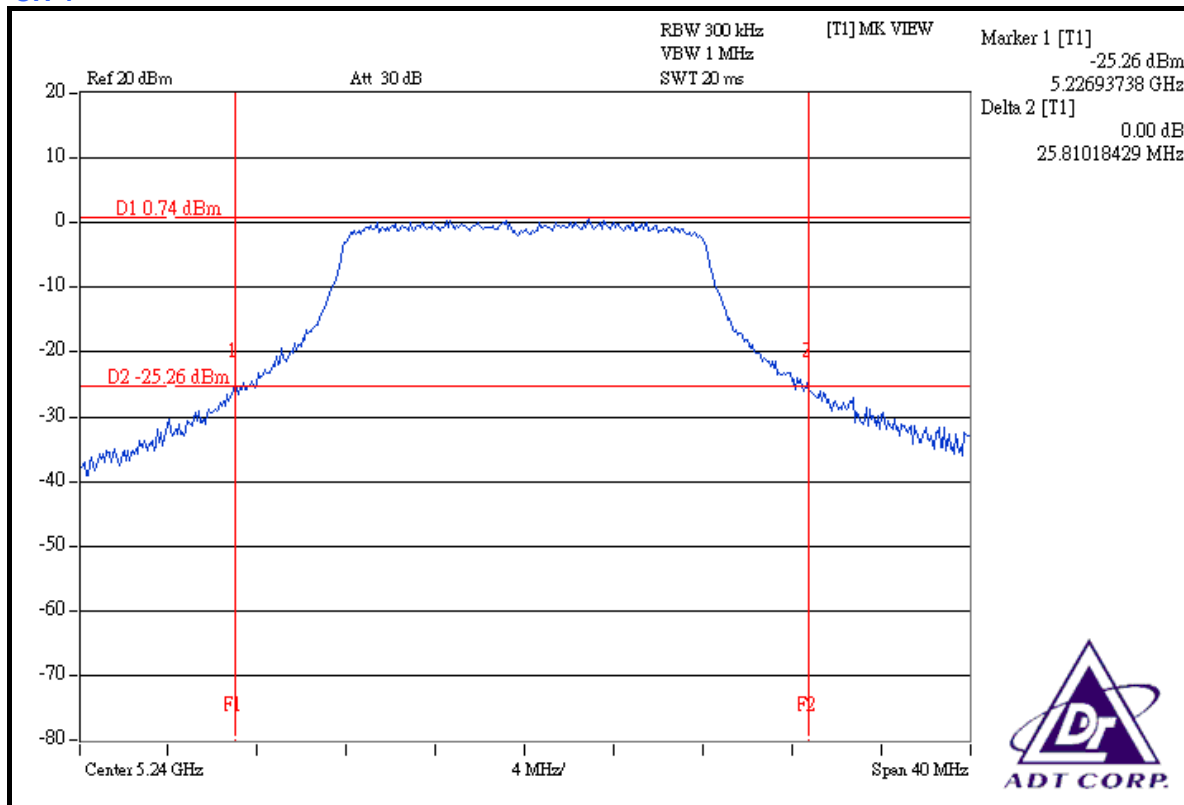

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

FREQUENCY BAND	LIMIT
5.150 ~ 5.250GHz	13dB
5.250 ~ 5.350GHz	13dB
5.470 ~ 5.725GHz	13dB

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB = 1MHz, VB = 3MHz) and 2 (RB = 1MHz, VB = 300kHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

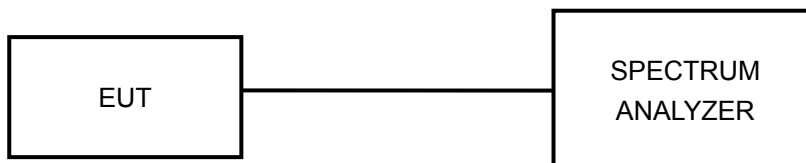

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


4.4.7 TEST RESULTS

802.11a OFDM MODULATION:


MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
INPUT POWER	120Vac, 60Hz	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK TO AVERAGE EXCURSION LIMIT (dB)	PASS / FAIL
1	5180	9.33	13	PASS
2	5200	8.71	13	PASS
4	5240	8.54	13	PASS


CH 1

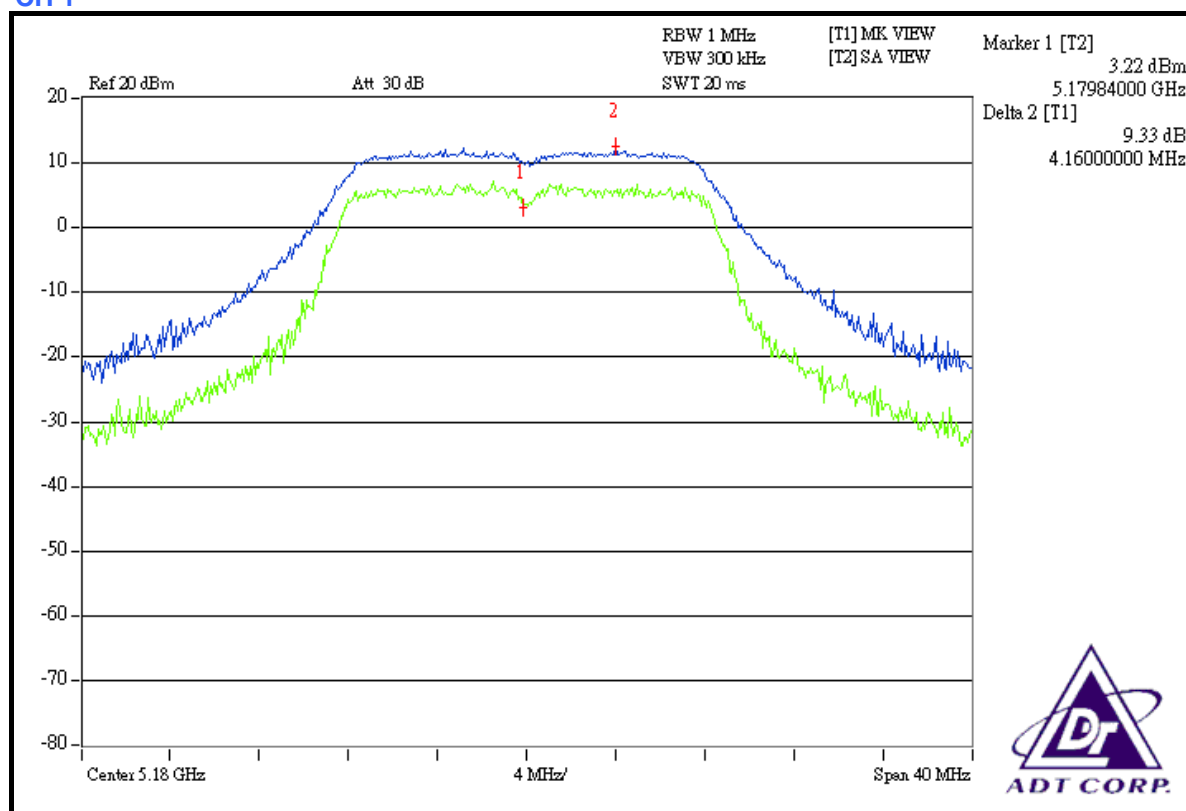

CH 2

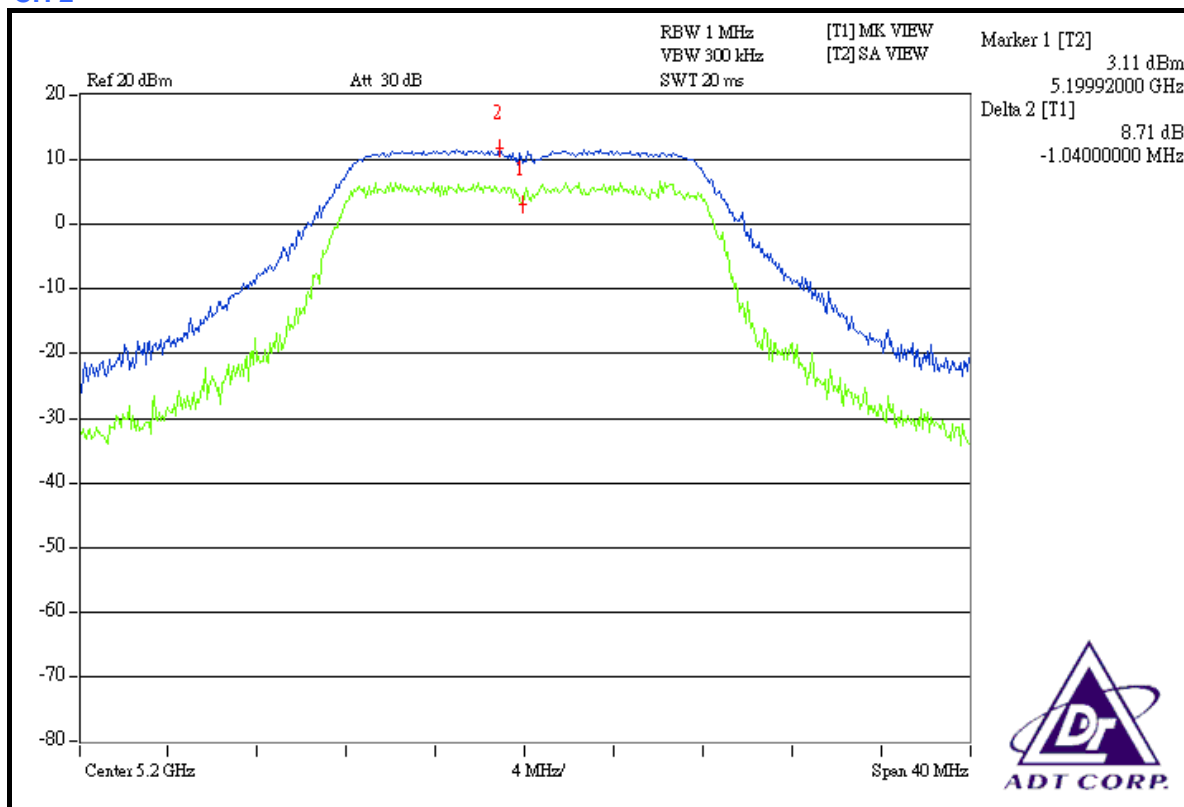

CH 4

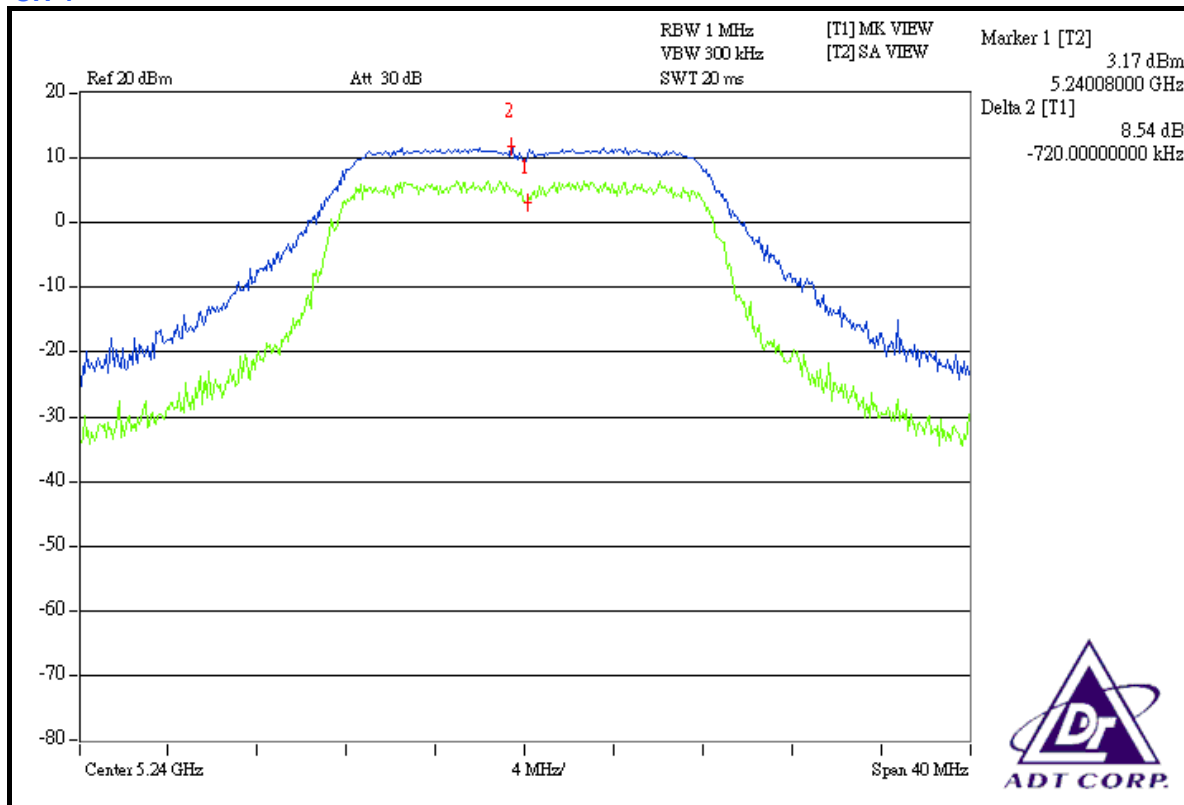

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

FREQUENCY BAND	LIMIT
5.150 ~ 5.250GHz	4dBm
5.250 ~ 5.350GHz	11dBm
5.470 ~ 5.725GHz	11dBm

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

- The transmitter output was connected to the spectrum analyzer.
- Set RBW = 1MHz, VBW = 3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

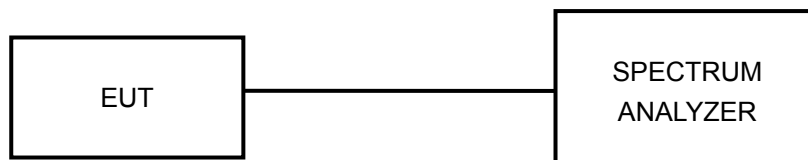

4.5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


4.5.7 TEST RESULTS

802.11a OFDM MODULATION:


MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
INPUT POWER	120Vac, 60Hz	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	5180	-1.49	-0.7	PASS
2	5200	-1.54	-0.7	PASS
4	5240	-1.62	-0.7	PASS


CH 1

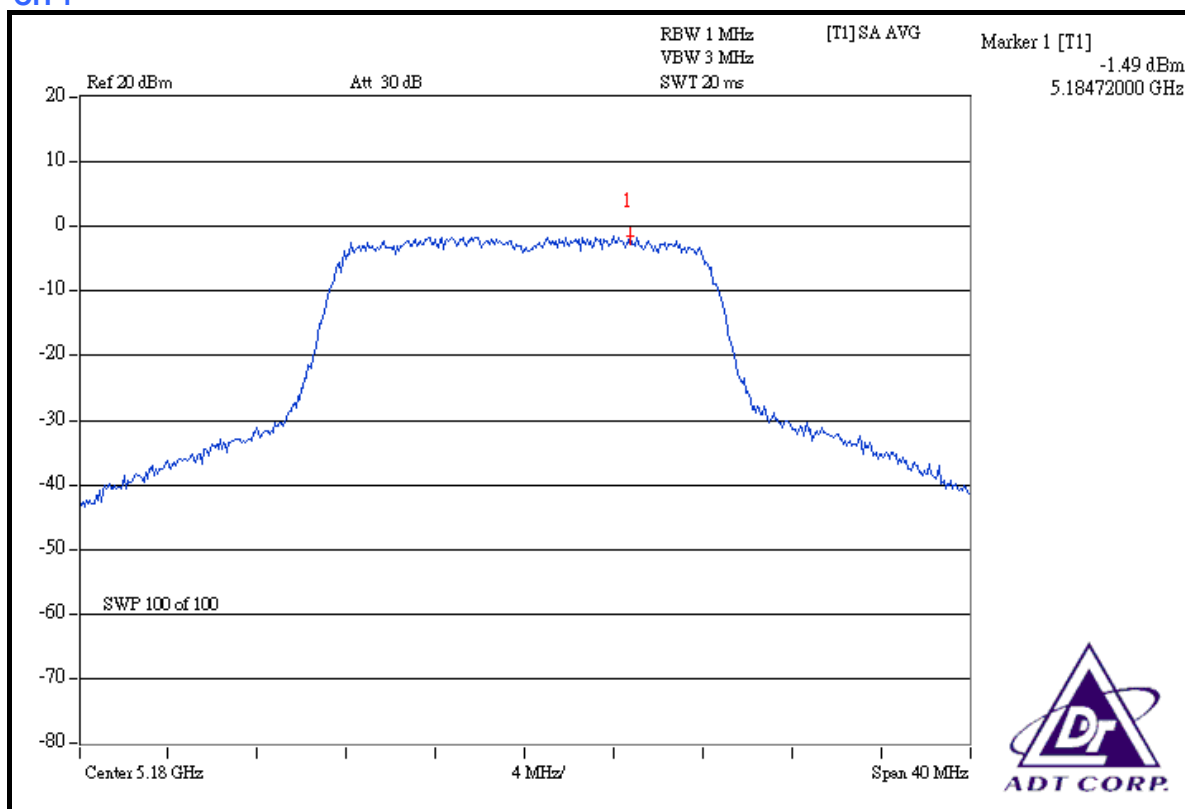

CH 2

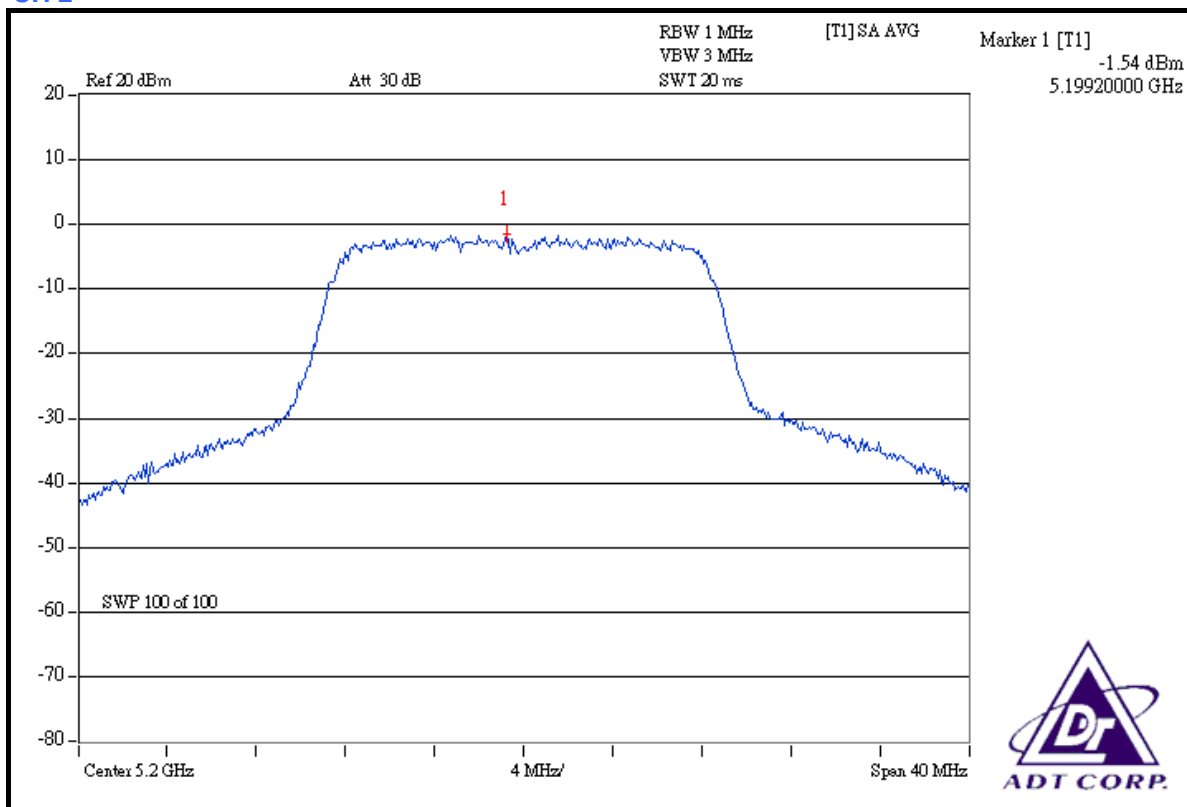

CH 4

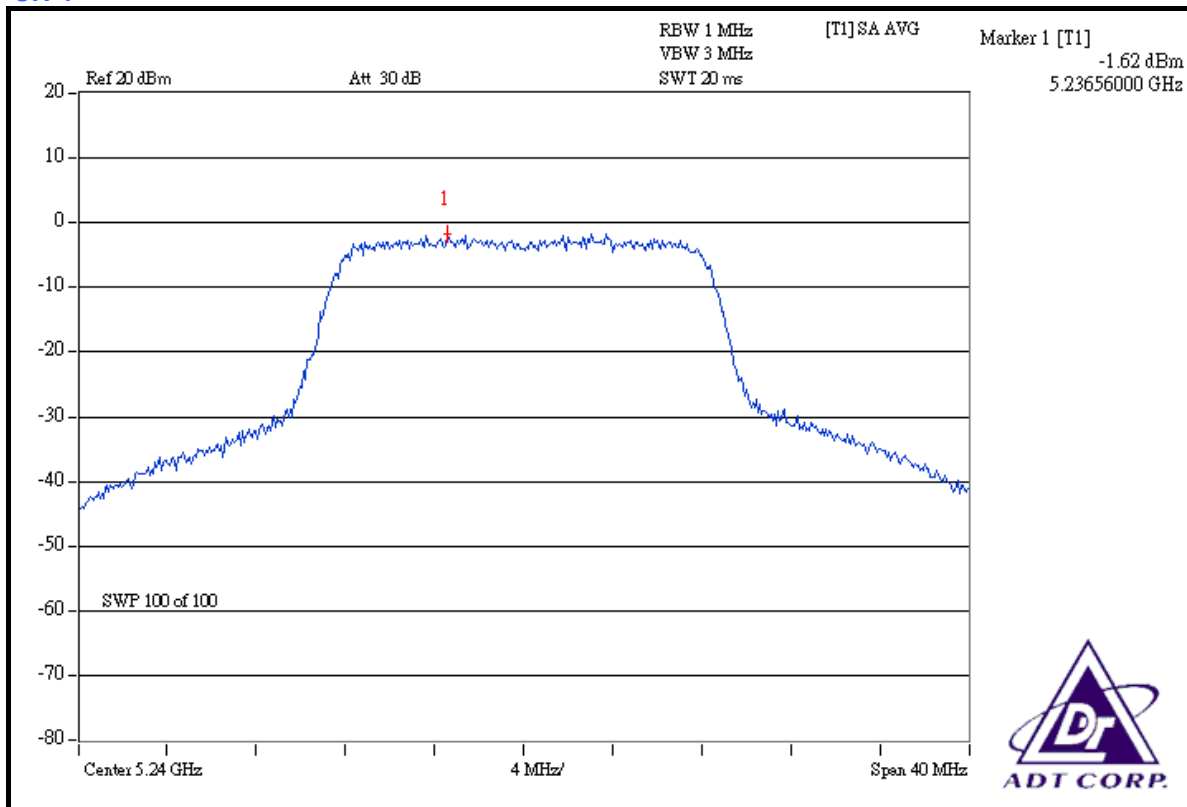

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.02\%$ of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ANRITSU SPECTRUM ANALYZER	MS2667C	M10281	Mar. 07, 2008
WIT STANDARD TEMPERATURE AND HUMIDITY CHAMBER	TH-4S-C	W981030	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

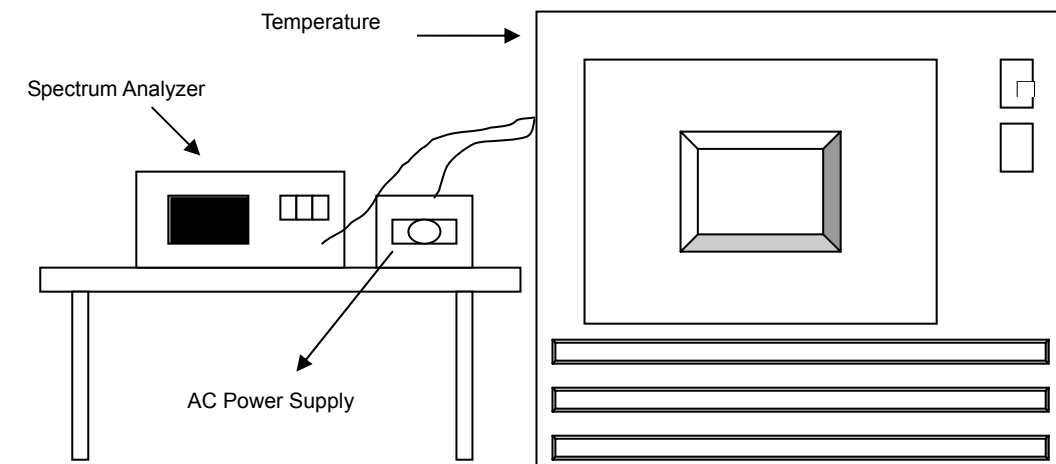

4.6.6 EUT OPERATING CONDITION

Same as Item 4.1.6

4.6.7 TEST RESULTS

OPERATING FREQUENCY: 5200MHz						LIMIT: $\pm 0.01\%$			
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	126.5	5199.911941	-0.0016934	5199.923165	-0.0014776	5199.947275	-0.0010139	5199.948158	-0.0009970
	110.0	5199.927941	-0.0013857	5199.935165	-0.0012468	5199.950675	-0.0009485	5199.952058	-0.0009220
	93.5	5199.930741	-0.0013319	5199.935565	-0.0012391	5199.955875	-0.0008485	5199.959258	-0.0007835
40	126.5	5199.923041	-0.0014800	5199.932165	-0.0013045	5199.951675	-0.0009293	5199.953058	-0.0009027
	110.0	5199.929241	-0.0013607	5199.940965	-0.0011353	5199.956475	-0.0008370	5199.957158	-0.0008239
	93.5	5199.940841	-0.0011377	5199.948865	-0.0009834	5199.959375	-0.0007812	5199.963758	-0.0006970
30	126.5	5199.924341	-0.0014550	5199.938265	-0.0011872	5199.957375	-0.0008197	5199.959258	-0.0007835
	110.0	5199.930141	-0.0013434	5199.953865	-0.0008872	5199.964975	-0.0006735	5199.959258	-0.0007835
	93.5	5199.948241	-0.0009954	5199.962265	-0.0007257	5199.966075	-0.0006524	5199.969458	-0.0005874
20	126.5	5199.931341	-0.0013204	5199.942165	-0.0011122	5199.960675	-0.0007562	5199.964358	-0.0006854
	110.0	5199.931641	-0.0013146	5199.959565	-0.0007776	5199.968475	-0.0006062	5199.968758	-0.0006008
	93.5	5199.955941	-0.0008473	5199.970765	-0.0005622	5199.969975	-0.0005774	5199.972158	-0.0005354
10	126.5	5199.938541	-0.0011819	5199.952965	-0.0009045	5199.968075	-0.0006139	5199.970758	-0.0005624
	110.0	5199.947141	-0.0010165	5199.963865	-0.0006949	5199.970375	-0.0005697	5199.972158	-0.0005354
	93.5	5199.962041	-0.0007300	5199.975565	-0.0004699	5199.978075	-0.0004216	5199.982158	-0.0003431
0	126.5	5199.942241	-0.0011107	5199.959965	-0.0007699	5199.971675	-0.0005447	5199.976158	-0.0004585
	110.0	5199.953741	-0.0008896	5199.969365	-0.0005891	5199.978475	-0.0004139	5199.979258	-0.0003989
	93.5	5199.968341	-0.0006088	5199.978665	-0.0004103	5199.980475	-0.0003755	5199.984858	-0.0002912
-10	126.5	5199.954341	-0.0008781	5199.965465	-0.0006641	5199.978475	-0.0004139	5199.981058	-0.0003643
	110.0	5199.960841	-0.0007531	5199.975465	-0.0004718	5199.981675	-0.0003524	5199.985958	-0.0002700
	93.5	5199.975441	-0.0004723	5199.981865	-0.0003488	5199.985375	-0.0002812	5199.989258	-0.0002066
-20	126.5	5199.959241	-0.0007838	5199.971865	-0.0005411	5199.981975	-0.0003466	5199.986158	-0.0002662
	110.0	5199.964641	-0.0006800	5199.979865	-0.0003872	5199.988175	-0.0002274	5199.989158	-0.0002085
	93.5	5199.979441	-0.0003954	5199.989265	-0.0002064	5199.989375	-0.0002043	5199.990158	-0.0001893
-30	126.5	5199.964541	-0.0006819	5199.978665	-0.0004103	5199.988275	-0.0002255	5199.988558	-0.0002200
	110.0	5199.978941	-0.0004050	5199.984965	-0.0002891	5199.990675	-0.0001793	5199.993158	-0.0001316
	93.5	5199.982041	-0.0003454	5199.994465	-0.0001064	5199.994775	-0.0001005	5199.996358	-0.0000700

4.7 BAND EDGES MEASUREMENT

4.7.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 1MHz / 3MHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS

For signals in the restricted bands above and below the 5.15 to 5.35GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW = 1MHz, VBW = 3MHz) are attached on the following pages.

802.11a OFDM MODULATION:

Channel 1 (5180MHz)



The band edge emission plot on the next page shows 40.49dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 110.59dBuV/m (Peak), so the maximum field strength in restrict band is $110.59 - 40.49 = 70.10\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 52.53dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 99.06dBuV/m (Average), so the maximum field strength in restrict band is $99.06 - 52.53 = 46.53\text{dBuV/m}$ which is under 54dBuV/m limit.



Channel 4 (5240MHz)

The band edge emission plot on the next second page shows 56.67dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 110.97dBuV/m (Peak), so the maximum field strength in restrict band is $110.97 - 56.67 = 54.30\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 58.89dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 100.04dBuV/m (Average), so the maximum field strength in restrict band is $100.04 - 58.89 = 41.15\text{dBuV/m}$ which is under 54dBuV/m limit.

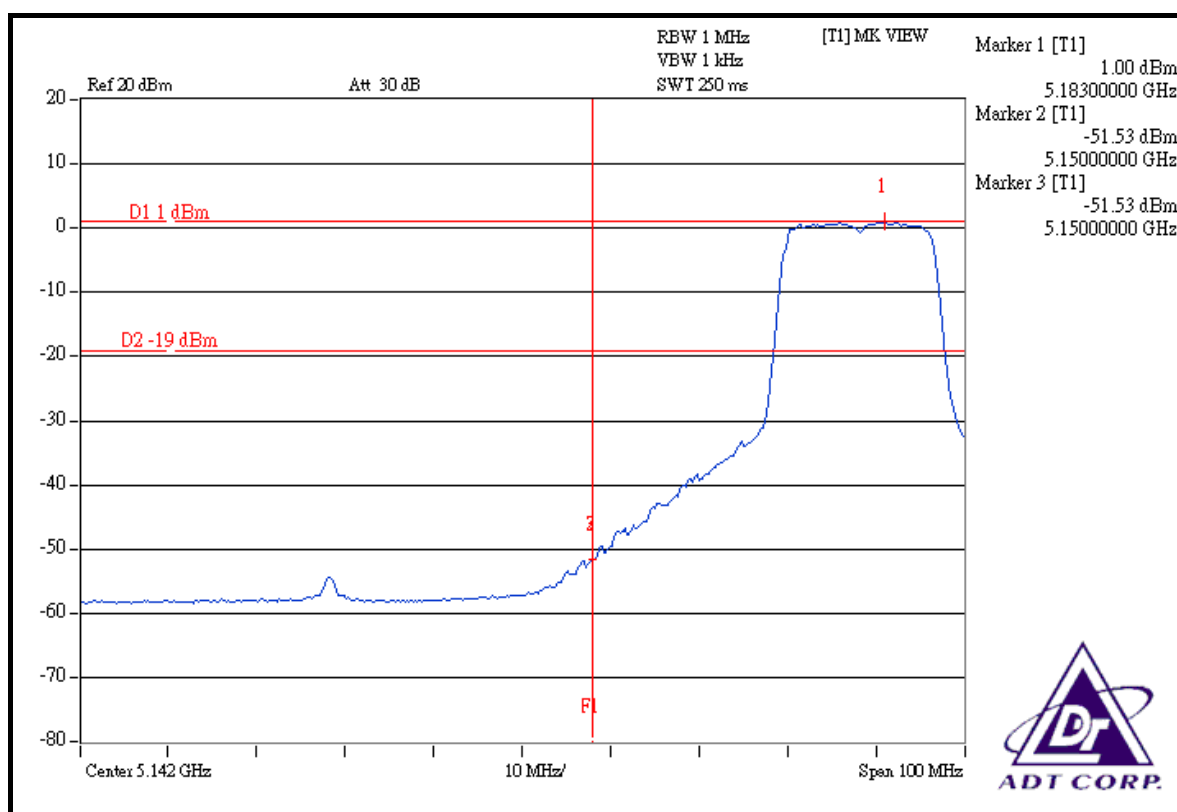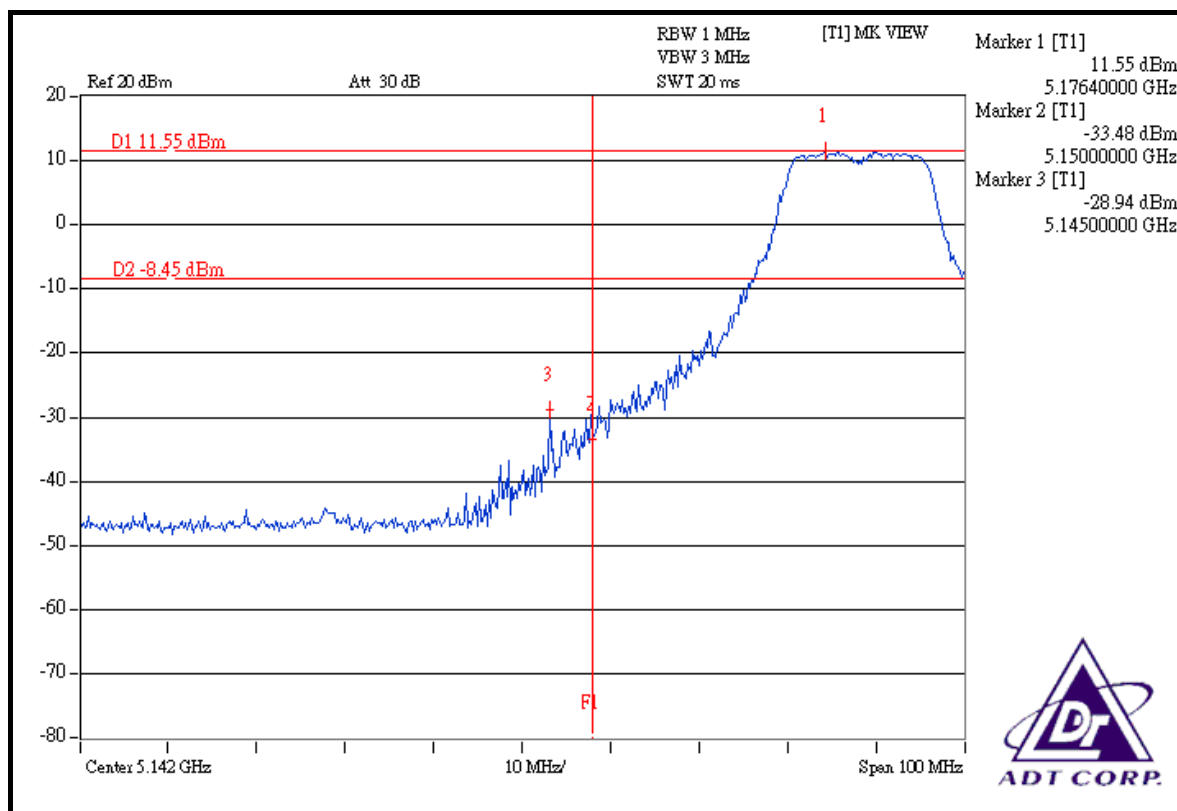

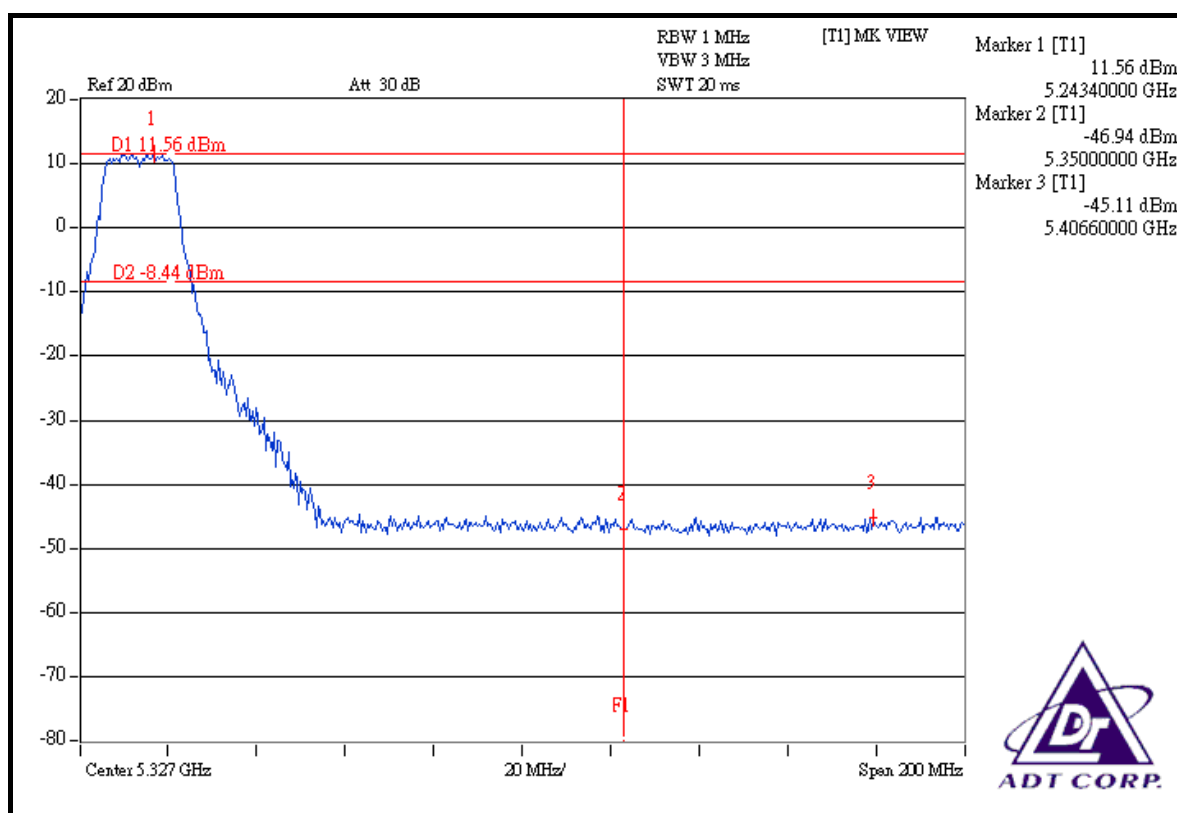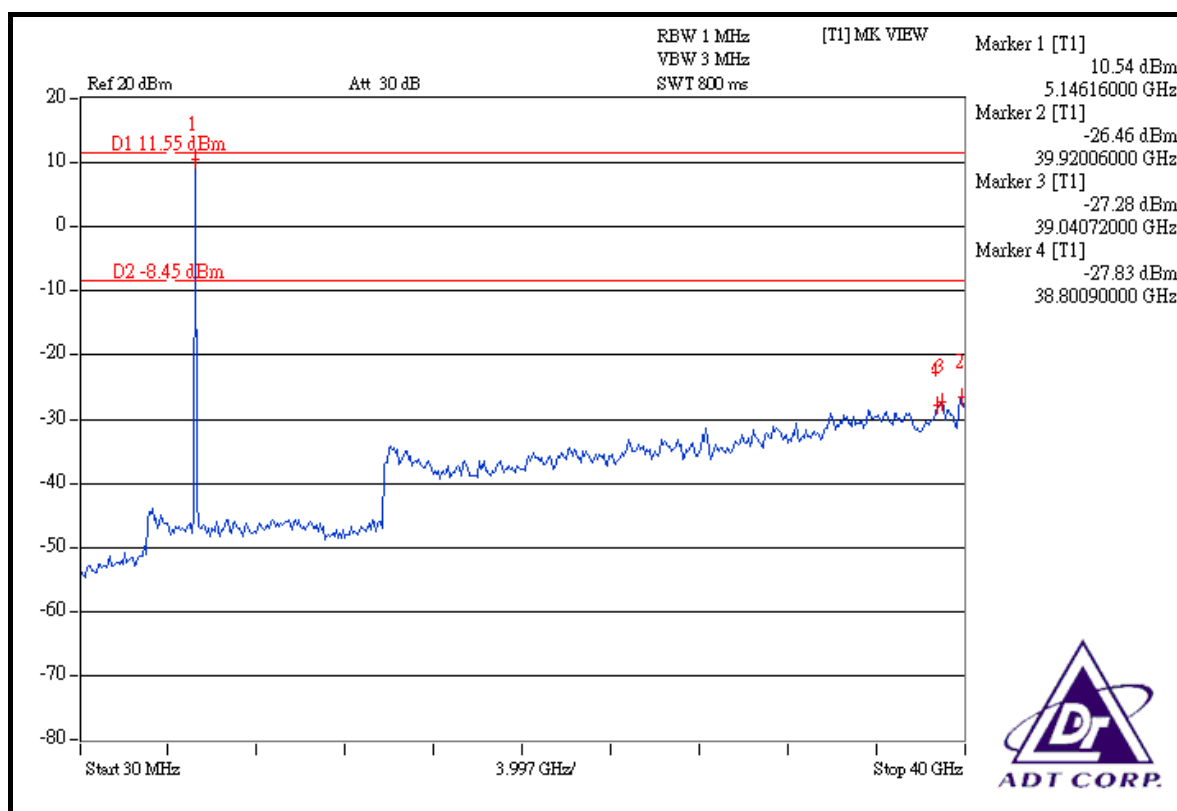

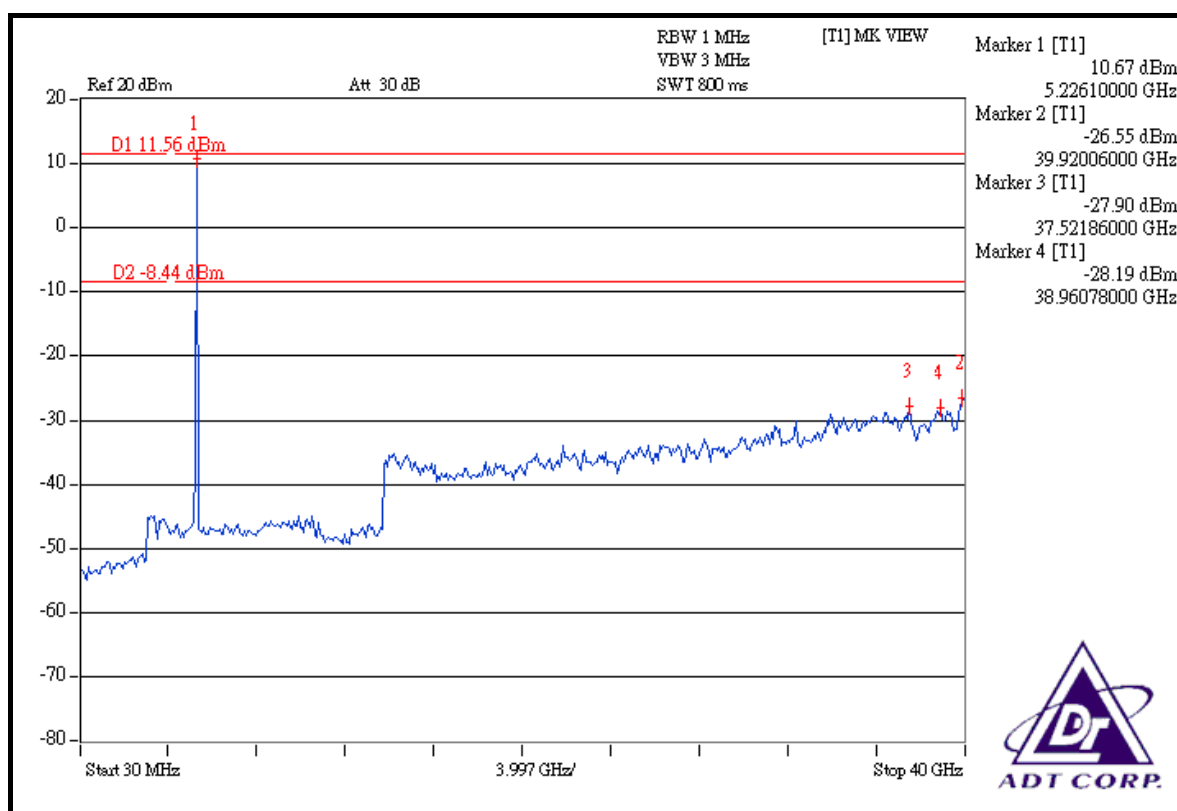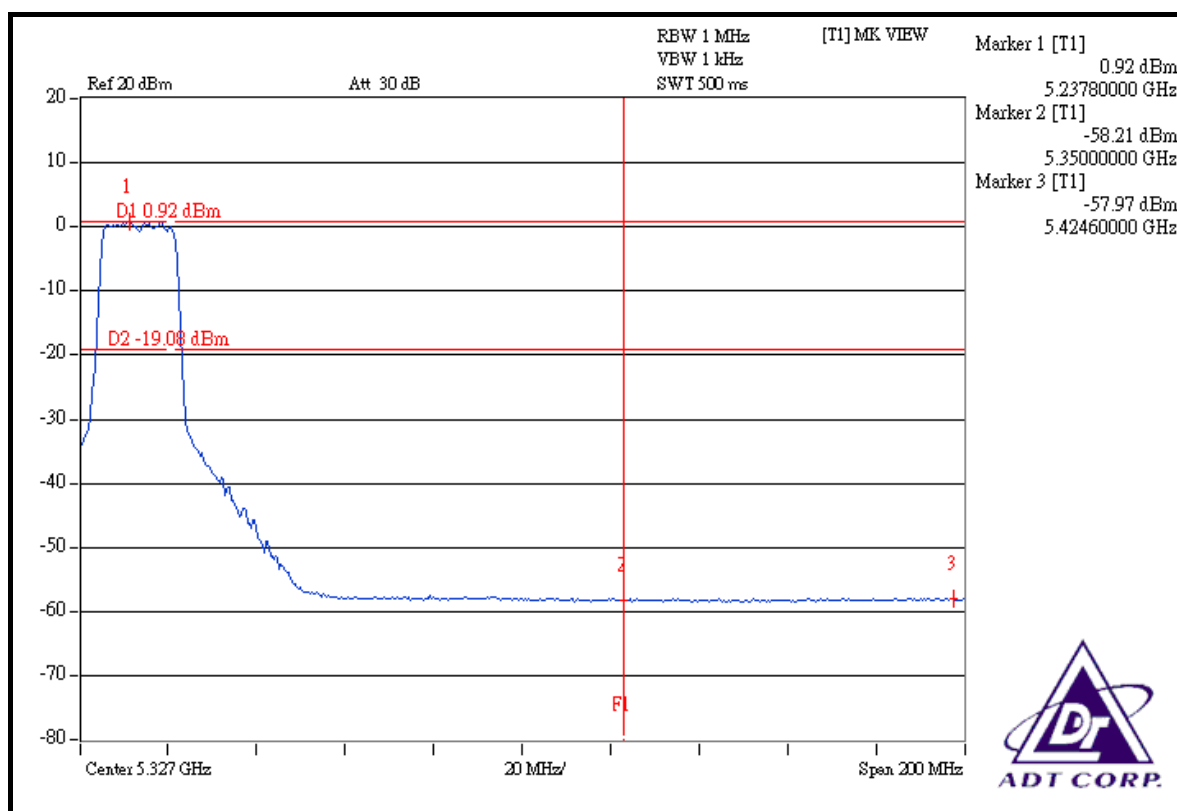

4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is patch antenna with UFL connector. The maximum Gain of the antenna is 10.7dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:
www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.