

Page 1 of 67

# **ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT**

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND INDUSTRY CANADA RSS 247 REQUIREMENT

OF

Applicant: Murata Manufacturing Co., Ltd.

10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555

Japan

Communication Module **Product Name:** 

**Brand Name:** muRata

Model No.: LBEE6ZZ1PY

Model Difference: N/A

**Report Number:** T190313W02-RP2

FCC ID: VPYLB1PY IC: 772C-LB1PY

FCC Rule Part: §15.247, Cat: DTS

IC Rule Part: RSS-247 issue 2 Feb 2017

**Issue Date:** Apr. 22, 2019

**Date of Test:** Mar. 14, 2019 ~ Mar. 27, 2019

Date of EUT Received: Mar. 14, 2019

Issued by Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891,

Taiwan. (R.O.C.) service@ccsrf.com

Note: The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report. The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and <a href="conditions.htm">conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page 2 of 67

# **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190313W02-RP2	Rev.00	Initial creation of docu- ment	All	Apr. 22, 2019	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

uniess outerwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測減之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's osle responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





# **Table of Contents**

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSION TEST	12
7	PEAK OUTPUT POWER MEASUREMENT	16
8	6dB & 99% BANDWIDTH MEASUREMENT	21
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	29
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	35
11	POWER SPECTRAL DENSITY	64
12	ANTENNA DECLUDEMENT	67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

uniess outerwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測減之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's osle responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 4 of 67

# **GENERAL INFORMATION**

# 1.1 Product Description

Product Name:	Communication Module
Brand Name:	muRata
Model No.:	LBEE6ZZ1PY
Model Difference:	N/A
Product SW/HW version:	1.0 / 1.0
Radio SW/HW version:	1.0 / 1.0
Test SW Version:	N/A
RF power setting in TEST SW:	N/A
Power Supply:	3.3Vdc

# Bluetooth Low Energy:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	N/A
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	7.62dBm
Antenna Designation:	Inverted-F Antenna, Antenna Gain: 0.5dBi

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 5 of 67

# 1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance v05r01.

RSS-Gen. issue 5 Apr. 2018

RSS-247 issue 2 Feb. 2017

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

# 1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

Canada Company number: 2324G

# 1.4 Special Accessories

There are no special accessories used while test was conducted.

# 1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and <a href="conditions.htm">conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 6 of 67

#### SYSTEM TEST CONFIGURATION 2

# 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

### 2.3 Test Procedure

#### 2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

#### **Conducted Test (RF)** 2.3.2

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

#### **Radiated Emissions** 2.3.3

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

### 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and <a href="conditions.htm">conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 7 of 67



# 2.5 Configuration of Tested System

Fig. 2-1 Radiated & Conducted Emission Configuration





Fig 2-2 AC power line Configuration



**Table 2-1 Equipment Used in Tested System** 

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Agilent	E3640A	KR93300208	N/A	Unshielded
3.	DC Power Supply	Agilent	E3640A	MY52410006	N/A	Unshielded
4.	Notebook	Lenovo	T440P	PC-089AH5	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and for elec-

Tribit obcline it is issued by the Collingary subject to its General Conditions of Service printed overlead, available of request of accessible at <a href="https://www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.edu/www.sgs.com/rems.edu/www.sgs.com/rems.edu/www.sgs.edu/www.edu/www.sgs.edu/www.sgs.edu



Page 8 of 67

# SUMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	RSS-247 §5.4(4)	Peak Output Power	Compliant
§15.247(a)(2)	RSS-247 §5.1 (1) RSS-Gen §6.7	6dB & 99% Emission Bandwidth	Compliant
§15.247(d)	RSS-247 §5.5 RSS-Gen §8.10	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10 RSS-Gen §6.13	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	RSS-247 §5.2(2)	Peak Power Density	Compliant
§15.203 §15.247(b)	RSS- Gen §6.8	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對测试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 9 of 67

# **DESCRIPTION OF TEST MODES**

# 4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	15	2430 MHz	29	2458 MHz
2	2404 MHz	16	2432 MHz	30	2460 MHz
3	2406 MHz	17	2434 MHz	31	2462 MHz
4	2408 MHz	18	2436 MHz	32	2464 MHz
5	2410 MHz	19	2438 MHz	33	2466 MHz
6	2412 MHz	20	2440 MHz	34	2468 MHz
7	2414 MHz	21	2442 MHz	35	2470 MHz
8	2416MHz	22	2444 MHz	36	2472 MHz
9	2418 MHz	23	2446 MHz	37	2474 MHz
10	2420 MHz	24	2448 MHz	38	2476 MHz
11	2422 MHz	25	2450 MHz	39	2478 MHz
12	2424 MHz	26	2452 MHz	40	2480 MHz
13	2426 MHz	27	2454 MHz		
14	2428 MHz	28	2456 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對测试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 10 of 67

#### 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral
Worst Case	Operation in normal mode

#### RADIATED EMISSION TEST:

MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	DATA RATE (Mbps)	
	RADIA	TED EMISSION TEST (	(BELOW 1 GHz)		
Bluetooth LE	2402 to 2480	2442	GFSK	1	
Bluetooth LE	2402 to 2480	2442	GFSK	2	
RADIATED EMISSION TEST (ABOVE 1 GHz)					
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	1	
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	2	

#### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E1 position was reported.


# ANTENNA PORT CONDUCTED MEASUREMENT:

	CONDUCTED TEST					
MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	DATA RATE (Mbps)		
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	1		
Bluetooth LE	2402 to 2480	2402, 2442, 2480	GFSK	2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and Transaction from the Company's sole responsibility is of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





# MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.922 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.922 dB
Peak Power Density	+/- 2.004 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

#### Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.



6 CONDUCTED EMISSION TEST

# 6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak Average			
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

#### Note

# 6.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019		
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019		
LISN	SCHWARZ- BECK	NSLK 8127	8127-541	01/31/2019	01/30/2020		
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020		
CABLE	EMCI						

# 6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.c
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<sup>1.</sup> The lower limit shall apply at the transition frequencies

<sup>2.</sup>The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



# 6.4 Test SET-UP (Block Diagram of Configuration)

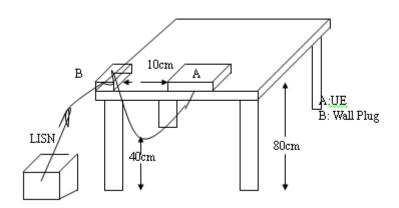

#### 6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

#### 6.6 Measurement Result:

Note: Refer to next page for measurement data and plots.

Note2: The \* reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 14 of 67

# AC POWER LINE CONDUCTED EMISSION TEST DATA

**Description:** Operation 2019/3/29 Line: Temp.(°C)/Hum.(%): 24(°C)/52% AC 120V/60Hz **Test Voltage:** Test By: Peter

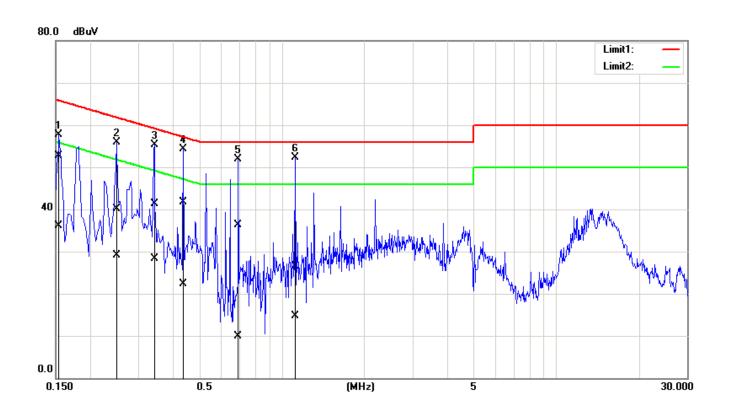

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1539	52.63	35.96	0.16	52.79	36.12	65.78	55.79	-12.99	-19.67	Pass
2	0.2500	39.97	28.98	0.15	40.12	29.13	61.75	51.76	-21.63	-22.63	Pass
3	0.3428	41.21	28.12	0.16	41.37	28.28	59.13	49.14	-17.76	-20.86	Pass
4	0.4380	41.59	22.07	0.16	41.75	22.23	57.10	47.10	-15.35	-24.87	Pass
5	0.6940	36.18	9.78	0.16	36.34	9.94	56.00	46.00	-19.66	-36.06	Pass
6	1.1180	26.40	14.61	0.18	26.58	14.79	56.00	46.00	-29.42	-31.21	Pass


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測述之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 15 of 67


**Description:** Operation Date: 2019/3/29 Line: Temp.(°C)/Hum.(%): 24(°C)/52% AC 120V/60Hz **Test Voltage:** Test By: Peter

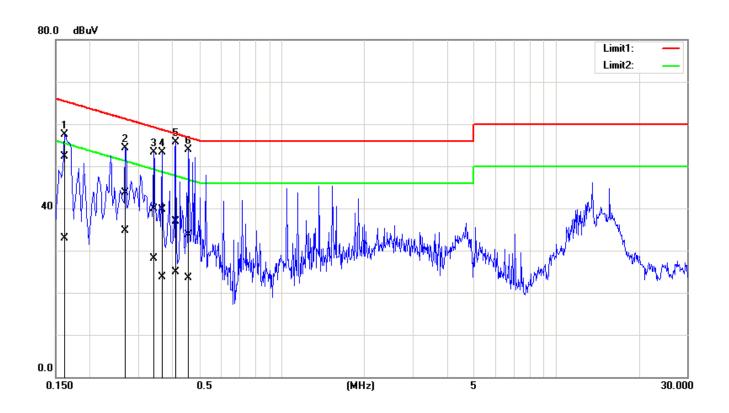

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1620	52.24	32.73	0.10	52.34	32.83	65.36	55.36	-13.02	-22.53	Pass
2	0.2700	43.60	34.58	0.10	43.70	34.68	61.12	51.12	-17.42	-16.44	Pass
3	0.3420	39.70	28.04	0.11	39.81	28.15	59.15	49.15	-19.34	-21.00	Pass
4	0.3660	39.66	23.52	0.11	39.77	23.63	58.59	48.59	-18.82	-24.96	Pass
5	0.4105	36.71	24.77	0.11	36.82	24.88	57.64	47.64	-20.82	-22.76	Pass
6	0.4580	33.61	23.33	0.11	33.72	23.44	56.73	46.73	-23.01	-23.29	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測述之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Page 16 of 67

### PEAK OUTPUT POWER MEASUREMENT

# 7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

# 7.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Power Meter	Anritsu	ML2496A	1242004	10/23/2018	10/22/2019		
Power Sensor	Anritsu	MA2411B	1207365	10/23/2018	10/22/2019		
Power Sensor	Anritsu	MA2411B	1207368	10/23/2018	10/22/2019		
DC Power Supply	Agilent	E3640A	MY53130054	09/03/2018	09/02/2019		
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019		
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020		

### 7.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



#### 7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas Guidance & ANSI C63.10...
- 3.Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

### **Power Meter:**

It is used as the auxiliary test equipment to conduct the output power measurement.

- 4. Record the max. Reading as observed from Power Meter.
- 5. Repeat above procedures until all test default channel measured was complete.

#### Formula:

Duty Cycle = Ton / (Ton+Toff)

# **Duty Factor:**

# **DATA RATE 1 Mbps:**

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE	63.00	2.01	2.53	3.00



Duty Cycle Factor:10\*log(1/(63/100))=2.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.








# DATA RATE 2 Mbps (BT 5.0):


	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
BLE	34.00	4.69	4.76	5.00

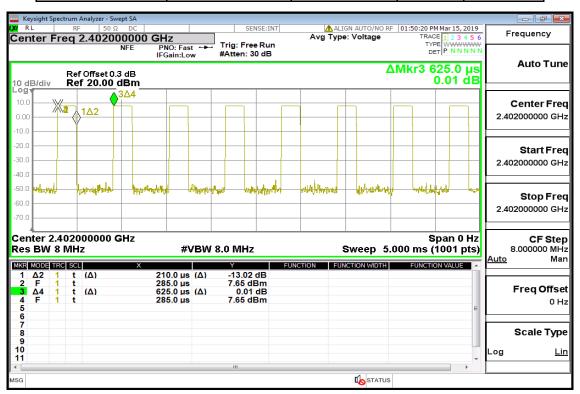

Duty Cycle Factor:10\*log(1/(34/100))=4.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所有分類、明、近報音級不便可知(人) 体の具質 「同時配株の理味協別化、本現音を基本を引き面配すり、不可能的模型。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





#### 7.5 Measurement Result:

# **DATA RATE 1 Mbps:**

#### BLE mode:

DEL IIIC	<del>, 40.</del>		
СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
Low	2402	7.62	1 Watt = 30 dBm
Mid	2442	7.39	1 Watt = 30 dBm
High	2480	7.07	1 Watt = 30 dBm
BLE mo	de:		
CH Frequency (MHz)		Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
Low	2402	7.44	1 Watt = 30 dBm
Mid	2442	7.27	1 Watt = 30 dBm
High	2480	6.96	1 Watt = 30 dBm

<sup>\*</sup>Note: Measured by power meter, cable loss as 0.3 dB that offsets on the power meter in Peak

# **EIRP**

СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit		:
Low	2402	7.44	0.50	7.94	4W=	36	dBm
Mid	2442	7.27	0.50	7.77	4W=	36	dBm
High	2480	6.96	0.50	7.46	4W=	36	dBm

<sup>\*</sup> Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測述之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<sup>\*</sup>Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

<sup>\*</sup>Note: Max. Output include tune up tolerance Power is average power

Page 20 of 67



# DATA RATE 2 Mbps (BT 5.0):

#### BI F mode:

DLL IIIC	<del>, 40.</del>		
СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
Low	2402	7.61	1 Watt = 30 dBm
Mid	2442	7.40	1 Watt = 30 dBm
High	2480	7.08	1 Watt = 30 dBm
BLE mo	de:		
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
Low	2402	7.42	1 Watt = 30 dBm
Mid	2442	7.13	1 Watt = 30 dBm
High	2480	6.87	1 Watt = 30 dBm

<sup>\*</sup>Note: Measured by power meter, cable loss as 0.3 dB that offsets on the power meter in Peak

### **EIRP**

СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	l limi		
Low	2402	7.42	0.50	7.92	4W=	36	dBm
Mid	2442	7.13	0.50	7.63	4W=	36	dBm
High	2480	6.87	0.50	7.37	4W=	36	dBm


<sup>\*</sup> Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測述之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<sup>\*</sup>Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter

<sup>\*</sup>Note: Max. Output include tune up tolerance Power is average power



Page 21 of 67

## 8 6DB & 99% BANDWIDTH MEASUREMENT


# 8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

## 8.2 Measurement Equipment Used

	Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
DC Power Supply	Agilent	E3640A	MY53130054	09/03/2018	09/02/2019			
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/09/2018	04/08/2019			
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019			
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020			
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020			

### 8.3 Test Set-up:



#### 8.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3\*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:

Set the spectrum analyzer as RBW=1%, VBW=3\*RBW, Span = 2MHz, Detector=Sample, Sweep=auto.

- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 22 of 67

### 8.5 Measurement Result:

# **DATA RATE 1 Mbps:**

# RI F mode

Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	0.718	> 0.5	PASS
2442	0.719	> 0.5	PASS
2480	0.717	> 0.5	PASS

# **BLE** mode

DEE mode			
Frequency (MHz)	99%Bandwidth (MHz)		
2402	1.0244		
2442	1.0243		
2480	1.0243		

# DATA RATE 2 Mbps (BT 5.0):

#### **BLE** mode

Frequency (MHz)	6dB BW (MHz)	BW (MHz)	Result
2402	1.165	> 0.5	PASS
2442	1.165	> 0.5	PASS
2480	1.163	> 0.5	PASS

# **BLE** mode

Frequency (MHz)	99%Bandwidth (MHz)
2402	2.04
2442	2.0399
2480	2.0397


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對测试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# **BLE** mode **DATA RATE 1 Mbps:** 6dB Band Width Test Data CH-Low

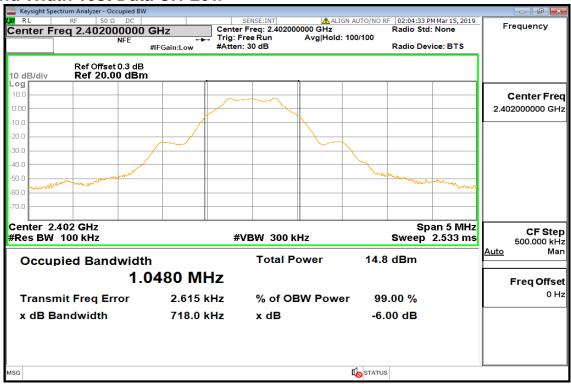

# 6dB Band Width Test Data CH-Mid

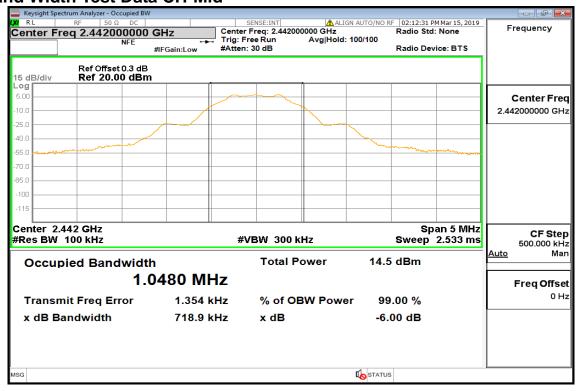


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 
ke 并另有规则,此根告结果僅對测试之根品負責,同時此樣品僅保留的分形。本根告未绝本公司書面许可,不可能份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.


Member of the SGS Group (SGS SA)



6dB Band Width Test Data CH-High

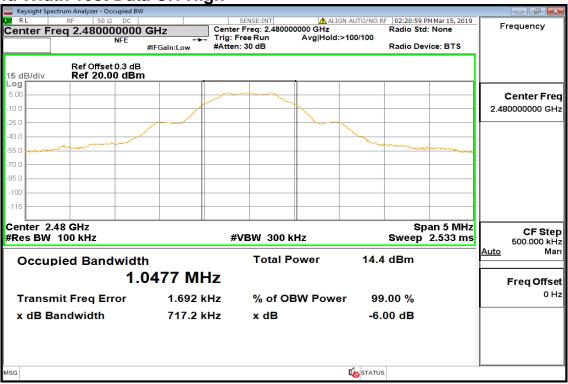

# 99% Band Width Test Data CH-Low

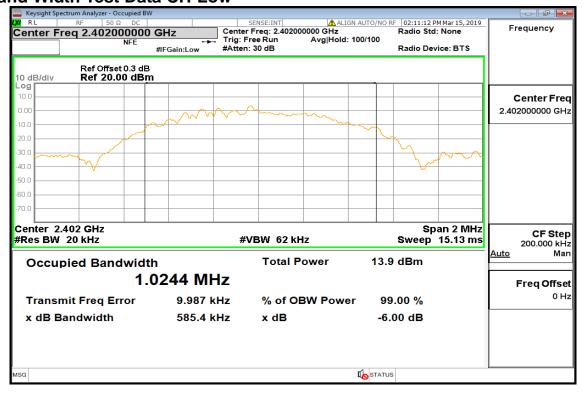


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Page 25 of 67



#### 99% Band Width Test Data CH-Mid

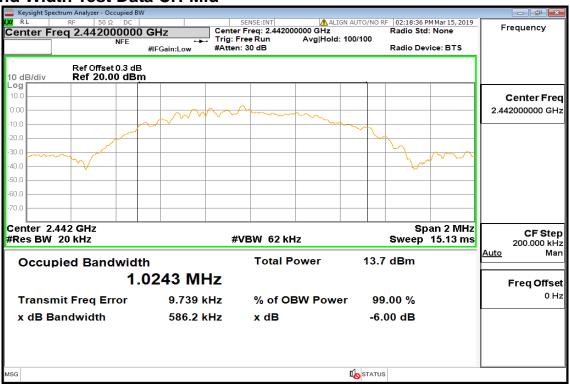

# 99% Band Width Test Data CH-High

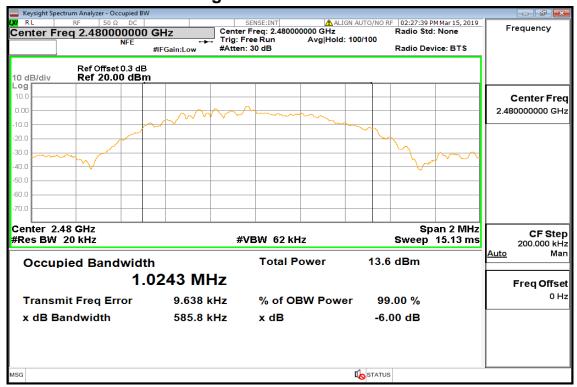


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Page 26 of 67



# DATA RATE 2 Mbps (BT 5.0): 6dB Band Width Test Data CH-Low

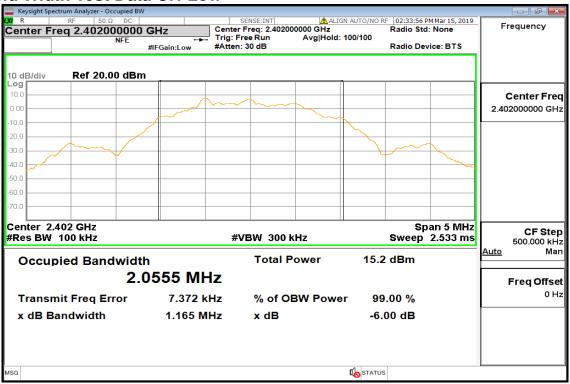

# 6dB Band Width Test Data CH-Mid

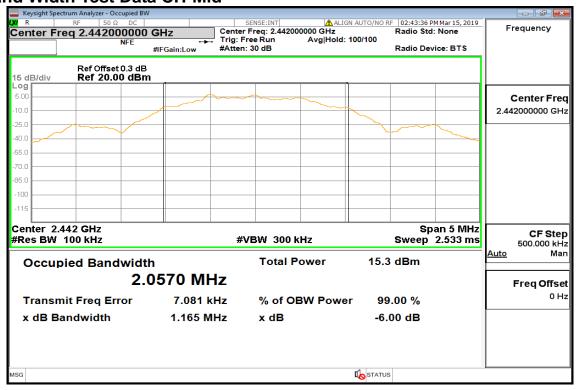


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






6dB Band Width Test Data CH-High

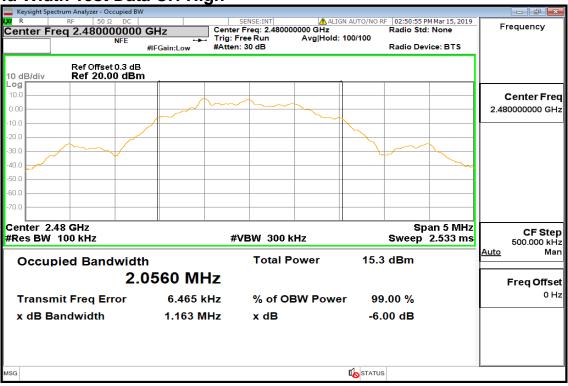

# 99% Band Width Test Data CH-Low

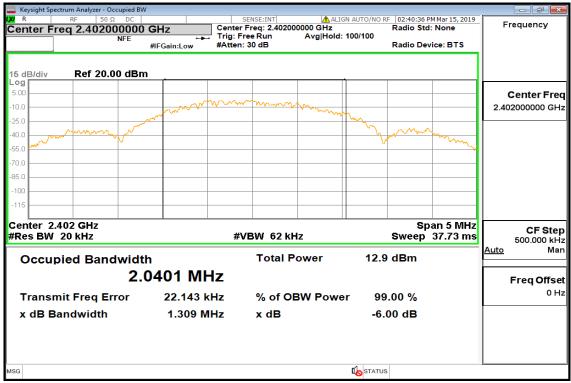


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






#### 99% Band Width Test Data CH-Mid

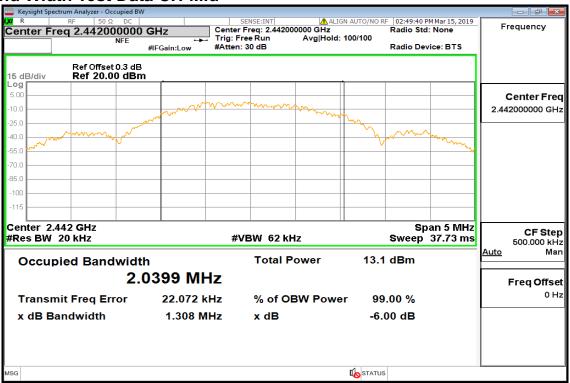


# 99% Band Width Test Data CH-High

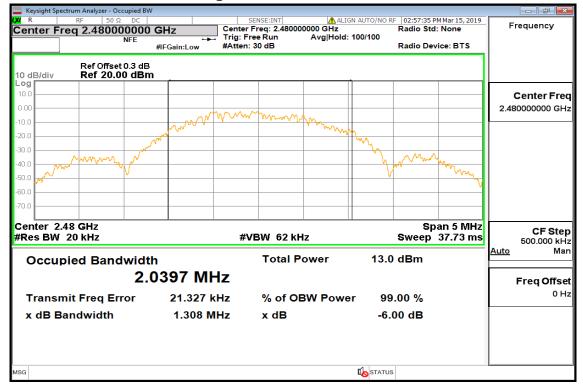

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approaches of this document is unlawful and effected are may be prosequited to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law





9 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

## 9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

# 9.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
DC Power Supply	Agilent	E3640A	MY53130054	09/03/2018	09/02/2019
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/09/2018	04/08/2019
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020

#### 9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





#### 9.4 Measurement Procedure

#### **Reference Level of Emission Limit:**

- Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

# **Conducted Band Edge:**

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 31 of 67

# **Conducted Spurious Emission:**

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

#### 9.5 Measurement Result

## **DATA RATE 1 Mbps:**

#### **Reference Level of Limit**

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	7.57	-12.43
2442	7.28	-12.72
2480	7.17	-12.83

NOTE: cable loss as 0.3dB that offsets in the spectrum

NOTE: Refer to next page for plots.

# DATA RATE 2 Mbps (BT 5.0):

#### Reference Level of Limit

Frequency (MHz)	· ·   = PSD	
2402	7.62	-12.38
2442	7.69	-12.31
2480	7.70	-12.30

NOTE: cable loss as 0.3dB that offsets in the spectrum

NOTE: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions of liability, indemnification and Transaction documents, Subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/retring-e-occuments/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-ge-occument/fifth-



# Reference Level\_BLE\_1M\_LowCH00-2402



### Reference Level\_BLE\_1M\_MidCH19-2442



# Reference Level\_BLE\_1M\_HighCH39-2480



# Reference Level\_BLE\_2M\_LowCH00-2402



# Reference Level\_BLE\_2M\_MidCH19-2442



# Reference Level\_BLE\_2M\_HighCH39-2480




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 
ke 并另有规则,此根告结果僅對测试之根品負責,同時此樣品僅保留的分形。本根告未绝本公司書面许可,不可能份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.




Band Edge\_BLE\_1M\_LowCH00-2402

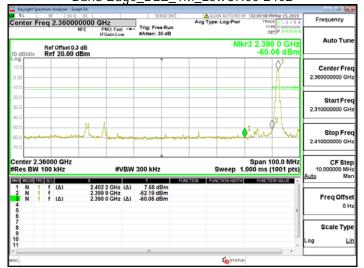


Band Edge\_BLE\_1M\_HighCH39-2480

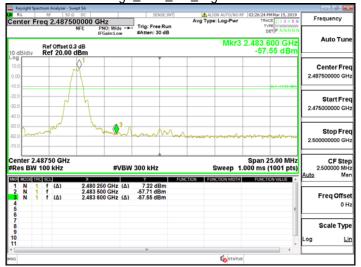

Band Edge\_BLE\_2M\_LowCH00-2402

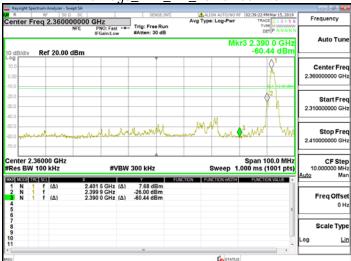

Band Edge\_BLE\_2M\_HighCH39-2480

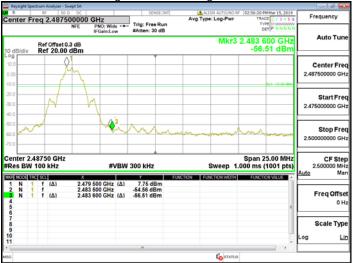

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results snown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 


Physical Retained for 90 days only prosecuted to the fullest extent of the law




# Spurious Emission\_BLE\_1M\_LowCH00-2402



# Spurious Emission\_BLE\_1M\_MidCH19-2442

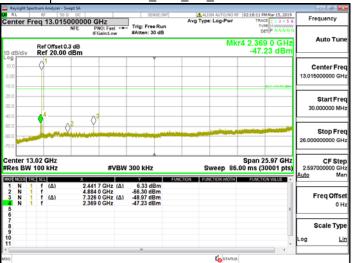


# Spurious Emission\_BLE\_1M\_HighCH39-2480

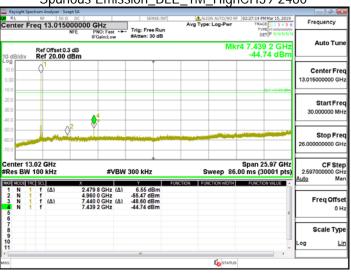


# Spurious Emission\_BLE\_2M\_LowCH00-2402



# Spurious Emission\_BLE\_2M\_MidCH19-2442

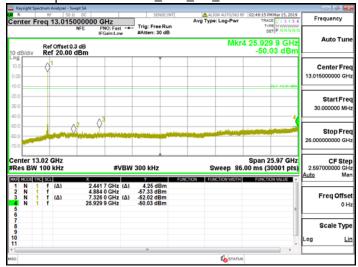


# Spurious Emission\_BLE\_2M\_HighCH39-2480

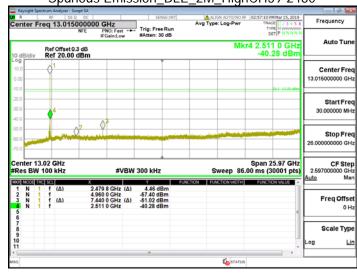

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Unless otherwise stated the results snown in this test report reter only to the sample(s) tested and such sample(s) are retained for 90 days only. 

Physical Retained for 90 days only prosecuted to the fullest extent of the law



Page 35 of 67



### 10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

#### Standard Applicable 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the RSS-Gen §8.10 Table 7.

And according to 15.33(a)(1) & RSS-Gen §6.13(a) for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

According to RSS-Gen §8.9 Table 5 & 6 Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


### Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level  $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 36 of 67



#### 10.2 **Measurement Equipment Used**


· ·					
966A Chamber					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019
Loop Antenna	ETS.LINDGREN	6502	148045	10/08/2018	10/07/2019
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 V6.11-20180413				

NOTE: N.C.R refers to Not Calibrated Required.




#### 10.3 **Test SET-UP**


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

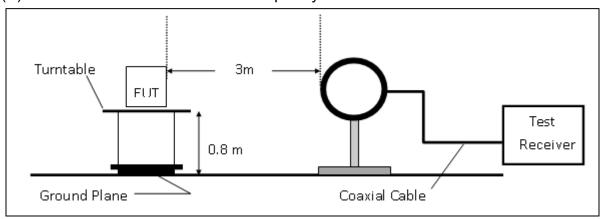

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

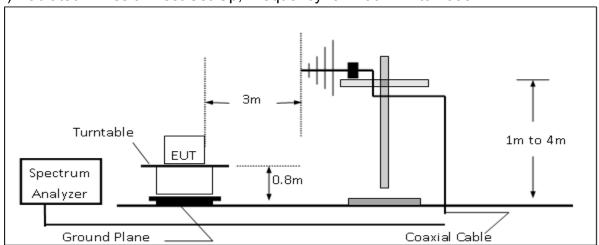


(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

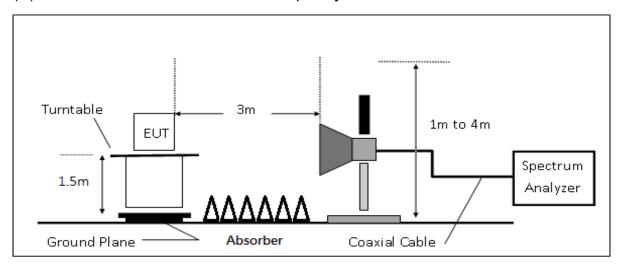

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製





10.4 **Measurement Procedure** 

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement an-
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.



Page 39 of 67

# 10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	•	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

### 10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

### 10.7 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 40 of 67


# **Radiated Band Edge Measurement Result DATA RATE 1 Mbps:**

**Operation Band** :BLE **Test Date** :2019-03-20

**Fundamental Frequency** :2402 MHz Temp./Humi. :24.1 deg\_C / 65 RH

**Operation Mode** :Bandedge CH LOW Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

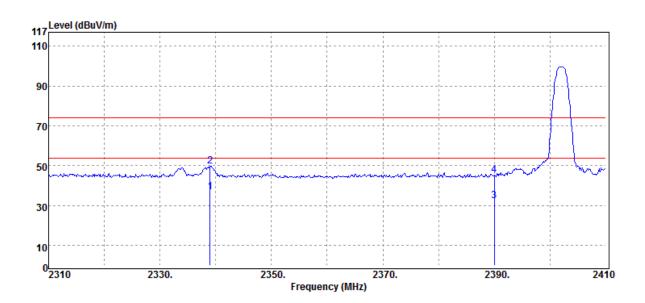

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2339.00	Average	40.15	-3.31	36.84	54.00	-17.16
2339.00	Peak	53.18	-3.31	49.87	74.00	-24.13
2390.00	Average	35.77	-3.33	32.44	54.00	-21.56
2390.00	Peak	48.49	-3.33	45.16	74.00	-28.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 41 of 67

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:BLE :2402 MHz :Bandedge CH LOW


:E1 Plane

**Test Date** :2019-03-20

Temp./Humi. :24.1 deg\_C / 65 RH

Engineer

:HORIZONTAL Measurement Antenna Pol.

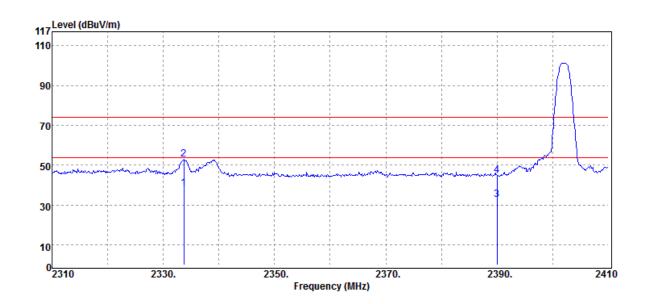

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2333.70	Average	41.82	-3.30	38.52	54.00	-15.48
2333.70	Peak	56.15	-3.30	52.85	74.00	-21.15
2390.00	Average	35.95	-3.33	32.62	54.00	-21.38
2390.00	Peak	48.14	-3.33	44.81	74.00	-29.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 42 of 67

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:BLE :2480 MHz

:Bandedge CH HIGH


:E1 Plane

**Test Date** :2019-03-20

Temp./Humi. :24.1 deg\_C / 65 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

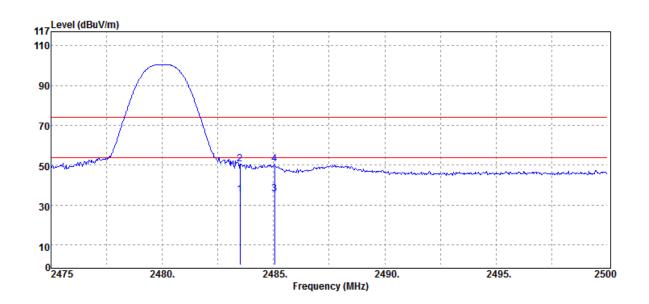

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2483.50	Average	38.08	-2.72	35.36	54.00	-18.64
2483.50	Peak	53.51	-2.72	50.79	74.00	-23.21
2485.05	Average	38.34	-2.70	35.64	54.00	-18.36
2485.05	Peak	53.31	-2.70	50.61	74.00	-23.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 43 of 67

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:BLE :2480 MHz

:Bandedge CH HIGH


:E1 Plane

**Test Date** :2019-03-20

Temp./Humi. :24.1 deg\_C / 65 RH

Engineer

:HORIZONTAL Measurement Antenna Pol.

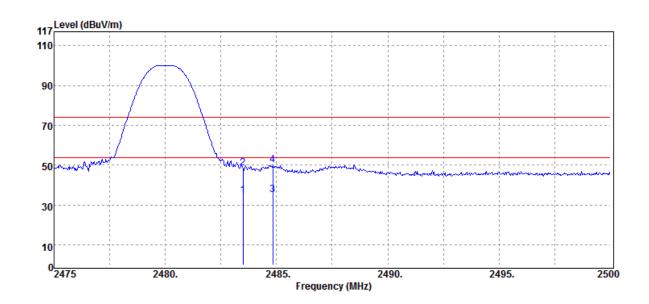

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
 2483.50	Average	37.70	-2.72	34.98	54.00	-19.02
2483.50	Peak	51.20	-2.72	48.48	74.00	-25.52
2484.83	Average	38.03	-2.70	35.33	54.00	-18.67
2484.83	Peak	52.92	-2.70	50.22	74.00	-23.78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 44 of 67

# DATA RATE 2 Mbps (BT 5.0):

**Operation Band** :BLE(2M) **Fundamental Frequency** :2402 MHz


**Operation Mode** :Bandedge CH LOW

EUT Pol. :E1 Plane **Test Date** :2019-03-20

Temp./Humi. :21 deg\_C / 62 RH

Engineer :Wei

Measurement Antenna Pol. :VERTICAL

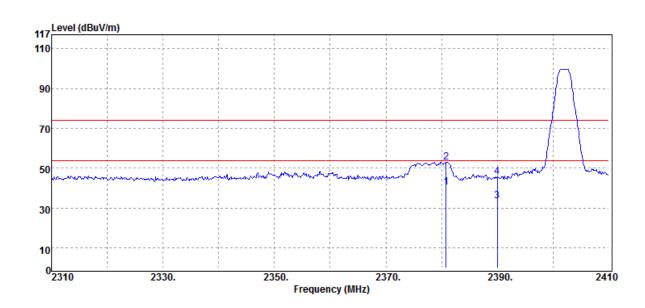

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2380.80	Average	43.90	-3.32	40.58	54.00	-13.42
2380.80	Peak	56.53	-3.32	53.21	74.00	-20.79
2390.00	Average	36.98	-3.33	33.65	54.00	-20.35
2390.00	Peak	49.00	-3.33	45.67	74.00	-28.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 45 of 67

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:BLE(2M) :2402 MHz


:Bandedge CH LOW

:E1 Plane

**Test Date** :2019-03-20 Temp./Humi. :21 deg\_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

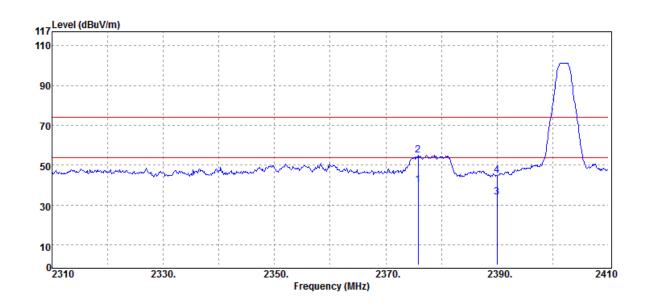

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
2375.80	Average	43.59	-3.33	40.26	54.00	-13.74
2375.80	Peak	58.51	-3.33	55.18	74.00	-18.82
2390.00	Average	37.49	-3.33	34.16	54.00	-19.84
2390.00	Peak	48.41	-3.33	45.08	74.00	-28.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 46 of 67

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.


:BLE(2M) :2480 MHz :Bandedge CH HIGH

:E1 Plane

**Test Date** :2019-03-20 Temp./Humi. :21 deg\_C / 62 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

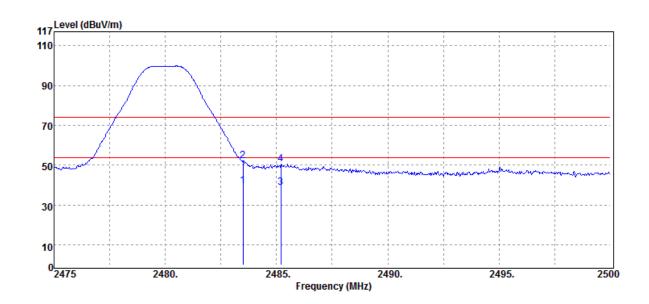

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
2483.50	Average	42.23	-2.72	39.51	54.00	-14.49
2483.50	Peak	54.94	-2.72	52.22	74.00	-21.78
2485.20	Average	41.67	-2.70	38.97	54.00	-15.03
2485.20	Peak	53.15	-2.70	50.45	74.00	-23.55

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 47 of 67

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:BLE(2M) :2480 MHz


:Bandedge CH HIGH

:E1 Plane

**Test Date** :2019-03-20 Temp./Humi. :21 deg\_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

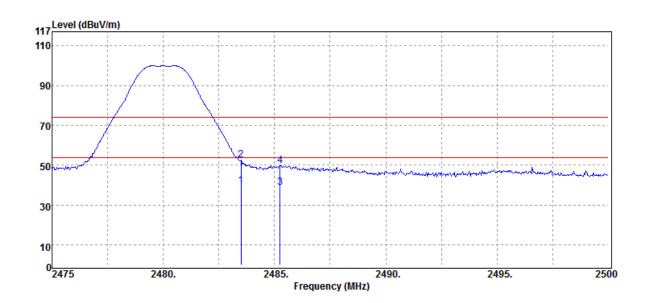

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2483.50	Average	42.27	-2.72	39.55	54.00	-14.45
2483.50	Peak	55.25	-2.72	52.53	74.00	-21.47
2485.25	Average	41.59	-2.70	38.89	54.00	-15.11
2485.25	Peak	52.50	-2.70	49.80	74.00	-24.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 48 of 67


# **Radiated Spurious Emission Measurement Result** For Frequency form 30MHz to 1000MHz **DATA RATE 1 Mbps:**

**Operation Band** :BLE **Test Date** :2019-03-27

Fundamental Frequency :2442 MHz Temp./Humi. :24.1 deg\_C / 65 RH

Operation Mode :Tx CH MID Engineer :Wei

EUT Pol. :E1 Plan :VERTICAL Measurement Antenna Pol.

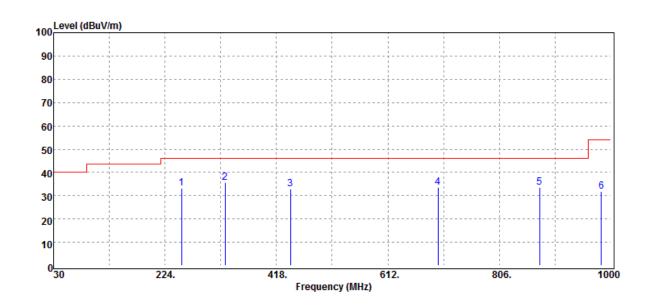

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
253.10	Peak	38.03	-4.80	33.23	46.00	-12.77
328.76	Peak	38.63	-3.06	35.57	46.00	-10.43
442.25	Peak	33.67	-0.83	32.84	46.00	-13.16
699.30	Peak	31.34	2.21	33.55	46.00	-12.45
875.84	Peak	29.03	4.64	33.67	46.00	-12.33
983.51	Peak	24.02	7.74	31.76	54.00	-22.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 49 of 67

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.


:BLE :2442 MHz :Tx CH MID :E1 Plan

**Test Date** :2019-03-27

Temp./Humi. :24.1 deg\_C / 65 RH

Engineer

:HORIZONTAL Measurement Antenna Pol.

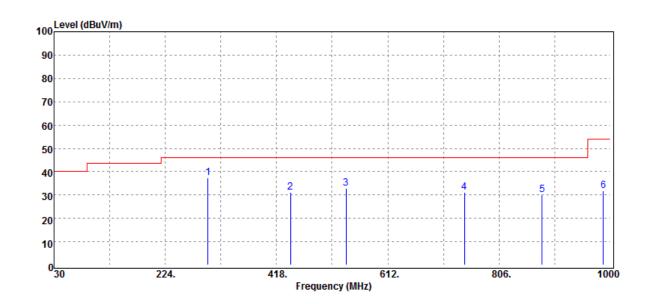

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
298.69	Peak	41.13	-3.63	37.50	46.00	-8.50
442.25	Peak	32.06	-0.83	31.23	46.00	-14.77
539.25	Peak	32.57	0.18	32.75	46.00	-13.25
745.86	Peak	27.88	3.11	30.99	46.00	-15.01
880.69	Peak	25.29	4.75	30.04	46.00	-15.96
987.39	Peak	24.23	7.76	31.99	54.00	-22.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 50 of 67


# DATA RATE 2 Mbps (BT5.0):

**Operation Band** :BLE 2M **Test Date** :2019-03-27

Fundamental Frequency :2442 MHz Temp./Humi. :21 deg\_C / 62 RH

:Tx CH MID **Operation Mode** Engineer :Wei

EUT Pol. :E1 Plan :VERTICAL Measurement Antenna Pol.

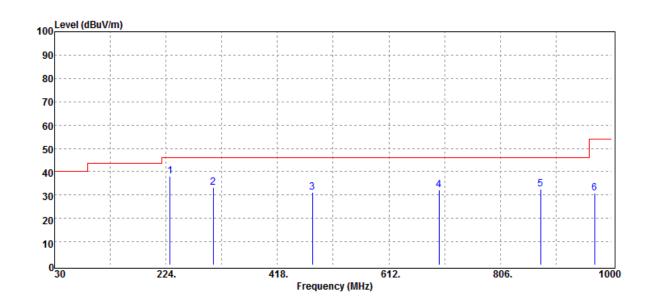

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
230.79	Peak	47.97	-10.08	37.89	46.00	-8.11
306.45	Peak	40.55	-7.35	33.20	46.00	-12.80
479.11	Peak	33.28	-2.02	31.26	46.00	-14.74
699.30	Peak	31.17	0.94	32.11	46.00	-13.89
875.84	Peak	28.33	4.07	32.40	46.00	-13.60
969.93	Peak	24.30	6.65	30.95	54.00	-23.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 51 of 67


**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:BLE 2M :2442 MHz :Tx CH MID :E1 Plan

**Test Date** :2019-03-27 Temp./Humi. :21 deg\_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

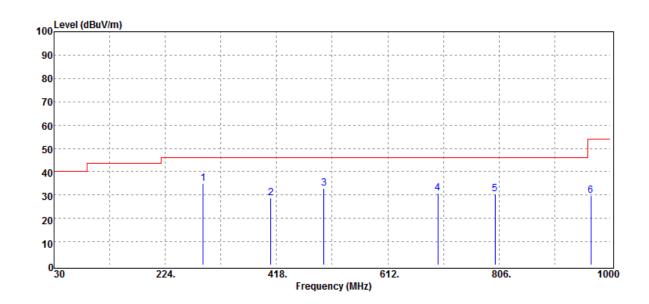

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBµV/m	dΒμV/m	dB
289.96	Peak	42.68	-7.63	35.05	46.00	-10.95
408.30	Peak	33.29	-4.53	28.76	46.00	-17.24
500.45	Peak	34.97	-2.10	32.87	46.00	-13.13
699.30	Peak	30.00	0.94	30.94	46.00	-15.06
799.21	Peak	27.49	2.87	30.36	46.00	-15.64
966.05	Peak	23.49	6.26	29.75	54.00	-24.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 52 of 67


# **Radiated Spurious Emission Measurement Result** For Frequency above 1 GHz **DATA RATE 1 Mbps:**

**Operation Band** :BLE Test Date :2019-03-21

Fundamental Frequency :2402 MHz Temp./Humi. :24.1 deg\_C / 65 RH

Operation Mode :Tx CH LOW Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

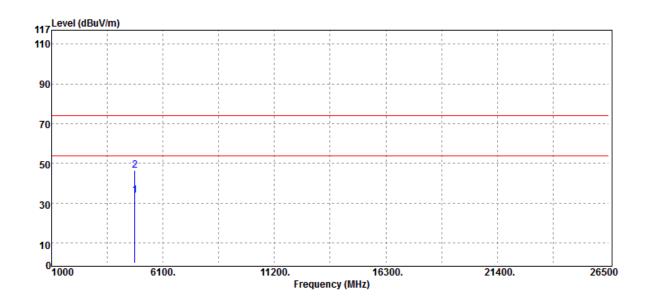

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4804.00	Average	30.71	3.11	33.82	54.00	-20.18
4804.00	Peak	43.27	3.11	46.38	74.00	-27.62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 53 of 67

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.


:BLE :2402 MHz :Tx CH LOW :E1 Plane

**Test Date** :2019-03-21

Temp./Humi. :24.1 deg\_C / 65 RH

Engineer

:HORIZONTAL Measurement Antenna Pol.

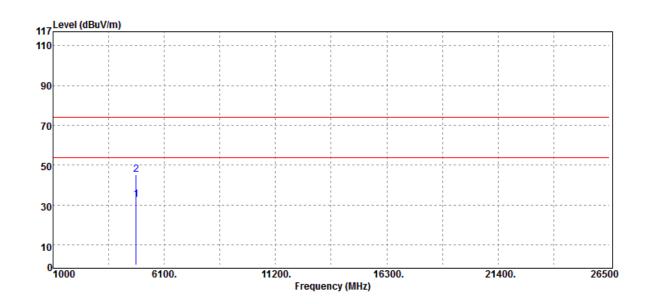

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4804.00	Average	29.52	3.11	32.63	54.00	-21.37
4804.00	Peak	42.10	3.11	45.21	74.00	-28.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 54 of 67

**Operation Band** :BLE Fundamental Frequency :2442 MHz


**Operation Mode** :Tx CH MID

EUT Pol. :E1 Plane **Test Date** :2019-03-21

Temp./Humi. :24.1 deg\_C / 65 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

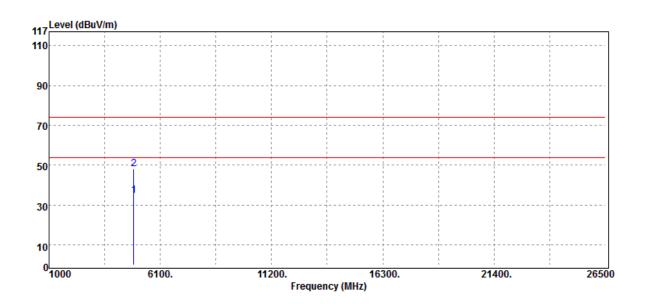

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4884.00	Average	31.23	3.47	34.70	54.00	-19.30
4884.00	Peak	44.59	3.47	48.06	74.00	-25.94

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 55 of 67

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.


:BLE :2442 MHz :Tx CH MID :E1 Plane

**Test Date** :2019-03-21

Temp./Humi. :24.1 deg\_C / 65 RH

Engineer

:HORIZONTAL Measurement Antenna Pol.

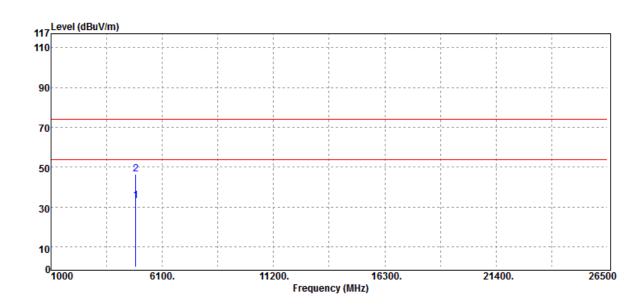

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4	884.00	Average	29.92	3.47	33.39	54.00	-20.61
4	884.00	Peak	43.09	3.47	46.56	74.00	-27.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 56 of 67

**Operation Band** :BLE Fundamental Frequency :2480 MHz **Operation Mode** EUT Pol.


:Tx CH HIGH :E1 Plane

**Test Date** :2019-03-21

Temp./Humi. :24.1 deg\_C / 65 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

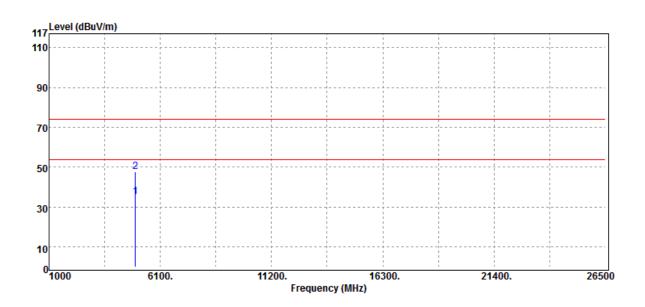

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4960.00	Average	30.68	4.48	35.16	54.00	-18.84
4960.00	Peak	43.35	4.48	47.83	74.00	-26.17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 57 of 67

**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.


:BLE :2480 MHz :Tx CH HIGH :E1 Plane

**Test Date** :2019-03-21

Temp./Humi. :24.1 deg\_C / 65 RH

Engineer

:HORIZONTAL Measurement Antenna Pol.

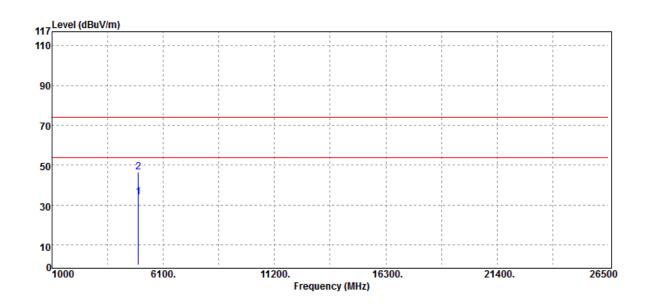

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4960.00	Average	29.66	4.48	34.14	54.00	-19.86
4960.00	Peak	42.09	4.48	46.57	74.00	-27.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 58 of 67


# **Radiated Spurious Emission Measurement Result** For Frequency above 1GHz

**DATA RATE 2 Mbps:** 

**Operation Band** :BLE(2M) **Test Date** :2019-03-21

**Fundamental Frequency** Temp./Humi. :2402 MHz :21 deg\_C / 62 RH

**Operation Mode** :Tx CH LOW Engineer :Wei EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

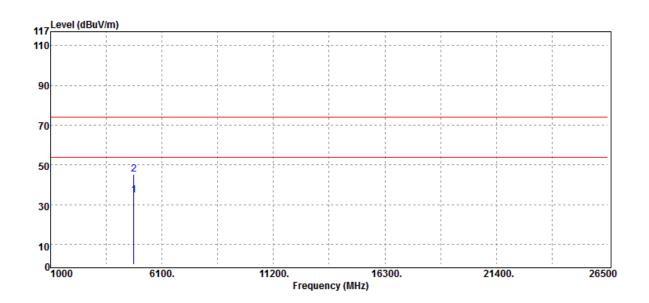

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4804.00	Average	31.62	3.11	34.73	54.00	-19.27
4804.00	Peak	42.16	3.11	45.27	74.00	-28.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 59 of 67

**Operation Band** :BLE(2M) Fundamental Frequency :2402 MHz **Operation Mode** :Tx CH LOW EUT Pol. :E1 Plane

**Test Date** :2019-03-21 Temp./Humi. :21 deg\_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

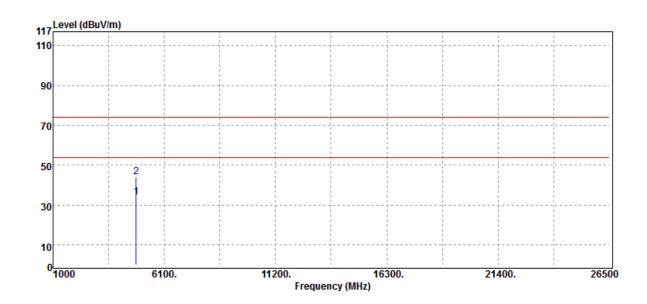

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
4804.00	Average	30.84	3.11	33.95	54.00	-20.05
4804.00	Peak	41.08	3.11	44.19	74.00	-29.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 60 of 67

**Operation Band** :BLE(2M) Fundamental Frequency :2442 MHz **Operation Mode** :Tx CH MID EUT Pol. :E1 Plane

**Test Date** :2019-03-21 Temp./Humi. :21 deg\_C / 62 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

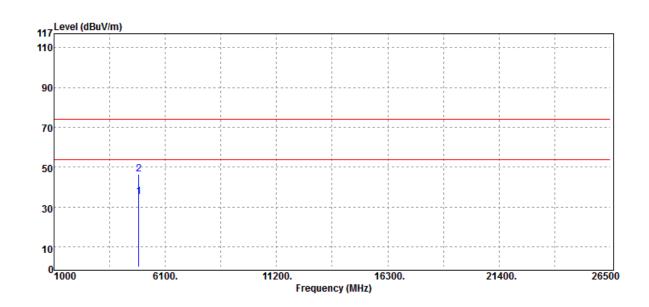

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4884.00	Average	31.93	3.47	35.40	54.00	-18.60
4884.00	Peak	43.05	3.47	46.52	74.00	-27.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 61 of 67

**Operation Band** :BLE(2M) Fundamental Frequency :2442 MHz **Operation Mode** :Tx CH MID EUT Pol. :E1 Plane

**Test Date** :2019-03-21 Temp./Humi. :21 deg\_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

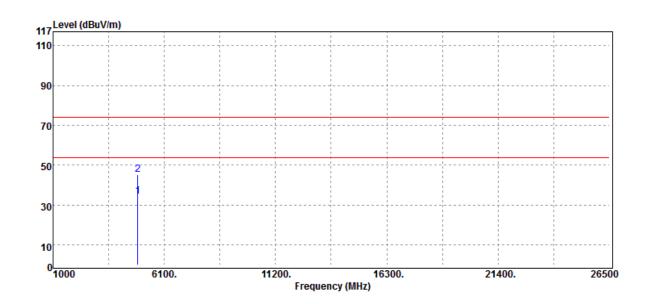

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
 MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
 4884.00	Average	31.13	3.47	34.60	54.00	-19.40
4884.00	Peak	42.01	3.47	45.48	74.00	-28.52

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Page 62 of 67

**Operation Band** :BLE(2M) Fundamental Frequency :2480 MHz **Operation Mode** :Tx CH HIGH EUT Pol. :E1 Plane

**Test Date** :2019-03-21 Temp./Humi. :21 deg\_C / 62 RH

Engineer :Wei

:VERTICAL Measurement Antenna Pol.

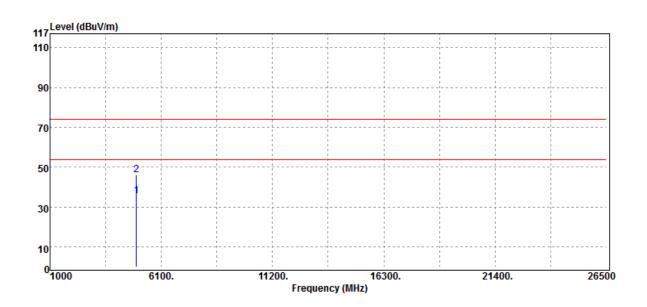

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4960.00	Average	31.28	4.48	35.76	54.00	-18.24
4960.00	Peak	41.52	4.48	46.00	74.00	-28.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 63 of 67


**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:BLE(2M) :2480 MHz :Tx CH HIGH :E1 Plane

**Test Date** :2019-03-21 Temp./Humi. :21 deg\_C / 62 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

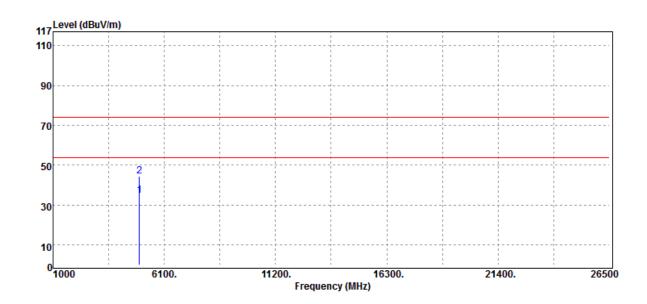

Freq	. Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dΒμV/m	dB
4960.0	00 Average	30.22	4.48	34.70	54.00	-19.30
4960.0	00 Peak	40.13	4.48	44.61	74.00	-29.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 64 of 67



### 11 POWER SPECTRAL DENSITY


#### 11.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

#### 11.2 **Measurement Equipment Used:**

Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
DC Power Supply	Agilent	E3640A	MY53130054	09/03/2018	09/02/2019
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/09/2018	04/08/2019
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020

#### Test Set-up: 11.3



### 11.4 Measurement Procedure:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 65 of 67

#### 11.5 **Measurement Result:**

## **DATA RATE 1 Mbps:**

### RI F mode

BLE IIIOUE					
Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result		
2402	-6.58	8	PASS		
2442	-6.84	8	PASS		
2480	-6.97	8	PASS		

NOTE: cable loss as 0.3dB that offsets in the spectrum

# DATA RATE 2 Mbps (BT 5.0):

### **BLE** mode


Frequency (MHz)	RF Power Density (dBm)	Maximum Limit (dBm)	Result
2402	-10.23	8	PASS
2442	-10.14	8	PASS
2480	-10.18	8	PASS

NOTE: cable loss as 0.3dB that offsets in the spectrum

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此概告结果僅對測述之樣品負責,同時此樣品僅保留90天。本概告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




SGS







#### Power Density BLE 1M MidCH19-2442



#### 1M HighCH39-2480 Power Density BLE




# Power Density\_BLE\_2M\_LowCH00-2402



### Power Density BLE 2M MidCH19-2442



#### 2M HighCH39-2480 Power Density BLE



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Page 67 of 67

### 12 ANTENNA REQUIREMENT

# 12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

### 12.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.