

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Murata Manufacturing Co., Ltd

Wireless Speaker

Model Number: Beosound Balance

FCC ID: VPYLB1VA

Prepared for:	Murata Manufacturing Co., Ltd
	10-1, Higashikotari 1-chome Nagaokakyo-shi, Kyoto, 617-8555, Japan
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2004066
Date of Test:	Apr. 21~23, 2020
Date of Report:	Apr. 30, 2020

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION	3
1. GENERAL INFORMATION.....	4
1.1. Description of Device (EUT)	4
1.2. Antenna Information	4
2. SUMMARY OF TEST	5
2.1. Summary of test result.....	5
2.2. Test Facilities.....	6
2.3. Measurement uncertainty	7
2.4. Assistant equipment used for test.....	7
2.5. Block Diagram.....	7
2.6. Test mode	8
2.7. Channel List.....	8
2.8. Test Equipmen.....	9
3. RADIATED SPURIOUS EMISSIONS AND BAND EDGE	10
3.1. Limit	10
3.2. Test Setup	11
3.3. Spectrum Analyzer Setting.....	12
3.4. Test Procedure	13
3.5. Test Result	14
4. AC POWER LINE CONDUCTED EMISSIONS	26
4.1. Limit	26
4.2. Test Setup	26
4.3. Spectrum Analyzer Setting.....	26
4.4. Test Procedure	26
4.5. Test Result	27
5. TEST SETUP PHOTO.....	31
6. EUT PHOTO	33

EST Technology Co., Ltd.

Applicant:	Murata Manufacturing Co., Ltd		
Address:	10-1, Higashikotari 1-chome Nagaokakyo-shi, Kyoto, 617-8555, Japan		
Manufacturer:	Bang & Olufsen A/S		
Address:	Bang og Olufsen Allé 1, 7600 Struer, Denmark		
E.U.T:	Wireless Speaker		
Model Number:	Beosound Balance		
Power Supply:	AC 100-240V, 50/60Hz		
Trade Name:	Bang & Olufsen	Serial No.:	-----
Date of Receipt:	Apr. 21, 2020	Date of Test:	Apr. 21~23, 2020
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:	Reviewed by:	 Date: Apr. 30, 2020 Approved by: _____	
Ring	Seven	Iceman Hu	
Ring / Assistant	Seven / Engineer	Iceman Hu / Manager	
Other Aspects:			
This report base on the previous report with report number: T190506W05-RP1, The Limited Single Modular was applied to the host product, the host antenna was updated, the rf module has not changed, conducted Emissions, spurious emissions and Band Edge tests were reassessed, other test item needn't re-tested.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products, It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Wireless Speaker
Model Number	:	Beosound Balance
Software Version	:	1.0.9505
Hardware Version	:	1.0.9505
Operation frequency	:	2402MHz~2480MHz
Number of channel	:	79
Modulation Type	:	BT BDR(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK
Sample Type	:	Prototype production

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	INPAQ	WA-F-LA-01-015	Internal	/	2.66

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	Maximum Peak Output Power	15.247(a)(1)	N/A
4	20dB Bandwidth	15.247(a)(1)	N/A
5	Carrier Frequency Separation	15.247(a)(1)	N/A
6	Number Of Hopping Channel	15.247(a)(1)(iii)	N/A
7	Dwell Time	15.247(a)(1)(iii)	N/A
8	Conducted Band Edge	15.247(d)	N/A
9	Conducted Spurious Emissions	15.247(d)	N/A
10	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
11	AC Power Line Conducted Emissions	15.207	PASS
12	Antenna Requirement	15.203	N/A

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab

: Certified by CNAS, CHINA
Registration No.: L5288
Date of registration: November 13, 2017

Certificated by FCC, USA
Designation Number: CN1215
Test Firm Registration Number: 722932
Date of registration: November 21, 2017

Certificated by A2LA, USA
Registration No.: 4366.01
Date of registration: November 07, 2017

Certificated by Industry Canada
CAB identifier No.: CN0035
Date of registration: January 04, 2019

Certificated by VCCI, Japan
Registration No.: R-13663; C-14103
Date of registration: July 25, 2017
This Certificate is valid until: July 24, 2020

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by TUV/PS, Shenzhen
Registration No.: SCN1017
Date of registration: January 27, 2011

Certificated by Intertek ETL SEMKO
Registration No.: 2011-RTL-L2-64
Date of registration: April 28, 2011

Certificated by Nemko, Hong Kong
Registration No.: 175193
Date of registration: May 4, 2011

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 18GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.8m	AC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into Bluetooth test mode by software before test.



(EUT: Wireless Speaker)

2.6. Test mode

Combining all the rates, modulations, and packet types, the Pre-scans had been carried out. The worst case test mode was selected for the final test as listed below.

Test Item	Modulation Type	Operating Mode	Packet Type	Test Channel
Radiated Spurious Emissions(Below 1GHz)	GFSK&8-DPSK	Non Hopping	DH5	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	GFSK&8-DPSK	Non Hopping	DH5	Low/Middle/High
Radiated Band Edge	GFSK&8-DPSK	Non Hopping	DH5	Low/High
AC Power Line Conducted Emissions	GFSK&8-DPSK	Non Hopping	DH5	Low/Middle/High

Note:

1. In radiated measurement,the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

2.8. Test Equipmen

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 14,19	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 14,19	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emission test(9 kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 14,19	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 14,19	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA9120D	EST-E031	LISAI	June 14,19	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 14,19	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

3. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

3.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


- (1) Emission level dB μ V = 20 log Emission level μ V/m.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.2. Test Setup


9kHz~30MHz

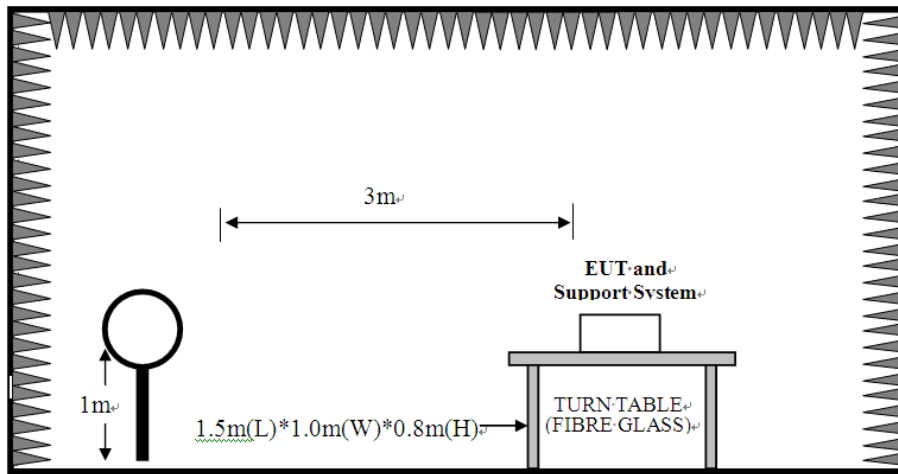

30~1000MHz

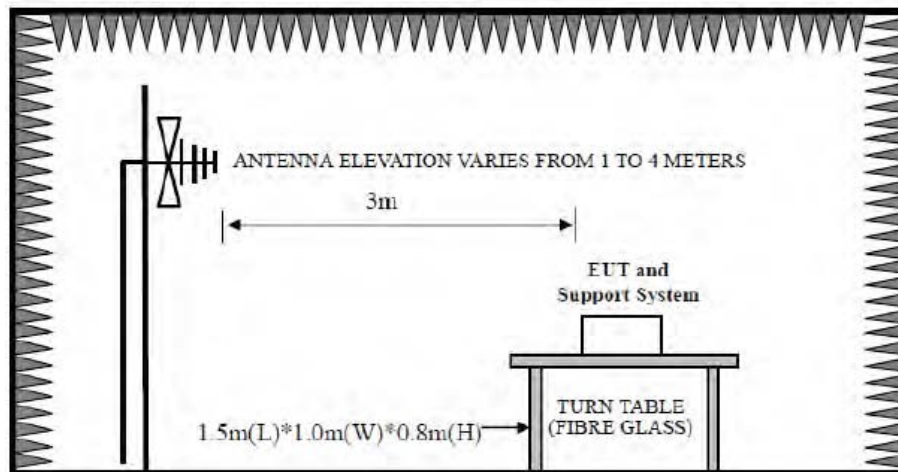

Above 1GHz

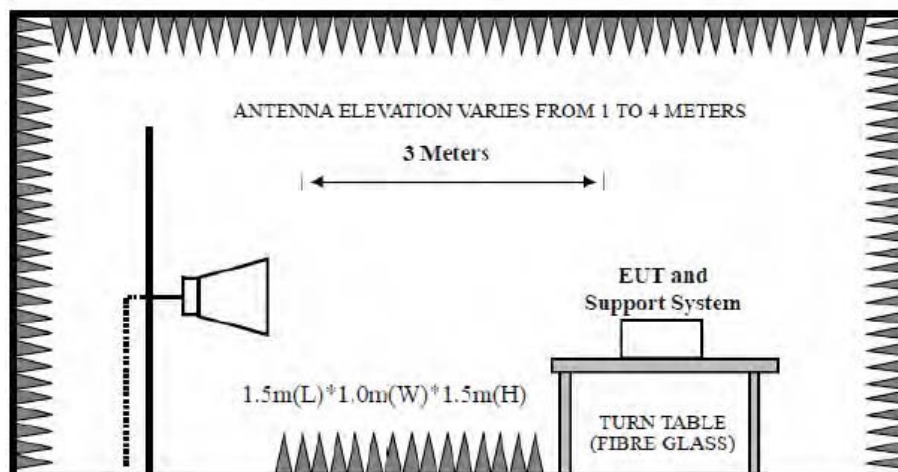

3.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	AVG Measurement
	3MHz	Duty cycle $\geq 98\%$, VBW=10Hz
		Duty cycle $< 98\%$, VBW $\geq 1/T$
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

3.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 10.3.
- g. Repeat above procedures until all channels and test modes were measured.
- h. Record the results in the test report.

Note:


1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2402MHz ,2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

3.5. Test Result

Radiated Emissions Below 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

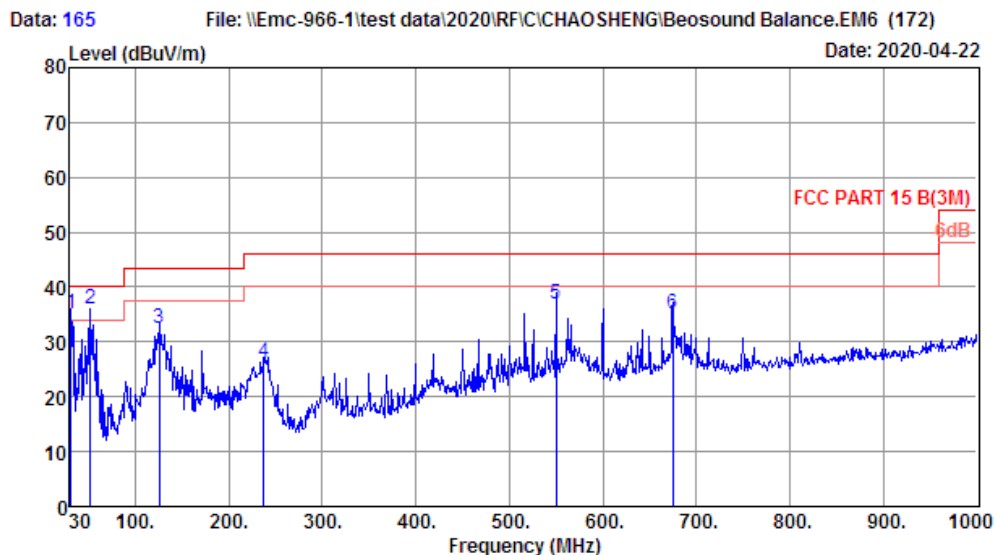


Site no. : site Data no. : 165
Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:19.3Humi:48%;Press:101.52KPa
Engineer : Zzb
EUT : Wireless Speaker
Power : AC 120V/60Hz
M/N : Beosound Balance
Test Mode : TX Mode

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.97	17.60	0.14	17.50	35.24	40.00	4.76	QP
52.31	7.50	0.32	28.20	36.02	40.00	3.98	QP
126.03	11.54	0.95	19.86	32.35	43.50	11.15	QP
237.58	11.14	1.57	13.59	26.30	46.00	19.70	QP
549.92	19.00	2.83	15.01	36.84	46.00	9.16	QP
675.05	21.70	3.23	10.34	35.27	46.00	10.73	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

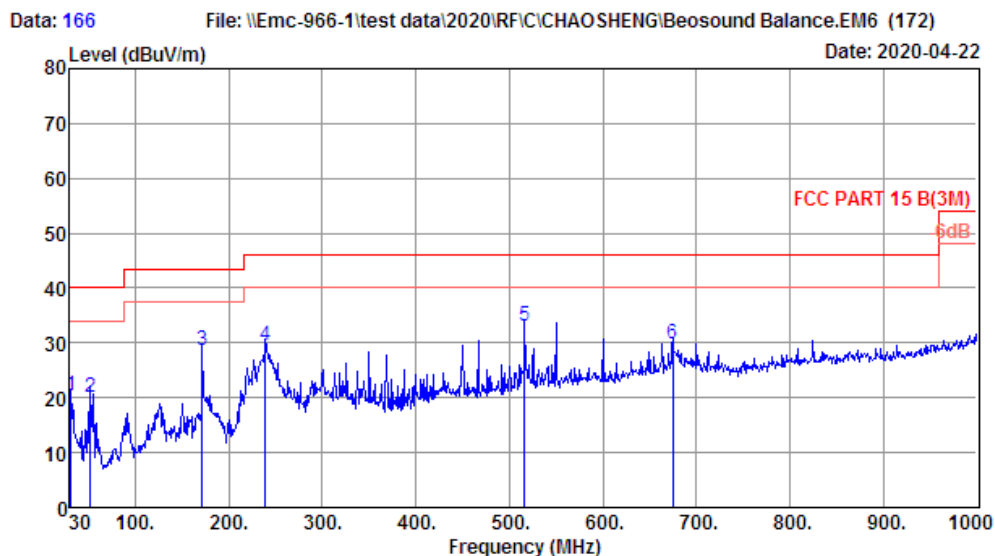

Site no. : 1# 966 Chamber Data no. : 166
Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 B(3M)
Env. / Ins. : Temp:19.3Humi:48%;Press:101.52KPa
Engineer : Zzb
EUT : Wireless Speaker
Power : AC 120V/60Hz
M/N : Beosound Balance
Test Mode : TX Mode

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.97	17.60	0.14	2.71	20.45	40.00	19.55	QP
52.31	7.50	0.32	12.30	20.12	40.00	19.88	QP
171.62	9.74	1.19	17.64	28.57	43.50	14.93	QP
239.52	11.30	1.58	16.76	29.64	46.00	16.36	QP
515.97	18.44	2.72	11.94	33.10	46.00	12.90	QP
675.05	21.70	3.23	4.79	29.72	46.00	16.28	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note:


1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All test mode had been pre-test, only the worst case was reported.

Radiated Emissions Above 1G

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 5 File: \\Emc-966-1\test data\2020\RF\CHAOSHENG\Beosound Balance.EM6 (148) Date: 2020-04-22

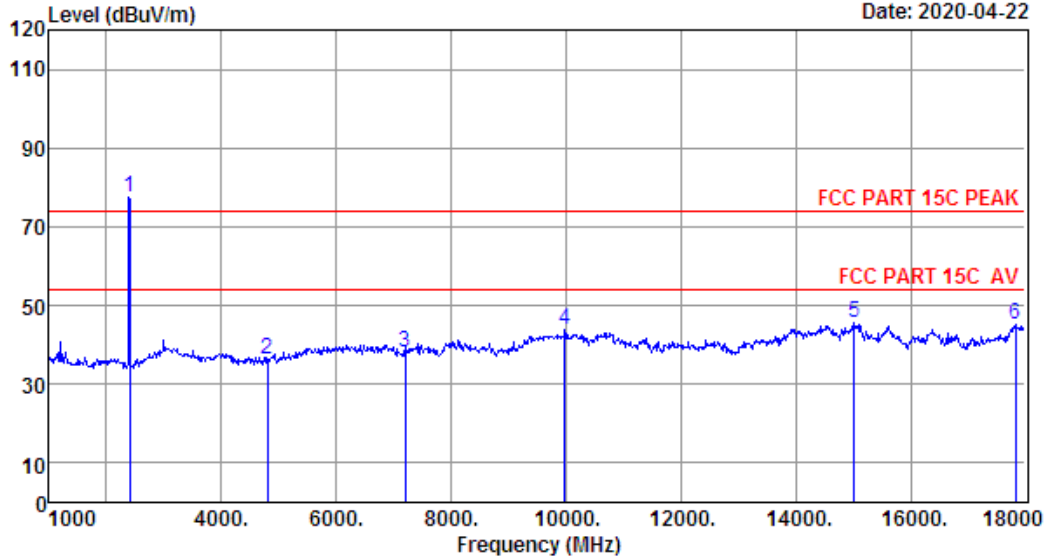

Site no. : 1# 966 Chamber Data no. : 5
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
Engineer : SEVEN
EUT : Wireless Speaker
Power : AC 120V/60Hz
M/N : Beosound Balance
Test Mode : GFSK TX 2402MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.26	1.45	34.64	83.24	77.31	74.00	-3.31	Peak
2	4804.00	31.12	3.25	34.66	36.65	36.36	74.00	37.64	Peak
3	7206.00	36.21	5.19	34.82	31.32	37.90	74.00	36.10	Peak
4	9976.00	38.87	5.88	34.20	33.14	43.69	74.00	30.31	Peak
5	15025.00	40.88	6.80	34.59	32.55	45.64	74.00	28.36	Peak
6	17830.00	47.54	8.13	34.32	23.60	44.95	74.00	29.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 6 File: \\Emc-966-1\test data\2020\RF\IC\CHAOSHENG\Beosound Balance.EM6 (148)
Date: 2020-04-22

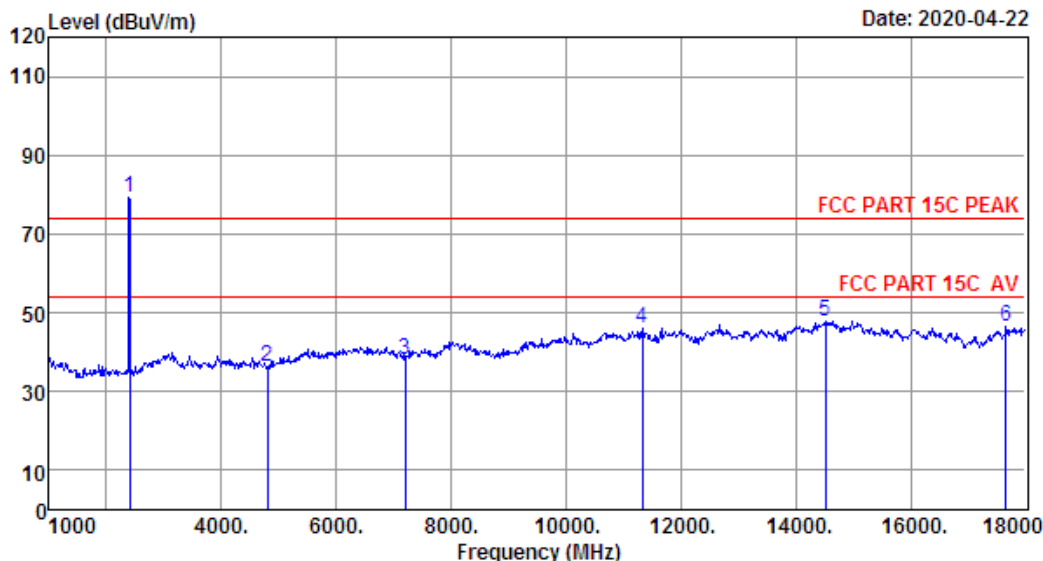

Site no. : 1# 966 Chamber Data no. : 6
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
Engineer : SEVEN
EUT : Wireless Speaker
Power : AC 120V/60Hz
M/N : Beosound Balance
Test Mode : GFSK TX 2402MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.26	1.45	34.64	85.26	79.33	74.00	-5.33	Peak
2	4804.00	31.12	3.25	34.66	36.60	36.31	74.00	37.69	Peak
3	7206.00	36.21	5.19	34.82	31.45	38.03	74.00	35.97	Peak
4	11336.00	39.90	6.14	34.60	34.63	46.07	74.00	27.93	Peak
5	14515.00	41.00	6.90	34.45	34.28	47.73	74.00	26.27	Peak
6	17660.00	46.19	8.02	34.33	26.78	46.66	74.00	27.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 7 File: \\Emc-966-1\test data\2020\RF\IC\CHAOSHENG\Beosound Balance.EM6 (148) Date: 2020-04-22

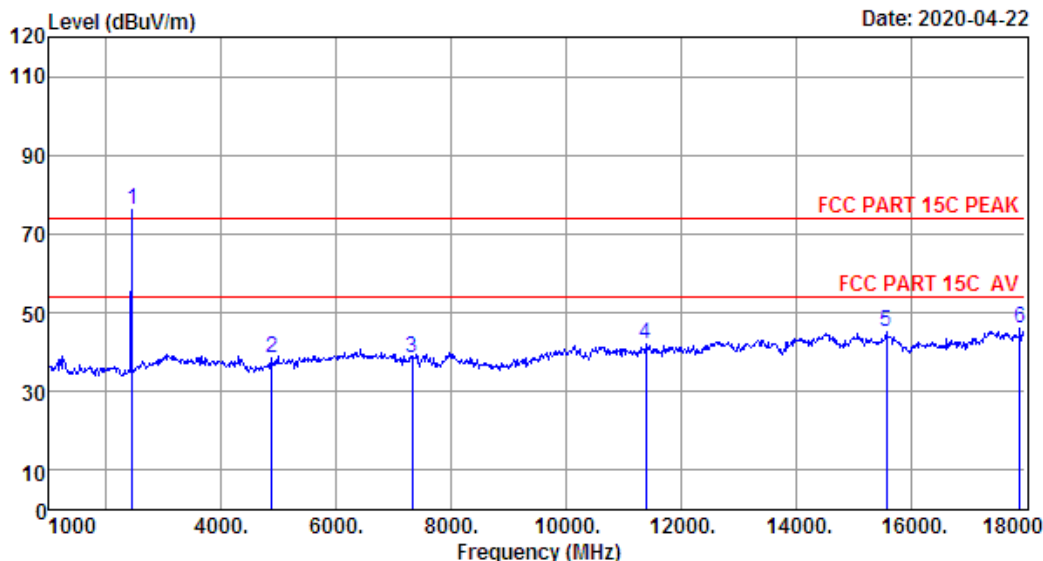

Site no. : 1# 966 Chamber Data no. : 7
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:27.3'; Humi:54%; Press:101.52kPa
Engineer : SEVEN
EUT : Wireless Speaker
Power : AC 120V/60Hz
M/N : Beosound Balance
Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2441.00	27.33	1.47	34.62	81.86	76.04	74.00	-2.04	Peak
2	4882.00	31.37	3.31	34.68	38.43	38.43	74.00	35.57	Peak
3	7323.00	36.46	5.22	34.83	31.75	38.60	74.00	35.40	Peak
4	11387.00	39.90	6.14	34.62	30.79	42.21	74.00	31.79	Peak
5	15586.00	40.26	6.51	34.37	32.61	45.01	74.00	28.99	Peak
6	17898.00	48.09	8.17	34.31	23.99	45.94	74.00	28.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 8 File: \\Emc-966-1\test data\2020\RF\IC\CHAOSHENG\Beosound Balance.EM6 (148)

Date: 2020-04-22

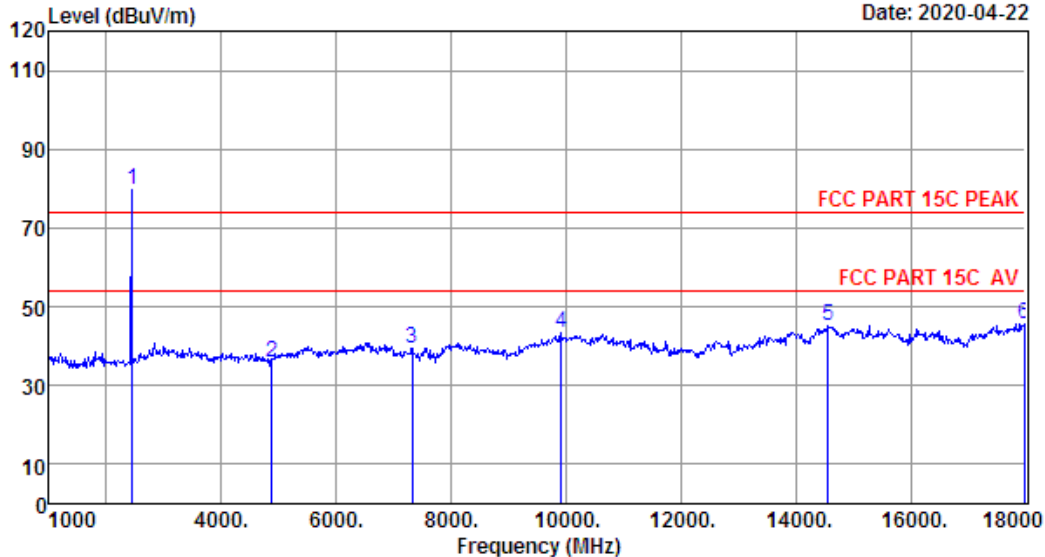

Site no. : 1# 966 Chamber Data no. : 8
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:27.3'; Humi:54%; Press:101.52kPa
Engineer : SEVEN
EUT : Wireless Speaker
Power : AC 120V/60Hz
M/N : Beosound Balance
Test Mode : GFSK TX 2441MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.33	1.47	34.62	85.70	79.88	74.00	-5.88	Peak
2	4882.00	31.37	3.31	34.68	36.08	36.08	74.00	37.92	Peak
3	7323.00	36.46	5.22	34.83	32.60	39.45	74.00	34.55	Peak
4	9925.00	38.76	5.84	34.21	32.82	43.21	74.00	30.79	Peak
5	14566.00	40.99	6.89	34.47	31.66	45.07	74.00	28.93	Peak
6	17983.00	48.76	8.23	34.30	23.03	45.72	74.00	28.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 9 File: \\Emc-966-1\test data\2020\RFIC\CHAOSHENG\Beosound Balance.EM6 (148)
Date: 2020-04-22

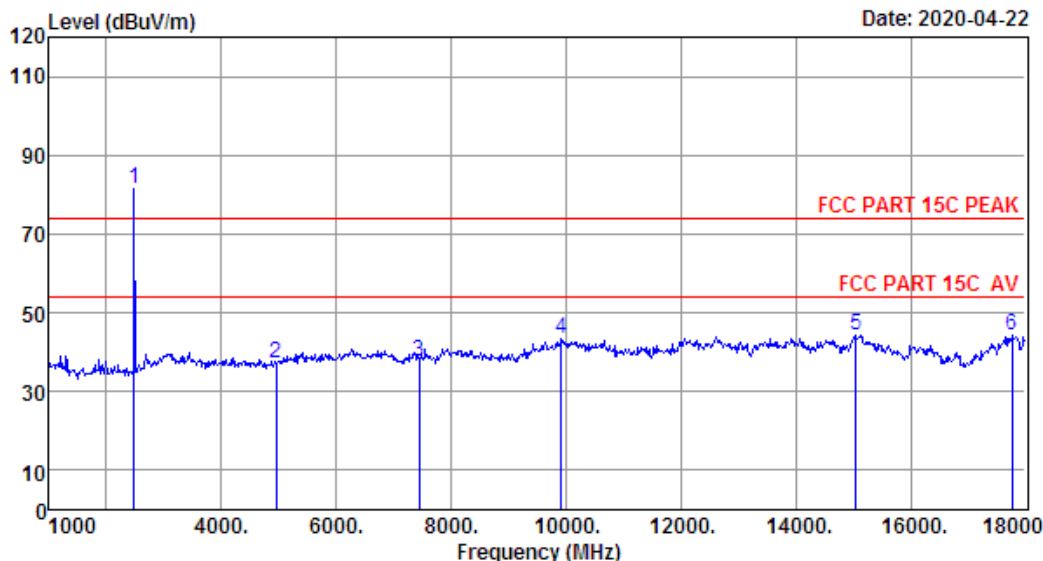


Site no. : 1# 966 Chamber Data no. : 9
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
Engineer : SEVEN
EUT : Wireless Speaker
Power : AC 120V/60Hz
M/N : Beosound Balance
Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.38	1.48	34.61	87.14	81.39	74.00	-7.39	Peak
2	4960.00	31.68	3.38	34.69	36.71	37.08	74.00	36.92	Peak
3	7440.00	36.70	5.26	34.84	30.66	37.78	74.00	36.22	Peak
4	9925.00	38.76	5.84	34.21	32.94	43.33	74.00	30.67	Peak
5	15042.00	40.86	6.78	34.59	31.40	44.45	74.00	29.55	Peak
6	17762.00	47.00	8.09	34.32	23.32	44.09	74.00	29.91	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

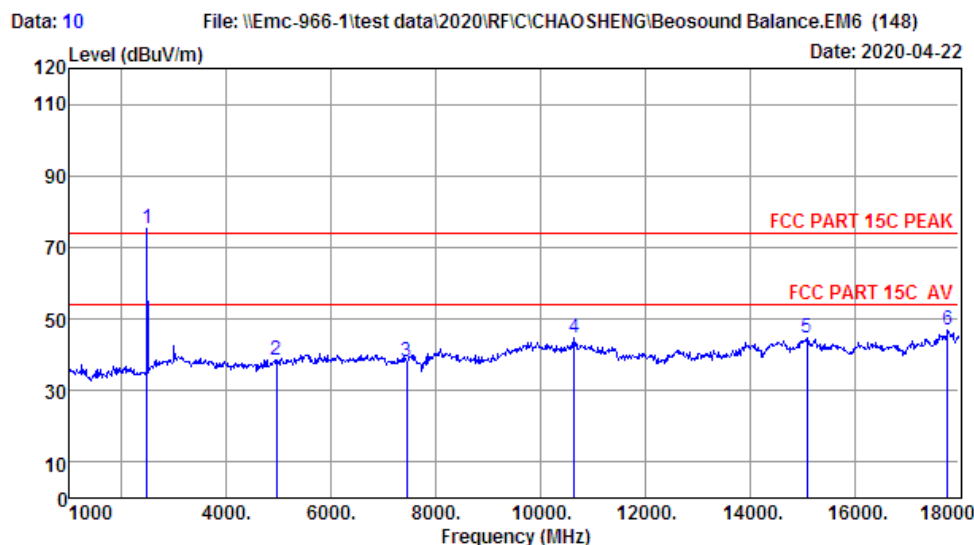

Site no. : 1# 966 Chamber Data no. : 10
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : SEVEN
 EUT : Wireless Speaker
 Power : AC 120V/60Hz
 M/N : Beosound Balance
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.38	1.48	34.61	81.12	75.37	74.00	-1.37	Peak
2	4960.00	31.68	3.38	34.69	37.99	38.36	74.00	35.64	Peak
3	7440.00	36.70	5.26	34.84	31.04	38.16	74.00	35.84	Peak
4	10639.00	39.54	6.04	34.39	33.39	44.58	74.00	29.42	Peak
5	15093.00	40.81	6.74	34.57	31.54	44.52	74.00	29.48	Peak
6	17779.00	47.14	8.10	34.32	26.08	47.00	74.00	27.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


Note:

1. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All test mode had been pre-test, only Low/Middle/High Channel of the worst case modulation mode was reported.

Radiated Band Edge

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

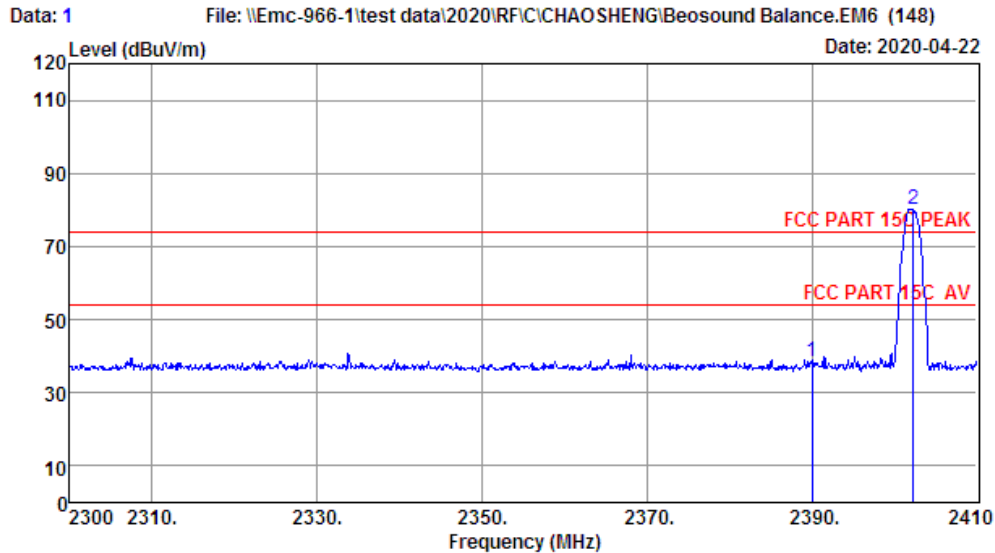

Site no. : 1# 966 Chamber Data no. : 1
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : SEVEN
 EUT : Wireless Speaker
 Power : AC 120V/60Hz
 M/N : Beosound Balance
 Test Mode : GFSK TX 2402MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.26	1.45	34.64	44.52	38.59	74.00	35.41	Peak
2	2402.30	27.26	1.45	34.64	86.25	80.32	74.00	-6.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 2 File: \\Emc-966-1\\test data\\2020\\RF\\C\\CHAOSHENG\\Beosound Balance.EM6 (148) Date: 2020-04-22

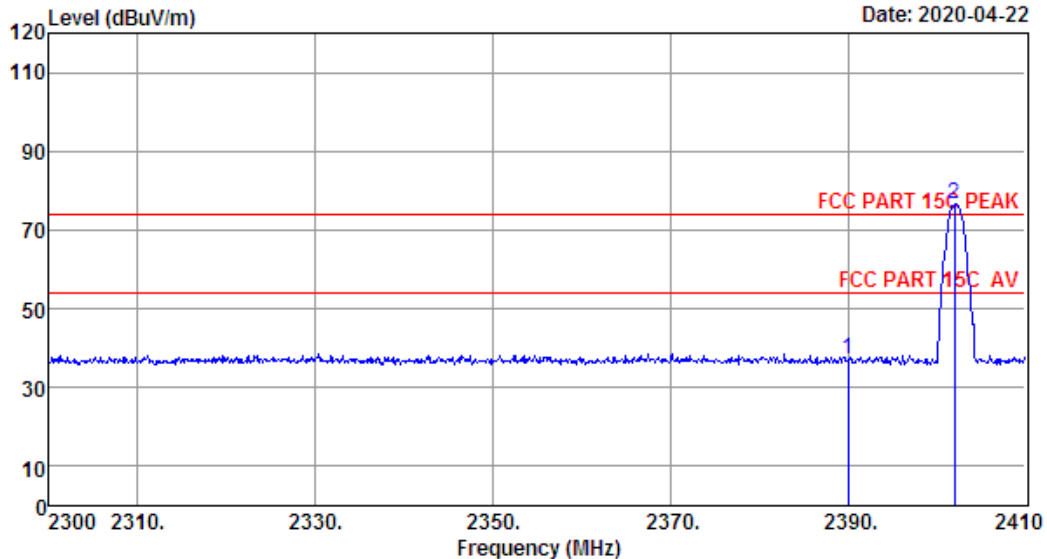

Site no. : 1# 966 Chamber Data no. : 2
Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:27.3'; Humi:54%; Press:101.52kPa
Engineer : SEVEN
EUT : Wireless Speaker
Power : AC 120V/60Hz
M/N : Beosound Balance
Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.26	1.45	34.64	42.95	37.02	74.00	36.98	Peak
2	2401.97	27.26	1.45	34.64	82.39	76.46	74.00	-2.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 3

File: \\Emc-966-1\test data\2020\RFIC\CHAOSHENG\Beosound Balance.EM6 (148)

Date: 2020-04-22

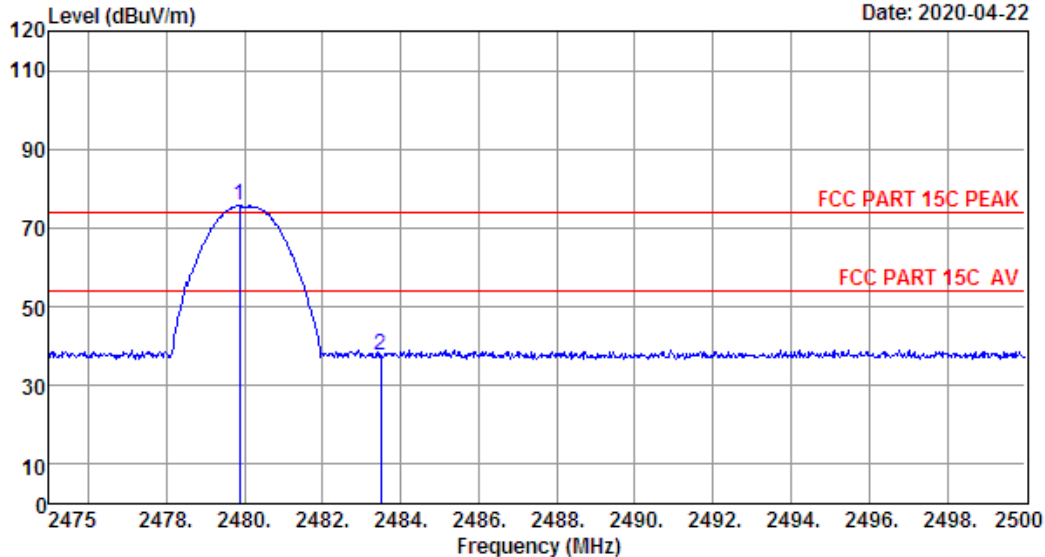


Site no. : 1# 966 Chamber Data no. : 3
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : SEVEN
 EUT : Wireless Speaker
 Power : AC 120V/60Hz
 M/N : Beosound Balance
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.88	27.38	1.48	34.61	81.39	75.64	74.00	-1.64	Peak
2	2483.50	27.38	1.48	34.61	43.53	37.78	74.00	36.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

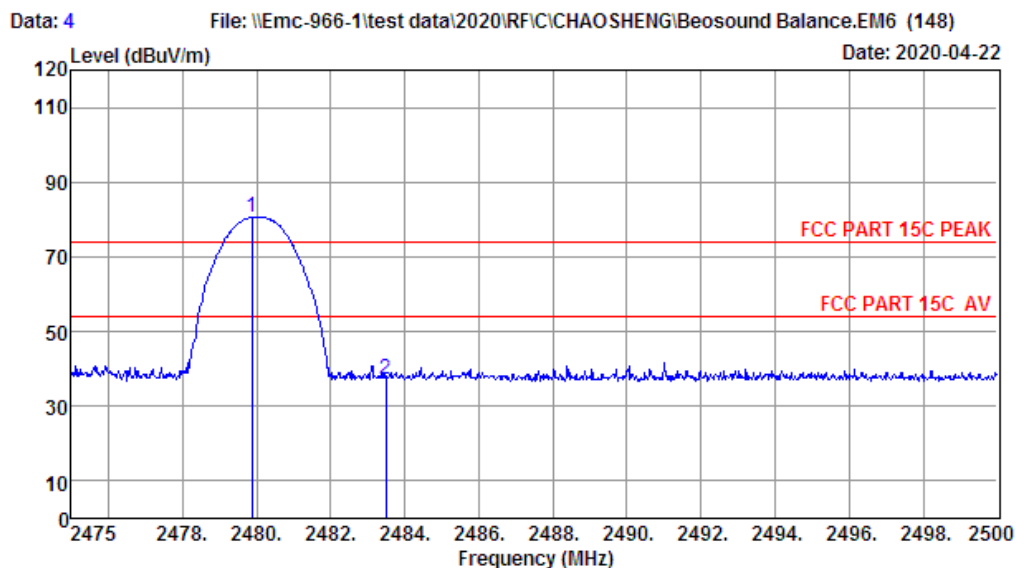

Site no. : 1# 966 Chamber Data no. : 4
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : SEVEN
 EUT : Wireless Speaker
 Power : AC 120V/60Hz
 M/N : Beosound Balance
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.88	27.38	1.48	34.61	86.25	80.50	74.00	-6.50	Peak
2	2483.50	27.38	1.48	34.61	43.09	37.34	74.00	36.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. All test mode had been pre-test, only Low/High Channel of the worst case modulation mode was reported.

4. AC POWER LINE CONDUCTED EMISSIONS


4.1. Limit

Frequency			Maximum RF Line Voltage	
			Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz	~	500kHz	66 ~ 56*	56 ~ 46*
500kHz	~	5MHz	56	46
5MHz	~	30MHz	60	50

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

4.2. Test Setup

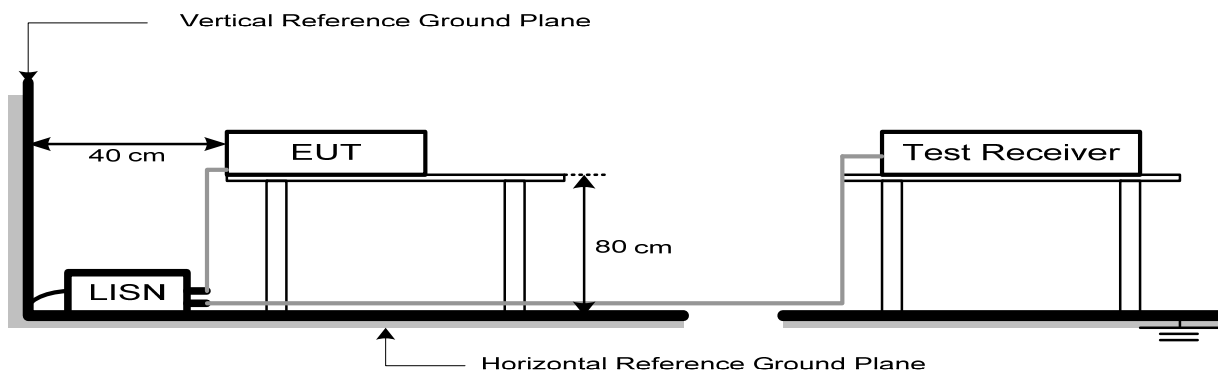

4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold


4.4. Test Procedure

- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 11.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.

4.5. Test Result

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

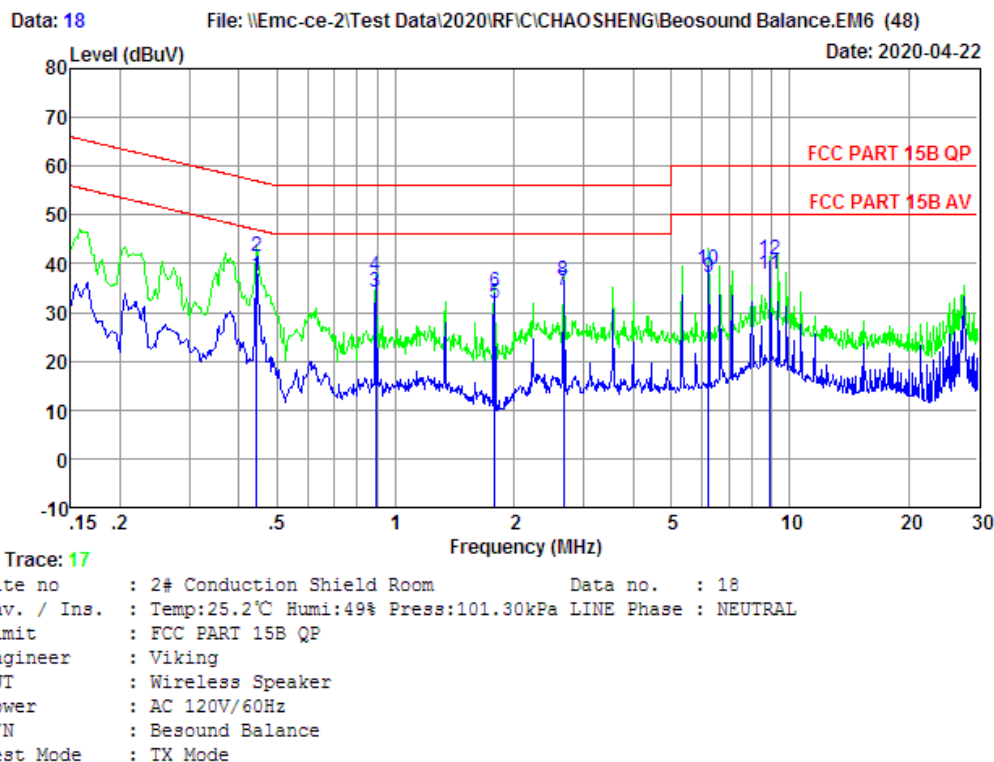

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.44	9.69	0.05	27.75	37.49	46.98	9.49	Average
2	0.44	9.69	0.05	31.68	41.42	56.98	15.56	QP
3	0.89	9.74	0.06	24.29	34.09	46.00	11.91	Average
4	0.89	9.74	0.06	27.57	37.37	56.00	18.63	QP
5	1.78	9.78	0.06	22.14	31.98	46.00	14.02	Average
6	1.78	9.78	0.06	24.33	34.17	56.00	21.83	QP
7	2.66	9.87	0.07	24.49	34.43	46.00	11.57	Average
8	2.66	9.87	0.07	26.58	36.52	56.00	19.48	QP
9	6.22	9.70	0.07	27.42	37.19	50.00	12.81	Average
10	6.22	9.70	0.07	29.12	38.89	60.00	21.11	QP
11	8.92	9.74	0.08	27.90	37.72	50.00	12.28	Average
12	8.92	9.74	0.08	30.99	40.81	60.00	19.19	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 20

File: \\Emc-ce-2\Test Data\2020\RFIC\CHAOSHENG\Beosound Balance.EM6 (48)

Date: 2020-04-22

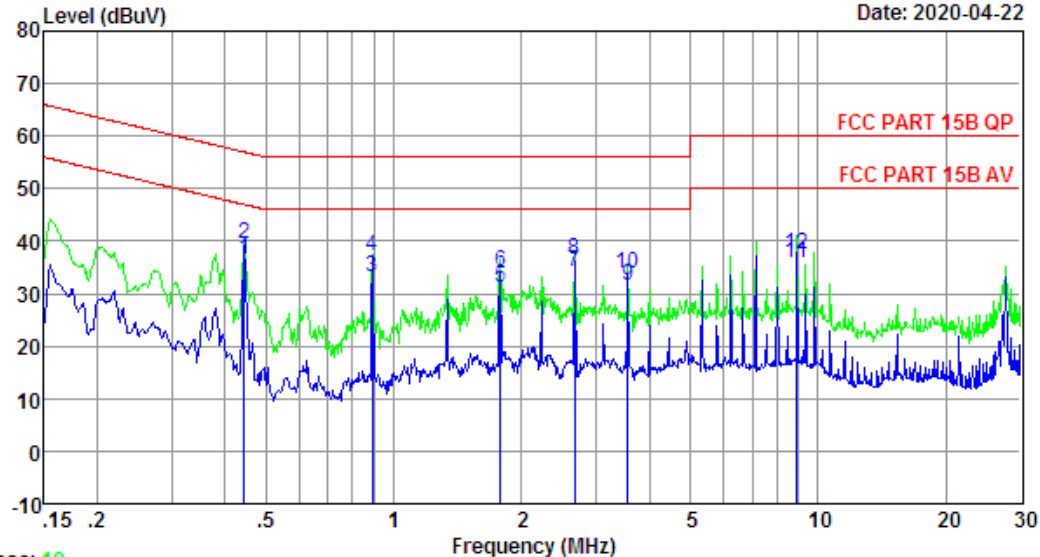

Trace: 19

Site no : 2# Conduction Shield Room Data no. : 20
Env. / Ins. : Temp:25.2°C Humi:49% Press:101.30kPa LINE Phase : LINE
Limit : FCC PART 15B QP
Engineer : Viking
EUT : Wireless Speaker
Power : AC 120V/60Hz
M/N : Beosound Balance
Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.44	9.77	0.05	26.74	36.56	46.98	10.42	Average
2	0.44	9.77	0.05	29.65	39.47	56.98	17.51	QP
3	0.89	9.87	0.06	23.15	33.08	46.00	12.92	Average
4	0.89	9.87	0.06	27.37	37.30	56.00	18.70	QP
5	1.78	9.85	0.06	21.22	31.13	46.00	14.87	Average
6	1.78	9.85	0.06	24.24	34.15	56.00	21.85	QP
7	2.66	9.87	0.07	24.13	34.07	46.00	11.93	Average
8	2.66	9.87	0.07	26.53	36.47	56.00	19.53	QP
9	3.57	9.93	0.07	21.41	31.41	46.00	14.59	Average
10	3.57	9.93	0.07	23.95	33.95	56.00	22.05	QP
11	8.92	9.91	0.08	25.97	35.96	50.00	14.04	Average
12	8.92	9.91	0.08	27.40	37.39	60.00	22.61	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 2

File: \\Emc-ce-2\Test Data\2020\RFIC\CHAOSHENG\Beosound Balance.EM6 (48)

Date: 2020-04-22

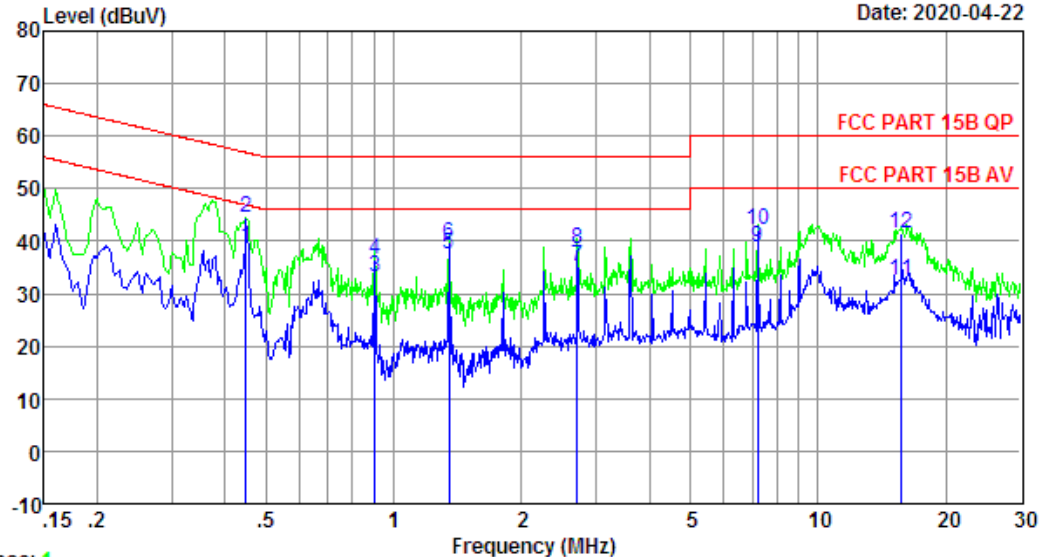

Trace: 1

Site no : 2# Conduction Shield Room Data no. : 2
 Env. / Ins. : Temp:25.2°C Humi:49% Press:101.30kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : Wireless Speaker
 Power : AC 240V/60Hz
 M/N : Beosound Balance
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.45	9.69	0.05	29.05	38.79	46.89	8.10	Average
2	0.45	9.69	0.05	34.67	44.41	56.89	12.48	QP
3	0.90	9.74	0.06	23.44	33.24	46.00	12.76	Average
4	0.90	9.74	0.06	26.67	36.47	56.00	19.53	QP
5	1.35	9.77	0.06	27.55	37.38	46.00	8.62	Average
6	1.35	9.77	0.06	29.68	39.51	56.00	16.49	QP
7	2.71	9.87	0.07	25.29	35.23	46.00	10.77	Average
8	2.71	9.87	0.07	28.64	38.58	56.00	17.42	QP
9	7.21	9.57	0.08	29.28	38.93	50.00	11.07	Average
10	7.21	9.57	0.08	32.37	42.02	60.00	17.98	QP
11	15.72	10.09	0.08	22.27	32.44	50.00	17.56	Average
12	15.72	10.09	0.08	31.38	41.55	60.00	18.45	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin=Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 4

File: \\Emc-ce-2\Test Data\2020\RFIC\CHAOSHENG\Beosound Balance.EM6 (48)

Date: 2020-04-22

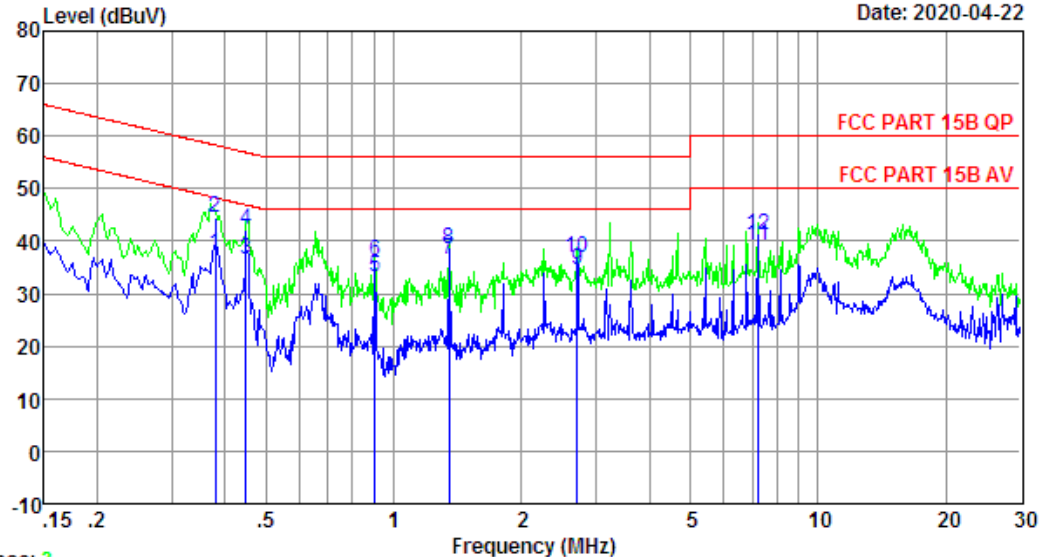

Trace: 3


Site no : 2# Conduction Shield Room Data no. : 4
Env. / Ins. : Temp:25.2°C Humi:49% Press:101.30kPa LINE Phase : LINE
Limit : FCC PART 15B QP
Engineer : Viking
EUT : Wireless Speaker
Power : AC 240V/60Hz
M/N : Beosound Balance
Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.38	9.75	0.05	27.74	37.54	48.30	10.76	Average
2	0.38	9.75	0.05	34.67	44.47	58.30	13.83	QP
3	0.45	9.77	0.05	26.69	36.51	46.89	10.38	Average
4	0.45	9.77	0.05	32.37	42.19	56.89	14.70	QP
5	0.90	9.88	0.06	23.35	33.29	46.00	12.71	Average
6	0.90	9.88	0.06	26.36	36.30	56.00	19.70	QP
7	1.35	9.87	0.06	26.55	36.48	46.00	9.52	Average
8	1.35	9.87	0.06	28.39	38.32	56.00	17.68	QP
9	2.71	9.87	0.07	24.52	34.46	46.00	11.54	Average
10	2.71	9.87	0.07	26.93	36.87	56.00	19.13	QP
11	7.21	10.41	0.08	28.74	39.23	50.00	10.77	Average
12	7.21	10.41	0.08	30.54	41.03	60.00	18.97	QP


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin=Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

5. TEST SETUP PHOTO


Conducted Test

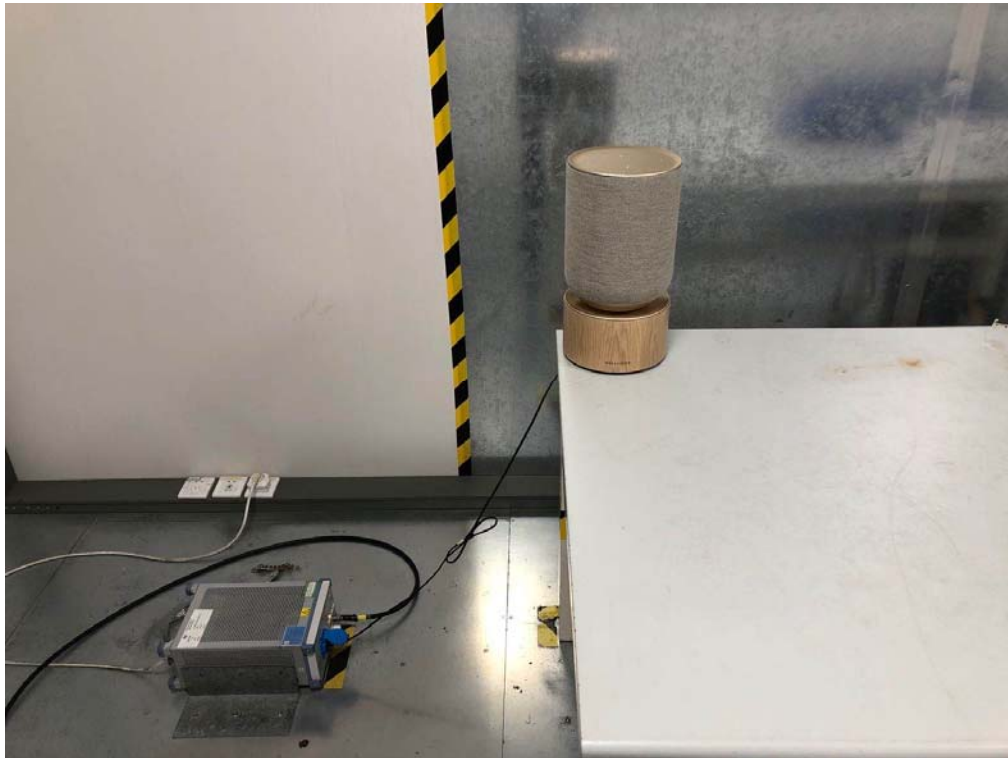

Radiated Test (Below 1GHz)

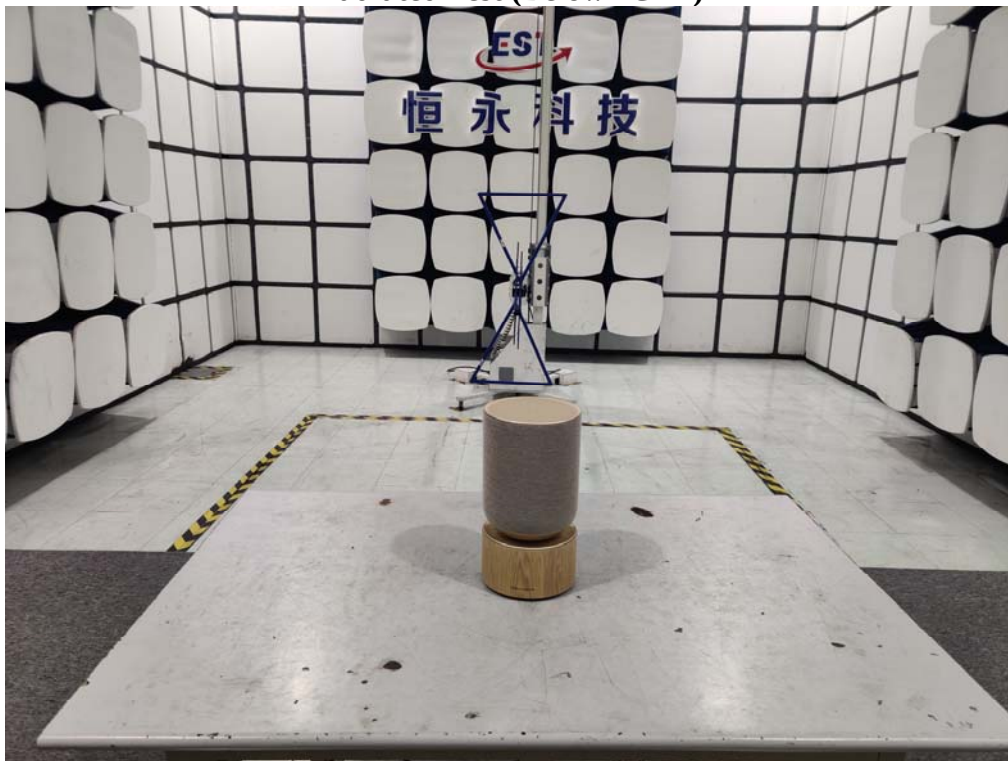


Radiated Test (Above 1GHz)

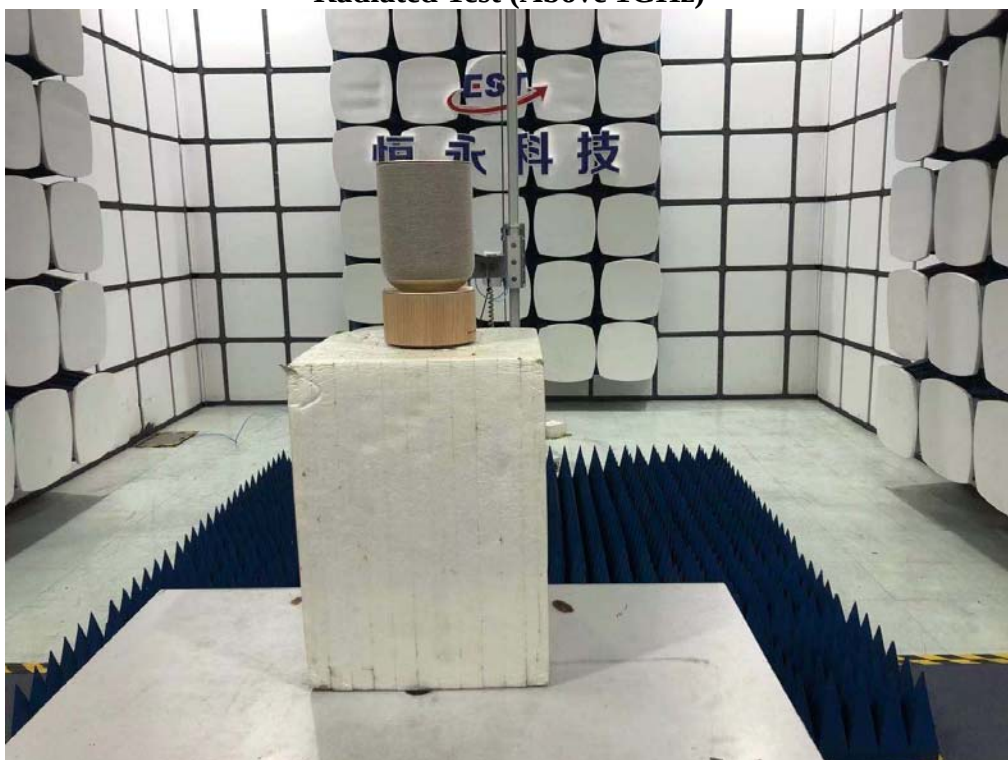

6. EUT PHOTO

External Photos
M/N: Beosound Balance

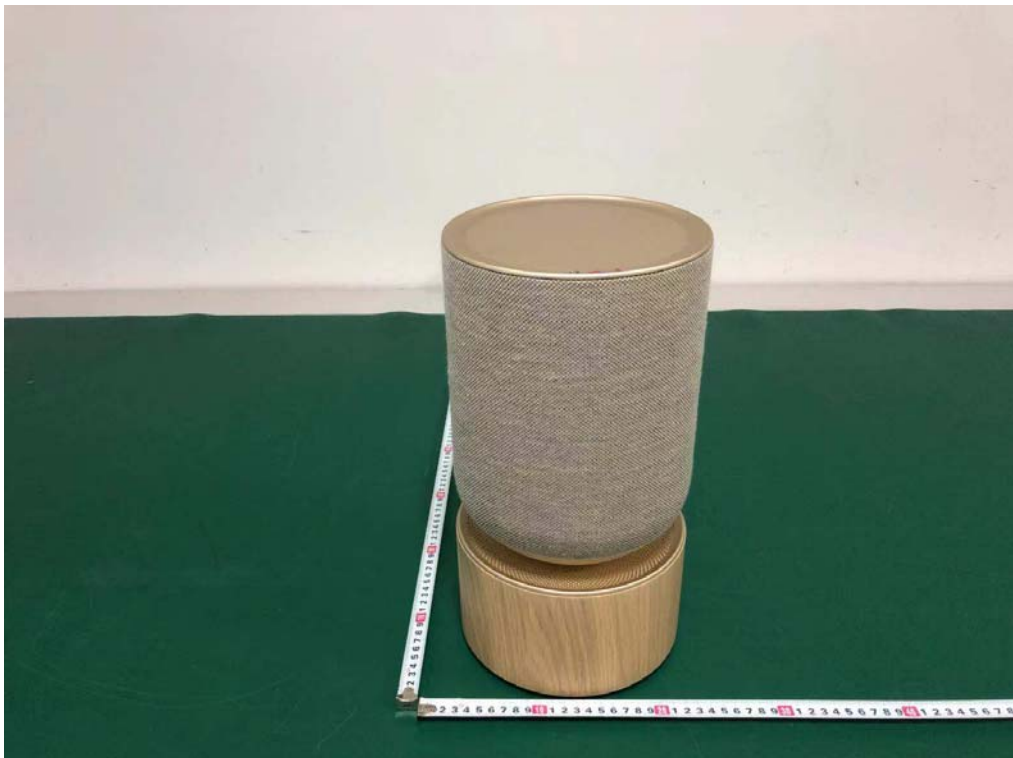

External Photos
M/N: Beosound Balance




External Photos
M/N: Beosound Balance




External Photos
M/N: Beosound Balance




Internal Photos
M/N: Beosound Balance

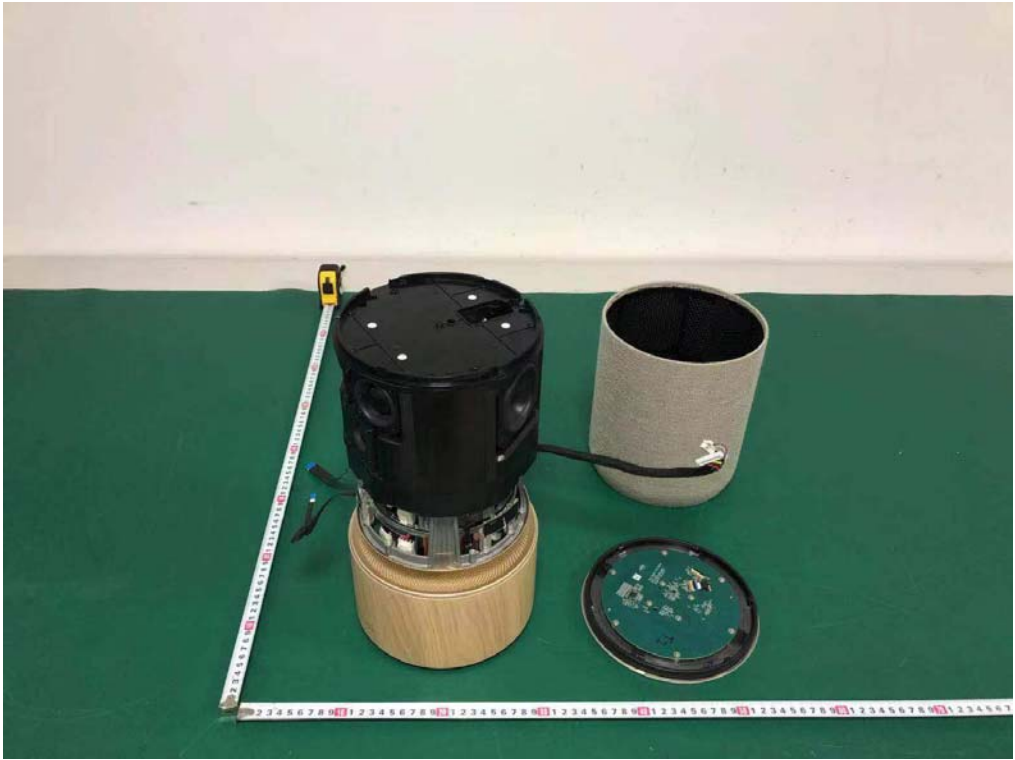

Internal Photos
M/N: Beosound Balance

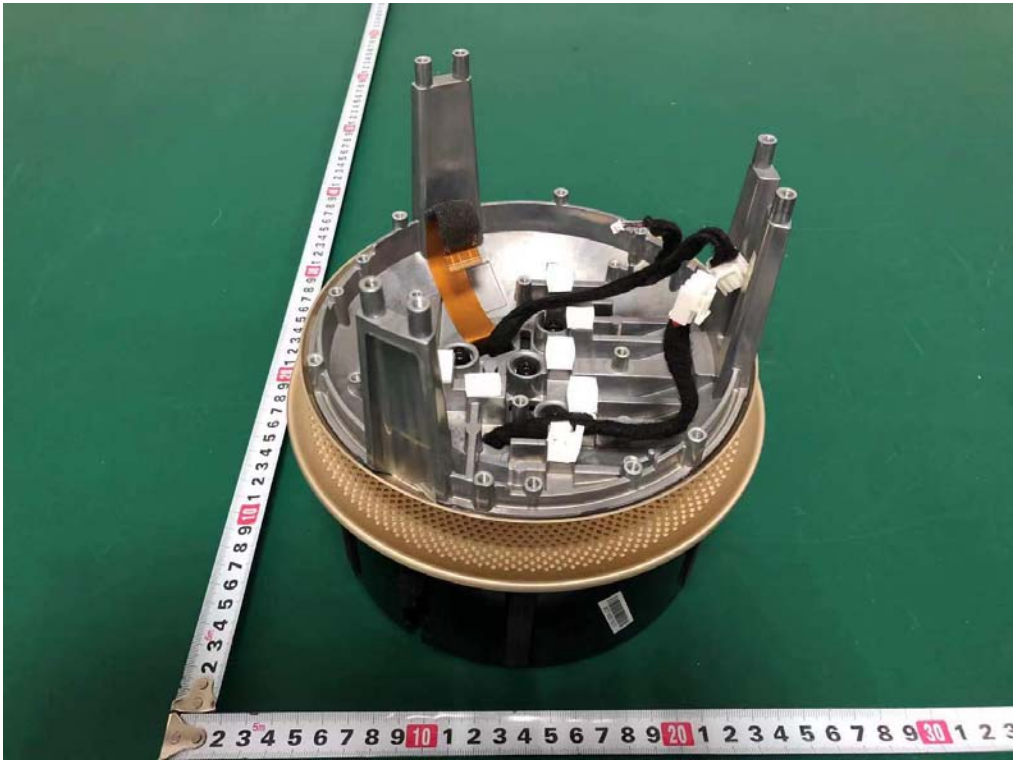



Internal Photos
M/N: Beosound Balance

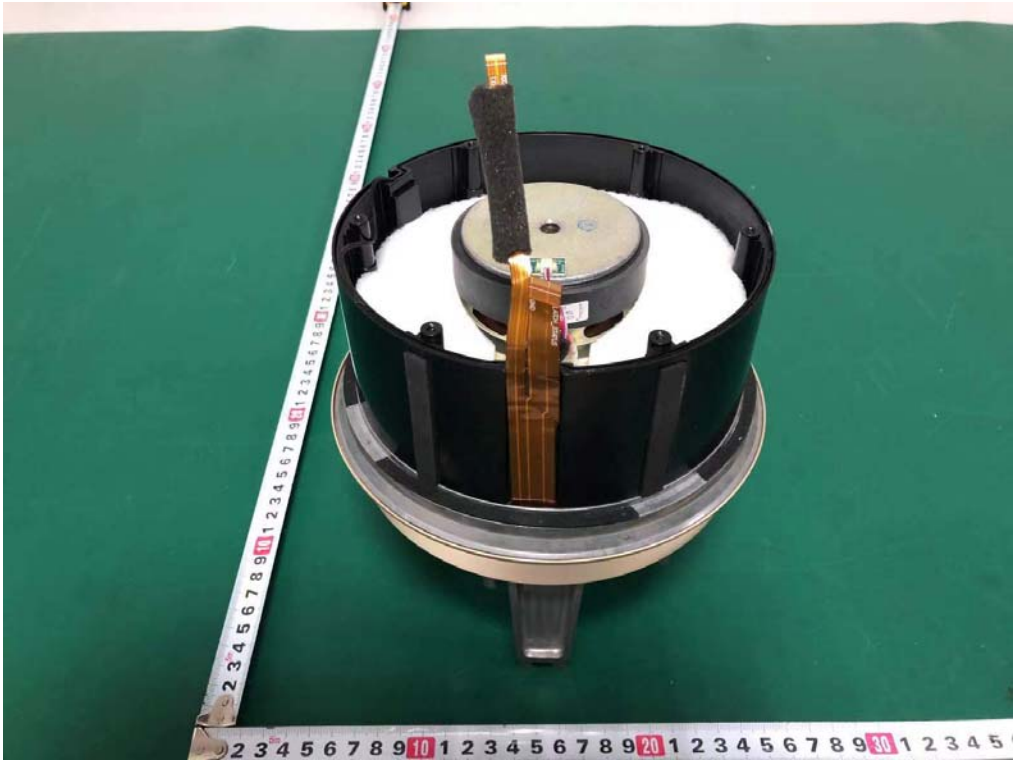



Internal Photos
M/N: Beosound Balance




Internal Photos
M/N: Beosound Balance

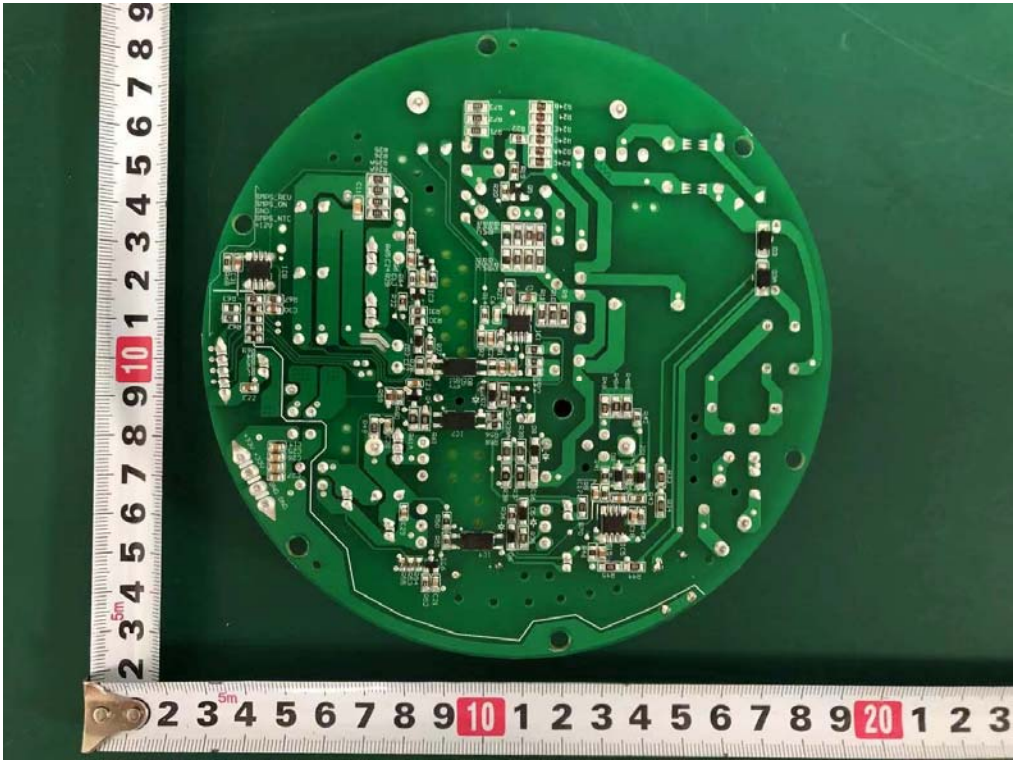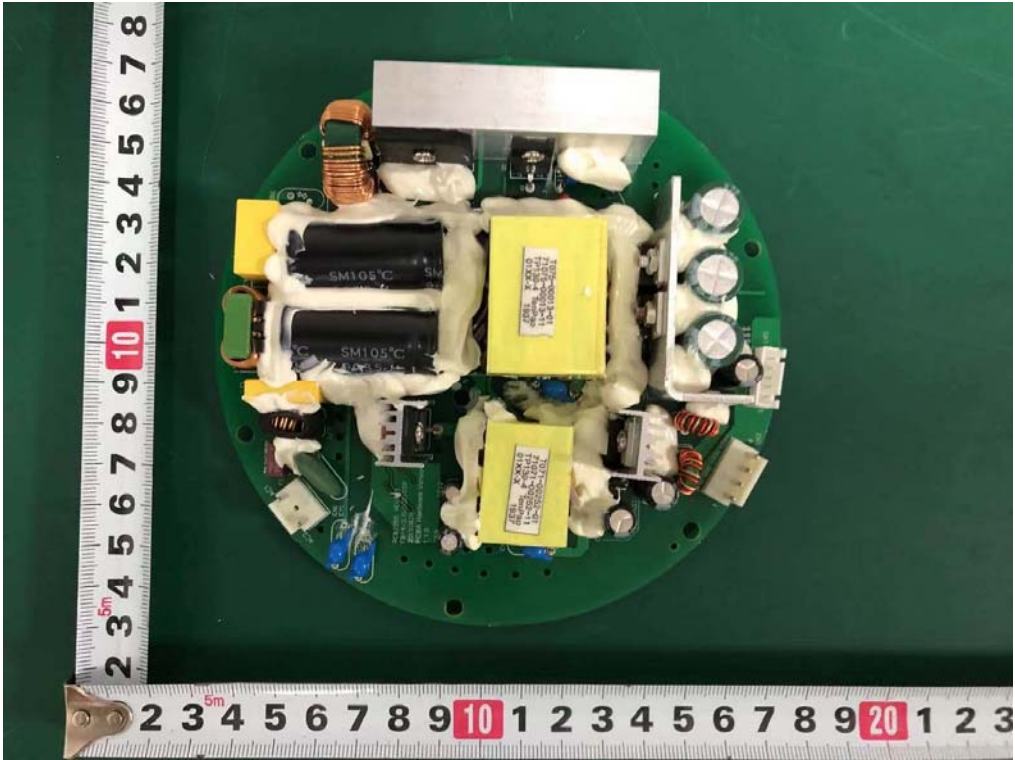



Internal Photos
M/N: Beosound Balance

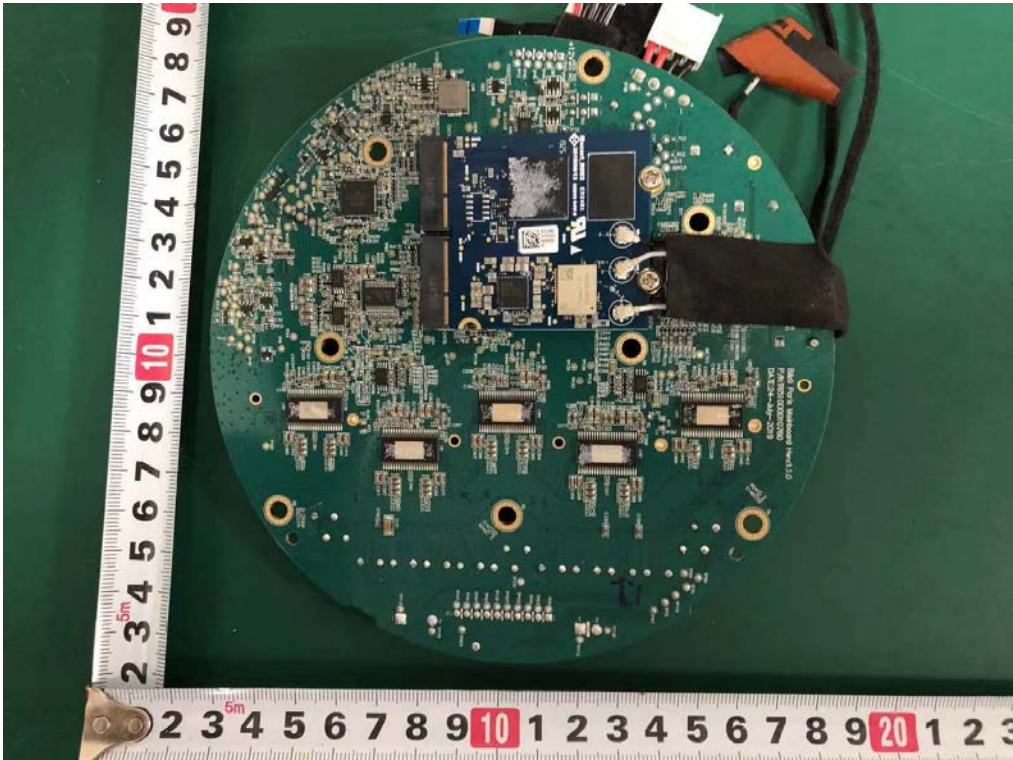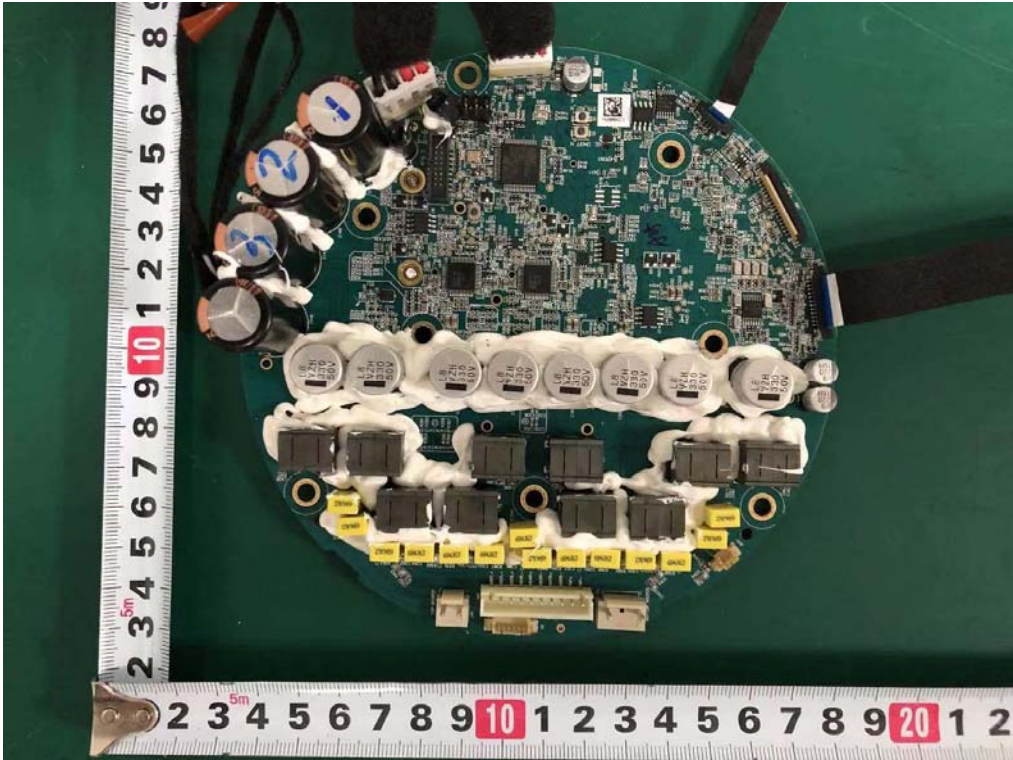



Internal Photos
M/N: Beosound Balance

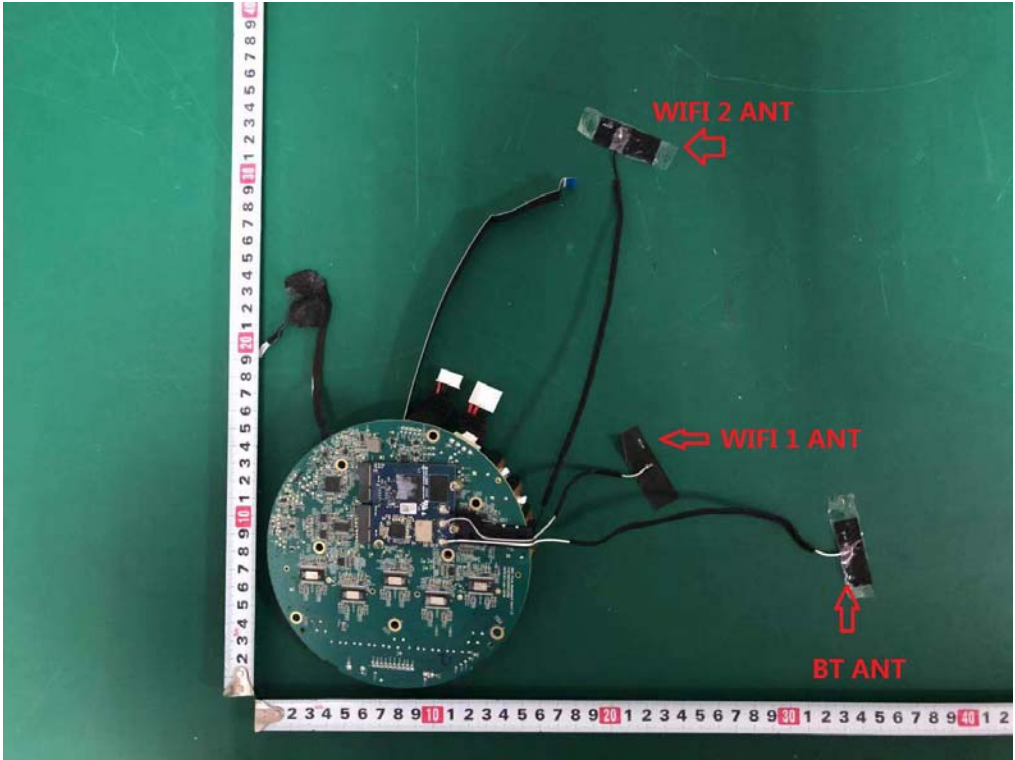



Internal Photos
M/N: Beosound Balance

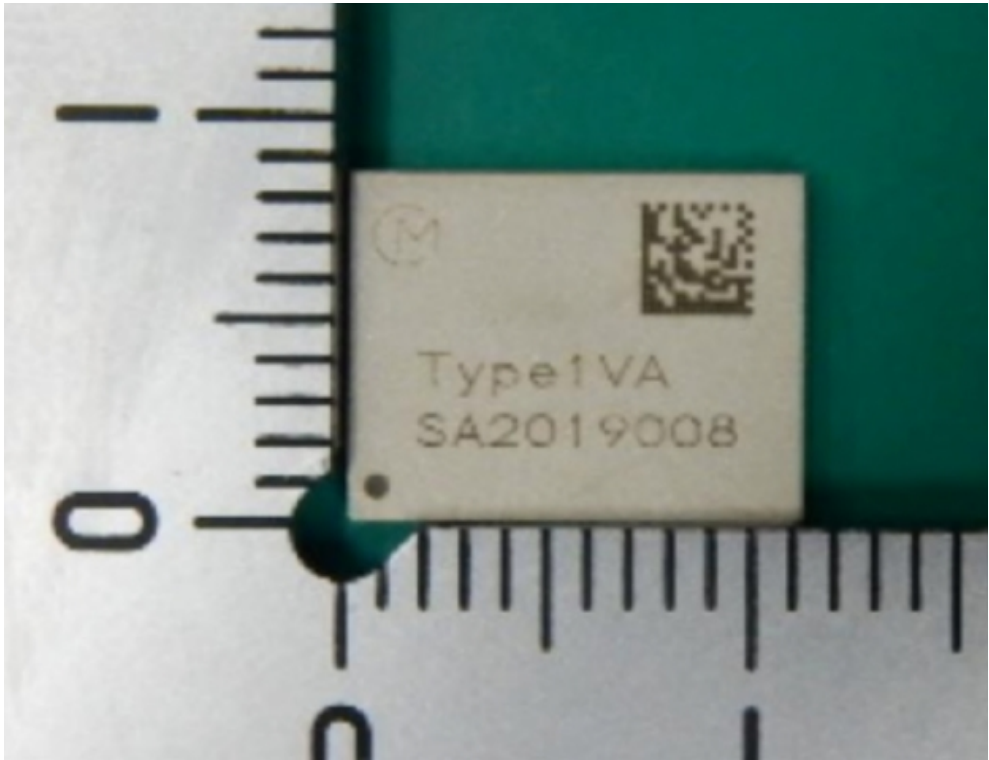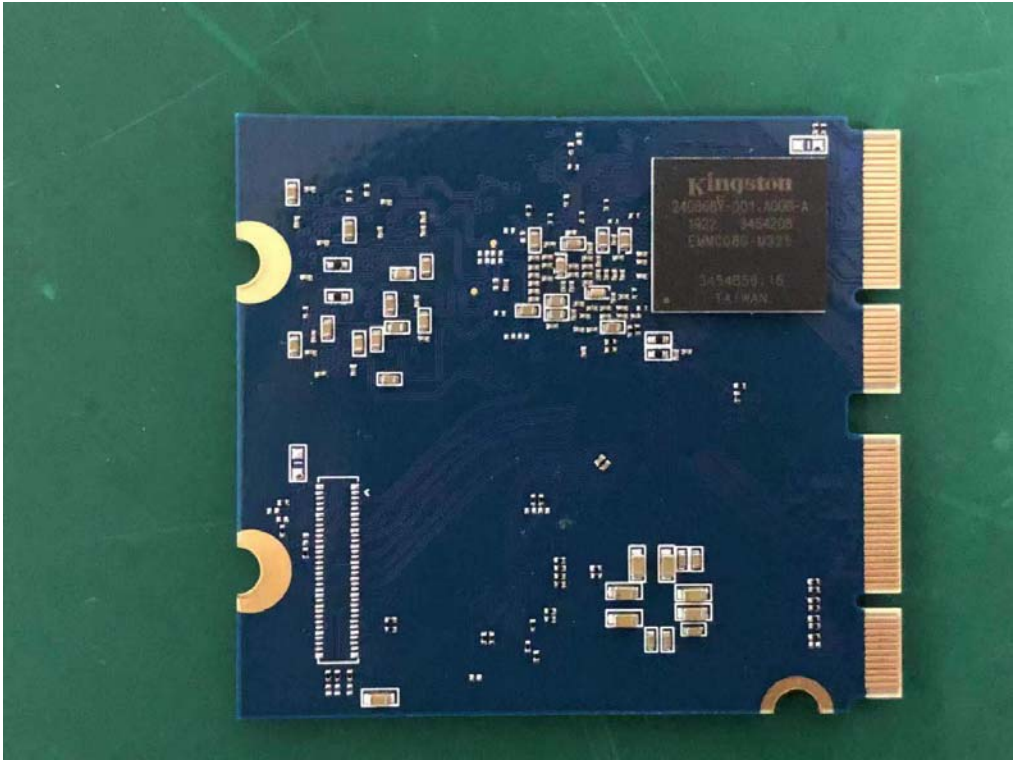


Internal Photos
M/N: Beosound Balance

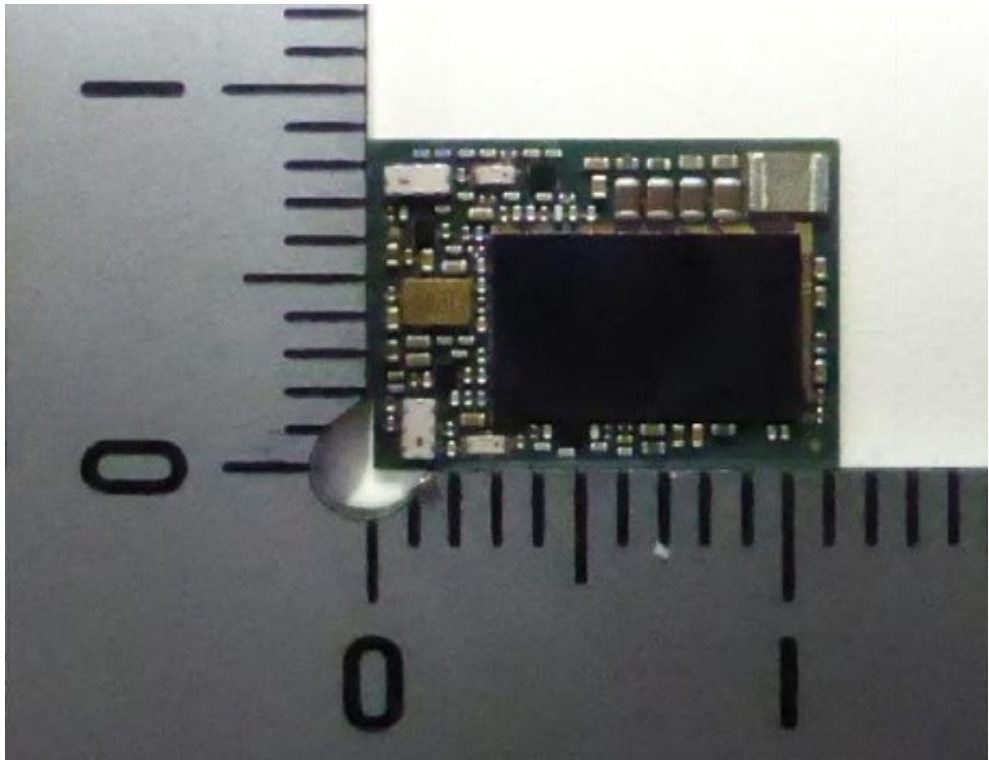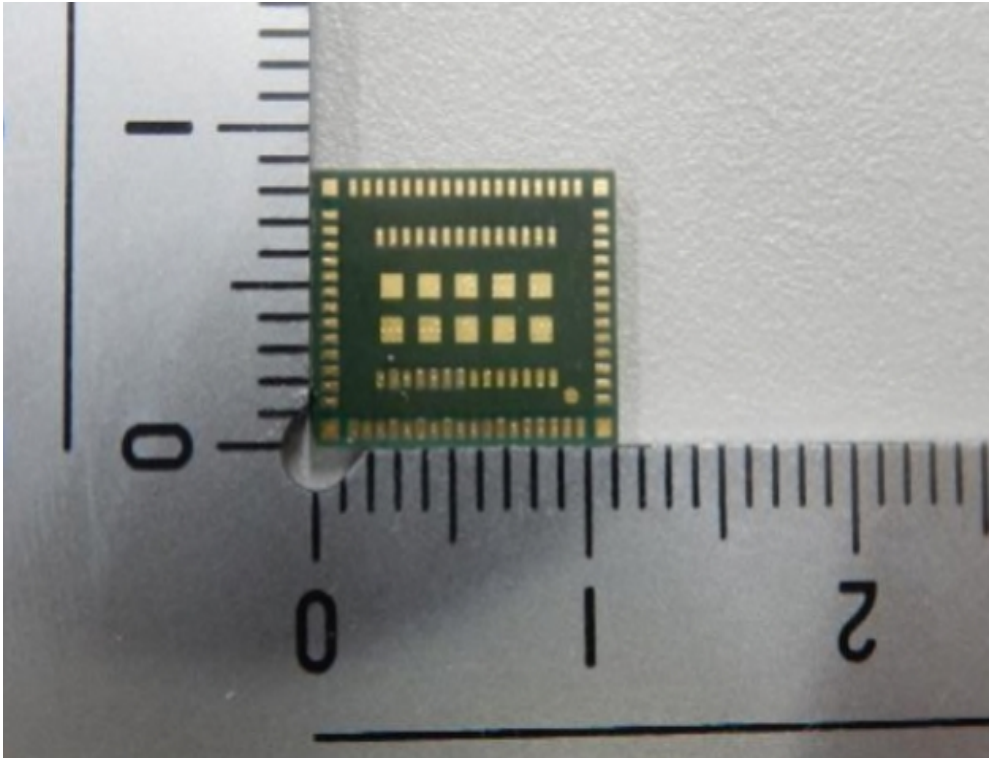



Internal Photos
M/N: Beosound Balance

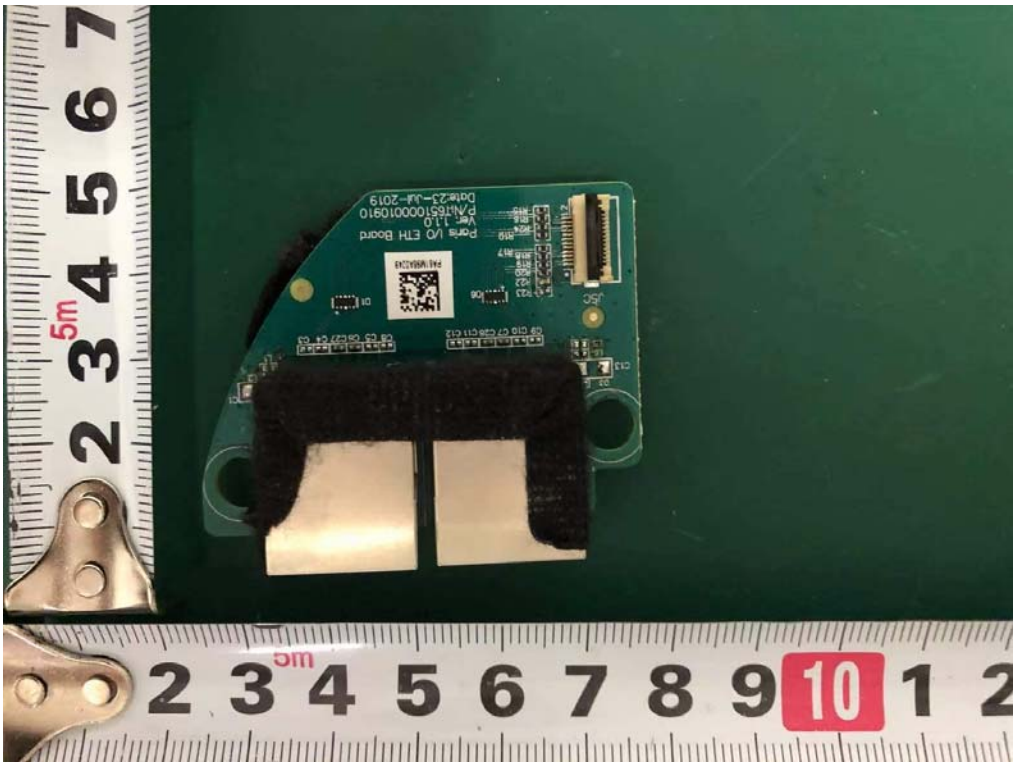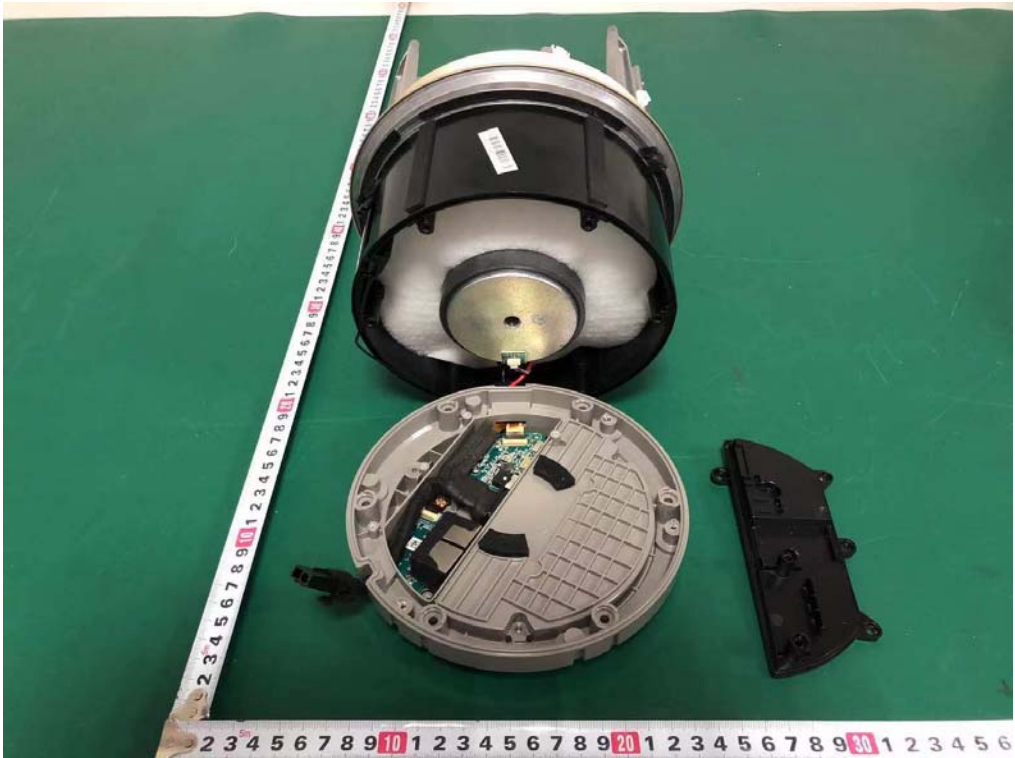



Internal Photos
M/N: Beosound Balance

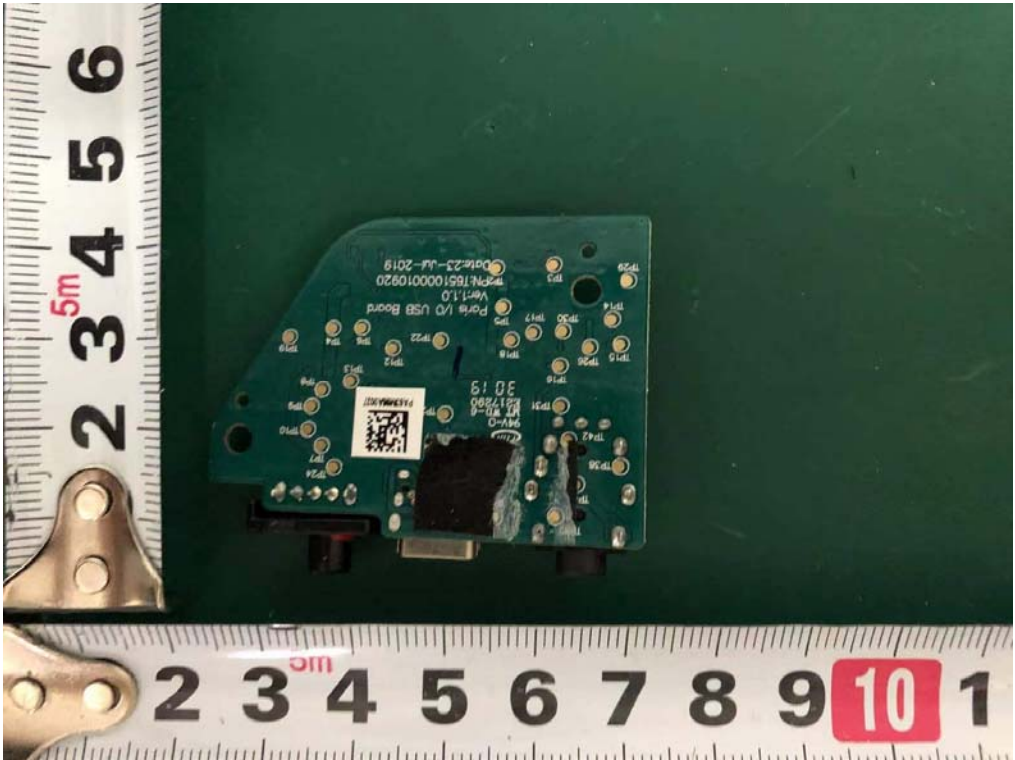



Internal Photos
M/N: Beosound Balance

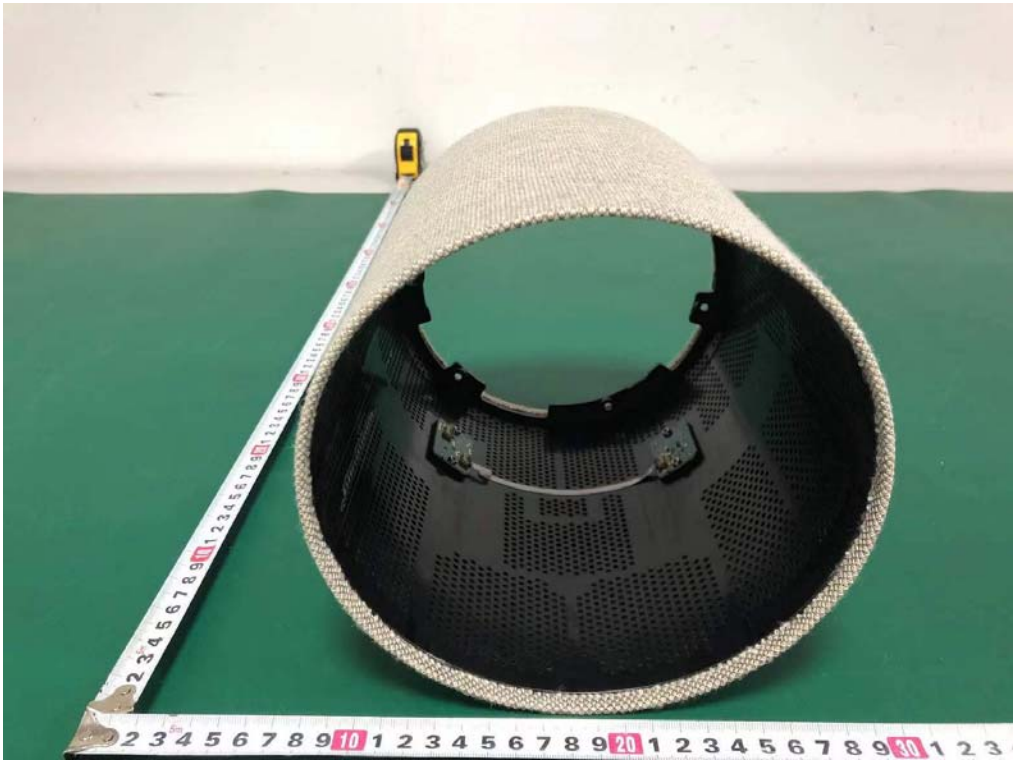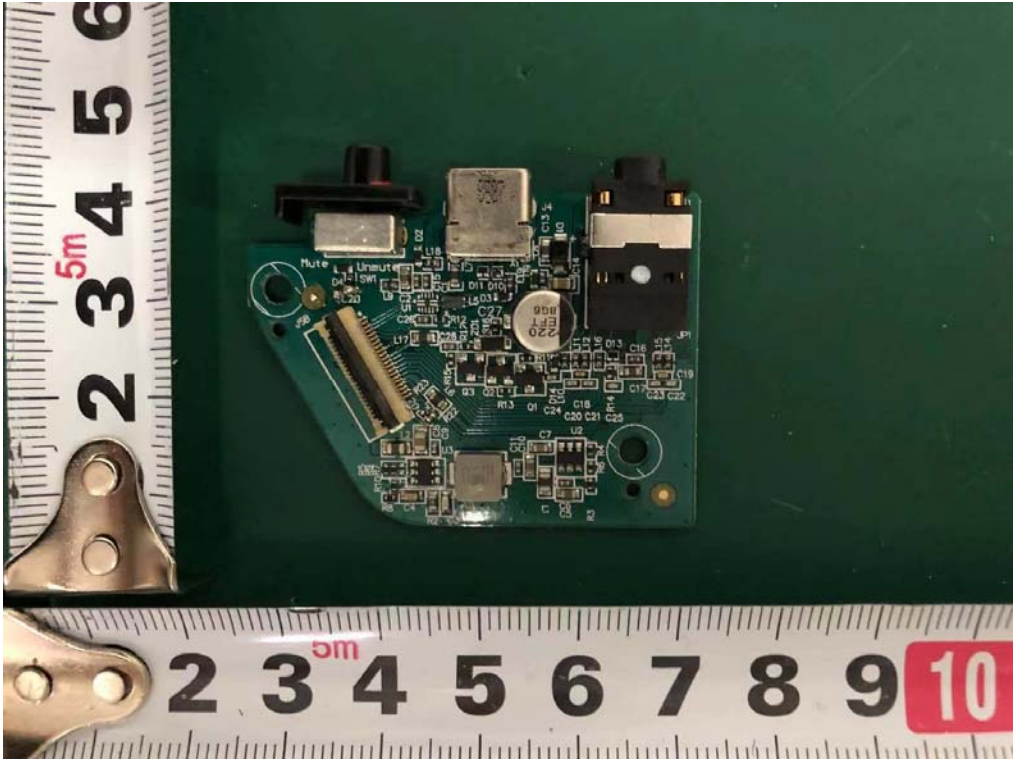


Internal Photos
M/N: Beosound Balance

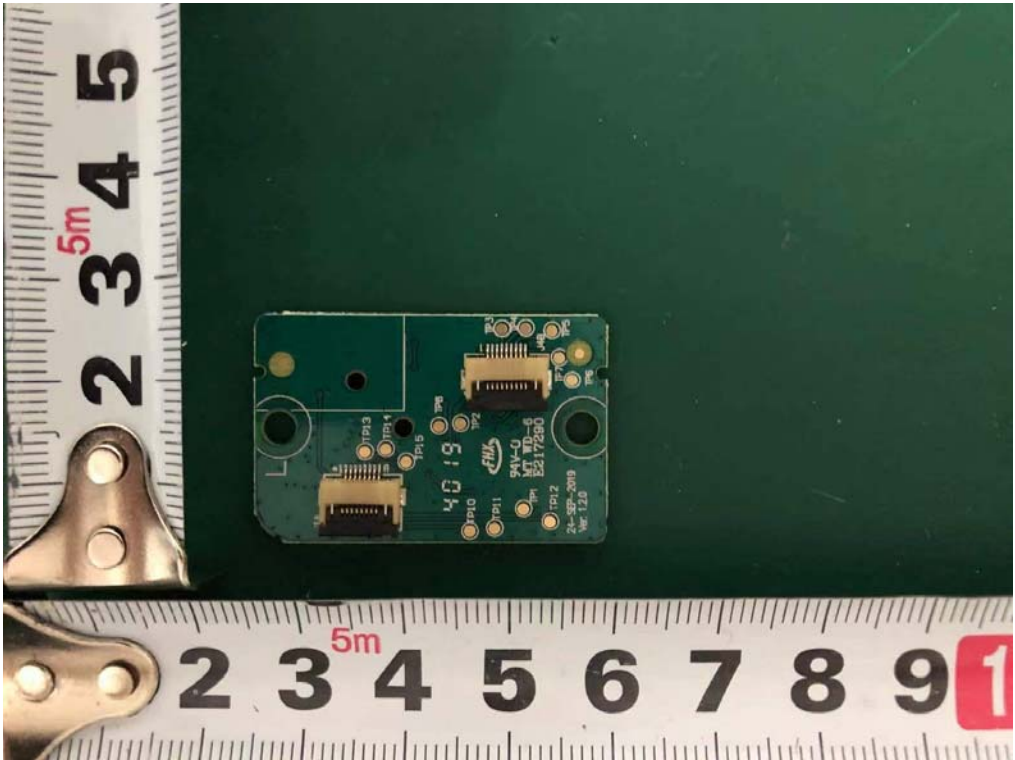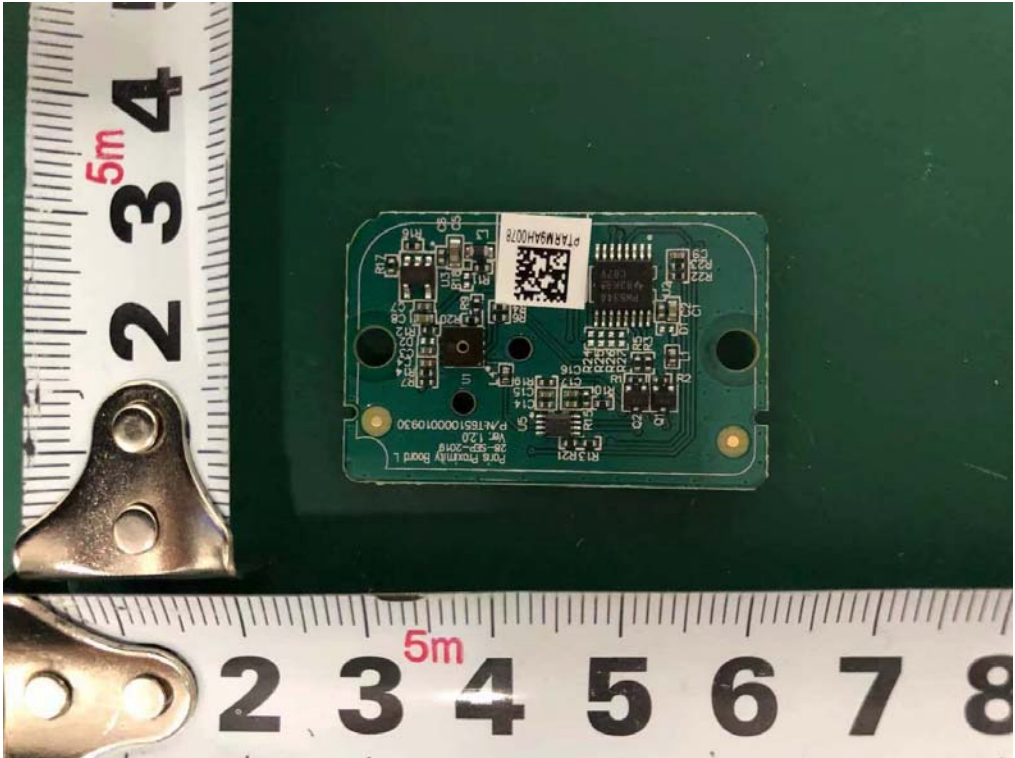



Internal Photos
M/N: Beosound Balance

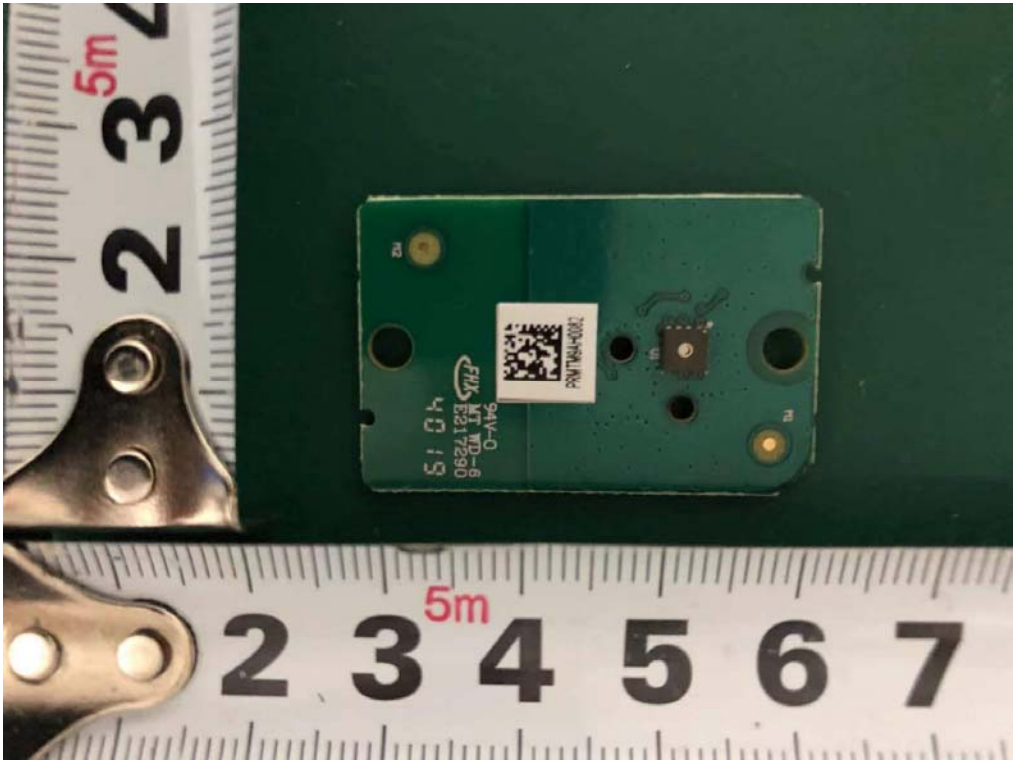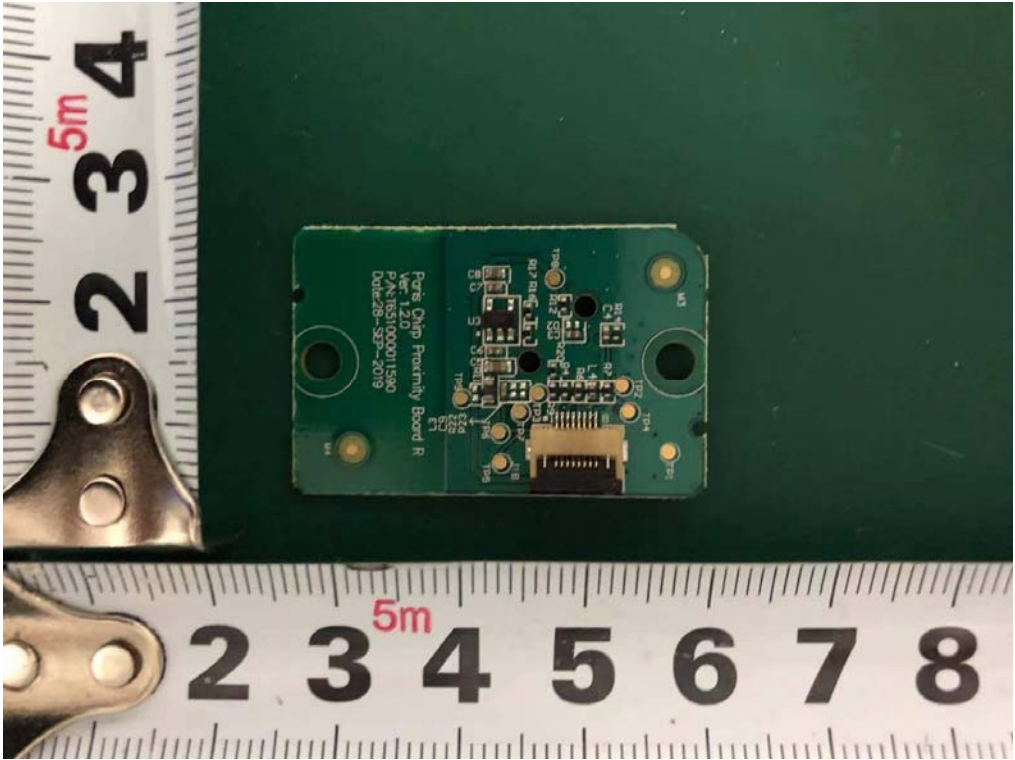


Internal Photos
M/N: Beosound Balance

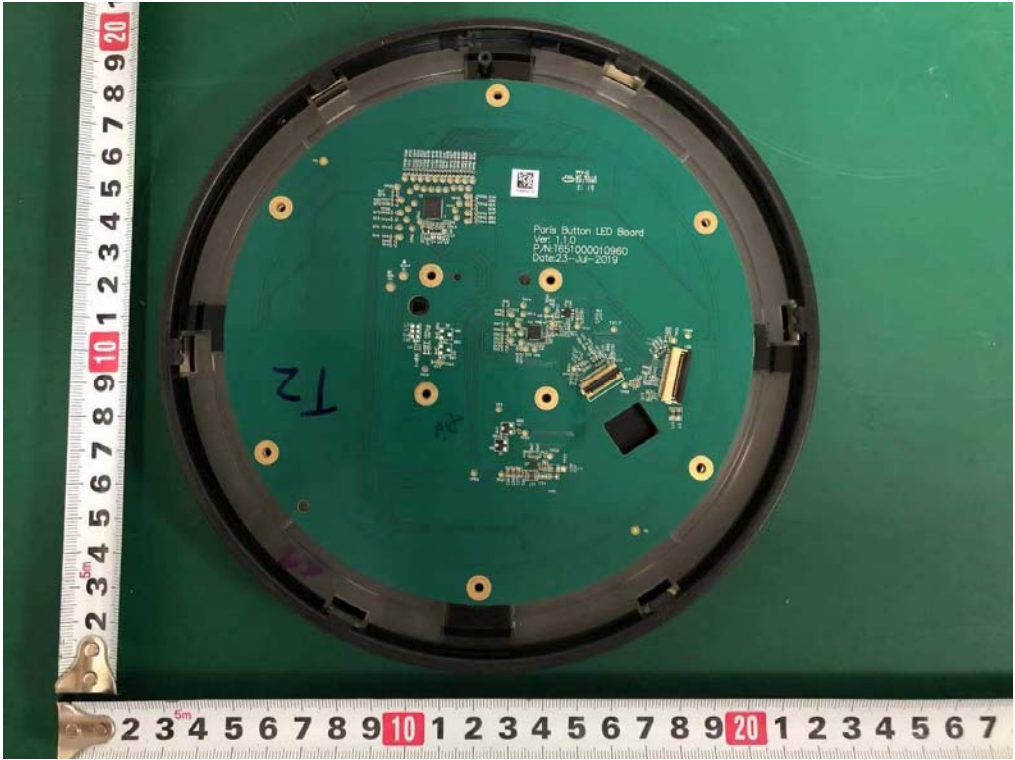

Internal Photos
M/N: Beosound Balance

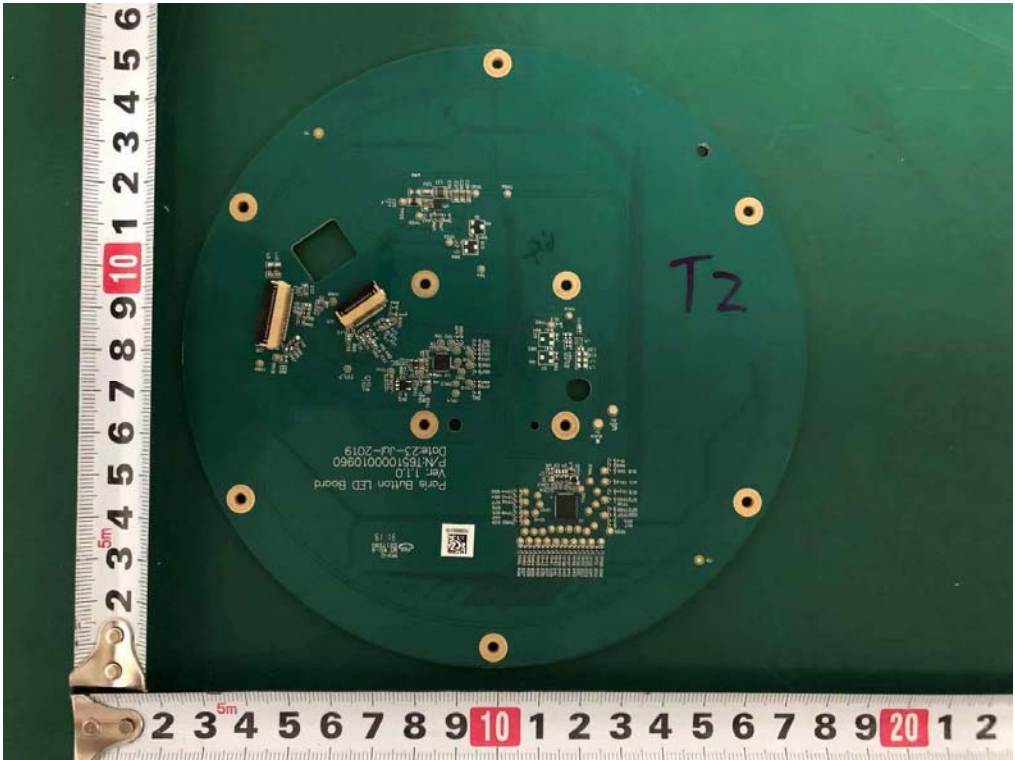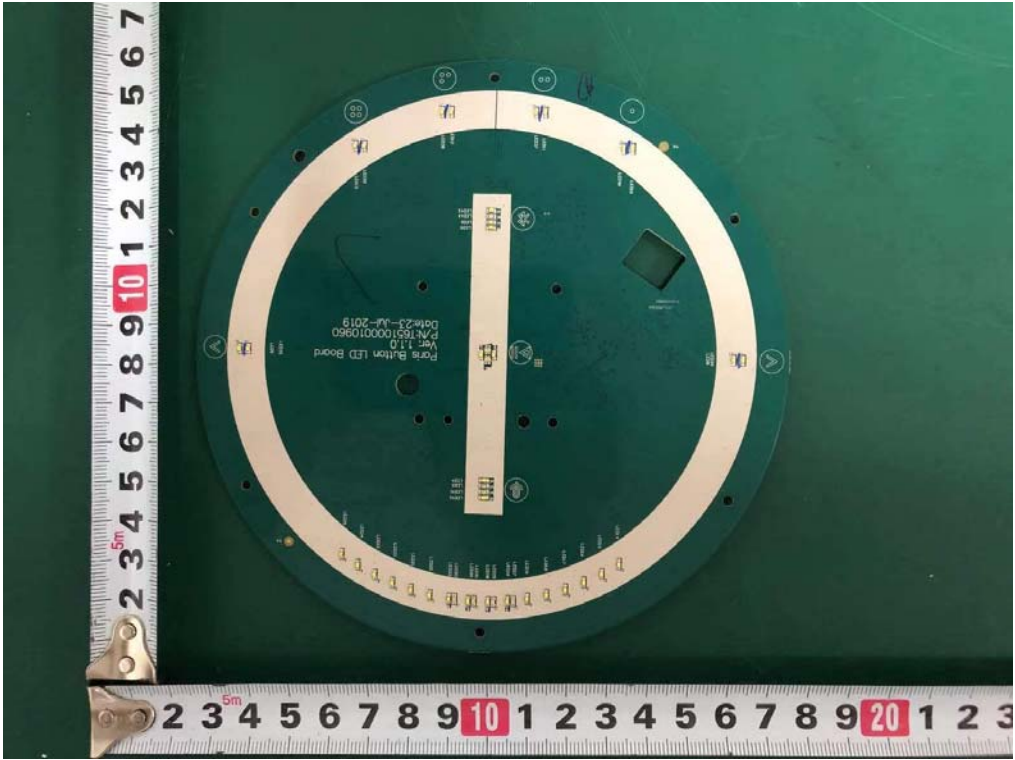

Internal Photos
M/N: Beosound Balance

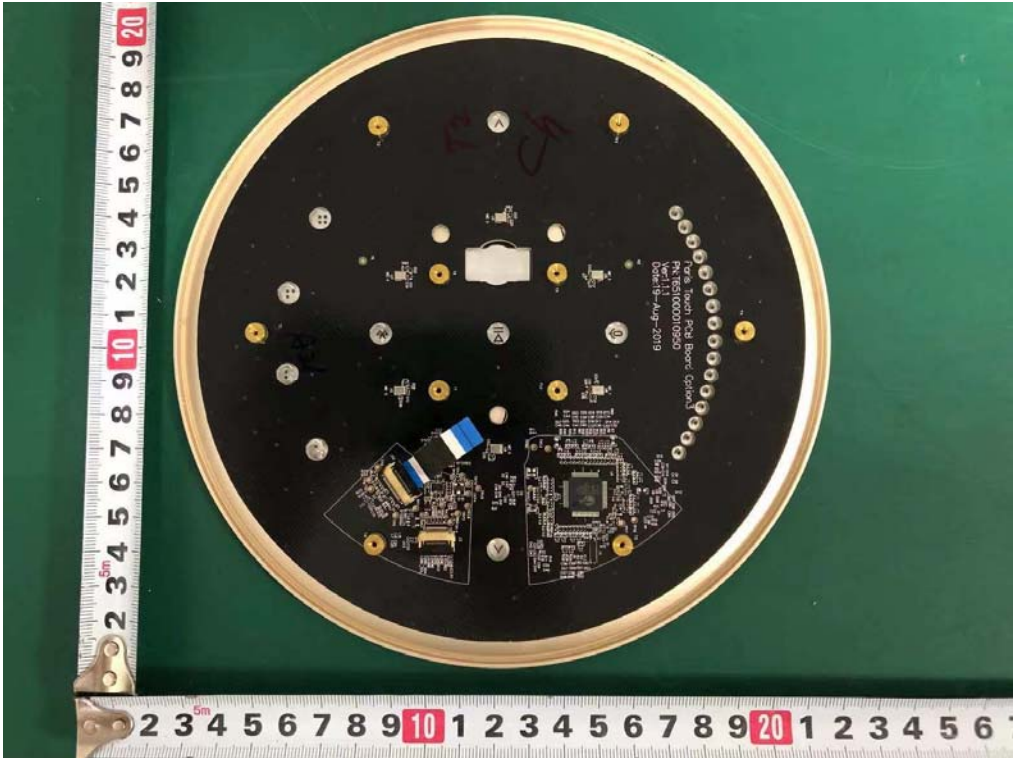

End of Test Report