

SAR TEST REPORT

Project No. : JB-Z1319
 Client : Murata Manufacturing Co., Ltd.
 Address : 10-1 Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555 Japan
 Type of Equipment : Communication Module
 Model No. : Type1VY (* installed in Digital Camera 1VY010)
 FCC ID : VPYLB1VY
 Regulation Applied : FCC 47 CFR 2.1093

SAR Limits :

| Exposure Characteristics | Spatial Peak SAR (Head and Trunk) averaged over any 1 g of tissue |
|--------------------------|--|
| General Public Exposure | 1.6 W/kg |

The Highest Reported SAR :

| RF Exposure Conditions | Equipment Class | | | Note(s) |
|------------------------|-----------------|------------|------------|---------|
| | DTS | DSS / DTS | U-NII | |
| | Wi-Fi 2.4GHz | Bluetooth | Wi-Fi 5GHz | |
| Body-Worn | 0.249 W/kg | 0.061 W/kg | 0.148 W/kg | |
| Simultaneous Tx | 0.253 W/kg | | | |

Test Result : Complied

Sample Receipt : February 21, 2020
 Testing : November 15, 2021 - December 14, 2023 (for conducted power measurements)
 June 19, 2024 - July 5, 2024 (for SAR measurements)
 Reported : July 22, 2024

Reported by :

Approved Signatory :

K. OHYAMA

Koji Hayama

Koji Ohyama
 Technical Manager
 EMC/ RF Test Laboratory Main Lab.
 Design Technology Division
 Sony Global Manufacturing & Operations Corporation

Koji Hayama
 Technical Manager
 EMC/ RF Test Laboratory Main Lab.
 Design Technology Division
 Sony Global Manufacturing & Operations Corporation

Notice

- * These test results relate only to the items (combination equipment, test configuration, operation condition etc.) tested.
- * This report shall not be reproduced except in full, without written approval of the laboratory.
- * This report must not be used by the client to claim product endorsement by A2LA or any agency of the U.S. Government.
- * All test results are traceable to the national and / or international standards.
- * The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in Sony Global Manufacturing & Operations Corporation EMC/ RF Test Laboratory.



Format No.: NV1-1-01 Version 5.0

REVISION HISTORY

| Project No. | Revision | Page | Description | Issued date |
|-------------|----------|------|-------------|---------------|
| JB-Z1319 | Original | - | - | July 22, 2024 |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

DISCLAIMER

This report includes the information provided by the customer as below;

- Cover page : Client and product related information
- Clause 1.1 : Description of Device Under Test (DUT)
- Clause 1.2 : Antenna Placement
- Clause 1.3 : Simultaneous Transmission Conditions
- Clause 1.4 : Nominal and Maximum Possible Power (Maximum Tune-up Tolerance Limit)

* The laboratory is not responsible for results affected by the above information.

TABLE OF CONTENTS

| | |
|--|------------|
| 1. General Information..... | 4 |
| 1.1. Description of Device Under Test (DUT)..... | 4 |
| 1.2. Antenna Placement..... | 5 |
| 1.3. Simultaneous Transmission Conditions..... | 5 |
| 1.4. Nominal and Maximum Possible Power (Maximum Tune-up Tolerance Limit)..... | 5 |
| 1.5. RF Exposure Conditions..... | 8 |
| 1.6. RF Exposure Limits..... | 8 |
| 1.7. SAR Test Exclusion..... | 9 |
| 1.8. Test Specification, Methods and Procedures..... | 11 |
| 1.9. Test Facilities and Accreditation..... | 12 |
| 2. Test Set-up..... | 13 |
| 2.1. Test Equipment and Measurement Software Lists..... | 13 |
| 2.2. Measurement System Description..... | 15 |
| 2.3. Measurement System Main Components..... | 16 |
| 2.4. Tissue Simulating Liquids..... | 19 |
| 2.5. SAR Measurement..... | 20 |
| 2.6. Measurement Uncertainty..... | 21 |
| 2.7. Dielectric Parameter Measurement of Tissue Simulating Liquids..... | 24 |
| 2.8. System Check Measurement..... | 26 |
| 3. Conducted Power Measurements..... | 29 |
| 3.1. Conducted Power Measurement Results..... | 30 |
| 4. SAR Measurements..... | 35 |
| 4.1. SAR Measurement Results..... | 37 |
| 5. Simultaneous Transmission SAR evaluation..... | 42 |
| Appendix A. Plots of SAR Measurement..... | 43 |
| Appendix B. Plots of System Check..... | 53 |
| Appendix C. Calibration Certificate..... | 63 |
| Appendix D. Photographs..... | 115 |

1. General Information

1.1. Description of Device Under Test (DUT)

DUT Descriptions

| DUT | |
|---|--|
| Type of Equipment | Communication Module |
| Model No. | Type1VY |
| Test Sample Condition | <input type="checkbox"/> Prototype <input type="checkbox"/> Pre-production <input checked="" type="checkbox"/> Mass-production |
| | * Not for sale: The sample is equivalent to mass-production items. * No modification by the test lab. |
| Serial No. | 25 |
| Rating | DC 3.3 V (VDD_3P3, VDD_FEM, SWREG_IN, VDDIO_GPIO, VDDIO_AO) * Supplied from the host. |
| Body-Worn Accessories | n/a |
| Device Dimension (W x H x D) | 10.25 mm x 7.5 mm x 1.15 mm |
| Device Category | Portable |
| Exposure Category | General population/ Uncontrolled environment |
| Note(s): *Please refer to Appendix D for Host Platform Descriptions. | |

Wireless Technologies

| Wireless Technologies | Frequency Bands | Operating Mode | Power Setting Mode |
|--|-----------------|--|--------------------|
| Wi-Fi | 2.4 GHz | 802.11b 802.11g 802.11n (HT20) | Low Power Mode |
| | 5 GHz | 802.11a 802.11n (HT20/HT40) 802.11ac (VHT20/VHT40/VHT80) | High Power Mode |
| Bluetooth | 2.4 GHz | Version 5 (BR/EDR/LE) | n/a |
| Note(s): * The DUT installed in this host does not support the Wi-Fi 2.4 GHz High Power Mode and Wi-Fi 5 GHz Low Power Mode operations. | | | |

Radio Specification

| | | Chain0 | Chain1 |
|---|---|--|--|
| Wireless Technologies | | Wi-Fi 2.4 / 5 GHz Bluetooth | Wi-Fi 2.4 / 5 GHz |
| Antenna Type | | Dual Monopole antenna | Dual Slot antenna |
| Antenna Gain | Original Approval | +0.93 dBi (2.4 GHz) +1.04 dBi (5 GHz) | +1.98 dBi (2.4 GHz) +1.98 dBi (5 GHz) |
| | Class II Permissive Change (*The DUT is installed in this host.) | -4.43 dBi (2.4 GHz) +0.80 dBi (5 GHz) | -4.15 dBi (2.4 GHz) -4.93 dBi (5 GHz) |
| Note(s): * The antenna is of the same type and lower gain than in the original approval. | | | |

1.2. Antenna Placement

| Antenna | Minimum Distance from Edges or Sides of Host Platform (mm) | | | | | | | | |
|---------|--|-------------|------|------|-------|-----|----------|-----------|--------|
| | Front | Front-Right | Back | Left | Right | Top | Top-Left | Top-Right | Bottom |
| Chain0 | *1 | *1 | *1 | *1 | *1 | *1 | *1 | *1 | *1 |
| Chain1 | *1 | *1 | *1 | *1 | *1 | *1 | *1 | *1 | *1 |

*1 Please refer to Appendix D.

1.3. Simultaneous Transmission Conditions

| RF Exposure Conditions | No. | Capable Transmit Configurations | | | | |
|------------------------|-----|---------------------------------|---------|-------------|---------|-----------|
| | | Wi-Fi 2.4 GHz | | Wi-Fi 5 GHz | | Bluetooth |
| | | Chain 0 | Chain 1 | Chain 0 | Chain 1 | |
| Body-Worn | 1 | Yes | Yes | - | - | - |
| | 2 | - | - | Yes | Yes | - |
| | 3 | - | - | Yes | Yes | Yes |

1.4. Nominal and Maximum Possible Power (Maximum Tune-up Tolerance Limit)

Chain 0

| Wireless Technologies | Mode | Band | Frequency Band (MHz) | | Channel | Data Rate /MCS | Full Power (Burst Averaged) | Ant. Gain (dBi) | Equivalent Isotopically Radiated Power (dBm) |
|-----------------------|------------------|---------|----------------------|--------|---------|----------------|-----------------------------|-----------------|--|
| | | | Lower | Higher | | | Max. Tune-up Limit(dBm) | | |
| Wi-Fi | 802.11b | 2.4 GHz | 2412 | 2462 | All | All | 9.50 | -4.43 | 5.07 |
| | 802.11g | | 2412 | 2462 | All | All | 9.50 | -4.43 | 5.07 |
| | 802.11n (HT20) | | 2412 | 2462 | All | All | 9.50 | -4.43 | 5.07 |
| | 802.11a | W52 | 5180 | 5240 | All | All | 11.50 | +0.80 | 12.30 |
| | | W53 | 5260 | 5320 | All | All | 11.50 | +0.80 | 12.30 |
| | | W56 | 5500 | 5700 | All | All | 11.50 | +0.80 | 12.30 |
| | | W58 | 5745 | 5825 | All | All | 11.50 | +0.80 | 12.30 |
| | 802.11n (HT20) | W52 | 5180 | 5240 | All | All | 11.50 | +0.80 | 12.30 |
| | | W53 | 5260 | 5320 | All | All | 11.50 | +0.80 | 12.30 |
| | | W56 | 5500 | 5700 | All | All | 11.50 | +0.80 | 12.30 |
| | | W58 | 5745 | 5825 | All | All | 11.50 | +0.80 | 12.30 |
| | 802.11n (HT40) | W52 | 5190 | 5230 | All | All | 11.50 | +0.80 | 12.30 |
| | | W53 | 5270 | 5310 | All | All | 11.50 | +0.80 | 12.30 |
| | | W56 | 5510 | 5670 | All | All | 11.50 | +0.80 | 12.30 |
| | | W58 | 5755 | 5795 | All | All | 11.50 | +0.80 | 12.30 |
| | 802.11ac (VHT20) | W52 | 5180 | 5240 | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |
| | | W53 | 5260 | 5320 | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |
| | | W56 | 5500 | 5700 | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |
| | | W58 | 5745 | 5825 | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |

Chain 0 (Continued)

| Wireless Technologies | Mode | Band | Frequency Band (MHz) | | Channel | Data Rate /MCS | Full Power (Burst Averaged) | Ant. Gain (dBi) | Equivalent Isotopically Radiated Power (dBm) |
|-----------------------|------------------|---------|----------------------|--------|---------|----------------|-----------------------------|-----------------|--|
| | | | Lower | Higher | | | Max. Tune-up Limit(dBm) | | |
| Wi-Fi | 802.11ac (VHT40) | W52 | 5190 | 5230 | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |
| | | | | | | MCS 9 | 10.50 | +0.80 | 11.30 |
| | | W53 | 5270 | 5310 | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |
| | | | | | | MCS 9 | 10.50 | +0.80 | 11.30 |
| | | W56 | 5510 | 5670 | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |
| | | | | | | MCS 9 | 10.50 | +0.80 | 11.30 |
| | | W58 | 5755 | 5795 | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |
| | | | | | | MCS 9 | 10.50 | +0.80 | 11.30 |
| | 802.11ac (VHT80) | W52 | 5210 | | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |
| | | | | | | MCS 9 | 10.50 | +0.80 | 11.30 |
| | | W53 | 5290 | | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |
| | | | | | | MCS 9 | 10.50 | +0.80 | 11.30 |
| | | W56 | 5530 | 5610 | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |
| | | | | | | MCS 9 | 10.50 | +0.80 | 11.30 |
| | | W58 | 5775 | | All | MCS 0-8 | 11.50 | +0.80 | 12.30 |
| | | | | | | MCS 9 | 10.50 | +0.80 | 11.30 |
| Bluetooth | BR | 2.4 GHz | 2402 | 2480 | All | - | 10.10 | -4.43 | 5.67 |
| | EDR | | 2402 | 2480 | All | - | 9.90 | -4.43 | 5.47 |
| | LE | | 2402 | 2480 | All | - | 10.10 | -4.43 | 5.67 |

Chain 1

| Wireless Technologies | Mode | Band | Frequency Band (MHz) | | Channel | Data Rate /MCS | Full Power (Burst Averaged) | Ant. Gain (dBi) | Equivalent Isotopically Radiated Power (dBm) |
|-----------------------|------------------|---------|----------------------|---------|---------|----------------|-----------------------------|-----------------|--|
| | | | Lower | Higher | | | Max. Tune-up Limit(dBm) | | |
| Wi-Fi | 802.11b | 2.4 GHz | 2412 | 2462 | All | All | 9.50 | -4.15 | 5.35 |
| | 802.11g | | 2412 | 2462 | All | All | 9.50 | -4.15 | 5.35 |
| | 802.11n (HT20) | | 2412 | 2462 | All | All | 9.50 | -4.15 | 5.35 |
| | 802.11a | W52 | 5180 | 5240 | All | All | 11.50 | -4.93 | 6.57 |
| | | W53 | 5260 | 5320 | All | All | 11.50 | -4.93 | 6.57 |
| | | W56 | 5500 | 5700 | All | All | 11.50 | -4.93 | 6.57 |
| | | W58 | 5745 | 5825 | All | All | 11.50 | -4.93 | 6.57 |
| | 802.11n (HT20) | W52 | 5180 | 5240 | All | All | 11.50 | -4.93 | 6.57 |
| | | W53 | 5260 | 5320 | All | All | 11.50 | -4.93 | 6.57 |
| | | W56 | 5500 | 5700 | All | All | 11.50 | -4.93 | 6.57 |
| | | W58 | 5745 | 5825 | All | All | 11.50 | -4.93 | 6.57 |
| | 802.11n (HT40) | W52 | 5190 | 5230 | All | All | 11.50 | -4.93 | 6.57 |
| | | W53 | 5270 | 5310 | All | All | 11.50 | -4.93 | 6.57 |
| | | W56 | 5510 | 5670 | All | All | 11.50 | -4.93 | 6.57 |
| | | W58 | 5755 | 5795 | All | All | 11.50 | -4.93 | 6.57 |
| | 802.11ac (VHT20) | W52 | 5180 | 5240 | All | MCS 0-8 | 11.50 | -4.93 | 6.57 |
| | | W53 | 5260 | 5320 | All | MCS 0-8 | 11.50 | -4.93 | 6.57 |
| | | W56 | 5500 | 5700 | All | MCS 0-8 | 11.50 | -4.93 | 6.57 |
| | | W58 | 5745 | 5825 | All | MCS 0-8 | 11.50 | -4.93 | 6.57 |
| | 802.11ac (VHT40) | W52 | 5190 | 5230 | All | MCS 0-8 | 11.50 | -4.93 | 6.57 |
| | | | | | | MCS 9 | 10.50 | -4.93 | 5.57 |
| | | W53 | 5270 | 5310 | All | MCS 0-8 | 11.50 | -4.93 | 6.57 |
| | | | | | | MCS 9 | 10.50 | -4.93 | 5.57 |
| | | W56 | 5510 | 5670 | All | MCS 0-8 | 11.50 | -4.93 | 6.57 |
| | | | | | | MCS 9 | 10.50 | -4.93 | 5.57 |
| | W58 | 5755 | 5795 | All | MCS 0-8 | 11.50 | -4.93 | 6.57 | |
| | | | | | MCS 9 | 10.50 | -4.93 | 5.57 | |
| | 802.11ac (VHT80) | W52 | 5210 | | All | MCS 0-8 | 11.50 | -4.93 | 6.57 |
| | | | 5210 | | | MCS 9 | 10.50 | -4.93 | 5.57 |
| | | W53 | 5290 | | All | MCS 0-8 | 11.50 | -4.93 | 6.57 |
| 5290 | | | MCS 9 | 10.50 | | -4.93 | 5.57 | | |
| W56 | | 5530 | 5610 | All | MCS 0-8 | 11.50 | -4.93 | 6.57 | |
| | | 5530 | | | MCS 9 | 10.50 | -4.93 | 5.57 | |
| W58 | 5775 | | All | MCS 0-8 | 11.50 | -4.93 | 6.57 | | |
| | 5775 | | | MCS 9 | 10.50 | -4.93 | 5.57 | | |

1.5. RF Exposure Conditions

| Wireless Technologies | RF Exposure Conditions | User-to-Host Distance (mm) | Test Position | Host-to-Ant. Distance (mm) | | SAR Required | Note(s) |
|-----------------------|------------------------|----------------------------|---------------|----------------------------|---------|--------------|---------|
| | | | | Chain 0 | Chain 1 | | |
| Wi-Fi/ Bluetooth | Body-Worn | 0 | Front | *1 | *1 | N/A | 2 |
| | | | Front-Right | *1 | *1 | Yes | 2 |
| | | | Back | *1 | *1 | Yes | |
| | | | Left | *1 | *1 | Yes | |
| | | | Right | *1 | *1 | Yes | |
| | | | Top | *1 | *1 | N/A | 3 |
| | | | Top-Left | *1 | *1 | Yes | 3 |
| | | | Top-Right | *1 | *1 | Yes | 3 |
| | | | Bottom | *1 | *1 | Yes | |

Note(s):

*1 Please refer to Appendix D.

*2 Due to the shape of the protruding portion of the front surface of the host, SAR was evaluated with the "Front-Right" test position, instead of the "Front" test position. Please refer to Appendix D for more details.

*3 Due to the shape of the protruding portion of the top surface of the host, SAR was evaluated with the "Top-Left" and "Top-Right" test positions, instead of the "Top" test position. Please refer to Appendix D for more details.

1.6. RF Exposure Limits

| Human Exposure | General Population/ Uncontrolled Exposure | Occupational/ Controlled Exposure |
|--|--|--------------------------------------|
| Spatial Peak SAR (Head and Trunk) averaged over any 1 g of tissue | 1.6 W/kg* | 8 W/kg |
| Spatial Average SAR (Whole Body) averaged over the whole body | 0.08 W/kg | 0.4 W/kg |
| Spatial Peak SAR (Extremities: Hands/Wrists/Feet/Ankles) averaged over any 10 g of tissue | 4 W/kg | 20 W/kg |

* The limit(s) applied in this report.

1.7. SAR Test Exclusion

SAR test exclusion is applied according to KDB 447498 D01.

The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{\text{(max. power of channel, including tune-up tolerance, mW)}}{\text{(min. test separation distance, mm)}} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where:}$$

- * f(GHz) is the RF channel transmit frequency in GHz
- * Power and distance are rounded to the nearest mW and mm before calculation
- * The result is rounded to one decimal place for comparison
- * When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Body-Worn SAR (1-g SAR) Test Exclusion as per KDB 447498 D01 - Chain0

| Freq. Band | Freq. (MHz) | Test Position | Host-to-Ant Distance (mm) | User-to-Ant Distance (mm) | Min. Test Sep. Distance (mm) | Max. Possible Power | | | | Exclusion Threshold | SAR Required (> 3.0) |
|-------------------------|-------------|---------------|---------------------------|---------------------------|------------------------------|---------------------|--------------|------------|--------------|---------------------|----------------------|
| | | | | | | Chain0 (dBm) | Chain1 (dBm) | Total (mW) | Rounded (mW) | | |
| Wi-Fi 2.4 GHz (Chain 0) | 2450 | Front-Right | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | No |
| | 2450 | Back | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | No |
| | 2450 | Left | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | No |
| | 2450 | Right | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | No |
| | 2450 | Top-Left | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | Yes |
| | 2450 | Top-Right | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | No |
| Wi-Fi 5 GHz (Chain 0) | 5800 | Front-Right | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | Yes |
| | 5800 | Back | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | No |
| | 5800 | Left | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | No |
| | 5800 | Right | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | No |
| | 5800 | Top-Left | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | Yes |
| | 5800 | Top-Right | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | No |
| Bluetooth | 2450 | Front-Right | *1 | *1 | *1 | 10.1 | - | 10.2 | 10 | *1 | No |
| | 2450 | Back | *1 | *1 | *1 | 10.1 | - | 10.2 | 10 | *1 | No |
| | 2450 | Left | *1 | *1 | *1 | 10.1 | - | 10.2 | 10 | *1 | No |
| | 2450 | Right | *1 | *1 | *1 | 10.1 | - | 10.2 | 10 | *1 | No |
| | 2450 | Top-Left | *1 | *1 | *1 | 10.1 | - | 10.2 | 10 | *1 | Yes |
| | 2450 | Top-Right | *1 | *1 | *1 | 10.1 | - | 10.2 | 10 | *1 | No |
| | 2450 | Bottom | *1 | *1 | *1 | 10.1 | - | 10.2 | 10 | *1 | No |

Note(s):
 * In addition to the test positions indicated as "SAR Required: Yes" in the table above, other test positions were also measured for the simultaneous transmission analysis. Please refer 4.1 for more details.

*1 Please refer to Appendix D.

Body-Worn SAR (1-g SAR) Test Exclusion as per KDB 447498 D01 - Chain1

| Freq. Band | Freq. (MHz) | Test Position | Host-to-Ant Distance (mm) | User-to-Ant Distance (mm) | Min. Test Sep. Distance (mm) | Max. Possible Power | | | | Exclusion Threshold | SAR Required (> 3.0) |
|------------------------------|-------------|---------------|---------------------------|---------------------------|------------------------------|---------------------|--------------|------------|--------------|---------------------|----------------------|
| | | | | | | Chain0 (dBm) | Chain1 (dBm) | Total (mW) | Rounded (mW) | | |
| Wi-Fi 2.4GHz (Chain 1) | 2450 | Front-Right | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | Yes |
| | 2450 | Back | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | No |
| | 2450 | Left | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | No |
| | 2450 | Right | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | No |
| | 2450 | Top-Left | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | No |
| | 2450 | Top-Right | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | Yes |
| | 2450 | Bottom | *1 | *1 | *1 | 9.5 | 9.5 | 17.8 | 18 | *1 | No |
| Wi-Fi 5GHz (Chain 1) | 5800 | Front-Right | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | Yes |
| | 5800 | Back | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | Yes |
| | 5800 | Left | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | No |
| | 5800 | Right | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | No |
| | 5800 | Top-Left | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | No |
| | 5800 | Top-Right | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | Yes |
| | 5800 | Bottom | *1 | *1 | *1 | 11.5 | 11.5 | 28.3 | 28 | *1 | No |

Note(s):

* In addition to the test positions indicated as "SAR Required: Yes" in the table above, other test positions were also measured for the simultaneous transmission analysis. Please refer 4.1 for more details.

*1 Please refer to Appendix D.

1.8. Test Specification, Methods and Procedures

Test Specification

- FCC 47 CFR 2.1093 Radiofrequency radiation exposure evaluation: portable devices

Test Methods

- IEEE Std 1528-2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- KDB 248227 D01 v02r02 SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
- KDB 447498 D01 v06 Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
- KDB 447498 D02 v02r01 SAR Measurement Procedures for USB Dongle Transmitters
- KDB 615223 D01 v01r01 802.16e/WiMax SAR Measurement Guidance
- KDB 616217 D04 v01r02 SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
- KDB 643646 D01 v01r03 SAR Test Reduction Considerations for Occupational PTT Radios
- KDB 648474 D03 v01r04 Evaluation and Approval Considerations for Handsets with Specific Wireless Charging Battery Covers
- KDB 648474 D04 v01r03 SAR Evaluation Considerations for Wireless Handsets
- KDB 865664 D01 v01r04 SAR Measurement Requirements for 100 MHz to 6 GHz
- KDB 941225 D01 v03r01 3G SAR Measurement Procedures
- KDB 941225 D05 v02r05 SAR Evaluation Considerations for LTE Devices
- KDB 941225 D06 v02r01 SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
- KDB 941225 D07 v01r02 SAR Evaluation Procedures for UMPC Mini-Tablet Devices

Test Procedures

The SAR tests were performed according to the procedures of Sony Global Manufacturing & Operations Corporation EMC/ RF Test Laboratory, the Document No. NV3-2 and NV3-16, available upon request.

No deviation from the procedures

Deviation from the procedures

References

- [1] ICNIRP. Guidelines for limiting exposure to time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz). Health Physics 74(4): 494-522, 1998.
- [2] American National Standards Institute (ANSI), "Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1-1992.
- [3] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3 kHz to 300 GHz," Safety Code 6 (2009).
- [4] European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz) (Official Journal L 199 of 30 July 1999).
- [5] REDCA Technical Guidance Note 20 (TGN 20), SAR Testing and Assessment Guidance, Version 6.5, October 2020.
- [6] Australian Communications and Media Authority (ACMA), Radiocommunications (Electromagnetic Radiation - Human Exposure) Standard 2014.
- [7] TCB Workshop April 2019; RF Exposure Procedures (Tissue Simulating Liquids)
- [8] Schmid & Partner Engineering AG (SPEAG), DASY52 System Handbook, April 2014.
- [9] Schmid & Partner Engineering AG (SPEAG), Safety Data Sheet, Doc No 772-SLAAx0yy-J, June 14, 2013.
- [10] Schmid & Partner Engineering AG (SPEAG), Safety Data Sheet, Doc No 772-SLAAx1yy-I, October 18, 2013.
- [11] Schmid & Partner Engineering AG (SPEAG), Safety Data Sheet, Doc No 772-SLAAx6yy-H, September 26, 2013.
- [12] Schmid & Partner Engineering AG (SPEAG), Material Safety Data Sheet, Doc No 772-SLAAH502A-D, August 9, 2013.
- [13] Schmid & Partner Engineering AG (SPEAG), Material Safety Data Sheet, Doc No 772-SLAAx4yy-J, August 9, 2013.
- [14] Schmid & Partner Engineering AG (SPEAG), Material Safety Data Sheet, Doc No 772-SLAAHxU16B-C, June 9, 2015.

1.9. Test Facilities and Accreditation

Test Facilities

| | |
|--------------------|--|
| Test Facility Name | : Sony Global Manufacturing & Operations Corporation EMC/ RF Test Laboratory, Main Lab. |
| Address | : 8-4 Shiomi Kisarazu-shi Chiba-ken, 292-0834, Japan |
| Shielded Room Used | : <input checked="" type="checkbox"/> 4th Site Shielded Room 2 <input type="checkbox"/> 4th Site Shielded Room 3 |

A2LA Accreditation

| | |
|-----------------|--------------------|
| Certificate No. | : 3203.01 |
| Expiration | : October 31, 2025 |

2. Test Set-up

2.1. Test Equipment and Measurement Software Lists

Table 2-1 Test Equipment List

| Used | Control No. | Equipment Description | Model No. | Serial No. | Manufacturer | Cal. Int. | Last Cal. | Note(s) |
|-------------------------------------|-------------|------------------------------|------------------|-----------------|------------------------------|-----------|-----------|---------|
| <input checked="" type="checkbox"/> | W0128 | Robot | TX60 L | F14/5VR2B1/A/01 | Staubli | N/A | N/A *1 | |
| <input type="checkbox"/> | W0124 | Robot | RX60B L | F04/5Z71A1/A/03 | Staubli | N/A | N/A *1 | |
| <input checked="" type="checkbox"/> | WA0002 | E-Field Probe | EX3DV4 | 3921 | SPEAG | 1Y | 23.11.16 | |
| <input checked="" type="checkbox"/> | W0095 | Data Acquisition Electronics | DAE4 | 482 | SPEAG | 1Y | 23.10.09 | |
| <input type="checkbox"/> | W0081 | Twin SAM Phantom | Twin SAM | TP-1441 | SPEAG | N/A | N/A *1 | |
| <input type="checkbox"/> | W0082 | Twin SAM Phantom | Twin SAM | TP-1325 | SPEAG | N/A | N/A *1 | |
| <input type="checkbox"/> | W0126 | Twin SAM Phantom | Twin SAM | TP-1851 | SPEAG | N/A | N/A *1 | |
| <input type="checkbox"/> | W0127 | Twin SAM Phantom | Twin SAM | TP-1852 | SPEAG | N/A | N/A *1 | |
| <input checked="" type="checkbox"/> | W0119 | ELI Phantom | ELI V5.0 | 1259 | SPEAG | N/A | N/A *1 | |
| <input checked="" type="checkbox"/> | WA0064 | System Validation Dipole | D2450V2 | 894 | SPEAG | 1Y | 24.04.16 | |
| <input checked="" type="checkbox"/> | WA0042 | System Validation Dipole | D5GHzV2 | 1039 | SPEAG | 1Y | 24.04.11 | |
| <input checked="" type="checkbox"/> | W0121 | Vector Reflectometer | DAKS_VNA R140 | 0111013 | Copper Mountain Technologies | 1Y | 23.08.15 | |
| <input checked="" type="checkbox"/> | WA0029 | Dielectric Probe | DAKS-3.5 | 1034 | SPEAG | 1Y | 23.08.14 | |
| <input checked="" type="checkbox"/> | M1037 | Signal Generator | N5173B | MY53270166 | Agilent | 1Y | 23.11.02 | |
| <input checked="" type="checkbox"/> | W0122 | Power Amp | CGA020M602-2633R | B40550 | R&K | N/A | N/A *1 | |
| <input checked="" type="checkbox"/> | W0104 | Power Sensor | U2021XA | MY54040006 | Agilent | 1Y | 23.11.02 | |
| <input checked="" type="checkbox"/> | W0105 | Power Sensor | U2021XA | MY54080005 | Agilent | 1Y | 23.11.02 | |
| <input checked="" type="checkbox"/> | W0120 | Directional Coupler | 4226-20 | - | narda | 1Y | 23.11.02 | |
| <input checked="" type="checkbox"/> | W0117 | Attenuator | 8493B 3 dB | MY39260857 | Agilent | 1Y | 23.11.02 | |
| <input checked="" type="checkbox"/> | W0118 | Attenuator | AT-110 10 dB | 932968 | Hirose | 1Y | 23.11.02 | |
| <input checked="" type="checkbox"/> | W0148 | Attenuator | AT-103 3 dB | 980711 | Hirose | 1Y | 23.11.02 | |
| <input type="checkbox"/> | WC0022 | RF Cable | SUCOFLEX 106 | 503094/6 | HUBER+SUHNER | 1Y | 23.11.02 | |
| <input checked="" type="checkbox"/> | WC0017 | RF Cable | SUCOFLEX 104 | 253269/4 | HUBER+SUHNER | 1Y | 23.11.02 | |
| <input checked="" type="checkbox"/> | WC0024 | RF Cable | SUCOFLEX 126E | MY1150/26E | HUBER+SUHNER | 1Y | 23.11.02 | |
| <input checked="" type="checkbox"/> | CA5069 | RF Cable | SUCOFLEX 104 | 35533/4 | HUBER+SUHNER | 1Y | 23.11.02 | |
| <input checked="" type="checkbox"/> | WC0021 | RF Cable | SUCOFLEX 106 | 503095/6 | HUBER+SUHNER | 1Y | 23.11.02 | |
| <input checked="" type="checkbox"/> | M5151 | Thermometer | 608-H2 | 41475968 | testo | 1Y | 23.12.18 | |
| <input type="checkbox"/> | M5292 | Thermometer | 608-H2 | 41476142 | testo | 1Y | 23.11.24 | |
| <input type="checkbox"/> | W0113 | Water Thermometer | 735-1 | 02788580 | testo | 1Y | 23.09.07 | |
| <input checked="" type="checkbox"/> | W0116 | Water Thermometer | 735-1 | 02788596 | testo | 1Y | 23.08.04 | |

Note(s):

* The calibration is valid until the end of the expiration month.

*1 In-house verification is conducted periodically.

Table 2-2 Measurement Software List

| Used | Control No. | Software Description | Model No. | Ver. | Manufacturer |
|-------------------------------------|-------------|---------------------------------|-----------|--------------|--------------|
| <input type="checkbox"/> | SW-0401 | SAR measurement software | DASY52 | 52.10.4.1527 | SPEAG |
| <input type="checkbox"/> | SW-0402 | SAR post-processing software | SEMCAD X | 14.6.14.7483 | SPEAG |
| <input checked="" type="checkbox"/> | SW-0403 | Dielectric measurement software | DAK | 2.6.0.5 | SPEAG |
| <input checked="" type="checkbox"/> | SW-0404 | SAR measurement software | DASY52 | 52.10.4.1527 | SPEAG |
| <input checked="" type="checkbox"/> | SW-0405 | SAR post-processing software | SEMCAD X | 14.6.14.7483 | SPEAG |
| <input type="checkbox"/> | SW-0406 | SAR measurement spreadsheet | - | 1.00 | Main Lab. |
| <input checked="" type="checkbox"/> | SW-0314 | Power measurement software | N1918A | R03.09.00 | Agilent |

2.2. Measurement System Description

The DASY5 system for performing compliance tests consists of the following items:

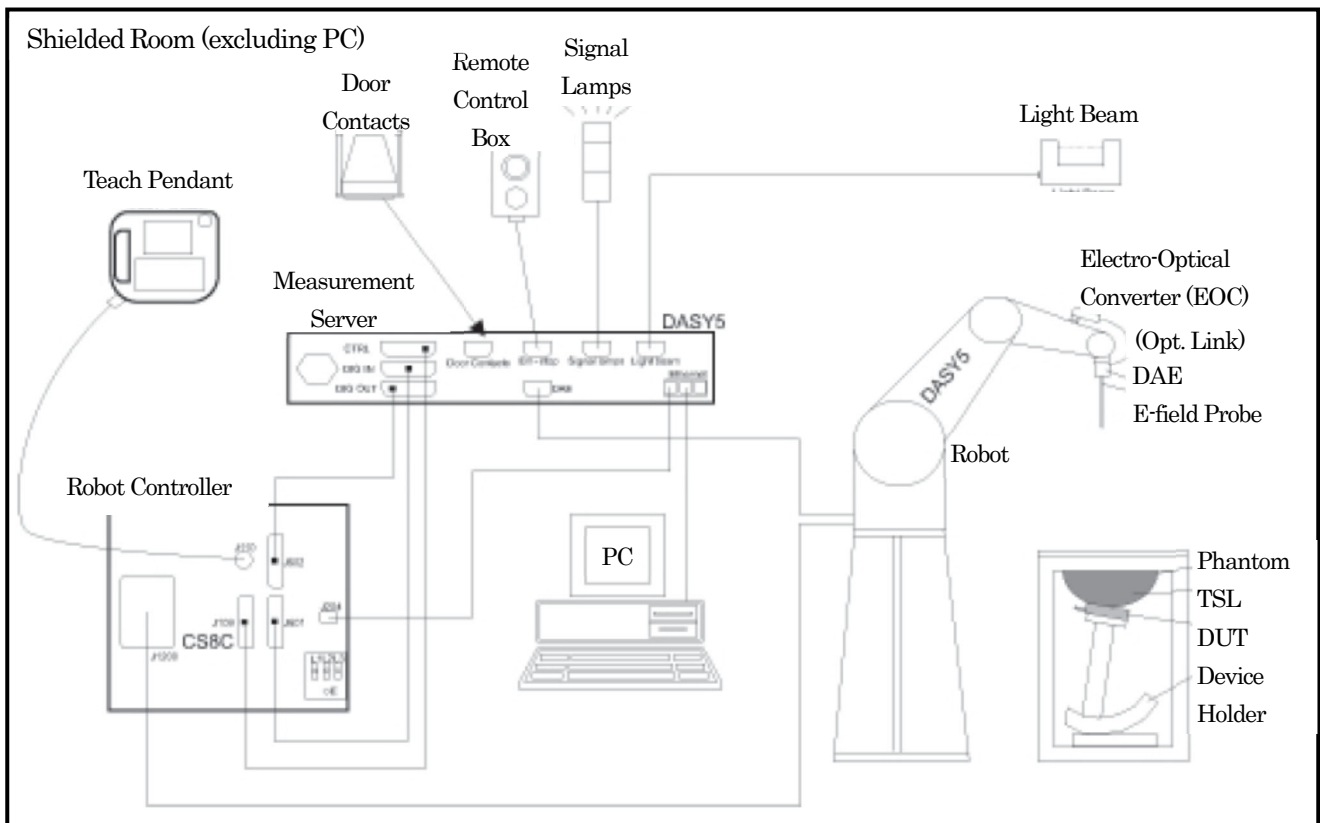


Figure 2-1 Measurement System Description

- A standard high precision 6-axis robot (Staubli TX/RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantoms (the Twin SAM and/or ELI phantoms) enabling the testing of handheld (left-hand and right-hand) and/or body-mounted usage.
- The device holders for handheld mobile phones and/or larger devices (e.g., laptops, cameras, etc.).
- Tissue simulating liquid (TSL) mixed according to the given recipes.
- System Validation Dipole Kits allowing to validate the proper functioning of the system.

2.3. Measurement System Main Components

Robot (Positioner)

| | Shielded Room 2 | Shielded Room 3 |
|-----------------------|-----------------|-----------------|
| Manufacturer | Staubli SA | |
| Model No. | TX60L | RX60BL |
| Number of Axis | 6 | |
| Reach at Wrist | 920 mm | 865 mm |
| Repeatability | +/- 0.03 mm | +/- 0.033 mm |
| Nominal Load Capacity | 2 kg | 1.5 kg |
| Maximum Load Capacity | 5 kg | 2.5 kg |
| Control Unit | CS8c | CS7m |
| Weight | 52.2 kg | 45 kg |

E-Field Probe

| | |
|---------------|---|
| Manufacturer | Schmid & Partner Engineering AG (SPEAG) |
| Model No. | EX3DV4 |
| Construction | Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Frequency | 10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz) |
| Directivity | ± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis) |
| Dynamic Range | 10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g) |
| Dimensions | Overall length: 337 mm (Tip length: 20 mm) Tip diameter: 2.5 mm (Body diameter: 12 mm) Typical distance from probe tip to dipole centers: 1 mm |

Data Acquisition Electronics (DAE)

| | |
|------------------------|--|
| Manufacturer | Schmid & Partner Engineering AG (SPEAG) |
| Model No. | DAE4 |
| Construction | Signal amplifier, multiplexer, A/D converter, and control logic Serial optical link for communication with DASY4/5 embedded system (fully remote controlled) Two-step probe touch detector for mechanical surface detection and emergency robot stop |
| Measurement Range | -100 to +300 mV (16 bit resolution and two range settings: 4 mV, 400 mV) |
| Input Offset Voltage | < 5 μ V (with auto zero) |
| Input Resistance | 200 M Ω |
| Input Bias Current | < 50 fA |
| Battery Power | > 10 hours of operation (with two 9.6 V NiMH accus) |
| Dimensions (L x W x H) | 60 x 60 x 68 mm |

DASY5 Measurement Server

| | |
|------------------------|---|
| Manufacturer | Schmid & Partner Engineering AG (SPEAG) |
| Model No. | DASY5 Measurement Server |
| CPU | Intel ULV Celeron 400 MHz |
| Chip-Disk | 128 MB |
| RAM | 128 MB |
| Construction | 16 Bit A/D converter for surface detection system Vacuum Fluorescent Display |
| I/O Interface | Robot Interface / Serial link to DAE (with watchdog supervision) / Door contact port / Emergency stop port (to connect the remote control) / Signal lamps port / Light beam port / Three Ethernet connection ports (for PC, Control Unit, and future applications) / Two USB 2.0 ports (for installation and advanced troubleshooting by SPEAG) / Two serial links (for future applications) / Expansion port (for future applications) |
| Dimensions (L x W x H) | 440 x 241 x 89 mm |

Phantoms (Twin SAM Phantom)

| | |
|----------------------|---|
| Manufacturer | Schmid & Partner Engineering AG (SPEAG) |
| Model No. | Twin SAM |
| Description | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure. |
| Material | Vinylester, glass fiber reinforced (VE-GF) |
| Liquid Compatibility | Compatible with all SPEAG tissue simulating liquids (incl. DGBE type) |
| Shell Thickness | 2 ± 0.2 mm (6 ± 0.2 mm at ear point) |
| Dimensions | Length: 1000 mm Width: 500 mm Height: adjustable feet |
| Filling Volume | Approx. 25 liters |
| Wooden Support | SPEAG standard phantom table |

Phantoms (ELI Phantom)

| | |
|----------------------|--|
| Manufacturer | Schmid & Partner Engineering AG (SPEAG) |
| Model No. | ELI V5.0 |
| Description | Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure. |
| Material | Vinylester, glass fiber reinforced (VE-GF) |
| Liquid Compatibility | Compatible with all SPEAG tissue simulating liquids (incl. DGBE type) |
| Shell Thickness | 2.0 ± 0.2 mm (bottom plate) |
| Dimensions | Major axis: 600 mm Minor axis: 400 mm |
| Filling Volume | Approx. 30 liters |
| Wooden Support | SPEAG standard phantom table |

Device Holder (Mounting Device for Hand-Held Transmitters)

| | |
|--------------|--|
| Manufacturer | Schmid & Partner Engineering AG (SPEAG) |
| Model No. | MD4HHTV5 |
| Description | In combination with the Twin SAM or ELI Phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). |
| Material | Polyoxymethylene (POM) |

Device Holder (Mounting Device Adaptor for Ultra Wide Transmitters)

| | |
|--------------|--|
| Manufacturer | Schmid & Partner Engineering AG (SPEAG) |
| Model No. | MDA4WTV5 |
| Description | An upgrade kit to Mounting Device to enable easy mounting of wider devices like big smartphones, e-books, small tablets, etc. It holds devices with width up to 140mm. |
| Material | Polyoxymethylene (POM) |

Device Holder (Mounting Device Adaptor for Laptops)

| | |
|--------------|--|
| Manufacturer | Schmid & Partner Engineering AG (SPEAG) |
| Model No. | MDA4LAP |
| Description | A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.); lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI Phantoms. |
| Material | Polyoxymethylene (POM), PET-G, Foam |

System Validation Dipole Kits


| | | | |
|------------------|--|---------------|----------------|
| Manufacturer | Schmid & Partner Engineering AG (SPEAG) | | |
| Model No. | D-Series | | |
| Construction | Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with tissue simulating solutions | | |
| Frequency | 2450, 5100 to 5800 MHz | | |
| Return Loss | > 20 dB at specified validation position | | |
| Power Capability | > 100 W ($f < 1$ GHz); > 40 W ($f > 1$ GHz) | | |
| Accessories | Distance holder, tripod adaptor, tripod | | |
| Dimensions | Product | Dipole length | Overall height |
| | D2450V2 | 52.0 mm | 290.0 mm |
| | D5GHzV2 | 20.6 mm | 300.0 mm |

2.4. Tissue Simulating Liquids

Recipes for tissue simulating liquids manufactured by SPEAG

| Ingredients (% by weight) | Frequency (MHz) | | | | | |
|------------------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|-------------------------------------|----------------------------|
| | 1900 to 3800 | | 3500 to 5800 | | 600 to 6000 / 10000 | |
| Used | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Tissue Simulating Liquids | HBBL 1900- 3800 V3 | MBBL 1900- 3800 V3 | HBBL 3500- 5800 V5 | MBBL 3500- 5800 V5 | HBBL 600- 10000 V6 | MBBL 600- 6000 V6 |
| Tissue Type | Head | Body | Head | Body | Head | Body |
| H ₂ O | 50 – 73 % | | 50 – 65 % | | 60 – 80 % | |
| Non-ionic detergents | 25 – 50 % | | – | | – | |
| NaCl | 0 – 2 % | | 0 – 1.5 % | | 0 – 1.5 % | |
| Preventol-D7 | 0.05 – 0.1 % | | – | | – | |
| Ethanediol | – | | – | | < 5.2 % | |
| Sodium Petroleum Sulfonate | – | | – | | < 2.9 % | |
| Hexylene Glycol | – | | – | | < 2.9 % | |
| Alkoxylated Alcohol | – | | – | | < 2.0 % | |
| Mineral Oil | – | | 10 – 30 % | | – | |
| Emulsifiers | – | | 8 – 25 % | | 20 – 40 % | |

For the SAR measurement, the phantom must be filled with tissue simulating liquid to a depth of at least 15 cm.

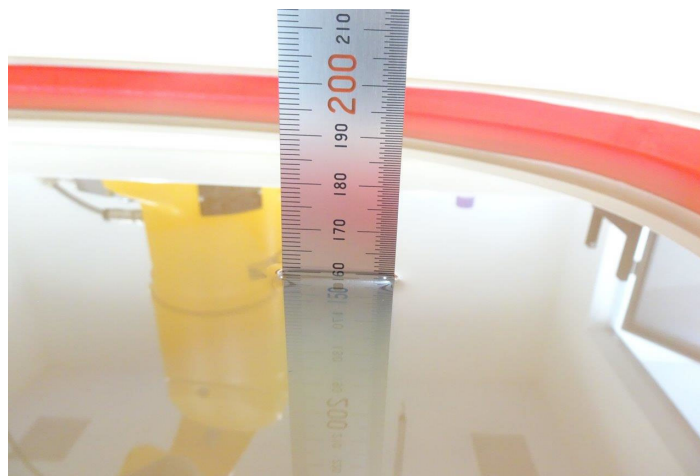

HBBL600-10000 V6

Figure 2-2

Photos: Liquid Depth (at the center of the flat phantom)

2.5. SAR Measurement

Step 1: Power Reference Measurement

Before an area scan and after the zoom scan, single point SAR measurements are performed at defined locations to estimate the SAR measurement drift due to device output power variations.

Step 2: Area Scan

An area scan is performed according to the requirements in Table 2-3.

Step 3: Zoom Scan

A zoom scan is performed according to the requirements in Table 2-3.

Step 4: Power Drift Measurement

Before an area scan and after the zoom scan, single point SAR measurements are performed at defined locations to estimate the SAR measurement drift due to device output power variations.

Table 2-3 Area Scan and Zoom Scan Parameters

| | | DUT Transmit Frequency being Tested | | |
|--|--------------------------------------|---|--|---|
| | | ≤ 3 GHz | > 3 GHz | |
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | | 5 ± 1 mm | ½ δ ln(2) ± 0.5 mm | |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | | 30° ± 1° | 20° ± 1° | |
| Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area} | | ≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm | 3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm | |
| | | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. | | |
| Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom} | | ≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm | 3 – 4 GHz: ≤ 5 mm 4 – 6 GHz: ≤ 4 mm | |
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: Δz _{Zoom} (n) | ≤ 5 mm | 3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm | |
| | graded grid | Δz _{Zoom} (1): between 1st two points closest to phantom surface | ≤ 4 mm | 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm |
| | | Δz _{Zoom} (n>1): between subsequent points | ≤ 1.5 · Δz _{Zoom} (n-1) | |
| Minimum zoom scan volume | x, y, z | ≥ 30 mm | 3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm | |

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium.

2.6. Measurement Uncertainty

☒ Table 2-4 DASYS5 Uncertainty Budget for SAR Tests

| According to IEEE Std 1528-2013 (0.3GHz to 3GHz range) | | | | | | | | |
|--|-------------------|----------------|-------|-----------|------------|---------|--------|------------|
| Input quantity | Uncertainty of Xi | | | Ci | | Ciu(Xi) | | Vi Veff |
| | Xi | Prob. Dist. | Div. | 1g [-] | 10g [-] | 1g | 10g | |
| Measurement System | | | | | | | | |
| Probe Calibration ($k=1$) | ±6.0% | N | 1.00 | 1.00 | 1.00 | ±6.0% | ±6.0% | ∞ |
| Axial Isotropy | ±4.7% | R | 1.73 | 0.70 | 0.70 | ±1.9% | ±1.9% | ∞ |
| Hemispherical Isotropy | ±9.7% | R | 1.73 | 0.70 | 0.70 | ±3.9% | ±3.9% | ∞ |
| Boundary Effects | ±1.0% | R | 1.73 | 1.00 | 1.00 | ±0.6% | ±0.6% | ∞ |
| Linearity | ±4.7% | R | 1.73 | 1.00 | 1.00 | ±2.7% | ±2.7% | ∞ |
| System Detection Limits | ±0.3% | R | 1.73 | 1.00 | 1.00 | ±0.1% | ±0.1% | ∞ |
| Modulation Response | ±2.4% | R | 1.73 | 1.00 | 1.00 | ±1.4% | ±1.4% | ∞ |
| Readout Electronics | ±0.3% | N | 1.00 | 1.00 | 1.00 | ±0.3% | ±0.3% | ∞ |
| Response Time | ±0.8% | R | 1.73 | 1.00 | 1.00 | ±0.5% | ±0.5% | ∞ |
| Integration Time | ±2.6% | R | 1.73 | 1.00 | 1.00 | ±1.5% | ±1.5% | ∞ |
| RF Ambient Noise | ±3.0% | R | 1.73 | 1.00 | 1.00 | ±1.7% | ±1.7% | ∞ |
| RF Ambient Reflections | ±3.0% | R | 1.73 | 1.00 | 1.00 | ±1.7% | ±1.7% | ∞ |
| Probe Positioner | ±0.4% | R | 1.73 | 1.00 | 1.00 | ±0.2% | ±0.2% | ∞ |
| Probe Positioning | ±2.9% | R | 1.73 | 1.00 | 1.00 | ±1.7% | ±1.7% | ∞ |
| Max. SAR Eval. | ±2.0% | R | 1.73 | 1.00 | 1.00 | ±1.2% | ±1.2% | ∞ |
| Test Sample Related | | | | | | | | |
| Device Positioning | ±1.8% | N | 1.00 | 1.00 | 1.00 | ±1.8% | ±1.8% | 29 |
| Device Holder | ±3.6% | N | 1.00 | 1.00 | 1.00 | ±3.6% | ±3.6% | 5 |
| Power Drift | ±5.0% | R | 1.73 | 1.00 | 1.00 | ±2.9% | ±2.9% | ∞ |
| Power Scaling | ±0.0% | R | 1.73 | 1.00 | 1.00 | ±0.0% | ±0.0% | ∞ |
| Phantom and Setup | | | | | | | | |
| Phantom Uncertainty | ±7.2% | R | 1.73 | 1.00 | 1.00 | ±4.2% | ±4.2% | ∞ |
| SAR Correction | ±1.9% | R | 1.73 | 1.00 | 0.84 | ±1.1% | ±0.9% | ∞ |
| Liquid Conductivity (mea.) | ±2.5% | R | 1.73 | 0.78 | 0.71 | ±1.1% | ±1.0% | ∞ |
| Liquid Permittivity (mea.) | ±2.5% | R | 1.73 | 0.23 | 0.26 | ±0.3% | ±0.4% | ∞ |
| Temp. Unc. - Conductivity | ±3.4% | R | 1.73 | 0.78 | 0.71 | ±1.5% | ±1.4% | ∞ |
| Temp. Unc. - Permittivity | ±0.4% | R | 1.73 | 0.23 | 0.26 | ±0.1% | ±0.1% | ∞ |
| Combined Standard Uncertainty | - | - | - | - | - | ±11.1% | ±11.1% | 453 |
| Expanded Uncertainty (95% conf. interval) | - | - | $k=2$ | - | - | ±22.3% | ±22.2% | - |

Table 2-5 DASY5 Uncertainty Budget for SAR Tests


| According to IEEE Std 1528-2013 (3GHz to 6GHz range) | | | | | | | | |
|--|-------------------|----------------|-------|-----------|------------|---------|--------|------------|
| Input quantity | Uncertainty of Xi | | | Ci | | Ciu(Xi) | | Vi Veff |
| | Xi | Prob. Dist. | Div. | 1g [-] | 10g [-] | 1g | 10g | |
| Measurement System | | | | | | | | |
| Probe Calibration ($k=1$) | ±6.55% | N | 1.00 | 1.00 | 1.00 | ±6.6% | ±6.6% | ∞ |
| Axial Isotropy | ±4.7% | R | 1.73 | 0.70 | 0.70 | ±1.9% | ±1.9% | ∞ |
| Hemispherical Isotropy | ±9.7% | R | 1.73 | 0.70 | 0.70 | ±3.9% | ±3.9% | ∞ |
| Boundary Effects | ±2.0% | R | 1.73 | 1.00 | 1.00 | ±1.2% | ±1.2% | ∞ |
| Linearity | ±4.7% | R | 1.73 | 1.00 | 1.00 | ±2.7% | ±2.7% | ∞ |
| System Detection Limits | ±0.3% | R | 1.73 | 1.00 | 1.00 | ±0.1% | ±0.1% | ∞ |
| Modulation Response | ±2.4% | R | 1.73 | 1.00 | 1.00 | ±1.4% | ±1.4% | ∞ |
| Readout Electronics | ±0.3% | N | 1.00 | 1.00 | 1.00 | ±0.3% | ±0.3% | ∞ |
| Response Time | ±0.8% | R | 1.73 | 1.00 | 1.00 | ±0.5% | ±0.5% | ∞ |
| Integration Time | ±2.6% | R | 1.73 | 1.00 | 1.00 | ±1.5% | ±1.5% | ∞ |
| RF Ambient Noise | ±3.0% | R | 1.73 | 1.00 | 1.00 | ±1.7% | ±1.7% | ∞ |
| RF Ambient Reflections | ±3.0% | R | 1.73 | 1.00 | 1.00 | ±1.7% | ±1.7% | ∞ |
| Probe Positioner | ±0.8% | R | 1.73 | 1.00 | 1.00 | ±0.5% | ±0.5% | ∞ |
| Probe Positioning | ±6.7% | R | 1.73 | 1.00 | 1.00 | ±3.9% | ±3.9% | ∞ |
| Max. SAR Eval. | ±4.0% | R | 1.73 | 1.00 | 1.00 | ±2.3% | ±2.3% | ∞ |
| Test Sample Related | | | | | | | | |
| Device Positioning | ±1.8% | N | 1.00 | 1.00 | 1.00 | ±1.8% | ±1.8% | 29 |
| Device Holder | ±3.6% | N | 1.00 | 1.00 | 1.00 | ±3.6% | ±3.6% | 5 |
| Power Drift | ±5.0% | R | 1.73 | 1.00 | 1.00 | ±2.9% | ±2.9% | ∞ |
| Power Scaling | ±0.0% | R | 1.73 | 1.00 | 1.00 | ±0.0% | ±0.0% | ∞ |
| Phantom and Setup | | | | | | | | |
| Phantom Uncertainty | ±7.6% | R | 1.73 | 1.00 | 1.00 | ±4.4% | ±4.4% | ∞ |
| SAR Correction | ±1.9% | R | 1.73 | 1.00 | 0.84 | ±1.1% | ±0.9% | ∞ |
| Liquid Conductivity (mea.) | ±2.5% | R | 1.73 | 0.78 | 0.71 | ±1.1% | ±1.0% | ∞ |
| Liquid Permittivity (mea.) | ±2.5% | R | 1.73 | 0.23 | 0.26 | ±0.3% | ±0.4% | ∞ |
| Temp. Unc. - Conductivity | ±3.4% | R | 1.73 | 0.78 | 0.71 | ±1.5% | ±1.4% | ∞ |
| Temp. Unc. - Permittivity | ±0.4% | R | 1.73 | 0.23 | 0.26 | ±0.1% | ±0.1% | ∞ |
| Combined Standard Uncertainty | - | - | - | - | - | ±12.3% | ±12.2% | 664 |
| Expanded Uncertainty (95% conf. interval) | | - | $k=2$ | - | - | ±24.5% | ±24.4% | - |

☒ Table 2-6 DASYS Uncertainty Budget for SAR System Check


| According to IEEE Std 1528-2013 (0.3GHz to 6GHz range) | | | | | | | | |
|--|-------------------|----------------|------|-----------|------------|---------|--------|------------|
| Input quantity | Uncertainty of Xi | | | Ci | | Ciu(Xi) | | Vi Veff |
| | Xi | Prob. Dist. | Div. | 1g [-] | 10g [-] | 1g | 10g | |
| Measurement System | | | | | | | | |
| Probe Calibration ($k=1$) | ±6.55% | N | 1.00 | 1.00 | 1.00 | ±6.6% | ±6.6% | ∞ |
| Axial Isotropy | ±4.7% | R | 1.73 | 0.70 | 0.70 | ±1.9% | ±1.9% | ∞ |
| Hemispherical Isotropy | ±9.7% | R | 1.73 | 0.70 | 0.70 | ±3.9% | ±3.9% | ∞ |
| Boundary Effects | ±2.0% | R | 1.73 | 1.00 | 1.00 | ±1.2% | ±1.2% | ∞ |
| Linearity | ±4.7% | R | 1.73 | 1.00 | 1.00 | ±2.7% | ±2.7% | ∞ |
| System Detection Limits | ±0.3% | R | 1.73 | 1.00 | 1.00 | ±0.1% | ±0.1% | ∞ |
| Modulation Response | ±0.0% | R | 1.73 | 1.00 | 1.00 | ±0.0% | ±0.0% | ∞ |
| Readout Electronics | ±0.3% | N | 1.00 | 1.00 | 1.00 | ±0.3% | ±0.3% | ∞ |
| Response Time | ±0.0% | R | 1.73 | 1.00 | 1.00 | ±0.0% | ±0.0% | ∞ |
| Integration Time | ±0.0% | R | 1.73 | 1.00 | 1.00 | ±0.0% | ±0.0% | ∞ |
| RF Ambient Noise | ±1.0% | R | 1.73 | 1.00 | 1.00 | ±0.6% | ±0.6% | ∞ |
| RF Ambient Reflections | ±1.0% | R | 1.73 | 1.00 | 1.00 | ±0.6% | ±0.6% | ∞ |
| Probe Positioner | ±0.8% | R | 1.73 | 1.00 | 1.00 | ±0.5% | ±0.5% | ∞ |
| Probe Positioning | ±6.7% | R | 1.73 | 1.00 | 1.00 | ±3.9% | ±3.9% | ∞ |
| Max. SAR Eval. | ±4.0% | R | 1.73 | 1.00 | 1.00 | ±2.3% | ±2.3% | ∞ |
| Dipole Related | | | | | | | | |
| Deviation of exp. Dipole | ±5.5% | R | 1.73 | 1.00 | 1.00 | ±3.2% | ±3.2% | ∞ |
| Dipole Axis to Liquid Dist. | ±2.0% | R | 1.73 | 1.00 | 1.00 | ±1.2% | ±1.2% | ∞ |
| Inoput Power & SAR Drift | ±3.4% | R | 1.73 | 1.00 | 1.00 | ±2.0% | ±2.0% | ∞ |
| Phantom and Setup | | | | | | | | |
| Phantom Uncertainty | ±7.6% | R | 1.73 | 1.00 | 1.00 | ±4.4% | ±4.4% | ∞ |
| SAR Correction | ±1.9% | R | 1.73 | 1.00 | 0.84 | ±1.1% | ±0.9% | ∞ |
| Liquid Conductivity (mea.) | ±2.5% | N | 1.00 | 0.78 | 0.71 | ±2.0% | ±1.8% | ∞ |
| Liquid Permittivity (mea.) | ±2.5% | N | 1.00 | 0.23 | 0.26 | ±0.6% | ±0.7% | ∞ |
| Temp. Unc. - Conductivity | ±3.4% | R | 1.73 | 0.78 | 0.71 | ±1.5% | ±1.4% | ∞ |
| Temp. Unc. - Permittivity | ±0.4% | R | 1.73 | 0.23 | 0.26 | ±0.1% | ±0.1% | ∞ |
| Combined Standard Uncertainty | - | - | - | - | - | ±11.6% | ±11.5% | - |
| Expanded Uncertainty (95% conf. interval) | - | - | k=2 | - | - | ±23.1% | ±23.0% | - |

2.7. Dielectric Parameter Measurement of Tissue Simulating Liquids

The dielectric properties of the tissue simulating liquids used were verified within 24 hours before the SAR measurement.

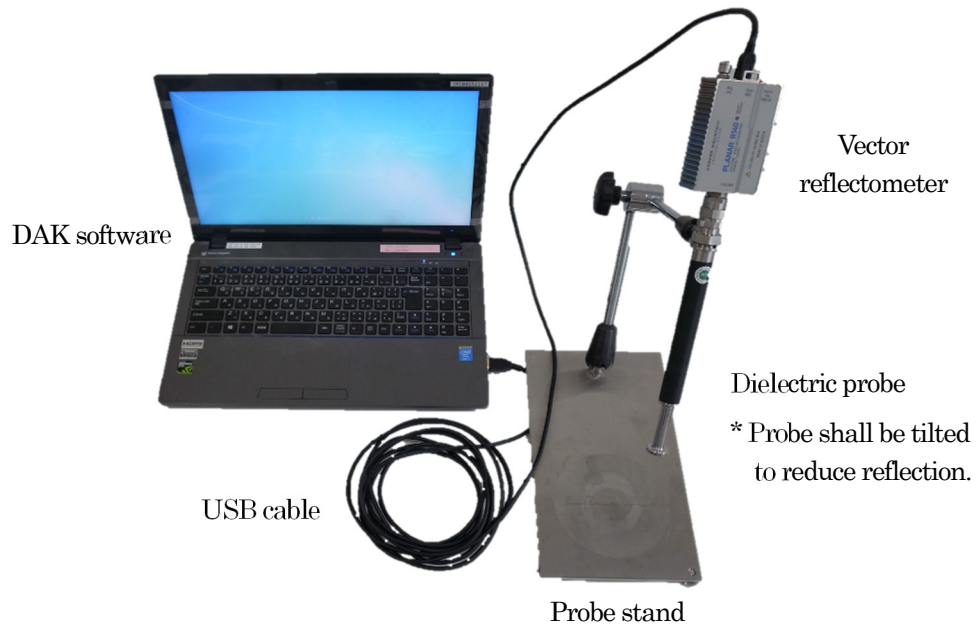

(a) Dielectric Parameter Measurement System

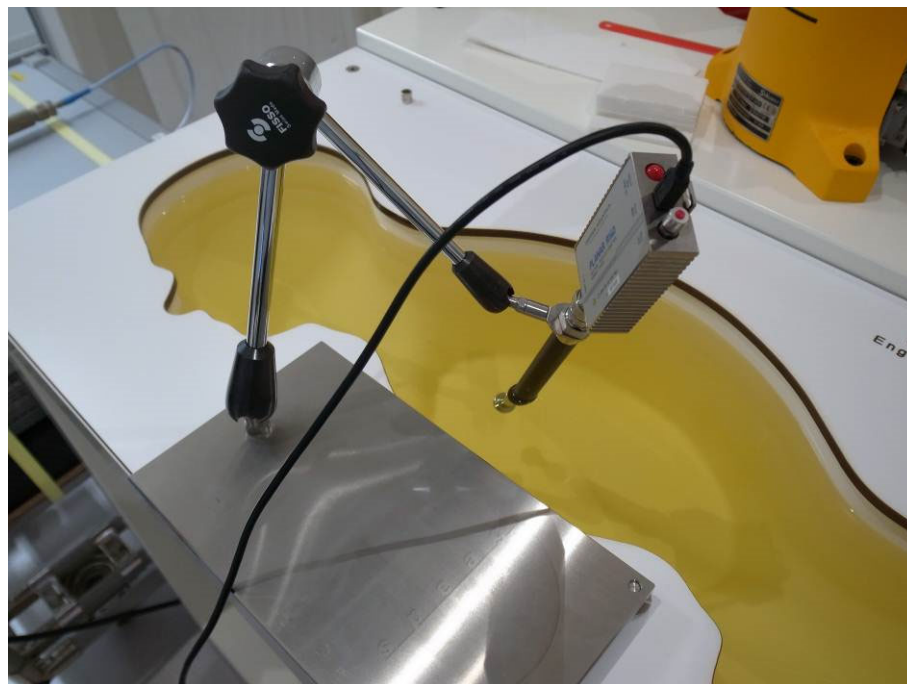

(b) Example Photo: Dielectric Parameter Measurement

Figure 2-3

Dielectric Parameter Measurement Set-up

*1 Target values are linearly interpolated between the values defined in KDB 865664 D01, when necessary.

*2 The deviation of measured values from target values must be within +/-5 %.

4th Site Shielded Room 2

| TSL | Freq. (MHz) | Param. | Target *1 | Meas. | Dev. (%) *2 | Date | Amb. Temp. (deg. C) | Rel. Hum. (%RH) | Liquid Temp. (deg. C) | Note(s) |
|-------------------------|-------------|---------|-----------|-------|-------------|-----------|---------------------|-----------------|-----------------------|---------|
| HBBL 600-10000 V6 | 2402 | er | 39.29 | 40.76 | 3.74 | 2024/7/1 | 21.0 | 56.6 | 21.3 | |
| | | σ (S/m) | 1.76 | 1.82 | 3.41 | | | | | |
| | 2412 | er | 39.27 | 40.79 | 3.87 | 2024/7/2 | 20.7 | 61.0 | 21.3 | |
| | | σ (S/m) | 1.77 | 1.84 | 3.95 | | | | | |
| | 2412 | er | 39.27 | 39.83 | 1.43 | 2024/7/3 | 20.0 | 59.9 | 20.0 | |
| | | σ (S/m) | 1.77 | 1.84 | 3.95 | | | | | |
| | 2437 | er | 39.22 | 40.75 | 3.90 | 2024/7/2 | 20.7 | 61.0 | 21.3 | |
| | | σ (S/m) | 1.79 | 1.86 | 3.91 | | | | | |
| | 2437 | er | 39.22 | 39.79 | 1.45 | 2024/7/3 | 20.0 | 59.9 | 20.0 | |
| | | σ (S/m) | 1.79 | 1.86 | 3.91 | | | | | |
| | 2440 | er | 39.22 | 40.69 | 3.75 | 2024/7/1 | 21.0 | 56.6 | 21.3 | |
| | | σ (S/m) | 1.79 | 1.85 | 3.35 | | | | | |
| | 2441 | er | 39.22 | 40.67 | 3.70 | 2024/7/1 | 21.0 | 56.6 | 21.3 | |
| | | σ (S/m) | 1.79 | 1.86 | 3.91 | | | | | |
| | 2462 | er | 39.18 | 40.69 | 3.85 | 2024/7/2 | 20.7 | 61.0 | 21.3 | |
| | | σ (S/m) | 1.81 | 1.89 | 4.42 | | | | | |
| | 2462 | er | 39.18 | 39.75 | 1.45 | 2024/7/3 | 20.0 | 59.9 | 20.0 | |
| | | σ (S/m) | 1.81 | 1.89 | 4.04 | | | | | |
| | 2480 | er | 39.16 | 40.63 | 3.75 | 2024/7/1 | 21.0 | 56.6 | 21.3 | |
| | | σ (S/m) | 1.83 | 1.90 | 3.83 | | | | | |
| | 5290 | er | 35.88 | 35.67 | -0.59 | 2024/6/19 | 22.1 | 62.5 | 21.8 | |
| | | σ (S/m) | 4.75 | 4.65 | -2.11 | | | | | |
| | 5290 | er | 35.88 | 35.65 | -0.64 | 2024/6/20 | 22.9 | 56.6 | 22.5 | |
| | | σ (S/m) | 4.75 | 4.61 | -2.95 | | | | | |
| 5290 | er | 35.88 | 35.41 | -1.31 | 2024/6/26 | 21.0 | 55.7 | 21.0 | | |
| | σ (S/m) | 4.75 | 4.80 | 1.05 | | | | | | |
| 5530 | er | 35.61 | 34.18 | -4.02 | 2024/7/4 | 19.7 | 53.4 | 19.2 | | |
| | σ (S/m) | 4.99 | 4.82 | -3.41 | | | | | | |
| 5530 | er | 35.61 | 35.97 | 1.01 | 2024/7/5 | 20.1 | 56.7 | 19.1 | | |
| | σ (S/m) | 4.99 | 4.99 | -0.08 | | | | | | |
| 5610 | er | 35.52 | 33.92 | -4.49 | 2024/7/4 | 19.7 | 53.4 | 19.2 | | |
| | σ (S/m) | 5.08 | 4.90 | -3.38 | | | | | | |
| 5610 | er | 35.52 | 35.66 | 0.40 | 2024/7/5 | 20.1 | 56.7 | 19.1 | | |
| | σ (S/m) | 5.08 | 5.10 | 0.55 | | | | | | |
| 5775 | er | 35.33 | 35.86 | 1.50 | 2024/6/28 | 21.7 | 57.8 | 21.0 | | |
| | σ (S/m) | 5.24 | 5.08 | -3.05 | | | | | | |

2.8. System Check Measurement

The system check was performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium.



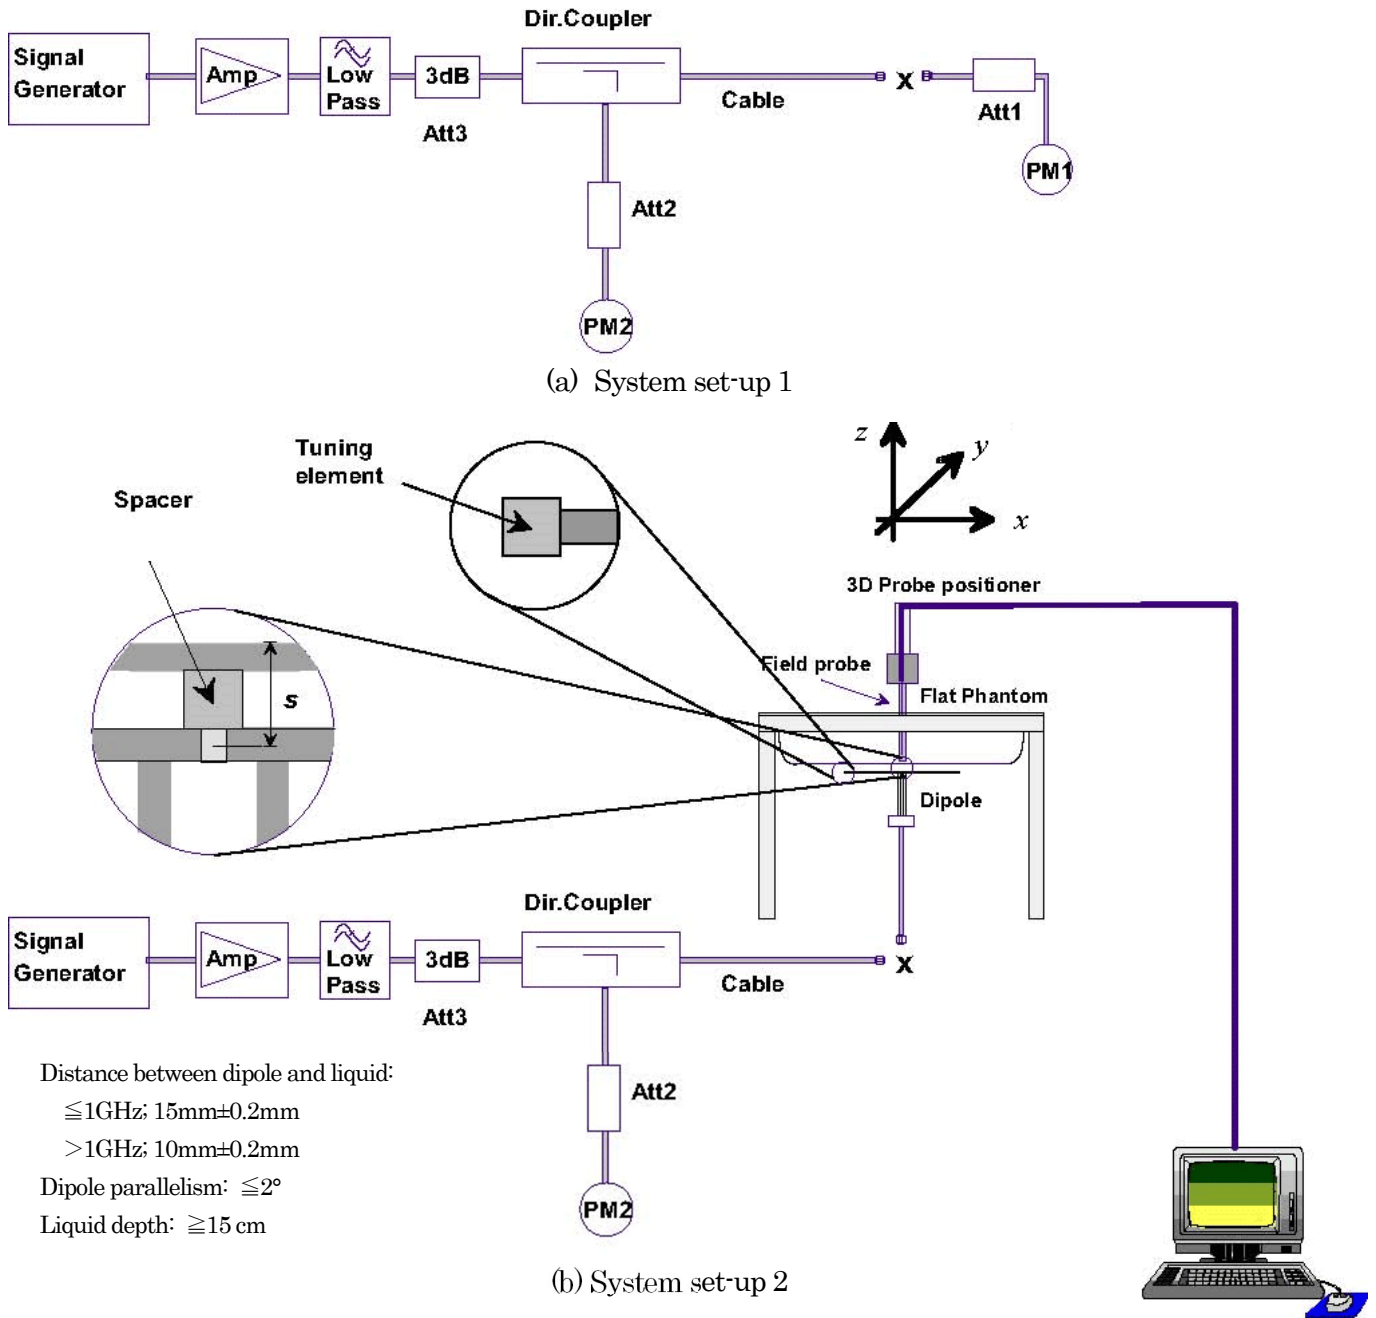


Figure 2-4 System Check Measurement Set-up

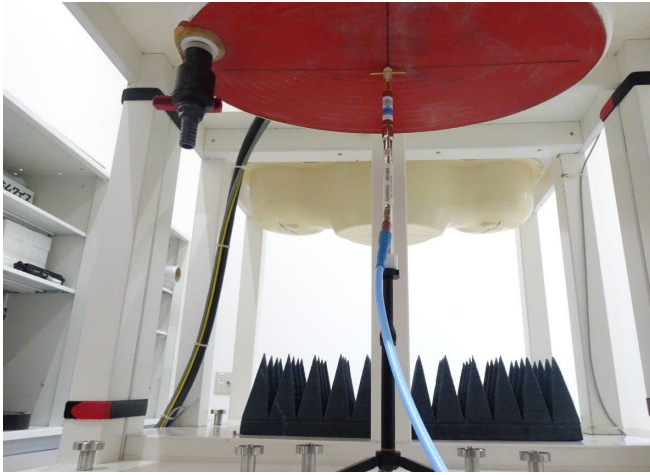

D2450V2

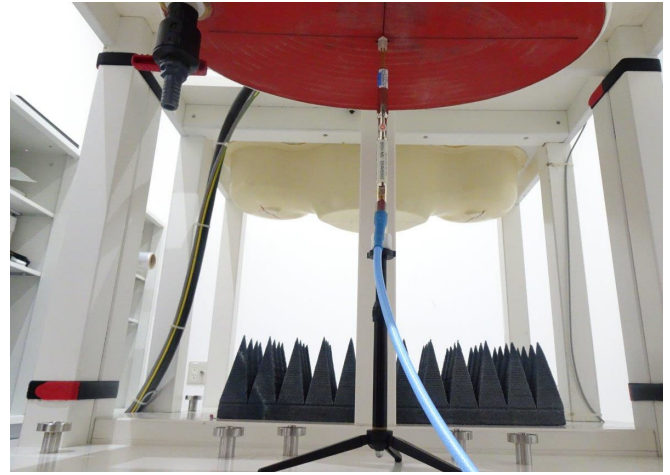

D5GHzV2

(c) Photo: System Validation Dipole Placement

Figure 2-4 System Check Measurement Set-up (continued)

- *1 The normalized values (1 W) were calculated by normalizing the measured values to 1-W forward input power.
- *2 The target values (1 W) are defined in IEEE Std 1528 and/or the calibration certificate of system validation dipoles used.
- *3 The deviation of normalized values from target values must be within +/-10 %.

4th Site Shielded Room 2

| System Validation Dipole | Freq. (MHz) | Param. | 250 mW-Meas. (W/kg) | 1 W-Norm. (W/kg) *1 | 1 W-Target (W/kg) *2 | Dev. (%) *3 | Date | Amb. Temp. (deg. C) | Rel. Hum. (%RH) | Liquid Temp. (deg. C) | Note(s) |
|--------------------------|-------------|----------|---------------------|---------------------|----------------------|-------------|----------|---------------------|-----------------|-----------------------|---------|
| D2450V2 | 2450 | 1-g SAR | 13.10 | 52.40 | 53.40 | -1.87 | 2024/7/1 | 21.0 | 56.6 | 21.3 | |
| | | 10-g SAR | 6.13 | 24.52 | 24.90 | -1.53 | | | | | |
| D2450V2 | 2450 | 1-g SAR | 13.40 | 53.60 | 53.40 | 0.37 | 2024/7/2 | 20.7 | 61.0 | 21.3 | |
| | | 10-g SAR | 6.30 | 25.20 | 24.90 | 1.20 | | | | | |
| D2450V2 | 2450 | 1-g SAR | 13.20 | 52.80 | 53.40 | -1.12 | 2024/7/3 | 20.0 | 59.9 | 20.0 | |
| | | 10-g SAR | 6.14 | 24.56 | 24.90 | -1.37 | | | | | |

| System Validation Dipole | Freq. (MHz) | Param. | 100 mW-Meas. (W/kg) | 1 W-Norm. (W/kg) *1 | 1 W-Target (W/kg) *2 | Dev. (%) *3 | Date | Amb. Temp. (deg. C) | Rel. Hum. (%RH) | Liquid Temp. (deg. C) | Note(s) |
|--------------------------|-------------|----------|---------------------|---------------------|----------------------|-------------|-----------|---------------------|-----------------|-----------------------|---------|
| D5GHzV2 | 5300 | 1-g SAR | 7.94 | 79.40 | 80.90 | -1.85 | 2024/6/19 | 24.3 | 59.0 | 21.7 | |
| | | 10-g SAR | 2.28 | 22.80 | 23.00 | -0.87 | | | | | |
| D5GHzV2 | 5300 | 1-g SAR | 7.39 | 73.90 | 80.90 | -8.65 | 2024/6/20 | 22.9 | 56.6 | 22.5 | |
| | | 10-g SAR | 2.12 | 21.20 | 23.00 | -7.83 | | | | | |
| D5GHzV2 | 5300 | 1-g SAR | 7.74 | 77.40 | 80.90 | -4.33 | 2024/6/26 | 19.8 | 60.0 | 21.4 | |
| | | 10-g SAR | 2.19 | 21.90 | 23.00 | -4.78 | | | | | |
| D5GHzV2 | 5600 | 1-g SAR | 8.31 | 83.10 | 83.20 | -0.12 | 2024/7/4 | 19.7 | 53.4 | 19.2 | |
| | | 10-g SAR | 2.34 | 23.40 | 23.80 | -1.68 | | | | | |
| D5GHzV2 | 5600 | 1-g SAR | 8.19 | 81.90 | 83.20 | -1.56 | 2024/7/5 | 20.1 | 56.7 | 19.1 | |
| | | 10-g SAR | 2.29 | 22.90 | 23.80 | -3.78 | | | | | |
| D5GHzV2 | 5800 | 1-g SAR | 7.85 | 78.50 | 80.10 | -2.00 | 2024/6/28 | 21.7 | 57.8 | 21.0 | |
| | | 10-g SAR | 2.22 | 22.20 | 22.70 | -2.20 | | | | | |

3. Conducted Power Measurements

☒ <The Initial Test Configuration Procedures for Wi-Fi>

According to KDB 248227 D01,

the initial test configuration is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band.

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined by applying the following steps sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations in a frequency band with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

3.1. Conducted Power Measurement Results

Wi-Fi 2.4 GHz

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2023/12/6 | 22.5 deg.C | 46.1 %RH | Yu Inoue |
| 2023/12/7 | 21.6 deg.C | 42.5 %RH | Yu Inoue |

IEEE 802.11b

| Ch. | Freq. (MHz) | Power Setting | Data Rate (Mbps) | Meas. Frame Averaged Power (dBm) | | Meas. Burst Averaged Power (dBm) *1 | | Max.Poss. Power (dBm) | | Within 2 dB of Max. Poss. Power | SAR Tested | Note(s) |
|-----|-------------|---------------|------------------|----------------------------------|-------------|--|--------|-----------------------|--------|---------------------------------|------------|----------|
| | | | | Chain0 | Chain1 | Chain0 | Chain1 | Chain0 | Chain1 | | | |
| 1 | 2412 | Tune-up | 1.0 | 8.74 | 8.50 | 8.74 | 8.50 | 9.50 | 9.50 | Yes | Yes | |
| 6 | 2437 | | 1.0 | 8.72 | 8.64 | 8.73 | 8.64 | 9.50 | 9.50 | Yes | Yes | |
| 11 | 2462 | | 1.0 | 8.92 | 8.86 | 8.92 | 8.86 | 9.50 | 9.50 | Yes | Yes | Worst Ch |

IEEE 802.11g(*2)

| Ch. | Freq. (MHz) | Power Setting | Data Rate (Mbps) | Meas. Frame Averaged Power (dBm) | | Meas. Burst Averaged Power (dBm) *1 | | Max.Poss. Power (dBm) | | Within 2 dB of Max. Poss. Power | SAR Tested | Note(s) |
|-----|-------------|---------------|------------------|----------------------------------|-------------|--|--------|-----------------------|--------|---------------------------------|------------|----------|
| | | | | Chain0 | Chain1 | Chain0 | Chain1 | Chain0 | Chain1 | | | |
| 1 | 2412 | Tune-up | 6.0 | 8.55 | 8.32 | 8.57 | 8.34 | 9.50 | 9.50 | Yes | - | |
| 6 | 2437 | | 6.0 | 8.53 | 8.47 | 8.55 | 8.50 | 9.50 | 9.50 | Yes | - | |
| 11 | 2462 | | 6.0 | 8.72 | 8.68 | 8.75 | 8.71 | 9.50 | 9.50 | Yes | - | Worst Ch |

IEEE 802.11n(*2)

| Ch. | Freq. (MHz) | Power Setting | Data Rate (MCS) | Meas. Frame Averaged Power (dBm) | | Meas. Burst Averaged Power (dBm) *1 | | Max.Poss. Power (dBm) | | Within 2 dB of Max. Poss. Power | SAR Tested | Note(s) |
|-----|-------------|---------------|-----------------|----------------------------------|-------------|--|--------|-----------------------|--------|---------------------------------|------------|----------|
| | | | | Chain0 | Chain1 | Chain0 | Chain1 | Chain0 | Chain1 | | | |
| 1 | 2412 | Tune-up | 0 | 8.57 | 8.24 | 8.60 | 8.27 | 9.50 | 9.50 | Yes | - | |
| 6 | 2437 | | 0 | 8.37 | 8.40 | 8.40 | 8.42 | 9.50 | 9.50 | Yes | - | |
| 11 | 2462 | | 0 | 8.59 | 8.66 | 8.62 | 8.69 | 9.50 | 9.50 | Yes | - | Worst Ch |

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 SAR is not required for 802.11g/n channels when the highest reported SAR for DSSS (802.11b) is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), according to KDB 248227 D01.

Wi-Fi 5 GHz (W52: U-NII-1 and W53: U-NII-2A Bands)

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2023/12/6 | 22.5 deg.C | 46.1 %RH | Yu Inoue |
| 2023/12/8 | 22.1 deg.C | 44.9 %RH | Yu Inoue |

The Initial Test Configuration (ITC) : IEEE 802.11ac (VHT80) in W53 (*2)(*3)

| Mode | Freq. Band | Ch. | Freq. (MHz) | Data Rate /MCS | Meas. Frame Averaged Power (dBm) | | Meas. Burst Averaged Power (dBm) *1 | | Max.Poss. Power (dBm) | | Within 2 dB of Max. Poss. Power | SAR Tested | Note(s) |
|------------------|------------|------|-------------|----------------|----------------------------------|---------------|-------------------------------------|--------|-----------------------|--------|---------------------------------|------------|---------|
| | | | | | Chain0 | Chain1 | Chain0 | Chain1 | Chain0 | Chain1 | | | |
| 802.11a | W52 | 36 | 5180 | 6.0 Mbps | 10.54 | 10.51 | 10.57 | 10.53 | 11.50 | 11.50 | Yes | - | |
| | | 40 | 5200 | 6.0 Mbps | 10.61 | 10.43 | 10.63 | 10.45 | 11.50 | 11.50 | Yes | - | |
| | | 44 | 5220 | 6.0 Mbps | 10.24 | 10.50 | 10.26 | 10.53 | 11.50 | 11.50 | Yes | - | |
| | | 48 | 5240 | 6.0 Mbps | 10.30 | 10.43 | 10.32 | 10.45 | 11.50 | 11.50 | Yes | - | |
| | W53 | 52 | 5260 | 6.0 Mbps | 10.32 | 10.37 | 10.34 | 10.39 | 11.50 | 11.50 | Yes | - | |
| | | 56 | 5280 | 6.0 Mbps | 10.06 | 10.50 | 10.09 | 10.52 | 11.50 | 11.50 | Yes | - | |
| | | 60 | 5300 | 6.0 Mbps | 10.16 | 10.46 | 10.18 | 10.48 | 11.50 | 11.50 | Yes | - | |
| | 64 | 5320 | 6.0 Mbps | 10.22 | 10.40 | 10.24 | 10.43 | 11.50 | 11.50 | Yes | - | | |
| 802.11n (HT20) | W52 | 36 | 5180 | MCS-0 | 11.12 | 11.17 | 11.15 | 11.20 | 11.50 | 11.50 | Yes | - | |
| | | 40 | 5200 | MCS-0 | 11.15 | 11.11 | 11.17 | 11.13 | 11.50 | 11.50 | Yes | - | |
| | | 44 | 5220 | MCS-0 | 10.73 | 11.12 | 10.76 | 11.14 | 11.50 | 11.50 | Yes | - | |
| | | 48 | 5240 | MCS-0 | 10.83 | 11.11 | 10.85 | 11.13 | 11.50 | 11.50 | Yes | - | |
| | W53 | 52 | 5260 | MCS-0 | 10.91 | 11.04 | 10.93 | 11.06 | 11.50 | 11.50 | Yes | - | |
| | | 56 | 5280 | MCS-0 | 10.69 | 11.23 | 10.72 | 11.26 | 11.50 | 11.50 | Yes | - | |
| | | 60 | 5300 | MCS-0 | 10.78 | 11.16 | 10.81 | 11.18 | 11.50 | 11.50 | Yes | - | |
| | 64 | 5320 | MCS-0 | 10.85 | 11.12 | 10.88 | 11.14 | 11.50 | 11.50 | Yes | - | | |
| 802.11n (HT40) | W52 | 38 | 5190 | MCS-0 | 10.71 | 10.722 | 10.75 | 10.77 | 11.50 | 11.50 | Yes | - | |
| | | 46 | 5230 | MCS-0 | 10.45 | 10.717 | 10.50 | 10.77 | 11.50 | 11.50 | Yes | - | |
| | W53 | 54 | 5270 | MCS-0 | 10.56 | 10.61 | 10.61 | 10.66 | 11.50 | 11.50 | Yes | - | |
| | | 62 | 5310 | MCS-0 | 10.40 | 10.69 | 10.45 | 10.74 | 11.50 | 11.50 | Yes | - | |
| 802.11ac (VHT20) | W52 | 36 | 5180 | MCS-0 | 11.12 | 11.18 | 11.15 | 11.21 | 11.50 | 11.50 | Yes | - | |
| | | 40 | 5200 | MCS-0 | 11.18 | 11.10 | 11.20 | 11.13 | 11.50 | 11.50 | Yes | - | |
| | | 44 | 5220 | MCS-0 | 10.80 | 11.12 | 10.83 | 11.15 | 11.50 | 11.50 | Yes | - | |
| | | 48 | 5240 | MCS-0 | 10.87 | 11.08 | 10.89 | 11.11 | 11.50 | 11.50 | Yes | - | |
| | W53 | 52 | 5260 | MCS-0 | 10.94 | 11.04 | 10.96 | 11.07 | 11.50 | 11.50 | Yes | - | |
| | | 56 | 5280 | MCS-0 | 10.72 | 11.17 | 10.75 | 11.19 | 11.50 | 11.50 | Yes | - | |
| | | 60 | 5300 | MCS-0 | 10.80 | 11.15 | 10.83 | 11.17 | 11.50 | 11.50 | Yes | - | |
| | 64 | 5320 | MCS-0 | 10.85 | 11.12 | 10.88 | 11.15 | 11.50 | 11.50 | Yes | - | | |
| 802.11ac (VHT40) | W52 | 38 | 5190 | MCS-0 | 10.72 | 10.75 | 10.77 | 10.80 | 11.50 | 11.50 | Yes | - | |
| | | 46 | 5230 | MCS-0 | 10.47 | 10.72 | 10.52 | 10.77 | 11.50 | 11.50 | Yes | - | |
| | W53 | 54 | 5270 | MCS-0 | 10.57 | 10.61 | 10.62 | 10.66 | 11.50 | 11.50 | Yes | - | |
| | | 62 | 5310 | MCS-0 | 10.42 | 10.71 | 10.47 | 10.76 | 11.50 | 11.50 | Yes | - | |
| 802.11ac (VHT80) | W52 | 42 | 5210 | MCS-0 | 11.07 | 10.48 | 11.18 | 10.59 | 11.50 | 11.50 | Yes | - | |
| | W53 | 58 | 5290 | MCS-0 | 11.03 | 10.46 | 11.14 | 10.57 | 11.50 | 11.50 | Yes | Yes | ITC |

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 When the same maximum output power is specified for U-NII-1 and U-NII-2A bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), SAR is not required for U-NII-1 band for that configuration.

*3 SAR is not required for the remaining 802.11 transmission configurations (802.11a/n-HT20/n-HT40/ac-VHT20/ac-VHT40) when the highest reported SAR for the initial test configuration (802.11 ac-VHT80) is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), according to KDB 248227 D01.

Wi-Fi 5 GHz (W56: U-NII-2C Band)

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2023/12/6 | 22.5 deg.C | 46.1 %RH | Yu Inoue |
| 2023/12/12 | 22.5 deg.C | 59.1 %RH | Yu Inoue |
| 2023/12/13 | 21.3 deg.C | 57.7 %RH | Yu Inoue |

The Initial Test Configuration (ITC) : IEEE 802.11ac (VHT80) (*3)

| Mode | Freq. Band | Ch. | Freq. (MHz) | Data Rate /MCS | Meas. Frame Averaged Power (dBm) | | Meas. Burst Averaged Power (dBm) *1 | | Max.Poss. Power (dBm) | | Within 2 dB of Max. Poss. Power | SAR Tested | Note(s) |
|------------------|------------|-----|-------------|----------------|----------------------------------|--------------|--|--------|-----------------------|--------|---------------------------------|------------|---------|
| | | | | | Chain0 | Chain1 | Chain0 | Chain1 | Chain0 | Chain1 | | | |
| 802.11a | W56 | 100 | 5500 | 6.0Mbps | 9.86 | 11.36 | 9.88 | 11.39 | 11.50 | 11.50 | Yes | - | |
| | | 120 | 5600 | 6.0Mbps | 10.37 | 11.31 | 10.39 | 11.33 | 11.50 | 11.50 | Yes | - | |
| | | 140 | 5700 | 6.0Mbps | 10.87 | 11.32 | 10.89 | 11.35 | 11.50 | 11.50 | Yes | - | |
| 802.11n (HT20) | W56 | 100 | 5500 | MCS-0 | 9.58 | 11.13 | 9.61 | 11.16 | 11.50 | 11.50 | Yes | - | |
| | | 120 | 5600 | MCS-0 | 10.12 | 11.12 | 10.14 | 11.15 | 11.50 | 11.50 | Yes | - | |
| | | 140 | 5700 | MCS-0 | 10.61 | 11.09 | 10.63 | 11.12 | 11.50 | 11.50 | Yes | - | |
| 802.11n (HT40) | W56 | 102 | 5510 | MCS-0 | 10.06 | 10.71 | 10.11 | 10.76 | 11.50 | 11.50 | Yes | - | |
| | | 118 | 5590 | MCS-0 | 10.54 | 10.72 | 10.59 | 10.76 | 11.50 | 11.50 | Yes | - | |
| | | 134 | 5670 | MCS-0 | 10.87 | 10.77 | 10.91 | 10.82 | 11.50 | 11.50 | Yes | - | |
| 802.11ac (VHT20) | W56 | 100 | 5500 | MCS-0 | 9.56 | 11.15 | 9.59 | 11.17 | 11.50 | 11.50 | Yes | - | |
| | | 120 | 5600 | MCS-0 | 10.08 | 11.12 | 10.11 | 11.15 | 11.50 | 11.50 | Yes | - | |
| | | 140 | 5700 | MCS-0 | 10.48 | 11.08 | 10.51 | 11.10 | 11.50 | 11.50 | Yes | - | |
| 802.11ac (VHT40) | W56 | 102 | 5510 | MCS-0 | 10.14 | 10.70 | 10.19 | 10.74 | 11.50 | 11.50 | Yes | - | |
| | | 118 | 5590 | MCS-0 | 10.58 | 10.70 | 10.63 | 10.75 | 11.50 | 11.50 | Yes | - | |
| | | 134 | 5670 | MCS-0 | 10.89 | 10.76 | 10.94 | 10.81 | 11.50 | 11.50 | Yes | - | |
| 802.11ac (VHT80) | W56 | 106 | 5530 | MCS-0 | 9.93 | 10.37 | 10.04 | 10.48 | 11.50 | 11.50 | Yes | Yes | |
| | | 122 | 5610 | MCS-0 | 10.35 | 10.38 | 10.46 | 10.50 | 11.50 | 11.50 | Yes | Yes | ITC |

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

*3 SAR is not required for the remaining 802.11 transmission configurations (802.11 a/n-HT20/ n-HT40/ac-VHT20/ac-VHT40) when the highest reported SAR for the initial test configuration (802.11 ac-VHT80) is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), according to KDB 248227 D01.

Wi-Fi 5 GHz (W58: U-NII-3 Band)

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2023/12/6 | 22.5 deg.C | 46.1 %RH | Yu Inoue |
| 2023/12/14 | 22.9 deg.C | 49.1 %RH | Yu Inoue |

The Initial Test Configuration (ITC) : IEEE 802.11ac (VHT80) (*3)

| Mode | Freq. Band | Ch. | Freq. (MHz) | Data Rate /MCS | Meas. Frame Averaged Power (dBm) | | Meas. Burst Averaged Power (dBm) *1 | | Max.Poss. Power (dBm) | | Within 2 dB of Max. Poss. Power | SAR Tested | Note(s) |
|------------------|------------|-----|-------------|----------------|----------------------------------|--------------|--|--------|-----------------------|--------|---------------------------------|------------|---------|
| | | | | | Chain0 | Chain1 | Chain0 | Chain1 | Chain0 | Chain1 | | | |
| 802.11a | W58 | 149 | 5745 | 6.0Mbps | 11.28 | 11.07 | 11.30 | 11.10 | 11.50 | 11.50 | Yes | - | |
| | | 157 | 5785 | 6.0Mbps | 10.82 | 11.19 | 10.85 | 11.22 | 11.50 | 11.50 | Yes | - | |
| | | 165 | 5825 | 6.0Mbps | 11.07 | 11.07 | 11.09 | 11.09 | 11.50 | 11.50 | Yes | - | |
| 802.11n (HT20) | W58 | 149 | 5745 | MCS-0 | 10.72 | 10.75 | 10.75 | 10.78 | 11.50 | 11.50 | Yes | - | |
| | | 157 | 5785 | MCS-0 | 10.40 | 10.85 | 10.42 | 10.87 | 11.50 | 11.50 | Yes | - | |
| | | 165 | 5825 | MCS-0 | 10.52 | 10.75 | 10.54 | 10.77 | 11.50 | 11.50 | Yes | - | |
| 802.11n (HT40) | W58 | 151 | 5755 | MCS-0 | 11.29 | 11.31 | 11.34 | 11.36 | 11.50 | 11.50 | Yes | - | |
| | | 159 | 5795 | MCS-0 | 10.86 | 11.40 | 10.91 | 11.45 | 11.50 | 11.50 | Yes | - | |
| 802.11ac (VHT20) | W58 | 149 | 5745 | MCS-0 | 10.81 | 10.76 | 10.84 | 10.79 | 11.50 | 11.50 | Yes | - | |
| | | 157 | 5785 | MCS-0 | 10.30 | 10.87 | 10.33 | 10.90 | 11.50 | 11.50 | Yes | - | |
| | | 165 | 5825 | MCS-0 | 10.51 | 10.77 | 10.54 | 10.80 | 11.50 | 11.50 | Yes | - | |
| 802.11ac (VHT40) | W58 | 151 | 5755 | MCS-0 | 11.30 | 11.31 | 11.35 | 11.35 | 11.50 | 11.50 | Yes | - | |
| | | 159 | 5795 | MCS-0 | 10.89 | 11.39 | 10.94 | 11.44 | 11.50 | 11.50 | Yes | - | |
| 802.11ac (VHT80) | W58 | 155 | 5775 | MCS-0 | 11.15 | 10.90 | 11.26 | 11.01 | 11.50 | 11.50 | Yes | Yes | ITC |

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

*3 SAR is not required for the remaining 802.11 transmission configurations (802.11 a/n-HT20/n-HT40/ac-VHT20/ac-VHT40) when the highest reported SAR for the initial test configuration (802.11 ac-VHT80) is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), according to KDB 248227 D01.

Bluetooth

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2022/6/7 | 23.0 deg.C | 63.0 %RH | Yu Inoue |
| 2022/6/8 | 21.7 deg.C | 61.7 %RH | Yu Inoue |

Bluetooth BR

| Ch. | Freq. (MHz) | Packet Type | Meas. Frame Averaged Power (dBm) | Meas. Burst Averaged Power (dBm) *1 | Max. Poss. Power (dBm) | Within 2 dB of Max. Poss. Power | SAR Tested | Note(s) |
|-----|-------------|-------------|----------------------------------|-------------------------------------|------------------------|---------------------------------|------------|----------|
| 0 | 2402 | DH5 | 8.21 | 9.36 | 10.10 | Yes | Yes | - |
| 39 | 2441 | DH5 | 8.41 | 9.55 | 10.10 | Yes | Yes | - |
| 78 | 2480 | DH5 | 8.65 | 9.79 | 10.10 | Yes | Yes | Worst Ch |

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|----------------|
| 2021/11/15 | 22.4 deg.C | 48.6%RH | Shingo Onotora |
| 2022/6/3 | 21.7 deg.C | 51.3%RH | Yu Inoue |

Bluetooth LE

| Ch. | Freq. (MHz) | Packet Type | Meas. Frame Averaged Power (dBm) | Meas. Burst Averaged Power (dBm) *1 | Max. Poss. Power (dBm) | Within 2 dB of Max. Poss. Power | SAR Tested | Note(s) |
|-----|-------------|-------------|----------------------------------|-------------------------------------|------------------------|---------------------------------|------------|----------|
| 0 | 2402 | - | 7.51 | 9.41 | 10.10 | Yes | Yes | - |
| 19 | 2440 | - | 7.69 | 9.60 | 10.10 | Yes | Yes | - |
| 39 | 2480 | - | 7.92 | 9.82 | 10.10 | Yes | Yes | Worst Ch |

*1 Used for confirmation that the DUT's output power is within +0/-2 dB of the maximum tune-up tolerance limits (max. poss. power), since the maximum tune-up tolerance limits are defined as burst averaged values.

4. SAR Measurements

☒ <SAR Correction/Scaling>

According to KDB 447498 D01, KDB 248227 D01, and/or KDB 865664 D01, the maximum SAR values are determined by taking account of the following correction or scaling factors.

The maximum 1-g SAR and/or 10-g SAR values (reported SAR) are calculated by applying the Δ SAR positive correction for deviations of the tissue-equivalent liquid and the power scaling for the maximum duty factor and maximum possible power levels (maximum tune-up tolerance limit) to each measured 1-g SAR and/or 10-g SAR value:

$$\begin{aligned} \text{Reported SAR (W/kg)} &= \text{Measured SAR (W/kg)} * \Delta\text{SAR positive correction factor} \\ &\quad * \text{Duty cycle scaling factor} * \text{Tune-up scaling factor} \end{aligned}$$

where:

$$\Delta\text{SAR positive correction factor} = (100 - \Delta\text{SAR}^{*1}) / 100$$

$$\text{Duty cycle scaling factor} = \text{Max. possible duty cycle} / \text{Measured duty cycle used for the SAR measurement}$$

$$\text{Tune-up scaling factor} = \text{Max. possible power (mW)} / \text{Measured power used for the SAR measurement (mW)}$$

$$*1 \quad \Delta\text{SAR} (\%) = c_e * \Delta\epsilon_r + c_o * \Delta\sigma$$

<For 1-g SAR>

$$c_e = -7.854 * 10^{-4} f^3 + 9.402 * 10^{-3} f^2 - 2.742 * 10^{-2} f - 0.2026$$

$$c_o = 9.804 * 10^{-3} f^3 - 8.661 * 10^{-2} f^2 + 2.981 * 10^{-2} f + 0.7829$$

<For 10-g SAR>

$$c_e = 3.456 * 10^{-3} f^3 - 3.531 * 10^{-2} f^2 + 7.675 * 10^{-2} f - 0.1860$$

$$c_o = 4.479 * 10^{-3} f^3 - 1.586 * 10^{-2} f^2 - 0.1972 f + 0.7717$$

where:

c_e coefficient representing the sensitivity of SAR to permittivity

$\Delta\epsilon_r$ percent change in permittivity

c_o coefficient representing the sensitivity of SAR to conductivity

$\Delta\sigma$ percent change in conductivity

f frequency in GHz

A negative Δ SAR would translate to a lower measured SAR value than what would be measured if using dielectric properties equal to the target values.

A positive Δ SAR would translate to a higher measured SAR value than what would be measured if using dielectric properties equal to the target values.

SAR correction shall not be made when the Δ SAR has a positive sign to provide a conservative SAR value.

The SAR is only corrected when Δ SAR has a negative sign.

<SAR Test Reduction for Wi-Fi>

SAR test reduction for Wi-Fi is applied according to KDB 248227 D01.

For 2.4 GHz 802.11g/n OFDM configurations

SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively).

For U-NII-1 (W52) and U-NII-2A (W53) Bands

When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg or 3 W/kg (1-g or 10-g respectively), SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

4.1. SAR Measurement Results

<Body-Worn SAR>

Wi-Fi 2.4 GHz

(Chain 0)

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2024/7/2 | 20.5 deg.C | 54.5 %RH | Yu Inoue |

| Mode | Ch. | Freq. (MHz) | Pos. | Dis. (mm) | Max. Poss. Power (dBm) | Meas. Power (dBm) | Max. Poss. Duty Cycle (%) | Meas. Duty Cycle (%) | Meas. 1-g SAR (W/kg) | Reported 1-g SAR (W/kg) | Liquid Temp. (deg. C) | Plot No. |
|--|-----|-------------|-------------|-----------|------------------------|-------------------|---------------------------|----------------------|----------------------|-------------------------|-----------------------|----------|
| Step 1: Worst Position Check | | | | | | | | | | | | |
| 802.11b | 11 | 2462 | Front-Right | 0 | 9.50 | 8.92 | 100.00 | 99.90 | 0.004 | 0.005 | 21.3 | - |
| | | | Back | | 9.50 | 8.92 | 100.00 | 99.90 | 0.001 | 0.001 | 21.0 | - |
| | | | Top-Left | | 9.50 | 8.92 | 100.00 | 99.90 | 0.042 | 0.048 | 20.7 | - |
| | | | Top-Right | | 9.50 | 8.92 | 100.00 | 99.90 | 0.003 | 0.004 | 21.1 | - |
| Step 2: Worst Channel Check (for Step 1) | | | | | | | | | | | | |
| 802.11b | 1 | 2412 | Top-Left | 0 | 9.50 | 8.74 | 100.00 | 99.90 | 0.054 | 0.065 | 20.5 | 1 |
| | 6 | 2437 | | | 9.50 | 8.73 | 100.00 | 99.90 | 0.049 | 0.059 | 20.5 | - |

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

(Chain 1)

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2024/7/3 | 20.6 deg.C | 57.1 %RH | Yu Inoue |

| Mode | Ch. | Freq. (MHz) | Pos. | Dis. (mm) | Max. Poss. Power (dBm) | Meas. Power (dBm) | Max. Poss. Duty Cycle (%) | Meas. Duty Cycle (%) | Meas. 1-g SAR (W/kg) | Reported 1-g SAR (W/kg) | Liquid Temp. (deg. C) | Plot No. |
|--|-----|-------------|-------------|-----------|------------------------|-------------------|---------------------------|----------------------|----------------------|-------------------------|-----------------------|----------|
| Step 1: Worst Position Check | | | | | | | | | | | | |
| 802.11b | 11 | 2462 | Front-Right | 0 | 9.50 | 8.86 | 100.00 | 99.90 | 0.013 | 0.014 | 20.1 | - |
| | | | Back | | 9.50 | 8.86 | 100.00 | 99.90 | 0.004 | 0.005 | 20.3 | - |
| | | | Top-Left | | 9.50 | 8.86 | 100.00 | 99.90 | 0.021 | 0.024 | 20.1 | - |
| | | | Top-Right | | 9.50 | 8.86 | 100.00 | 99.90 | 0.215 | 0.249 | 20.1 | 2 |
| Step 2: Worst Channel Check (for Step 1) | | | | | | | | | | | | |
| 802.11b | 1 | 2412 | Top-Right | 0 | 9.50 | 8.50 | 100.00 | 99.90 | 0.129 | 0.162 | 19.8 | - |
| | 6 | 2437 | | | 9.50 | 8.64 | 100.00 | 99.90 | 0.179 | 0.218 | 19.7 | - |

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

Wi-Fi 5 GHz (W53: U-NII-2A Band)

(Chain 0)

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|----------------|
| 2024/6/19 | 23.3 deg.C | 57.1 %RH | Yu Inoue |
| 2024/6/20 | 22.3 deg.C | 62.5 %RH | Shingo Onotora |

| Mode | Ch. | Freq. (MHz) | Pos. | Dis. (mm) | Max. Poss. Power (dBm) | Meas. Power (dBm) | Max. Poss. Duty Cycle (%) | Meas. Duty Cycle (%) | Meas. 1-g SAR (W/kg) | Reported 1-g SAR (W/kg) | Liquid Temp. (deg. C) | Plot No. |
|------------------|-----|-------------|-------------|-----------|------------------------|-------------------|---------------------------|----------------------|----------------------|-------------------------|-----------------------|----------|
| 802.11ac (VHT80) | 58 | 5290 | Front-Right | 0 | 11.50 | 11.14 | 100.00 | 97.46 | 0.006 | 0.006 | 21.7 | - |
| | | | Back | | 11.50 | 11.14 | 100.00 | 97.46 | 0.008 | 0.009 | 21.7 | - |
| | | | Top-Left | | 11.50 | 11.14 | 100.00 | 97.46 | 0.054 | 0.061 | 22.1 | 3 |
| | | | Top-Right | | 11.50 | 11.14 | 100.00 | 97.46 | 0.011 | 0.012 | 21.9 | - |

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

(Chain 1)

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2024/6/26 | 22.1 deg.C | 60.3 %RH | Yu Inoue |

| Mode | Ch. | Freq. (MHz) | Pos. | Dis. (mm) | Max. Poss. Power (dBm) | Meas. Power (dBm) | Max. Poss. Duty Cycle (%) | Meas. Duty Cycle (%) | Meas. 1-g SAR (W/kg) | Reported 1-g SAR (W/kg) | Liquid Temp. (deg. C) | Plot No. |
|------------------|-----|-------------|-------------|-----------|------------------------|-------------------|---------------------------|----------------------|----------------------|-------------------------|-----------------------|----------|
| 802.11ac (VHT80) | 58 | 5290 | Front-Right | 0 | 11.50 | 10.57 | 100.00 | 97.46 | 0.00004 | 0.00005 | 20.9 | - |
| | | | Back | | 11.50 | 10.57 | 100.00 | 97.46 | 0.054 | 0.068 | 21.1 | 4 |
| | | | Top-Left | | 11.50 | 10.57 | 100.00 | 97.46 | 0.0002 | 0.0003 | 21.2 | - |
| | | | Top-Right | | 11.50 | 10.57 | 100.00 | 97.46 | 0.001 | 0.001 | 21.3 | - |

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

Wi-Fi 5 GHz (W56: U-NII-2C Band)

(Chain 0)

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2024/7/4 | 19.4 deg.C | 58.0 %RH | Yu Inoue |

| Mode | Ch. | Freq. (MHz) | Pos. | Dis. (mm) | Max. Poss. Power (dBm) | Meas. Power (dBm) | Max. Poss. Duty Cycle (%) | Meas. Duty Cycle (%) | Meas. 1-g SAR (W/kg) | Reported 1-g SAR (W/kg) | Liquid Temp. (deg. C) | Plot No. |
|--|-----|-------------|-------------|-----------|------------------------|-------------------|---------------------------|----------------------|----------------------|-------------------------|-----------------------|----------|
| Step 1: Worst Position Check | | | | | | | | | | | | |
| 802.11ac (VHT80) | 122 | 5610 | Front-Right | 0 | 11.50 | 10.46 | 100.00 | 97.46 | 0.007 | 0.009 | 19.2 | - |
| | | | Back | | 11.50 | 10.46 | 100.00 | 97.46 | 0.016 | 0.021 | 19.3 | - |
| | | | Top-Left | | 11.50 | 10.46 | 100.00 | 97.46 | 0.098 | 0.128 | 18.7 | - |
| | | | Top-Right | | 11.50 | 10.46 | 100.00 | 97.46 | 0.019 | 0.024 | 18.9 | - |
| Step 2: Worst Channel Check (for Step 1) | | | | | | | | | | | | |
| 802.11ac (VHT80) | 106 | 5530 | Top-Left | 0 | 11.50 | 10.04 | 100.00 | 97.46 | 0.103 | 0.148 | 18.7 | 5 |

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

(Chain 1)

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2024/7/5 | 20.0 deg.C | 60.5 %RH | Yu Inoue |

| Mode | Ch. | Freq. (MHz) | Pos. | Dis. (mm) | Max. Poss. Power (dBm) | Meas. Power (dBm) | Max. Poss. Duty Cycle (%) | Meas. Duty Cycle (%) | Meas. 1-g SAR (W/kg) | Reported 1-g SAR (W/kg) | Liquid Temp. (deg. C) | Plot No. |
|--|-----|-------------|-------------|-----------|------------------------|-------------------|---------------------------|----------------------|----------------------|-------------------------|-----------------------|----------|
| Step 1: Worst Position Check | | | | | | | | | | | | |
| 802.11ac (VHT80) | 122 | 5610 | Front-Right | 0 | 11.50 | 10.50 | 100.00 | 97.46 | 0.008 | 0.010 | 19.3 | - |
| | | | Back | | 11.50 | 10.50 | 100.00 | 97.46 | 0.032 | 0.041 | 18.8 | - |
| | | | Top-Left | | 11.50 | 10.50 | 100.00 | 97.46 | 0.017 | 0.021 | 18.7 | - |
| | | | Top-Right | | 11.50 | 10.50 | 100.00 | 97.46 | 0.017 | 0.022 | 18.7 | - |
| Step 2: Worst Channel Check (for Step 1) | | | | | | | | | | | | |
| 802.11ac (VHT80) | 106 | 5530 | Back | 0 | 11.50 | 10.48 | 100.00 | 97.46 | 0.037 | 0.048 | 19.1 | 6 |

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

Wi-Fi 5 GHz (W58: U-NII-3 Band)

(Chain 0)

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2024/6/28 | 23.1 deg.C | 62.0 %RH | Yu Inoue |

| Mode | Ch. | Freq. (MHz) | Pos. | Dis. (mm) | Max. Poss. Power (dBm) | Meas. Power (dBm) | Max. Poss. Duty Cycle (%) | Meas. Duty Cycle (%) | Meas. 1-g SAR (W/kg) | Reported 1-g SAR (W/kg) | Liquid Temp. (deg. C) | Plot No. |
|------------------|-----|-------------|-------------|-----------|------------------------|-------------------|---------------------------|----------------------|----------------------|-------------------------|-----------------------|----------|
| 802.11ac (VHT80) | 155 | 5775 | Front-Right | 0 | 11.50 | 11.26 | 100.00 | 97.46 | 0.00001 | 0.00001 | 21.1 | - |
| | | | Back | | 11.50 | 11.26 | 100.00 | 97.46 | 0.0001 | 0.0001 | 21.1 | - |
| | | | Top-Left | | 11.50 | 11.26 | 100.00 | 97.46 | 0.063 | 0.069 | 21.3 | 7 |
| | | | Top-Right | | 11.50 | 11.26 | 100.00 | 97.46 | 0.010 | 0.011 | 21.2 | - |

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

(Chain 1)

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2024/6/28 | 22.5 deg.C | 58.0 %RH | Yu Inoue |

| Mode | Ch. | Freq. (MHz) | Pos. | Dis. (mm) | Max. Poss. Power (dBm) | Meas. Power (dBm) | Max. Poss. Duty Cycle (%) | Meas. Duty Cycle (%) | Meas. 1-g SAR (W/kg) | Reported 1-g SAR (W/kg) | Liquid Temp. (deg. C) | Plot No. |
|------------------|-----|-------------|-------------|-----------|------------------------|-------------------|---------------------------|----------------------|----------------------|-------------------------|-----------------------|----------|
| 802.11ac (VHT80) | 155 | 5775 | Front-Right | 0 | 11.50 | 11.01 | 100.00 | 97.46 | 0.00002 | 0.00003 | 21.2 | - |
| | | | Back | | 11.50 | 11.01 | 100.00 | 97.46 | 0.070 | 0.080 | 21.2 | 8 |
| | | | Top-Left | | 11.50 | 11.01 | 100.00 | 97.46 | 0.008 | 0.009 | 21.1 | - |
| | | | Top-Right | | 11.50 | 11.01 | 100.00 | 97.46 | 0.047 | 0.054 | 21.2 | - |

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where:

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

Bluetooth

| Date of measurement | Ambient temperature | Relative humidity | Measured by |
|---------------------|---------------------|-------------------|-------------|
| 2024/7/1 | 22.6 deg.C | 62.1 %RH | Yu Inoue |

| Mode | Ch. | Freq. (MHz) | Pos. | Dis. (mm) | Max. Poss. Power (dBm) | Meas. Power (dBm) | Max. Poss. Duty Cycle (%) | Meas. Duty Cycle (%) | Meas. 1-g SAR (W/kg) | Reported 1-g SAR (W/kg) | Liquid Temp. (deg. C) | Plot No. |
|--|-----|-------------|-------------|-----------|------------------------|-------------------|---------------------------|----------------------|----------------------|-------------------------|-----------------------|----------|
| Step 1: Worst Position Check | | | | | | | | | | | | |
| BR (DH5) | 78 | 2480 | Front-Right | 0 | 10.10 | 9.79 | 83.33 | 76.83 | 0.004 | 0.004 | 21.3 | - |
| | | | Back | | 10.10 | 9.79 | 83.33 | 76.83 | 0.003 | 0.004 | 21.1 | - |
| | | | Top-Left | | 10.10 | 9.79 | 83.33 | 76.83 | 0.026 | 0.030 | 21.0 | - |
| | | | Top-Right | | 10.10 | 9.79 | 83.33 | 76.83 | 0.003 | 0.004 | 21.0 | - |
| Step 2: Worst Channel Check (for Step 1) | | | | | | | | | | | | |
| BR (DH5) | 0 | 2402 | Top-Left | 0 | 10.10 | 9.36 | 83.33 | 76.83 | 0.040 | 0.051 | 21.0 | - |
| | 39 | 2441 | | | 10.10 | 9.55 | 83.33 | 76.83 | 0.034 | 0.042 | 20.8 | - |
| Step 3: Worst Mode Check (for Step 1) | | | | | | | | | | | | |
| LE | 0 | 2402 | Top-Left | 0 | 10.10 | 9.41 | 100.00 | 64.47 | 0.034 | 0.061 | 20.6 | 9 |
| | 19 | 2440 | | | 10.10 | 9.60 | 100.00 | 64.47 | 0.030 | 0.053 | 20.6 | - |
| | 39 | 2480 | | | 10.10 | 9.82 | 100.00 | 64.47 | 0.024 | 0.039 | 20.6 | - |

*1 The burst averaged power values are used for power scaling since the maximum tune-up tolerance limits are defined as burst averaged values.

*2 Reported SAR (W/kg) = Measured SAR (W/kg) * Duty cycle scaling factor * Tune-up scaling factor

where;

Duty cycle scaling factor = Max. possible duty cycle (%) / Measured duty cycle used for the SAR measurement (%)

Tune-up scaling factor = Max. possible power (mW) (* equal to 100% duty cycle) / Measured power used for the SAR measurement (mW)

5. Simultaneous Transmission SAR evaluation

Simultaneous transmission SAR evaluation is determined according to KDB 447498 D01, Evaluation by summation of Reported SAR values, as the reference method.

- 1) If Reported SAR summation > 1.6W/kg, SAR test exclusion is determined by the SPLSR.
- 2) $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{minimum separation distance})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$ where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR location in the zoom scan.
- 3) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

| RF Exposure Conditions | Test Position | Highest Reported 1g-SAR (W/kg) | | | | | Σ 1-g SAR (W/kg) | | |
|------------------------|---------------|--|--|--|--|--------------------------------|-------------------------|---------|-------------|
| | | (1) Wi-Fi 2.4 GHz Chain 0 (Measured) | (2) Wi-Fi 2.4 GHz Chain 1 (Measured) | (3) Wi-Fi 5 GHz Chain 0 (Measured) | (4) Wi-Fi 5 GHz Chain 1 (Measured) | (5) Bluetooth (Measured) | (1)+(2) | (3)+(4) | (3)+(4)+(5) |
| Body-Worn | Front-Right | 0.005 | 0.014 | 0.009 | 0.010 | 0.004 | 0.019 | 0.019 | 0.023 |
| | Back | 0.001 | 0.005 | 0.021 | 0.080 | 0.004 | 0.006 | 0.101 | 0.105 |
| | Top-Left | 0.065 | 0.024 | 0.148 | 0.021 | 0.061 | 0.089 | 0.169 | 0.230 |
| | Top-Right | 0.004 | 0.249 | 0.024 | 0.054 | 0.004 | 0.253 | 0.078 | 0.082 |

Appendix A. Plots of SAR Measurement

Please see the following page(s).

Plot No. 1

Date: 2024/07/02

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Wi-Fi 2.4GHz (Chain0_1ch)_Body-Worn_Top-Left_0mm**DUT : Type1VY (* installed in Digital Camera 1VY010)**

Communication System: UID 0, Wi-Fi_802.11b_1Mbps (0);

Communication System Band: 2.4GHz; Frequency: 2412 MHz;

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.786$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(7.92, 7.92, 7.92) @ 2412 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Wi-Fi 2.4GHz (Chain0_1ch)_Body-Worn_Top-Left_0mm**Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm**

Maximum value of SAR (measured) = 0.0815 W/kg

Configuration/Wi-Fi 2.4GHz (Chain0_1ch)_Body-Worn_Top-Left_0mm**Zoom Scan (7x8x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm**

Reference Value = 6.973 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.030 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.0854 W/kg

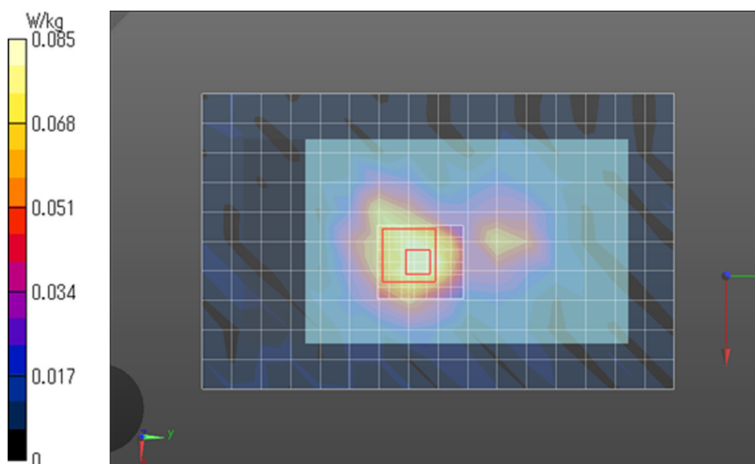

Plot No. 2

Date: 2024/07/03

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Wi-Fi 2.4GHz (Chain1_11ch)_Body-Worn_Top-Right_0mm**DUT : Type1VY (* installed in Digital Camera 1VY010)**

Communication System: UID 0, Wi-Fi_802.11b_1Mbps (0);

Communication System Band: 2.4GHz; Frequency: 2462 MHz;

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.886$ S/m; $\epsilon_r = 39.753$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(7.92, 7.92, 7.92) @ 2462 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Wi-Fi 2.4GHz (Chain1_11ch)_Body-Worn_Top-Right_0mm**Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm**

Maximum value of SAR (measured) = 0.304 W/kg

Configuration/Wi-Fi 2.4GHz (Chain1_11ch)_Body-Worn_Top-Right_0mm**Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm**

Reference Value = 13.17 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.073 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 0.455 W/kg

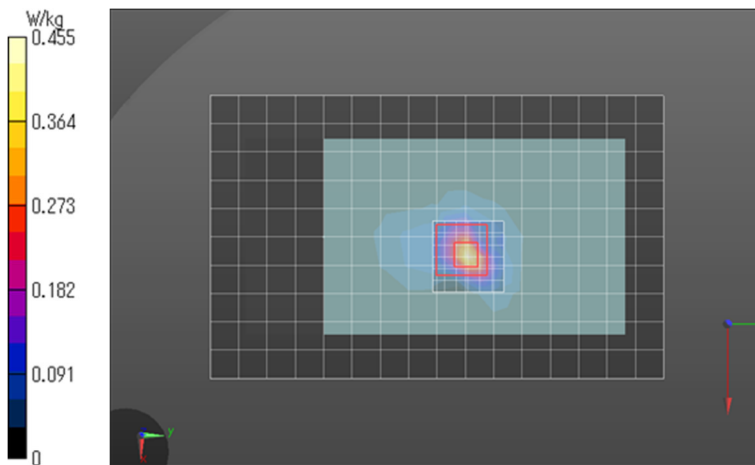

Plot No. 3

Date: 2024/06/20

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Wi-Fi 5GHz (Chain0_58ch)_Body-Worn_Top-Left_0mm**DUT : Type1VY (* installed in Digital Camera 1VY010)**

Communication System: UID 0, Wi-Fi_802.11ac_VHT80_MCS0 (0);

Communication System Band: 5GHz; Frequency: 5290 MHz;

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.614$ S/m; $\epsilon_r = 35.652$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(5.46, 5.46, 5.46) @ 5290 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Wi-Fi 5GHz (Chain0_58ch)_Body-Worn_Top-Left_0mm**Area Scan (12x19x1): Measurement grid: dx=10mm, dy=10mm**

Maximum value of SAR (measured) = 0.156 W/kg

Configuration/Wi-Fi 5GHz (Chain0_58ch)_Body-Worn_Top-Left_0mm**Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm**

Reference Value = 6.198 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.016 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 0.170 W/kg

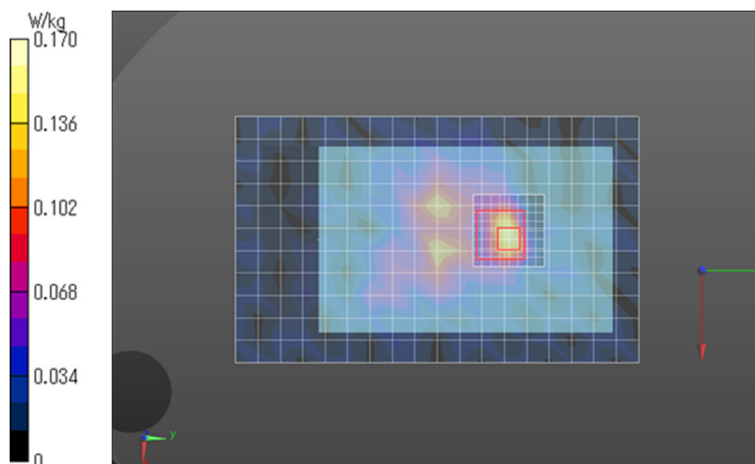

Plot No. 4

Date: 2024/06/26

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Wi-Fi 5GHz (Chain1_58ch)_Body-Worn_Back_0mm**DUT : Type1VY (* installed in Digital Camera 1VY010)**

Communication System: UID 0, Wi-Fi_802.11ac_VHT80_MCS0 (0)

Communication System Band: 5GHz; Frequency: 5290 MHz

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.796$ S/m; $\epsilon_r = 35.407$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(5.46, 5.46, 5.46) @ 5290 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Wi-Fi 5GHz (Chain1_58ch)_Body-Worn_Back_0mm**Area Scan (17x15x1): Measurement grid: dx=10mm, dy=10mm**

Maximum value of SAR (measured) = 0.128 W/kg

Configuration/Wi-Fi 5GHz (Chain1_58ch)_Body-Worn_Back_0mm**Zoom Scan (10x10x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm**

Reference Value = 5.713 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.015 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 0.138 W/kg

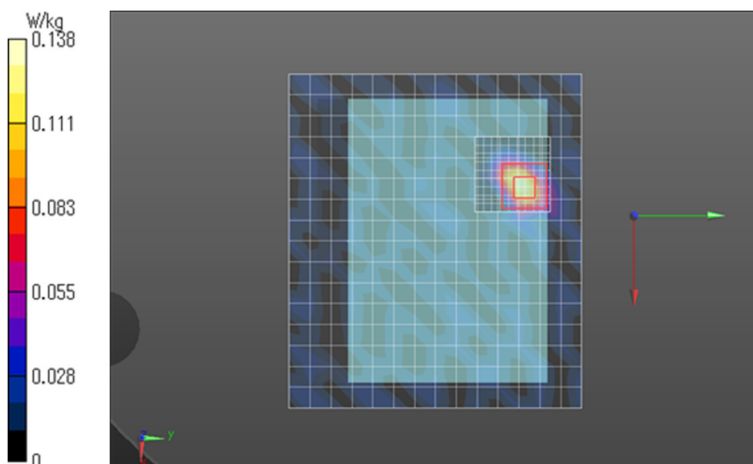

Plot No. 5

Date: 2024/07/04

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Wi-Fi 5GHz (Chain0_106ch)_Body-Worn_Top-Left_0mm**DUT : Type1VY (* installed in Digital Camera 1VY010)**

Communication System: UID 0, Wi-Fi_802.11ac_VHT80_MCS0 (0);

Communication System Band: 5GHz; Frequency: 5530 MHz;

Medium parameters used: $f = 5530$ MHz; $\sigma = 4.822$ S/m; $\epsilon_r = 34.177$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(4.97, 4.97, 4.97) @ 5530 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Wi-Fi 5GHz (Chain0_106ch)_Body-Worn_Top-Left_0mm**Area Scan (12x19x1): Measurement grid: dx=10mm, dy=10mm**

Maximum value of SAR (measured) = 0.263 W/kg

Configuration/Wi-Fi 5GHz (Chain0_106ch)_Body-Worn_Top-Left_0mm**Zoom Scan (10x10x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm**

Reference Value = 7.835 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.033 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 0.278 W/kg

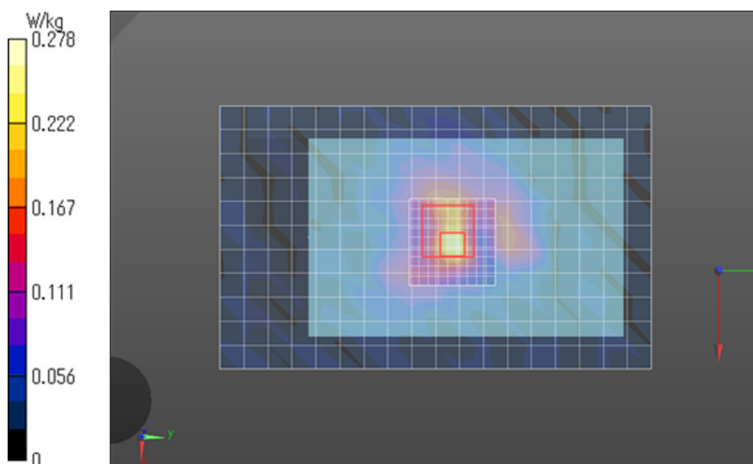

Plot No. 6

Date: 2024/07/05

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Wi-Fi 5GHz (Chain1_106ch)_Body-Worn_Back_0mm**DUT : Type1VY (* installed in Digital Camera 1VY010)**

Communication System: UID 0, Wi-Fi_802.11ac_VHT80_MCS0 (0);

Communication System Band: 5GHz; Frequency: 5530 MHz;

Medium parameters used: $f = 5530$ MHz; $\sigma = 4.989$ S/m; $\epsilon_r = 35.969$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(4.97, 4.97, 4.97) @ 5530 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Wi-Fi 5GHz (Chain1_106ch)_Body-Worn_Back_0mm**Area Scan (17x15x1): Measurement grid: dx=10mm, dy=10mm**

Maximum value of SAR (measured) = 0.112 W/kg

Configuration/Wi-Fi 5GHz (Chain1_106ch)_Body-Worn_Back_0mm**Zoom Scan (11x11x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm**

Reference Value = 5.220 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.249 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.010 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 38%

Maximum value of SAR (measured) = 0.119 W/kg

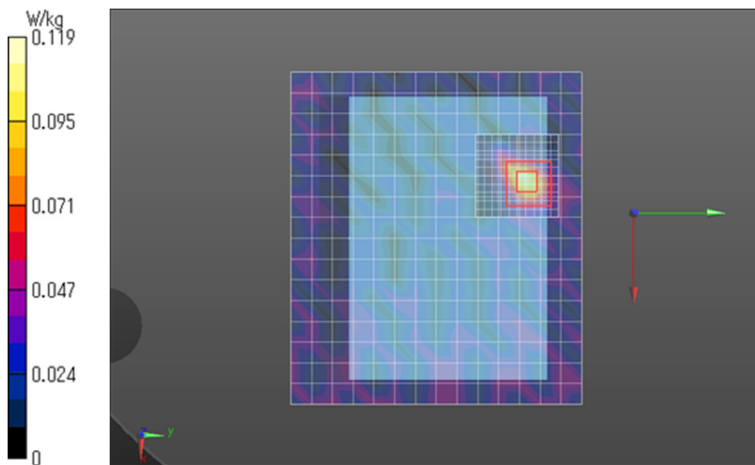

Plot No. 7

Date: 2024/06/28

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Wi-Fi 5GHz (Chain0_155ch)_Body-Worn_Top-Left_0mm**DUT : Type1VY (* installed in Digital Camera 1VY010)**

Communication System: UID 0, Wi-Fi_802.11ac_VHT80_MCS0 (0);

Communication System Band: 5GHz; Frequency: 5775 MHz;

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.08$ S/m; $\epsilon_r = 35.856$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(4.85, 4.85, 4.85) @ 5775 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Wi-Fi 5GHz (Chain0_155ch)_Body-Worn_Top-Left_0mm**Area Scan (12x19x1): Measurement grid: dx=10mm, dy=10mm**

Maximum value of SAR (measured) = 0.176 W/kg

Configuration/Wi-Fi 5GHz (Chain0_155ch)_Body-Worn_Top-Left_0mm**Zoom Scan (10x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm**

Reference Value = 6.167 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.300 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.017 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 0.181 W/kg

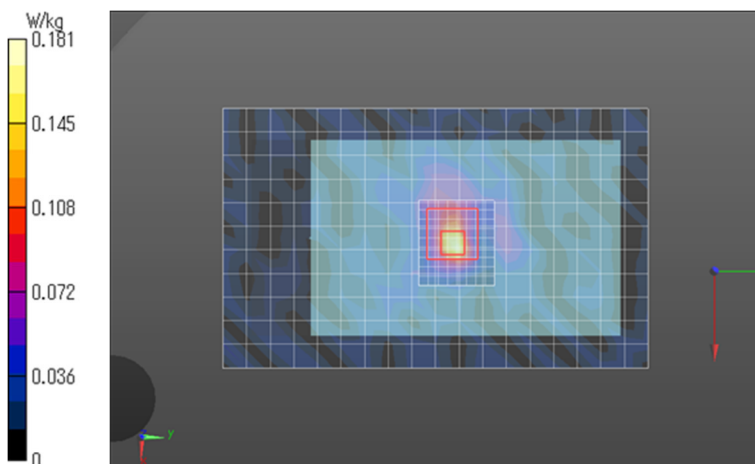

Plot No. 8

Date: 2024/06/28

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Wi-Fi 5GHz (Chain1_155ch)_Body-Worn_Back_0mm**DUT : Type1VY (* installed in Digital Camera 1VY010)**

Communication System: UID 0, Wi-Fi_802.11ac_VHT80_MCS0 (0);

Communication System Band: 5GHz; Frequency: 5775 MHz;

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.08$ S/m; $\epsilon_r = 35.856$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(4.85, 4.85, 4.85) @ 5775 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Wi-Fi 5GHz (Chain1_155ch)_Body-Worn_Back_0mm**Area Scan (17x15x1): Measurement grid: dx=10mm, dy=10mm**

Maximum value of SAR (measured) = 0.181 W/kg

Configuration/Wi-Fi 5GHz (Chain1_155ch)_Body-Worn_Back_0mm**Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm**

Reference Value = 6.538 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.369 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.018 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 43.1%

Maximum value of SAR (measured) = 0.221 W/kg

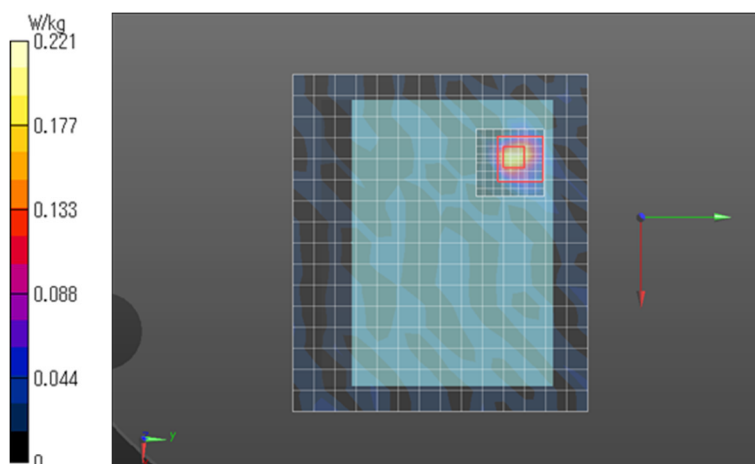

Plot No. 9

Date: 2024/07/01

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Bluetooth LE (0ch)_Body-Worn_Top-Left_0mm**DUT : Type1VY (* installed in Digital Camera 1VY010)**

Communication System: UID 0, Bluetooth LE (0);

Communication System Band: Bluetooth; Frequency: 2402 MHz;

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.822$ S/m; $\epsilon_r = 40.756$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(7.92, 7.92, 7.92) @ 2402 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Bluetooth LE (0ch)_Body-Worn_Top-Left_0mm**Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm**

Maximum value of SAR (measured) = 0.0522 W/kg

Configuration/Bluetooth LE (0ch)_Body-Worn_Top-Left_0mm**Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm**

Reference Value = 5.195 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.019 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 0.0544 W/kg

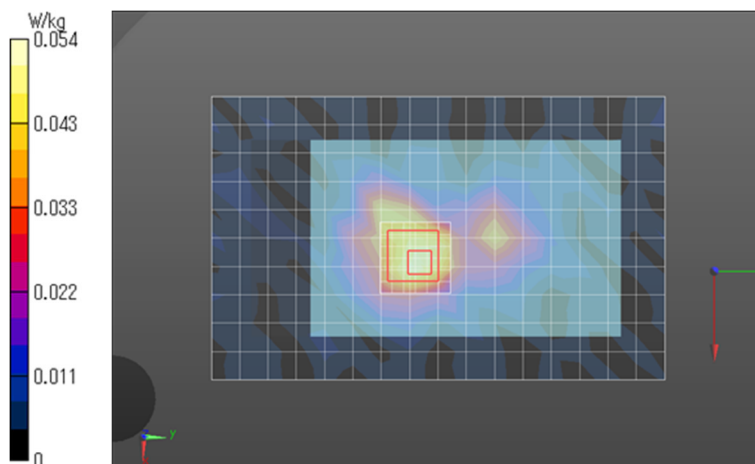

Appendix B. Plots of System Check

Please see the following page(s).

Date: 2024/07/01

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Validation_D2450_HSL (1)

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 894

Communication System: UID 0, CW (0); Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.865$ S/m; $\epsilon_r = 40.666$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(7.92, 7.92, 7.92) @ 2450 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**System Performance Check at Frequencies above 2 GHz/Validation D2450 HSL/
Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm**

Maximum value of SAR (measured) = 19.5 W/kg

**System Performance Check at Frequencies above 2 GHz/Validation D2450 HSL/
Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm**

Reference Value = 115.5 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 27.7 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.13 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 22.0 W/kg

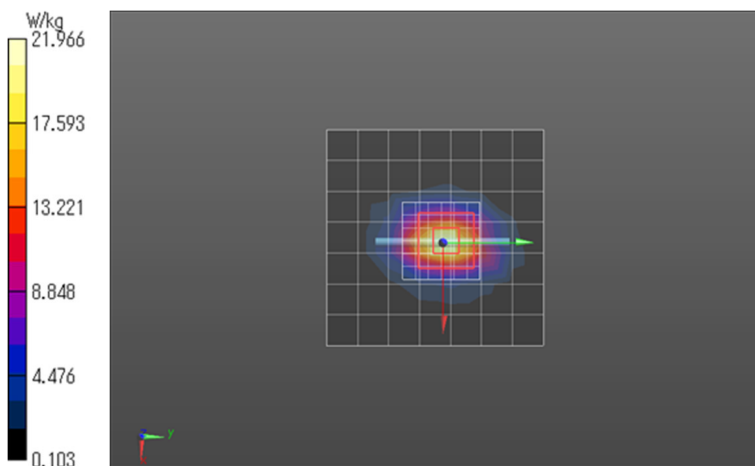

Date: 2024/07/02

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Validation_D2450_HSL (2)

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 894

Communication System: UID 0, CW (0); Frequency: 2450 MHz;

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 40.719$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(7.92, 7.92, 7.92) @ 2450 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**System Performance Check at Frequencies above 2 GHz/Validation D2450 HSL/
Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm**

Maximum value of SAR (measured) = 18.8 W/kg

**System Performance Check at Frequencies above 2 GHz/Validation D2450 HSL/
Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm**

Reference Value = 113.0 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.3 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 22.5 W/kg

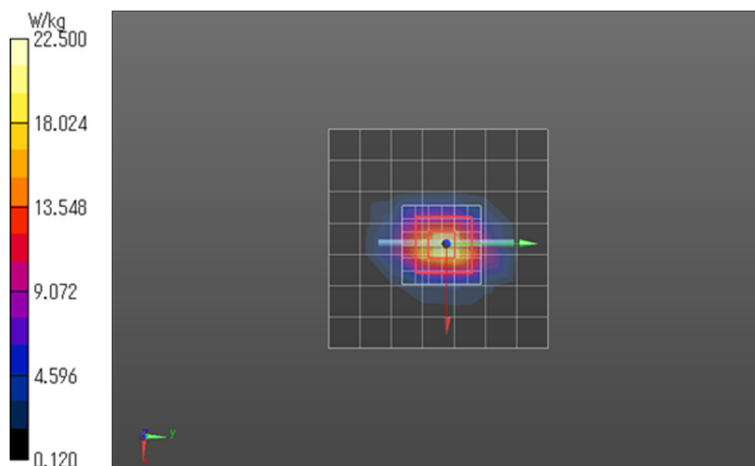

Date: 2024/07/03

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Validation_D2450_HSL (3)

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 894

Communication System: UID 0, CW (0); Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.875$ S/m; $\epsilon_r = 39.771$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(7.92, 7.92, 7.92) @ 2450 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**System Performance Check at Frequencies above 2 GHz/Validation D2450 HSL/
Area Scan (8x8x1): Measurement grid: dx=12mm, dy=12mm**

Maximum value of SAR (measured) = 19.3 W/kg

**System Performance Check at Frequencies above 2 GHz/Validation D2450 HSL/
Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm**

Reference Value = 113.1 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.14 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 22.2 W/kg

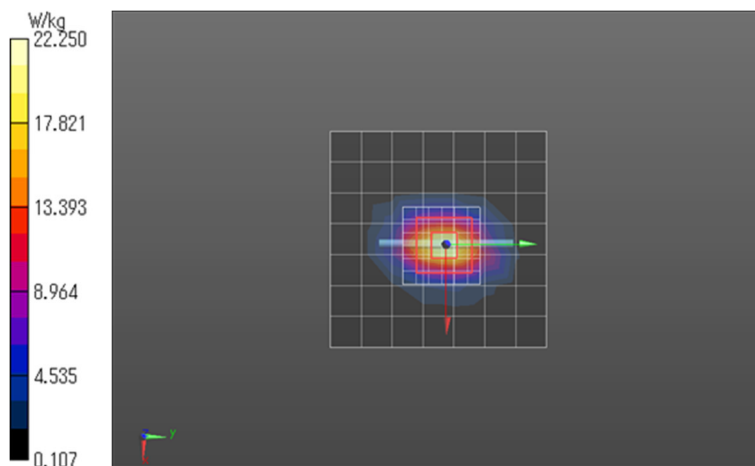

Date: 2024/06/19

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Validation_D5300_HSL (1)

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1039

Communication System: UID 0, CW (0); Frequency: 5300 MHz

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.686$ S/m; $\epsilon_r = 35.704$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(5.46, 5.46, 5.46) @ 5300 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

System Performance Check at Frequencies above 5 GHz/Validation D5300 HSL

Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 16.7 W/kg

System Performance Check at Frequencies above 5 GHz/Validation D5300 HSL

Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 71.67 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 32.3 W/kg

SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.28 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 19.7 W/kg

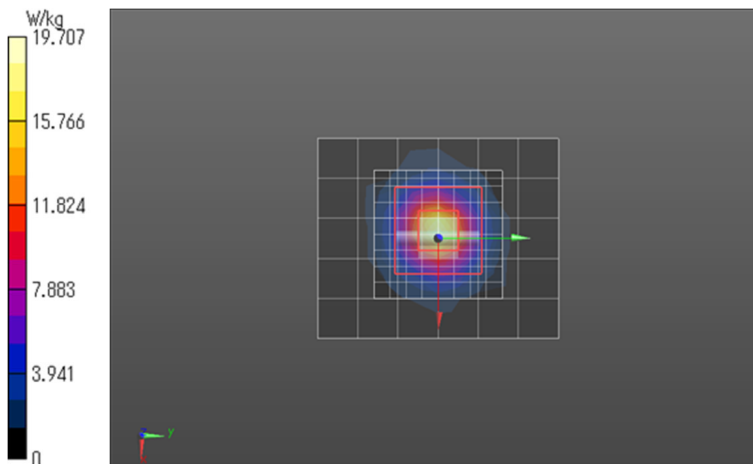

Date: 2024/06/20

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Validation_D5300_HSL (2)

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1039

Communication System: UID 0, CW (0); Frequency: 5300 MHz

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.617$ S/m; $\epsilon_r = 35.664$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(5.46, 5.46, 5.46) @ 5300 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

System Performance Check at Frequencies above 5 GHz/Validation D5300 HSL/ Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 16.5 W/kg

System Performance Check at Frequencies above 5 GHz/Validation D5300 HSL/ Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 67.89 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 30.2 W/kg

SAR(1 g) = 7.39 W/kg; SAR(10 g) = 2.12 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 18.6 W/kg

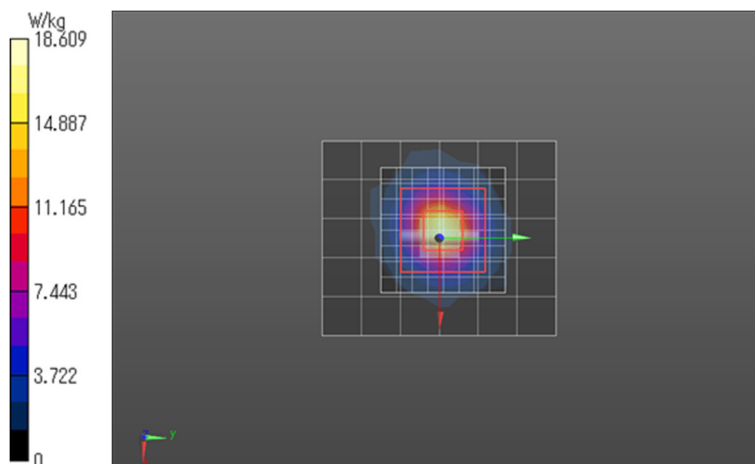

Date: 2024/06/26

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Validation_D5300_HSL (3)

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1039

Communication System: UID 0, CW (0); Frequency: 5300 MHz

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.847$ S/m; $\epsilon_r = 35.329$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(5.46, 5.46, 5.46) @ 5300 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**System Performance Check at Frequencies above 5 GHz/Validation D5300 HSL/
Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm**

Maximum value of SAR (measured) = 17.1 W/kg

**System Performance Check at Frequencies above 5 GHz/Validation D5300 HSL/
Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm**

Reference Value = 69.29 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 32.8 W/kg

SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.19 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 19.8 W/kg

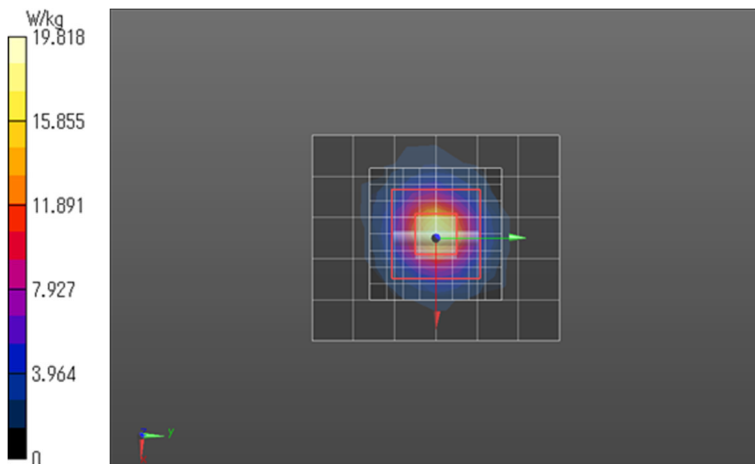

Date: 2024/07/04

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Validation_D5600_HSL (1)

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1039

Communication System: UID 0, CW (0); Frequency: 5600 MHz

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.886$ S/m; $\epsilon_r = 33.985$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(4.82, 4.82, 4.82) @ 5600 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**System Performance Check at Frequencies above 5 GHz/Validation D5600 HSL/
Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm**

Maximum value of SAR (measured) = 18.1 W/kg

**System Performance Check at Frequencies above 5 GHz/Validation D5600 HSL/
Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm**

Reference Value = 73.15 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 38.5 W/kg

SAR(1 g) = 8.31 W/kg; SAR(10 g) = 2.34 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 21.9 W/kg

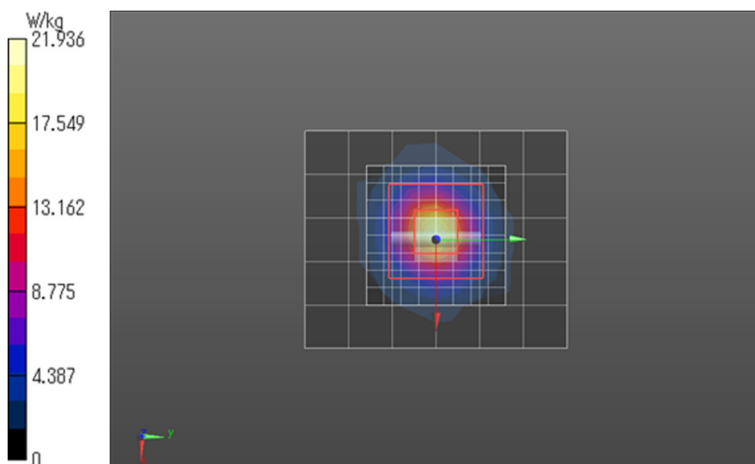

Date: 2024/07/05

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Validation_D5600_HSL (2)

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1039

Communication System: UID 0, CW (0); Frequency: 5600 MHz

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.078$ S/m; $\epsilon_r = 35.708$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(4.82, 4.82, 4.82) @ 5600 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**System Performance Check at Frequencies above 5 GHz/Validation D5600 HSL/
Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm**

Maximum value of SAR (measured) = 17.9 W/kg

**System Performance Check at Frequencies above 5 GHz/Validation D5600 HSL/
Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm**

Reference Value = 71.99 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 39.3 W/kg

SAR(1 g) = 8.19 W/kg; SAR(10 g) = 2.29 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 21.7 W/kg

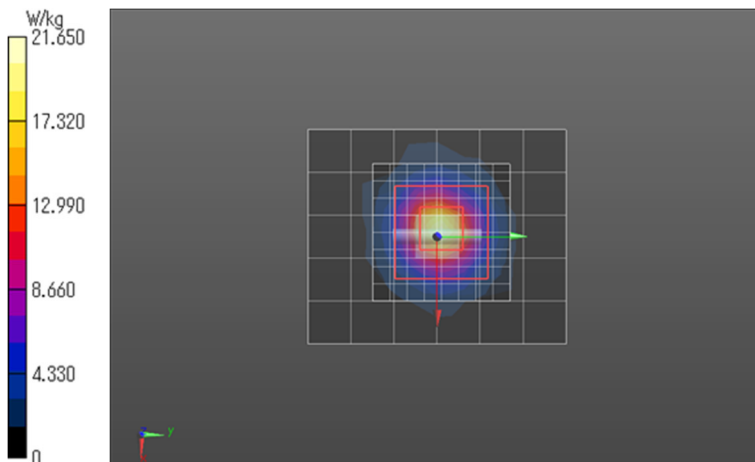

Date: 2024/06/28

Test Laboratory: Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory Main Lab. 4th Site Shielded Room 2

Validation_D5800_HSL

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1039

Communication System: UID 0, CW (0); Frequency: 5800 MHz

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 36.05$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3921; ConvF(4.85, 4.85, 4.85) @ 5800 MHz; Calibrated: 2023/11/16
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn482; Calibrated: 2023/10/09
- Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA002AA; Serial: TP:1259
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

System Performance Check at Frequencies above 5 GHz/Validation D5800 HSL/ Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.6 W/kg

System Performance Check at Frequencies above 5 GHz/Validation D5800 HSL/ Zoom Scan (9x9x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 70.08 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 36.1 W/kg

SAR(1 g) = 7.85 W/kg; SAR(10 g) = 2.22 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 20.5 W/kg

