



RADIO TEST REPORT

Test Report No. : 13629400H-A

Applicant : Murata Manufacturing Co., Ltd.

Type of EUT : Sensor tag

Model Number of EUT : LBBC0ZZ2AM-690

FCC ID : VPYLB2AM


Test regulation : FCC Part 15 Subpart C: 2021

Test Result : Complied (Refer to SECTION 3.2)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in Section 1.

Date of test: January 14, to January 25, 2021

Representative test engineer: 
Hiroki Numata
Engineer
Consumer Technology Division

Approved by: 
Takayuki Shimada
Leader
Consumer Technology Division



CERTIFICATE 5107.02

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

REVISION HISTORY

Original Test Report No.: 13629400H-A

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13629400H-A	January 28, 2021	-	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

CONTENTS	PAGE
SECTION 1: Customer information.....	5
SECTION 2: Equipment under test (EUT).....	5
SECTION 3: Test specification, procedures & results.....	6
SECTION 4: Operation of EUT during testing.....	10
SECTION 5: Radiated Spurious Emission	12
SECTION 6: Antenna Terminal Conducted Tests.....	14
APPENDIX 1: Test data	15
6 dB Bandwidth and 99 % Occupied Bandwidth.....	15
Maximum Peak Output Power	18
Average Output Power	19
Radiated Spurious Emission	22
Conducted Spurious Emission	29
Power Density	32
APPENDIX 2: Test instruments	34
APPENDIX 3: Photographs of test setup	36
Radiated Spurious Emission	36
Worst Case Position	37
Antenna Terminal Conducted Tests.....	38

SECTION 1: Customer information

Company Name : Murata Manufacturing Co., Ltd.
Address : 1-10-1 Higashikotari, Nagaokakyo-shi, Kyoto 617-8555 Japan
Telephone Number : +81-75-955-6736
Facsimile Number : +81-75-955-6634
Contact Person : Motoo Hayashi

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT) other than the Receipt Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type : Sensor tag
Model Number : LBBC0ZZ2AM-690
Serial Number : Refer to SECTION 4.2
Rating : Typ: DC 3.0 V (Min: DC 2.3 V to Max: DC 3.0 V)
Receipt Date : December 22, 2020 (for Antenna Terminal Conducted test)
January 13, 2021 (for Radiated Spurious Emission)
Country of Mass-production : Japan
Condition : Production model
Modification : No Modification by the test lab.

2.2 Product Description

Model: LBBC0ZZ2AM-690 (referred to as the EUT in this report) is a Sensor tag .

Radio Specification

Radio Type : Transceiver
Frequency of Operation : 2405 MHz - 2480 MHz
Modulation : O-QPSK
Antenna type : Monopole Pattern Antenna
Antenna Gain : 0.3 dBi
Clock frequency (Maximum) : 32 MHz

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on January 12, 2021 and effective February 11, 2021

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz,
and 5725-5850 MHz

* The revision does not affect the test result conducted before its effective date.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods	FCC: Section 15.207	N/A	N/A	*1)
	ISED: RSS-Gen 8.8	ISED: RSS-Gen 8.8			
6dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section 15.247(a)(2)	See data.	Complied a)	Conducted
	ISED: -	ISED: RSS-247 5.2(a)			
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section 15.247(b)(3)		Complied b)	Conducted
	ISED: RSS-Gen 6.12	ISED: RSS-247 5.4(d)			
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section 15.247(e)		Complied c)	Conducted
	ISED: -	ISED: RSS-247 5.2(b)			
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section 15.247(d)	4.9 dB 2483.500 MHz, PK, Vert.	Complied# d), e)	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *2)
	ISED: RSS-Gen 6.13	ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10			
<p>Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422. *1) The test was not performed on since the EUT does not have AC Power ports. *2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6.</p> <p>a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth) b) Refer to APPENDIX 1 (data of Maximum Peak Output Power) c) Refer to APPENDIX 1 (data of Power Density) d) Refer to APPENDIX 1 (data of Conducted Spurious Emission) e) Refer to APPENDIX 1 (data of Radiated Spurious Emission)</p> <p>Symbols: Complied The data of this test item has enough margin, more than the measurement uncertainty. Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.</p>					

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The test was performed with the New Battery and the stable voltage was supplied to the RF part during the tests. Therefore, the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	- a)	Conducted
a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.
Ise EMC Lab.

Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	0.96 %
Maximum Peak Output Power / Average Output Power	1.4 dB
Carrier Frequency Separation	0.42 %
Dwell time / Burst rate	0.10 %
Conducted Spurious Emission	2.6 dB

Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.3 dB
10 m		3.2 dB
3 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		5.0 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.2 dB
		6.3 dB
10 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		4.8 dB
	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.0 dB
		5.0 dB
3 m	1 GHz to 6 GHz	4.9 dB
	6 GHz to 18 GHz	5.2 dB
1 m	10 GHz to 26.5 GHz	5.5 dB
	26.5 GHz to 40 GHz	5.5 dB
10 m	1 GHz to 18 GHz	5.2 dB

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 199967

ISED Lab Company Number: 2973C / CAB identifier: JP0002

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)


Test Item	Mode	Tested frequency
6dB Bandwidth 99% Occupied Bandwidth Maximum Peak Output Power Power Density Spurious Emission (Conducted / Radiated)	Zigbee_Transmitting (Tx)	2405 MHz 2440 MHz 2480 MHz
*The worst condition was determined based on the test result of Maximum Peak Output Power (Mid Channel)		
*Power of the EUT was set by the software as follows; - Power Setting: 7 dBm - Software: EMI_Test_Tool.exe (Ver.1.8) (Date: 2021.01.14, Storage location: Driven by connected PC) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.		

4.2 Configuration and peripherals

Radiated Emission test



Antenna Terminal Conducted test

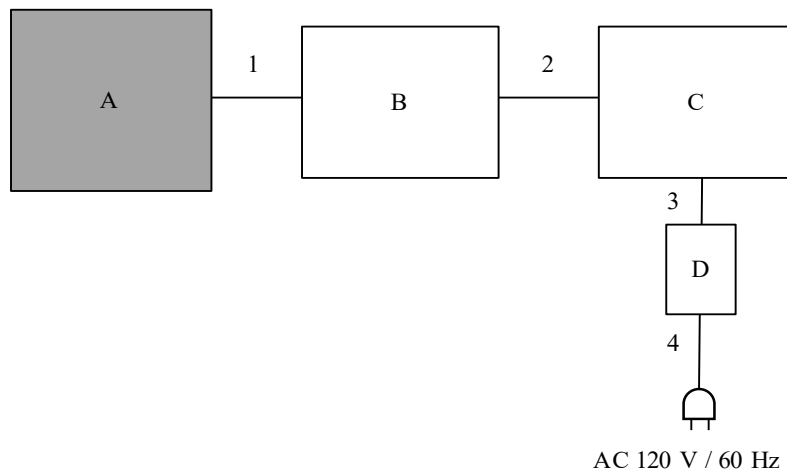

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Sensor tag	LBBC0ZZ2AM-690	001 *1) 002 *2)	Murata Manufacturing Co., Ltd.	EUT
B	Jig	Telin	-	-	-
C	Laptop PC	CF-NX2ADHCS	3JKSA53576	Panasonic	-
D	AC Adapter	CF-AA6412CM2	6412CM213208672A	Panasonic	-

*1) Used for Antenna Terminal conducted test

*2) Used for Radiated Emission test

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable(Jig)	0.15	Unshielded	Unshielded	-
2	USB Cable	1.00	Shielded	Shielded	-
3	DC Cable	0.90	Unshielded	Unshielded	-
4	AC Cable	0.80	Unshielded	Unshielded	-

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz			20 dBc
Instrument used	Test Receiver	Spectrum Analyzer			Spectrum Analyzer
Detector	QP	PK	AV *1)	Peak with Duty Factor	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	11.12.2.5.1 RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces 11.12.2.5.2 The duty cycle was less than 98% for detected noise, a duty factor was added to the 11.12.2.5.1 results.	RBW: 1 MHz VBW: 3 MHz	RBW: 100 kHz VBW: 300 kHz

*1) Average Power Measurement was performed based on ANSI C63.10-2013.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Figure 2: Test Setup


Below 1 GHz

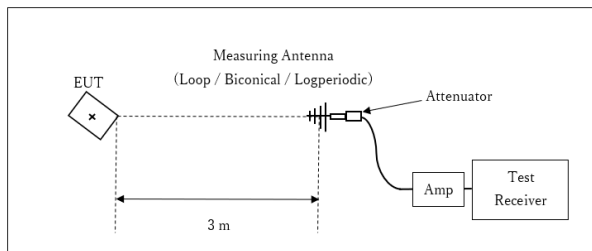

× : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

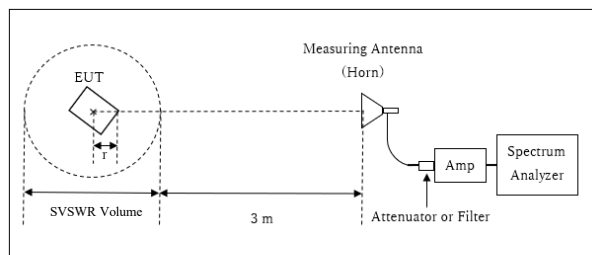


r : Radius of an outer periphery of EUT
 × : Center of turn table

Distance Factor: $20 \times \log(4.0 \text{ m} / 3.0 \text{ m}) = 2.50 \text{ dB}$
 * Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 4.0 \text{ m}$

SVSWR Volume : 2.0 m
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 r = 0.0m

* The test was performed with r = 0.0 m since EUT is small and it was the rather conservative condition.

10 GHz – 26.5 GHz

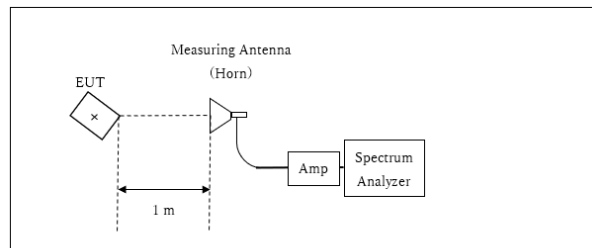

× : Center of turn table

Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$
 *Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz
Test data : APPENDIX
Test result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6dB Bandwidth	4 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 50 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	10 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4) *5)	9kHz to 150kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150kHz to 30MHz	9.1 kHz	27 kHz				

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 1: Test data

6 dB Bandwidth and 99 % Occupied Bandwidth


Report No. 13629400H
Test place Ise EMC Lab. No.2 Measurement Room
Date January 25, 2021
Temperature / Humidity 22 deg. C / 34 % RH
Engineer Kiyoshiro Okazaki
Mode Tx Zigbee

Mode	Frequency [MHz]	99% Occupied Bandwidth [kHz]	6dB Bandwidth [MHz]	Limit for 6dB Bandwidth [MHz]
Zigbee	2405	2263.0	1.560	> 0.5000
	2440	2247.7	1.526	> 0.5000
	2480	2256.7	1.544	> 0.5000


99 % Occupied Bandwidth

Zigbee


2405 MHz

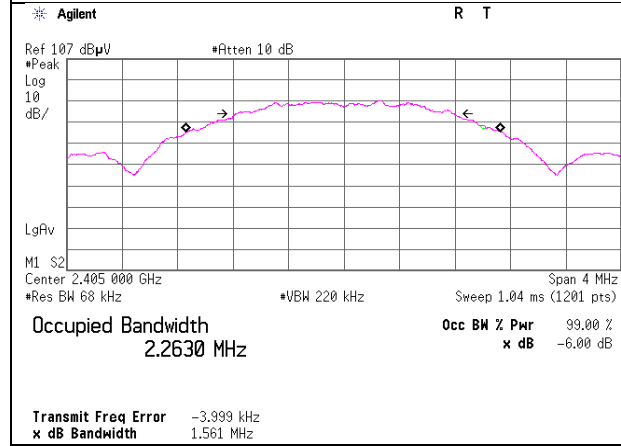

2440 MHz

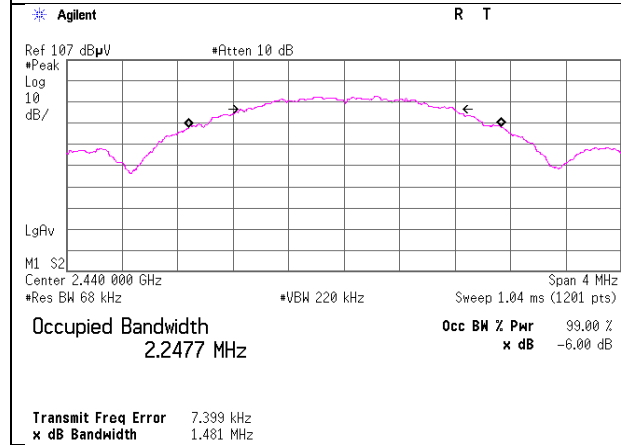

2480 MHz

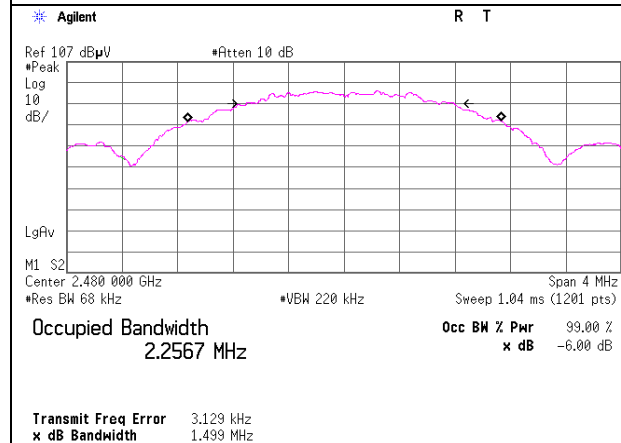

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


6 dB Bandwidth

Zigbee


2405 MHz

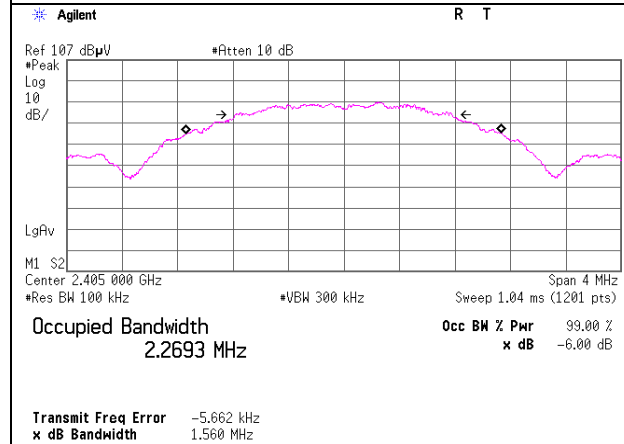

2440 MHz

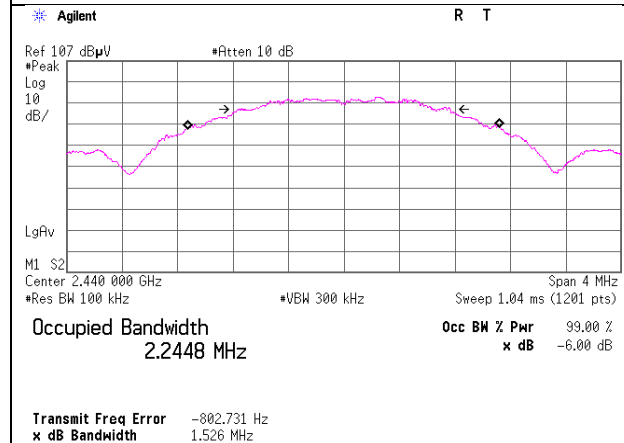

2480 MHz

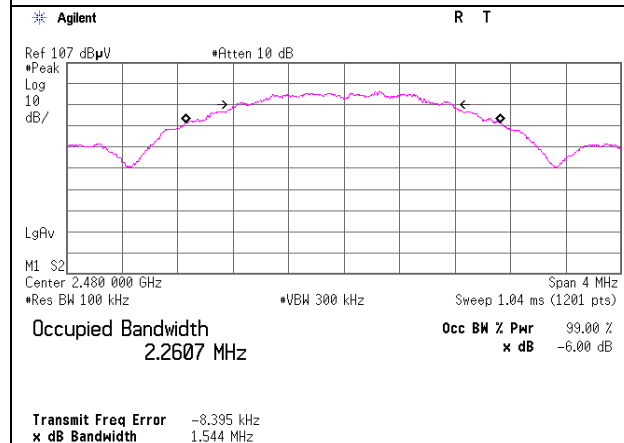

Maximum Peak Output Power

Report No. 13629400H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 15, 2021
Temperature / Humidity 22 deg. C / 42 % RH
Engineer Kiyoshiro Okazaki
Mode Tx Zigbee

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
				Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2405	-5.15	0.10	10.04	4.99	3.16	30.00	1000	25.01	0.30	5.29	3.38	36.02	4000	30.73
2440	-4.97	0.10	10.04	5.17	3.29	30.00	1000	24.83	0.30	5.47	3.52	36.02	4000	30.55
2480	-4.83	0.10	10.04	5.31	3.40	30.00	1000	24.69	0.30	5.61	3.64	36.02	4000	30.41

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Average Output Power
(Reference data for RF Exposure)

Report No. 13629400H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 15, 2021
Temperature / Humidity 22 deg. C / 42 % RH
Engineer Kiyoshiro Okazaki
Mode Tx Zigbee

Zigbee

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2405	-5.75	0.10	10.04	4.39	2.75	0.00	4.39	2.75
2440	-5.61	0.10	10.04	4.53	2.84	0.00	4.53	2.84
2480	-5.45	0.10	10.04	4.69	2.94	0.00	4.69	2.94


Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator I

Result (Burst power average) = Time average + Duty factor

Burst rate confirmation

Report No. 13629400H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date January 14, 2021
Temperature / Humidity 22 deg. C / 35 % RH
Engineer Junya Okuno
Mode Tx Zigbee

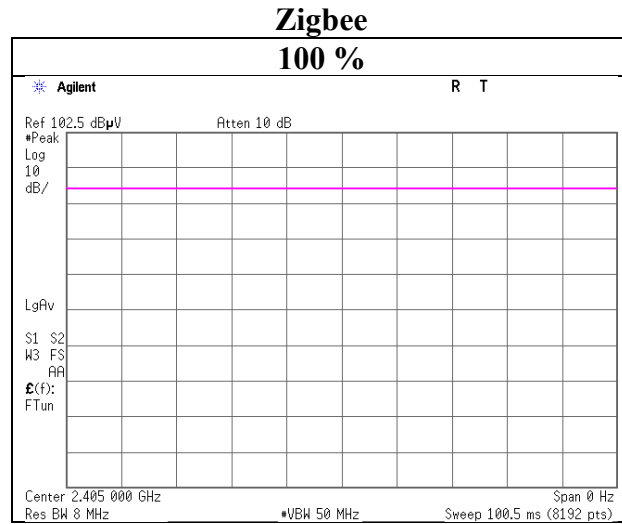


* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Duty Factor (for Peak with Duty factor)

Report No.	13629400H
Test place	Ise EMC Lab. No.6 Measurement Room
Date	January 14, 2021
Temperature / Humidity	23 deg. C / 34 % RH
Engineer	Hiroki Numata
Mode	Tx Zigbee

Zigbee

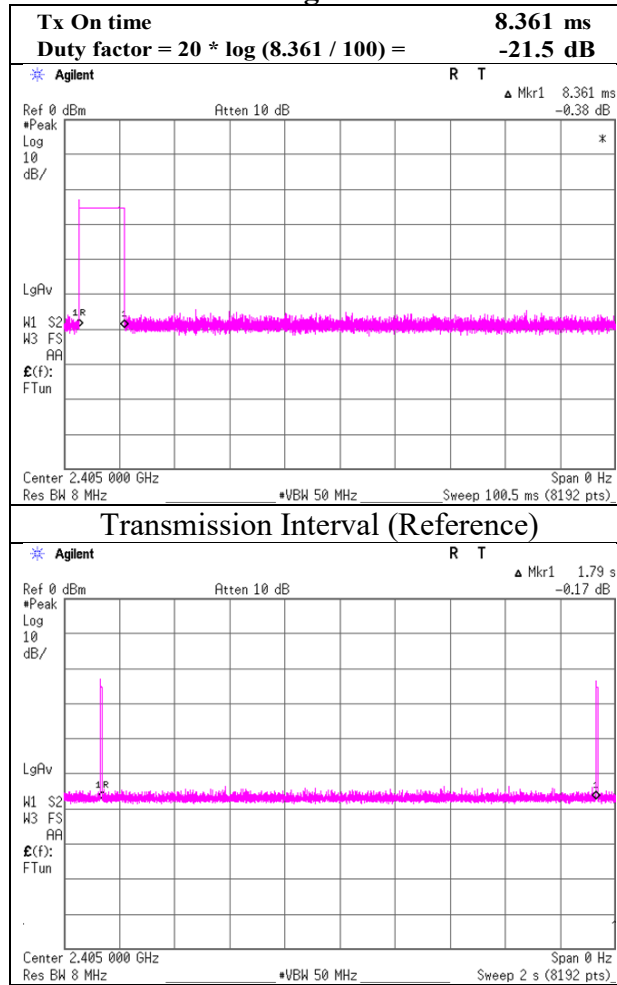

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13629400H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date January 14, 2021
Temperature / Humidity 22 deg. C / 35 % RH
Engineer Junya Okuno
(30 MHz - 26.5 GHz)
Mode Tx Zigbee 2405 MHz

【PK/QP】

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	30.000	QP	21.6	18.4	7.1	32.0	-	15.2	40.0	24.9	
Hori.	102.500	QP	21.0	10.5	8.0	31.9	-	7.6	43.5	35.9	
Hori.	268.320	QP	20.5	12.8	9.4	31.8	-	10.9	46.0	35.2	
Hori.	550.498	QP	26.2	17.9	11.0	31.9	-	23.1	46.0	22.9	
Hori.	582.125	QP	28.7	18.7	11.1	32.0	-	26.6	46.0	19.5	
Hori.	614.184	QP	28.3	19.3	11.3	32.0	-	26.9	46.0	19.1	
Hori.	2390.000	PK	45.7	27.8	5.5	31.8	-	47.2	73.9	26.7	
Hori.	4810.000	PK	49.0	31.6	7.7	31.2	-	57.1	73.9	16.8	
Hori.	7215.000	PK	41.8	36.5	8.9	32.4	-	54.8	73.9	19.1	
Hori.	9620.000	PK	40.4	38.0	9.6	32.6	-	55.4	73.9	18.5	Floor noise
Vert.	30.000	QP	21.7	18.4	7.1	32.0	-	15.3	40.0	24.8	
Vert.	102.500	QP	21.0	10.5	8.0	31.9	-	7.6	43.5	35.9	
Vert.	268.320	QP	20.4	12.8	9.4	31.8	-	10.8	46.0	35.3	
Vert.	550.498	QP	20.7	17.9	11.0	31.9	-	17.6	46.0	28.4	
Vert.	582.125	QP	20.8	18.7	11.1	32.0	-	18.7	46.0	27.4	
Vert.	614.184	QP	21.4	19.3	11.3	32.0	-	20.0	46.0	26.0	
Vert.	2390.000	PK	44.5	27.8	5.5	31.8	-	45.9	73.9	28.0	
Vert.	4810.000	PK	47.4	31.6	7.7	31.2	-	55.5	73.9	18.4	
Vert.	7215.000	PK	43.0	36.5	8.9	32.4	-	56.0	73.9	17.9	
Vert.	9620.000	PK	40.5	38.0	9.6	32.6	-	55.5	73.9	18.4	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2405.000	PK	97.1	27.8	5.5	31.8	98.6	-	-	Carrier
Hori.	2400.000	PK	54.7	27.8	5.5	31.8	56.2	78.6	22.4	
Vert.	2405.000	PK	96.5	27.8	5.5	31.8	98.0	-	-	Carrier
Vert.	2400.000	PK	52.5	27.8	5.5	31.8	54.0	78.0	24.0	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor: 1 GHz - 10 GHz 20log (4 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5dB

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13629400H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date January 14, 2021
Temperature / Humidity 22 deg. C / 35 % RH
Engineer Junya Okuno
(30 MHz - 26.5 GHz)
Mode Tx Zigbee 2405 MHz

【AV】

PK With Duty factor or AV

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result dBuV/m	Limit dBuV/m	Margin [dB]	Remark
Hori.	2390.000	PK	45.7	27.8	5.5	31.8	-21.5	25.7	53.9	28.2	*
Hori.	4810.000	PK	49.0	31.6	7.7	31.2	-21.5	35.6	53.9	18.3	*
Hori.	7215.000	PK	41.8	36.5	8.9	32.4	-21.5	33.3	53.9	20.6	*
Hori.	9620.000	AV	32.6	38.0	9.6	32.6	-	47.6	53.9	6.3	Floor Noise
Vert.	2390.000	PK	44.5	27.8	5.5	31.8	-21.5	24.4	53.9	29.5	*
Vert.	4810.000	PK	47.4	31.6	7.7	31.2	-21.5	34.0	53.9	19.9	*
Vert.	7215.000	PK	43.0	36.5	8.9	32.4	-21.5	34.5	53.9	19.4	*
Vert.	9620.000	AV	32.5	38.0	9.6	32.6	-	47.6	53.9	6.3	Floor Noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz $20\log(4\text{ m} / 3.0\text{ m}) = 2.5\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission (Reference Plot for band-edge)

Report No.	13629400H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.4
Date	January 14, 2021
Temperature / Humidity	22 deg. C / 35 % RH
Engineer	Junya Okuno
	(1 GHz - 10 GHz)
Mode	Tx Zigbee 2405 MHz

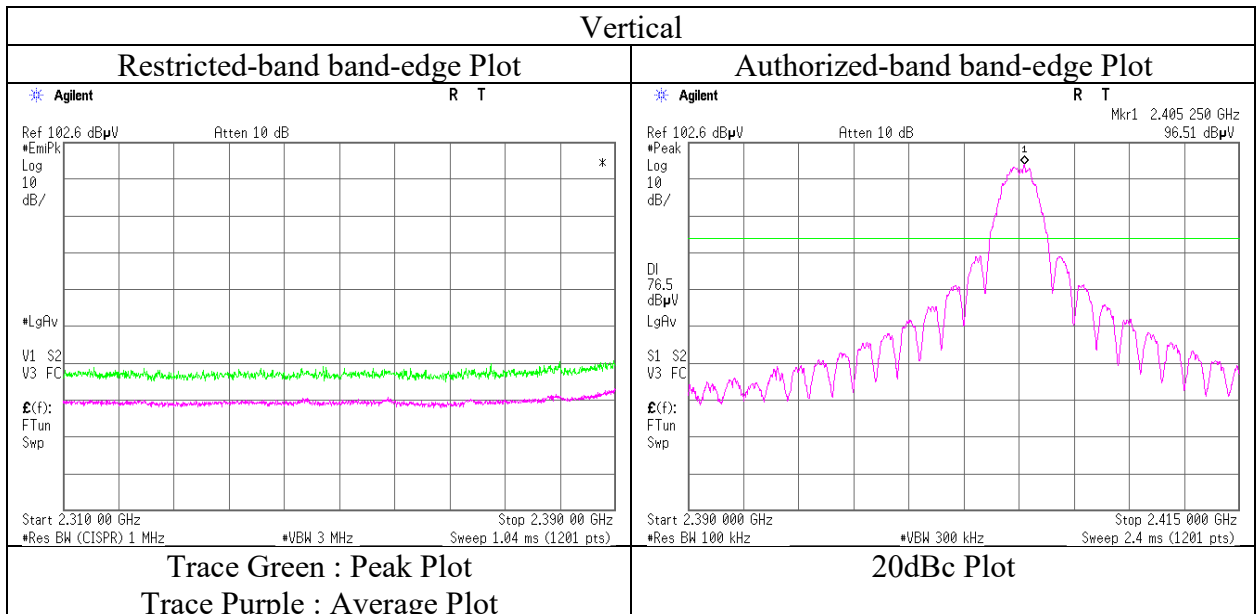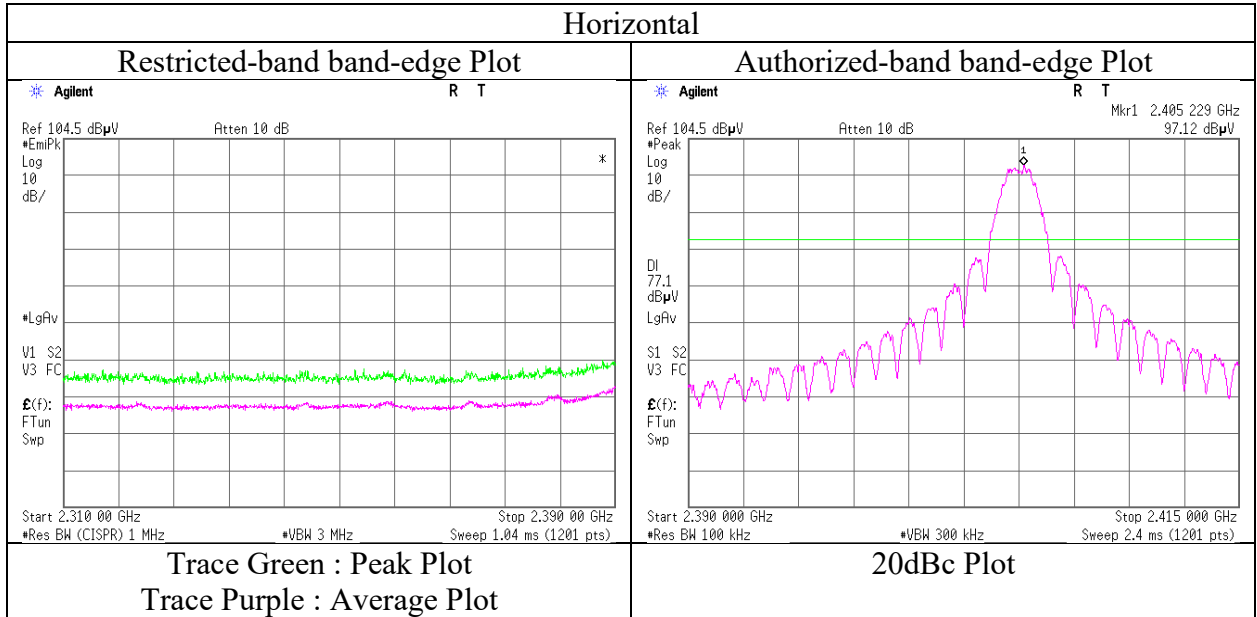

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13629400H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date January 14, 2021
Temperature / Humidity 22 deg. C / 35 % RH
Engineer Junya Okuno
(30 MHz - 26.5 GHz)
Mode Tx Zigbee 2440 MHz

【PK/QP】

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	30.000	QP	21.6	18.4	7.1	32.0	-	15.2	40.0	24.9	
Hori.	125.328	QP	20.6	13.3	8.2	31.9	-	10.2	43.5	33.3	
Hori.	265.000	QP	20.6	12.6	9.3	31.8	-	10.7	46.0	35.3	
Hori.	547.908	QP	29.6	17.8	11.0	31.9	-	26.5	46.0	19.6	
Hori.	580.381	QP	35.5	18.7	11.1	32.0	-	33.3	46.0	12.7	
Hori.	612.271	QP	30.7	19.3	11.3	32.0	-	29.3	46.0	16.8	
Hori.	4880.000	PK	47.9	31.6	7.7	31.2	-	56.0	73.9	17.9	
Hori.	7320.000	PK	44.8	36.6	8.9	32.4	-	57.9	73.9	16.1	
Hori.	9760.000	PK	39.5	38.4	9.6	32.7	-	54.9	73.9	19.0	Floor noise
Vert.	30.000	QP	21.6	18.4	7.1	32.0	-	15.2	40.0	24.9	
Vert.	125.328	QP	20.5	13.3	8.2	31.9	-	10.1	43.5	33.4	
Vert.	265.000	QP	20.6	12.6	9.3	31.8	-	10.7	46.0	35.3	
Vert.	547.908	QP	20.7	17.8	11.0	31.9	-	17.6	46.0	28.5	
Vert.	580.381	QP	20.8	18.7	11.1	32.0	-	18.6	46.0	27.4	
Vert.	612.271	QP	21.2	19.3	11.3	32.0	-	19.8	46.0	26.3	
Vert.	4880.000	PK	44.6	31.6	7.7	31.2	-	52.7	73.9	21.2	
Vert.	7320.000	PK	44.7	36.6	8.9	32.4	-	57.8	73.9	16.1	
Vert.	9760.000	PK	39.5	38.4	9.6	32.7	-	55.0	73.9	19.0	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4\text{ m} / 3.0\text{ m}) = 2.5\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

【AV】

PK With Duty factor or AV

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	4880.000	PK	47.9	31.6	7.7	31.2	-21.5	34.5	53.9	19.4	*
Hori.	7320.000	PK	44.8	36.6	8.9	32.4	-21.5	36.4	53.9	17.6	*
Hori.	9760.000	AV	32.4	38.4	9.6	32.7	-	47.8	53.9	6.1	Floor Noise
Vert.	4880.000	PK	44.6	31.6	7.7	31.2	-21.5	31.2	53.9	22.7	*
Vert.	7320.000	PK	44.7	36.6	8.9	32.4	-21.5	36.3	53.9	17.6	*
Vert.	9760.000	AV	32.3	38.4	9.6	32.7	-	47.7	53.9	6.2	Floor Noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz $20\log(4\text{ m} / 3.0\text{ m}) = 2.5\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Report No. 13629400H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4 No.4
Date January 14, 2021 January 14, 2021
Temperature / Humidity 23 deg. C / 34 % RH 22 deg. C / 35 % RH
Engineer Hiroki Numata Junya Okuno
(1 GHz - 10 GHz) (10 GHz - 26.5 GHz)
(30 MHz - 1000 MHz)
Mode Tx Zigbee 2480 MHz

【PK/QP】

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	30.000	QP	21.6	18.4	7.1	32.0	-	15.2	40.0	24.9	
Hori.	125.014	QP	20.5	13.3	8.2	31.9	-	10.1	43.5	33.5	
Hori.	514.329	QP	28.2	17.8	10.8	31.9	-	24.9	46.0	21.1	
Hori.	547.084	QP	30.0	17.8	11.0	31.9	-	26.9	46.0	19.2	
Hori.	578.712	QP	35.0	18.6	11.1	32.0	-	32.8	46.0	13.3	
Hori.	610.852	QP	31.8	19.3	11.3	32.0	-	30.4	46.0	15.7	
Hori.	2483.500	PK	66.8	27.7	5.6	31.8	-	68.2	73.9	5.7	
Hori.	4960.000	PK	47.6	31.6	7.5	31.2	-	55.5	73.9	18.4	
Hori.	7440.000	PK	46.4	36.7	8.7	32.5	-	59.3	73.9	14.6	
Hori.	9920.000	PK	41.6	38.6	9.5	32.7	-	56.9	73.9	17.0	
Hori.	12400.000	PK	43.0	39.0	-1.6	32.8	-	47.6	73.9	26.3	
Vert.	30.000	QP	21.7	18.4	7.1	32.0	-	15.3	40.0	24.8	
Vert.	125.014	QP	20.5	13.3	8.2	31.9	-	10.1	43.5	33.5	
Vert.	514.329	QP	21.2	17.8	10.8	31.9	-	17.9	46.0	28.1	
Vert.	547.084	QP	21.8	17.8	11.0	31.9	-	18.7	46.0	27.4	
Vert.	578.712	QP	26.4	18.6	11.1	32.0	-	24.2	46.0	21.9	
Vert.	610.852	QP	24.0	19.3	11.3	32.0	-	22.6	46.0	23.5	
Vert.	2483.500	PK	67.6	27.7	5.6	31.8	-	69.0	73.9	4.9	
Vert.	4960.000	PK	46.0	31.6	7.5	31.2	-	53.9	73.9	20.0	
Vert.	7440.000	PK	47.9	36.7	8.7	32.5	-	60.8	73.9	13.1	
Vert.	9920.000	PK	41.7	38.6	9.5	32.7	-	57.0	73.9	16.9	
Vert.	12400.000	PK	41.0	39.0	-1.6	32.8	-	45.6	73.9	28.4	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log(4 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB

【AV】

PK With Duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	PK	66.8	27.7	5.6	31.8	-21.5	46.7	53.9	7.2	*
Hori.	4960.000	PK	47.6	31.6	7.5	31.2	-21.5	34.0	53.9	19.9	*
Hori.	7440.000	PK	46.4	36.7	8.7	32.5	-21.5	37.8	53.9	16.1	*
Hori.	9920.000	PK	41.6	38.6	9.5	32.7	-21.5	35.4	53.9	18.5	*
Hori.	12400.000	PK	43.0	39.0	-1.6	32.8	-21.5	26.1	53.9	27.8	*
Vert.	2483.500	PK	67.6	27.7	5.6	31.8	-21.5	47.5	53.9	6.4	*
Vert.	4960.000	PK	46.0	31.6	7.5	31.2	-21.5	32.4	53.9	21.5	*
Vert.	7440.000	PK	47.9	36.7	8.7	32.5	-21.5	39.3	53.9	14.6	*
Vert.	9920.000	PK	41.7	38.6	9.5	32.7	-21.5	35.5	53.9	18.4	*
Vert.	12400.000	PK	41.0	39.0	-1.6	32.8	-21.5	24.1	53.9	29.9	*

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Above noise was synchronized with carrier frequency.

Distance factor: 1 GHz - 10 GHz 20log(4 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5dB

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission
(Reference Plot for band-edge)



Report No. 13629400H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.4
Date January 14, 2021
Temperature / Humidity 23 deg. C / 34 % RH
Engineer Hiroki Numata
(1 GHz - 10 GHz)
Mode Tx Zigbee 2480 MHz

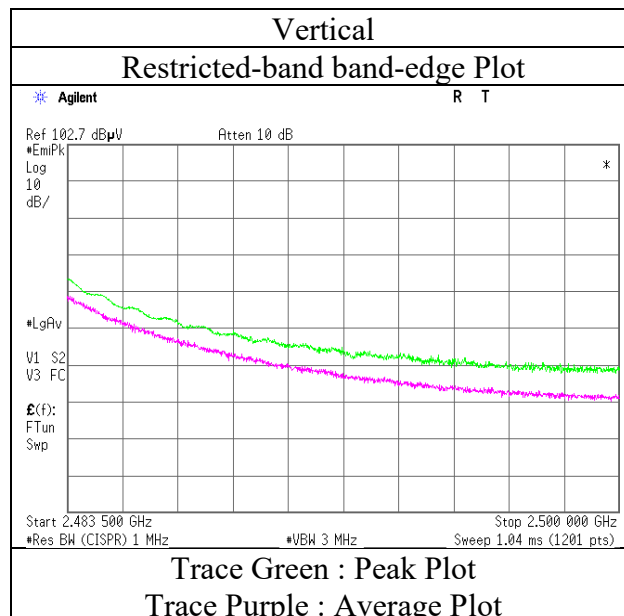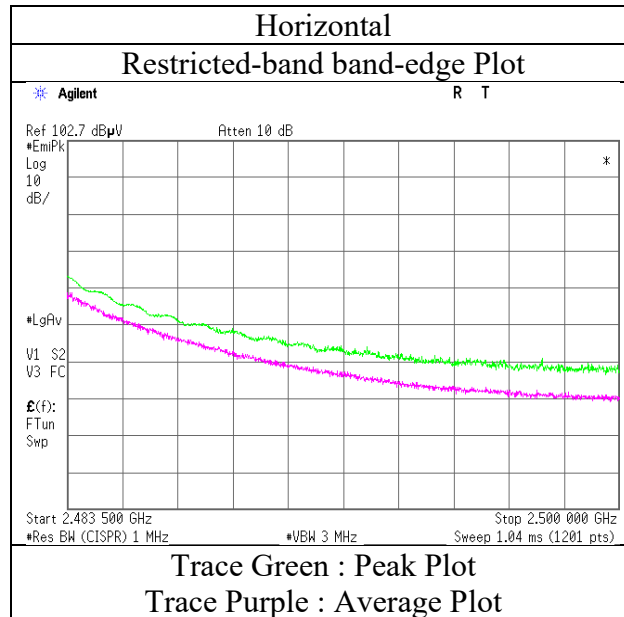

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case)


Report No.	13629400H	
Test place	Ise EMC Lab.	
Semi Anechoic Chamber	No.4	No.4
Date	January 14, 2021	January 14, 2021
Temperature / Humidity	23 deg. C / 34 % RH	22 deg. C / 35 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)	Junya Okuno (10 GHz - 26.5 GHz) (30 MHz - 1000 MHz)
Mode	Tx Zigbee 2480 MHz	

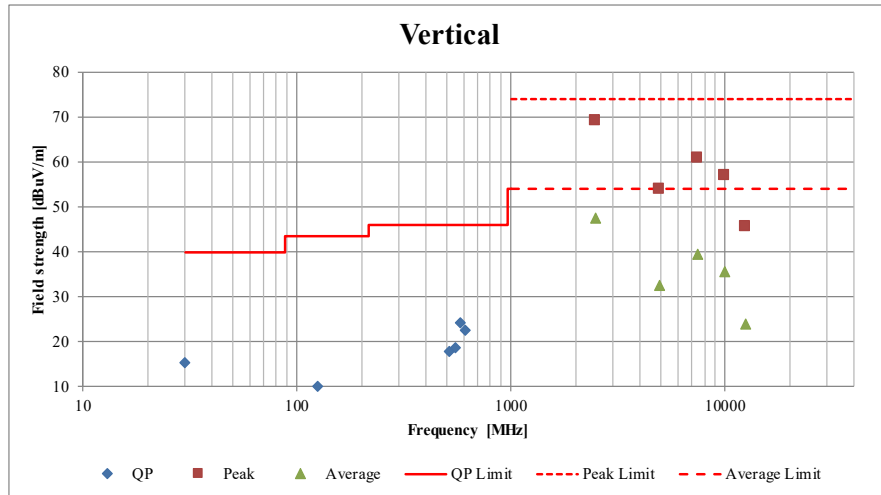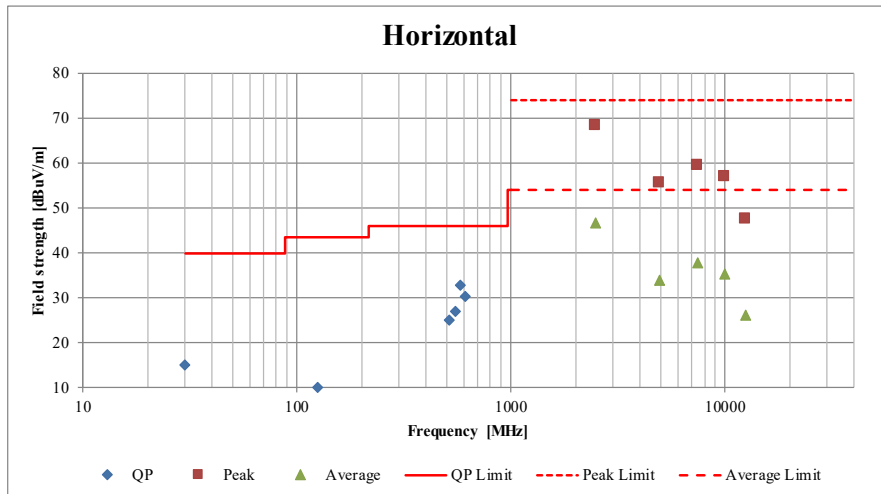

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Report No. 13629400H
 Test place Ise EMC Lab. No.6 Measurement Room
 Date January 25, 2021
 Temperature / Humidity 22 deg. C / 34 % RH
 Engineer Kiyoshiro Okazaki
 Mode Tx Zigbee 2405 MHz

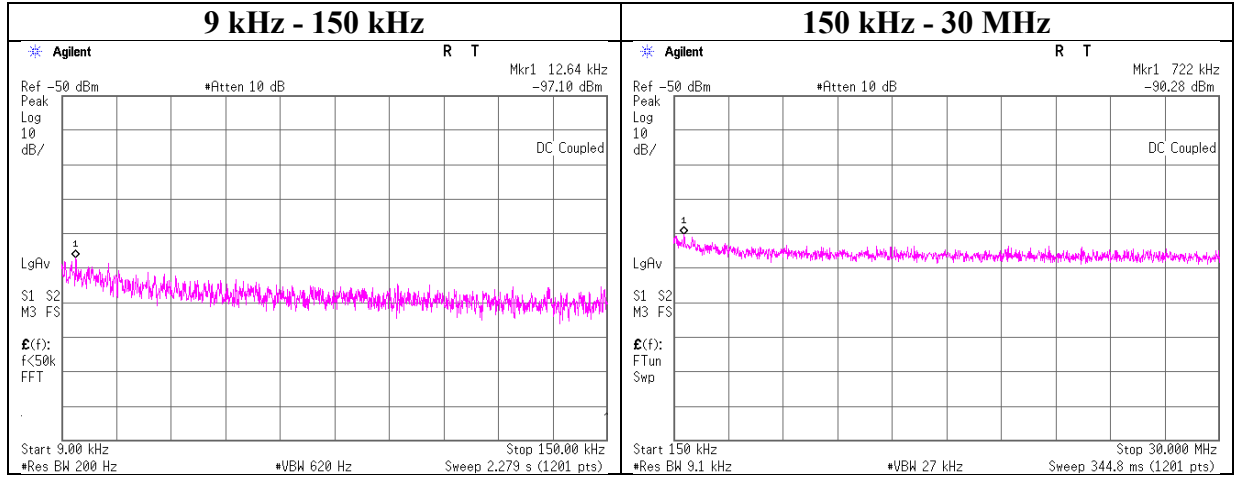

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
12.64	-97.10	0.10	9.84	2.0	1	-85.2	300	6.0	-23.9	45.5	69.4	
722.00	-90.28	0.12	9.84	2.0	1	-78.3	30	6.0	2.9	30.4	27.5	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$


$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

Conducted Spurious Emission

Report No. 13629400H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 25, 2021
Temperature / Humidity 22 deg. C / 34 % RH
Engineer Kiyoshiro Okazaki
Mode Tx Zigbee 2440 MHz

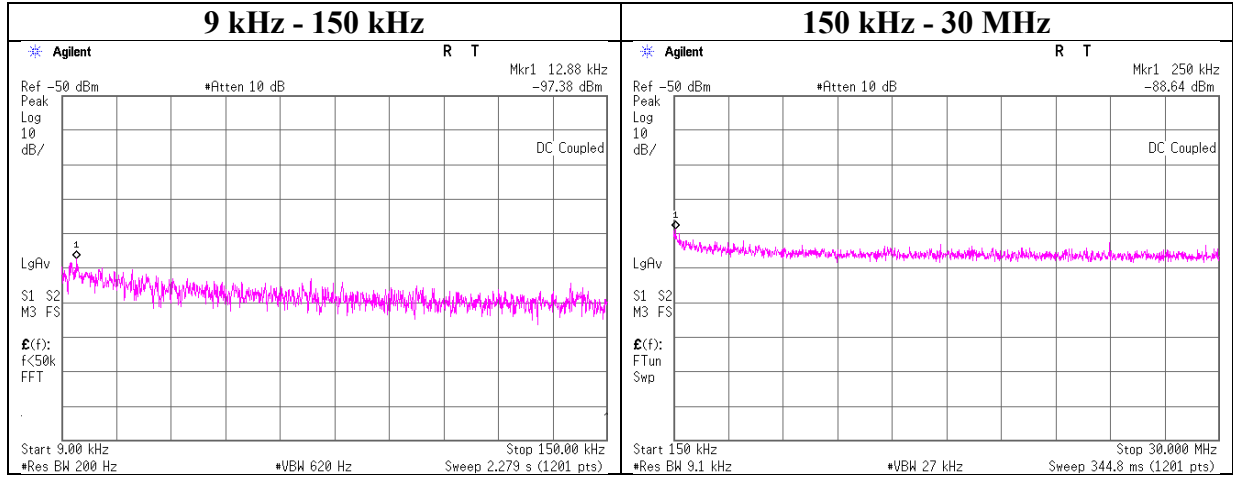

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
12.88	-97.38	0.10	9.84	2.0	1	-85.4	300	6.0	-24.2	45.4	69.6	
250.00	-88.64	0.11	9.84	2.0	1	-76.7	300	6.0	-15.4	19.6	35.0	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Report No. 13629400H
Test place Ise EMC Lab. No.6 Measurement Room
Date January 25, 2021
Temperature / Humidity 22 deg. C / 34 % RH
Engineer Kiyoshiro Okazaki
Mode Tx Zigbee 2480 MHz

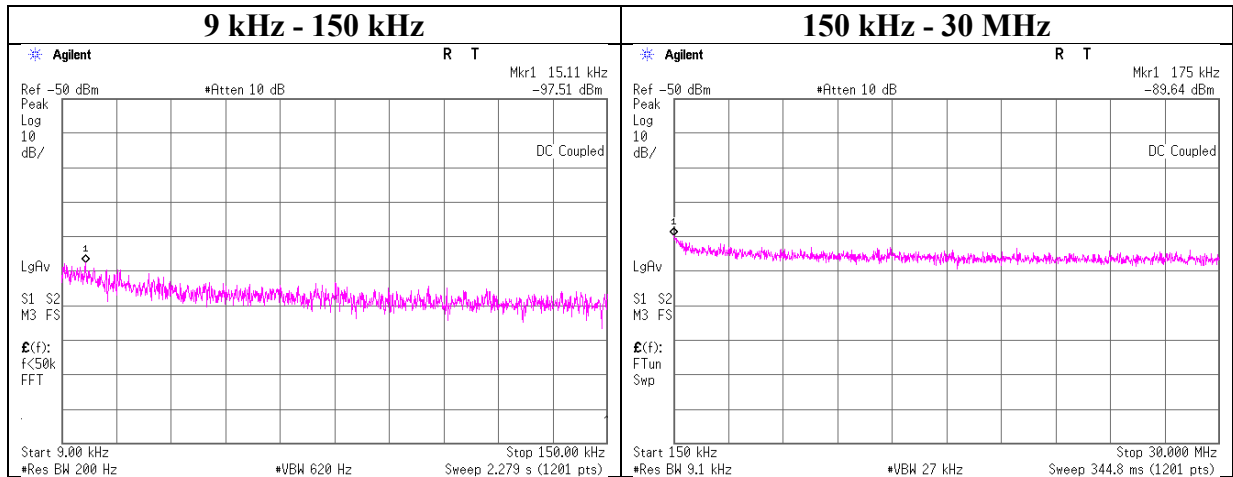

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
15.11	-97.51	0.10	9.84	2.0	1	-85.6	300	6.0	-24.3	44.0	68.3	
175.00	-89.64	0.11	9.84	2.0	1	-77.7	300	6.0	-16.4	22.7	39.1	

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Power Density

Report No. 13629400H
Test place Ise EMC Lab. No.2 Measurement Room
Date January 25, 2021
Temperature / Humidity 22 deg. C / 34 % RH
Engineer Kiyoshiro Okazaki
Mode Zigbee

Zigbee

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2405	-21.02	0.38	10.04	-10.60	8.00	18.60
2440	-20.96	0.38	10.04	-10.54	8.00	18.54
2480	-20.74	0.39	10.04	-10.31	8.00	18.31


Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Power Density

Zigbee


2405 MHz

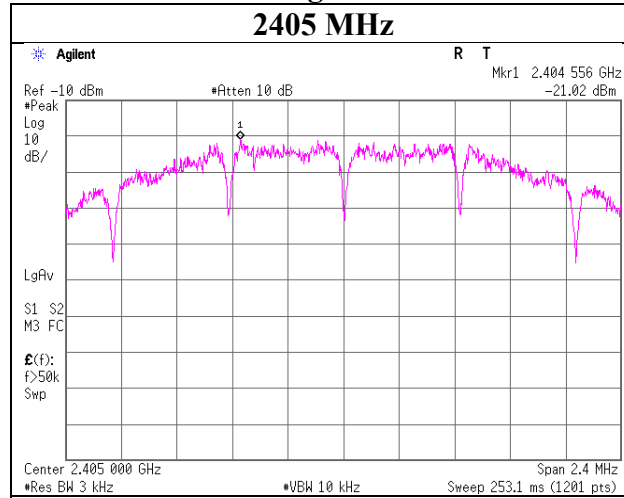

2440 MHz

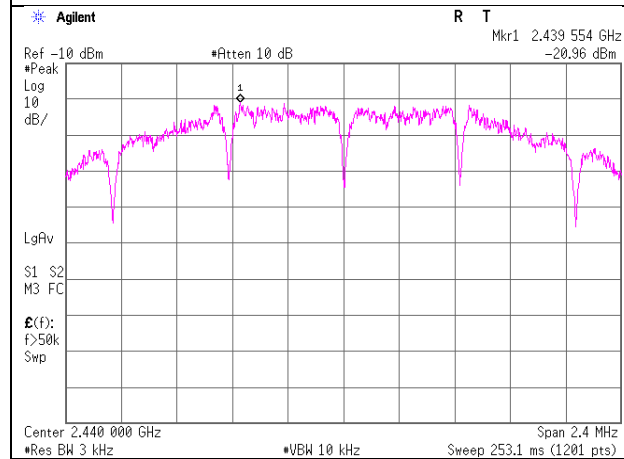

2480 MHz

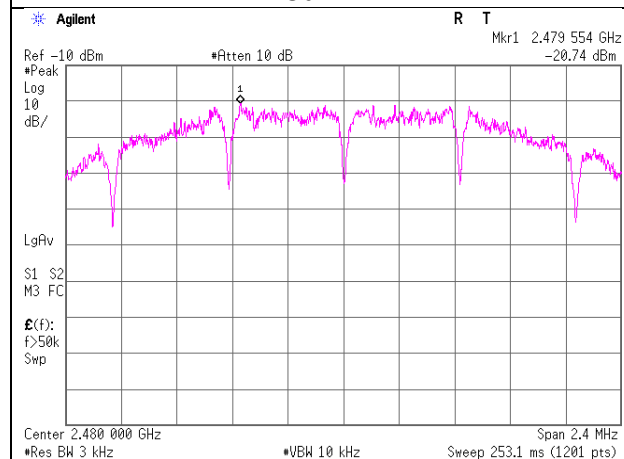

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test equipment

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	MSA-15	141902	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46187105	2020/10/15	12
AT	MAT-58	141334	Attenuator(10dB)	Suhner	6810.19.A	-	2020/12/07	12
AT	MCC-66	141328	Microwave Cable 1G-40GHz	Suhner	SUCOFLEX102	28636/2	2020/04/02	12
AT	MPM-12	141809	Power Meter	ANRITSU	ML2495A	825002	2020/05/07	12
AT	MPSE-17	141830	Power sensor	ANRITSU	MA2411B	738285	2020/05/07	12
AT	MOS-14	141561	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1401	2021/01/15	12
AT	MMM-12	141547	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	60500120	2020/02/03	12
AT	MJM-24	142225	Measure	ASKUL	-	-	-	-
AT	MAT-10	141156	Attenuator(10dB)	Weinschel Corp	2	BL1173	2020/11/13	12
AT	MCC-64	141327	Coaxial Cable	UL Japan	-	-	2020/02/04	12
AT	MAT-20	141173	Attenuator(10dB)(above 1GHz)	HIROSE ELECTRIC CO.,LTD.	AT-110	-	2020/12/07	12
AT	MSA-03	141884	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY44020357	2020/03/04	12
AT	MCC-176	141279	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S303	2020/03/18	12
RE	MOS-15	141562	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0010	2021/01/15	12
RE	MMM-10	141545	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201148	2021/01/07	12
RE	MJM-29	142230	Measure	KOMELON	KMC-36	-	-	-
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-04-SVSWR	142017	AC4_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	2019/04/04	24
RE	MHA-21	141508	Horn Antenna 1-18GHz	Schwarzbeck Mess - Elektronik	BBHA9120D	557	2020/05/22	12
RE	MPA-12	141581	MicroWave System Amplifier	Keysight Technologies Inc	83017A	00650	2020/10/19	12
RE	MCC-246	199563	Microwave Cable	HUBER+SUNER	SF126E/11PC35/11PC35/1000M,5000M	537061/126E / 537072/126E	2020/06/11	12
RE	MHF-26	141296	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	002	2020/09/23	12
RE	MHA-17	141506	Horn Antenna 15-40GHz	Schwarzbeck Mess - Elektronik	BBHA9170	BBHA9170307	2020/07/16	12
RE	MAT-34	141331	Attenuator(6dB)	TME	UFA-01	-	2020/02/05	12
RE	MBA-05	141425	Biconical Antenna	Schwarzbeck Mess - Elektronik	VHA9103+BBA9106	VHA 91031302	2020/08/31	12
RE	MCC-50	141397	Coaxial Cable	UL Japan	-	-	2020/11/06	12
RE	MLA-23	141267	Logperiodic Antenna(200-1000MHz)	Schwarzbeck Mess - Elektronik	VUSLP9111B	9111B-192	2020/09/02	12
RE	MPA-14	141583	Pre Amplifier	SONOMA INSTRUMENT	310	260833	2020/02/18	12
RE	MTR-10	141951	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	2020/03/10	12
RE	MAEC-04	142011	AC4_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	2020/05/25	24

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: RE: Radiated Emission test
 AT: Antenna Terminal Conducted test