




Test Mode	Channel	Polarization	Verdict
11AC20	5280	Horizontal	PASS

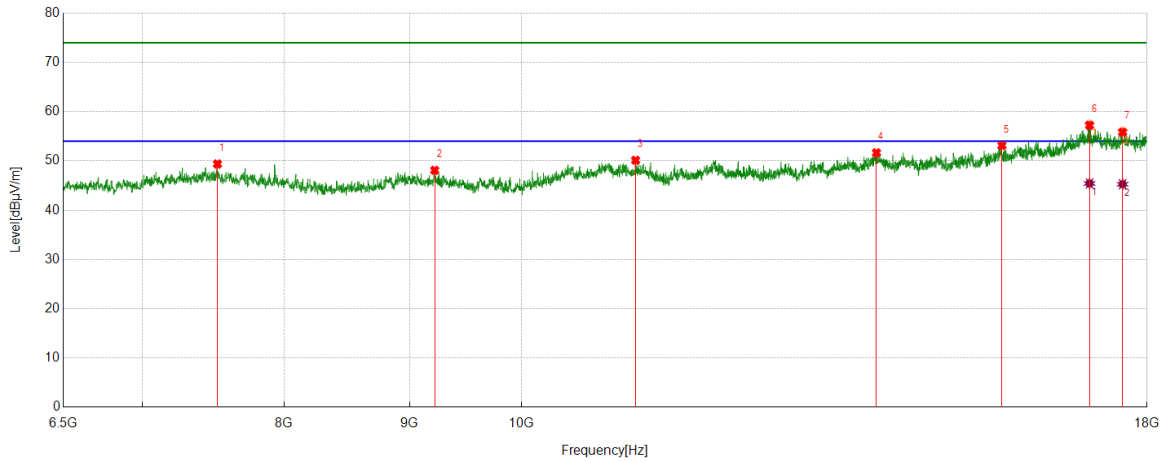

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7514.0857	39.95	9.43	49.38	74.00	-24.62	Horizontal
2	9216.3694	39.00	9.10	48.10	74.00	-25.90	Horizontal
3	11131.4386	37.60	12.53	50.13	74.00	-23.87	Horizontal
4	13958.9932	37.13	14.53	51.66	74.00	-22.34	Horizontal
5	15705.3676	37.19	15.93	53.12	74.00	-20.88	Horizontal
6	17053.0088	37.39	19.93	57.32	74.00	-16.68	Horizontal
7	17591.6819	37.23	18.66	55.89	74.00	-18.11	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17053.0088	25.50	19.93	45.43	54.00	-8.57	Horizontal
2	17591.6819	26.62	18.66	45.28	54.00	-8.72	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5280	Vertical	PASS

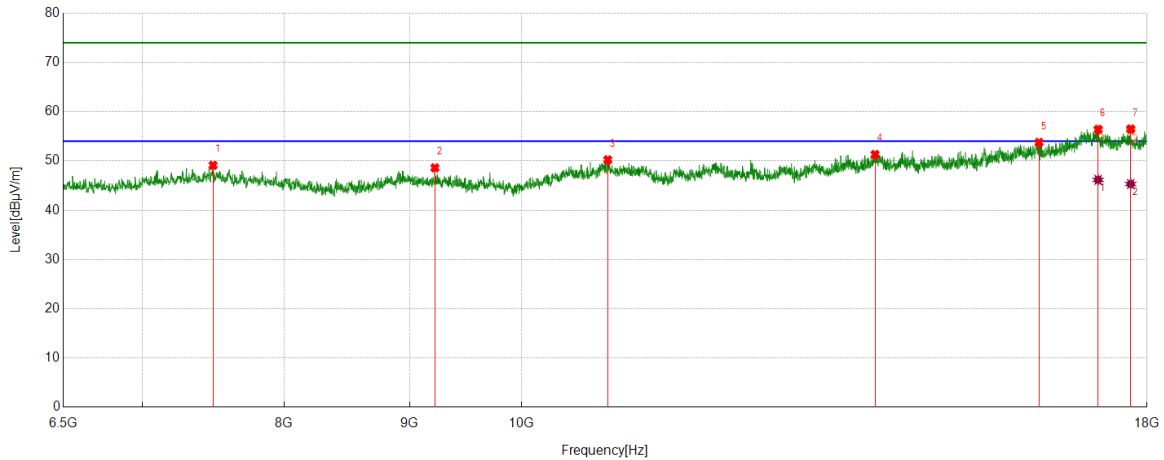

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7483.4139	39.32	9.79	49.11	74.00	-24.89	Vertical
2	9218.2864	39.53	9.07	48.60	74.00	-25.40	Vertical
3	10843.8906	37.56	12.66	50.22	74.00	-23.78	Vertical
4	13939.8233	36.22	15.09	51.31	74.00	-22.69	Vertical
5	16263.2105	37.04	16.73	53.77	74.00	-20.23	Vertical
6	17191.0318	37.1	19.29	56.39	74.00	-17.61	Vertical
7	17725.8710	37.42	18.81	56.23	74.00	-17.77	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17191.0318	26.87	19.29	46.16	54.00	-7.84	Vertical
2	17725.8710	26.51	18.81	45.32	54.00	-8.68	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5300	Horizontal	PASS

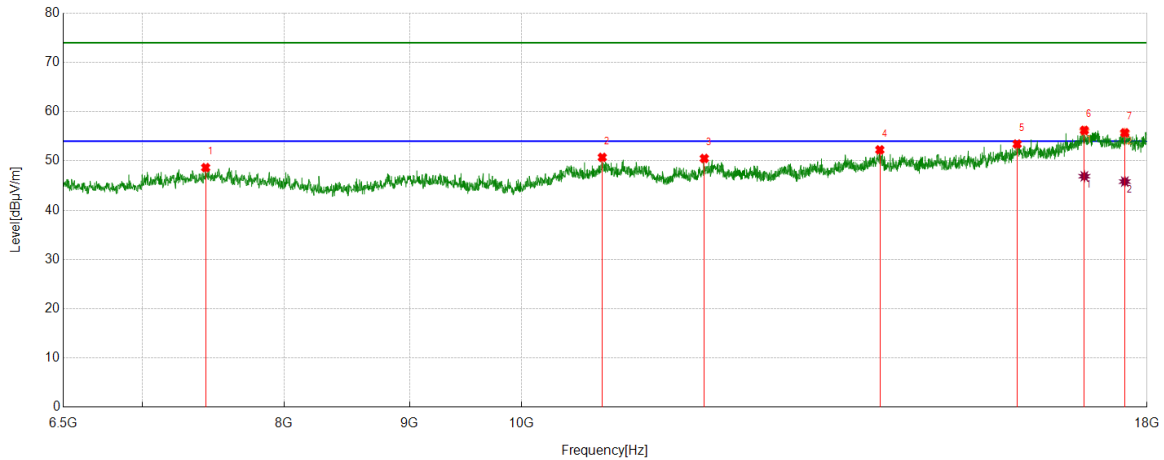

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7431.6553	39.18	9.46	48.64	74.00	-25.36	Horizontal
2	10788.2981	38.16	12.56	50.72	74.00	-23.28	Horizontal
3	11873.3122	37.55	12.95	50.50	74.00	-23.50	Horizontal
4	14003.0838	37.06	15.19	52.25	74.00	-21.75	Horizontal
5	15931.5719	37.13	16.30	53.43	74.00	-20.57	Horizontal
6	16970.5784	35.47	20.57	56.04	74.00	-17.96	Horizontal
7	17628.1047	36.72	18.89	55.61	74.00	-18.39	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16970.5784	26.31	20.57	46.88	54.00	-7.12	Horizontal
2	17628.1047	26.92	18.89	45.81	54.00	-8.19	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5300	Vertical	PASS

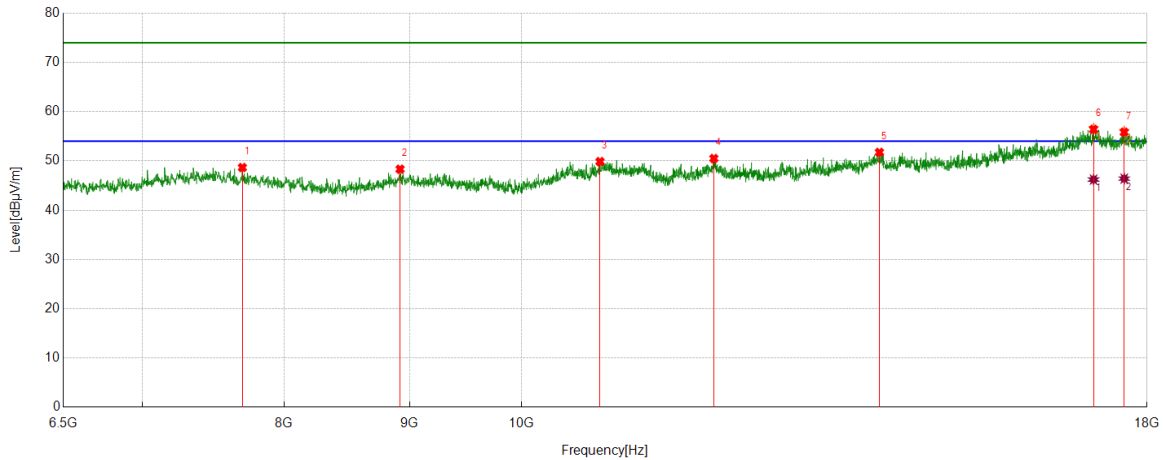

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7692.3654	38.96	9.70	48.66	74.00	-25.34	Vertical
2	8921.1535	39.00	9.33	48.33	74.00	-25.67	Vertical
3	10765.2942	37.25	12.61	49.86	74.00	-24.14	Vertical
4	11980.6634	37.02	13.48	50.50	74.00	-23.50	Vertical
5	13997.3329	36.60	15.14	51.74	74.00	-22.26	Vertical
6	17118.1864	37.32	19.35	56.67	74.00	-17.33	Vertical
7	17618.5198	37.7	18.37	56.07	74.00	-17.93	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17118.1864	26.87	19.35	46.22	54.00	-7.78	Vertical
2	17618.5198	28.04	18.37	46.41	54.00	-7.59	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5320	Horizontal	PASS

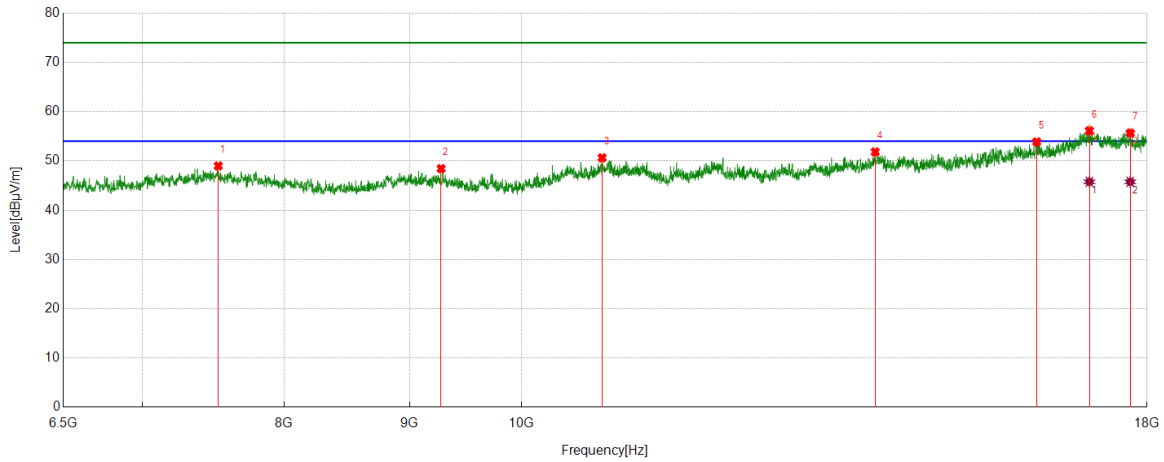

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7519.8366	39.63	9.36	48.99	74.00	-25.01	Horizontal
2	9271.962	39.18	9.26	48.44	74.00	-25.56	Horizontal
3	10786.3811	38.08	12.55	50.63	74.00	-23.37	Horizontal
4	13941.7403	36.82	15.02	51.84	74.00	-22.16	Horizontal
5	16226.7878	35.98	17.89	53.87	74.00	-20.13	Horizontal
6	17051.0918	36.49	19.82	56.31	74.00	-17.69	Horizontal
7	17718.2030	36.56	19.06	55.62	74.00	-18.38	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17051.0918	25.94	19.82	45.76	54.00	-8.24	Horizontal
2	17718.2030	26.70	19.06	45.76	54.00	-8.24	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5320	Vertical	PASS

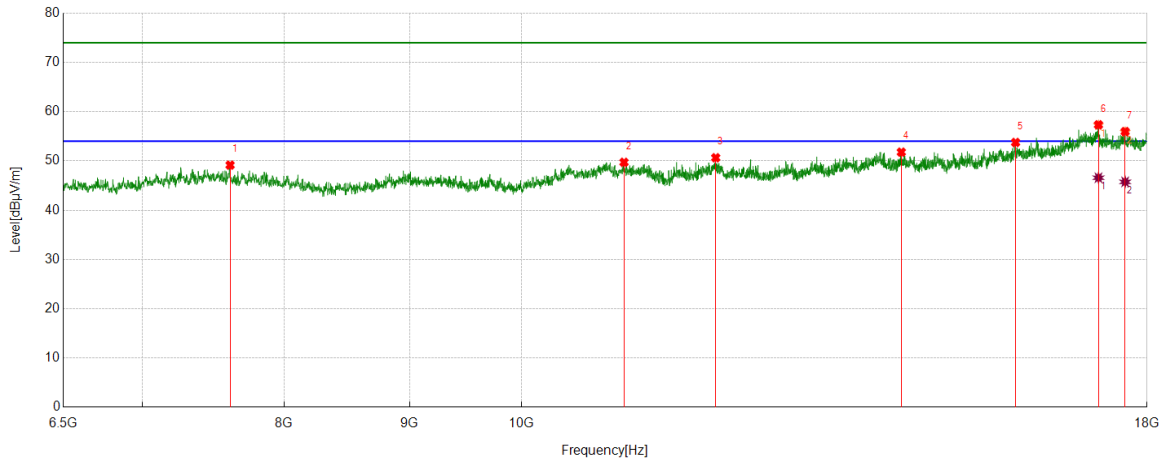

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7604.184	39.60	9.55	49.15	74.00	-24.85	Vertical
2	11010.6684	36.79	12.93	49.72	74.00	-24.28	Vertical
3	12001.7503	37.23	13.41	50.64	74.00	-23.36	Vertical
4	14288.7148	37.09	14.69	51.78	74.00	-22.22	Vertical
5	15908.5681	37.20	16.55	53.75	74.00	-20.25	Vertical
6	17196.7828	37.61	19.65	57.26	74.00	-16.74	Vertical
7	17633.8556	37	18.85	55.85	74.00	-18.15	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17196.7828	26.94	19.65	46.59	54.00	-7.41	Vertical
2	17633.8556	26.90	18.85	45.75	54.00	-8.25	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5500	Horizontal	PASS

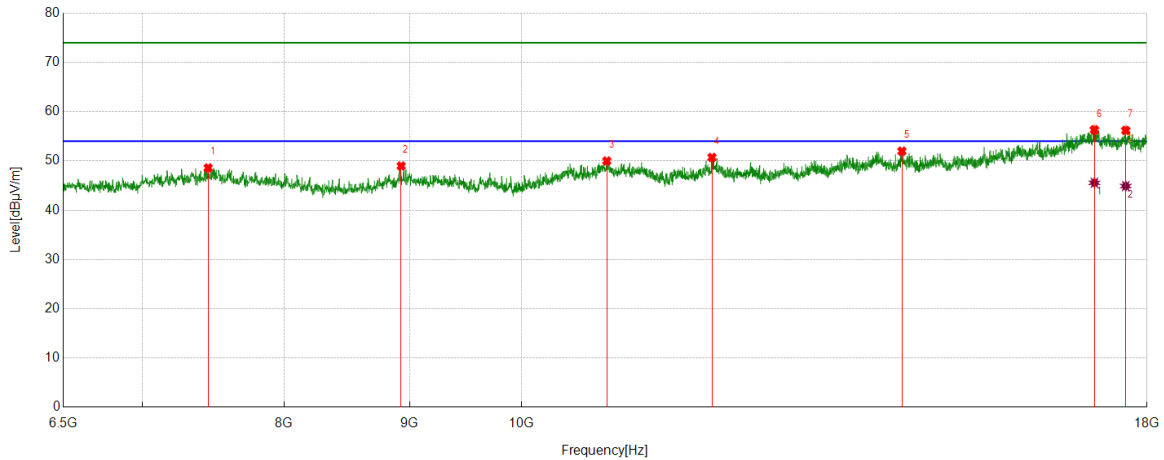

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7448.9082	39.15	9.43	48.58	74.00	-25.42	Horizontal
2	8930.7385	39.61	9.36	48.97	74.00	-25.03	Horizontal
3	10834.3057	37.36	12.63	49.99	74.00	-24.01	Horizontal
4	11959.5766	37.56	13.15	50.71	74.00	-23.29	Horizontal
5	14296.3827	37.39	14.59	51.98	74.00	-22.02	Horizontal
6	17131.6053	37.29	19.03	56.32	74.00	-17.68	Horizontal
7	17643.4406	37.74	18.51	56.25	74.00	-17.75	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17131.6053	26.53	19.03	45.56	54.00	-8.44	Horizontal
2	17643.4406	26.39	18.51	44.90	54.00	-9.10	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5500	Vertical	PASS

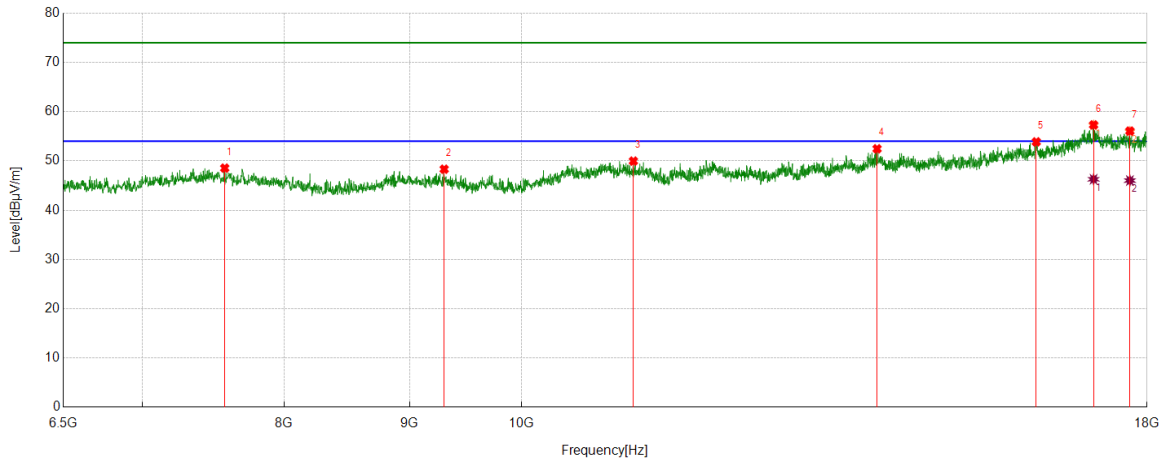

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7565.8443	39.00	9.54	48.54	74.00	-25.46	Vertical
2	9298.7998	39.12	9.20	48.32	74.00	-25.68	Vertical
3	11108.4347	37.48	12.49	49.97	74.00	-24.03	Vertical
4	13966.6611	37.87	14.59	52.46	74.00	-21.54	Vertical
5	16221.0368	36.37	17.50	53.87	74.00	-20.13	Vertical
6	17118.1864	37.91	19.35	57.26	74.00	-16.74	Vertical
7	17712.4521	37.06	18.90	55.96	74.00	-18.04	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17118.1864	26.93	19.35	46.28	54.00	-7.72	Vertical
2	17712.4521	27.12	18.90	46.02	54.00	-7.98	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5520	Horizontal	PASS

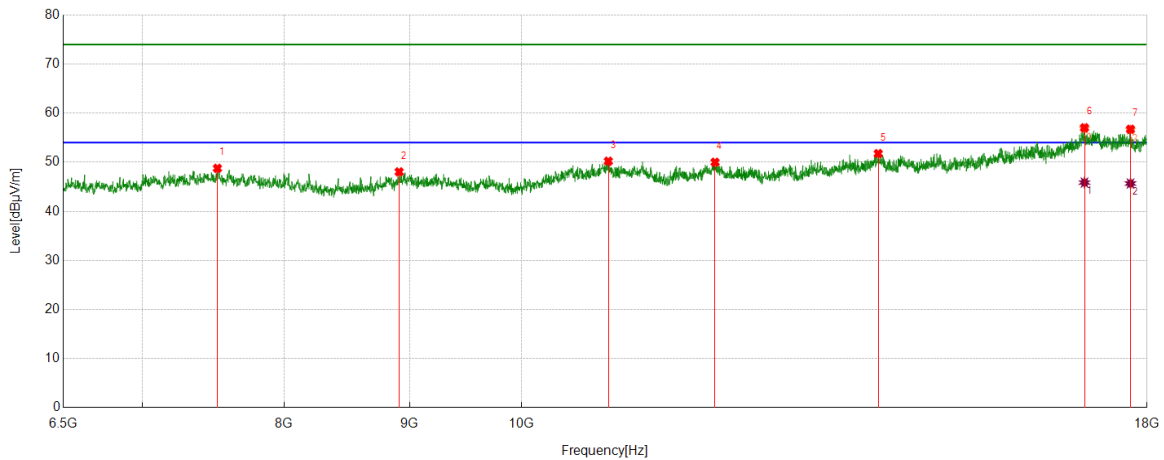

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7514.0857	39.33	9.43	48.76	74.00	-25.24	Horizontal
2	8913.4856	38.72	9.32	48.04	74.00	-25.96	Horizontal
3	10849.6416	37.63	12.58	50.21	74.00	-23.79	Horizontal
4	11994.0823	36.47	13.53	50.00	74.00	-24.00	Horizontal
5	13981.997	37.08	14.68	51.76	74.00	-22.24	Horizontal
6	16972.4954	36.49	20.32	56.81	74.00	-17.19	Horizontal
7	17722.0370	37.56	19.01	56.57	74.00	-17.43	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16972.4954	25.54	20.32	45.86	54.00	-8.14	Horizontal
2	17722.0370	26.66	19.01	45.67	54.00	-8.33	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5520	Vertical	PASS

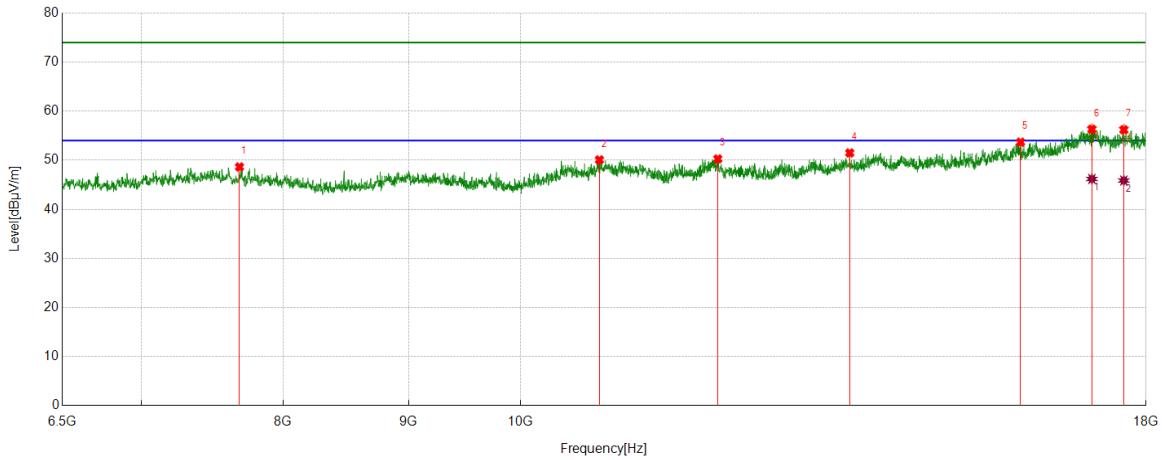

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7678.9465	39.35	9.29	48.64	74.00	-25.36	Vertical
2	10769.1282	37.43	12.65	50.08	74.00	-23.92	Vertical
3	12036.256	37.17	13.10	50.27	74.00	-23.73	Vertical
4	13625.4376	37.97	13.52	51.49	74.00	-22.51	Vertical
5	15998.6664	37.46	16.22	53.68	74.00	-20.32	Vertical
6	17106.6844	37.54	18.90	56.44	74.00	-17.56	Vertical
7	17628.1047	37.51	18.89	56.40	74.00	-17.60	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17106.6844	27.29	18.90	46.19	54.00	-7.81	Vertical
2	17628.1047	26.98	18.89	45.87	54.00	-8.13	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5600	Horizontal	PASS

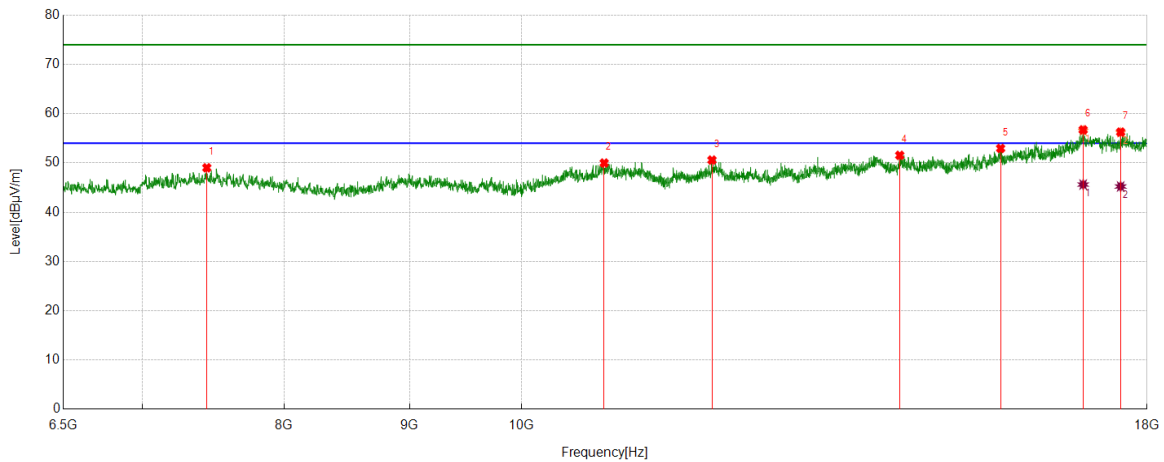

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7439.3232	39.64	9.37	49.01	74.00	-24.99	Horizontal
2	10807.4679	37.49	12.49	49.98	74.00	-24.02	Horizontal
3	11959.5766	37.43	13.15	50.58	74.00	-23.42	Horizontal
4	14267.6279	37.06	14.48	51.54	74.00	-22.46	Horizontal
5	15686.1977	36.58	16.37	52.95	74.00	-21.05	Horizontal
6	16951.4086	37.04	19.48	56.52	74.00	-17.48	Horizontal
7	17559.0932	37.79	18.34	56.13	74.00	-17.87	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16951.4086	26.13	19.48	45.61	54.00	-8.39	Horizontal
2	17559.0932	26.88	18.34	45.22	54.00	-8.78	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5600	Vertical	PASS

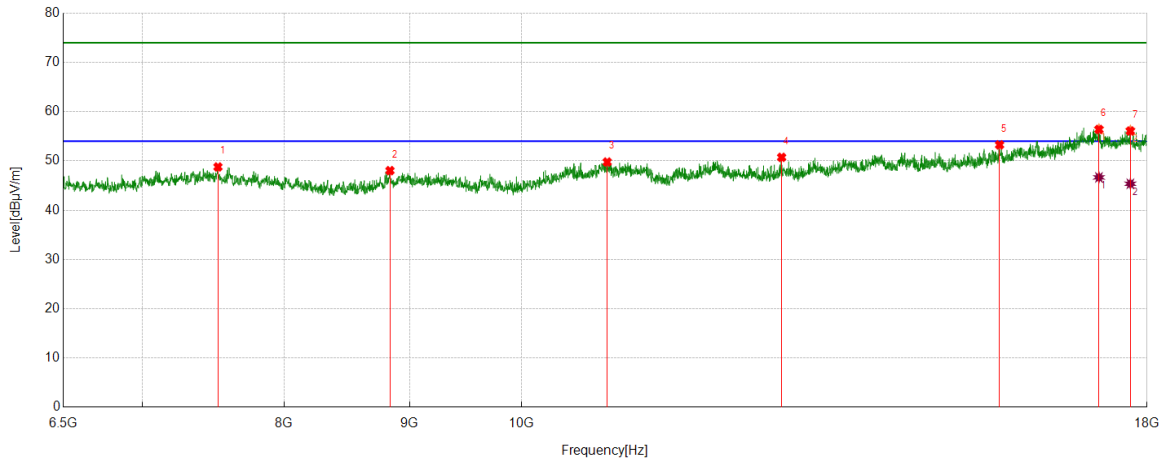

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7517.9197	39.40	9.38	48.78	74.00	-25.22	Vertical
2	8836.8061	39.04	8.99	48.03	74.00	-25.97	Vertical
3	10838.1397	37.10	12.68	49.78	74.00	-24.22	Vertical
4	12768.5448	38.60	12.13	50.73	74.00	-23.27	Vertical
5	15670.8618	36.63	16.63	53.26	74.00	-20.74	Vertical
6	17204.4507	37.02	19.48	56.50	74.00	-17.50	Vertical
7	17720.1200	37.13	19.11	56.24	74.00	-17.76	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17204.4507	27.18	19.48	46.66	54.00	-7.34	Vertical
2	17720.1200	26.25	19.11	45.36	54.00	-8.64	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5680	Horizontal	PASS

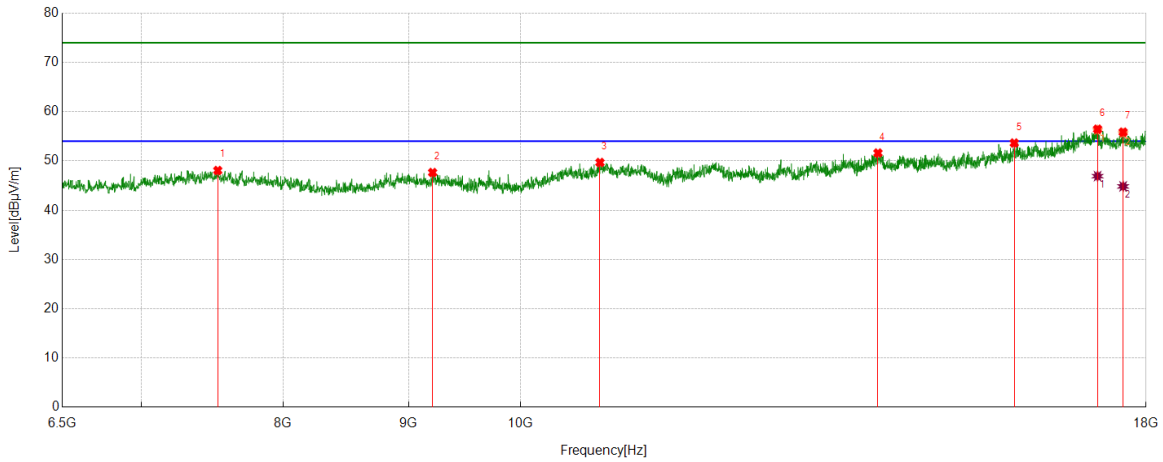

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7523.6706	38.62	9.44	48.06	74.00	-25.94	Horizontal
2	9206.7845	38.42	9.22	47.64	74.00	-26.36	Horizontal
3	10774.8791	37.09	12.59	49.68	74.00	-24.32	Horizontal
4	13991.5819	36.62	14.98	51.60	74.00	-22.40	Horizontal
5	15902.8171	37.13	16.50	53.63	74.00	-20.37	Horizontal
6	17198.6998	36.45	19.77	56.22	74.00	-17.78	Horizontal
7	17616.6028	37.15	18.44	55.59	74.00	-18.41	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17198.6998	27.14	19.77	46.91	54.00	-7.09	Horizontal
2	17616.6028	26.39	18.44	44.83	54.00	-9.17	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5680	Vertical	PASS

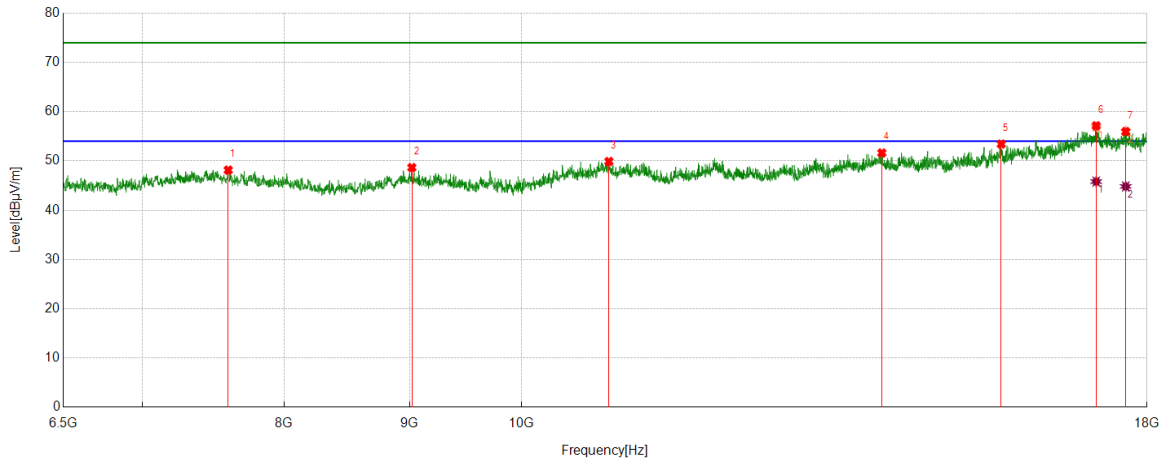

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7590.7651	38.40	9.74	48.14	74.00	-25.86	Vertical
2	9020.8368	39.02	9.63	48.65	74.00	-25.35	Vertical
3	10855.3926	37.15	12.74	49.89	74.00	-24.11	Vertical
4	14029.9217	36.63	14.99	51.62	74.00	-22.38	Vertical
5	15695.7826	37.02	16.40	53.42	74.00	-20.58	Vertical
6	17160.3601	36.94	19.94	56.88	74.00	-17.12	Vertical
7	17643.4406	37.47	18.51	55.98	74.00	-18.02	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17160.3601	25.87	19.94	45.81	54.00	-8.19	Vertical
2	17643.4406	26.31	18.51	44.82	54.00	-9.18	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5700	Horizontal	PASS

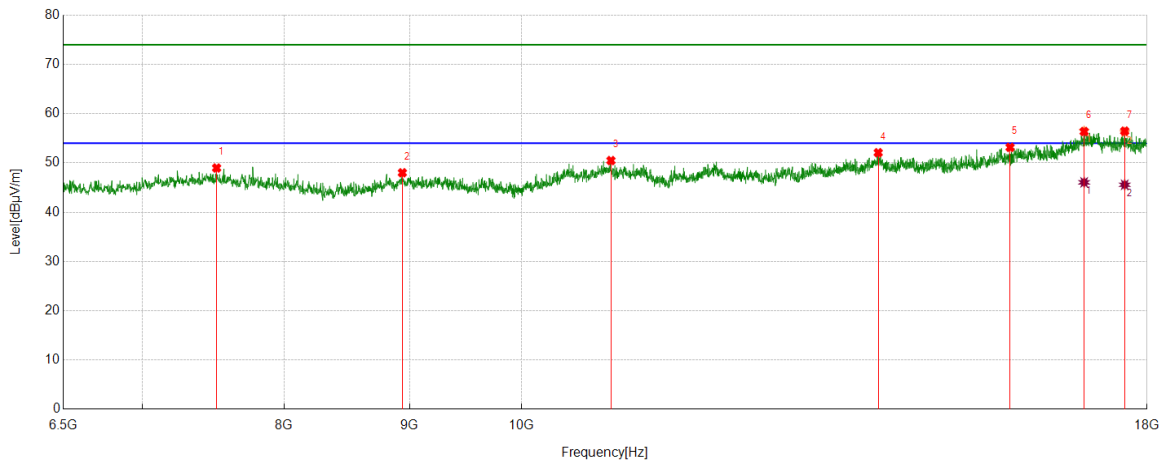

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7508.3347	39.50	9.47	48.97	74.00	-25.03	Horizontal
2	8940.3234	38.57	9.43	48.00	74.00	-26.00	Horizontal
3	10876.4794	37.79	12.69	50.48	74.00	-23.52	Horizontal
4	13981.997	37.40	14.68	52.08	74.00	-21.92	Horizontal
5	15826.1377	37.40	15.76	53.16	74.00	-20.84	Horizontal
6	16966.7445	36.14	20.31	56.45	74.00	-17.55	Horizontal
7	17626.1877	37.46	18.76	56.22	74.00	-17.78	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16966.7445	25.75	20.31	46.06	54.00	-7.94	Horizontal
2	17626.1877	26.81	18.76	45.57	54.00	-8.43	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5700	Vertical	PASS

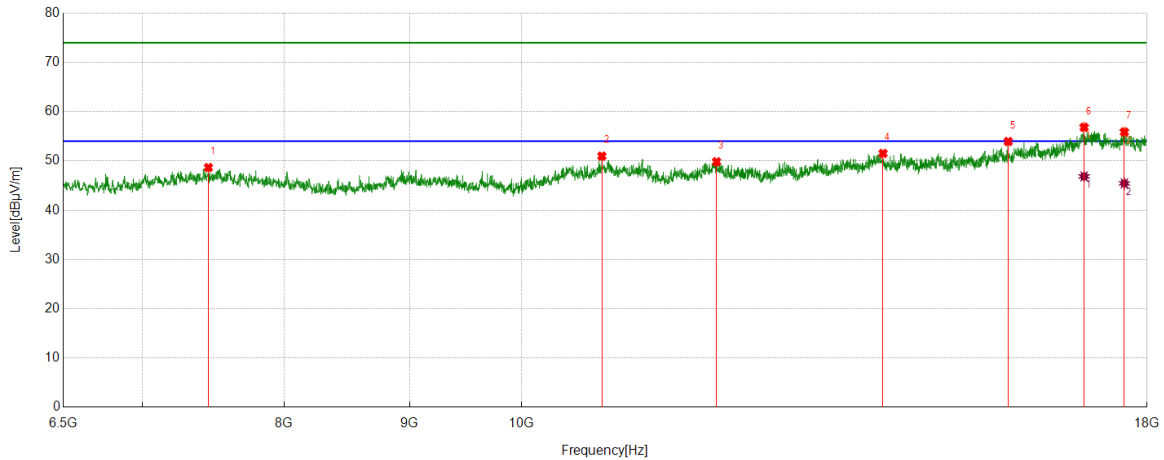

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7450.8251	39.22	9.44	48.66	74.00	-25.34	Vertical
2	10784.4641	38.43	12.55	50.98	74.00	-23.02	Vertical
3	12011.3352	36.50	13.33	49.83	74.00	-24.17	Vertical
4	14045.2575	36.72	14.80	51.52	74.00	-22.48	Vertical
5	15799.2999	37.77	16.17	53.94	74.00	-20.06	Vertical
6	16966.7445	36.57	20.31	56.88	74.00	-17.12	Vertical
7	17620.4367	37.54	18.35	55.89	74.00	-18.11	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16966.7445	26.54	20.31	46.85	54.00	-7.15	Vertical
2	17620.4367	27.09	18.35	45.44	54.00	-8.56	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5720	Horizontal	PASS

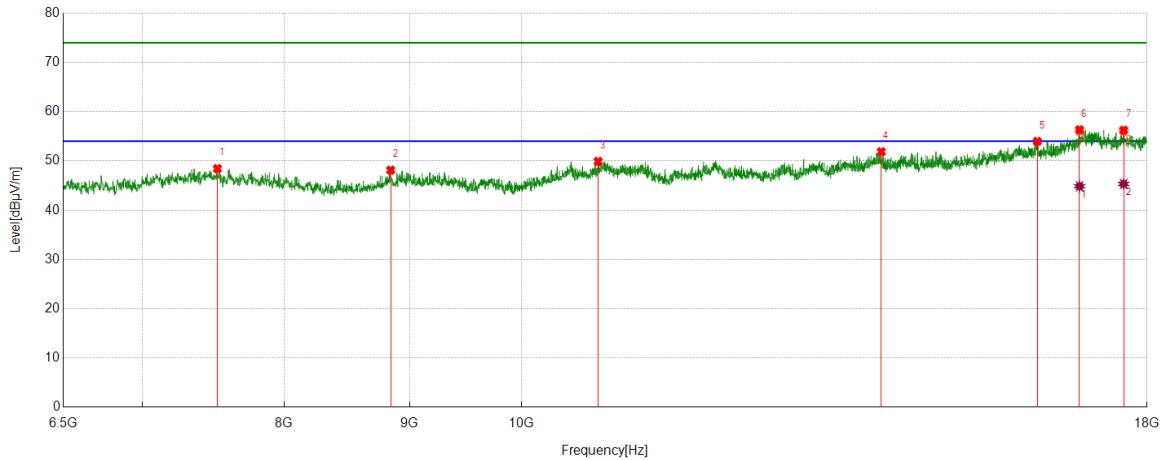

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7514.0857	39.01	9.43	48.44	74.00	-25.56	Horizontal
2	8842.5571	39.18	8.95	48.13	74.00	-25.87	Horizontal
3	10746.1244	37.39	12.51	49.90	74.00	-24.10	Horizontal
4	14022.2537	36.84	15.02	51.86	74.00	-22.14	Horizontal
5	16236.3727	35.84	18.12	53.96	74.00	-20.04	Horizontal
6	16893.8990	37.73	18.29	56.02	74.00	-17.98	Horizontal
7	17608.9348	37.35	18.65	56.00	74.00	-18.00	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16893.8990	26.57	18.29	44.86	54.00	-9.14	Horizontal
2	17608.9348	26.68	18.65	45.33	54.00	-8.67	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5720	Vertical	PASS

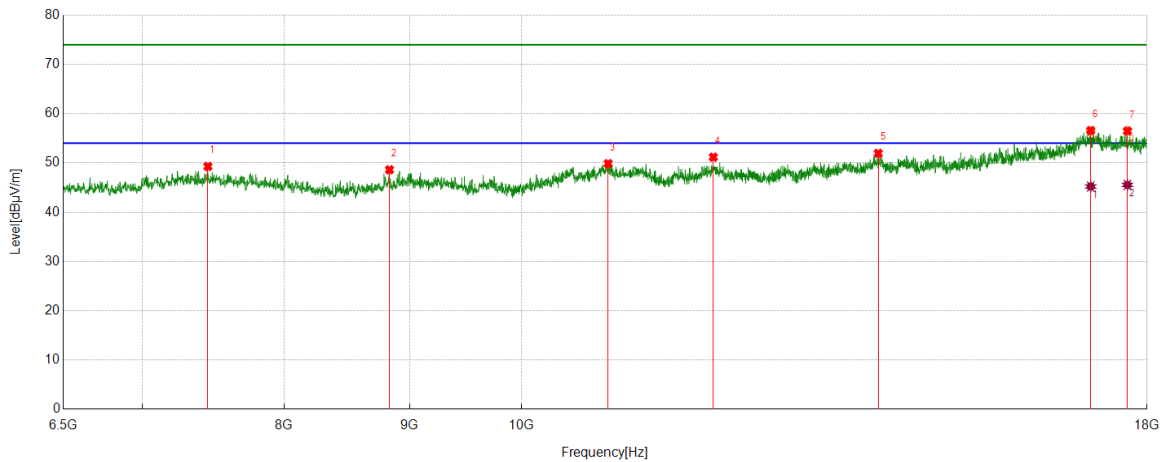

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7446.9912	39.88	9.41	49.29	74.00	-24.71	Vertical
2	8832.9722	39.58	9.03	48.61	74.00	-25.39	Vertical
3	10847.7246	37.25	12.61	49.86	74.00	-24.14	Vertical
4	11974.9125	37.81	13.36	51.17	74.00	-22.83	Vertical
5	13981.997	37.27	14.68	51.95	74.00	-22.05	Vertical
6	17072.1787	36.1	20.21	56.31	74.00	-17.69	Vertical
7	17672.1954	37.34	19.15	56.49	74.00	-17.51	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17072.1787	25.00	20.21	45.21	54.00	-8.79	Vertical
2	17672.1954	26.39	19.15	45.54	54.00	-8.46	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5745	Horizontal	PASS

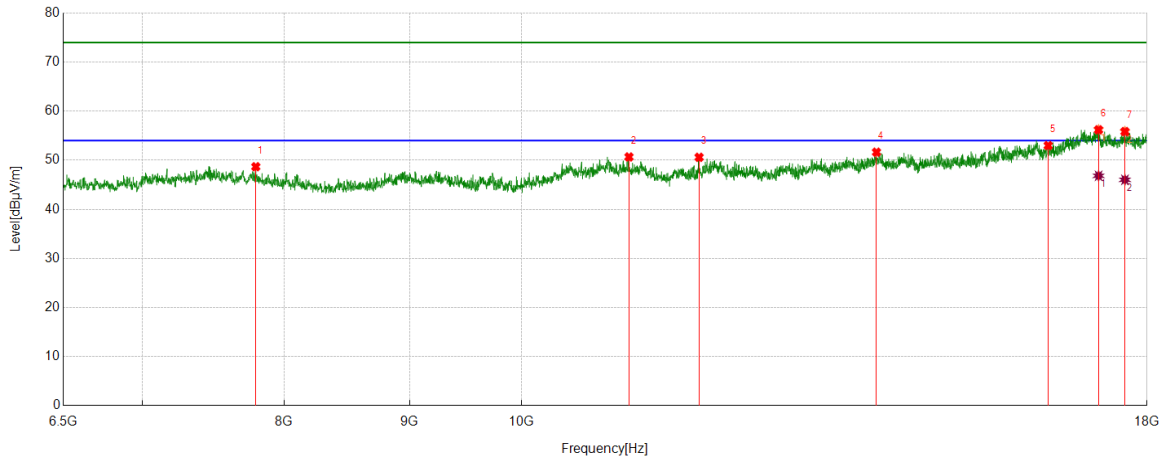

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7790.1317	39.90	8.78	48.68	74.00	-25.32	Horizontal
2	11062.4271	38.07	12.60	50.67	74.00	-23.33	Horizontal
3	11815.8026	37.86	12.74	50.60	74.00	-23.40	Horizontal
4	13958.9932	37.11	14.53	51.64	74.00	-22.36	Horizontal
5	16403.1505	36.32	16.67	52.99	74.00	-21.01	Horizontal
6	17198.6998	36.48	19.77	56.25	74.00	-17.75	Horizontal
7	17630.0217	36.84	19.02	55.86	74.00	-18.14	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17198.6998	27.06	19.77	46.83	54.00	-7.17	Horizontal
2	17630.0217	27.00	19.02	46.02	54.00	-7.98	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5745	Vertical	PASS

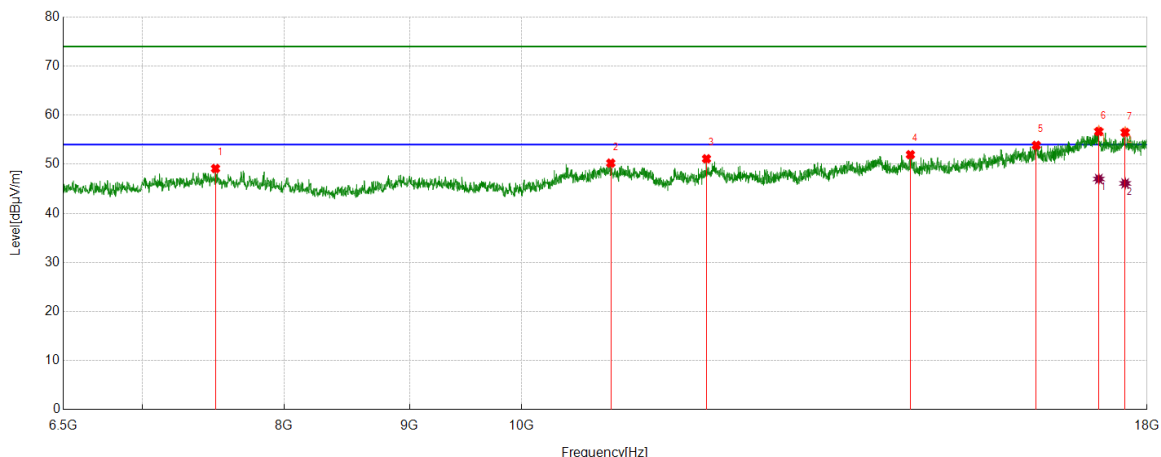

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7500.6668	39.71	9.41	49.12	74.00	-24.88	Vertical
2	10874.5624	37.52	12.71	50.23	74.00	-23.77	Vertical
3	11898.233	38.24	12.87	51.11	74.00	-22.89	Vertical
4	14411.4019	37.78	14.17	51.95	74.00	-22.05	Vertical
5	16221.0368	36.35	17.50	53.85	74.00	-20.15	Vertical
6	17202.5338	37.23	19.64	56.87	74.00	-17.13	Vertical
7	17633.8556	37.79	18.85	56.64	74.00	-17.36	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17202.5338	27.36	19.64	47.00	54.00	-7.00	Vertical
2	17633.8556	27.25	18.85	46.10	54.00	-7.90	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5785	Horizontal	PASS

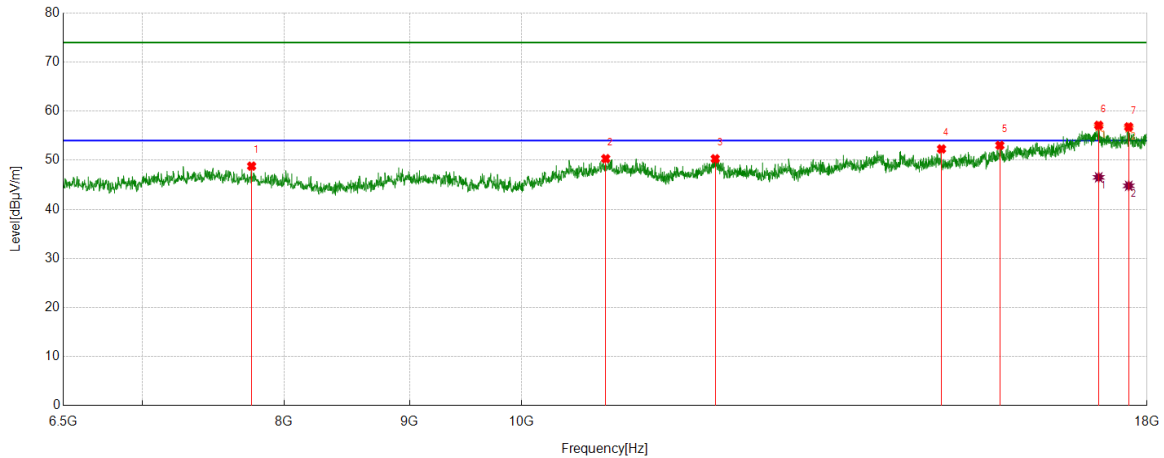

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7759.4599	39.79	9.01	48.80	74.00	-25.20	Horizontal
2	10822.8038	37.74	12.58	50.32	74.00	-23.68	Horizontal
3	11995.9993	36.80	13.50	50.30	74.00	-23.70	Horizontal
4	14838.8898	37.85	14.44	52.29	74.00	-21.71	Horizontal
5	15674.6958	36.59	16.44	53.03	74.00	-20.97	Horizontal
6	17200.6168	37.02	19.80	56.82	74.00	-17.18	Horizontal
7	17693.2822	37.98	18.58	56.56	74.00	-17.44	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17200.6168	26.72	19.80	46.52	54.00	-7.48	Horizontal
2	17693.2822	26.21	18.58	44.79	54.00	-9.21	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5785	Vertical	PASS

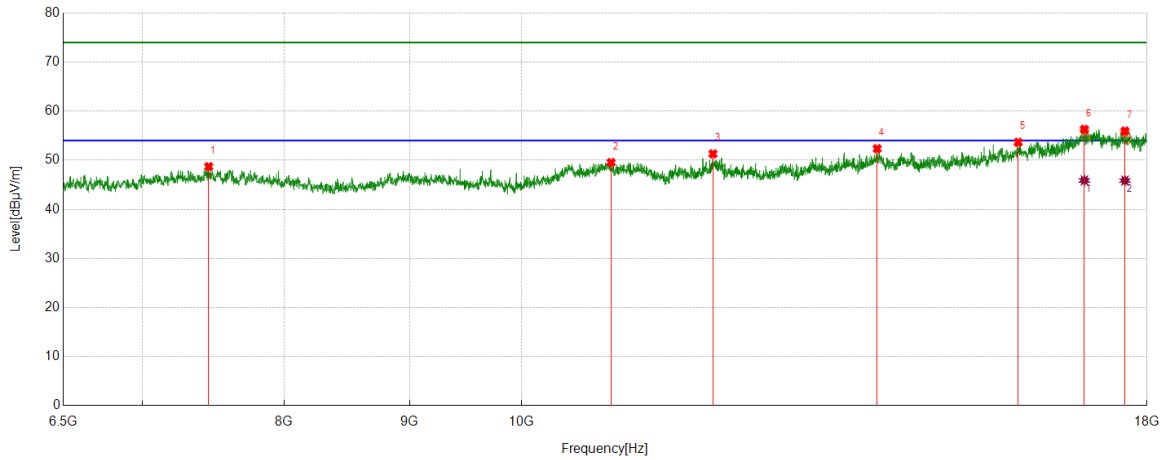

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7452.7421	39.26	9.44	48.70	74.00	-25.30	Vertical
2	10878.3964	36.88	12.66	49.54	74.00	-24.46	Vertical
3	11971.0785	38.03	13.27	51.30	74.00	-22.70	Vertical
4	13968.5781	37.74	14.62	52.36	74.00	-21.64	Vertical
5	15946.9078	37.16	16.50	53.66	74.00	-20.34	Vertical
6	16970.5784	35.47	20.57	56.04	74.00	-17.96	Vertical
7	17630.0217	36.64	19.02	55.66	74.00	-18.34	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16970.5784	25.32	20.57	45.89	54.00	-8.11	Vertical
2	17630.0217	26.84	19.02	45.86	54.00	-8.14	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5825	Horizontal	PASS

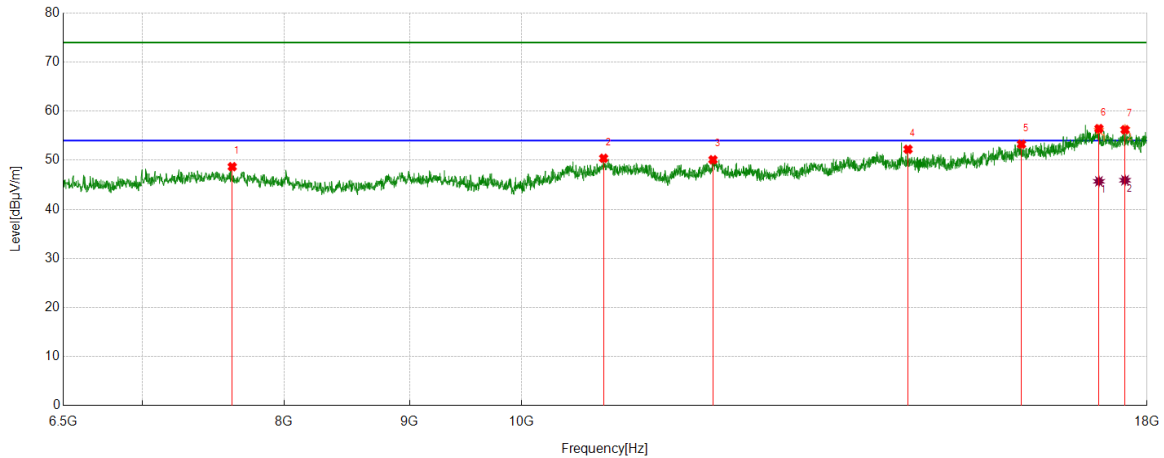

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7619.5199	39.49	9.19	48.68	74.00	-25.32	Horizontal
2	10801.717	37.95	12.45	50.40	74.00	-23.60	Horizontal
3	11971.0785	36.83	13.27	50.10	74.00	-23.90	Horizontal
4	14378.8131	38.03	14.20	52.23	74.00	-21.77	Horizontal
5	15996.7495	37.04	16.22	53.26	74.00	-20.74	Horizontal
6	17204.4507	36.67	19.48	56.15	74.00	-17.85	Horizontal
7	17631.9387	37.33	18.94	56.27	74.00	-17.73	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17204.4507	26.22	19.48	45.70	54.00	-8.30	Horizontal
2	17631.9387	26.98	18.94	45.92	54.00	-8.08	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC20	5825	Vertical	PASS

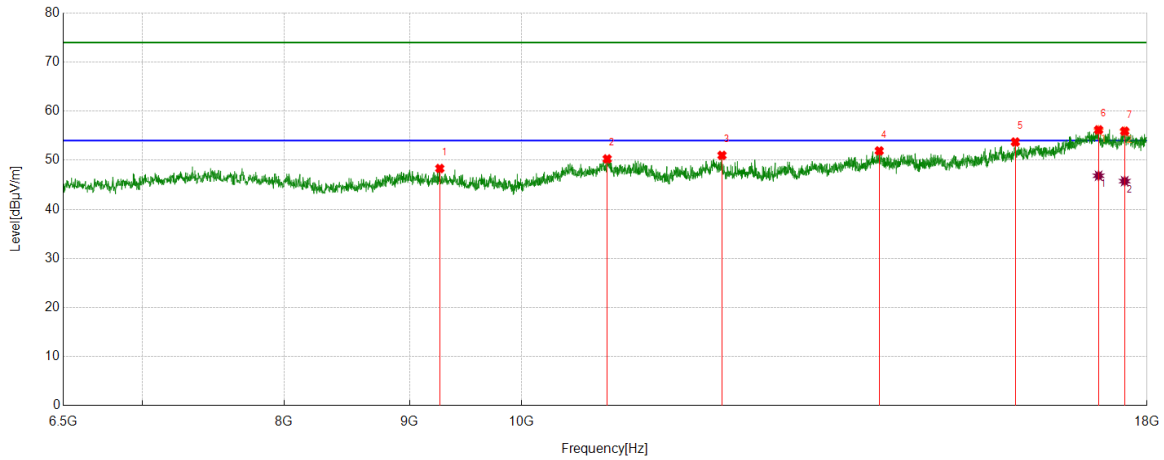

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	9260.4601	39.07	9.25	48.32	74.00	-25.68	Vertical
2	10838.1397	37.59	12.68	50.27	74.00	-23.73	Vertical
3	12072.6788	37.75	13.24	50.99	74.00	-23.01	Vertical
4	13995.4159	36.82	15.09	51.91	74.00	-22.09	Vertical
5	15904.7341	37.21	16.51	53.72	74.00	-20.28	Vertical
6	17198.6998	36.28	19.77	56.05	74.00	-17.95	Vertical
7	17626.1877	37.09	18.76	55.85	74.00	-18.15	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17198.6998	27.07	19.77	46.84	54.00	-7.16	Vertical
2	17626.1877	26.98	18.76	45.74	54.00	-8.26	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5190	Horizontal	PASS

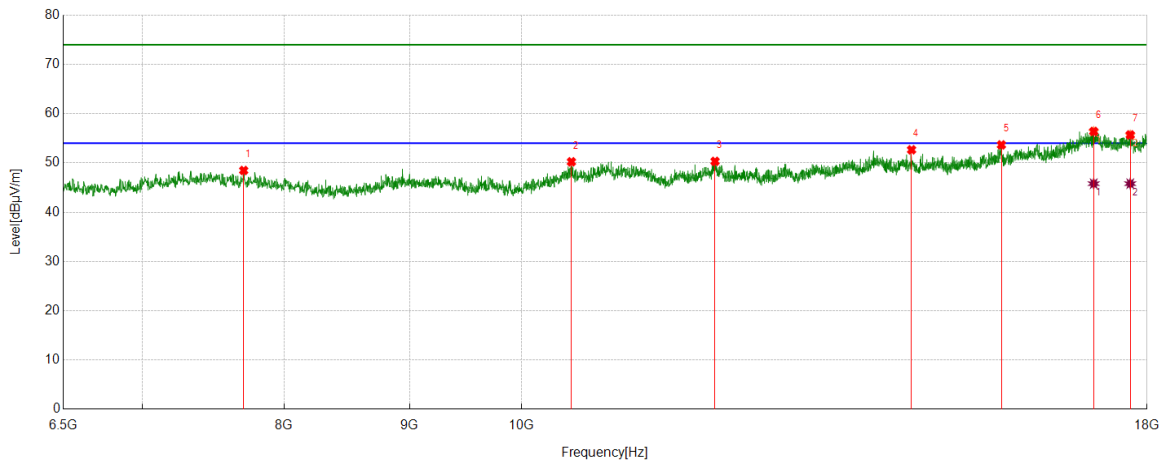

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7701.9503	39.18	9.29	48.47	74.00	-25.53	Horizontal
2	10479.6633	38.05	12.18	50.23	74.00	-23.77	Horizontal
3	11994.0823	36.79	13.53	50.32	74.00	-23.68	Horizontal
4	14426.7378	38.22	14.44	52.66	74.00	-21.34	Horizontal
5	15697.6996	37.29	16.37	53.66	74.00	-20.34	Horizontal
6	17120.1034	36.94	19.42	56.36	74.00	-17.64	Horizontal
7	17718.2030	36.57	19.06	55.63	74.00	-18.37	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17120.1034	26.37	19.42	45.79	54.00	-8.21	Horizontal
2	17718.2030	26.73	19.06	45.79	54.00	-8.21	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5190	Vertical	PASS

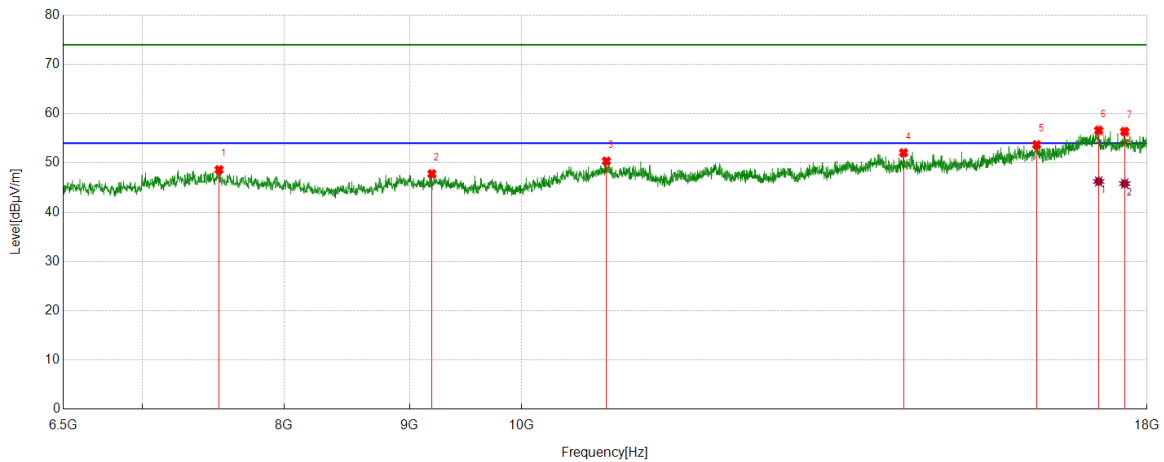

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7525.5876	39.13	9.49	48.62	74.00	-25.38	Vertical
2	9191.4486	38.52	9.27	47.79	74.00	-26.21	Vertical
3	10830.4717	37.79	12.57	50.36	74.00	-23.64	Vertical
4	14319.3866	37.27	14.79	52.06	74.00	-21.94	Vertical
5	16226.7878	35.80	17.89	53.69	74.00	-20.31	Vertical
6	17200.6168	36.81	19.80	56.61	74.00	-17.39	Vertical
7	17626.1877	37.57	18.76	56.33	74.00	-17.67	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17200.6168	26.45	19.80	46.25	54.00	-7.75	Vertical
2	17626.1877	27.03	18.76	45.79	54.00	-8.21	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5230	Horizontal	PASS

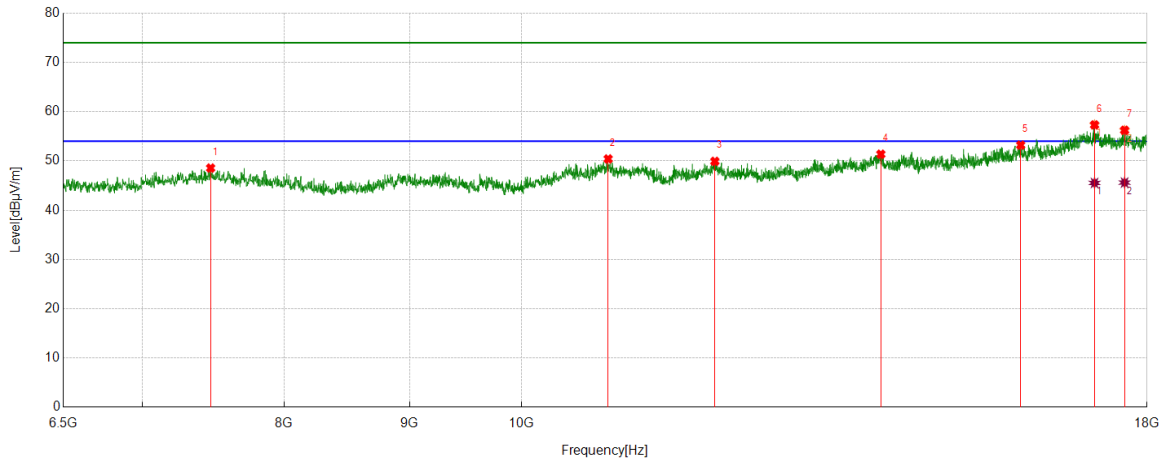

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7466.161	38.95	9.60	48.55	74.00	-25.45	Horizontal
2	10847.7246	37.80	12.61	50.41	74.00	-23.59	Horizontal
3	11992.1654	36.35	13.57	49.92	74.00	-24.08	Horizontal
4	14016.5028	36.30	15.06	51.36	74.00	-22.64	Horizontal
5	15985.2475	37.03	16.17	53.20	74.00	-20.80	Horizontal
6	17133.5223	38.24	19.08	57.32	74.00	-16.68	Horizontal
7	17624.2707	37.57	18.62	56.19	74.00	-17.81	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17133.5223	26.45	19.08	45.53	54.00	-8.47	Horizontal
2	17624.2707	26.98	18.62	45.60	54.00	-8.40	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5230	Vertical	PASS

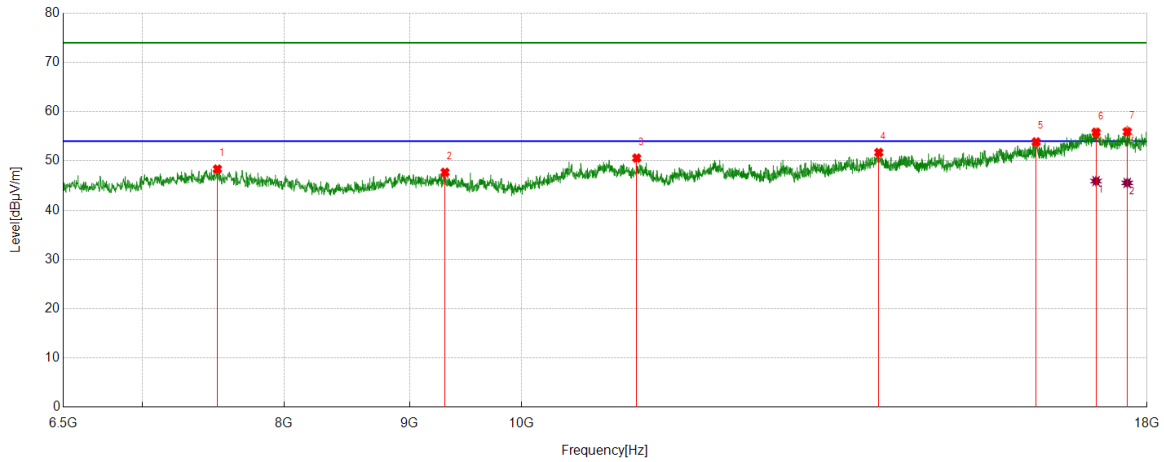

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7514.0857	38.91	9.43	48.34	74.00	-25.66	Vertical
2	9306.4677	38.57	9.12	47.69	74.00	-26.31	Vertical
3	11142.9405	38.15	12.43	50.58	74.00	-23.42	Vertical
4	13989.6649	36.79	14.92	51.71	74.00	-22.29	Vertical
5	16219.1199	36.50	17.36	53.86	74.00	-20.14	Vertical
6	17158.4431	35.83	19.87	55.70	74.00	-18.30	Vertical
7	17668.3614	36.95	19.19	56.14	74.00	-17.86	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17158.4431	26.04	19.87	45.91	54.00	-8.09	Vertical
2	17668.3614	26.35	19.19	45.54	54.00	-8.46	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5270	Horizontal	PASS

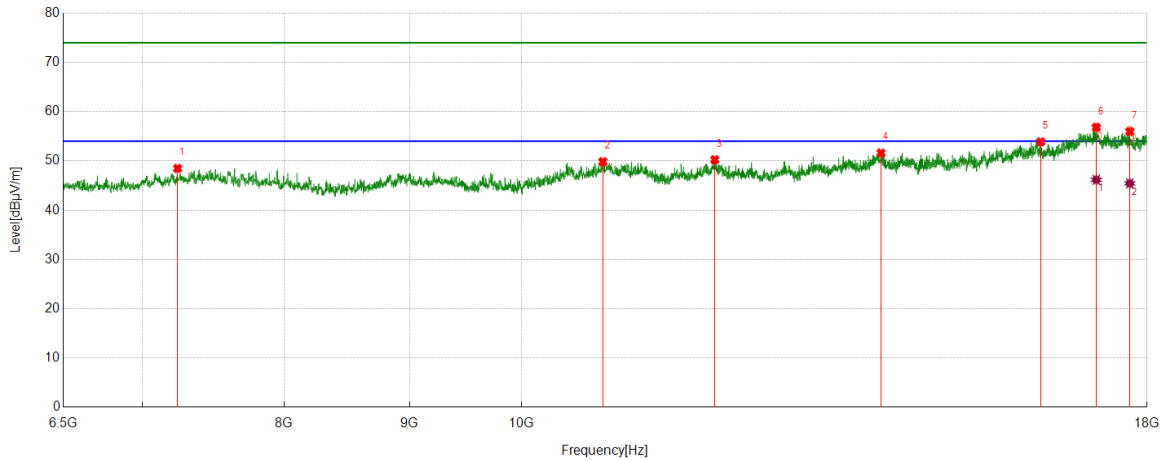

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7238.0397	38.66	9.82	48.48	74.00	-25.52	Horizontal
2	10794.049	37.34	12.51	49.85	74.00	-24.15	Horizontal
3	11990.2484	36.65	13.60	50.25	74.00	-23.75	Horizontal
4	14018.4197	36.57	15.04	51.61	74.00	-22.39	Horizontal
5	16288.1314	37.73	16.15	53.88	74.00	-20.12	Horizontal
6	17162.2770	36.88	19.84	56.72	74.00	-17.28	Horizontal
7	17710.5351	37.28	18.85	56.13	74.00	-17.87	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17162.2770	26.33	19.84	46.17	54.00	-7.83	Horizontal
2	17710.5351	26.59	18.85	45.44	54.00	-8.56	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5270	Vertical	PASS

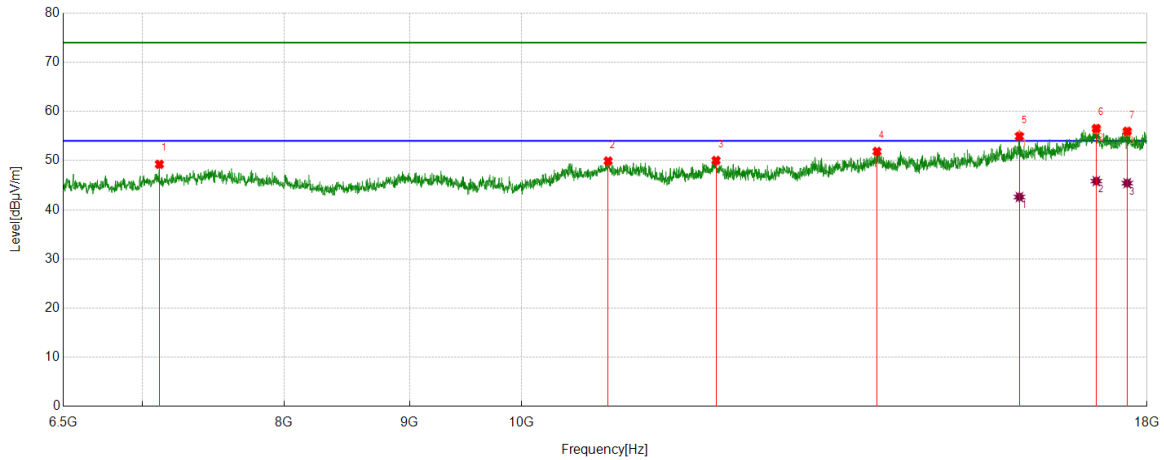

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7115.3526	39.83	9.41	49.24	74.00	-24.76	Vertical
2	10847.7246	37.30	12.61	49.91	74.00	-24.09	Vertical
3	12005.5843	36.65	13.38	50.03	74.00	-23.97	Vertical
4	13966.6611	37.27	14.59	51.86	74.00	-22.14	Vertical
5	15966.0777	38.99	15.93	54.92	74.00	-19.08	Vertical
6	17162.2770	36.5	19.84	56.34	74.00	-17.66	Vertical
7	17668.3614	36.54	19.19	55.73	74.00	-18.27	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	15966.0777	26.66	15.93	42.59	54.00	-11.41	Vertical
2	17162.2770	25.99	19.84	45.83	54.00	-8.17	Vertical
3	17668.3614	26.22	19.19	45.41	54.00	-8.59	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5310	Horizontal	PASS

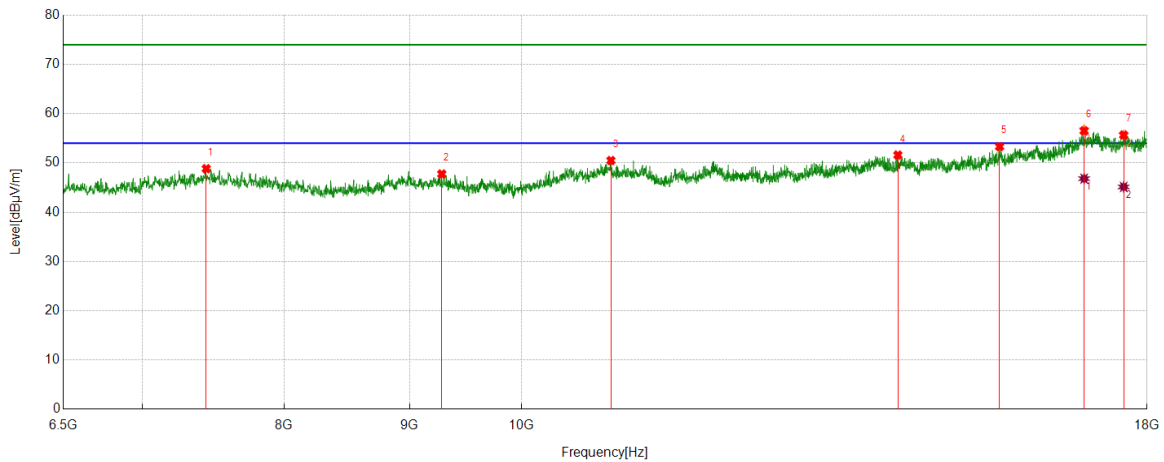

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7435.4892	39.42	9.41	48.83	74.00	-25.17	Horizontal
2	9277.713	38.44	9.31	47.75	74.00	-26.25	Horizontal
3	10876.4794	37.80	12.69	50.49	74.00	-23.51	Horizontal
4	14242.7071	37.28	14.32	51.60	74.00	-22.40	Horizontal
5	15670.8618	36.69	16.63	53.32	74.00	-20.68	Horizontal
6	16966.7445	36.46	20.31	56.77	74.00	-17.23	Horizontal
7	17608.9348	37.02	18.65	55.67	74.00	-18.33	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16966.7445	26.50	20.31	46.81	54.00	-7.19	Horizontal
2	17608.9348	26.48	18.65	45.13	54.00	-8.87	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5310	Vertical	PASS

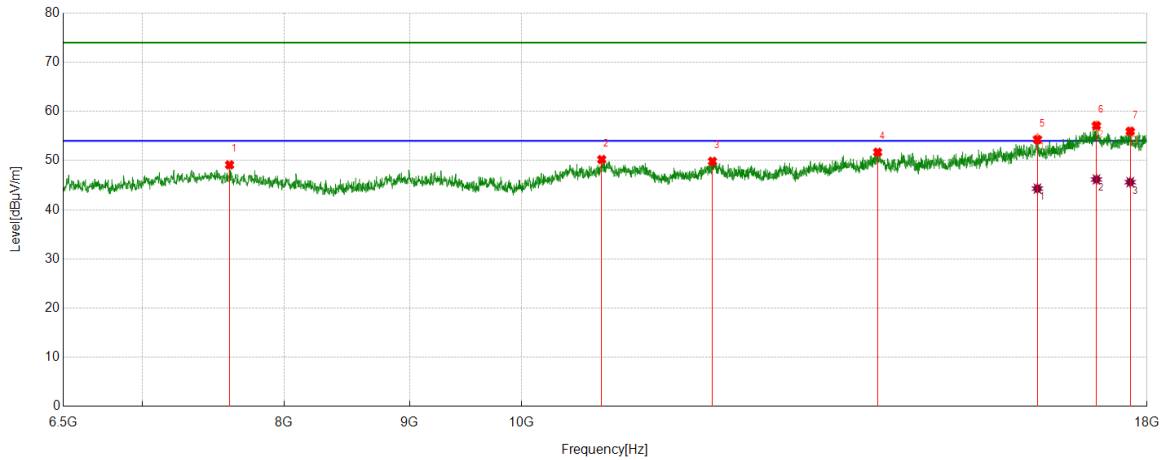

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7600.3501	39.48	9.65	49.13	74.00	-24.87	Vertical
2	10782.5471	37.68	12.54	50.22	74.00	-23.78	Vertical
3	11965.3276	36.65	13.20	49.85	74.00	-24.15	Vertical
4	13974.3291	37.08	14.62	51.70	74.00	-22.30	Vertical
5	16238.2897	36.12	18.13	54.25	74.00	-19.75	Vertical
6	17164.1940	37.34	19.74	57.08	74.00	-16.92	Vertical
7	17718.2030	36.83	19.06	55.89	74.00	-18.11	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16238.2897	26.17	18.13	44.30	54.00	-9.70	Vertical
2	17164.1940	26.42	19.74	46.16	54.00	-7.84	Vertical
3	17718.2030	26.55	19.06	45.61	54.00	-8.39	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5510	Horizontal	PASS

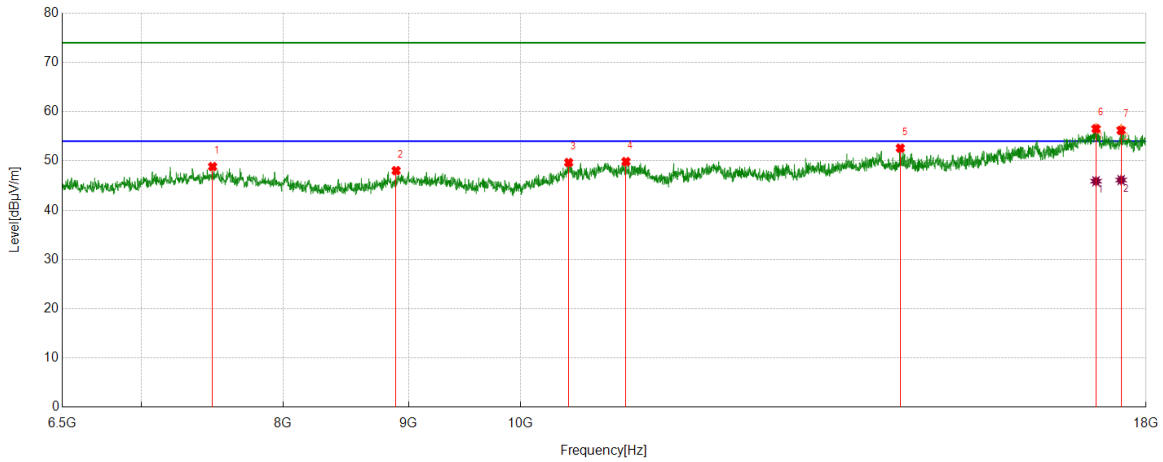

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7487.2479	39.22	9.63	48.85	74.00	-25.15	Horizontal
2	8896.2327	38.95	9.08	48.03	74.00	-25.97	Horizontal
3	10462.4104	37.83	11.84	49.67	74.00	-24.33	Horizontal
4	11041.3402	37.16	12.70	49.86	74.00	-24.14	Horizontal
5	14288.7148	37.90	14.69	52.59	74.00	-21.41	Horizontal
6	17173.7790	37.31	19.32	56.63	74.00	-17.37	Horizontal
7	17584.0140	37.85	18.63	56.48	74.00	-17.52	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17173.7790	26.56	19.32	45.88	54.00	-8.12	Horizontal
2	17584.0140	27.49	18.63	46.12	54.00	-7.88	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5510	Vertical	PASS

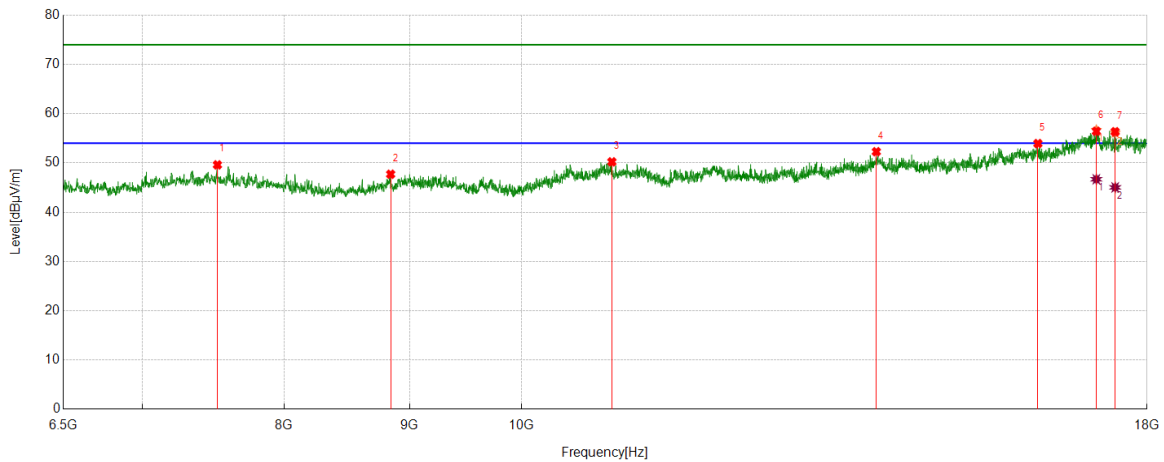

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7514.0857	40.18	9.43	49.61	74.00	-24.39	Vertical
2	8842.5571	38.76	8.95	47.71	74.00	-26.29	Vertical
3	10886.0643	37.68	12.54	50.22	74.00	-23.78	Vertical
4	13957.0762	37.73	14.55	52.28	74.00	-21.72	Vertical
5	16245.9577	36.45	17.49	53.94	74.00	-20.06	Vertical
6	17162.2770	36.86	19.84	56.70	74.00	-17.30	Vertical
7	17468.9948	37.42	18.66	56.08	74.00	-17.92	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17162.2770	26.84	19.84	46.68	54.00	-7.32	Vertical
2	17468.9948	26.37	18.66	45.03	54.00	-8.97	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5550	Horizontal	PASS

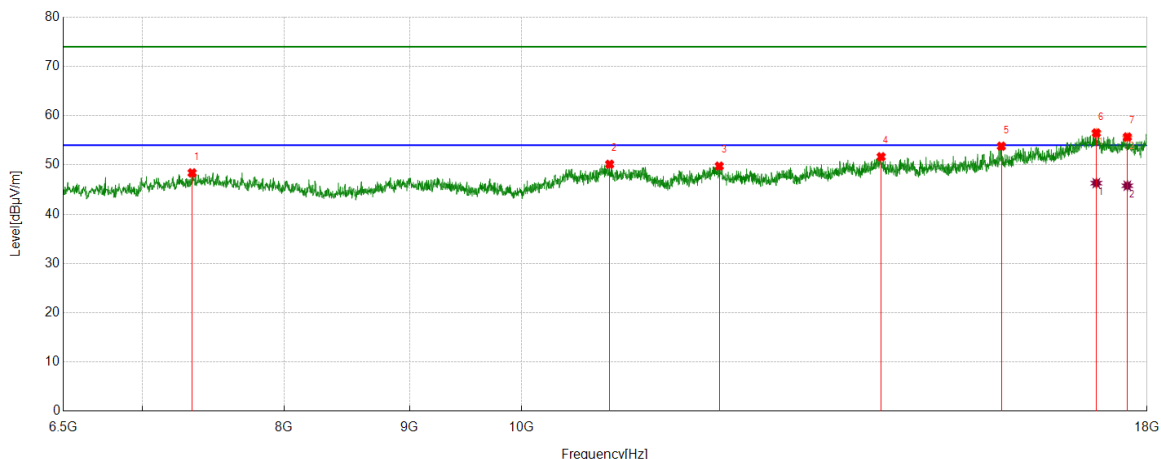

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7337.723	38.81	9.57	48.38	74.00	-25.62	Horizontal
2	10863.0605	37.28	12.85	50.13	74.00	-23.87	Horizontal
3	12042.007	36.70	13.05	49.75	74.00	-24.25	Horizontal
4	14020.3367	36.63	15.02	51.65	74.00	-22.35	Horizontal
5	15697.6996	37.43	16.37	53.80	74.00	-20.20	Horizontal
6	17162.2770	36.58	19.84	56.42	74.00	-17.58	Horizontal
7	17670.2784	36.19	19.29	55.48	74.00	-18.52	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17162.2770	26.46	19.84	46.30	54.00	-7.70	Horizontal
2	17670.2784	26.49	19.29	45.78	54.00	-8.22	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5550	Vertical	PASS

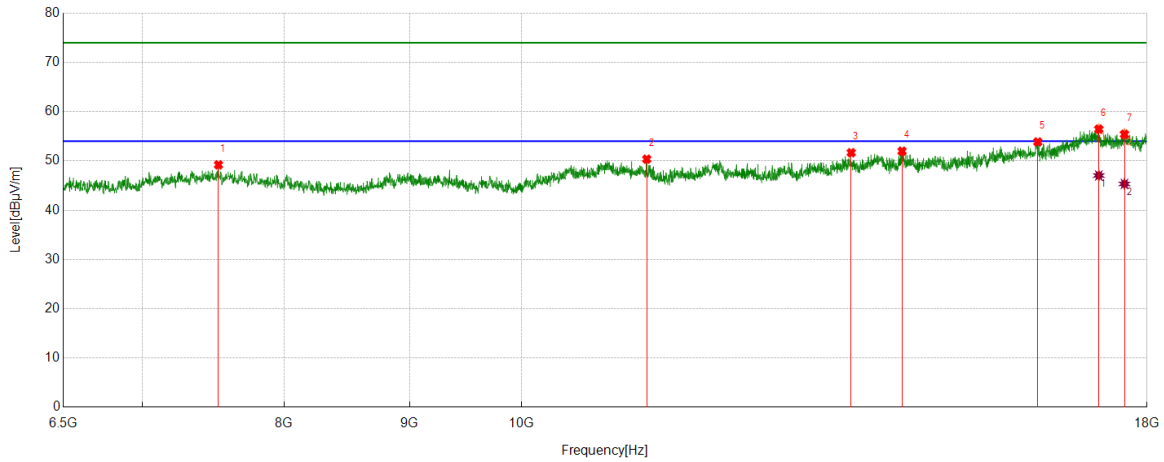

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7521.7536	39.81	9.40	49.21	74.00	-24.79	Vertical
2	11248.3747	38.16	12.20	50.36	74.00	-23.64	Vertical
3	13631.1885	38.08	13.59	51.67	74.00	-22.33	Vertical
4	14298.2997	37.44	14.54	51.98	74.00	-22.02	Vertical
5	16244.0407	36.15	17.70	53.85	74.00	-20.15	Vertical
6	17202.5338	36.88	19.64	56.52	74.00	-17.48	Vertical
7	17622.3537	37.05	18.49	55.54	74.00	-18.46	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17202.5338	27.40	19.64	47.04	54.00	-6.96	Vertical
2	17622.3537	26.84	18.49	45.33	54.00	-8.67	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5590	Horizontal	PASS

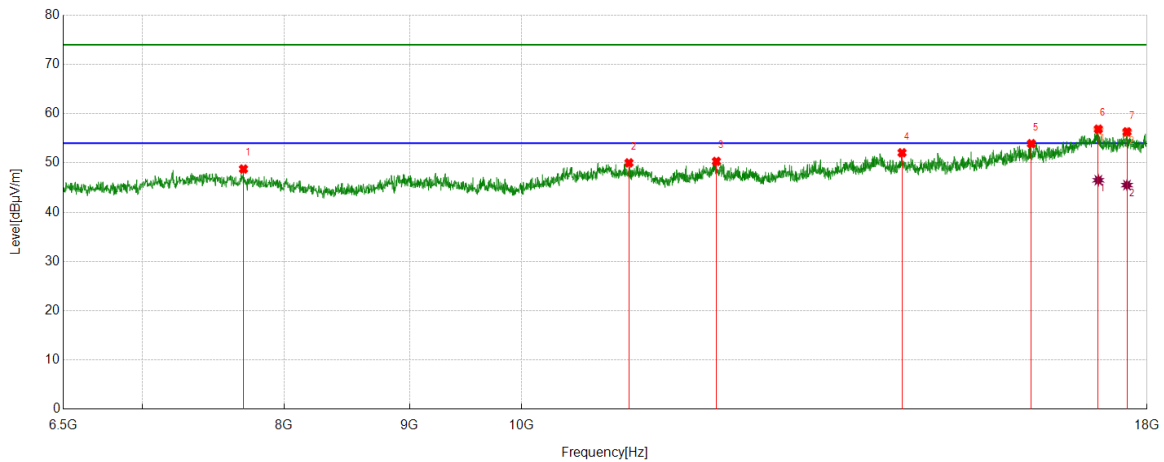

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7700.0333	39.42	9.34	48.76	74.00	-25.24	Horizontal
2	11062.4271	37.41	12.60	50.01	74.00	-23.99	Horizontal
3	12009.4182	36.97	13.34	50.31	74.00	-23.69	Horizontal
4	14298.2997	37.52	14.54	52.06	74.00	-21.94	Horizontal
5	16146.2744	37.42	16.49	53.91	74.00	-20.09	Horizontal
6	17194.8658	37.08	19.53	56.61	74.00	-17.39	Horizontal
7	17664.5274	37.22	18.92	56.14	74.00	-17.86	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17194.8658	26.96	19.53	46.49	54.00	-7.51	Horizontal
2	17664.5274	26.58	18.92	45.50	54.00	-8.50	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5590	Vertical	PASS

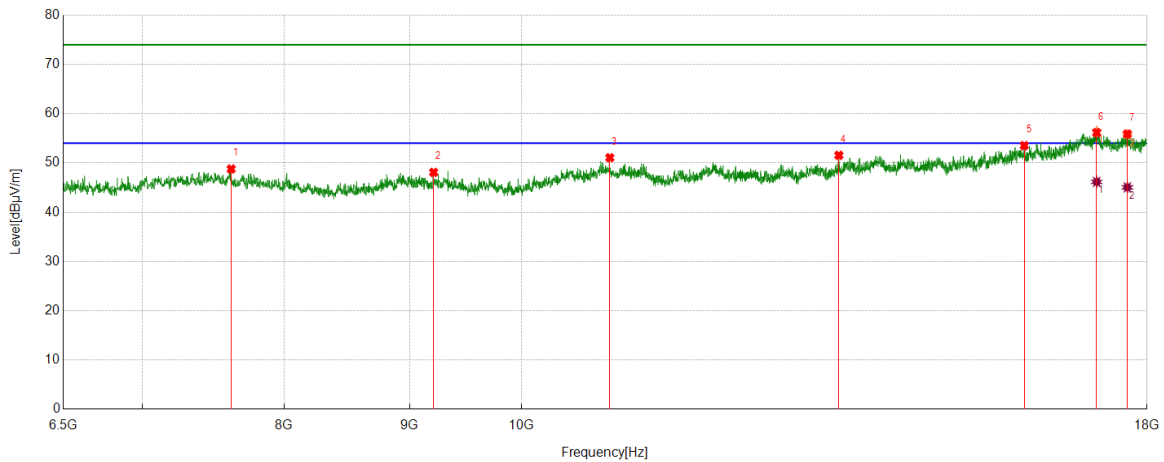

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7611.852	39.40	9.37	48.77	74.00	-25.23	Vertical
2	9206.7845	38.87	9.22	48.09	74.00	-25.91	Vertical
3	10864.9775	38.23	12.83	51.06	74.00	-22.94	Vertical
4	13473.9957	38.45	13.10	51.55	74.00	-22.45	Vertical
5	16038.9232	37.22	16.30	53.52	74.00	-20.48	Vertical
6	17168.0280	36.87	19.54	56.41	74.00	-17.59	Vertical
7	17670.2784	36.44	19.29	55.73	74.00	-18.27	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17168.0280	26.62	19.54	46.16	54.00	-7.84	Vertical
2	17670.2784	25.75	19.29	45.04	54.00	-8.96	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5670	Horizontal	PASS

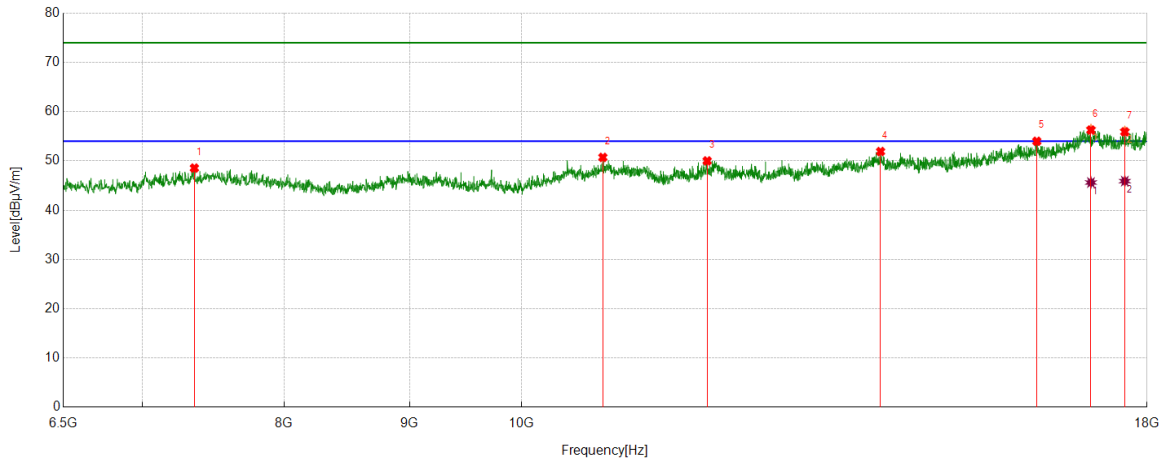

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7353.0588	39.05	9.50	48.55	74.00	-25.45	Horizontal
2	10794.049	38.21	12.51	50.72	74.00	-23.28	Horizontal
3	11905.901	37.14	12.87	50.01	74.00	-23.99	Horizontal
4	14012.6688	36.81	15.10	51.91	74.00	-22.09	Horizontal
5	16228.7048	35.98	18.01	53.99	74.00	-20.01	Horizontal
6	17076.0127	36.71	19.72	56.43	74.00	-17.57	Horizontal
7	17628.1047	37.15	18.89	56.04	74.00	-17.96	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17076.0127	25.90	19.72	45.62	54.00	-8.38	Horizontal
2	17628.1047	27.01	18.89	45.90	54.00	-8.10	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5670	Vertical	PASS

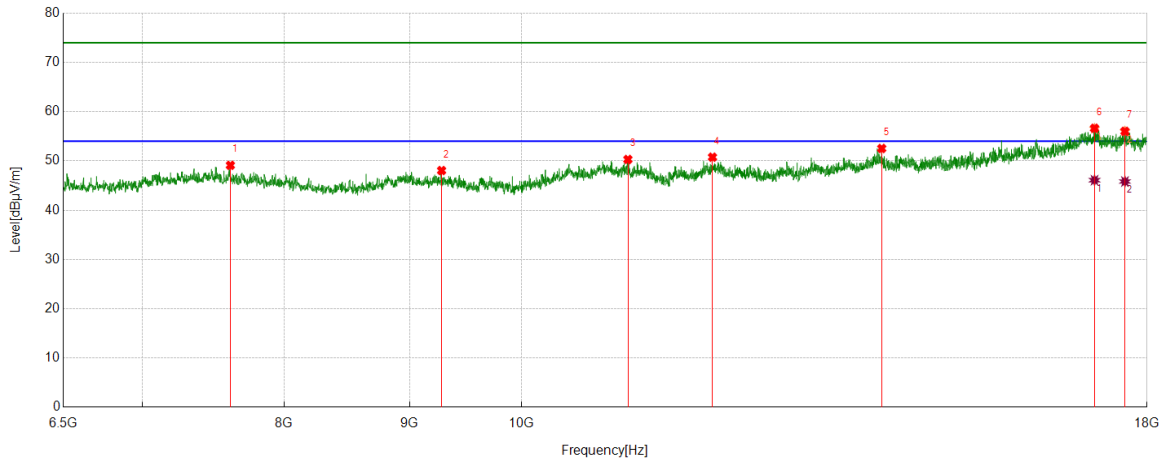

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7606.101	39.60	9.51	49.11	74.00	-24.89	Vertical
2	9275.796	38.76	9.29	48.05	74.00	-25.95	Vertical
3	11050.9252	37.60	12.70	50.30	74.00	-23.70	Vertical
4	11965.3276	37.56	13.20	50.76	74.00	-23.24	Vertical
5	14028.0047	37.53	15.00	52.53	74.00	-21.47	Vertical
6	17133.5223	37.47	19.08	56.55	74.00	-17.45	Vertical
7	17630.0217	36.98	19.02	56.00	74.00	-18.00	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17133.5223	27.01	19.08	46.09	54.00	-7.91	Vertical
2	17630.0217	26.80	19.02	45.82	54.00	-8.18	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5710	Horizontal	PASS

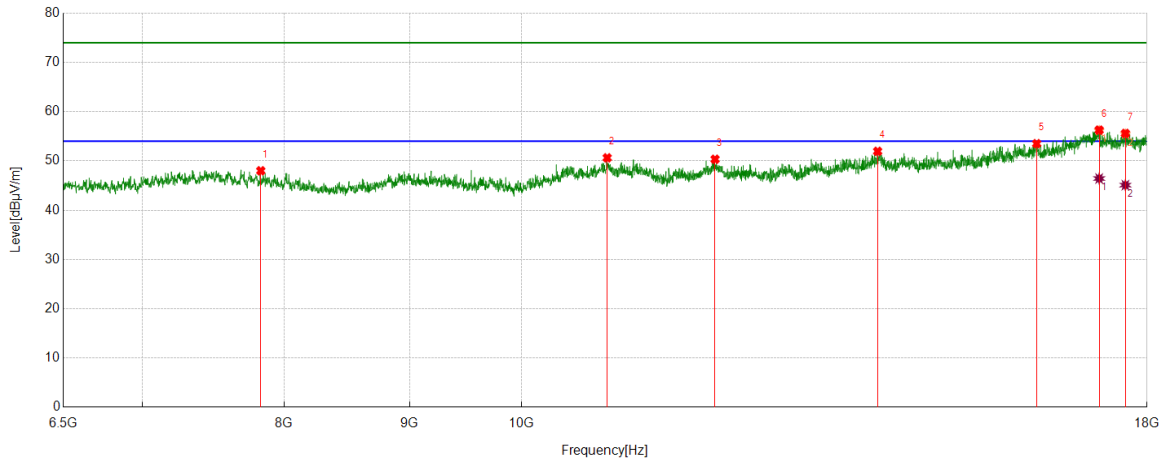

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7826.5544	39.34	8.66	48.00	74.00	-26.00	Horizontal
2	10838.1397	37.95	12.68	50.63	74.00	-23.37	Horizontal
3	11994.0823	36.81	13.53	50.34	74.00	-23.66	Horizontal
4	13974.3291	37.33	14.62	51.95	74.00	-22.05	Horizontal
5	16226.7878	35.62	17.89	53.51	74.00	-20.49	Horizontal
6	17208.2847	36.96	19.17	56.13	74.00	-17.87	Horizontal
7	17637.6896	36.75	18.67	55.42	74.00	-18.58	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17208.2847	27.26	19.17	46.43	54.00	-7.57	Horizontal
2	17637.6896	26.42	18.67	45.09	54.00	-8.91	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5710	Vertical	PASS

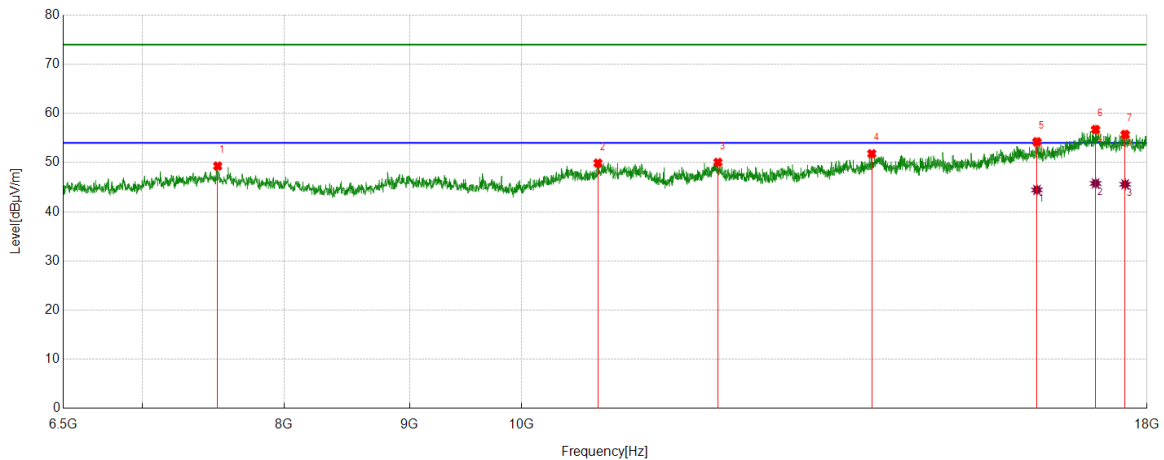

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7516.0027	39.89	9.40	49.29	74.00	-24.71	Vertical
2	10744.2074	37.43	12.46	49.89	74.00	-24.11	Vertical
3	12026.6711	36.82	13.23	50.05	74.00	-23.95	Vertical
4	13897.6496	37.21	14.60	51.81	74.00	-22.19	Vertical
5	16230.6218	36.13	18.10	54.23	74.00	-19.77	Vertical
6	17150.7751	37.31	19.39	56.70	74.00	-17.30	Vertical
7	17633.8556	36.83	18.85	55.68	74.00	-18.32	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16230.6218	26.34	18.10	44.44	54.00	-9.56	Vertical
2	17150.7751	26.37	19.39	45.76	54.00	-8.24	Vertical
3	17633.8556	26.73	18.85	45.58	54.00	-8.42	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5755	Horizontal	PASS

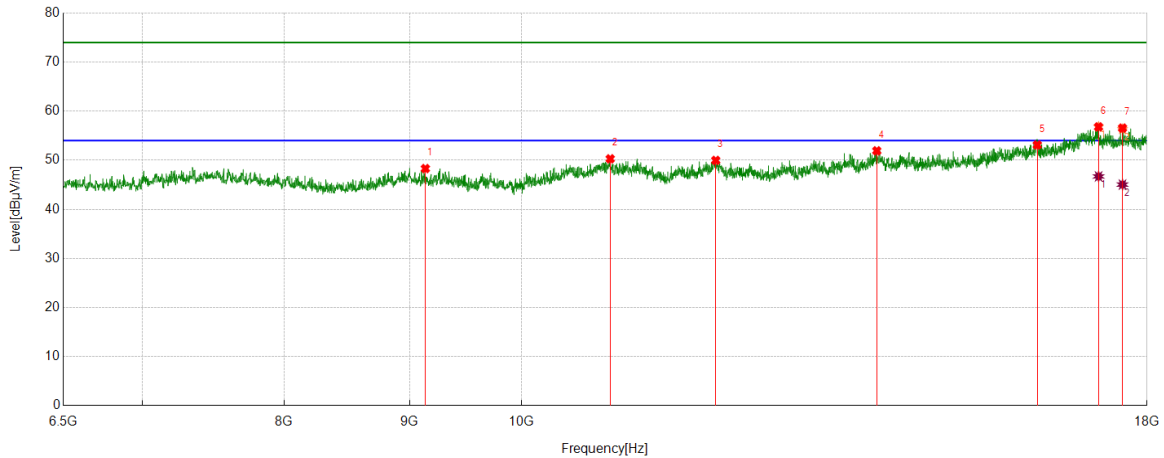

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	9135.856	38.86	9.44	48.30	74.00	-25.70	Horizontal
2	10868.8115	37.50	12.79	50.29	74.00	-23.71	Horizontal
3	12001.7503	36.56	13.41	49.97	74.00	-24.03	Horizontal
4	13962.8271	37.37	14.55	51.92	74.00	-22.08	Horizontal
5	16236.3727	34.99	18.12	53.11	74.00	-20.89	Horizontal
6	17198.6998	37.04	19.77	56.81	74.00	-17.19	Horizontal
7	17589.7650	37.63	18.69	56.32	74.00	-17.68	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17198.6998	26.93	19.77	46.70	54.00	-7.30	Horizontal
2	17589.7650	26.35	18.69	45.04	54.00	-8.96	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5755	Vertical	PASS

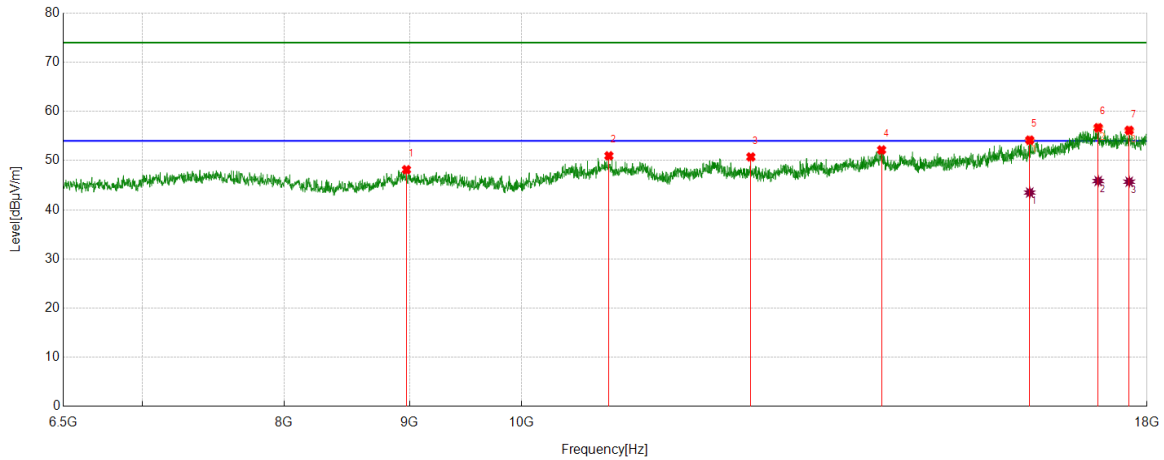

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	8974.8291	38.68	9.46	48.14	74.00	-25.86	Vertical
2	10855.3926	38.23	12.74	50.97	74.00	-23.03	Vertical
3	12404.3174	38.64	12.10	50.74	74.00	-23.26	Vertical
4	14026.0877	37.15	15.01	52.16	74.00	-21.84	Vertical
5	16121.3536	37.78	16.38	54.16	74.00	-19.84	Vertical
6	17192.9488	37.13	19.41	56.54	74.00	-17.46	Vertical
7	17700.9502	37.33	18.64	55.97	74.00	-18.03	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16121.3536	27.12	16.38	43.50	54.00	-10.50	Vertical
2	17192.9488	26.44	19.41	45.85	54.00	-8.15	Vertical
3	17700.9502	27.06	18.64	45.70	54.00	-8.30	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5795	Horizontal	PASS

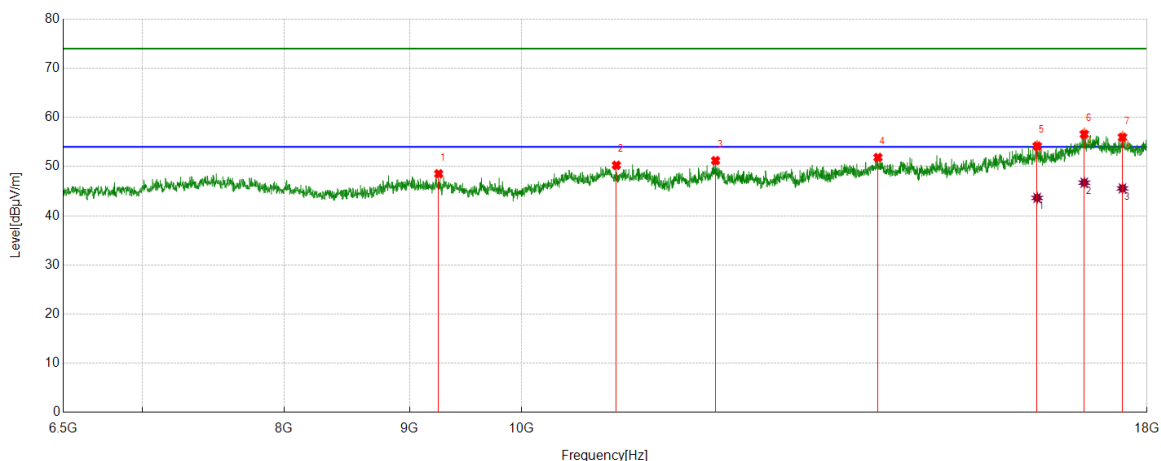

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	9250.8751	39.18	9.35	48.53	74.00	-25.47	Horizontal
2	10932.072	37.56	12.70	50.26	74.00	-23.74	Horizontal
3	11999.8333	37.78	13.43	51.21	74.00	-22.79	Horizontal
4	13978.163	37.23	14.62	51.85	74.00	-22.15	Horizontal
5	16234.4557	36.04	18.12	54.16	74.00	-19.84	Horizontal
6	16968.6614	36.34	20.51	56.85	74.00	-17.15	Horizontal
7	17589.7650	37.51	18.69	56.20	74.00	-17.80	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16234.4557	25.51	18.12	43.63	54.00	-10.37	Horizontal
2	16968.6614	26.21	20.51	46.72	54.00	-7.28	Horizontal
3	17589.7650	26.87	18.69	45.56	54.00	-8.44	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC40	5795	Vertical	PASS

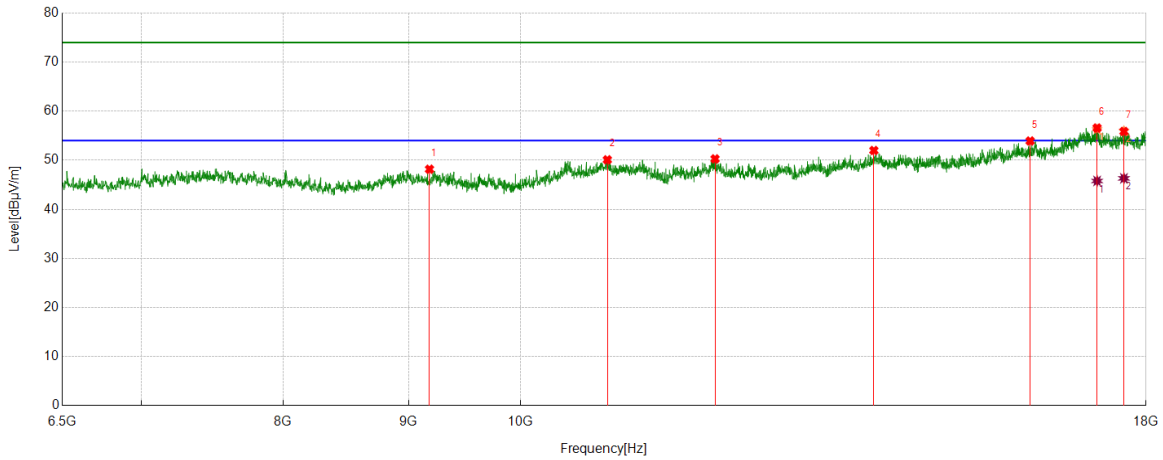

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	9179.9467	38.91	9.26	48.17	74.00	-25.83	Vertical
2	10849.6416	37.51	12.58	50.09	74.00	-23.91	Vertical
3	12005.5843	36.89	13.38	50.27	74.00	-23.73	Vertical
4	13937.9063	37.00	14.99	51.99	74.00	-22.01	Vertical
5	16142.4404	37.57	16.35	53.92	74.00	-20.08	Vertical
6	17191.0318	37.01	19.29	56.30	74.00	-17.70	Vertical
7	17630.0217	36.92	19.02	55.94	74.00	-18.06	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17191.0318	26.49	19.29	45.78	54.00	-8.22	Vertical
2	17630.0217	27.29	19.02	46.31	54.00	-7.69	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC80	5210	Horizontal	PASS

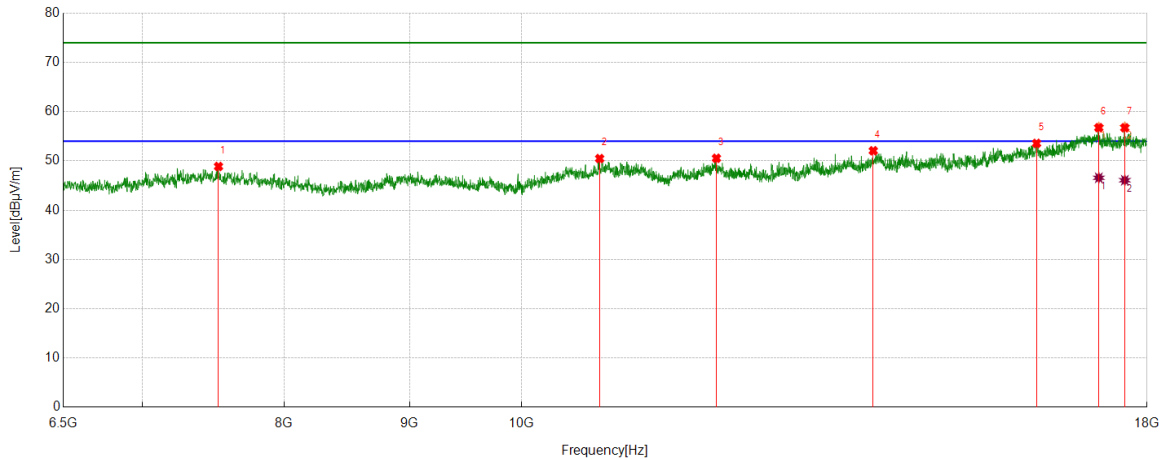

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7521.7536	39.48	9.40	48.88	74.00	-25.12	Horizontal
2	10761.4602	37.91	12.57	50.48	74.00	-23.52	Horizontal
3	12009.4182	37.20	13.34	50.54	74.00	-23.46	Horizontal
4	13916.8195	37.15	14.91	52.06	74.00	-21.94	Horizontal
5	16224.8708	35.80	17.76	53.56	74.00	-20.44	Horizontal
6	17202.5338	37.19	19.64	56.83	74.00	-17.17	Horizontal
7	17628.1047	37.98	18.89	56.87	74.00	-17.13	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17202.5338	26.94	19.64	46.58	54.00	-7.42	Horizontal
2	17628.1047	27.19	18.89	46.08	54.00	-7.92	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC80	5210	Vertical	PASS

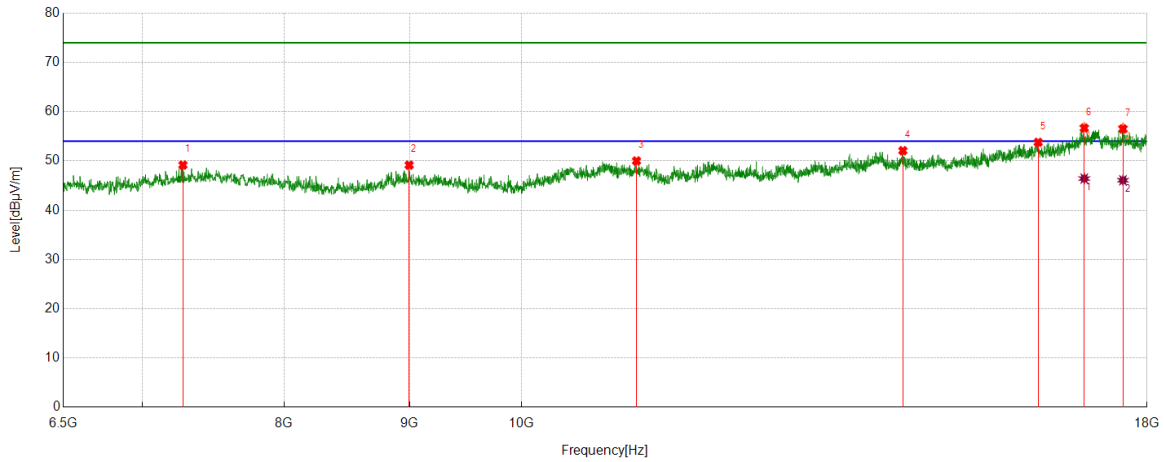

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7274.4624	39.62	9.54	49.16	74.00	-24.84	Vertical
2	8997.833	39.47	9.68	49.15	74.00	-24.85	Vertical
3	11141.0235	37.55	12.45	50.00	74.00	-24.00	Vertical
4	14309.8016	37.78	14.30	52.08	74.00	-21.92	Vertical
5	16249.7916	36.71	17.07	53.78	74.00	-20.22	Vertical
6	16968.6614	36.35	20.51	56.86	74.00	-17.14	Vertical
7	17597.4329	38.19	18.56	56.75	74.00	-17.25	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16968.6614	25.91	20.51	46.42	54.00	-7.58	Vertical
2	17597.4329	27.52	18.56	46.08	54.00	-7.92	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC80	5290	Horizontal	PASS

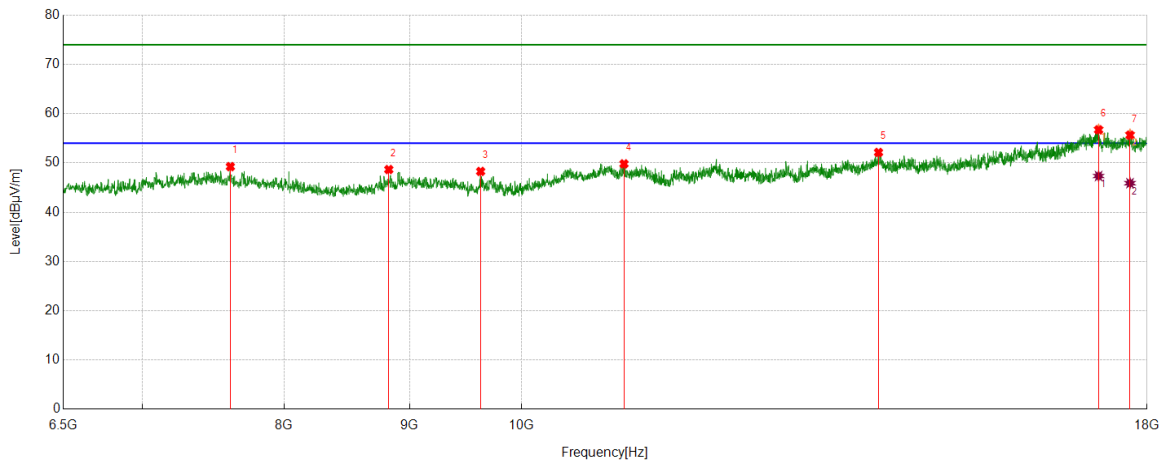

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7606.101	39.74	9.51	49.25	74.00	-24.75	Horizontal
2	8827.2212	39.63	9.03	48.66	74.00	-25.34	Horizontal
3	9622.7705	39.15	9.13	48.28	74.00	-25.72	Horizontal
4	11010.6684	36.88	12.93	49.81	74.00	-24.19	Horizontal
5	13985.831	37.33	14.80	52.13	74.00	-21.87	Horizontal
6	17198.6998	37.11	19.77	56.88	74.00	-17.12	Horizontal
7	17714.3691	36.9	18.96	55.86	74.00	-18.14	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17198.6998	27.57	19.77	47.34	54.00	-6.66	Horizontal
2	17714.3691	26.93	18.96	45.89	54.00	-8.11	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC80	5290	Vertical	PASS

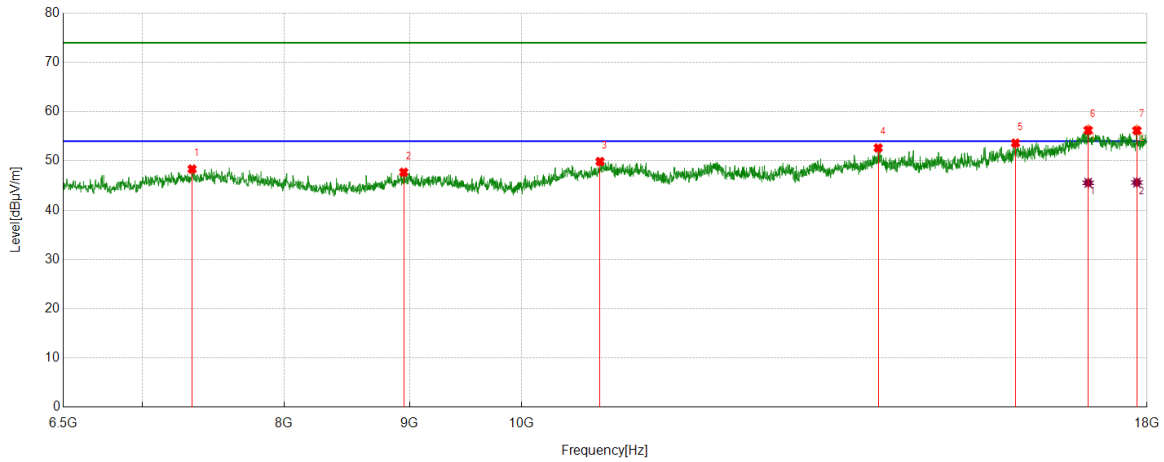

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7337.723	38.77	9.57	48.34	74.00	-25.66	Vertical
2	8951.8253	38.15	9.55	47.70	74.00	-26.30	Vertical
3	10765.2942	37.27	12.61	49.88	74.00	-24.12	Vertical
4	13981.997	37.95	14.68	52.63	74.00	-21.37	Vertical
5	15906.6511	37.09	16.53	53.62	74.00	-20.38	Vertical
6	17031.9220	36.98	19.46	56.44	74.00	-17.56	Vertical
7	17829.3882	37	19.36	56.36	74.00	-17.64	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17031.9220	26.09	19.46	45.55	54.00	-8.45	Vertical
2	17829.3882	26.26	19.36	45.62	54.00	-8.38	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC80	5530	Horizontal	PASS

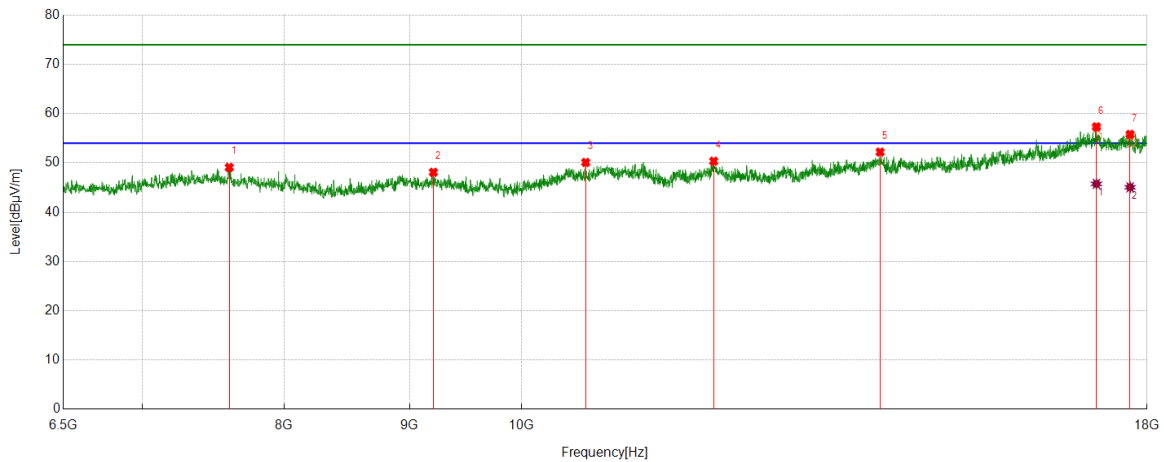

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7598.4331	39.42	9.67	49.09	74.00	-24.91	Horizontal
2	9204.8675	38.86	9.24	48.10	74.00	-25.90	Horizontal
3	10621.5203	38.01	12.09	50.10	74.00	-23.90	Horizontal
4	11978.7465	36.90	13.45	50.35	74.00	-23.65	Horizontal
5	14006.9178	37.06	15.15	52.21	74.00	-21.79	Horizontal
6	17164.1940	37.35	19.74	57.09	74.00	-16.91	Horizontal
7	17716.2860	36.51	19.01	55.52	74.00	-18.48	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17164.1940	26.01	19.74	45.75	54.00	-8.25	Horizontal
2	17716.2860	26.05	19.01	45.06	54.00	-8.94	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC80	5530	Vertical	PASS

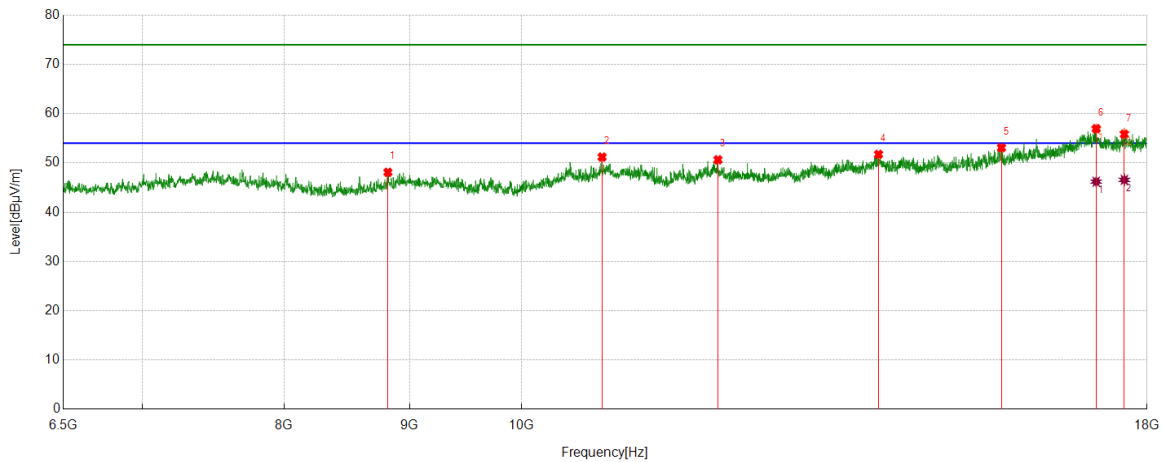

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	8819.5533	39.17	8.93	48.10	74.00	-25.90	Vertical
2	10786.3811	38.64	12.55	51.19	74.00	-22.81	Vertical
3	12026.6711	37.41	13.23	50.64	74.00	-23.36	Vertical
4	13985.831	36.94	14.80	51.74	74.00	-22.26	Vertical
5	15699.6166	36.74	16.35	53.09	74.00	-20.91	Vertical
6	17160.3601	36.93	19.94	56.87	74.00	-17.13	Vertical
7	17620.4367	37.67	18.35	56.02	74.00	-17.98	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17160.3601	26.26	19.94	46.20	54.00	-7.80	Vertical
2	17620.4367	28.21	18.35	46.56	54.00	-7.44	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC80	5610	Horizontal	PASS

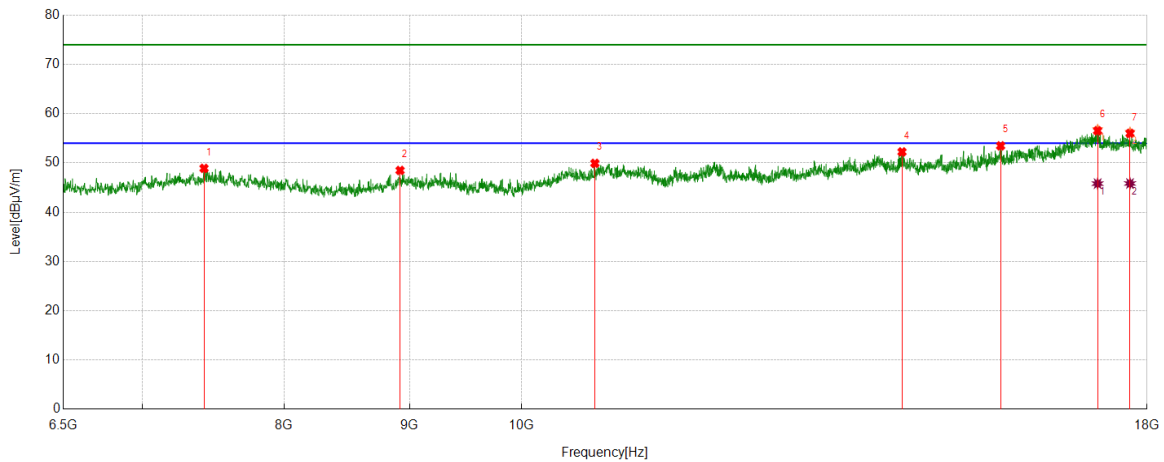

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7420.1534	39.51	9.39	48.90	74.00	-25.10	Horizontal
2	8921.1535	39.15	9.33	48.48	74.00	-25.52	Horizontal
3	10713.5356	37.48	12.44	49.92	74.00	-24.08	Horizontal
4	14298.2997	37.70	14.54	52.24	74.00	-21.76	Horizontal
5	15686.1977	37.10	16.37	53.47	74.00	-20.53	Horizontal
6	17183.3639	37.66	19.16	56.82	74.00	-17.18	Horizontal
7	17714.3691	37.3	18.96	56.26	74.00	-17.74	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17183.3639	26.64	19.16	45.80	54.00	-8.20	Horizontal
2	17714.3691	26.87	18.96	45.83	54.00	-8.17	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC80	5610	Vertical	PASS

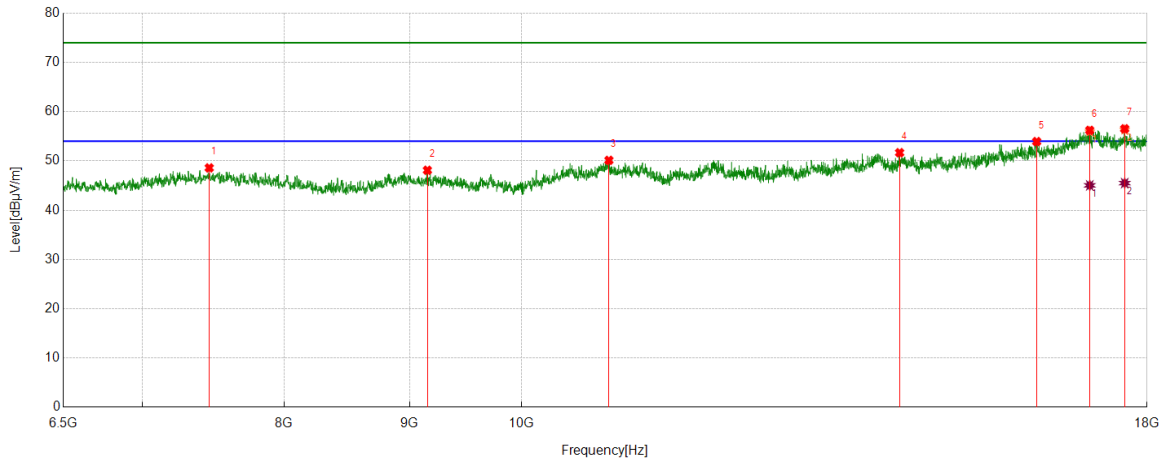

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7456.5761	39.14	9.45	48.59	74.00	-25.41	Vertical
2	9153.1089	38.70	9.41	48.11	74.00	-25.89	Vertical
3	10855.3926	37.38	12.74	50.12	74.00	-23.88	Vertical
4	14265.711	37.22	14.45	51.67	74.00	-22.33	Vertical
5	16226.7878	36.04	17.89	53.93	74.00	-20.07	Vertical
6	17056.8428	35.79	20.15	55.94	74.00	-18.06	Vertical
7	17626.1877	37.55	18.76	56.31	74.00	-17.69	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17056.8428	24.89	20.15	45.04	54.00	-8.96	Vertical
2	17626.1877	26.74	18.76	45.50	54.00	-8.50	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC80	5690	Horizontal	PASS

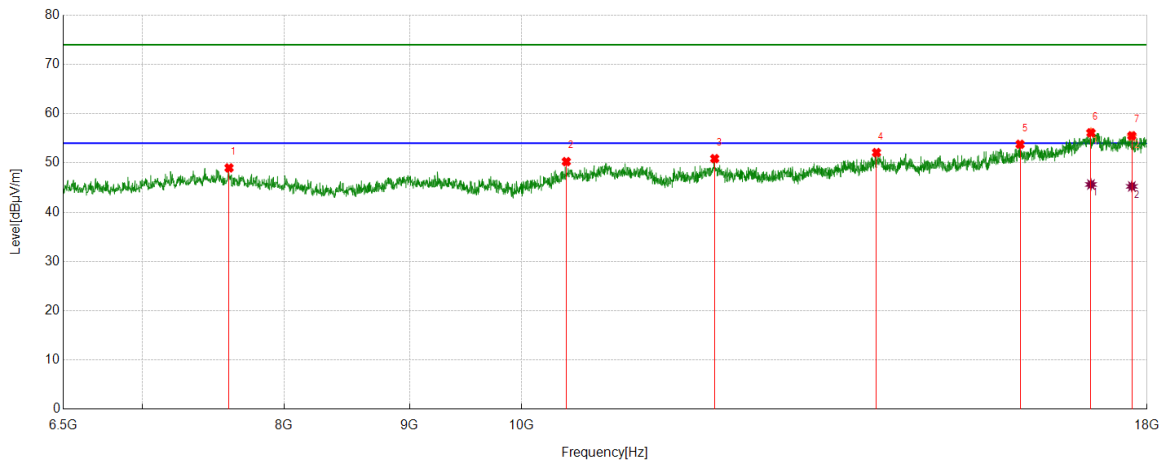

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7596.5161	39.30	9.69	48.99	74.00	-25.01	Horizontal
2	10429.8216	38.22	12.04	50.26	74.00	-23.74	Horizontal
3	11990.2484	37.27	13.60	50.87	74.00	-23.13	Horizontal
4	13958.9932	37.57	14.53	52.10	74.00	-21.90	Horizontal
5	15975.6626	37.70	16.08	53.78	74.00	-20.22	Horizontal
6	17076.0127	36.45	19.72	56.17	74.00	-17.83	Horizontal
7	17745.0408	36.31	19.00	55.31	74.00	-18.69	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17076.0127	25.91	19.72	45.63	54.00	-8.37	Horizontal
2	17745.0408	26.24	19.00	45.24	54.00	-8.76	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC80	5690	Vertical	PASS

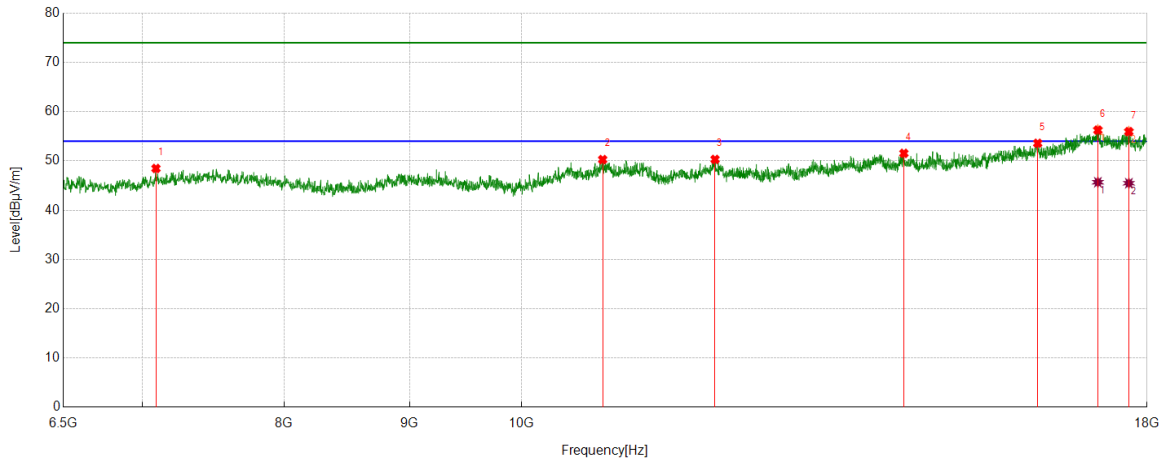

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7092.3487	38.64	9.83	48.47	74.00	-25.53	Vertical
2	10792.132	37.73	12.54	50.27	74.00	-23.73	Vertical
3	11994.0823	36.78	13.53	50.31	74.00	-23.69	Vertical
4	14323.2205	36.76	14.78	51.54	74.00	-22.46	Vertical
5	16242.1237	35.67	17.91	53.58	74.00	-20.42	Vertical
6	17187.1979	37.14	19.20	56.34	74.00	-17.66	Vertical
7	17695.1992	37.41	18.59	56.00	74.00	-18.00	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17187.1979	26.48	19.20	45.68	54.00	-8.32	Vertical
2	17695.1992	26.89	18.59	45.48	54.00	-8.52	Vertical

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11AC80	5775	Horizontal	PASS

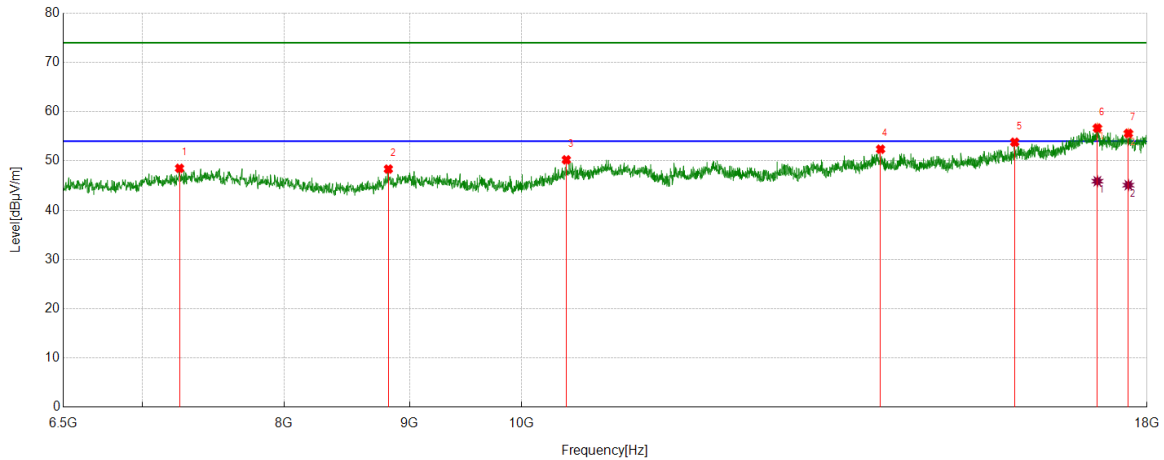

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7251.4586	38.93	9.57	48.50	74.00	-25.50	Horizontal
2	8823.3872	39.37	8.98	48.35	74.00	-25.65	Horizontal
3	10429.8216	38.18	12.04	50.22	74.00	-23.78	Horizontal
4	14012.6688	37.28	15.10	52.38	74.00	-21.62	Horizontal
5	15895.1492	37.51	16.29	53.80	74.00	-20.20	Horizontal
6	17179.5299	37.51	19.15	56.66	74.00	-17.34	Horizontal
7	17687.5313	37	18.56	55.56	74.00	-18.44	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17179.5299	26.73	19.15	45.88	54.00	-8.12	Horizontal
2	17687.5313	26.53	18.56	45.09	54.00	-8.91	Horizontal

- Remark: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band were not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.