



Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band3
 Frequency :5530 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :51

Test Date :2023-08-30
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

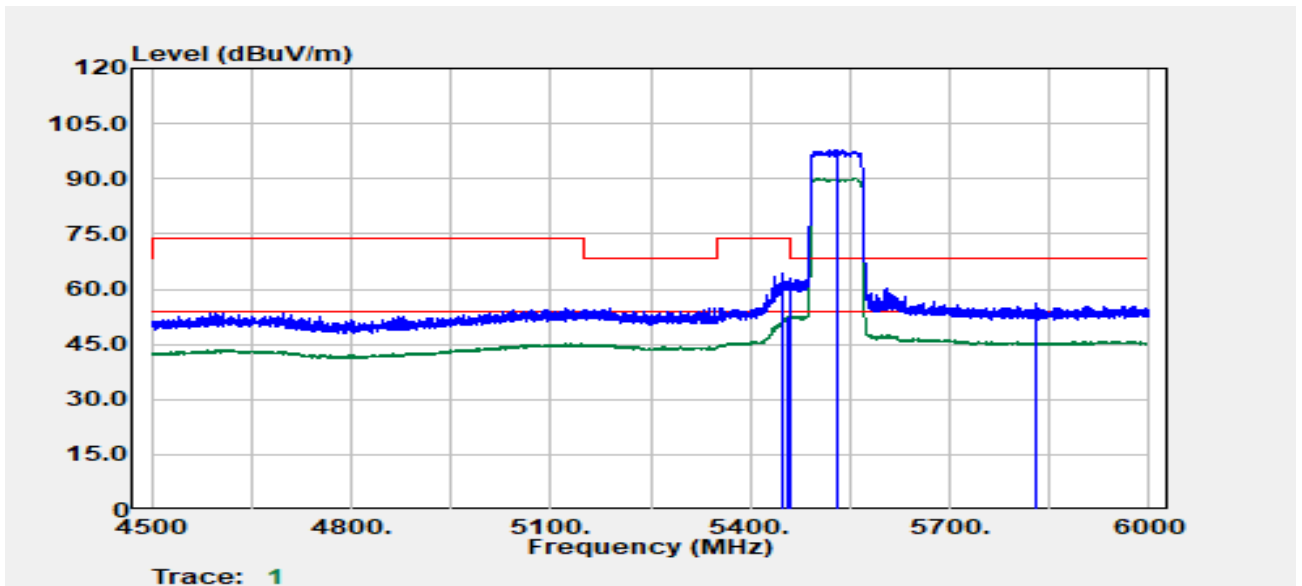

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5448.900 | Peak | 51.97 | 12.37 | 64.35 | 74.00 | -9.65 |
| 5455.500 | Average | 40.25 | 12.39 | 52.65 | 54.00 | -1.35 |
| 5460.600 | Peak | 50.45 | 12.41 | 62.86 | 68.20 | -5.34 |
| 5530.000 | Peak | 84.92 | 12.77 | 97.69 | -- | -- |
| 5530.000 | Average | 77.33 | 12.77 | 90.10 | -- | -- |
| 5831.400 | Peak | 41.87 | 14.07 | 55.94 | 68.20 | -12.26 |

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11ac80/Band3 | Temp./Humi. | :24.4/57 |
| Frequency | :5610 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

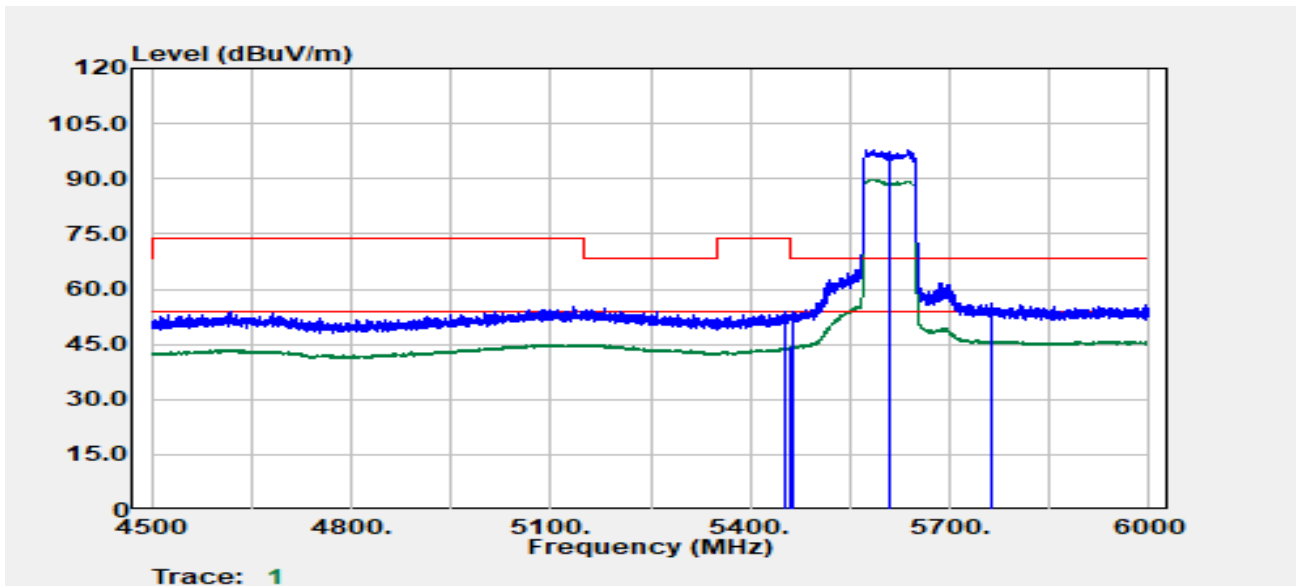


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5451.000 | Peak | 41.47 | 12.38 | 53.85 | 74.00 | -20.15 |
| 5460.000 | Average | 31.87 | 12.41 | 44.28 | 54.00 | -9.72 |
| 5464.800 | Peak | 41.36 | 12.43 | 53.79 | 68.20 | -14.41 |
| 5610.000 | Peak | 85.00 | 12.92 | 97.92 | -- | -- |
| 5610.000 | Average | 76.88 | 12.92 | 89.80 | -- | -- |
| 5763.600 | Peak | 42.23 | 13.91 | 56.14 | 68.20 | -12.06 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band3
 Frequency :5610 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

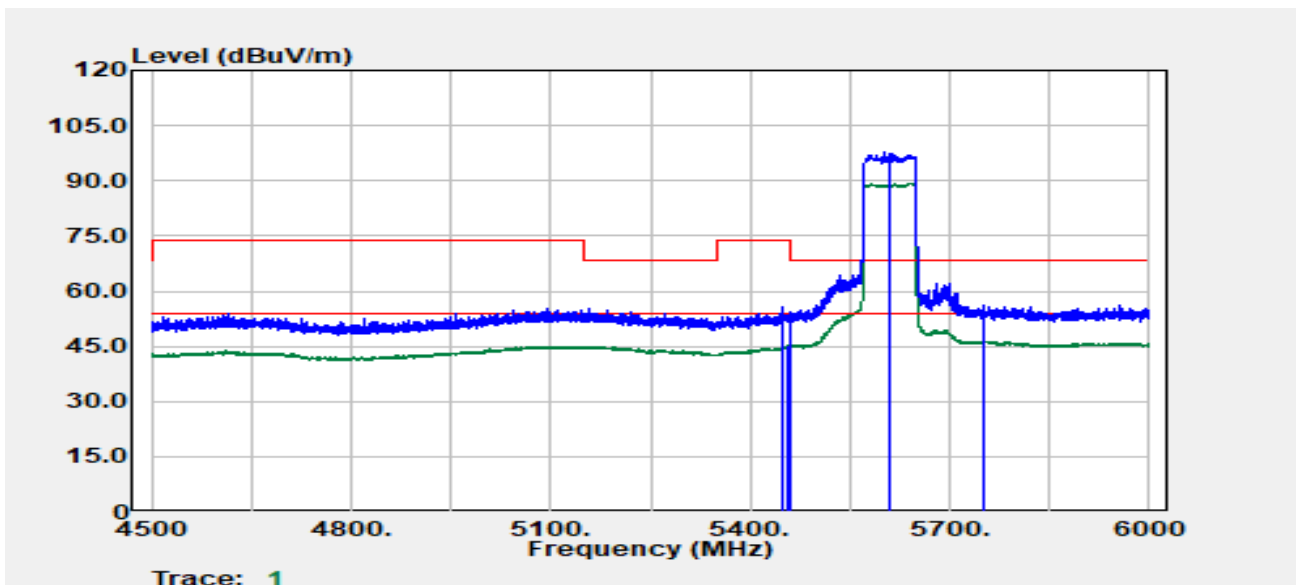


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5449.200 | Peak | 43.27 | 12.37 | 55.65 | 74.00 | -18.35 |
| 5457.300 | Average | 32.71 | 12.40 | 45.11 | 54.00 | -8.89 |
| 5462.100 | Peak | 41.86 | 12.42 | 54.28 | 68.20 | -13.92 |
| 5610.000 | Peak | 84.91 | 12.92 | 97.83 | -- | -- |
| 5610.000 | Average | 76.41 | 12.92 | 89.33 | -- | -- |
| 5750.400 | Peak | 42.32 | 13.82 | 56.14 | 68.20 | -12.06 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-29 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :24.4/57 |
| Frequency | :5745 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

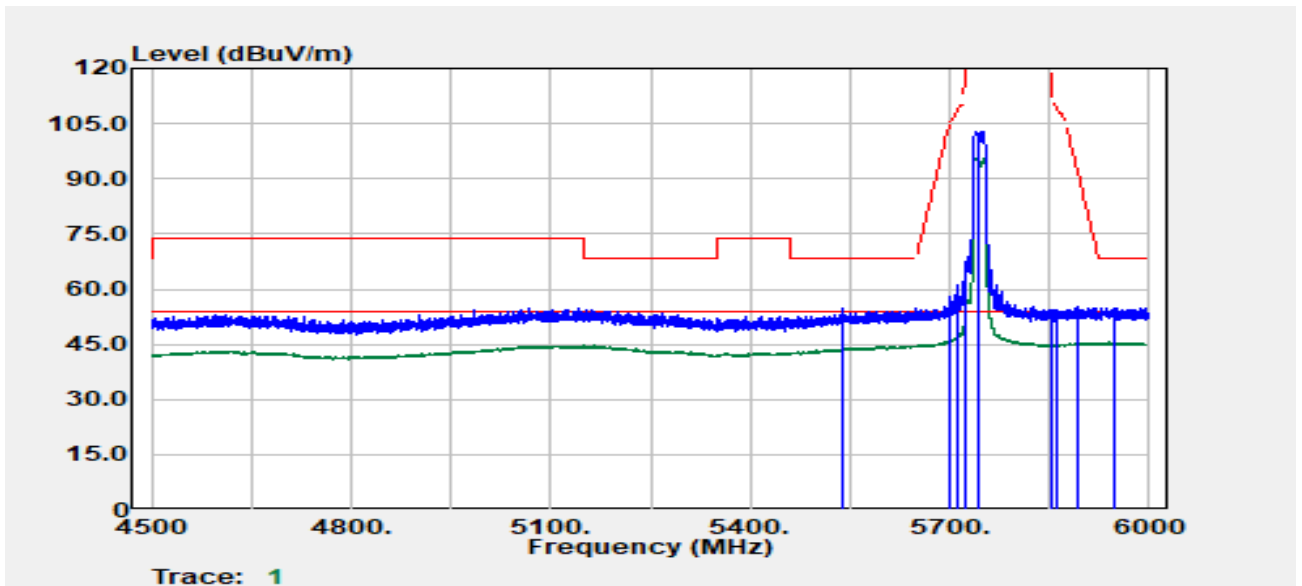


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5539.423 | Peak | 41.78 | 12.84 | 54.62 | 68.20 | -13.58 |
| 5699.700 | Peak | 41.63 | 13.56 | 55.19 | 104.98 | -49.79 |
| 5711.952 | Peak | 47.41 | 13.62 | 61.04 | 108.55 | -47.51 |
| 5724.704 | Peak | 53.70 | 13.69 | 67.39 | 121.53 | -54.13 |
| 5745.000 | Peak | 89.07 | 13.79 | 102.86 | -- | -- |
| 5745.000 | Average | 81.73 | 13.79 | 95.53 | -- | -- |
| 5853.726 | Peak | 40.48 | 14.02 | 54.50 | 113.70 | -59.20 |
| 5861.727 | Peak | 40.40 | 14.02 | 54.42 | 108.91 | -54.49 |
| 5892.982 | Peak | 41.23 | 14.03 | 55.26 | 91.86 | -36.59 |
| 5947.991 | Peak | 40.66 | 14.15 | 54.81 | 68.20 | -13.39 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5745 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

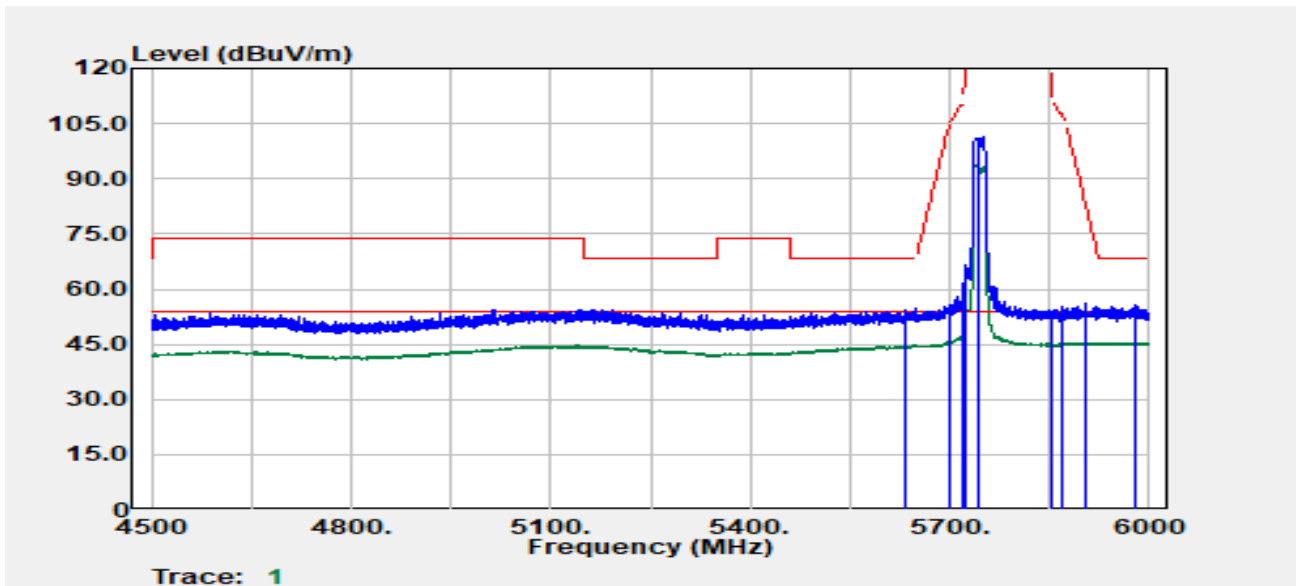


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5633.939 | Peak | 41.36 | 13.14 | 54.50 | 68.20 | -13.70 |
| 5699.950 | Peak | 41.93 | 13.56 | 55.49 | 105.16 | -49.67 |
| 5717.953 | Peak | 44.32 | 13.65 | 57.97 | 110.23 | -52.26 |
| 5724.704 | Peak | 50.37 | 13.69 | 64.05 | 121.53 | -57.47 |
| 5745.000 | Peak | 87.46 | 13.79 | 101.25 | -- | -- |
| 5745.000 | Average | 80.07 | 13.79 | 93.87 | -- | -- |
| 5852.726 | Peak | 39.70 | 14.02 | 53.72 | 115.98 | -62.26 |
| 5869.228 | Peak | 41.22 | 14.02 | 55.25 | 106.81 | -51.57 |
| 5904.984 | Peak | 42.16 | 14.04 | 56.21 | 82.97 | -26.77 |
| 5978.997 | Peak | 41.37 | 14.15 | 55.52 | 68.20 | -12.68 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-29 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :24.4/57 |
| Frequency | :5825 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

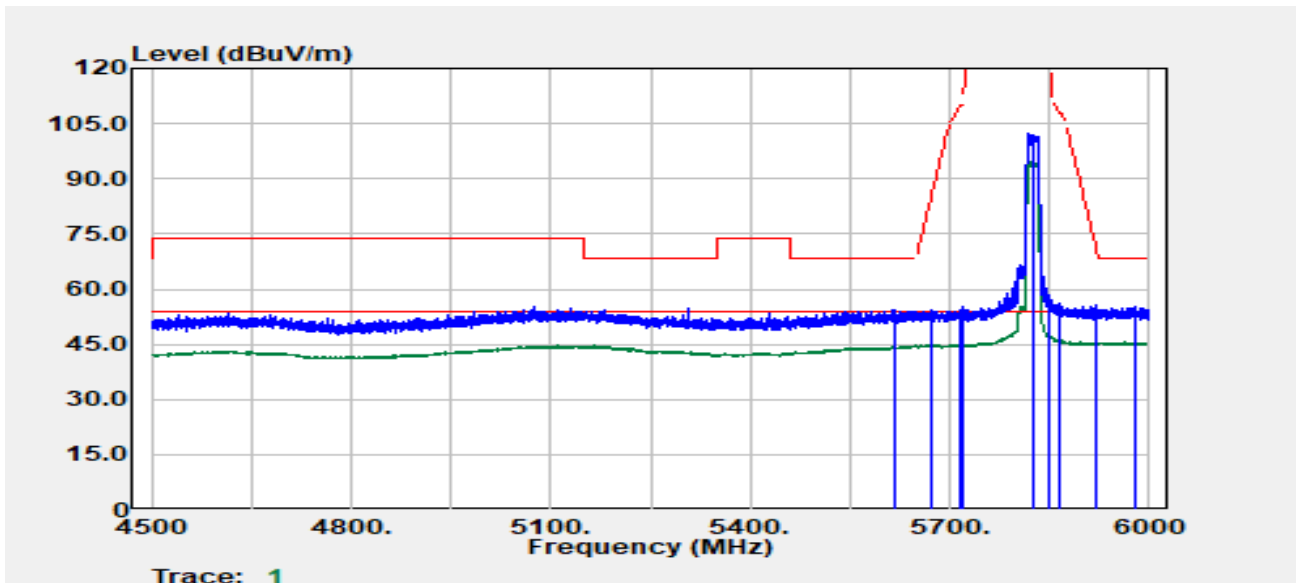


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5616.186 | Peak | 41.20 | 12.98 | 54.18 | 68.20 | -14.02 |
| 5672.445 | Peak | 40.92 | 13.41 | 54.32 | 84.85 | -30.53 |
| 5715.953 | Peak | 40.55 | 13.64 | 54.20 | 109.67 | -55.47 |
| 5720.954 | Peak | 41.77 | 13.67 | 55.44 | 112.98 | -57.54 |
| 5825.000 | Peak | 88.16 | 14.09 | 102.25 | -- | -- |
| 5825.000 | Average | 80.85 | 14.09 | 94.94 | -- | -- |
| 5850.000 | Peak | 44.27 | 14.02 | 58.29 | 122.20 | -63.91 |
| 5863.727 | Peak | 42.32 | 14.02 | 56.34 | 108.35 | -52.01 |
| 5921.487 | Peak | 41.68 | 14.09 | 55.76 | 70.79 | -15.03 |
| 5980.497 | Peak | 40.96 | 14.15 | 55.12 | 68.20 | -13.08 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5825 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

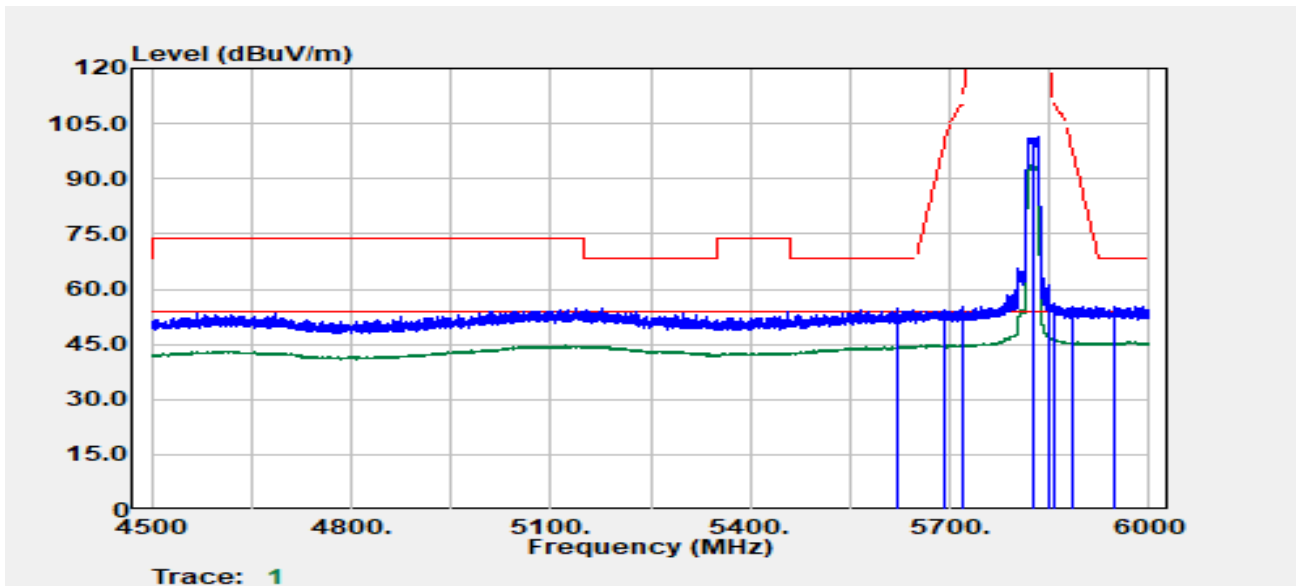


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5620.437 | Peak | 41.86 | 13.01 | 54.88 | 68.20 | -13.32 |
| 5693.949 | Peak | 40.98 | 13.53 | 54.51 | 100.74 | -46.23 |
| 5717.953 | Peak | 41.40 | 13.65 | 55.06 | 110.23 | -55.17 |
| 5720.203 | Peak | 39.86 | 13.67 | 53.53 | 111.26 | -57.74 |
| 5825.000 | Peak | 87.21 | 14.09 | 101.30 | -- | -- |
| 5825.000 | Average | 79.61 | 14.09 | 93.70 | -- | -- |
| 5850.475 | Peak | 45.47 | 14.02 | 59.49 | 121.12 | -61.62 |
| 5856.976 | Peak | 42.35 | 14.02 | 56.37 | 110.25 | -53.87 |
| 5886.231 | Peak | 41.14 | 14.03 | 55.17 | 96.86 | -41.69 |
| 5946.991 | Peak | 40.98 | 14.15 | 55.13 | 68.20 | -13.07 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5745 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

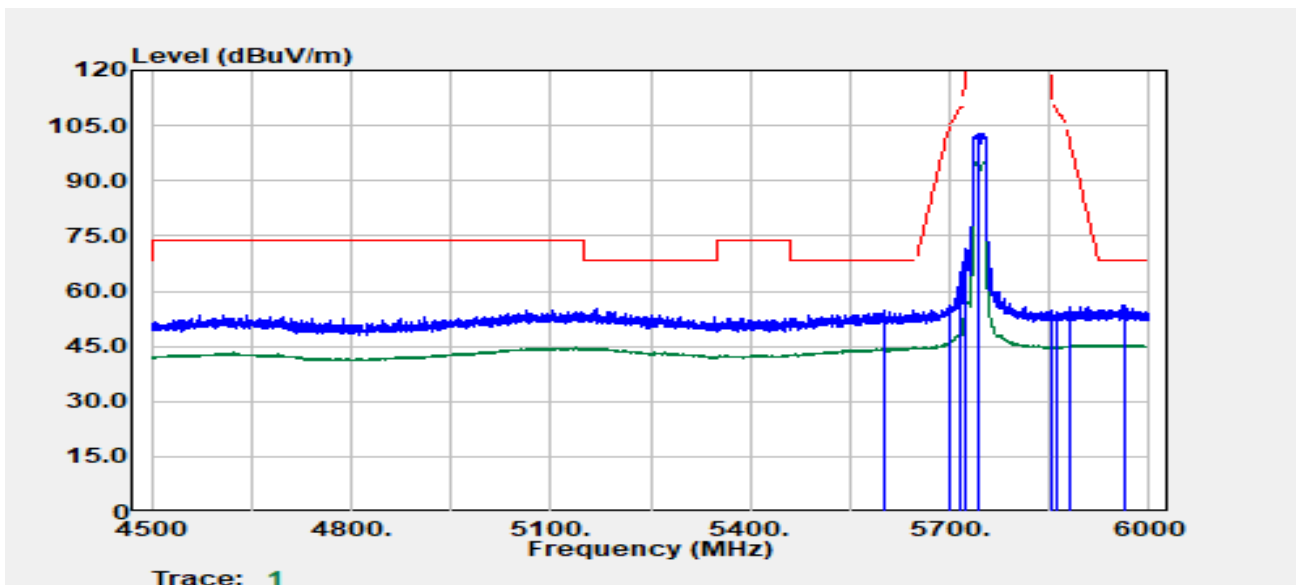


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5603.400 | Peak | 41.91 | 12.86 | 54.77 | 68.20 | -13.43 |
| 5699.100 | Peak | 42.42 | 13.55 | 55.97 | 104.54 | -48.56 |
| 5715.300 | Peak | 51.66 | 13.64 | 65.30 | 109.49 | -44.19 |
| 5724.600 | Peak | 57.65 | 13.69 | 71.34 | 121.29 | -49.95 |
| 5745.000 | Peak | 89.19 | 13.79 | 102.99 | -- | -- |
| 5745.000 | Average | 81.39 | 13.79 | 95.19 | -- | -- |
| 5851.500 | Peak | 40.56 | 14.02 | 54.58 | 118.78 | -64.20 |
| 5861.700 | Peak | 40.46 | 14.02 | 54.48 | 108.92 | -54.44 |
| 5881.500 | Peak | 41.61 | 14.03 | 55.64 | 100.37 | -44.73 |
| 5964.300 | Peak | 41.99 | 14.16 | 56.15 | 68.20 | -12.05 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5745 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

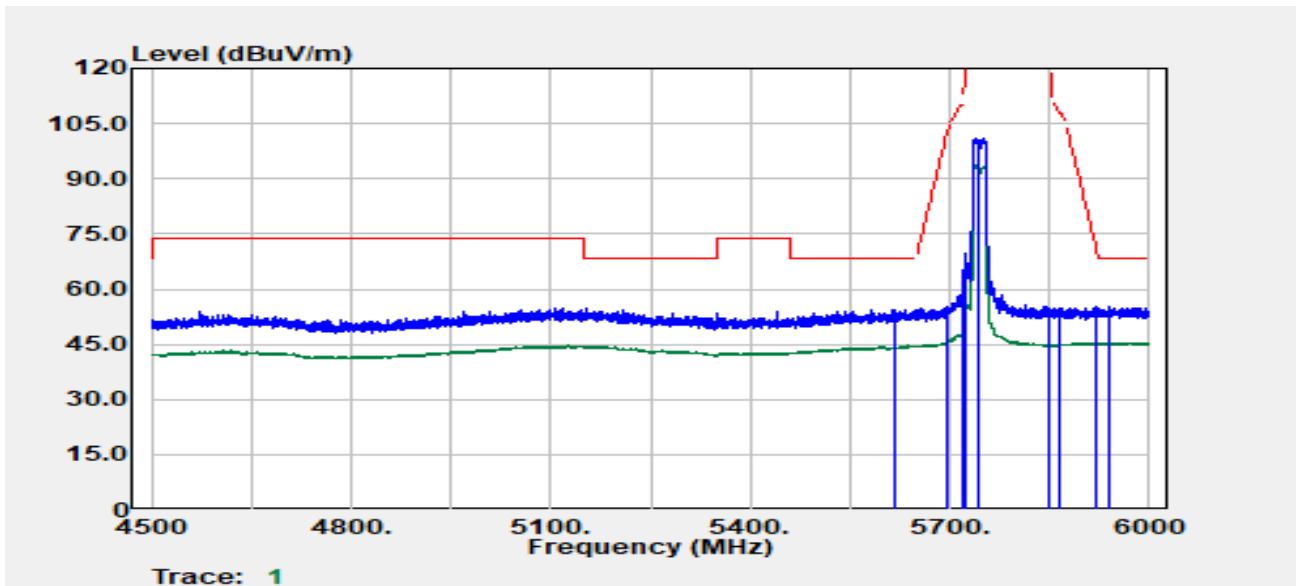


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5616.600 | Peak | 41.43 | 12.98 | 54.41 | 68.20 | -13.79 |
| 5697.600 | Peak | 41.81 | 13.55 | 55.36 | 103.43 | -48.08 |
| 5720.100 | Peak | 46.44 | 13.66 | 60.11 | 111.03 | -50.92 |
| 5722.800 | Peak | 56.06 | 13.68 | 69.74 | 117.19 | -47.45 |
| 5745.000 | Peak | 87.21 | 13.79 | 101.00 | -- | -- |
| 5745.000 | Average | 79.99 | 13.79 | 93.78 | -- | -- |
| 5851.200 | Peak | 40.93 | 14.02 | 54.95 | 119.46 | -64.51 |
| 5864.400 | Peak | 40.83 | 14.02 | 54.85 | 108.17 | -53.31 |
| 5921.100 | Peak | 41.15 | 14.08 | 55.23 | 71.07 | -15.84 |
| 5941.500 | Peak | 40.90 | 14.14 | 55.03 | 68.20 | -13.17 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-29 |
| Operation Band | :802.11n20/Band4 | Temp./Humi. | :24.4/57 |
| Frequency | :5825 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

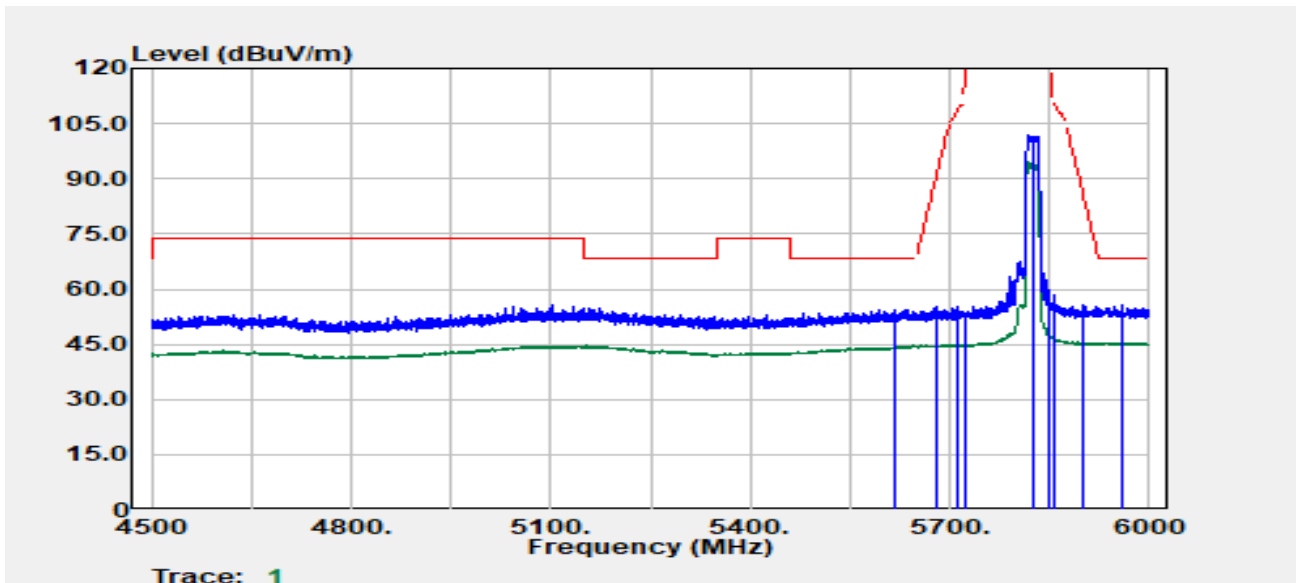


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5616.000 | Peak | 41.55 | 12.97 | 54.53 | 68.20 | -13.67 |
| 5679.000 | Peak | 41.67 | 13.44 | 55.12 | 89.70 | -34.58 |
| 5712.900 | Peak | 41.59 | 13.63 | 55.22 | 108.81 | -53.59 |
| 5724.300 | Peak | 39.92 | 13.69 | 53.61 | 120.60 | -66.99 |
| 5825.000 | Peak | 87.68 | 14.09 | 101.77 | -- | -- |
| 5825.000 | Average | 80.34 | 14.09 | 94.43 | -- | -- |
| 5850.300 | Peak | 42.42 | 14.02 | 56.44 | 121.52 | -65.08 |
| 5855.700 | Peak | 44.54 | 14.02 | 58.56 | 110.60 | -52.05 |
| 5899.500 | Peak | 41.44 | 14.03 | 55.47 | 87.03 | -31.56 |
| 5959.500 | Peak | 41.43 | 14.16 | 55.59 | 68.20 | -12.61 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5825 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

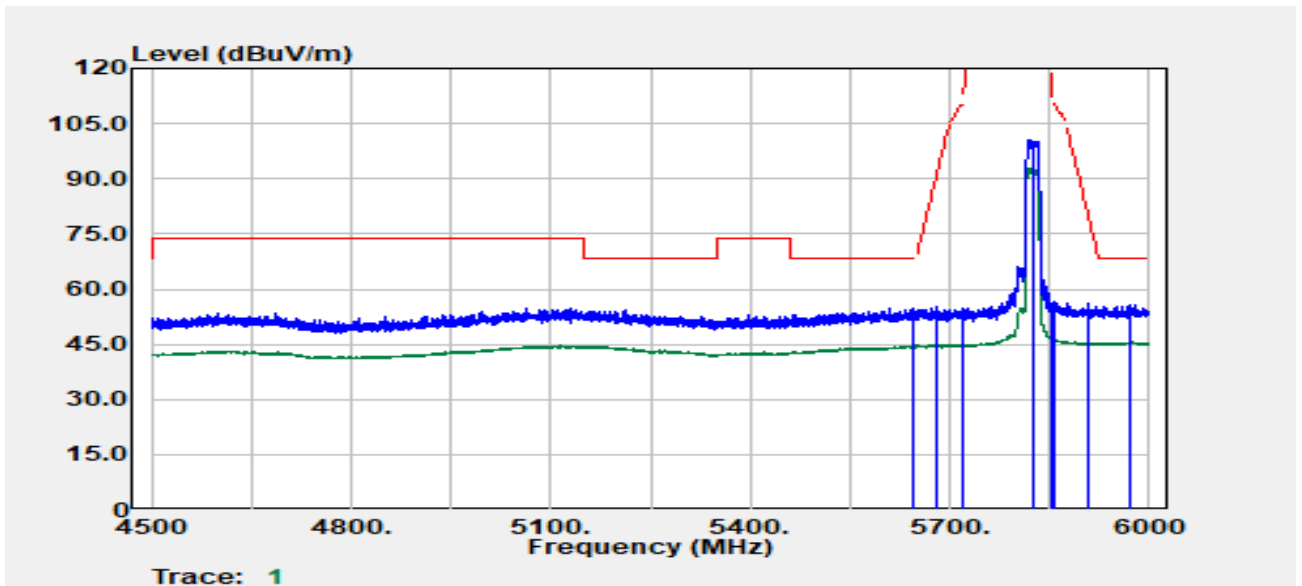


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5643.600 | Peak | 41.57 | 13.22 | 54.80 | 68.20 | -13.40 |
| 5680.200 | Peak | 41.67 | 13.45 | 55.12 | 90.59 | -35.47 |
| 5719.500 | Peak | 40.85 | 13.66 | 54.51 | 110.66 | -56.15 |
| 5721.000 | Peak | 40.20 | 13.67 | 53.87 | 113.08 | -59.21 |
| 5825.000 | Peak | 86.63 | 14.09 | 100.72 | -- | -- |
| 5825.000 | Average | 78.85 | 14.09 | 92.94 | -- | -- |
| 5853.000 | Peak | 41.87 | 14.02 | 55.89 | 115.36 | -59.47 |
| 5856.300 | Peak | 42.78 | 14.02 | 56.80 | 110.44 | -53.63 |
| 5910.000 | Peak | 42.07 | 14.06 | 56.13 | 79.27 | -23.14 |
| 5971.800 | Peak | 41.70 | 14.16 | 55.85 | 68.20 | -12.35 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

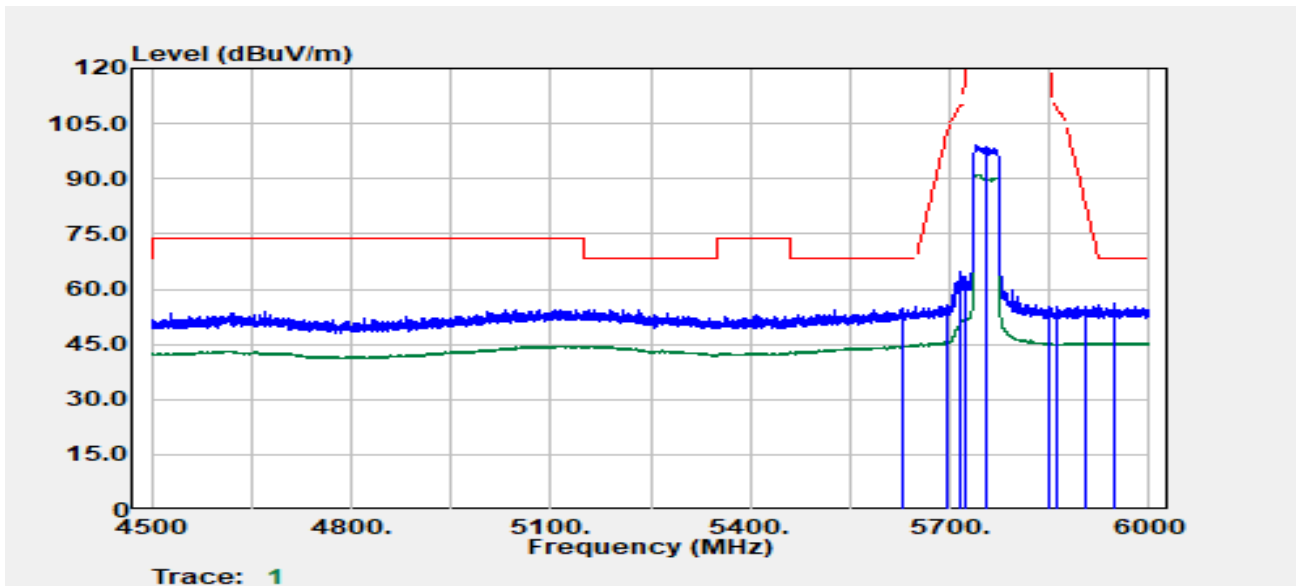


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5629.200 | Peak | 41.73 | 13.09 | 54.82 | 68.20 | -13.38 |
| 5696.100 | Peak | 42.07 | 13.54 | 55.60 | 102.33 | -46.72 |
| 5717.400 | Peak | 50.95 | 13.65 | 64.60 | 110.07 | -45.47 |
| 5722.800 | Peak | 49.92 | 13.68 | 63.60 | 117.19 | -53.58 |
| 5755.000 | Peak | 85.29 | 13.85 | 99.14 | -- | -- |
| 5755.000 | Average | 77.39 | 13.85 | 91.24 | -- | -- |
| 5850.900 | Peak | 40.10 | 14.02 | 54.12 | 120.15 | -66.03 |
| 5862.300 | Peak | 41.43 | 14.02 | 55.45 | 108.75 | -53.30 |
| 5906.100 | Peak | 41.42 | 14.05 | 55.47 | 82.15 | -26.68 |
| 5946.600 | Peak | 41.82 | 14.15 | 55.97 | 68.20 | -12.23 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

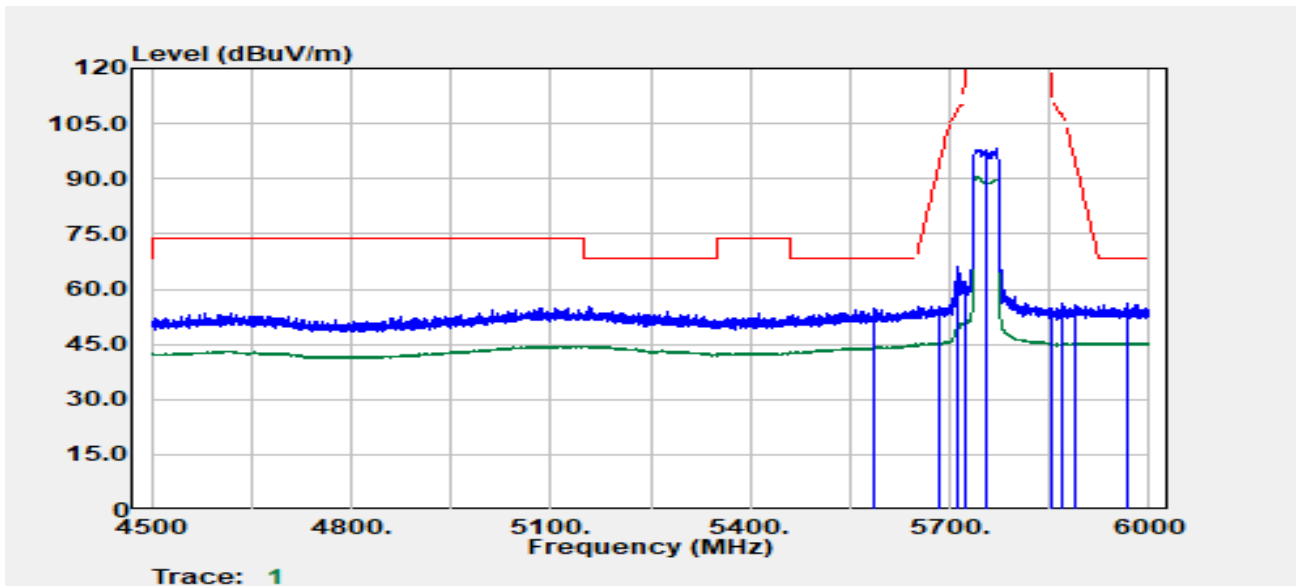


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5587.200 | Peak | 41.80 | 12.85 | 54.65 | 68.20 | -13.55 |
| 5684.100 | Peak | 41.73 | 13.47 | 55.20 | 93.47 | -38.27 |
| 5709.900 | Peak | 52.44 | 13.61 | 66.05 | 107.97 | -41.93 |
| 5721.900 | Peak | 48.31 | 13.67 | 61.99 | 115.13 | -53.15 |
| 5755.000 | Peak | 84.56 | 13.85 | 98.42 | -- | -- |
| 5755.000 | Average | 76.66 | 13.85 | 90.51 | -- | -- |
| 5853.300 | Peak | 40.49 | 14.02 | 54.51 | 114.67 | -60.16 |
| 5868.300 | Peak | 42.12 | 14.02 | 56.14 | 107.07 | -50.93 |
| 5889.600 | Peak | 41.46 | 14.03 | 55.49 | 94.36 | -38.87 |
| 5965.800 | Peak | 42.00 | 14.16 | 56.16 | 68.20 | -12.04 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5795 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

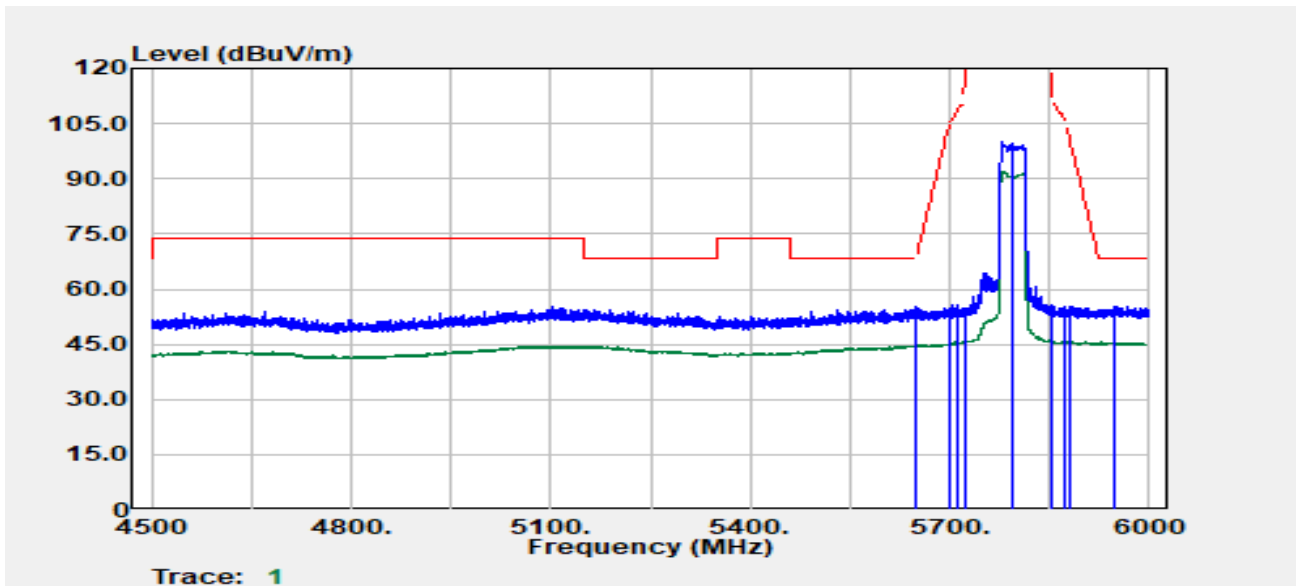


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5647.800 | Peak | 41.99 | 13.26 | 55.25 | 68.20 | -12.95 |
| 5700.000 | Peak | 41.44 | 13.56 | 55.00 | 105.20 | -50.20 |
| 5713.500 | Peak | 42.16 | 13.63 | 55.79 | 108.98 | -53.19 |
| 5721.900 | Peak | 41.01 | 13.67 | 54.68 | 115.13 | -60.45 |
| 5795.000 | Peak | 85.73 | 14.13 | 99.85 | -- | -- |
| 5795.000 | Average | 77.62 | 14.13 | 91.75 | -- | -- |
| 5852.100 | Peak | 41.13 | 14.02 | 55.15 | 117.41 | -62.26 |
| 5871.300 | Peak | 41.33 | 14.02 | 55.35 | 106.23 | -50.88 |
| 5879.100 | Peak | 41.36 | 14.03 | 55.39 | 102.15 | -46.76 |
| 5947.200 | Peak | 41.19 | 14.15 | 55.35 | 68.20 | -12.85 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5795 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

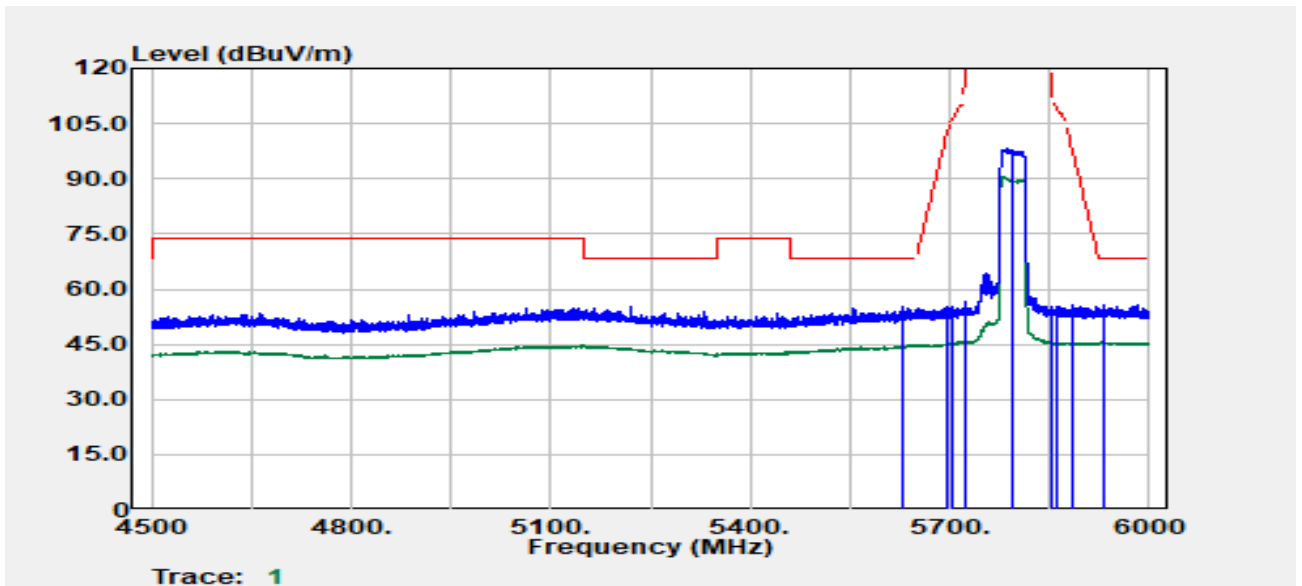


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5629.800 | Peak | 42.08 | 13.10 | 55.18 | 68.20 | -13.02 |
| 5697.900 | Peak | 41.63 | 13.55 | 55.18 | 103.65 | -48.47 |
| 5703.000 | Peak | 41.66 | 13.58 | 55.23 | 106.04 | -50.81 |
| 5724.000 | Peak | 43.03 | 13.68 | 56.71 | 119.92 | -63.21 |
| 5795.000 | Peak | 84.32 | 14.13 | 98.45 | -- | -- |
| 5795.000 | Average | 76.35 | 14.13 | 90.48 | -- | -- |
| 5853.300 | Peak | 41.03 | 14.02 | 55.05 | 114.67 | -59.62 |
| 5862.600 | Peak | 41.26 | 14.02 | 55.28 | 108.67 | -53.39 |
| 5886.300 | Peak | 41.59 | 14.03 | 55.62 | 96.81 | -41.19 |
| 5931.900 | Peak | 41.71 | 14.11 | 55.82 | 68.20 | -12.38 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band4
 Frequency :5775 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

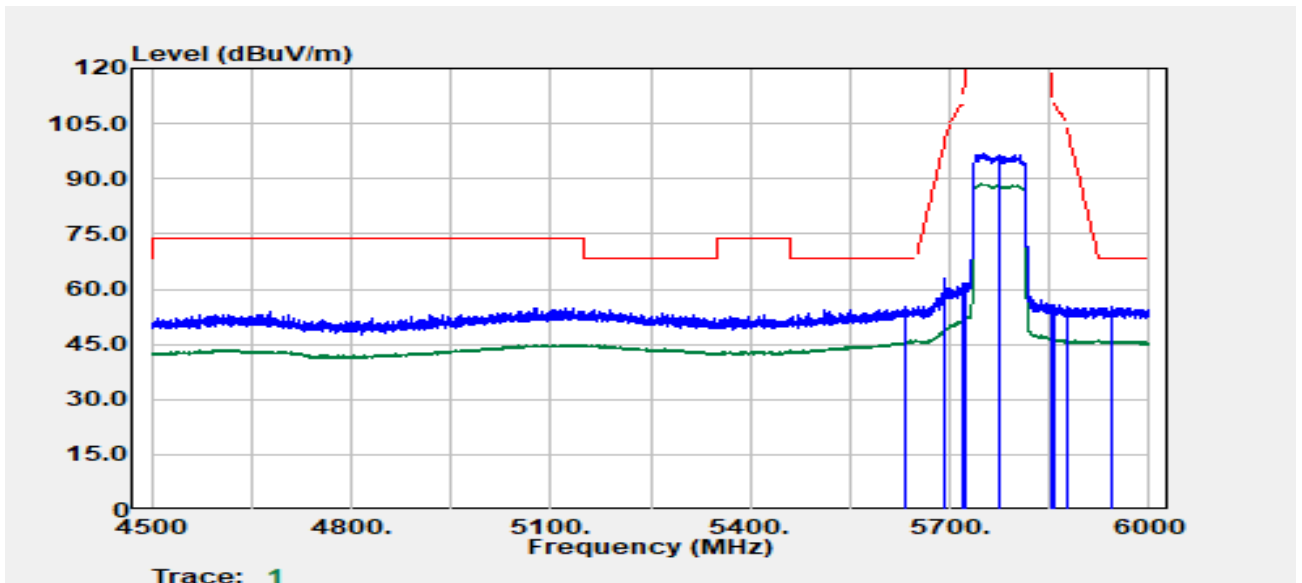


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5634.300 | Peak | 42.25 | 13.14 | 55.39 | 68.20 | -12.81 |
| 5692.200 | Peak | 49.54 | 13.52 | 63.05 | 99.45 | -36.40 |
| 5719.200 | Peak | 48.04 | 13.66 | 61.70 | 110.58 | -48.88 |
| 5724.900 | Peak | 47.70 | 13.69 | 61.39 | 121.97 | -60.58 |
| 5775.000 | Peak | 82.69 | 13.99 | 96.68 | -- | -- |
| 5775.000 | Average | 74.57 | 13.99 | 88.56 | -- | -- |
| 5852.700 | Peak | 41.65 | 14.02 | 55.67 | 116.04 | -60.37 |
| 5858.400 | Peak | 41.77 | 14.02 | 55.79 | 109.85 | -54.06 |
| 5877.000 | Peak | 41.18 | 14.03 | 55.21 | 103.71 | -48.50 |
| 5943.600 | Peak | 41.09 | 14.14 | 55.23 | 68.20 | -12.97 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band4
 Frequency :5775 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :


Test Date :2023-08-30
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

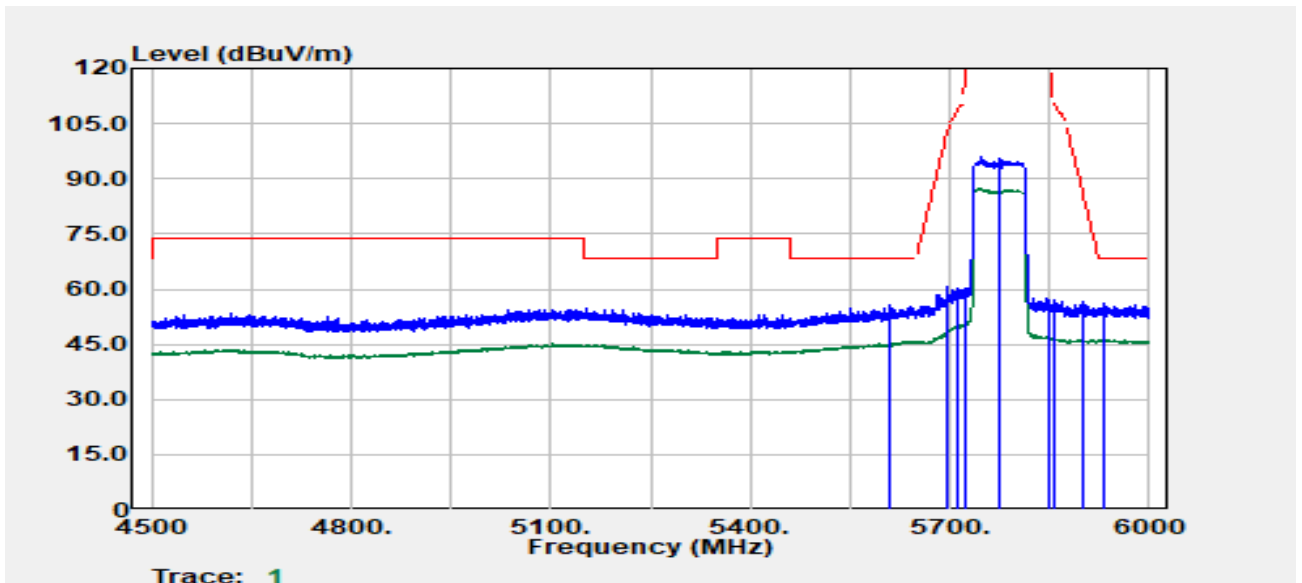

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5611.200 | Peak | 42.75 | 12.93 | 55.68 | 68.20 | -12.52 |
| 5696.700 | Peak | 47.35 | 13.54 | 60.89 | 102.77 | -41.88 |
| 5710.800 | Peak | 46.49 | 13.62 | 60.10 | 108.23 | -48.12 |
| 5724.300 | Peak | 46.47 | 13.69 | 60.16 | 120.60 | -60.44 |
| 5775.000 | Peak | 81.79 | 13.99 | 95.78 | -- | -- |
| 5775.000 | Average | 73.57 | 13.99 | 87.56 | -- | -- |
| 5850.900 | Peak | 42.05 | 14.02 | 56.07 | 120.15 | -64.08 |
| 5855.700 | Peak | 42.85 | 14.02 | 56.87 | 110.60 | -53.73 |
| 5900.400 | Peak | 42.55 | 14.03 | 56.58 | 86.36 | -29.79 |
| 5932.800 | Peak | 41.84 | 14.12 | 55.95 | 68.20 | -12.25 |

Band Edge Test Data: (IC)

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band1 | Temp./Humi. | :24.6/57 |
| Frequency | :5180 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

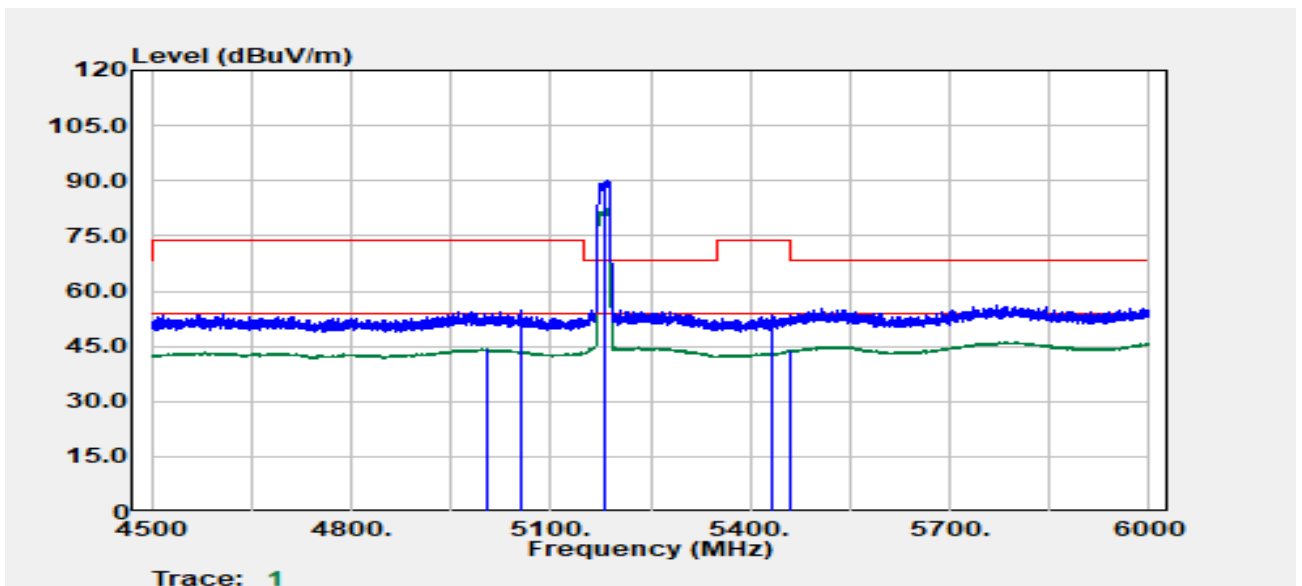


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5005.334 | Average | 32.58 | 11.65 | 44.23 | 54.00 | -9.77 |
| 5057.093 | Peak | 42.72 | 11.96 | 54.69 | 74.00 | -19.31 |
| 5180.000 | Peak | 78.00 | 12.10 | 90.10 | -- | -- |
| 5180.000 | Average | 70.11 | 12.10 | 82.21 | -- | -- |
| 5431.155 | Peak | 40.90 | 12.35 | 53.25 | 74.00 | -20.75 |
| 5459.660 | Average | 31.45 | 12.41 | 43.86 | 54.00 | -10.14 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band1
 Frequency :5180 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :


Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

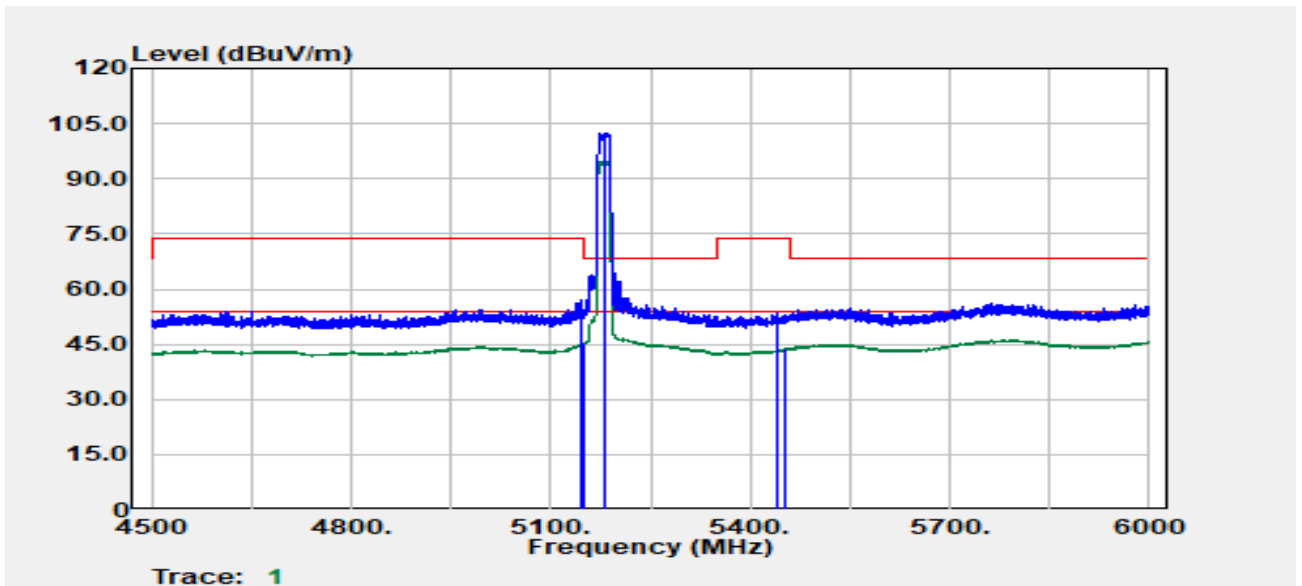

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5145.600 | Peak | 44.90 | 12.15 | 57.05 | 74.00 | -16.95 |
| 5149.200 | Average | 33.06 | 12.16 | 45.22 | 54.00 | -8.78 |
| 5180.000 | Peak | 90.13 | 12.10 | 102.23 | -- | -- |
| 5180.000 | Average | 82.72 | 12.10 | 94.82 | -- | -- |
| 5440.800 | Peak | 40.97 | 12.36 | 53.33 | 74.00 | -20.67 |
| 5454.000 | Average | 31.44 | 12.39 | 43.83 | 54.00 | -10.17 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11n20/Band1 | Temp./Humi. | :24.6/57 |
| Frequency | :5180 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

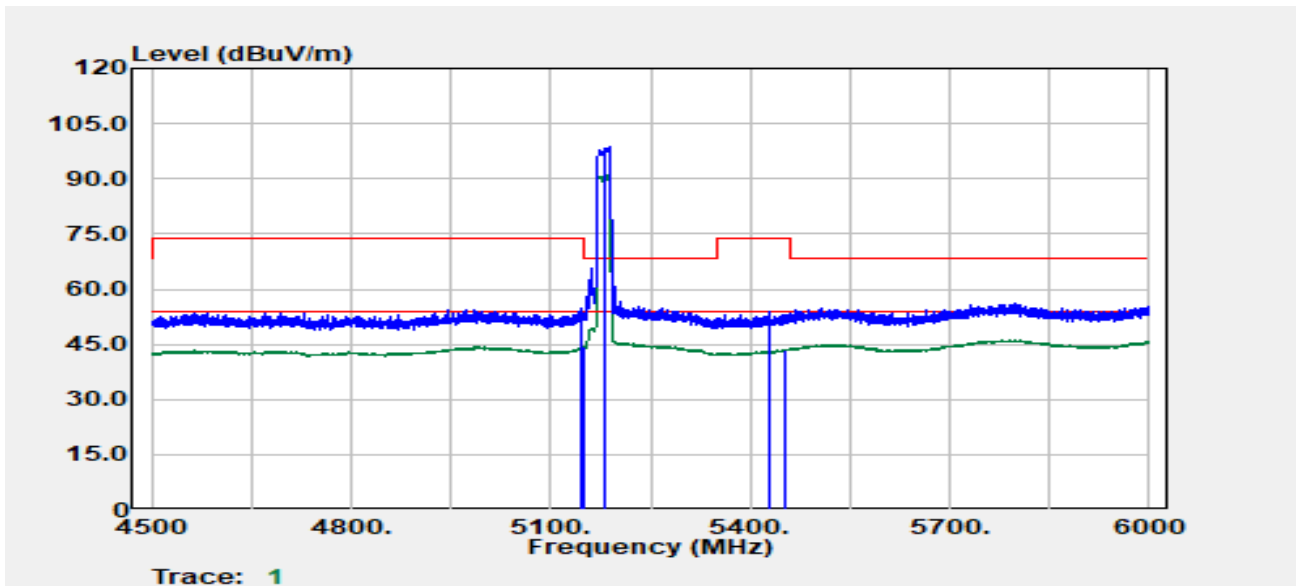


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5145.600 | Peak | 42.86 | 12.15 | 55.01 | 74.00 | -18.99 |
| 5149.800 | Average | 32.07 | 12.16 | 44.23 | 54.00 | -9.77 |
| 5180.000 | Peak | 86.60 | 12.10 | 98.70 | -- | -- |
| 5180.000 | Average | 78.78 | 12.10 | 90.88 | -- | -- |
| 5430.000 | Peak | 41.35 | 12.35 | 53.70 | 74.00 | -20.30 |
| 5454.000 | Average | 31.24 | 12.39 | 43.63 | 54.00 | -10.37 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5180 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :


Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

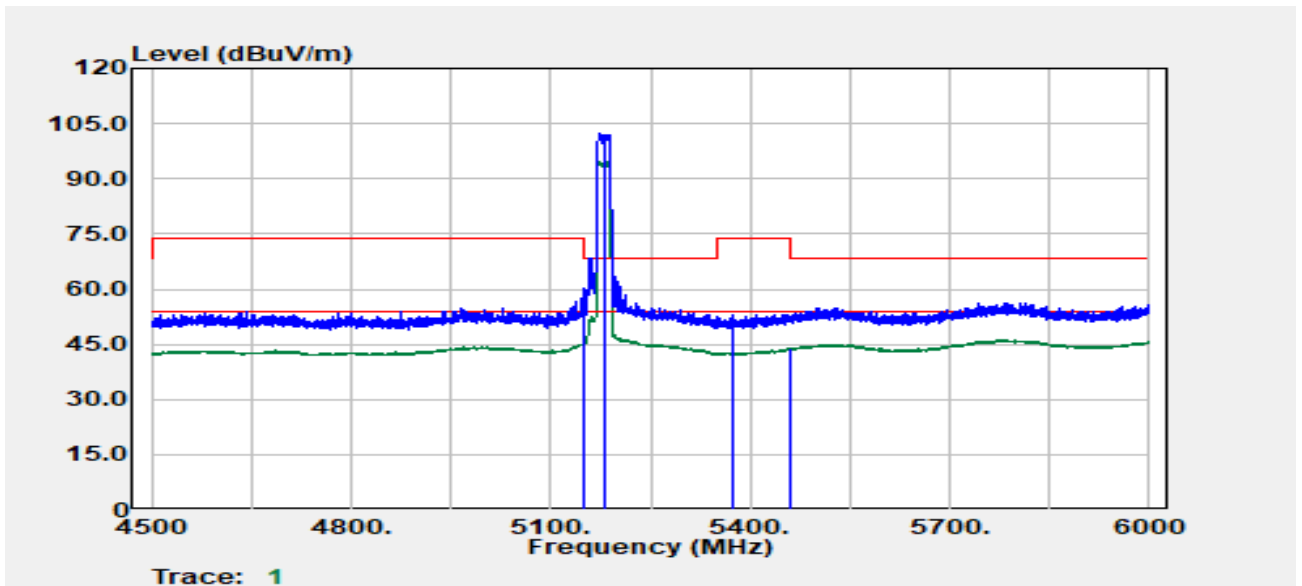

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5148.600 | Peak | 47.96 | 12.16 | 60.12 | 74.00 | -13.88 |
| 5149.800 | Average | 32.97 | 12.16 | 45.13 | 54.00 | -8.87 |
| 5180.000 | Peak | 90.30 | 12.10 | 102.40 | -- | -- |
| 5180.000 | Average | 82.47 | 12.10 | 94.57 | -- | -- |
| 5372.100 | Peak | 40.99 | 12.21 | 53.20 | 74.00 | -20.80 |
| 5459.400 | Average | 31.41 | 12.41 | 43.82 | 54.00 | -10.18 |

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band1
 Frequency :5190 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :


Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

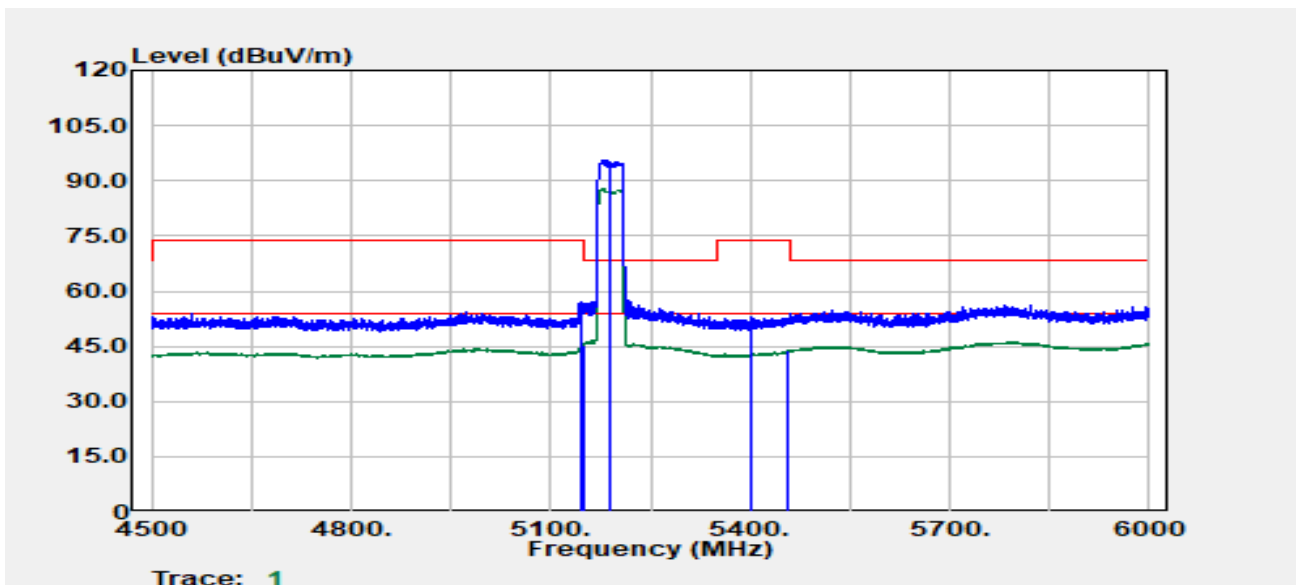

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5146.500 | Peak | 44.92 | 12.15 | 57.07 | 74.00 | -16.93 |
| 5149.800 | Average | 33.13 | 12.16 | 45.29 | 54.00 | -8.71 |
| 5190.000 | Peak | 83.60 | 12.08 | 95.68 | -- | -- |
| 5190.000 | Average | 75.56 | 12.08 | 87.64 | -- | -- |
| 5400.600 | Peak | 40.72 | 12.32 | 53.04 | 74.00 | -20.96 |
| 5457.300 | Average | 31.44 | 12.40 | 43.84 | 54.00 | -10.16 |


Project Number :TM-2308000057P
 Operation Band :802.11n40/Band1
 Frequency :5190 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

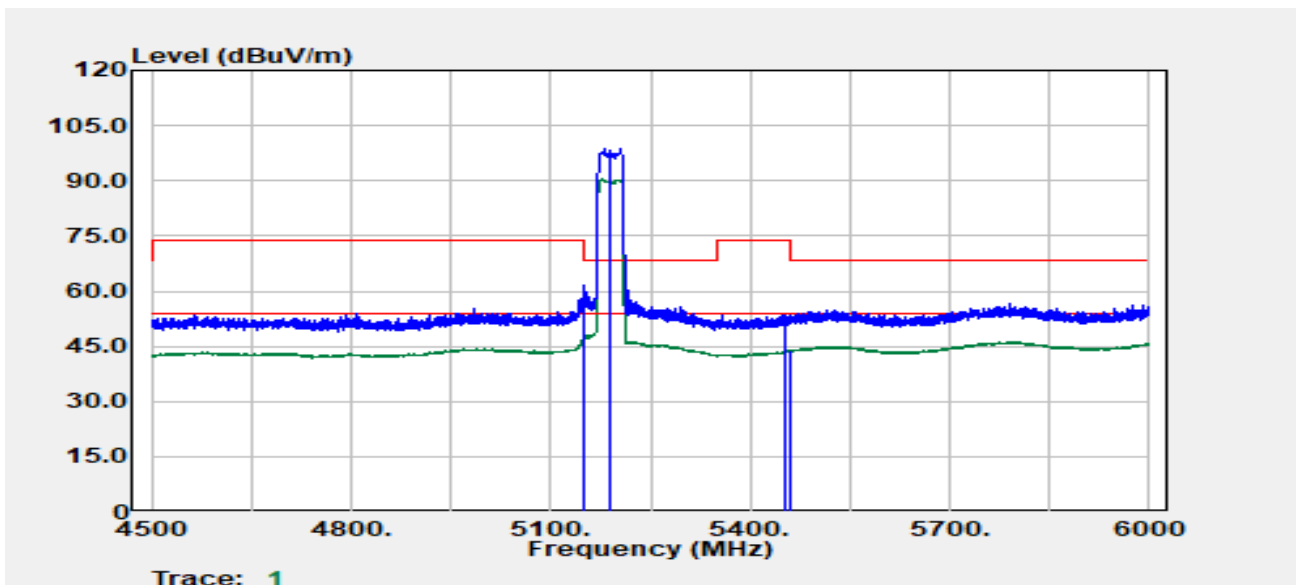

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5148.300 | Peak | 49.43 | 12.16 | 61.58 | 74.00 | -12.42 |
| 5149.500 | Average | 34.85 | 12.16 | 47.00 | 54.00 | -7.00 |
| 5190.000 | Peak | 86.75 | 12.08 | 98.83 | -- | -- |
| 5190.000 | Average | 78.35 | 12.08 | 90.43 | -- | -- |
| 5452.500 | Peak | 40.96 | 12.38 | 53.34 | 74.00 | -20.66 |
| 5459.700 | Average | 31.51 | 12.41 | 43.91 | 54.00 | -10.09 |


| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11ac80/Band1 | Temp./Humi. | :24.6/57 |
| Frequency | :5210 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

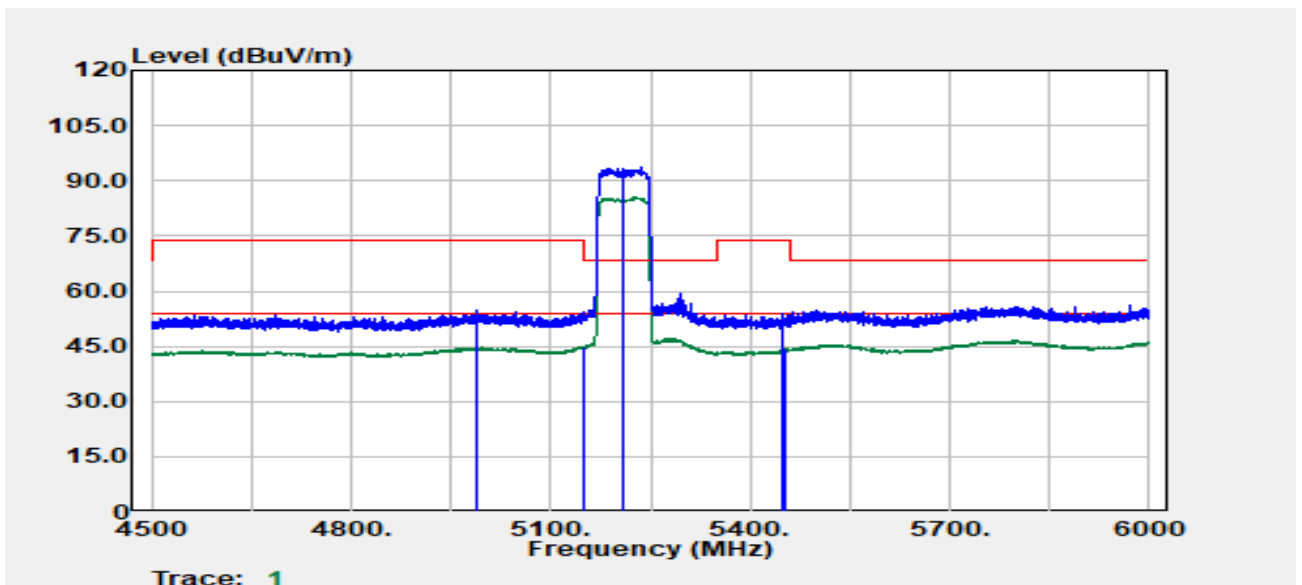

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 4989.900 | Peak | 43.07 | 11.52 | 54.59 | 74.00 | -19.41 |
| 5148.900 | Average | 32.87 | 12.16 | 45.03 | 54.00 | -8.97 |
| 5210.000 | Peak | 81.75 | 12.06 | 93.80 | -- | -- |
| 5210.000 | Average | 73.38 | 12.06 | 85.44 | -- | -- |
| 5449.200 | Peak | 41.44 | 12.37 | 53.82 | 74.00 | -20.18 |
| 5453.400 | Average | 31.96 | 12.39 | 44.35 | 54.00 | -9.65 |

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band1
 Frequency :5210 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

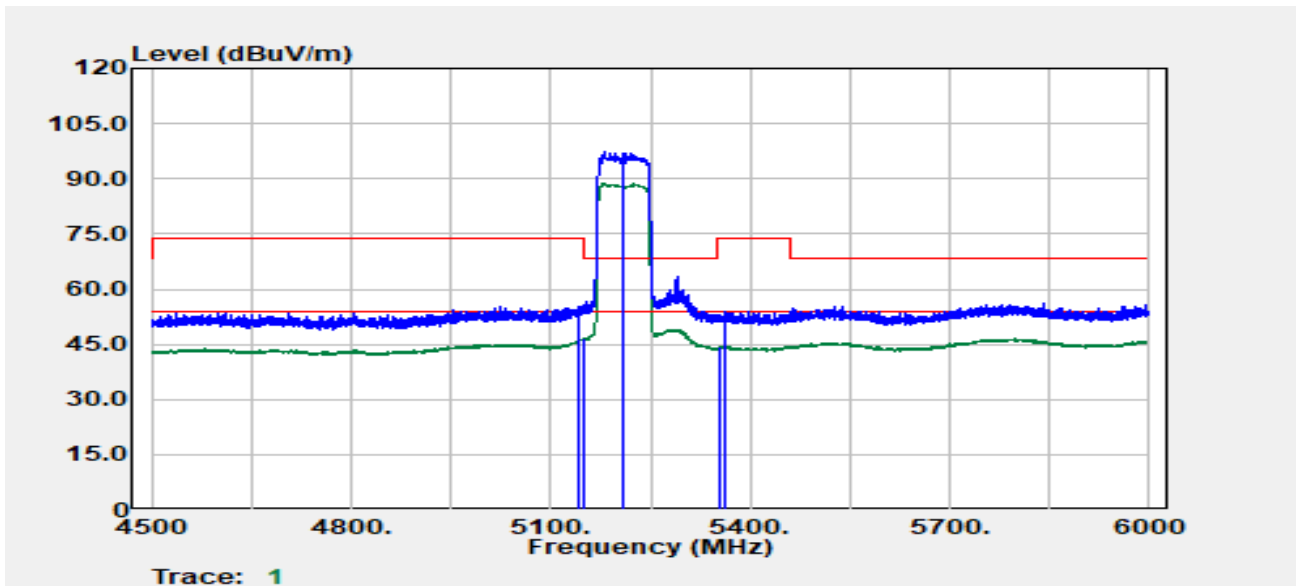


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5140.200 | Peak | 43.32 | 12.14 | 55.45 | 74.00 | -18.55 |
| 5148.300 | Average | 34.36 | 12.16 | 46.51 | 54.00 | -7.49 |
| 5210.000 | Peak | 85.13 | 12.06 | 97.18 | -- | -- |
| 5210.000 | Average | 76.63 | 12.06 | 88.69 | -- | -- |
| 5352.300 | Average | 32.24 | 12.14 | 44.38 | 54.00 | -9.62 |
| 5361.300 | Peak | 41.71 | 12.17 | 53.88 | 74.00 | -20.12 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-29 |
| Operation Band | :802.11a/Band2 | Temp./Humi. | :24.4/57 |
| Frequency | :5320 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

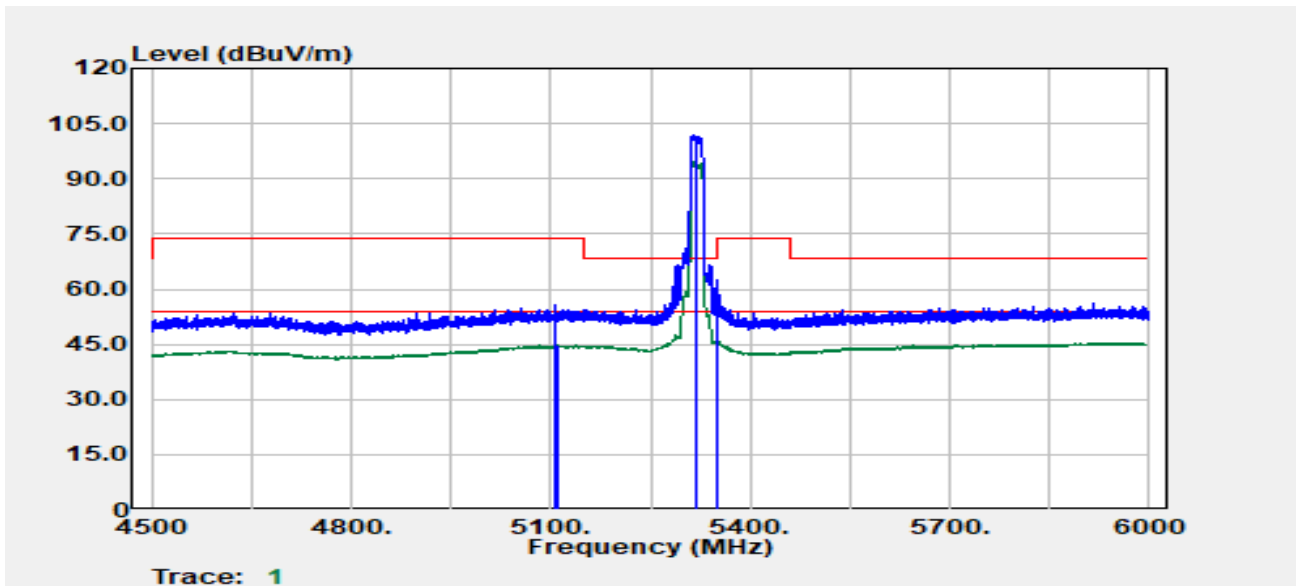


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5107.851 | Peak | 43.53 | 12.07 | 55.59 | 74.00 | -18.41 |
| 5110.352 | Average | 32.69 | 12.07 | 44.76 | 54.00 | -9.24 |
| 5320.000 | Peak | 89.76 | 12.14 | 101.90 | -- | -- |
| 5320.000 | Average | 82.60 | 12.14 | 94.74 | -- | -- |
| 5350.392 | Average | 33.50 | 12.13 | 45.63 | 54.00 | -8.37 |
| 5351.892 | Peak | 50.37 | 12.14 | 62.50 | 74.00 | -11.50 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band2
 Frequency :5320 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

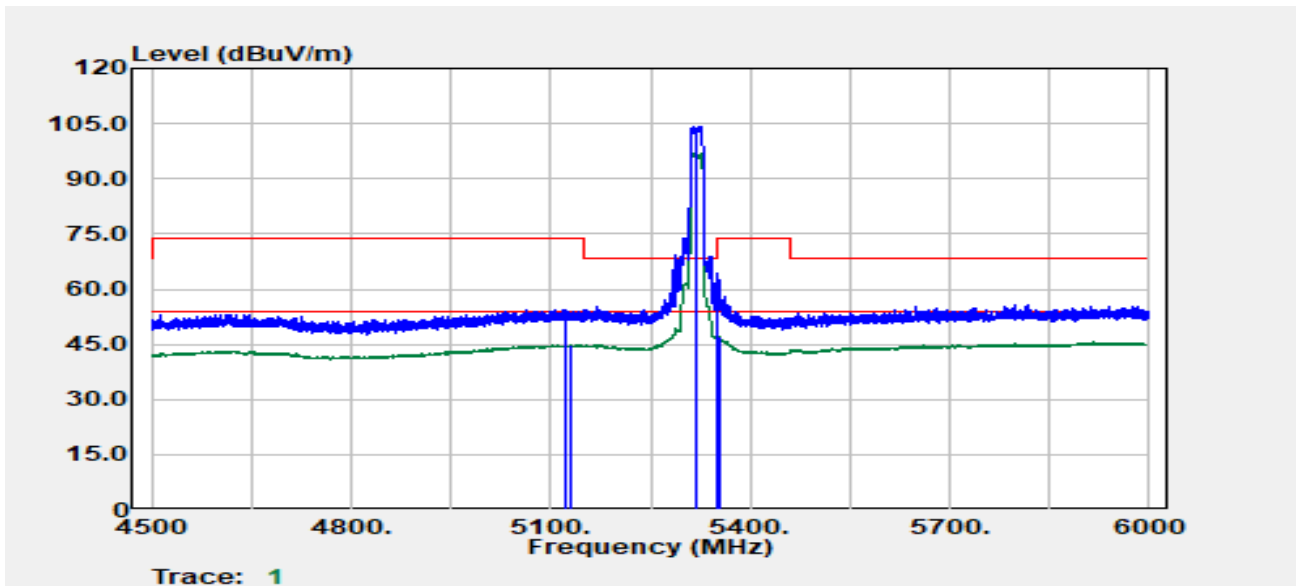


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5120.604 | Peak | 42.39 | 12.10 | 54.49 | 74.00 | -19.51 |
| 5130.355 | Average | 32.63 | 12.12 | 44.75 | 54.00 | -9.25 |
| 5320.000 | Peak | 92.06 | 12.14 | 104.20 | -- | -- |
| 5320.000 | Average | 84.77 | 12.14 | 96.91 | -- | -- |
| 5350.642 | Peak | 52.39 | 12.13 | 64.52 | 74.00 | -9.48 |
| 5352.642 | Average | 34.94 | 12.14 | 47.08 | 54.00 | -6.92 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-29 |
| Operation Band | :802.11n20/Band2 | Temp./Humi. | :24.4/57 |
| Frequency | :5320 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

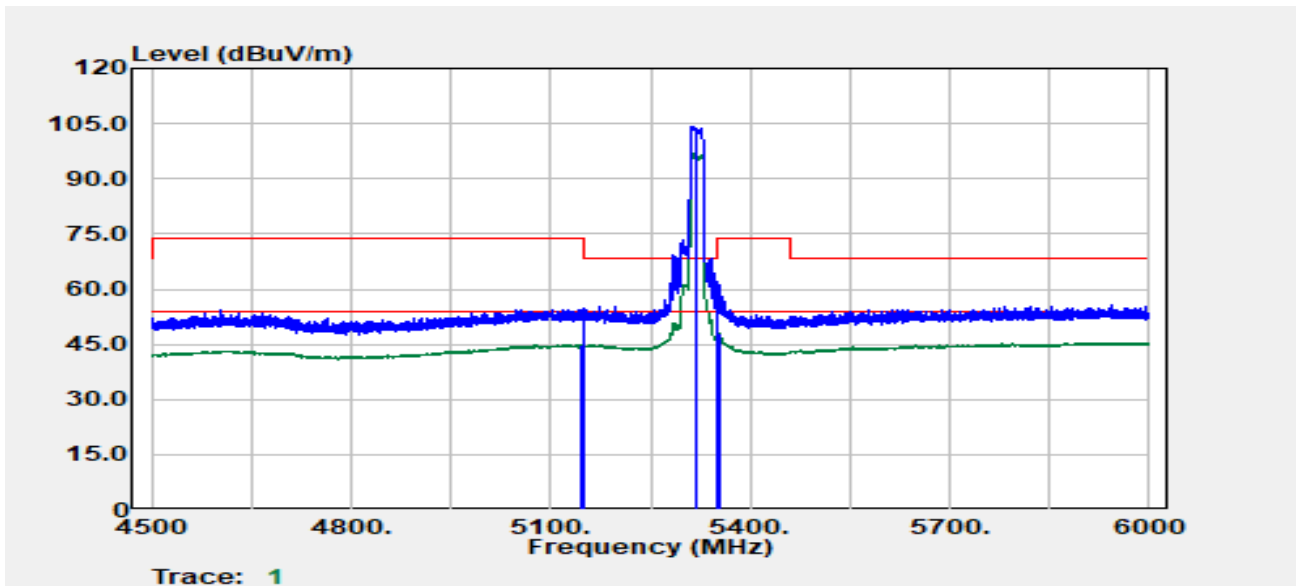


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5147.608 | Average | 32.61 | 12.15 | 44.77 | 54.00 | -9.23 |
| 5150.108 | Peak | 42.68 | 12.16 | 54.84 | 68.20 | -13.36 |
| 5320.000 | Peak | 92.12 | 12.14 | 104.26 | -- | -- |
| 5320.000 | Average | 84.87 | 12.14 | 97.01 | -- | -- |
| 5351.142 | Peak | 49.96 | 12.13 | 62.10 | 74.00 | -11.90 |
| 5352.892 | Average | 35.68 | 12.14 | 47.82 | 54.00 | -6.18 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5320 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

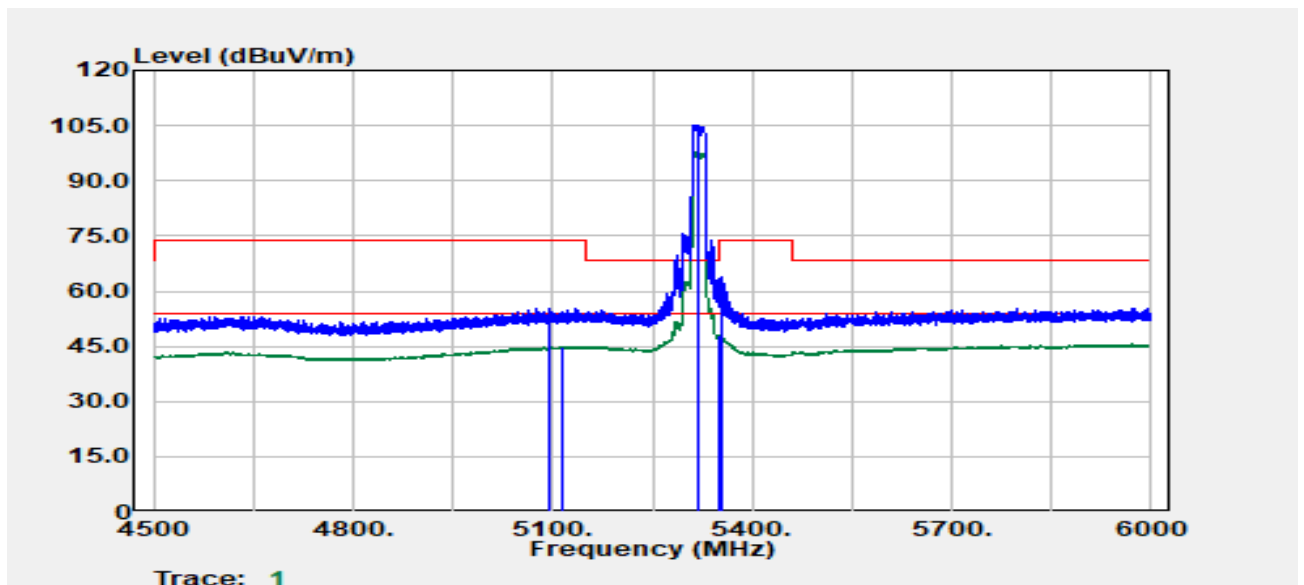


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5094.849 | Peak | 43.32 | 12.04 | 55.36 | 74.00 | -18.64 |
| 5115.853 | Average | 32.67 | 12.08 | 44.76 | 54.00 | -9.24 |
| 5320.000 | Peak | 92.82 | 12.14 | 104.96 | -- | -- |
| 5320.000 | Average | 85.69 | 12.14 | 97.83 | -- | -- |
| 5351.142 | Average | 35.75 | 12.13 | 47.88 | 54.00 | -6.12 |
| 5353.142 | Peak | 51.61 | 12.14 | 63.75 | 74.00 | -10.25 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band2
 Frequency :5310 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

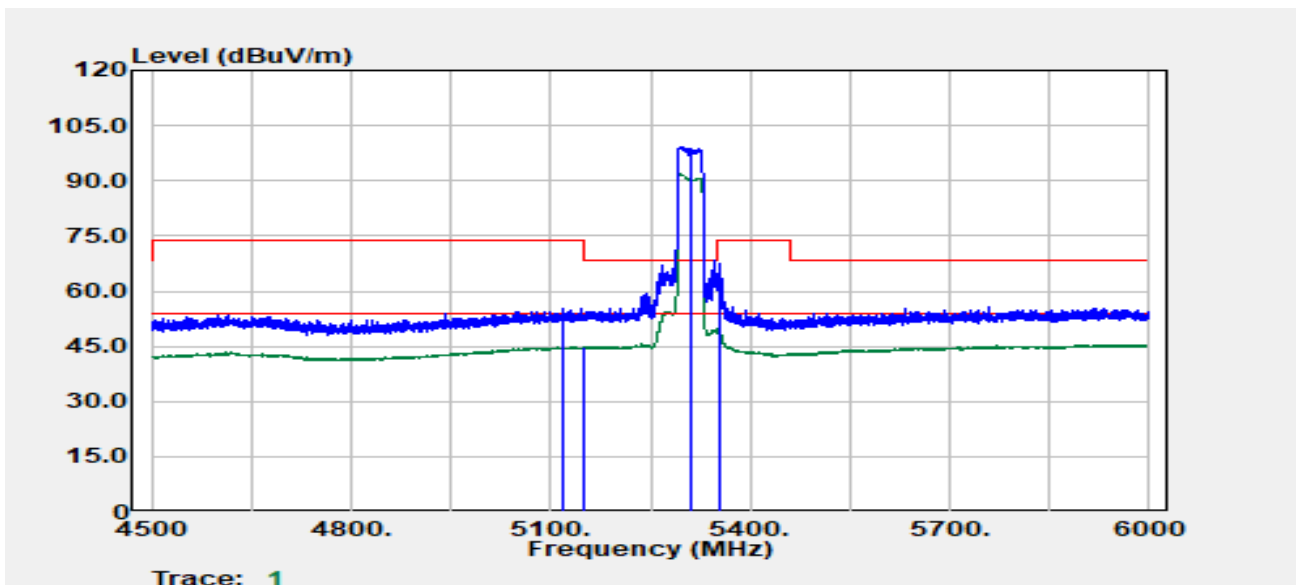


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5116.800 | Peak | 43.04 | 12.09 | 55.12 | 74.00 | -18.88 |
| 5149.800 | Average | 32.68 | 12.16 | 44.84 | 54.00 | -9.16 |
| 5310.000 | Peak | 87.11 | 12.15 | 99.26 | -- | -- |
| 5310.000 | Average | 79.64 | 12.15 | 91.78 | -- | -- |
| 5354.700 | Average | 37.90 | 12.15 | 50.05 | 54.00 | -3.95 |
| 5355.600 | Peak | 55.43 | 12.15 | 67.58 | 74.00 | -6.42 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band2
 Frequency :5310 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

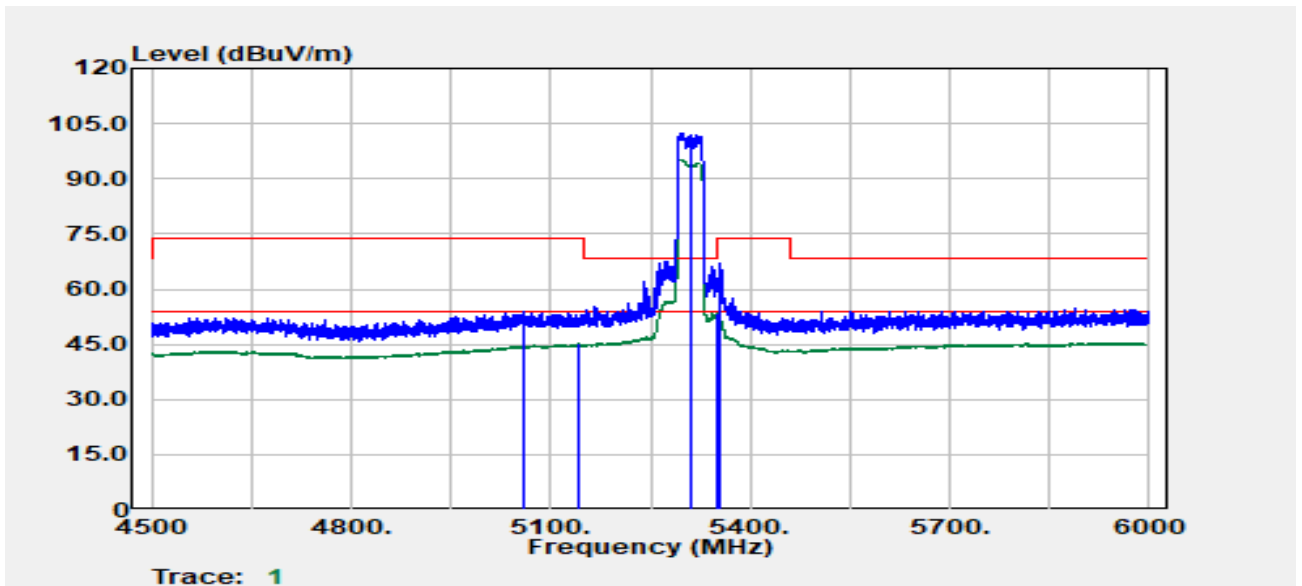


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5058.843 | Peak | 41.82 | 11.97 | 53.79 | 74.00 | -20.21 |
| 5142.857 | Average | 32.92 | 12.14 | 45.06 | 54.00 | -8.94 |
| 5310.000 | Peak | 90.31 | 12.15 | 102.46 | -- | -- |
| 5310.000 | Average | 82.99 | 12.15 | 95.14 | -- | -- |
| 5351.642 | Average | 41.26 | 12.14 | 53.40 | 54.00 | -0.60 |
| 5353.142 | Peak | 54.82 | 12.14 | 66.96 | 74.00 | -7.04 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band2
 Frequency :5290 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :55

Test Date :2023-08-30
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

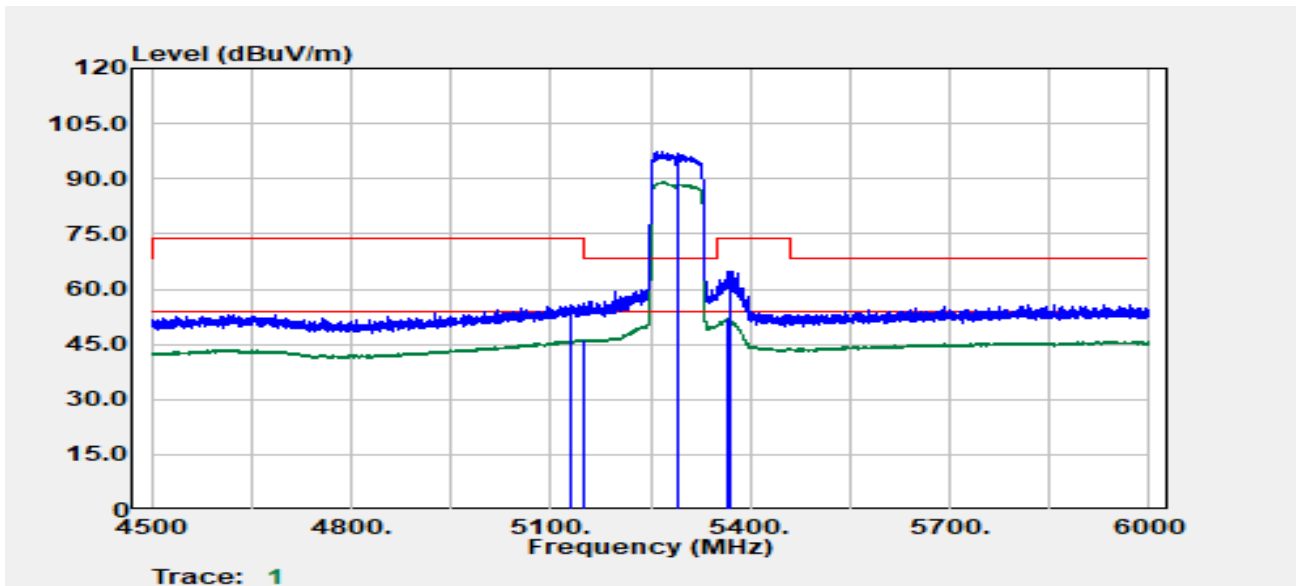


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5130.000 | Peak | 43.55 | 12.12 | 55.67 | 74.00 | -18.33 |
| 5148.600 | Average | 34.07 | 12.16 | 46.23 | 54.00 | -7.77 |
| 5290.000 | Peak | 85.40 | 12.13 | 97.52 | -- | -- |
| 5290.000 | Average | 76.97 | 12.13 | 89.10 | -- | -- |
| 5364.000 | Average | 39.81 | 12.18 | 51.99 | 54.00 | -2.01 |
| 5368.800 | Peak | 52.72 | 12.20 | 64.92 | 74.00 | -9.08 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band2
 Frequency :5290 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :55

Test Date :2023-08-30
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber :966A

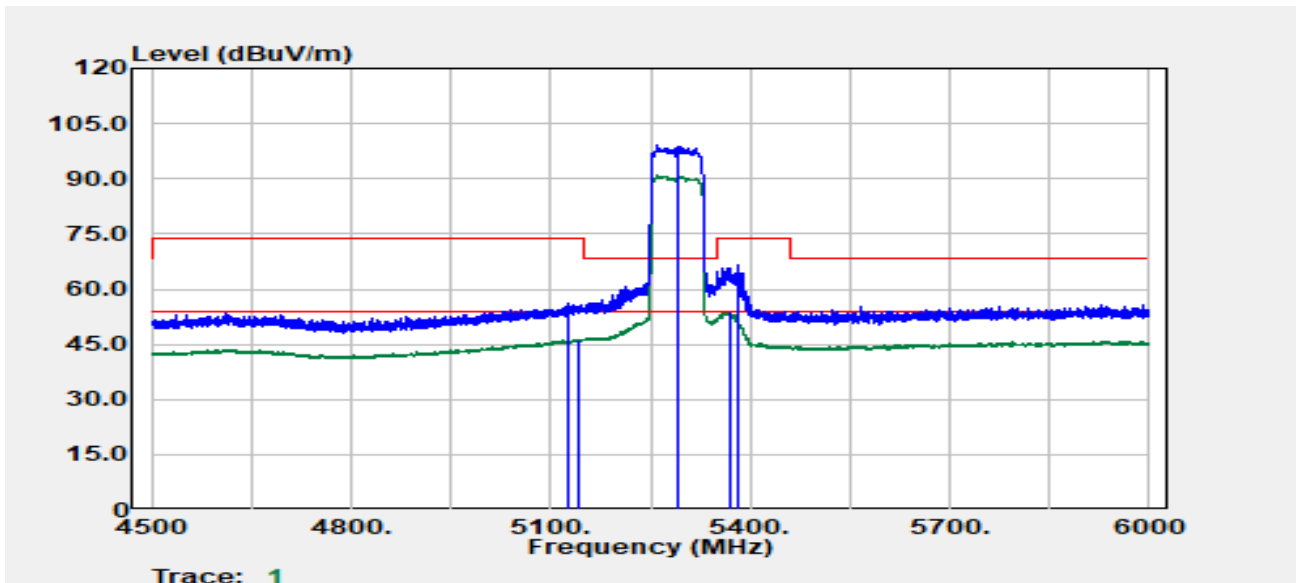


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5125.500 | Peak | 44.16 | 12.11 | 56.27 | 74.00 | -17.73 |
| 5142.600 | Average | 34.18 | 12.14 | 46.32 | 54.00 | -7.68 |
| 5290.000 | Peak | 86.93 | 12.13 | 99.06 | -- | -- |
| 5290.000 | Average | 78.75 | 12.13 | 90.88 | -- | -- |
| 5367.900 | Average | 41.61 | 12.20 | 53.81 | 54.00 | -0.19 |
| 5380.200 | Peak | 54.19 | 12.24 | 66.43 | 74.00 | -7.57 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band2_BT EDR | Temp./Humi. | :24.6/58 |
| Frequency | :2480 MHz_5290 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

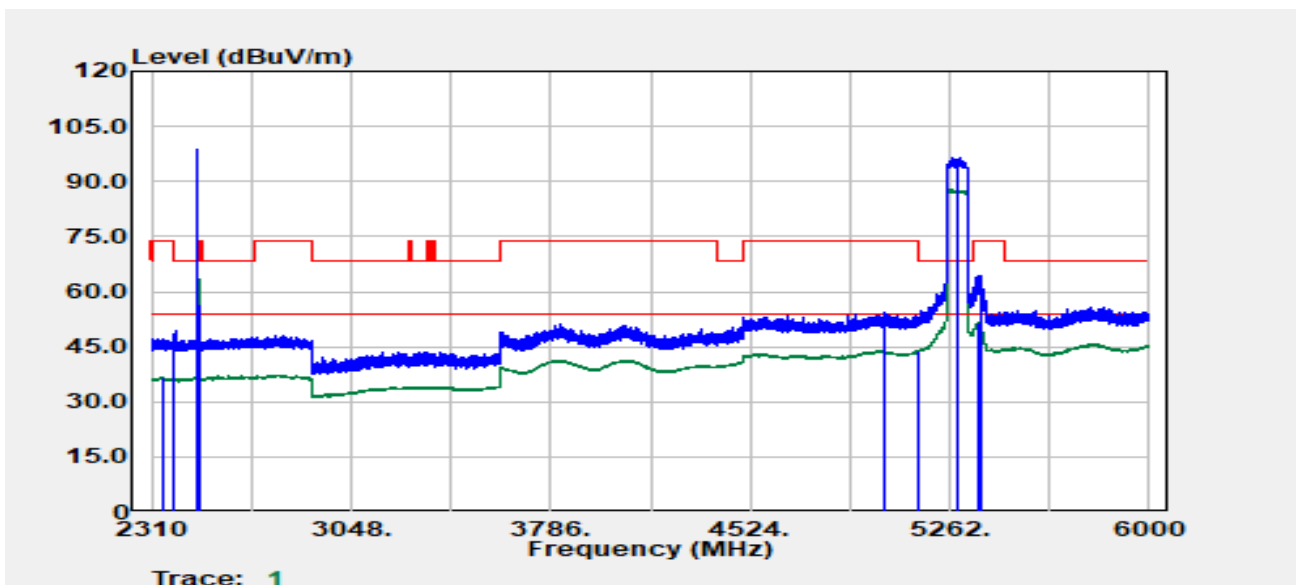


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBUV | Factor dB | Actual FS dBUV/m | Limit dBUV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 2347.766 | Average | 31.60 | 4.94 | 36.54 | 54.00 | -17.46 |
| 2389.534 | Peak | 42.76 | 4.97 | 47.73 | 74.00 | -26.27 |
| 2480.000 | Peak | 93.41 | 5.26 | 98.67 | -- | -- |
| 2480.000 | Average | 90.32 | 5.26 | 95.58 | -- | -- |
| 2483.573 | Average | 35.90 | 5.26 | 41.16 | 54.00 | -12.84 |
| 2483.824 | Peak | 43.34 | 5.26 | 48.61 | 74.00 | -25.39 |
| 5022.837 | Peak | 42.42 | 11.77 | 54.18 | 74.00 | -19.82 |
| 5150.108 | Average | 31.87 | 12.16 | 44.03 | 54.00 | -9.97 |
| 5290.000 | Peak | 84.26 | 12.13 | 96.39 | -- | -- |
| 5290.000 | Average | 75.78 | 12.13 | 87.91 | -- | -- |
| 5365.895 | Average | 39.29 | 12.19 | 51.48 | 54.00 | -2.52 |
| 5382.147 | Peak | 52.12 | 12.25 | 64.37 | 74.00 | -9.63 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band2_BT EDR | Temp./Humi. | :24.6/58 |
| Frequency | :2480 MHz_5290 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :Bandedge | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

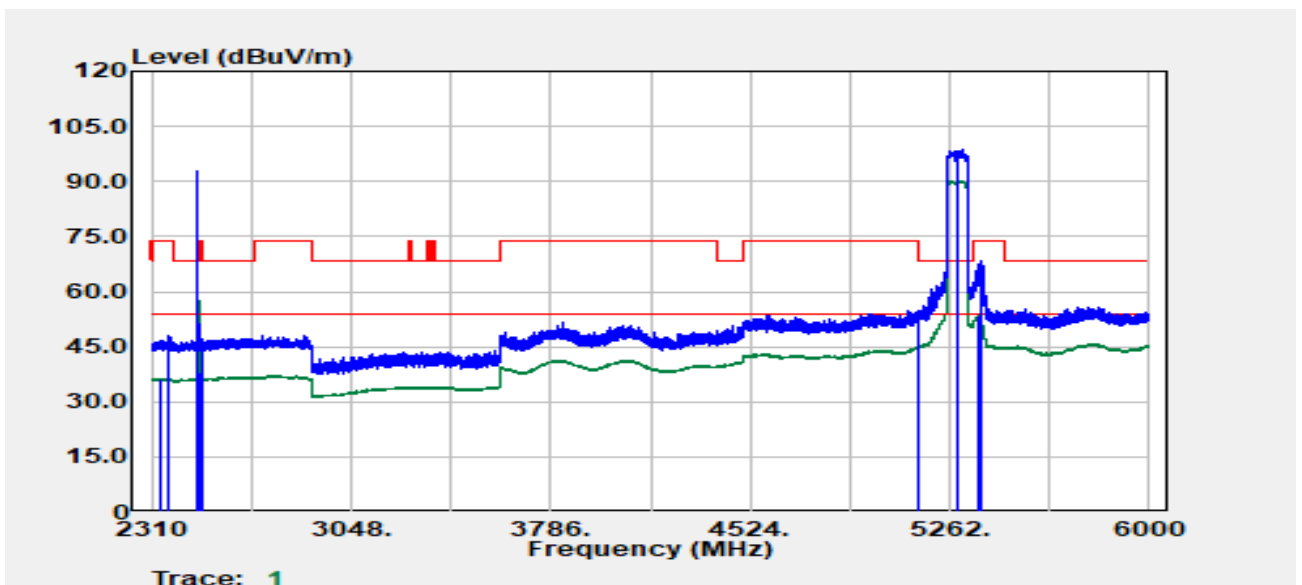


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBUV | Factor dB | Actual FS dBUV/m | Limit dBUV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 2340.513 | Average | 31.53 | 4.86 | 36.39 | 54.00 | -17.61 |
| 2373.777 | Peak | 43.17 | 4.81 | 47.98 | 74.00 | -26.02 |
| 2480.000 | Peak | 87.65 | 5.26 | 92.91 | -- | -- |
| 2480.000 | Average | 84.57 | 5.26 | 89.83 | -- | -- |
| 2483.573 | Average | 32.64 | 5.26 | 37.90 | 54.00 | -16.10 |
| 2493.578 | Peak | 41.78 | 5.27 | 47.06 | 74.00 | -26.94 |
| 5144.607 | Peak | 42.86 | 12.15 | 55.01 | 74.00 | -18.99 |
| 5145.857 | Average | 33.02 | 12.15 | 45.17 | 54.00 | -8.83 |
| 5290.000 | Peak | 86.68 | 12.13 | 98.81 | -- | -- |
| 5290.000 | Average | 78.16 | 12.13 | 90.29 | -- | -- |
| 5368.145 | Average | 41.38 | 12.20 | 53.58 | 54.00 | -0.42 |
| 5375.646 | Peak | 55.92 | 12.23 | 68.15 | 74.00 | -5.85 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-29 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :24.4/57 |
| Frequency | :5500 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

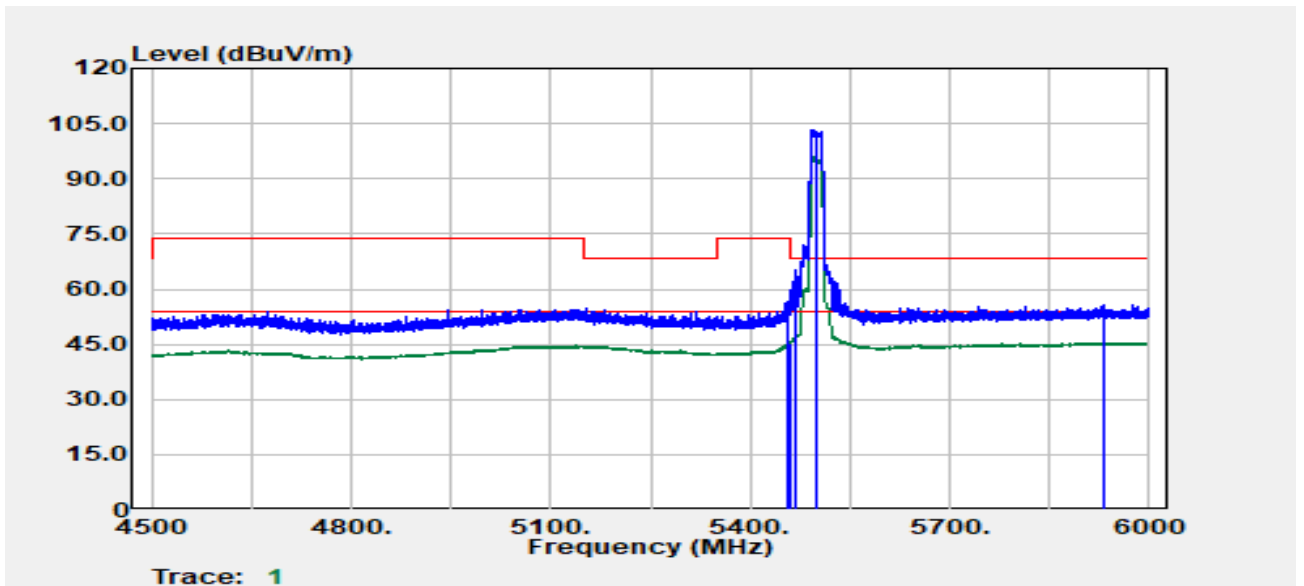


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5457.910 | Peak | 44.09 | 12.40 | 56.49 | 74.00 | -17.51 |
| 5459.910 | Average | 32.89 | 12.41 | 45.30 | 54.00 | -8.70 |
| 5466.911 | Peak | 52.87 | 12.43 | 65.30 | 68.20 | -2.90 |
| 5500.000 | Peak | 90.85 | 12.55 | 103.40 | -- | -- |
| 5500.000 | Average | 83.45 | 12.55 | 96.00 | -- | -- |
| 5930.738 | Peak | 41.67 | 14.11 | 55.78 | 68.20 | -12.42 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band3
 Frequency :5500 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

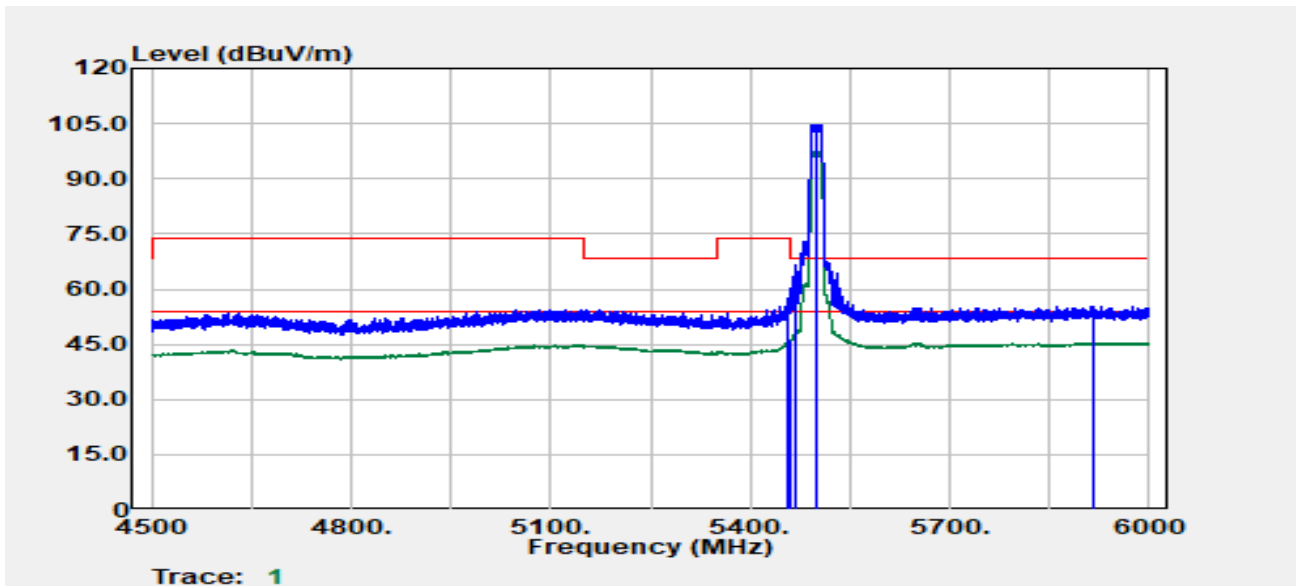


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5454.409 | Peak | 44.90 | 12.39 | 57.29 | 74.00 | -16.71 |
| 5459.410 | Average | 33.63 | 12.41 | 46.04 | 54.00 | -7.96 |
| 5467.411 | Peak | 54.05 | 12.44 | 66.49 | 68.20 | -1.71 |
| 5500.000 | Peak | 92.18 | 12.55 | 104.73 | -- | -- |
| 5500.000 | Average | 84.85 | 12.55 | 97.40 | -- | -- |
| 5916.236 | Peak | 41.27 | 14.07 | 55.34 | 68.20 | -12.86 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-29 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :24.4/57 |
| Frequency | :5700 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

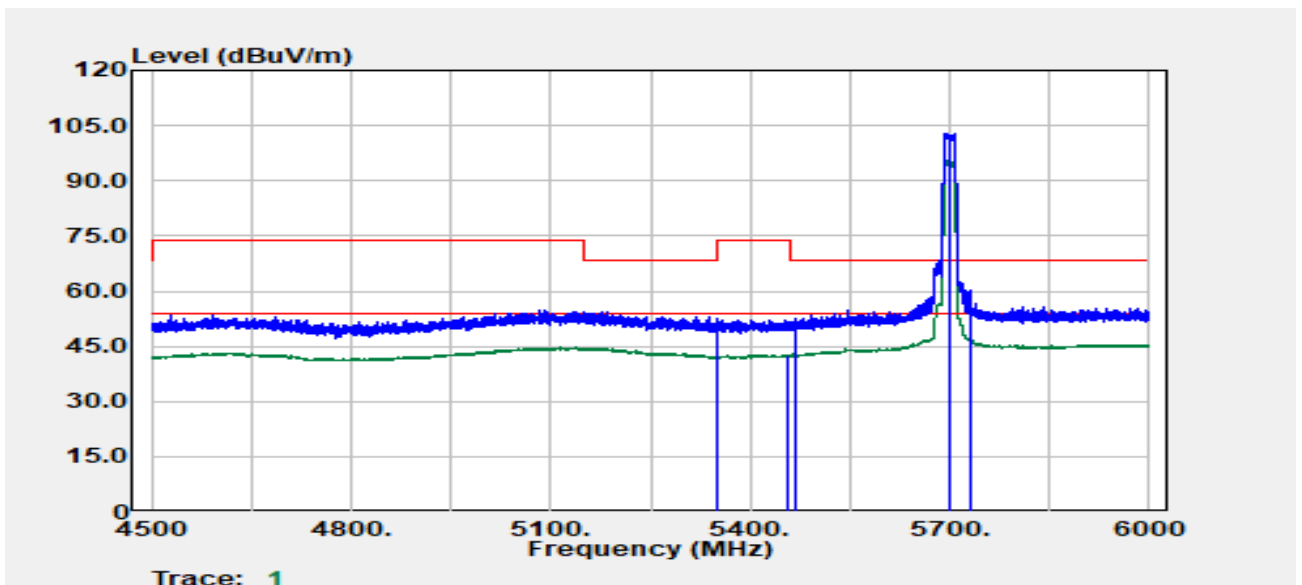


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5351.892 | Peak | 40.21 | 12.14 | 52.35 | 74.00 | -21.65 |
| 5456.409 | Average | 30.19 | 12.40 | 42.59 | 54.00 | -11.41 |
| 5467.411 | Peak | 40.21 | 12.44 | 52.64 | 68.20 | -15.56 |
| 5700.000 | Peak | 89.33 | 13.56 | 102.89 | -- | -- |
| 5700.000 | Average | 81.92 | 13.56 | 95.48 | -- | -- |
| 5731.205 | Peak | 46.46 | 13.72 | 60.18 | 68.20 | -8.02 |

Report No.: TMWK2308002691KR

Rev.: 00


Project Number :TM-2308000057P
 Operation Band :802.11a/Band3
 Frequency :5700 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

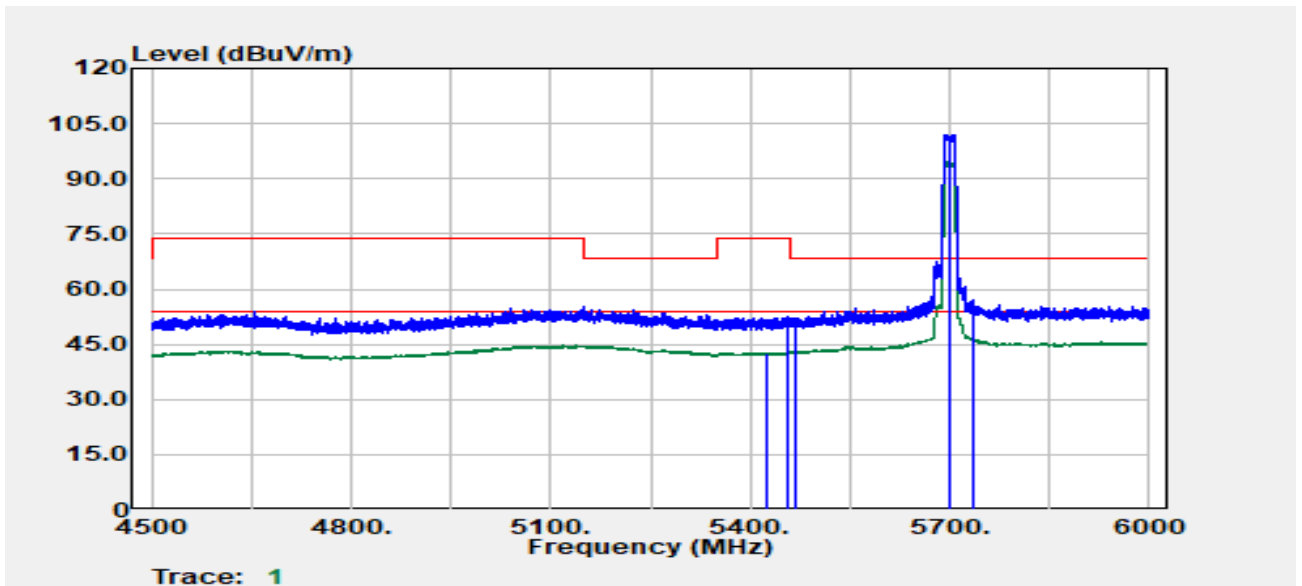

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5423.654 | Average | 30.36 | 12.35 | 42.71 | 54.00 | -11.29 |
| 5457.160 | Peak | 40.11 | 12.40 | 52.51 | 74.00 | -21.49 |
| 5466.911 | Peak | 39.72 | 12.43 | 52.16 | 68.20 | -16.04 |
| 5700.000 | Peak | 88.52 | 13.56 | 102.08 | -- | -- |
| 5700.000 | Average | 80.96 | 13.56 | 94.52 | -- | -- |
| 5737.206 | Peak | 43.45 | 13.75 | 57.21 | 68.20 | -10.99 |

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-29 |
| Operation Band | :802.11n20/Band3 | Temp./Humi. | :24.4/57 |
| Frequency | :5500 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

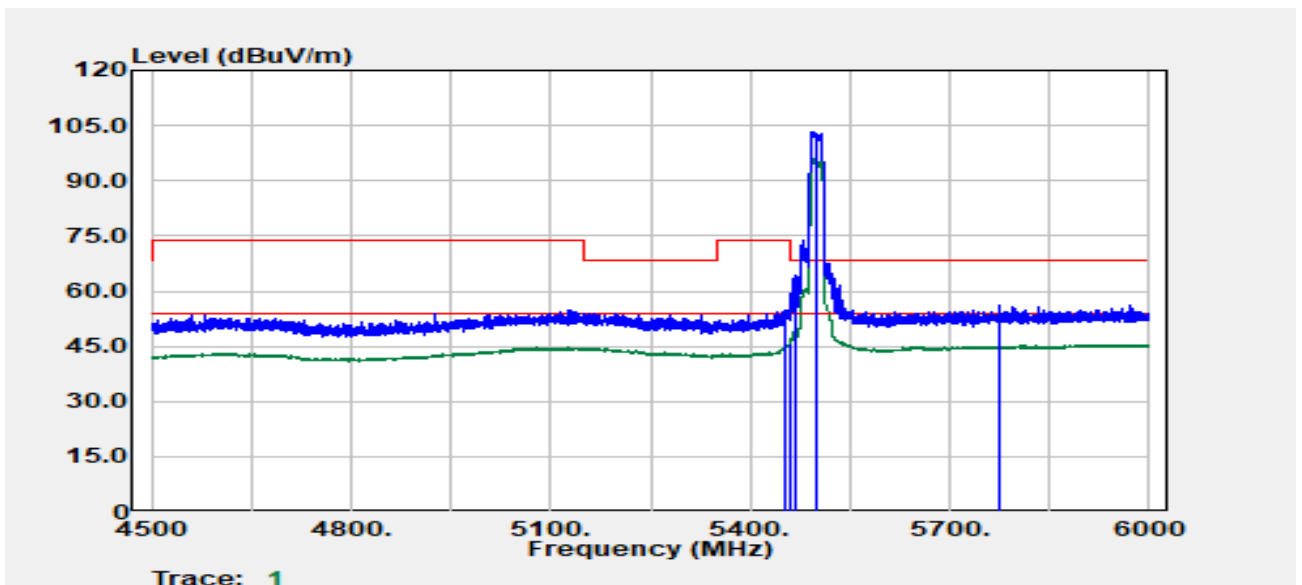


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5454.159 | Peak | 42.39 | 12.39 | 54.78 | 74.00 | -19.22 |
| 5459.910 | Average | 33.43 | 12.41 | 45.84 | 54.00 | -8.16 |
| 5469.912 | Peak | 51.87 | 12.44 | 64.32 | 68.20 | -3.88 |
| 5500.000 | Peak | 90.86 | 12.55 | 103.41 | -- | -- |
| 5500.000 | Average | 83.43 | 12.55 | 95.98 | -- | -- |
| 5774.962 | Peak | 42.15 | 13.99 | 56.14 | 68.20 | -12.06 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5500 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

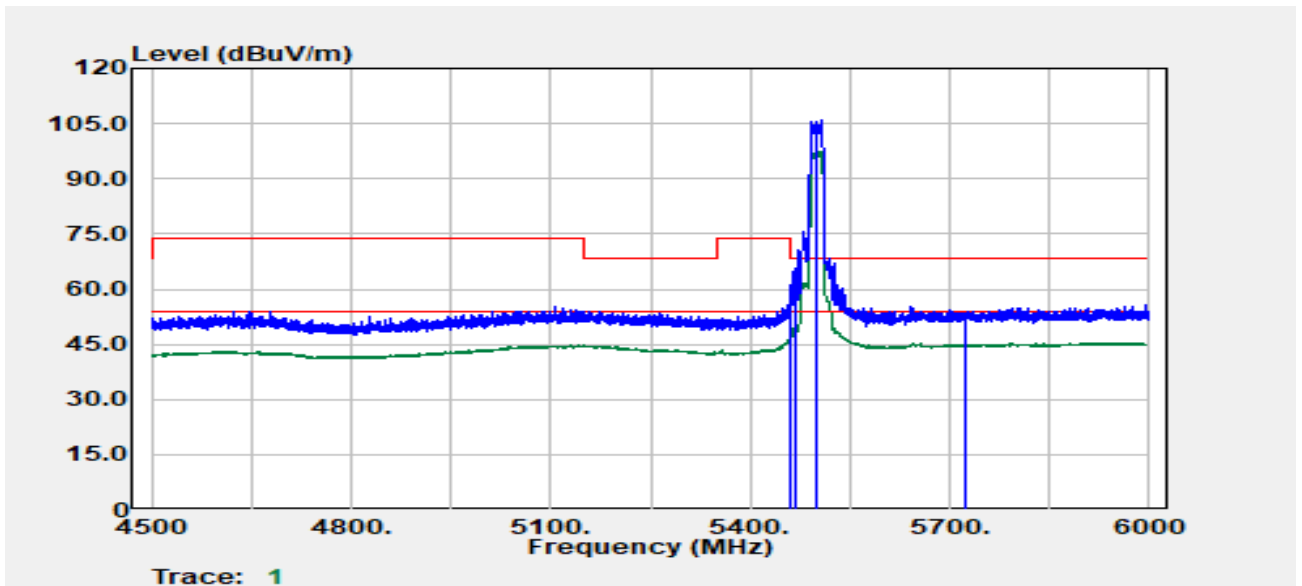


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5458.410 | Peak | 43.89 | 12.40 | 56.30 | 74.00 | -17.70 |
| 5460.000 | Average | 33.94 | 12.41 | 46.35 | 54.00 | -7.65 |
| 5467.411 | Peak | 53.11 | 12.44 | 65.54 | 68.20 | -2.66 |
| 5500.000 | Peak | 93.22 | 12.55 | 105.77 | -- | -- |
| 5500.000 | Average | 84.72 | 12.55 | 97.27 | -- | -- |
| 5725.000 | Peak | 38.50 | 13.69 | 52.19 | 68.20 | -16.01 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5700 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :


Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

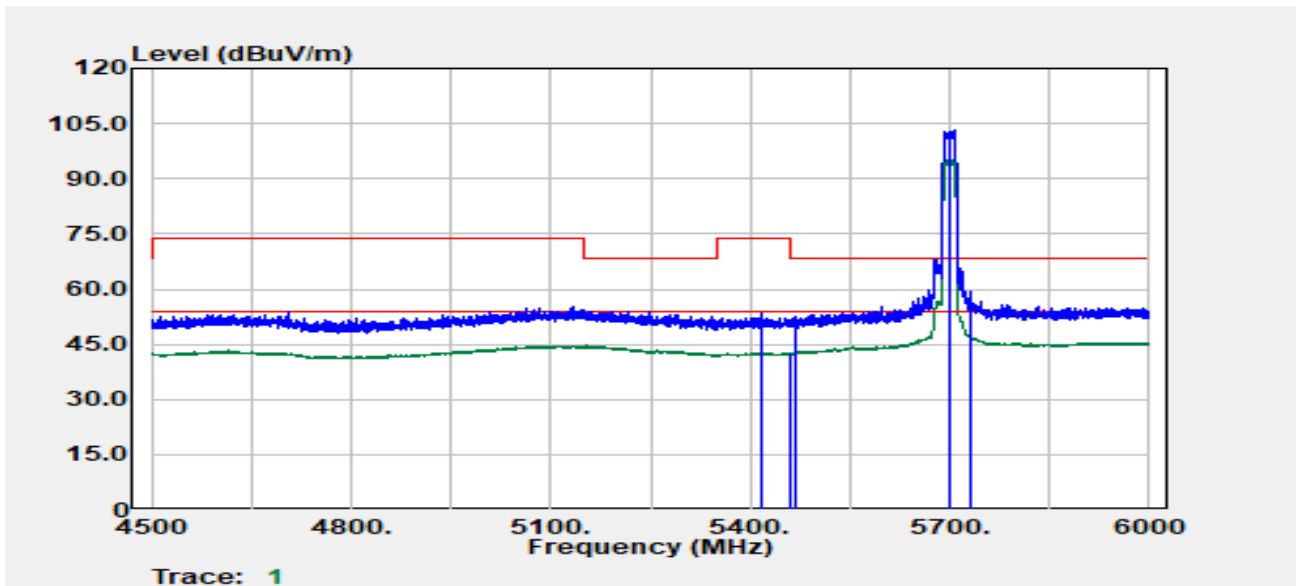

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5415.300 | Peak | 40.93 | 12.34 | 53.27 | 74.00 | -20.73 |
| 5460.000 | Average | 30.22 | 12.41 | 42.63 | 54.00 | -11.37 |
| 5466.300 | Peak | 40.18 | 12.43 | 52.61 | 68.20 | -15.59 |
| 5700.000 | Peak | 89.77 | 13.56 | 103.33 | -- | -- |
| 5700.000 | Average | 81.78 | 13.56 | 95.34 | -- | -- |
| 5731.800 | Peak | 45.74 | 13.73 | 59.47 | 68.20 | -8.73 |

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5700 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

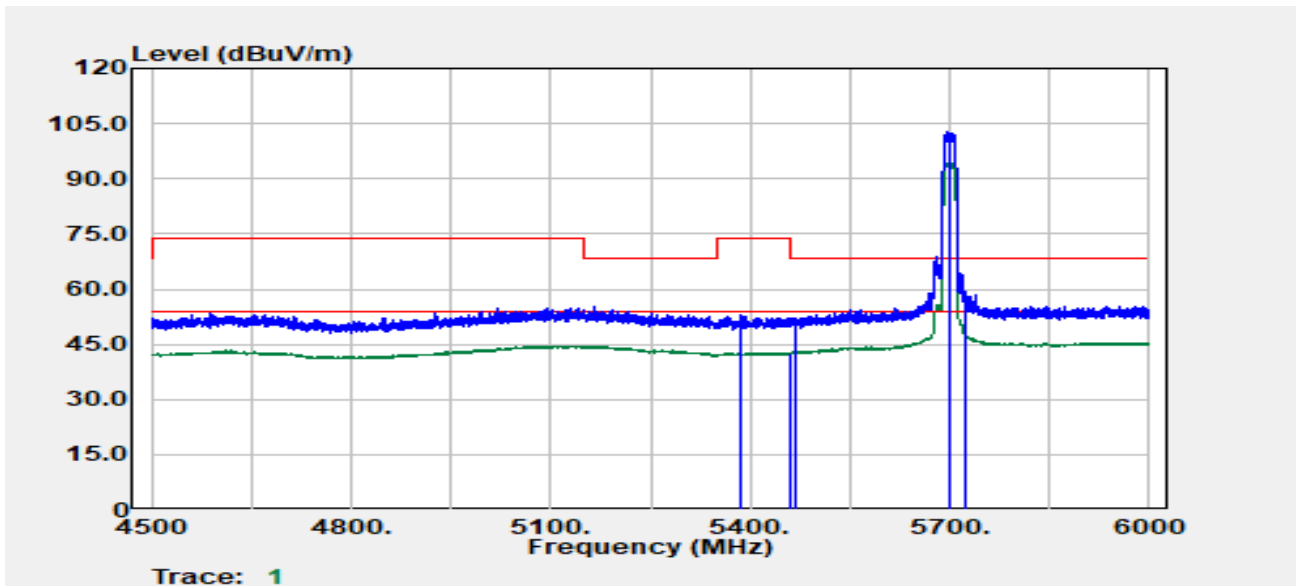


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5384.700 | Peak | 40.92 | 12.26 | 53.18 | 74.00 | -20.82 |
| 5459.700 | Average | 30.34 | 12.41 | 42.75 | 54.00 | -11.25 |
| 5466.600 | Peak | 39.70 | 12.43 | 52.13 | 68.20 | -16.07 |
| 5700.000 | Peak | 89.10 | 13.56 | 102.66 | -- | -- |
| 5700.000 | Average | 80.90 | 13.56 | 94.46 | -- | -- |
| 5725.200 | Peak | 45.67 | 13.69 | 59.36 | 68.20 | -8.84 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5510 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

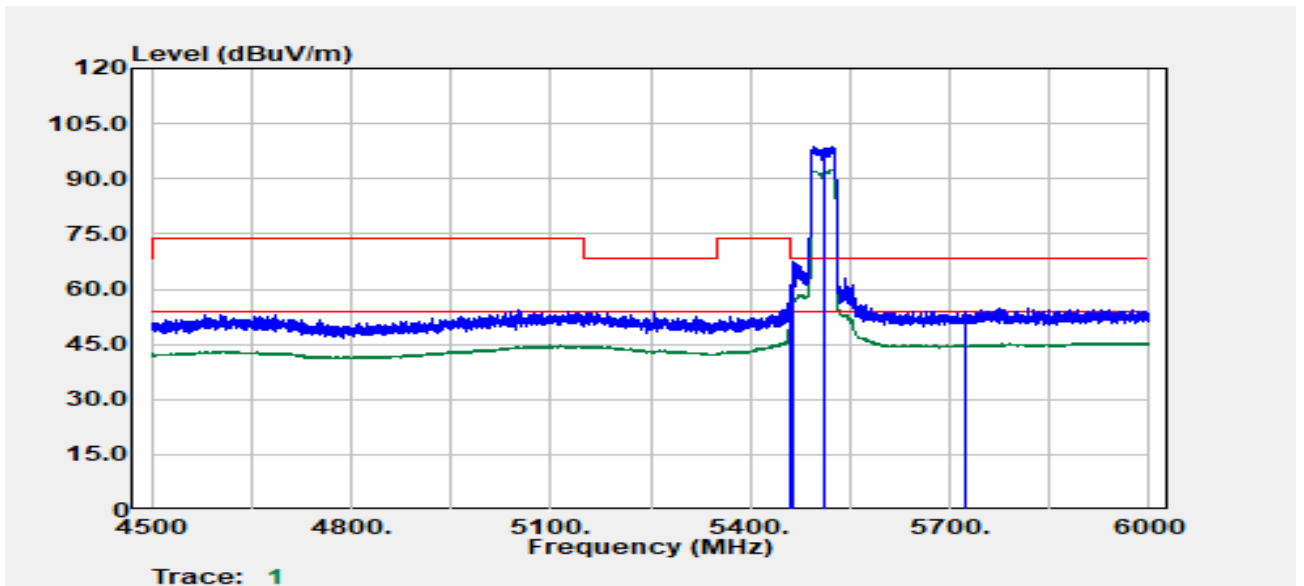


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5460.000 | Peak | 46.95 | 12.41 | 59.36 | 68.20 | -8.84 |
| 5460.000 | Average | 38.64 | 12.41 | 51.05 | 54.00 | -2.95 |
| 5465.100 | Peak | 55.00 | 12.43 | 67.43 | 68.20 | -0.77 |
| 5510.000 | Peak | 86.07 | 12.62 | 98.70 | -- | -- |
| 5510.000 | Average | 79.83 | 12.62 | 92.45 | -- | -- |
| 5725.000 | Peak | 37.47 | 13.69 | 51.16 | 68.20 | -17.04 |

Report No.: TMWK2308002691KR

Rev.: 00


Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5510 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

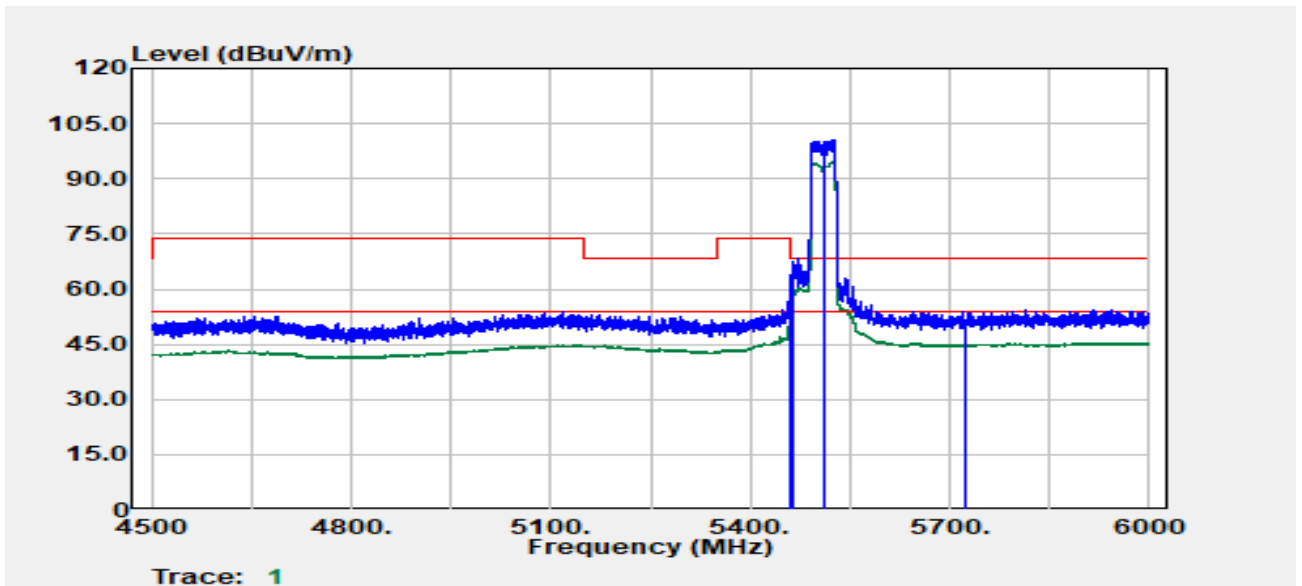

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5459.700 | Peak | 49.46 | 12.41 | 61.86 | 74.00 | -12.14 |
| 5460.000 | Average | 40.51 | 12.41 | 52.92 | 54.00 | -1.08 |
| 5465.400 | Peak | 54.82 | 12.43 | 67.25 | 68.20 | -0.95 |
| 5510.000 | Peak | 88.08 | 12.62 | 100.70 | -- | -- |
| 5510.000 | Average | 81.96 | 12.62 | 94.58 | -- | -- |
| 5725.000 | Peak | 36.77 | 13.69 | 50.46 | 68.20 | -17.74 |

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-29 |
| Operation Band | :802.11n40/Band3 | Temp./Humi. | :24.4/57 |
| Frequency | :5670 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

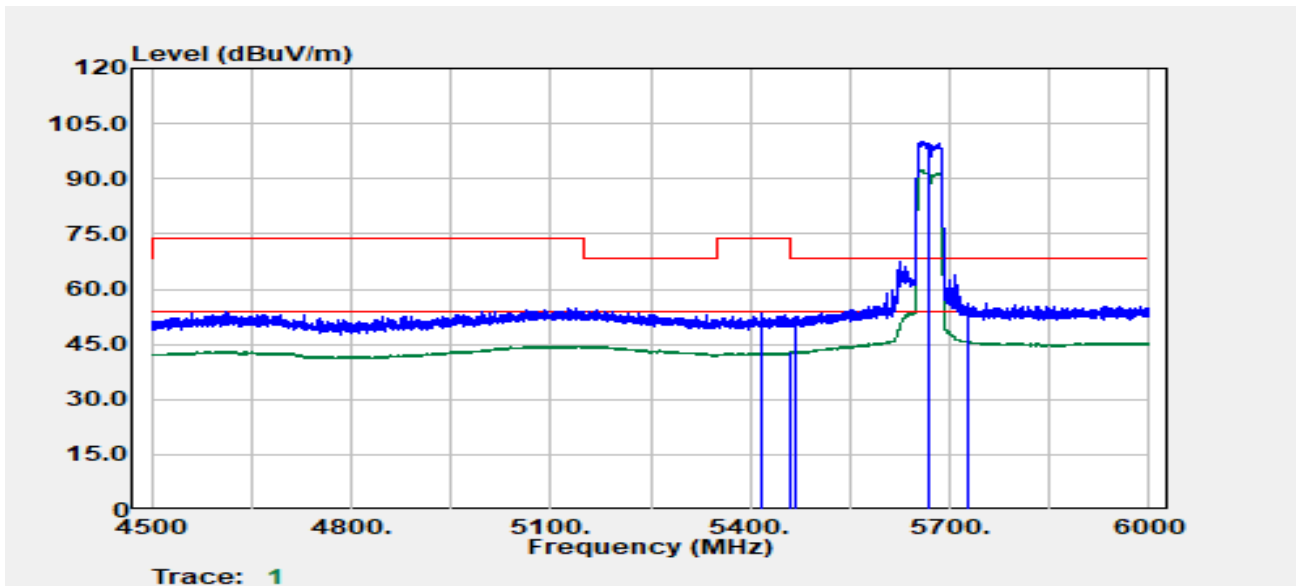


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5416.500 | Peak | 40.88 | 12.34 | 53.22 | 74.00 | -20.78 |
| 5459.400 | Average | 30.42 | 12.41 | 42.83 | 54.00 | -11.17 |
| 5469.300 | Peak | 40.09 | 12.44 | 52.53 | 68.20 | -15.67 |
| 5670.000 | Peak | 86.64 | 13.39 | 100.03 | -- | -- |
| 5670.000 | Average | 78.91 | 13.39 | 92.30 | -- | -- |
| 5728.500 | Peak | 42.39 | 13.71 | 56.10 | 68.20 | -12.10 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5670 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-29
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

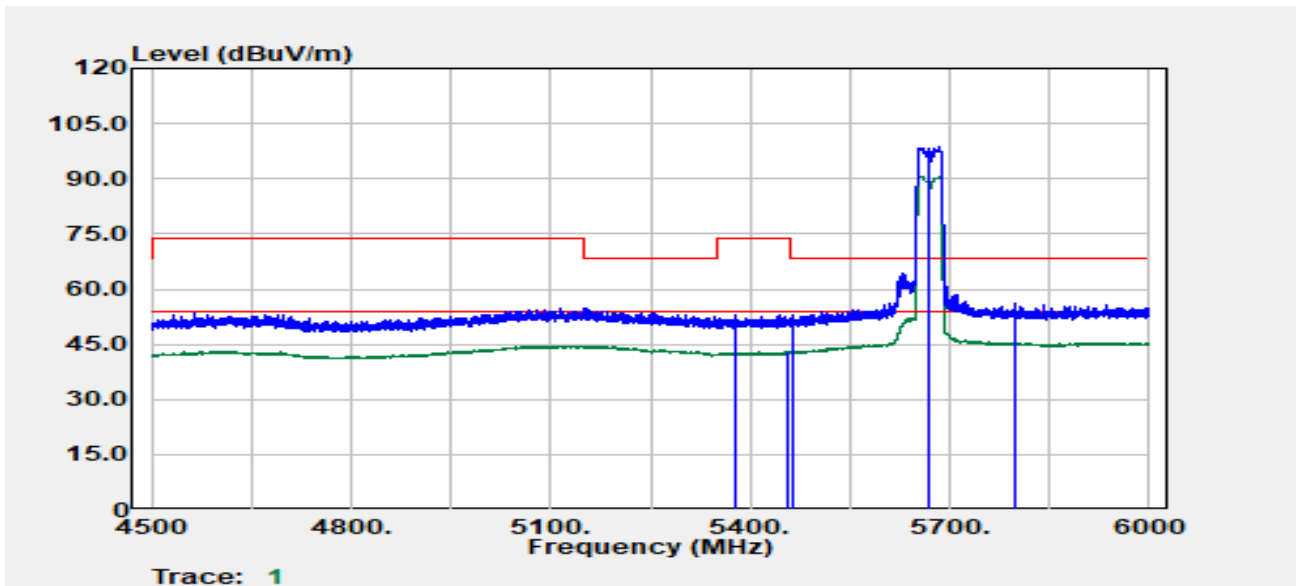


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5378.700 | Peak | 40.94 | 12.24 | 53.18 | 74.00 | -20.82 |
| 5457.600 | Average | 30.46 | 12.40 | 42.86 | 54.00 | -11.14 |
| 5463.000 | Peak | 40.54 | 12.42 | 52.96 | 68.20 | -15.24 |
| 5670.000 | Peak | 85.18 | 13.39 | 98.57 | -- | -- |
| 5670.000 | Average | 77.35 | 13.39 | 90.74 | -- | -- |
| 5796.600 | Peak | 41.80 | 14.14 | 55.93 | 68.20 | -12.27 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band3
 Frequency :5530 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :51


Test Date :2023-08-30
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

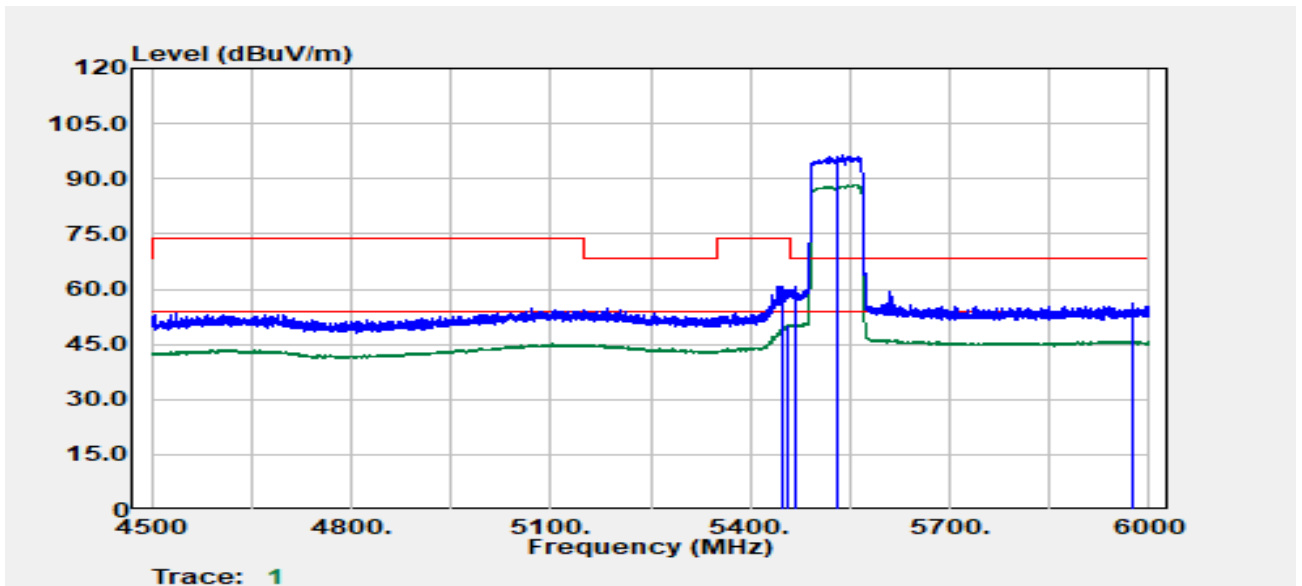

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5449.200 | Peak | 48.29 | 12.37 | 60.67 | 74.00 | -13.33 |
| 5456.400 | Average | 37.76 | 12.40 | 50.16 | 54.00 | -3.84 |
| 5468.400 | Peak | 48.15 | 12.44 | 60.59 | 68.20 | -7.61 |
| 5530.000 | Peak | 83.48 | 12.77 | 96.25 | -- | -- |
| 5530.000 | Average | 75.59 | 12.77 | 88.36 | -- | -- |
| 5976.000 | Peak | 41.80 | 14.15 | 55.95 | 68.20 | -12.25 |

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band3
 Frequency :5530 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :51

Test Date :2023-08-30
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber :966A

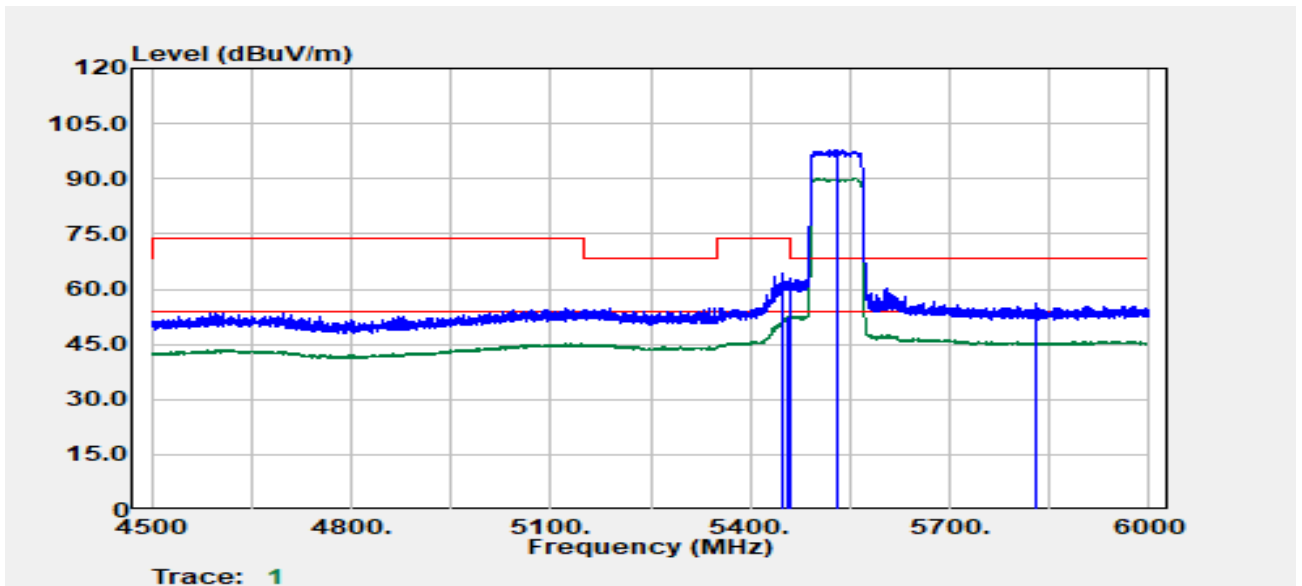


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5448.900 | Peak | 51.97 | 12.37 | 64.35 | 74.00 | -9.65 |
| 5455.500 | Average | 40.25 | 12.39 | 52.65 | 54.00 | -1.35 |
| 5460.600 | Peak | 50.45 | 12.41 | 62.86 | 68.20 | -5.34 |
| 5530.000 | Peak | 84.92 | 12.77 | 97.69 | -- | -- |
| 5530.000 | Average | 77.33 | 12.77 | 90.10 | -- | -- |
| 5831.400 | Peak | 41.87 | 14.07 | 55.94 | 68.20 | -12.26 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band3
 Frequency :5610 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.4/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

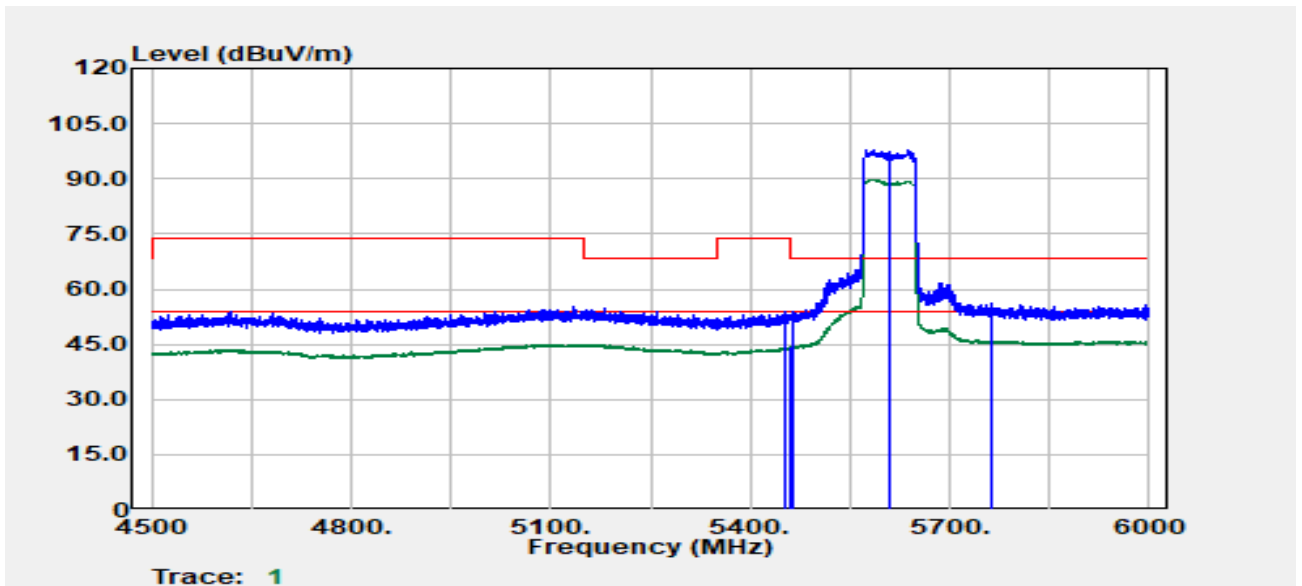


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5451.000 | Peak | 41.47 | 12.38 | 53.85 | 74.00 | -20.15 |
| 5460.000 | Average | 31.87 | 12.41 | 44.28 | 54.00 | -9.72 |
| 5464.800 | Peak | 41.36 | 12.43 | 53.79 | 68.20 | -14.41 |
| 5610.000 | Peak | 85.00 | 12.92 | 97.92 | -- | -- |
| 5610.000 | Average | 76.88 | 12.92 | 89.80 | -- | -- |
| 5763.600 | Peak | 42.23 | 13.91 | 56.14 | 68.20 | -12.06 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band3
 Frequency :5610 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.4/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

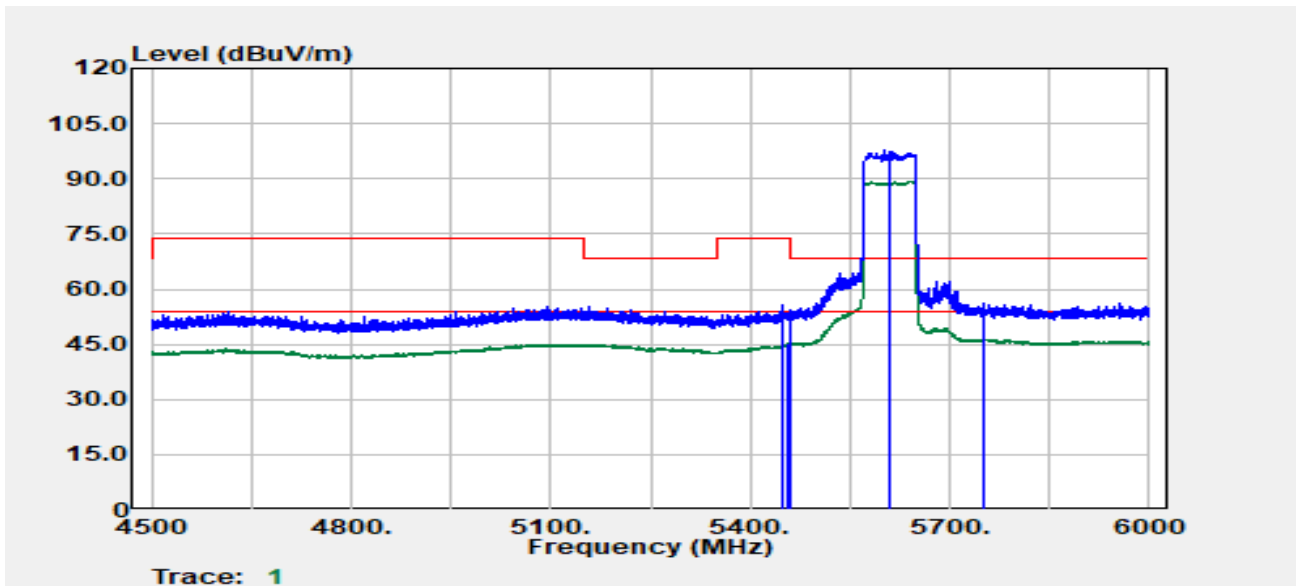


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5449.200 | Peak | 43.27 | 12.37 | 55.65 | 74.00 | -18.35 |
| 5457.300 | Average | 32.71 | 12.40 | 45.11 | 54.00 | -8.89 |
| 5462.100 | Peak | 41.86 | 12.42 | 54.28 | 68.20 | -13.92 |
| 5610.000 | Peak | 84.91 | 12.92 | 97.83 | -- | -- |
| 5610.000 | Average | 76.41 | 12.92 | 89.33 | -- | -- |
| 5750.400 | Peak | 42.32 | 13.82 | 56.14 | 68.20 | -12.06 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :24.6/57 |
| Frequency | :5745 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

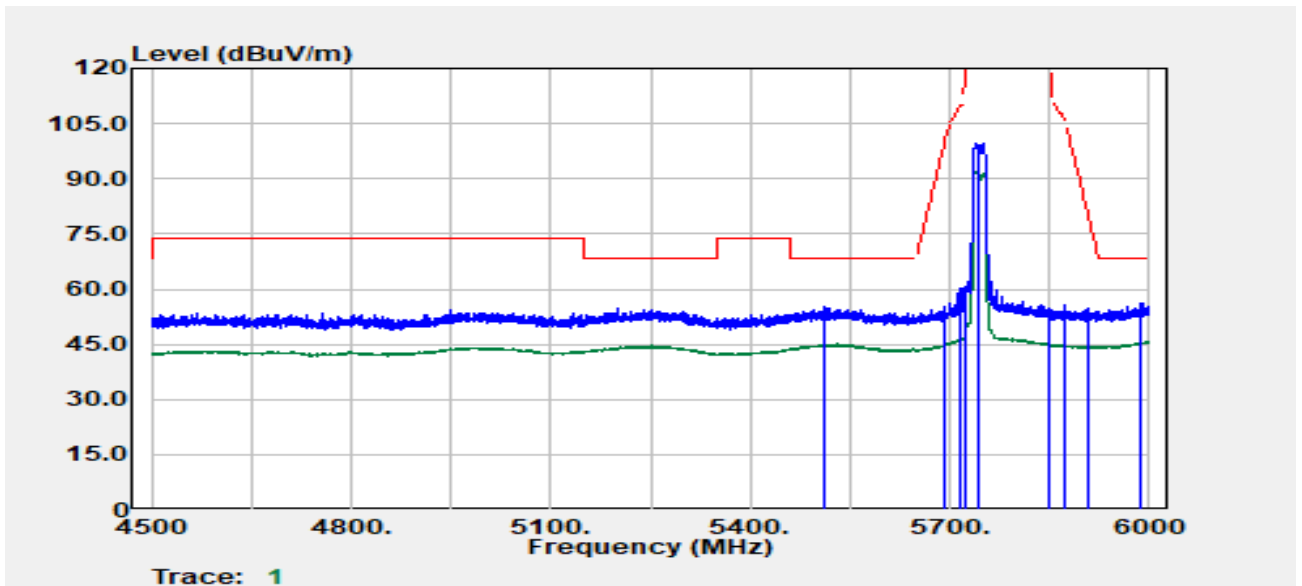


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5509.800 | Peak | 42.62 | 12.62 | 55.24 | 68.20 | -12.96 |
| 5692.800 | Peak | 41.90 | 13.52 | 55.42 | 99.89 | -44.47 |
| 5713.800 | Peak | 46.50 | 13.63 | 60.14 | 109.07 | -48.93 |
| 5723.400 | Peak | 47.21 | 13.68 | 60.90 | 118.55 | -57.66 |
| 5745.000 | Peak | 85.61 | 13.79 | 99.40 | -- | -- |
| 5745.000 | Average | 78.30 | 13.79 | 92.10 | -- | -- |
| 5850.300 | Peak | 40.56 | 14.02 | 54.58 | 121.52 | -66.94 |
| 5872.200 | Peak | 41.57 | 14.02 | 55.59 | 105.98 | -50.39 |
| 5910.000 | Peak | 40.52 | 14.06 | 54.57 | 79.27 | -24.70 |
| 5985.900 | Peak | 41.82 | 14.15 | 55.97 | 68.20 | -12.23 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5745 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

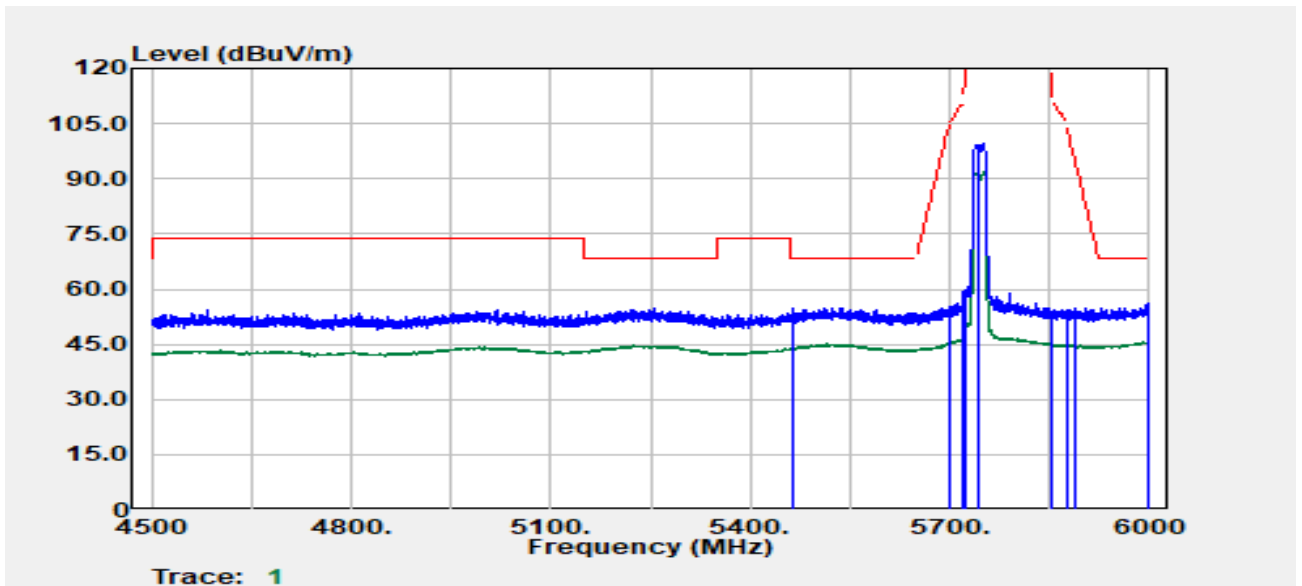


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5463.300 | Peak | 42.48 | 12.42 | 54.90 | 68.20 | -13.30 |
| 5700.000 | Peak | 41.89 | 13.56 | 55.45 | 105.20 | -49.75 |
| 5718.600 | Peak | 44.96 | 13.66 | 58.61 | 110.41 | -51.79 |
| 5724.900 | Peak | 45.52 | 13.69 | 59.21 | 121.97 | -62.77 |
| 5745.000 | Peak | 85.90 | 13.79 | 99.69 | -- | -- |
| 5745.000 | Average | 78.21 | 13.79 | 92.00 | -- | -- |
| 5853.000 | Peak | 39.73 | 14.02 | 53.75 | 115.36 | -61.61 |
| 5874.900 | Peak | 40.40 | 14.02 | 54.42 | 105.23 | -50.81 |
| 5889.900 | Peak | 40.95 | 14.03 | 54.98 | 94.14 | -39.16 |
| 5999.700 | Peak | 41.86 | 14.15 | 56.01 | 68.20 | -12.19 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :24.6/57 |
| Frequency | :5825 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

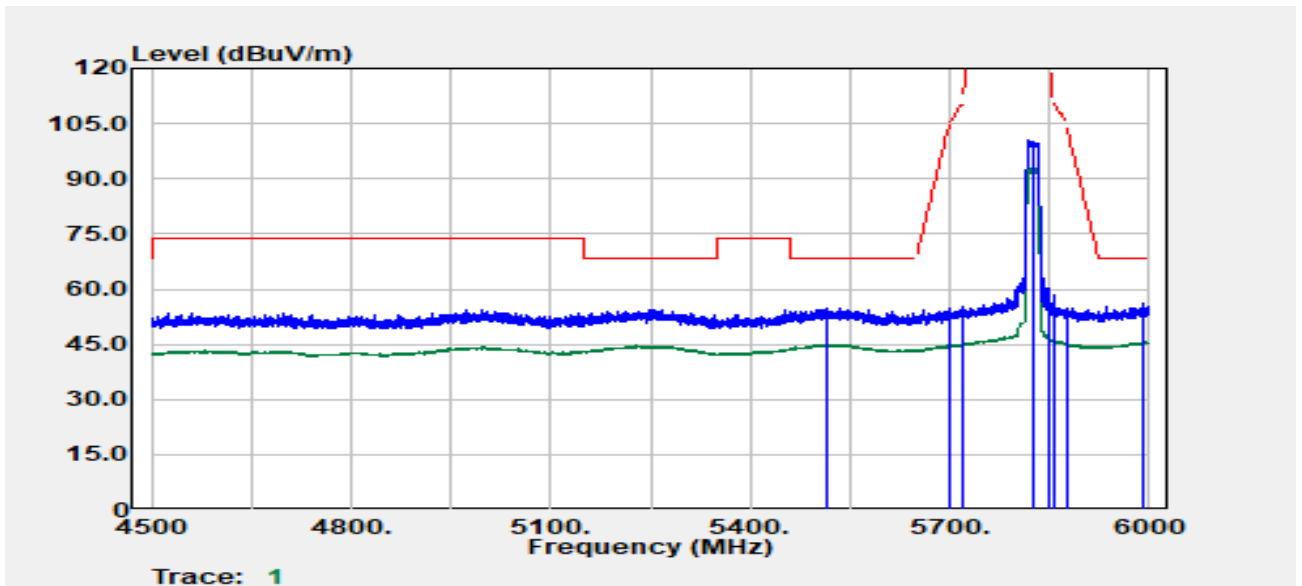


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5513.400 | Peak | 42.24 | 12.65 | 54.89 | 68.20 | -13.31 |
| 5699.400 | Peak | 41.06 | 13.56 | 54.62 | 104.76 | -50.14 |
| 5718.300 | Peak | 41.47 | 13.66 | 55.12 | 110.32 | -55.20 |
| 5721.000 | Peak | 41.37 | 13.67 | 55.04 | 113.08 | -58.04 |
| 5825.000 | Peak | 86.30 | 14.09 | 100.39 | -- | -- |
| 5825.000 | Average | 79.01 | 14.09 | 93.10 | -- | -- |
| 5850.300 | Peak | 42.20 | 14.02 | 56.22 | 121.52 | -65.30 |
| 5855.400 | Peak | 44.29 | 14.02 | 58.31 | 110.69 | -52.37 |
| 5877.000 | Peak | 40.79 | 14.03 | 54.81 | 103.71 | -48.90 |
| 5990.700 | Peak | 41.95 | 14.15 | 56.10 | 68.20 | -12.10 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5825 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

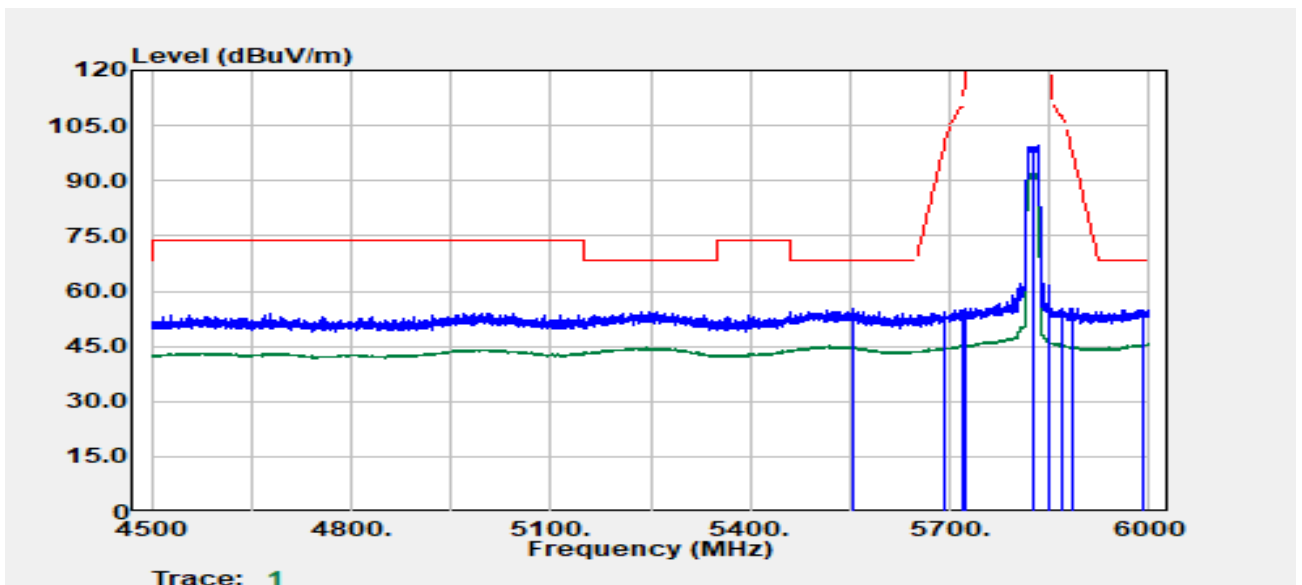


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5556.300 | Peak | 42.15 | 12.90 | 55.06 | 68.20 | -13.14 |
| 5694.000 | Peak | 40.92 | 13.53 | 54.45 | 100.78 | -46.33 |
| 5718.600 | Peak | 41.13 | 13.66 | 54.78 | 110.41 | -55.62 |
| 5724.600 | Peak | 40.66 | 13.69 | 54.35 | 121.29 | -66.94 |
| 5825.000 | Peak | 85.47 | 14.09 | 99.56 | -- | -- |
| 5825.000 | Average | 77.91 | 14.09 | 92.00 | -- | -- |
| 5850.900 | Peak | 44.25 | 14.02 | 58.27 | 120.15 | -61.88 |
| 5868.300 | Peak | 41.01 | 14.02 | 55.04 | 107.07 | -52.04 |
| 5882.700 | Peak | 41.24 | 14.03 | 55.26 | 99.48 | -44.22 |
| 5991.900 | Peak | 40.80 | 14.15 | 54.96 | 68.20 | -13.24 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5745 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

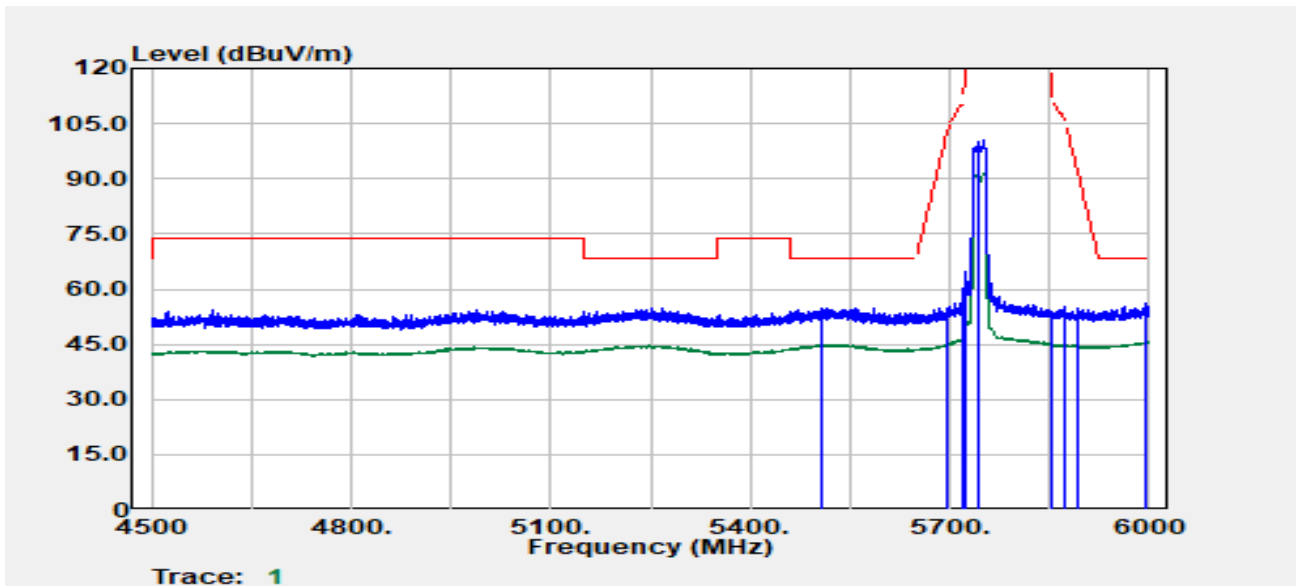


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5508.000 | Peak | 42.41 | 12.61 | 55.01 | 68.20 | -13.19 |
| 5694.600 | Peak | 41.21 | 13.53 | 54.74 | 101.22 | -46.48 |
| 5720.100 | Peak | 45.20 | 13.66 | 58.86 | 111.03 | -52.16 |
| 5724.900 | Peak | 50.90 | 13.69 | 64.59 | 121.97 | -57.38 |
| 5745.000 | Peak | 86.53 | 13.79 | 100.32 | -- | -- |
| 5745.000 | Average | 77.83 | 13.79 | 91.62 | -- | -- |
| 5852.400 | Peak | 40.01 | 14.02 | 54.03 | 116.73 | -62.70 |
| 5873.700 | Peak | 41.14 | 14.02 | 55.16 | 105.56 | -50.40 |
| 5892.900 | Peak | 40.74 | 14.03 | 54.76 | 91.92 | -37.15 |
| 5996.100 | Peak | 42.16 | 14.15 | 56.31 | 68.20 | -11.89 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5745 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

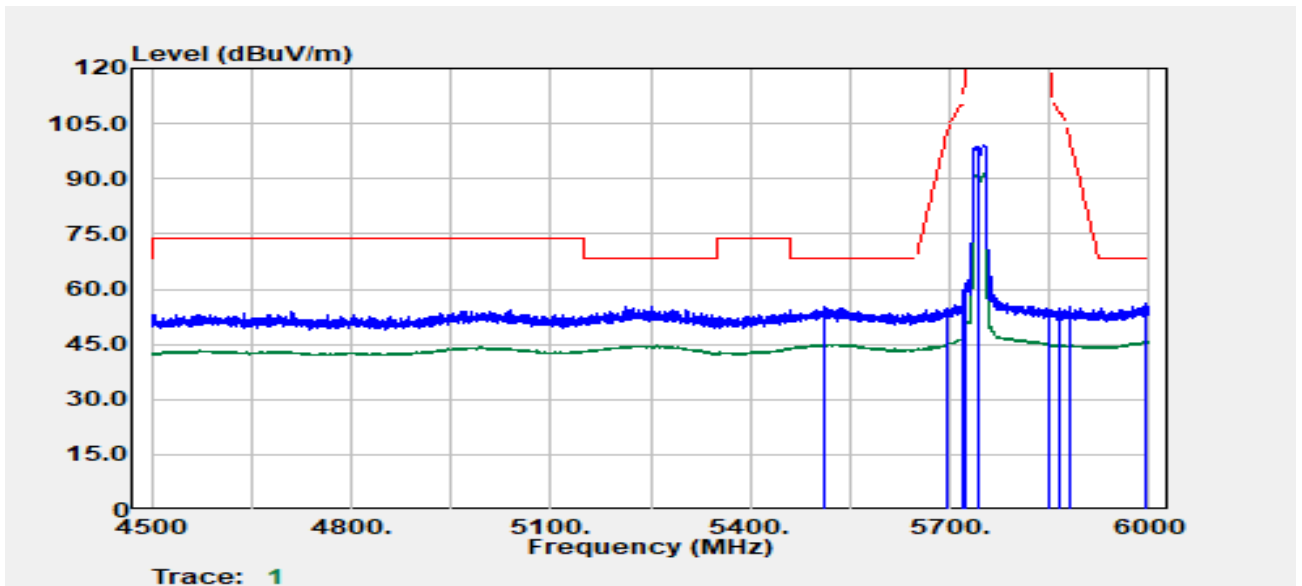


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5513.100 | Peak | 42.75 | 12.65 | 55.40 | 68.20 | -12.80 |
| 5697.600 | Peak | 41.08 | 13.55 | 54.63 | 103.43 | -48.81 |
| 5719.800 | Peak | 43.32 | 13.66 | 56.98 | 110.74 | -53.76 |
| 5721.600 | Peak | 47.57 | 13.67 | 61.24 | 114.45 | -53.21 |
| 5745.000 | Peak | 85.30 | 13.79 | 99.10 | -- | -- |
| 5745.000 | Average | 77.77 | 13.79 | 91.56 | -- | -- |
| 5850.300 | Peak | 40.23 | 14.02 | 54.25 | 121.52 | -67.26 |
| 5864.100 | Peak | 40.98 | 14.02 | 55.00 | 108.25 | -53.25 |
| 5878.800 | Peak | 41.28 | 14.03 | 55.31 | 102.38 | -47.07 |
| 5995.800 | Peak | 41.79 | 14.15 | 55.94 | 68.20 | -12.26 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5825 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

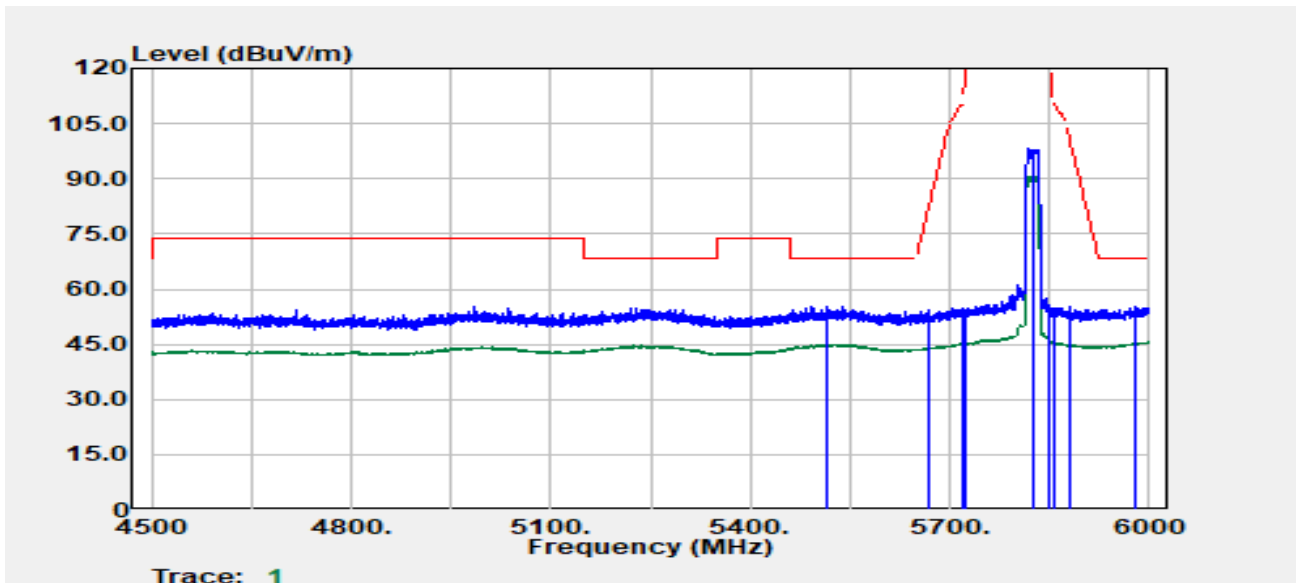


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5515.800 | Peak | 42.66 | 12.67 | 55.33 | 68.20 | -12.87 |
| 5670.000 | Peak | 40.81 | 13.39 | 54.20 | 83.04 | -28.84 |
| 5718.300 | Peak | 41.33 | 13.66 | 54.98 | 110.32 | -55.34 |
| 5724.000 | Peak | 40.58 | 13.68 | 54.27 | 119.92 | -65.65 |
| 5825.000 | Peak | 84.10 | 14.09 | 98.19 | -- | -- |
| 5825.000 | Average | 76.70 | 14.09 | 90.79 | -- | -- |
| 5850.300 | Peak | 40.99 | 14.02 | 55.01 | 121.52 | -66.50 |
| 5857.800 | Peak | 40.80 | 14.02 | 54.82 | 110.01 | -55.19 |
| 5880.900 | Peak | 41.40 | 14.03 | 55.43 | 100.82 | -45.39 |
| 5978.700 | Peak | 41.22 | 14.15 | 55.37 | 68.20 | -12.83 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5825 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

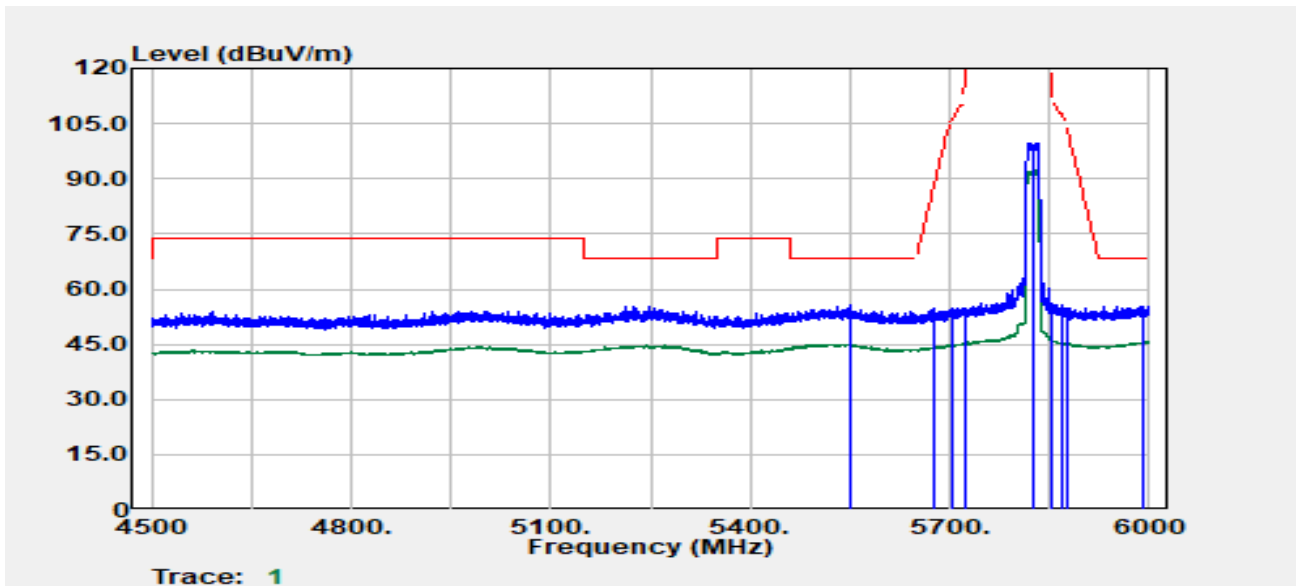


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5551.200 | Peak | 42.68 | 12.91 | 55.59 | 68.20 | -12.61 |
| 5674.500 | Peak | 41.20 | 13.42 | 54.61 | 86.37 | -31.76 |
| 5704.200 | Peak | 41.39 | 13.58 | 54.98 | 106.38 | -51.40 |
| 5723.400 | Peak | 40.96 | 13.68 | 54.64 | 118.55 | -63.92 |
| 5825.000 | Peak | 85.74 | 14.09 | 99.83 | -- | -- |
| 5825.000 | Average | 78.14 | 14.09 | 92.23 | -- | -- |
| 5853.300 | Peak | 42.04 | 14.02 | 56.06 | 114.67 | -58.61 |
| 5867.400 | Peak | 41.65 | 14.02 | 55.68 | 107.33 | -51.65 |
| 5877.000 | Peak | 40.84 | 14.03 | 54.87 | 103.71 | -48.85 |
| 5990.400 | Peak | 41.28 | 14.15 | 55.43 | 68.20 | -12.77 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

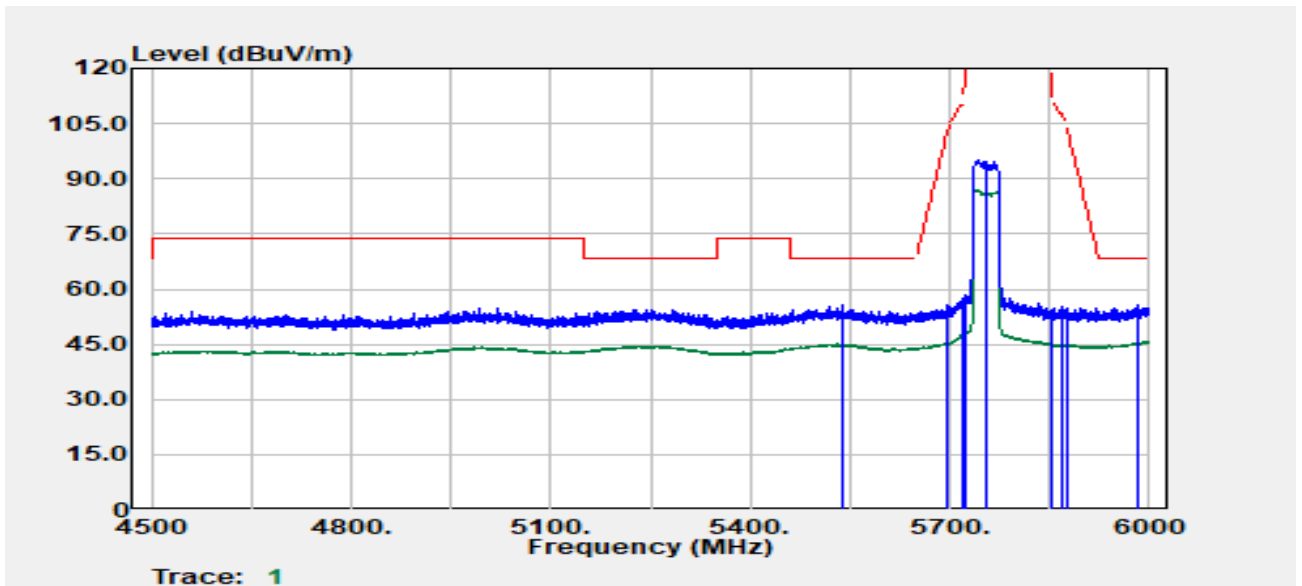


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5538.600 | Peak | 43.05 | 12.83 | 55.88 | 68.20 | -12.32 |
| 5695.500 | Peak | 42.34 | 13.53 | 55.87 | 101.88 | -46.01 |
| 5718.900 | Peak | 44.02 | 13.66 | 57.68 | 110.49 | -52.81 |
| 5721.900 | Peak | 44.84 | 13.67 | 58.51 | 115.13 | -56.62 |
| 5755.000 | Peak | 81.17 | 13.85 | 95.02 | -- | -- |
| 5755.000 | Average | 73.11 | 13.85 | 86.96 | -- | -- |
| 5851.500 | Peak | 40.45 | 14.02 | 54.47 | 118.78 | -64.31 |
| 5869.500 | Peak | 41.31 | 14.02 | 55.33 | 106.74 | -51.41 |
| 5878.200 | Peak | 40.99 | 14.03 | 55.01 | 102.82 | -47.81 |
| 5983.800 | Peak | 41.64 | 14.15 | 55.79 | 68.20 | -12.41 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

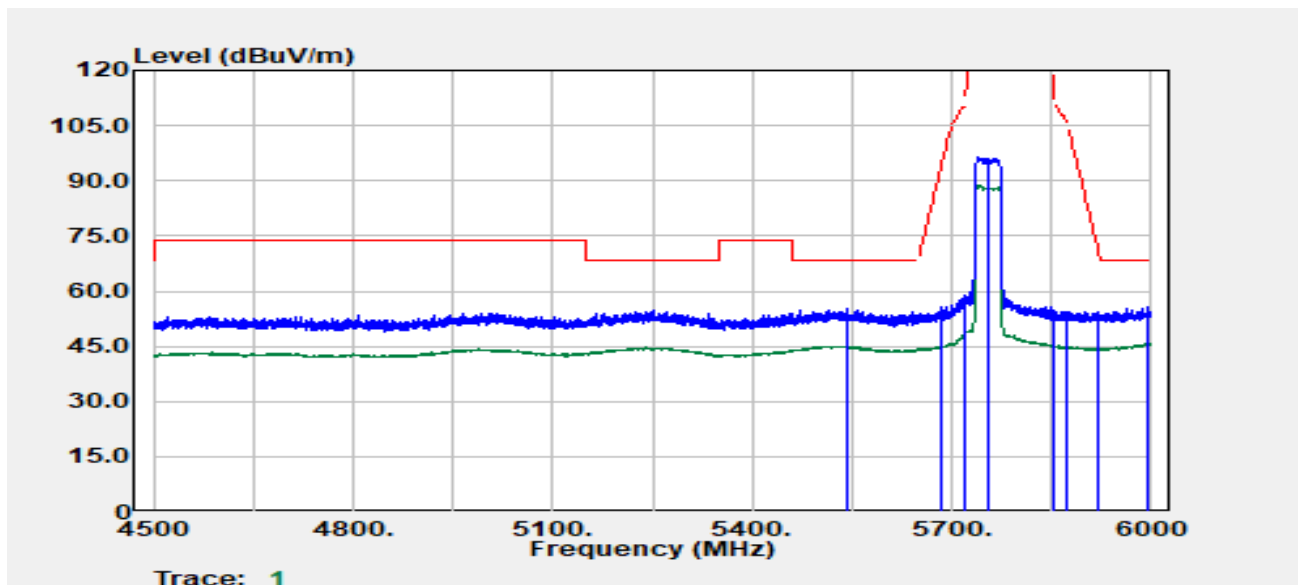


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5543.400 | Peak | 42.43 | 12.87 | 55.30 | 68.20 | -12.90 |
| 5685.900 | Peak | 42.18 | 13.48 | 55.66 | 94.80 | -39.14 |
| 5719.800 | Peak | 45.04 | 13.66 | 58.70 | 110.74 | -52.04 |
| 5721.000 | Peak | 44.66 | 13.67 | 58.33 | 113.08 | -54.75 |
| 5755.000 | Peak | 82.46 | 13.85 | 96.31 | -- | -- |
| 5755.000 | Average | 74.77 | 13.85 | 88.63 | -- | -- |
| 5851.800 | Peak | 40.90 | 14.02 | 54.92 | 118.09 | -63.17 |
| 5871.600 | Peak | 40.46 | 14.02 | 54.49 | 106.15 | -51.66 |
| 5919.000 | Peak | 40.26 | 14.08 | 54.34 | 72.62 | -18.29 |
| 5996.400 | Peak | 41.37 | 14.15 | 55.52 | 68.20 | -12.68 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5795 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Ray.Li
 Test Chamber : 966A

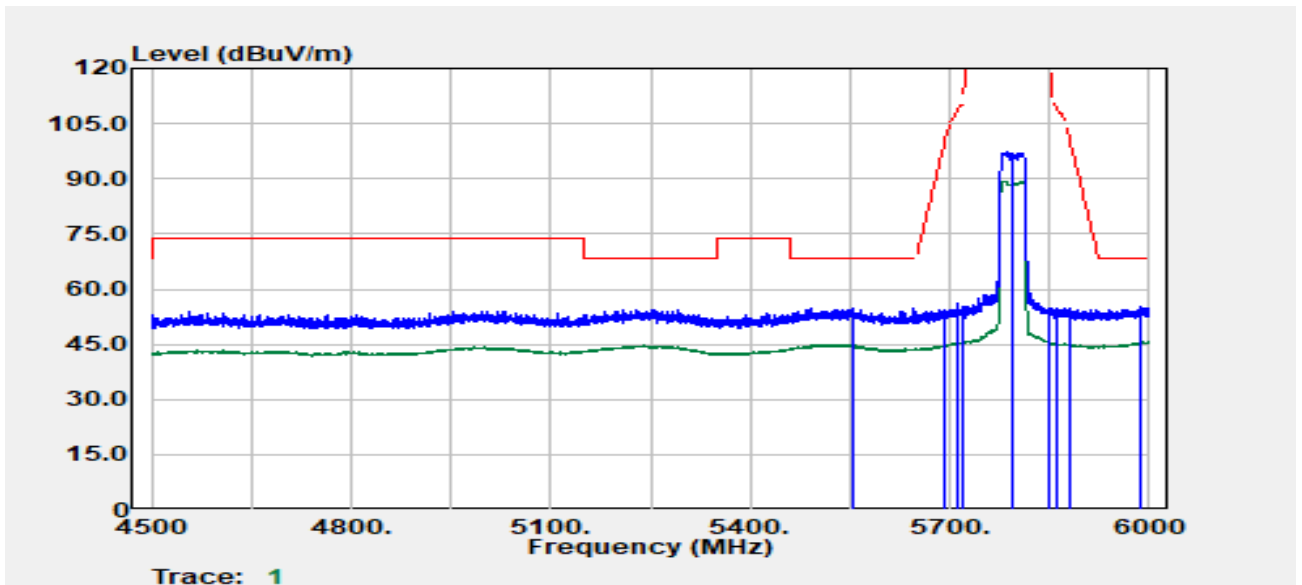


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5556.000 | Peak | 41.99 | 12.90 | 54.90 | 68.20 | -13.30 |
| 5692.800 | Peak | 40.87 | 13.52 | 54.39 | 99.89 | -45.51 |
| 5711.100 | Peak | 42.42 | 13.62 | 56.04 | 108.31 | -52.27 |
| 5721.000 | Peak | 41.45 | 13.67 | 55.12 | 113.08 | -57.96 |
| 5795.000 | Peak | 83.31 | 14.13 | 97.44 | -- | -- |
| 5795.000 | Average | 75.15 | 14.13 | 89.28 | -- | -- |
| 5850.300 | Peak | 40.33 | 14.02 | 54.35 | 121.52 | -67.16 |
| 5861.400 | Peak | 40.89 | 14.02 | 54.91 | 109.01 | -54.10 |
| 5881.200 | Peak | 40.54 | 14.03 | 54.57 | 100.59 | -46.03 |
| 5987.700 | Peak | 41.25 | 14.15 | 55.40 | 68.20 | -12.80 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5795 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

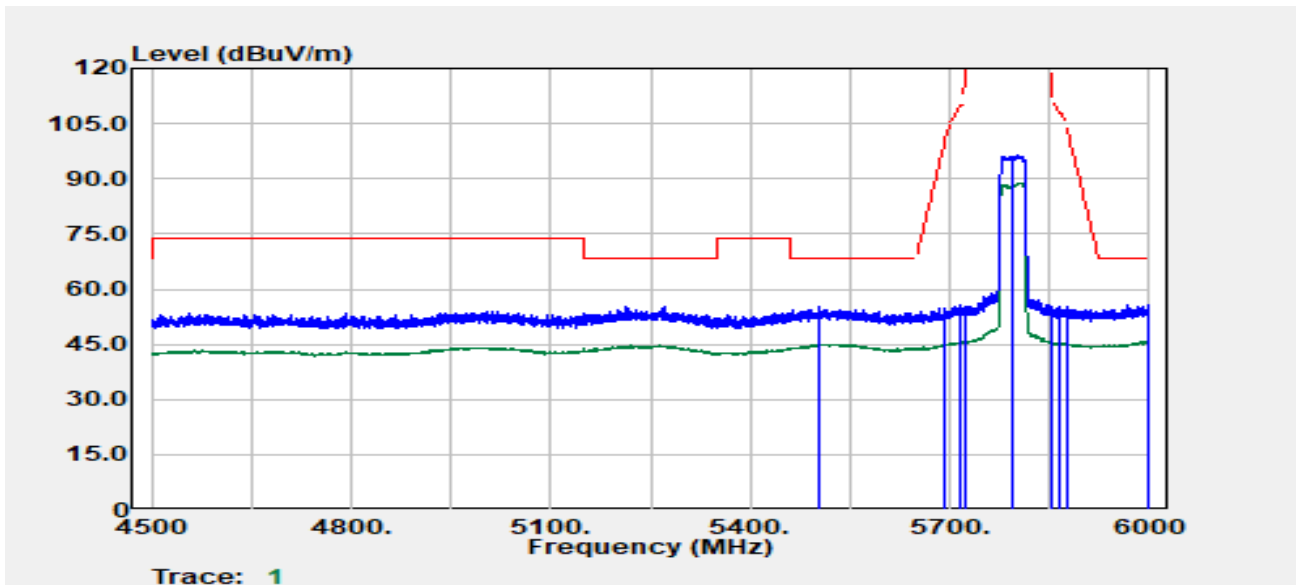


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5504.100 | Peak | 42.60 | 12.58 | 55.18 | 68.20 | -13.02 |
| 5691.600 | Peak | 41.31 | 13.51 | 54.83 | 99.01 | -44.18 |
| 5716.500 | Peak | 41.92 | 13.65 | 55.56 | 109.82 | -54.26 |
| 5724.600 | Peak | 41.39 | 13.69 | 55.08 | 121.29 | -66.21 |
| 5795.000 | Peak | 82.26 | 14.13 | 96.38 | -- | -- |
| 5795.000 | Average | 74.54 | 14.13 | 88.67 | -- | -- |
| 5853.000 | Peak | 41.19 | 14.02 | 55.21 | 115.36 | -60.14 |
| 5864.100 | Peak | 41.33 | 14.02 | 55.35 | 108.25 | -52.90 |
| 5876.100 | Peak | 41.13 | 14.03 | 55.15 | 104.38 | -49.23 |
| 5999.700 | Peak | 41.67 | 14.15 | 55.82 | 68.20 | -12.38 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11ac80/Band4 | Temp./Humi. | :24.6/57 |
| Frequency | :5775 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :Bandedge | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

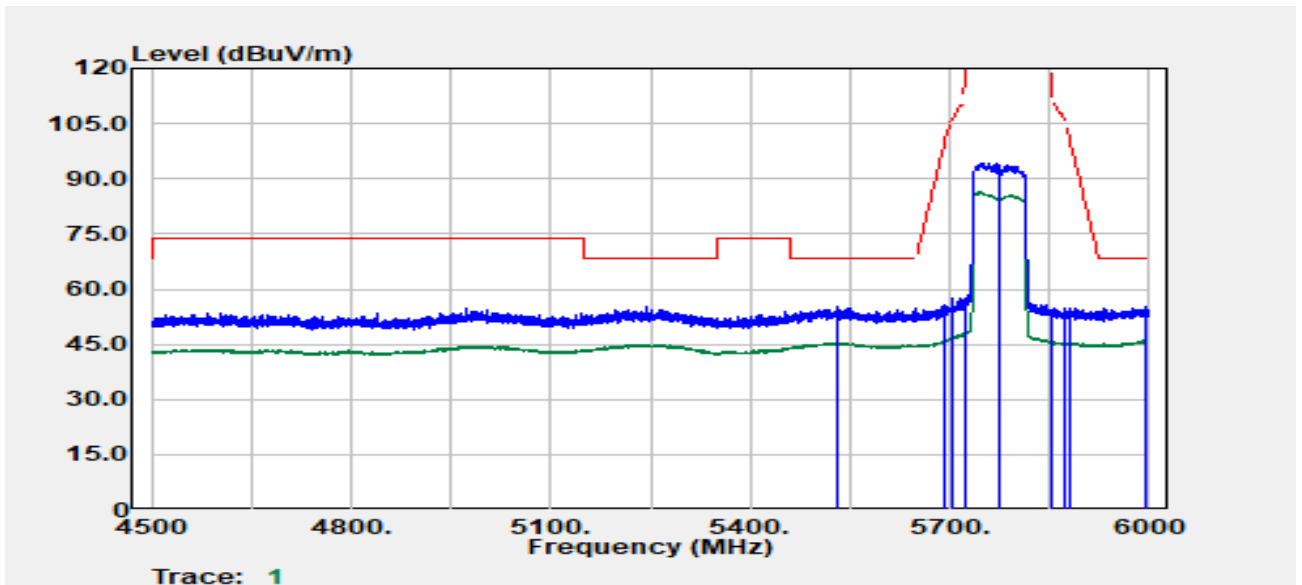


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 5532.600 | Peak | 42.35 | 12.79 | 55.14 | 68.20 | -13.06 |
| 5690.400 | Peak | 42.36 | 13.51 | 55.87 | 98.12 | -42.25 |
| 5705.400 | Peak | 43.98 | 13.59 | 57.57 | 106.71 | -49.14 |
| 5723.700 | Peak | 43.66 | 13.68 | 57.35 | 119.24 | -61.89 |
| 5775.000 | Peak | 80.21 | 13.99 | 94.20 | -- | -- |
| 5775.000 | Average | 72.32 | 13.99 | 86.31 | -- | -- |
| 5852.700 | Peak | 40.37 | 14.02 | 54.39 | 116.04 | -61.65 |
| 5871.300 | Peak | 40.77 | 14.02 | 54.80 | 106.23 | -51.44 |
| 5879.100 | Peak | 40.81 | 14.03 | 54.83 | 102.15 | -47.32 |
| 5994.000 | Peak | 40.93 | 14.15 | 55.08 | 68.20 | -13.12 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band4
 Frequency :5775 MHz
 Operation Mode :Bandedge
 EUT Pol :E2
 Setting :


Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Ray.Li
 Test Chamber : 966A

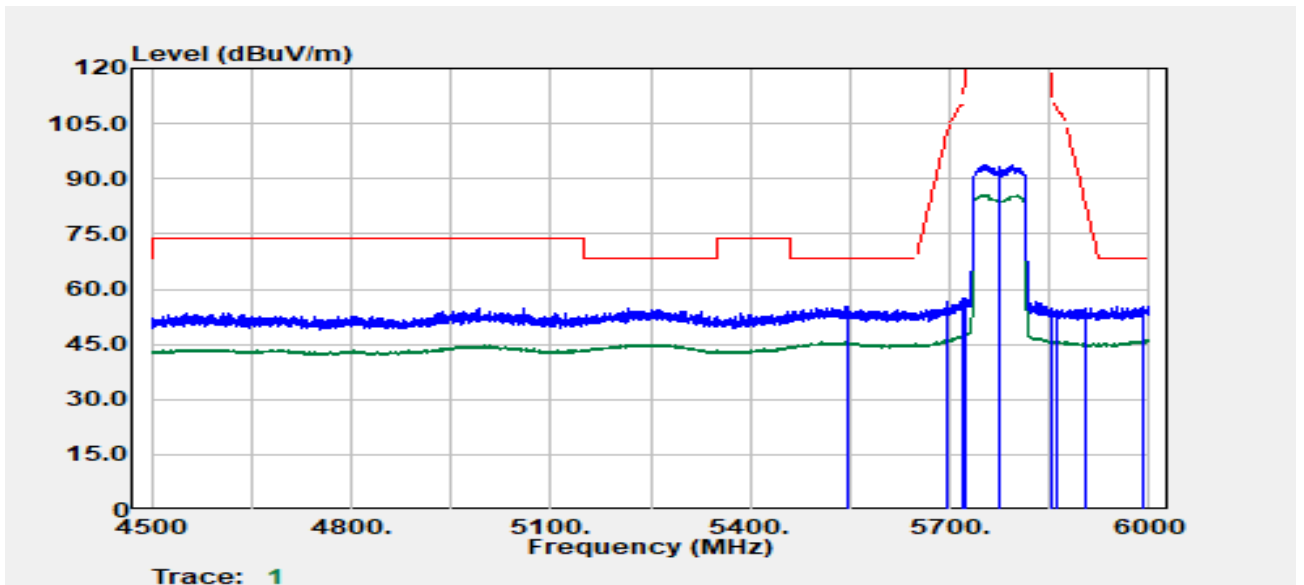

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 5547.300 | Peak | 42.55 | 12.90 | 55.45 | 68.20 | -12.75 |
| 5696.100 | Peak | 43.04 | 13.54 | 56.58 | 102.33 | -45.75 |
| 5718.300 | Peak | 43.78 | 13.66 | 57.43 | 110.32 | -52.89 |
| 5724.600 | Peak | 43.81 | 13.69 | 57.50 | 121.29 | -63.79 |
| 5775.000 | Peak | 79.70 | 13.99 | 93.69 | -- | -- |
| 5775.000 | Average | 71.60 | 13.99 | 85.59 | -- | -- |
| 5853.900 | Peak | 40.94 | 14.02 | 54.96 | 113.31 | -58.34 |
| 5859.300 | Peak | 40.45 | 14.02 | 54.47 | 109.59 | -55.13 |
| 5903.100 | Peak | 40.74 | 14.04 | 54.78 | 84.37 | -29.59 |
| 5992.500 | Peak | 41.15 | 14.15 | 55.30 | 68.20 | -12.90 |

TX Test Data: (FCC_Below 1GHz)

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band1 | Temp./Humi. | :24.6/58 |
| Frequency | :5210 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E1 | Test Chamber | : 966A |
| Setting | : | | |

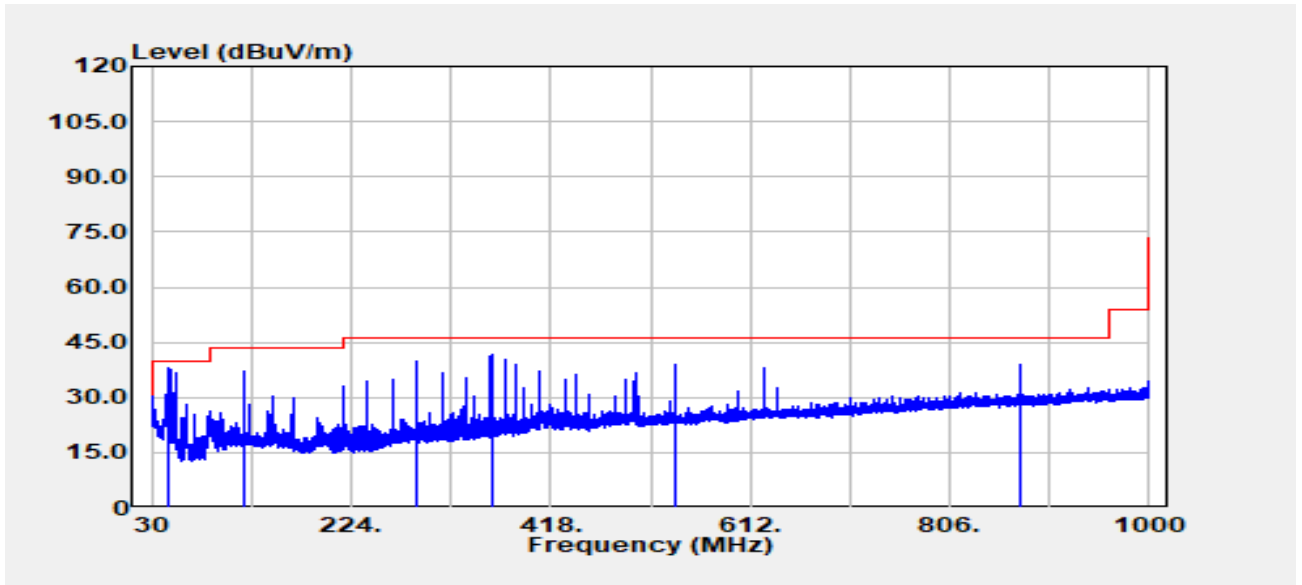


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 46.490 | Peak | 52.09 | -14.14 | 37.96 | 40.00 | -2.04 |
| 119.968 | Peak | 46.44 | -9.21 | 37.23 | 43.50 | -6.27 |
| 288.020 | Peak | 48.69 | -8.79 | 39.90 | 46.00 | -6.10 |
| 360.043 | Peak | 48.84 | -7.18 | 41.67 | 46.00 | -4.33 |
| 539.978 | Peak | 42.01 | -2.85 | 39.15 | 46.00 | -6.85 |
| 874.991 | Peak | 36.60 | 2.57 | 39.17 | 46.00 | -6.83 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band1 | Temp./Humi. | :24.6/58 |
| Frequency | :5210 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E1 | Test Chamber | : 966A |
| Setting | : | | |

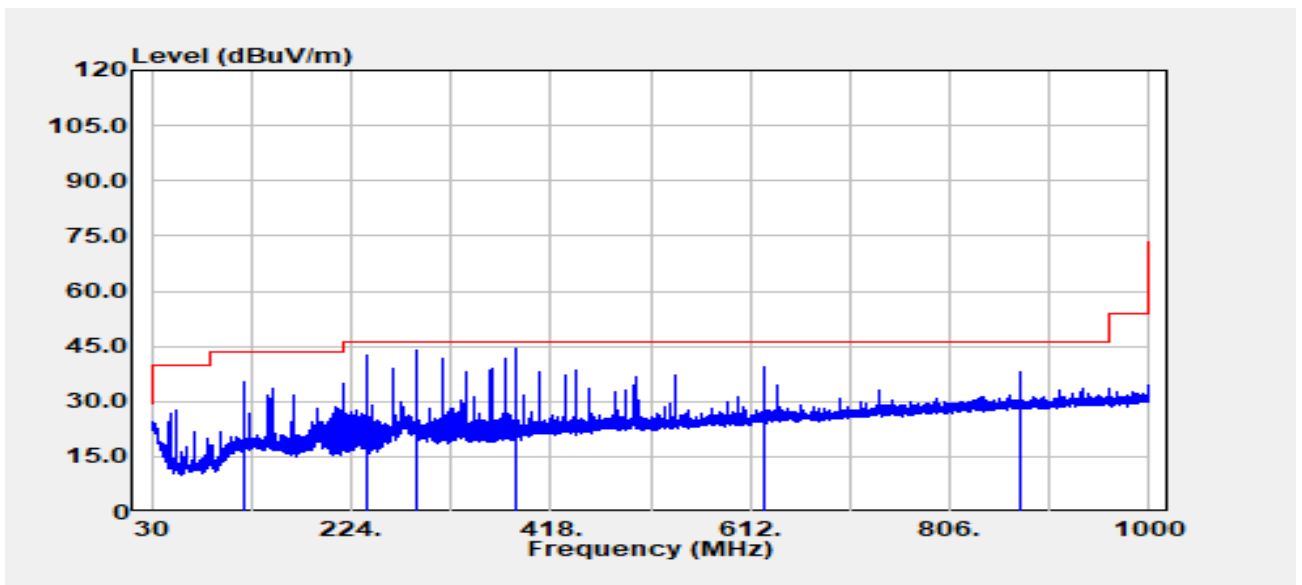


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 119.968 | Peak | 44.68 | -9.21 | 35.47 | 43.50 | -8.03 |
| 240.005 | Peak | 53.26 | -10.75 | 42.51 | 46.00 | -3.49 |
| 288.020 | Peak | 52.80 | -8.79 | 44.01 | 46.00 | -1.99 |
| 384.050 | Peak | 50.88 | -6.48 | 44.40 | 46.00 | -1.60 |
| 624.974 | Peak | 40.66 | -1.16 | 39.50 | 46.00 | -6.50 |
| 874.991 | Peak | 35.65 | 2.57 | 38.22 | 46.00 | -7.78 |

Report No.: TMWK2308002691KR


Rev.: 00

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5290 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E1 | Test Chamber | : 966A |
| Setting | : | | |

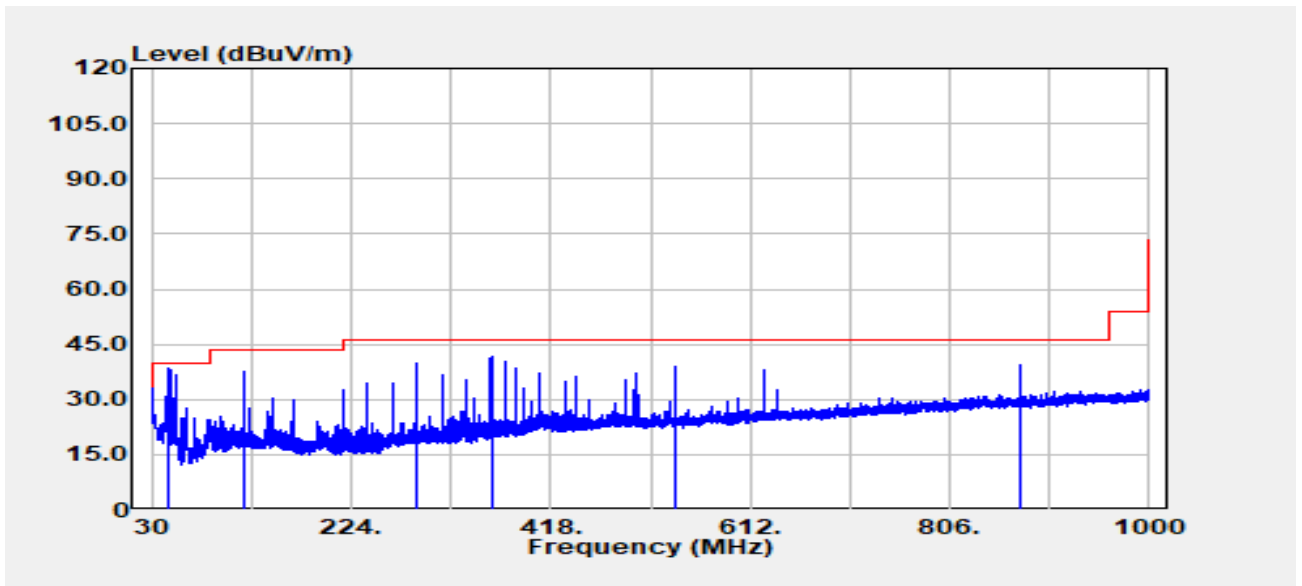

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 46.611 | Peak | 52.60 | -14.25 | 38.36 | 40.00 | -1.64 |
| 119.968 | Peak | 46.85 | -9.21 | 37.64 | 43.50 | -5.86 |
| 288.020 | Peak | 48.61 | -8.79 | 39.82 | 46.00 | -6.18 |
| 360.043 | Peak | 48.88 | -7.18 | 41.70 | 46.00 | -4.30 |
| 539.978 | Peak | 41.86 | -2.85 | 39.01 | 46.00 | -6.99 |
| 874.991 | Peak | 36.81 | 2.57 | 39.38 | 46.00 | -6.62 |

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5290 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E1 | Test Chamber | : 966A |
| Setting | : | | |

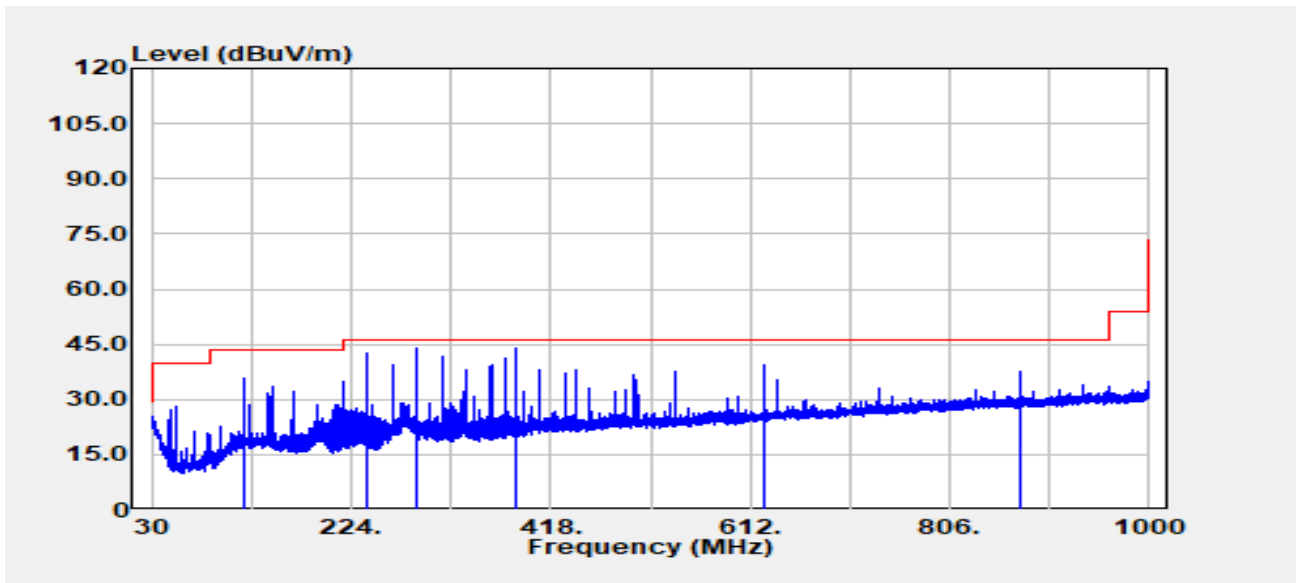


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 119.968 | Peak | 44.83 | -9.21 | 35.62 | 43.50 | -7.88 |
| 240.005 | Peak | 53.23 | -10.75 | 42.48 | 46.00 | -3.52 |
| 288.020 | Peak | 52.79 | -8.79 | 44.00 | 46.00 | -2.00 |
| 384.050 | Peak | 50.42 | -6.48 | 43.94 | 46.00 | -2.06 |
| 624.974 | Peak | 40.54 | -1.16 | 39.38 | 46.00 | -6.62 |
| 874.991 | Peak | 34.82 | 2.57 | 37.39 | 46.00 | -8.61 |

Report No.: TMWK2308002691KR

Rev.: 00


Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5510 MHz
 Operation Mode :TX
 EUT Pol :E1
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

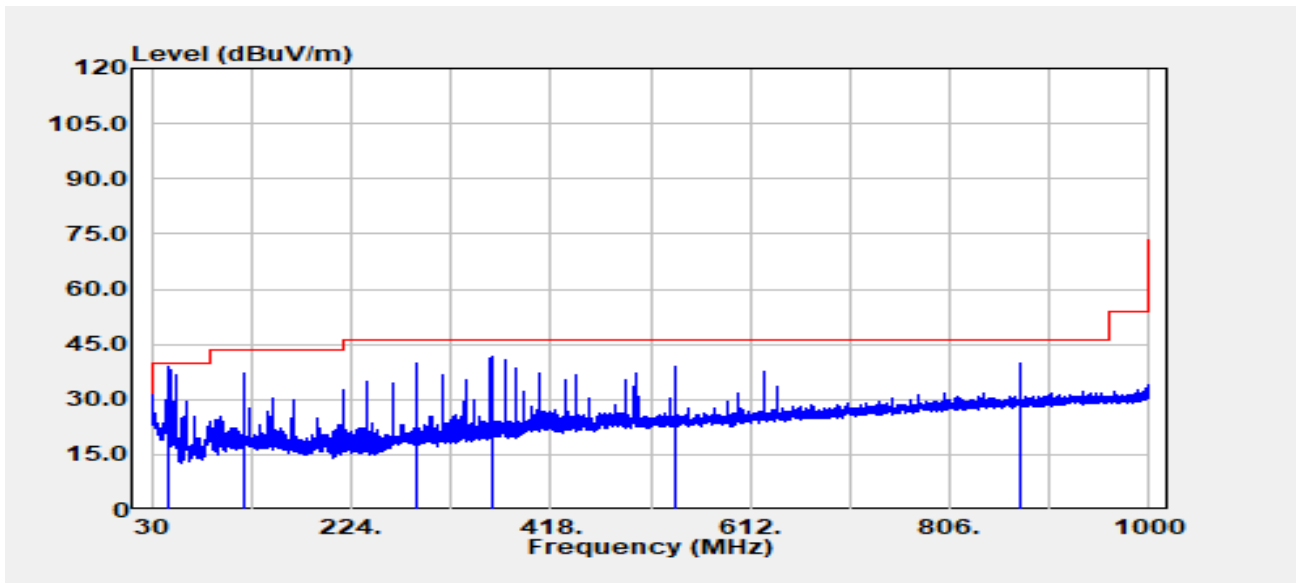

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 46.369 | Peak | 52.78 | -14.03 | 38.76 | 40.00 | -1.24 |
| 119.968 | Peak | 46.39 | -9.21 | 37.18 | 43.50 | -6.32 |
| 288.020 | Peak | 48.54 | -8.79 | 39.75 | 46.00 | -6.25 |
| 360.043 | Peak | 48.69 | -7.18 | 41.52 | 46.00 | -4.48 |
| 539.978 | Peak | 41.96 | -2.85 | 39.11 | 46.00 | -6.89 |
| 874.991 | Peak | 37.11 | 2.57 | 39.68 | 46.00 | -6.32 |

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11n40/Band3 | Temp./Humi. | :24.6/58 |
| Frequency | :5510 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E1 | Test Chamber | : 966A |
| Setting | : | | |

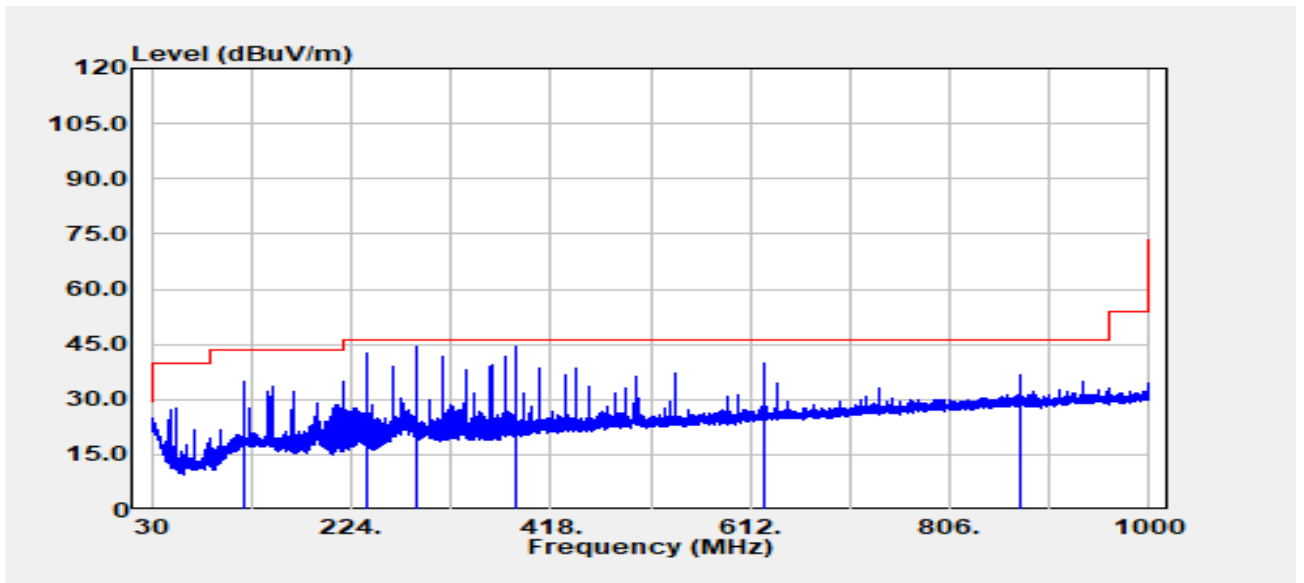


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 119.968 | Peak | 44.17 | -9.21 | 34.96 | 43.50 | -8.54 |
| 240.005 | Peak | 53.49 | -10.75 | 42.74 | 46.00 | -3.26 |
| 288.020 | Peak | 52.99 | -8.79 | 44.20 | 46.00 | -1.80 |
| 384.050 | Peak | 50.74 | -6.48 | 44.27 | 46.00 | -1.73 |
| 624.974 | Peak | 40.90 | -1.16 | 39.74 | 46.00 | -6.26 |
| 874.991 | Peak | 34.17 | 2.57 | 36.74 | 46.00 | -9.26 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11n40/Band4 | Temp./Humi. | :24.6/58 |
| Frequency | :5755 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E1 | Test Chamber | : 966A |
| Setting | : | | |

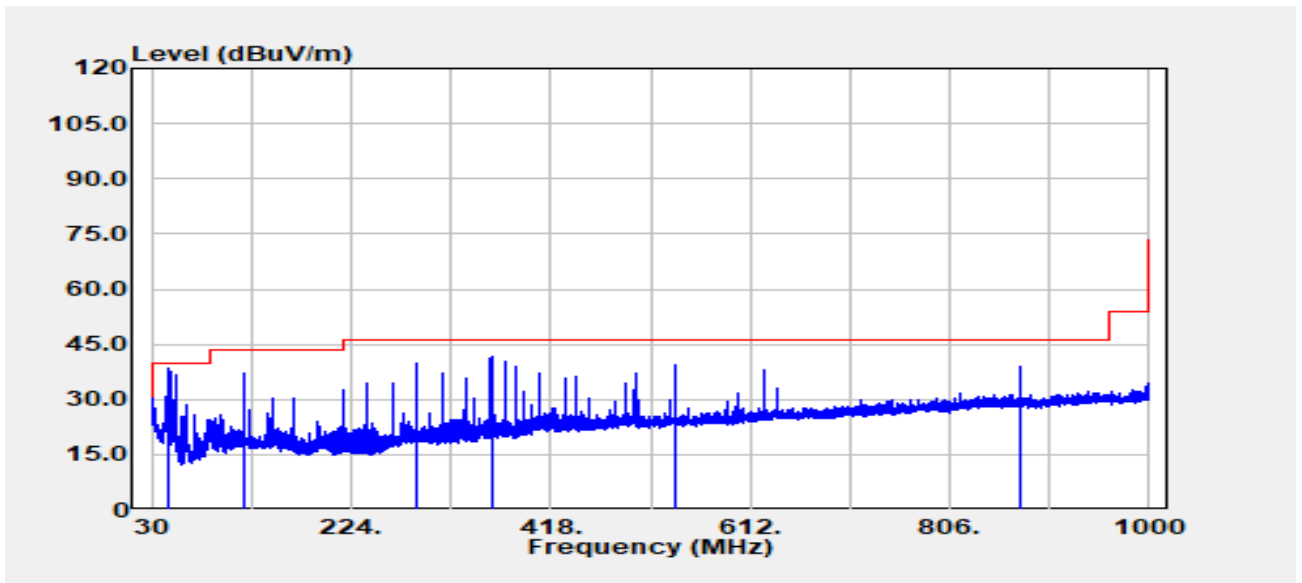


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 46.611 | Peak | 52.65 | -14.25 | 38.40 | 40.00 | -1.60 |
| 119.968 | Peak | 46.51 | -9.21 | 37.30 | 43.50 | -6.20 |
| 288.020 | Peak | 48.71 | -8.79 | 39.93 | 46.00 | -6.07 |
| 360.043 | Peak | 48.72 | -7.18 | 41.54 | 46.00 | -4.46 |
| 539.978 | Peak | 42.02 | -2.85 | 39.17 | 46.00 | -6.83 |
| 874.991 | Peak | 36.37 | 2.57 | 38.94 | 46.00 | -7.06 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :TX
 EUT Pol :E1
 Setting :


Test Date :2023-09-01
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

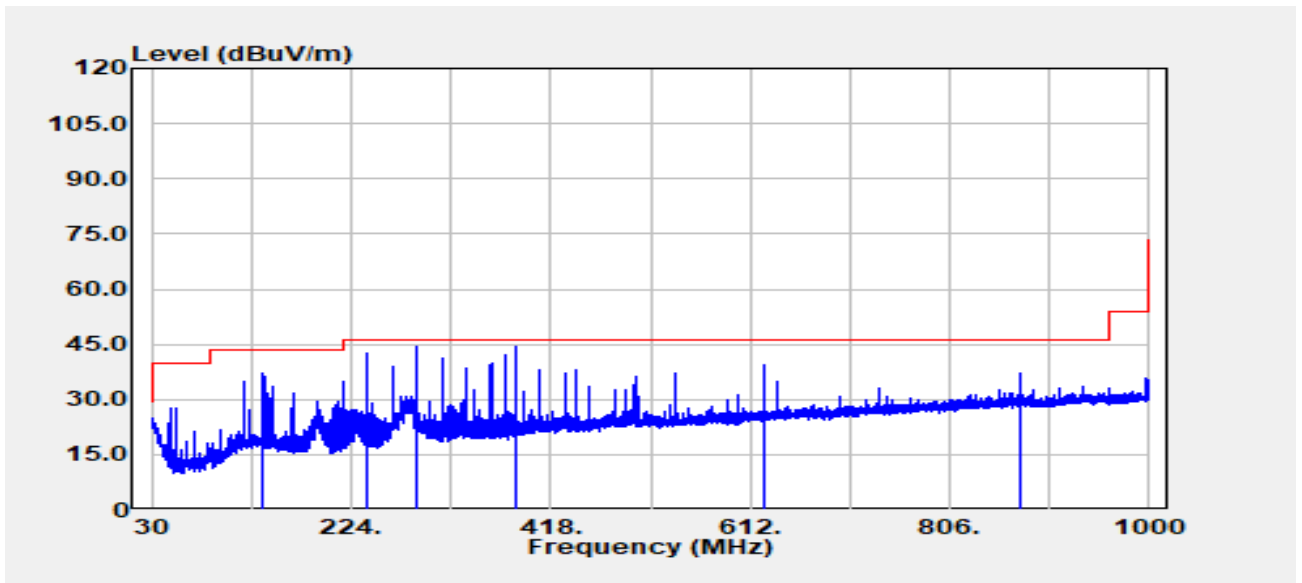

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 138.883 | Peak | 46.80 | -9.86 | 36.94 | 43.50 | -6.56 |
| 240.005 | Peak | 53.52 | -10.75 | 42.77 | 46.00 | -3.23 |
| 288.020 | Peak | 53.09 | -8.79 | 44.30 | 46.00 | -1.70 |
| 384.050 | Peak | 50.63 | -6.48 | 44.15 | 46.00 | -1.85 |
| 624.974 | Peak | 40.70 | -1.16 | 39.53 | 46.00 | -6.47 |
| 874.991 | Peak | 34.71 | 2.57 | 37.28 | 46.00 | -8.72 |

TX Test Data: (FCC_Above 1GHz)

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band1 | Temp./Humi. | :24.6/58 |
| Frequency | :5180 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

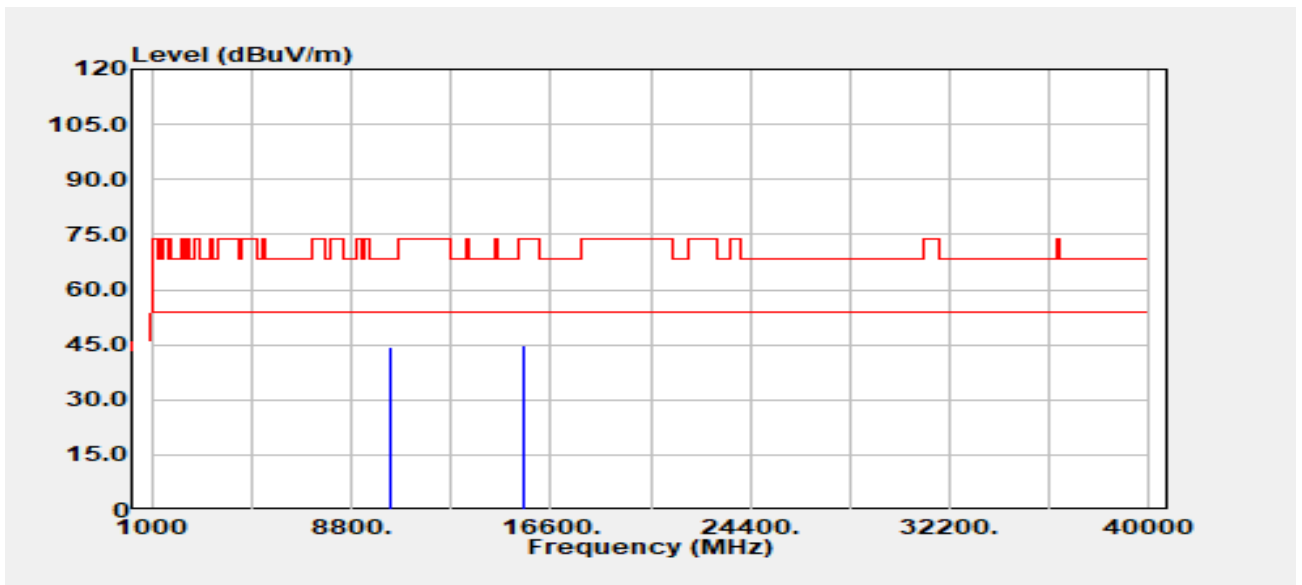


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10360.000 | Peak | 33.32 | 11.26 | 44.58 | 68.20 | -23.62 |
| 15540.000 | Peak | 32.41 | 12.38 | 44.79 | 74.00 | -29.21 |
| 15540.000 | Average | 23.30 | 12.38 | 35.68 | 54.00 | -18.32 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band1
 Frequency :5180 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

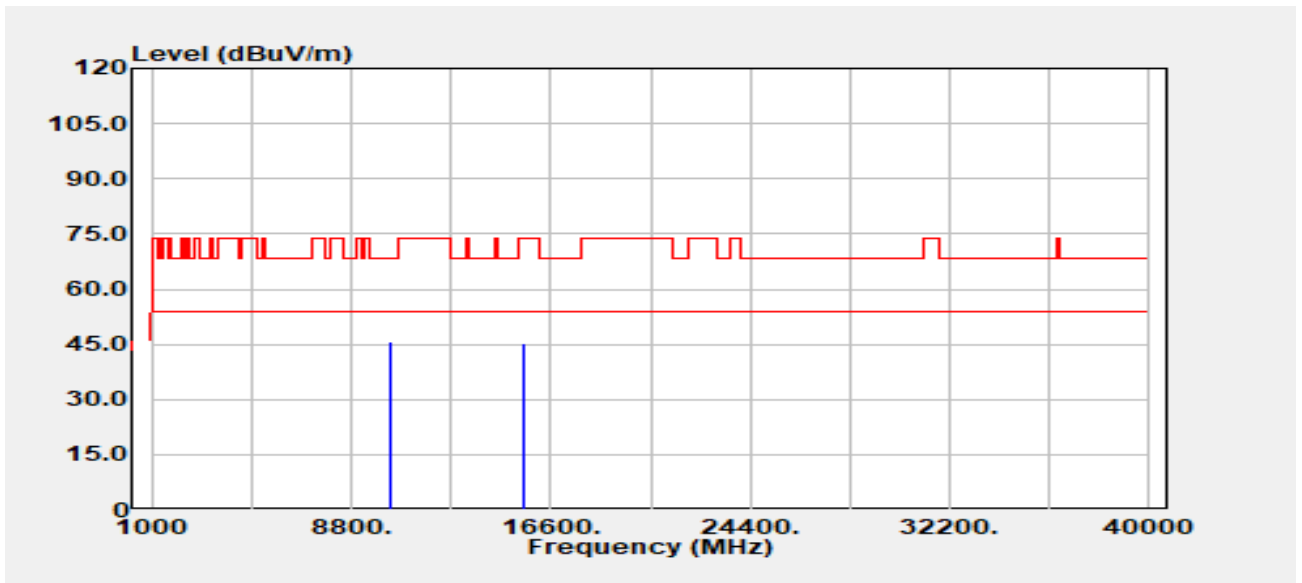


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10360.000 | Peak | 34.66 | 11.26 | 45.93 | 68.20 | -22.27 |
| 15540.000 | Peak | 32.77 | 12.38 | 45.15 | 74.00 | -28.85 |
| 15540.000 | Average | 22.87 | 12.38 | 35.25 | 54.00 | -18.75 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band1 | Temp./Humi. | :24.6/58 |
| Frequency | :5220 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

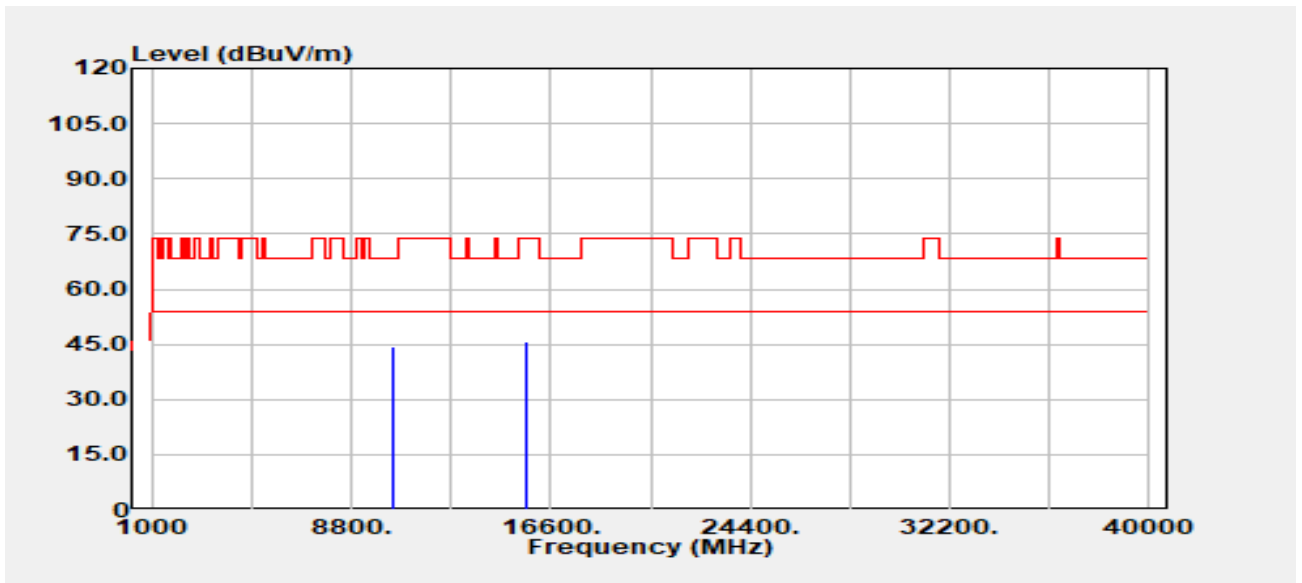


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10440.000 | Peak | 33.35 | 11.25 | 44.60 | 68.20 | -23.60 |
| 15660.000 | Peak | 31.99 | 13.53 | 45.52 | 74.00 | -28.48 |
| 15660.000 | Average | 22.78 | 13.53 | 36.31 | 54.00 | -17.69 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band1
 Frequency :5220 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

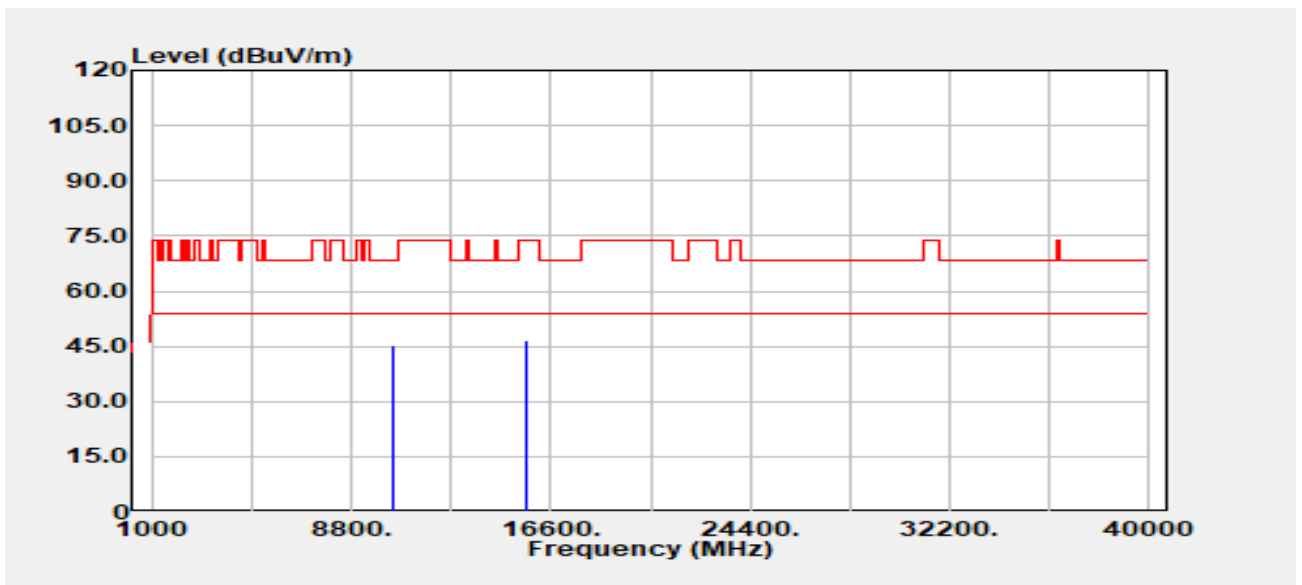


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10440.000 | Peak | 33.90 | 11.25 | 45.15 | 68.20 | -23.05 |
| 15660.000 | Peak | 33.18 | 13.53 | 46.71 | 74.00 | -27.29 |
| 15660.000 | Average | 22.76 | 13.53 | 36.29 | 54.00 | -17.71 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band1 | Temp./Humi. | :24.6/58 |
| Frequency | :5240 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

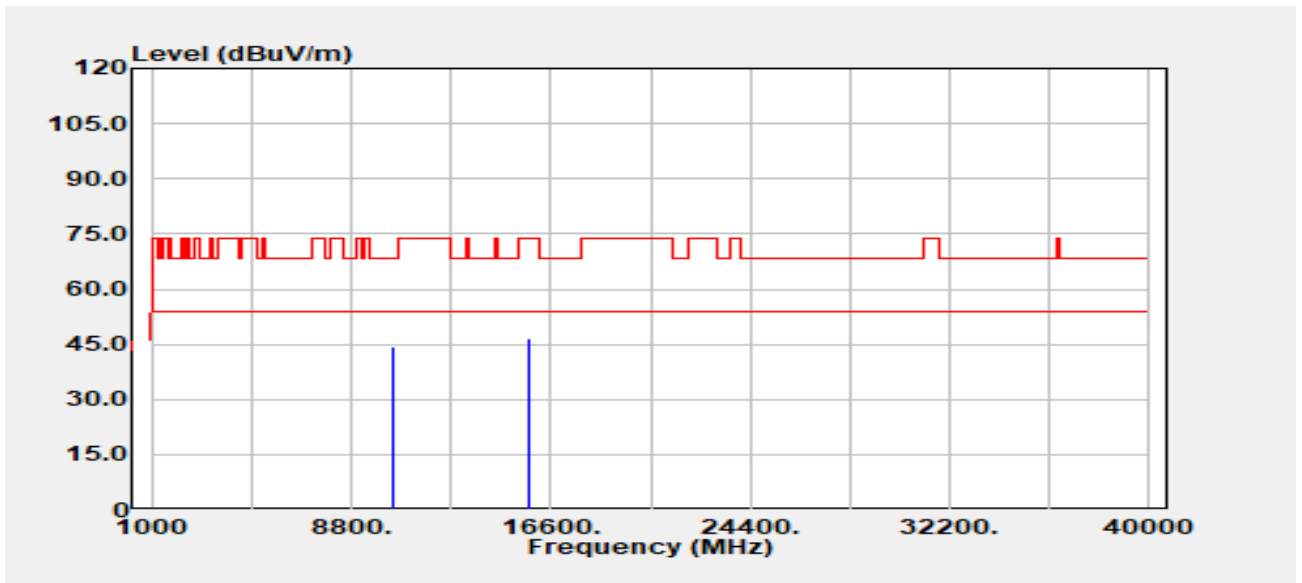


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10480.000 | Peak | 33.23 | 11.35 | 44.58 | 68.20 | -23.62 |
| 15720.000 | Peak | 32.70 | 14.11 | 46.81 | 74.00 | -27.19 |
| 15720.000 | Average | 22.97 | 14.11 | 37.08 | 54.00 | -16.92 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band1
 Frequency :5240 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

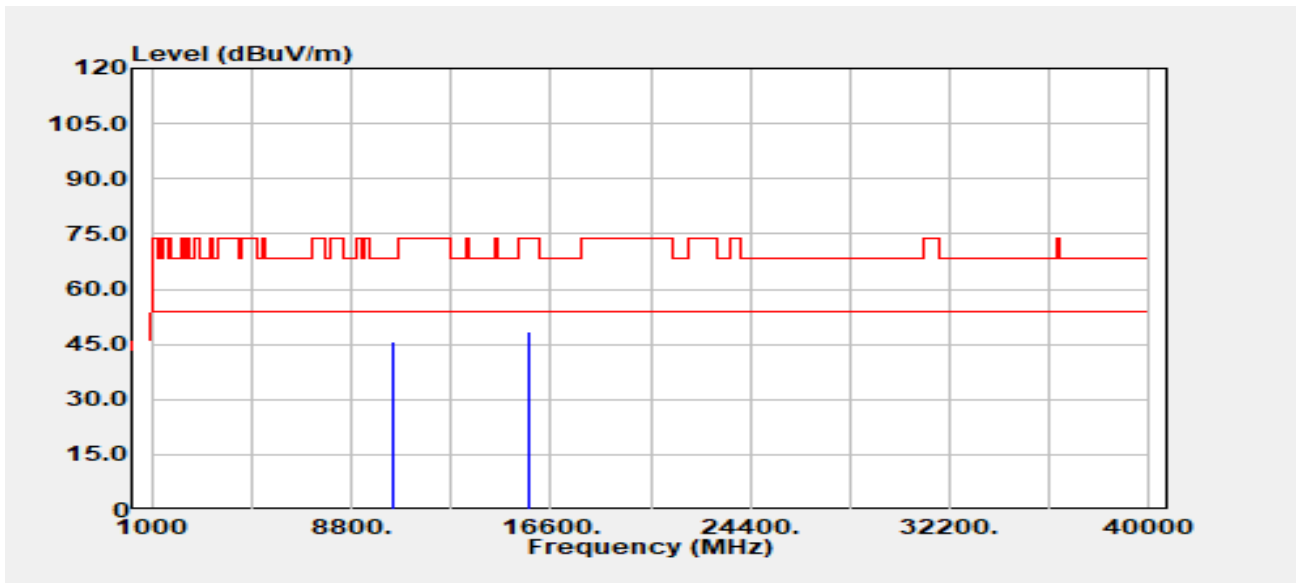


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10480.000 | Peak | 34.23 | 11.35 | 45.58 | 68.20 | -22.62 |
| 15720.000 | Peak | 34.26 | 14.11 | 48.37 | 74.00 | -25.63 |
| 15720.000 | Average | 23.07 | 14.11 | 37.18 | 54.00 | -16.82 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5180 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

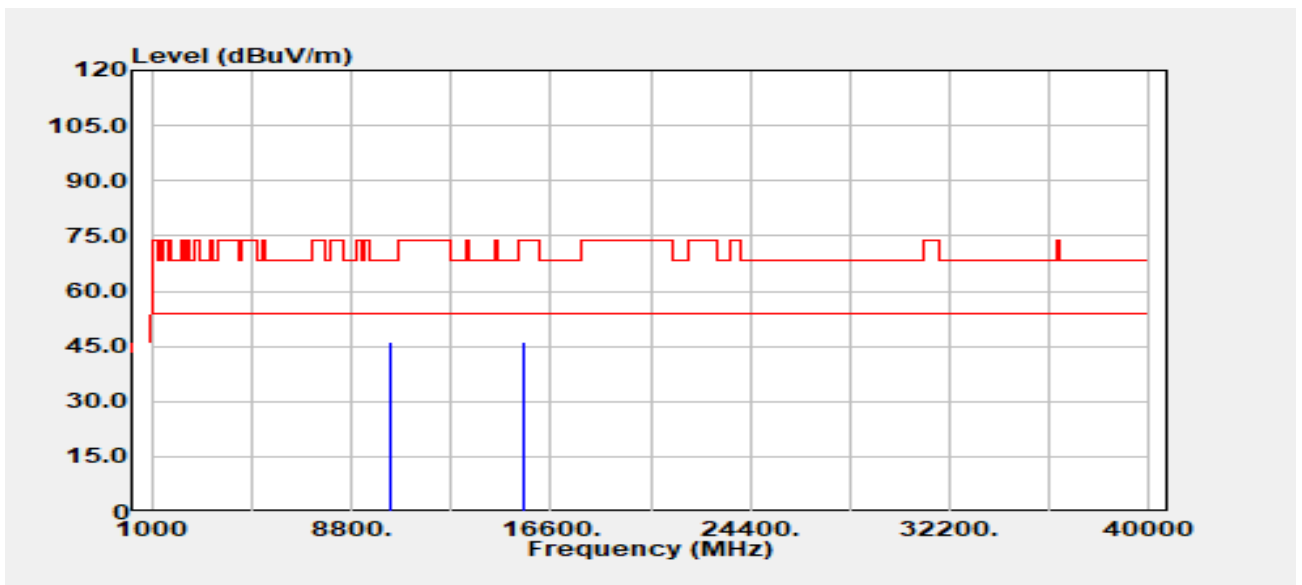


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10360.000 | Peak | 34.73 | 11.26 | 45.99 | 68.20 | -22.21 |
| 15540.000 | Peak | 33.71 | 12.38 | 46.09 | 74.00 | -27.91 |
| 15540.000 | Average | 22.95 | 12.38 | 35.33 | 54.00 | -18.67 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5180 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

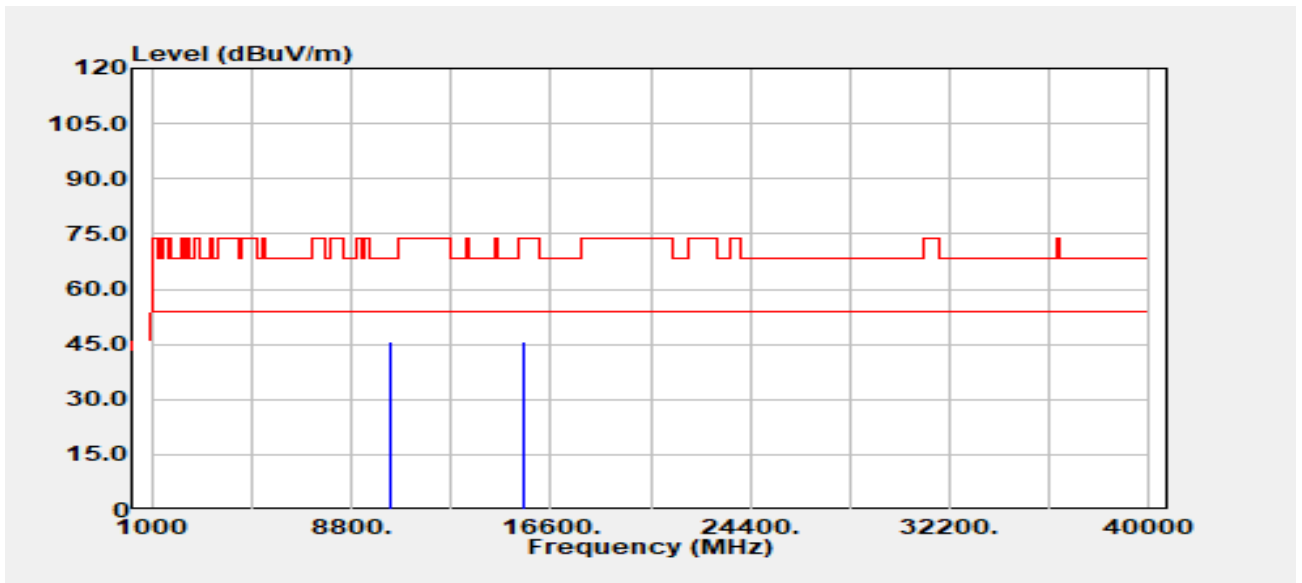


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10360.000 | Peak | 34.63 | 11.26 | 45.89 | 68.20 | -22.31 |
| 15540.000 | Peak | 33.18 | 12.38 | 45.56 | 74.00 | -28.44 |
| 15540.000 | Average | 22.79 | 12.38 | 35.16 | 54.00 | -18.84 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5220 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

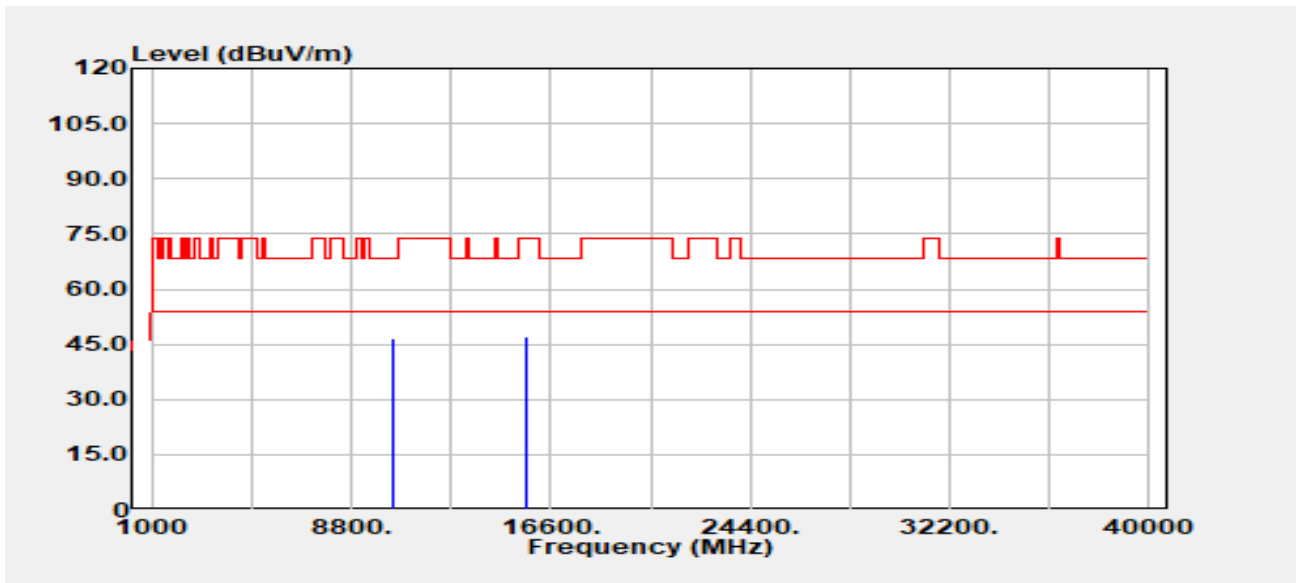


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10440.000 | Peak | 35.36 | 11.25 | 46.61 | 68.20 | -21.59 |
| 15660.000 | Peak | 33.38 | 13.53 | 46.90 | 74.00 | -27.10 |
| 15660.000 | Average | 22.99 | 13.53 | 36.52 | 54.00 | -17.48 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5220 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

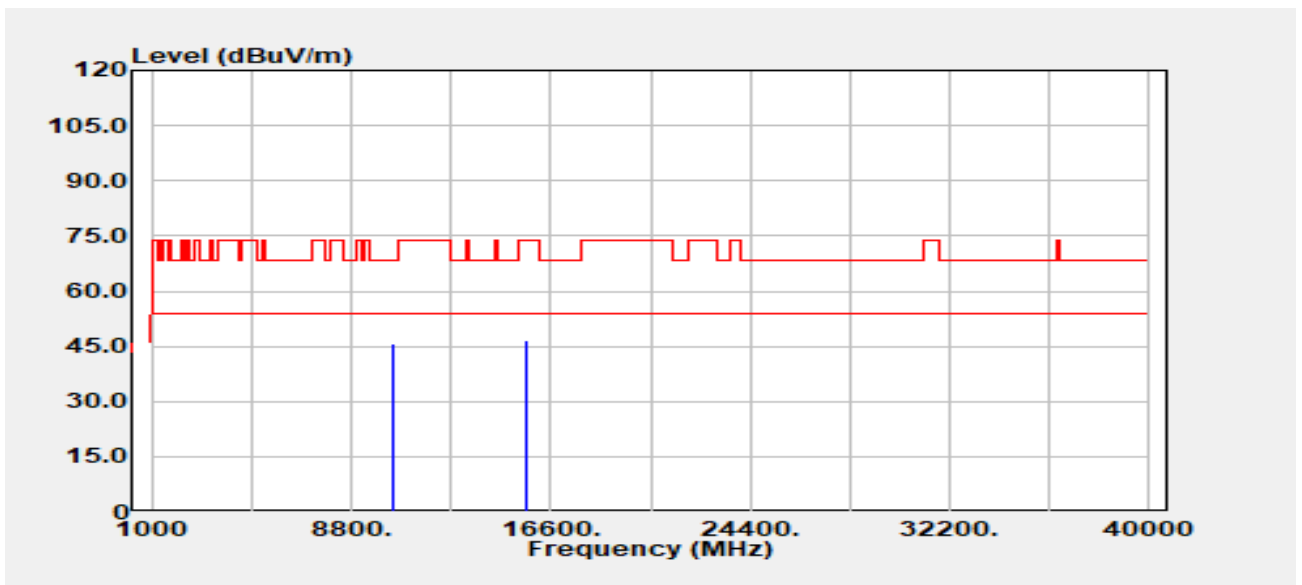


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10440.000 | Peak | 34.47 | 11.25 | 45.72 | 68.20 | -22.48 |
| 15660.000 | Peak | 33.27 | 13.53 | 46.79 | 74.00 | -27.21 |
| 15660.000 | Average | 23.09 | 13.53 | 36.61 | 54.00 | -17.39 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5240 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

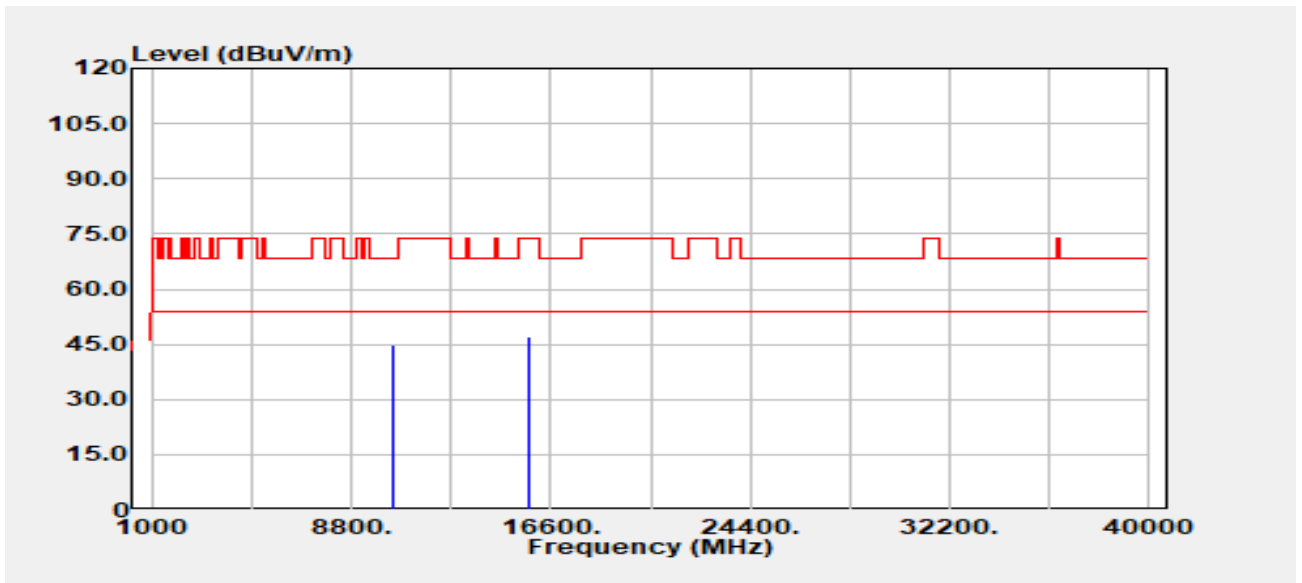


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10480.000 | Peak | 33.69 | 11.35 | 45.04 | 68.20 | -23.16 |
| 15720.000 | Peak | 33.12 | 14.11 | 47.23 | 74.00 | -26.77 |
| 15720.000 | Average | 22.72 | 14.11 | 36.83 | 54.00 | -17.17 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5240 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

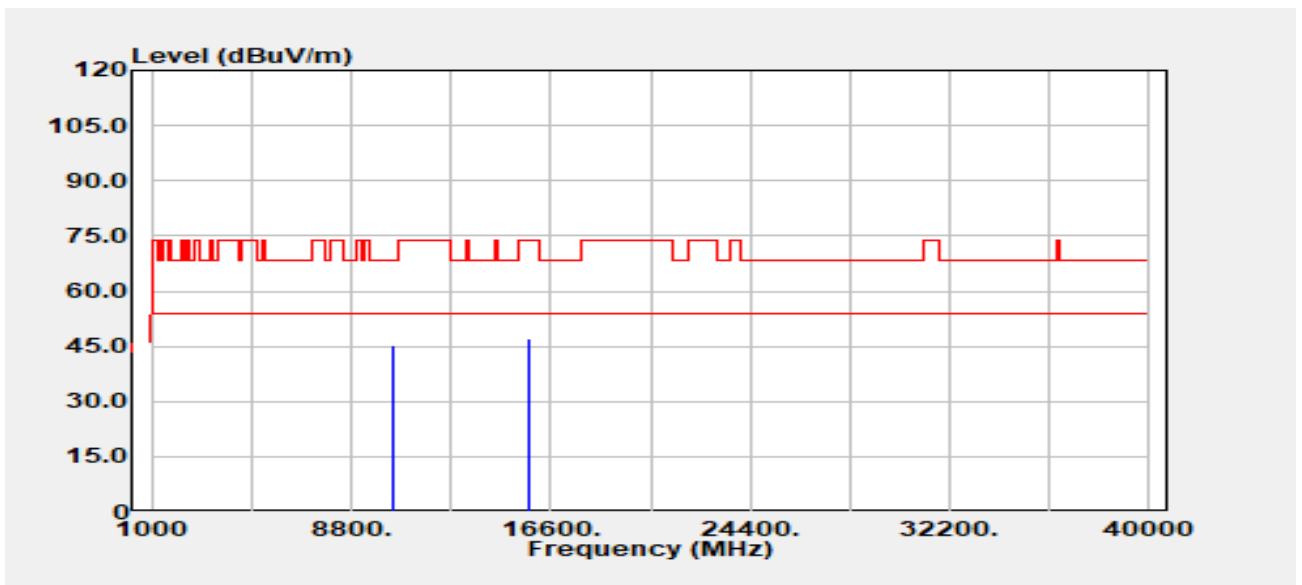


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10480.000 | Peak | 34.11 | 11.35 | 45.46 | 68.20 | -22.74 |
| 15720.000 | Peak | 32.90 | 14.11 | 47.01 | 74.00 | -26.99 |
| 15720.000 | Average | 22.63 | 14.11 | 36.74 | 54.00 | -17.26 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band1
 Frequency :5190 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

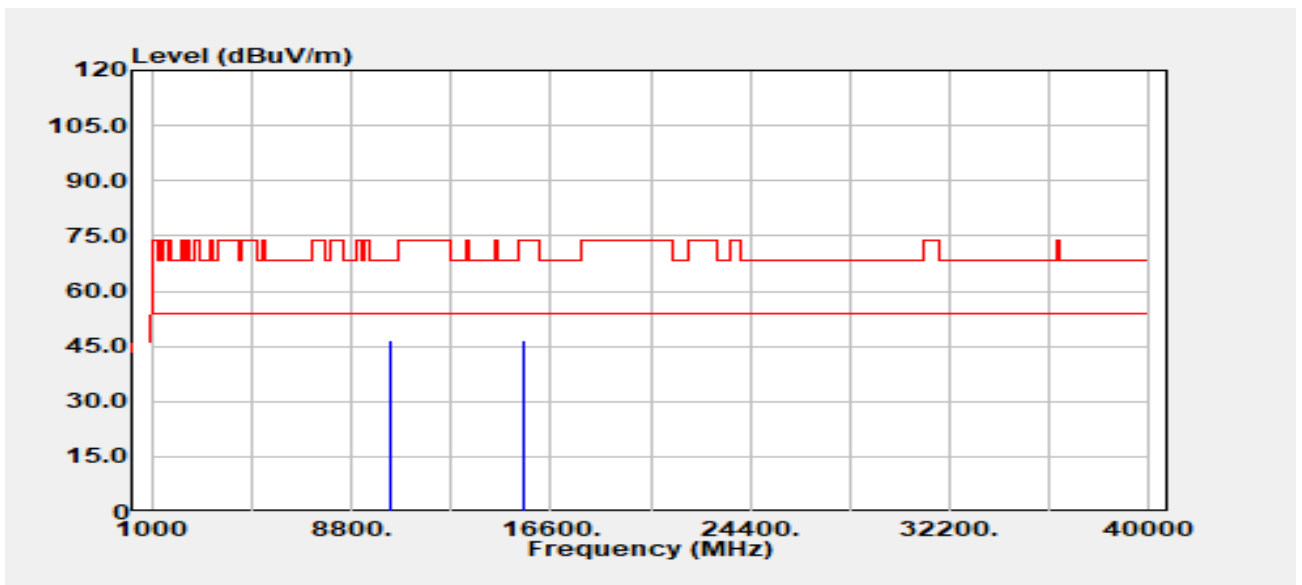


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10380.000 | Peak | 35.39 | 11.22 | 46.61 | 68.20 | -21.59 |
| 15570.000 | Peak | 34.36 | 12.41 | 46.77 | 74.00 | -27.23 |
| 15570.000 | Average | 24.64 | 12.41 | 37.05 | 54.00 | -16.95 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band1
 Frequency :5190 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

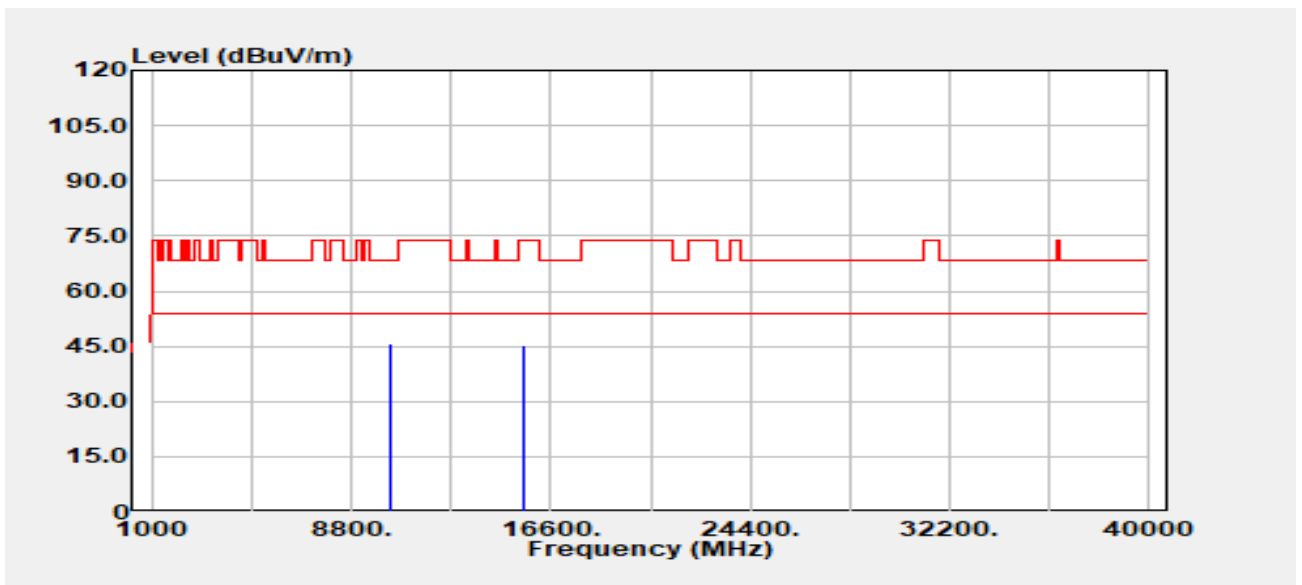


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10380.000 | Peak | 34.67 | 11.22 | 45.88 | 68.20 | -22.32 |
| 15570.000 | Peak | 33.04 | 12.41 | 45.46 | 74.00 | -28.54 |
| 15570.000 | Average | 24.70 | 12.41 | 37.11 | 54.00 | -16.89 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band1
 Frequency :5230 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

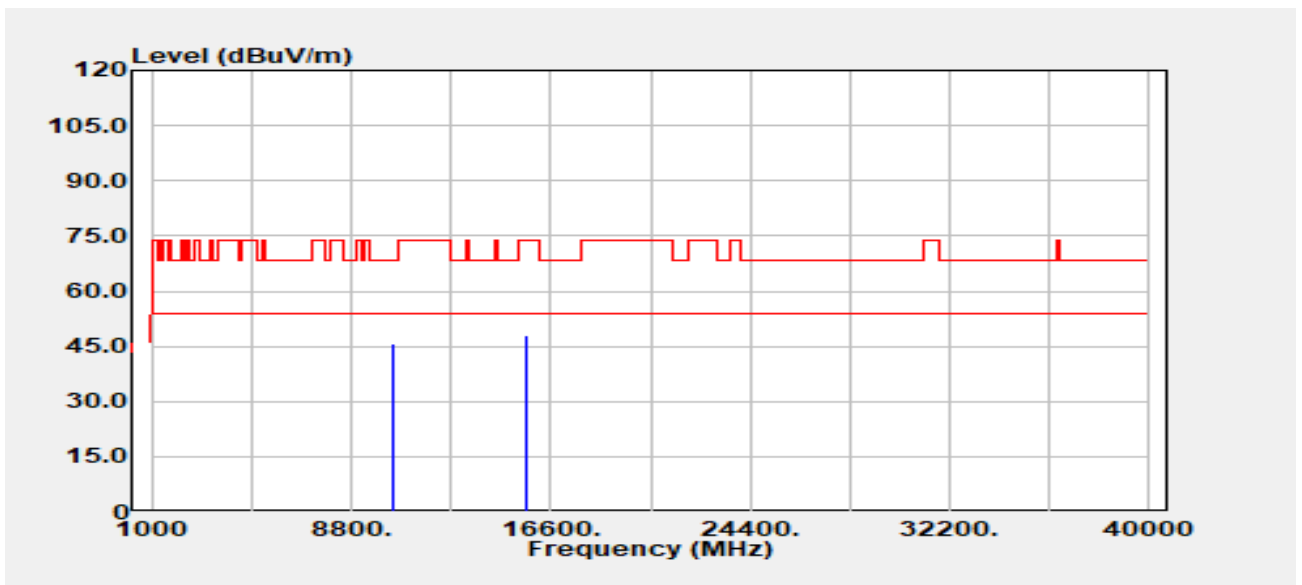


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10460.000 | Peak | 34.42 | 11.30 | 45.72 | 68.20 | -22.48 |
| 15690.000 | Peak | 34.08 | 13.90 | 47.98 | 74.00 | -26.02 |
| 15690.000 | Average | 24.58 | 13.90 | 38.48 | 54.00 | -15.52 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band1
 Frequency :5230 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

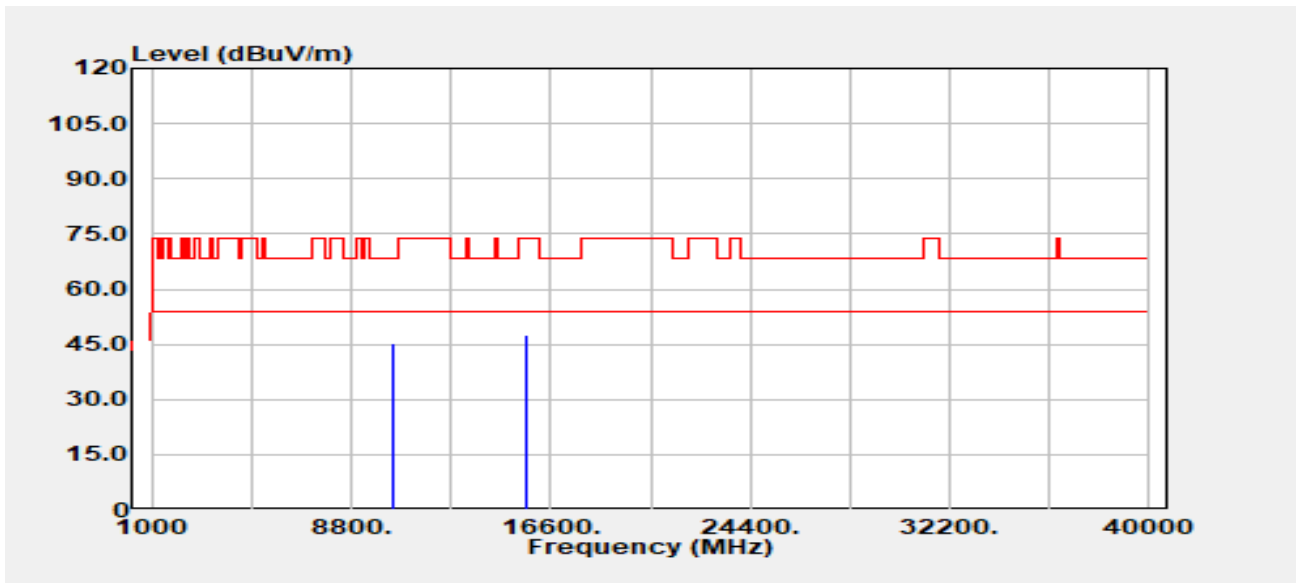


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10460.000 | Peak | 33.88 | 11.30 | 45.18 | 68.20 | -23.02 |
| 15690.000 | Peak | 33.80 | 13.90 | 47.70 | 74.00 | -26.30 |
| 15690.000 | Average | 24.68 | 13.90 | 38.58 | 54.00 | -15.42 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11ac80/Band1 | Temp./Humi. | :24.6/57 |
| Frequency | :5210 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

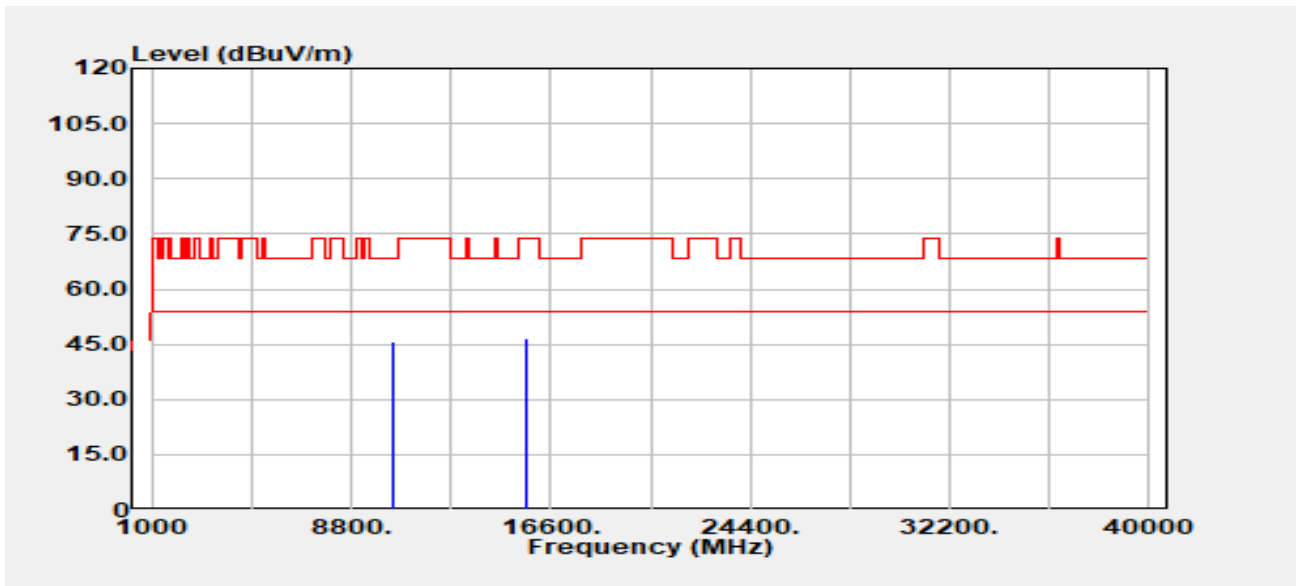


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10420.000 | Peak | 34.41 | 11.21 | 45.62 | 68.20 | -22.58 |
| 15630.000 | Peak | 33.38 | 13.06 | 46.44 | 74.00 | -27.56 |
| 15630.000 | Average | 24.50 | 13.06 | 37.56 | 54.00 | -16.44 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band1
 Frequency :5210 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

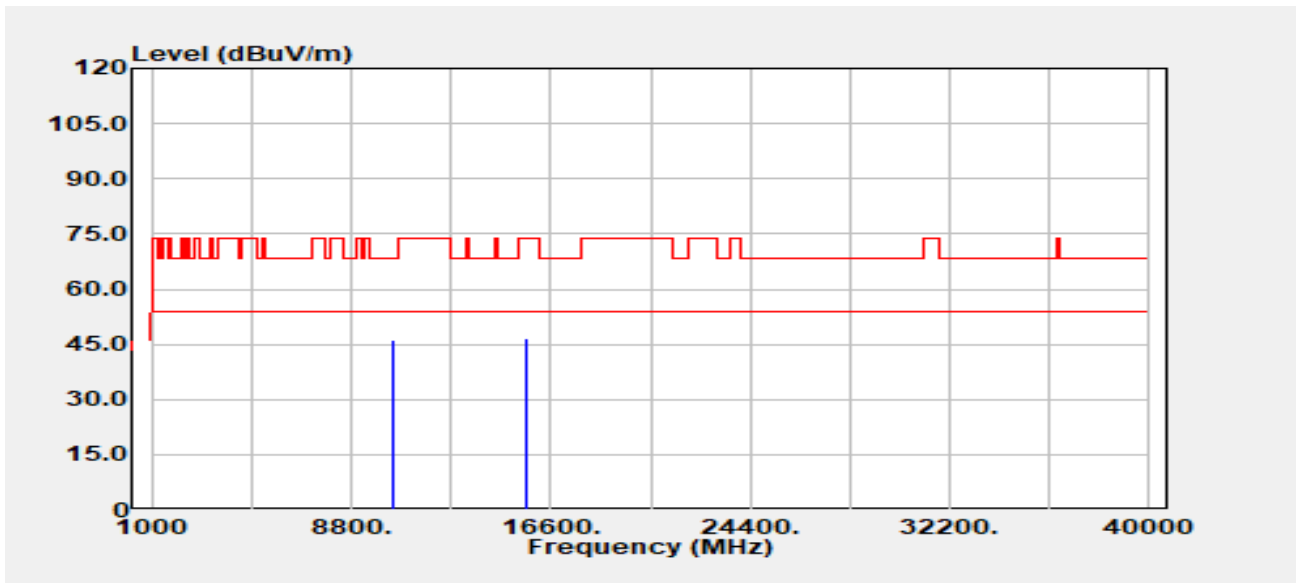


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10420.000 | Peak | 35.06 | 11.21 | 46.27 | 68.20 | -21.93 |
| 15630.000 | Peak | 33.50 | 13.06 | 46.55 | 74.00 | -27.45 |
| 15630.000 | Average | 24.54 | 13.06 | 37.60 | 54.00 | -16.40 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5260 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

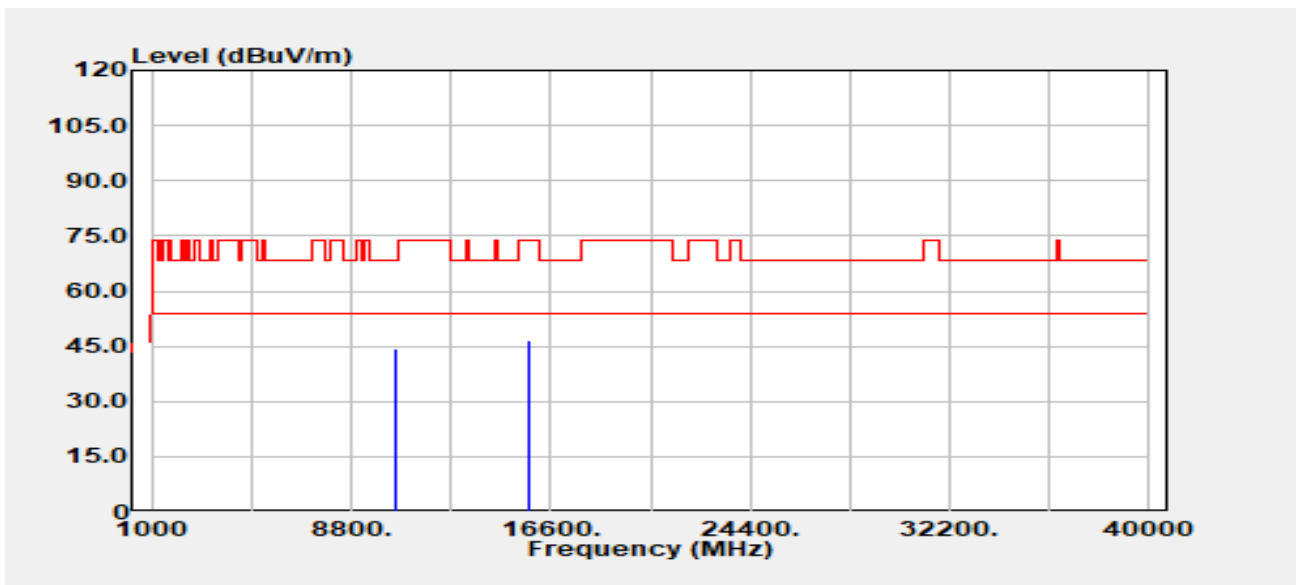


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10520.000 | Peak | 32.82 | 11.41 | 44.23 | 68.20 | -23.97 |
| 15780.000 | Peak | 32.61 | 14.08 | 46.68 | 74.00 | -27.32 |
| 15780.000 | Average | 23.00 | 14.08 | 37.08 | 54.00 | -16.92 |

Report No.: TMWK2308002691KR

Rev.: 00


| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5260 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

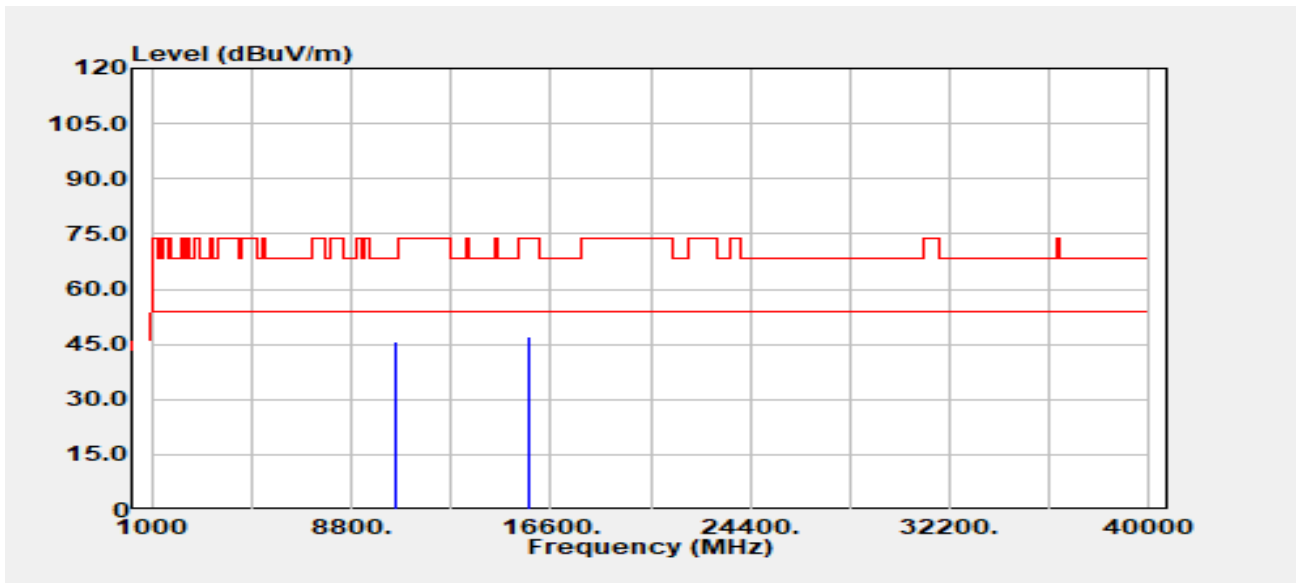

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10520.000 | Peak | 34.17 | 11.41 | 45.58 | 68.20 | -22.62 |
| 15780.000 | Peak | 33.16 | 14.08 | 47.23 | 74.00 | -26.77 |
| 15780.000 | Average | 22.93 | 14.08 | 37.00 | 54.00 | -17.00 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5300 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

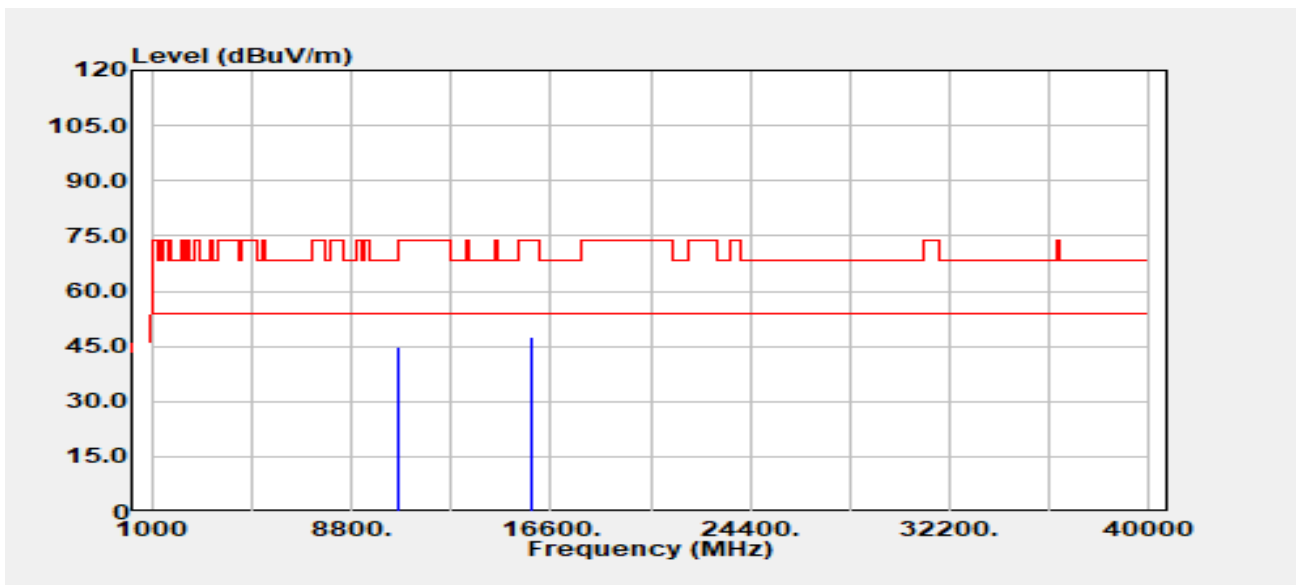


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10600.000 | Peak | 33.28 | 11.53 | 44.81 | 68.20 | -23.39 |
| 15900.000 | Peak | 33.18 | 14.45 | 47.63 | 74.00 | -26.37 |
| 15900.000 | Average | 23.58 | 14.45 | 38.03 | 54.00 | -15.97 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band2
 Frequency :5300 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

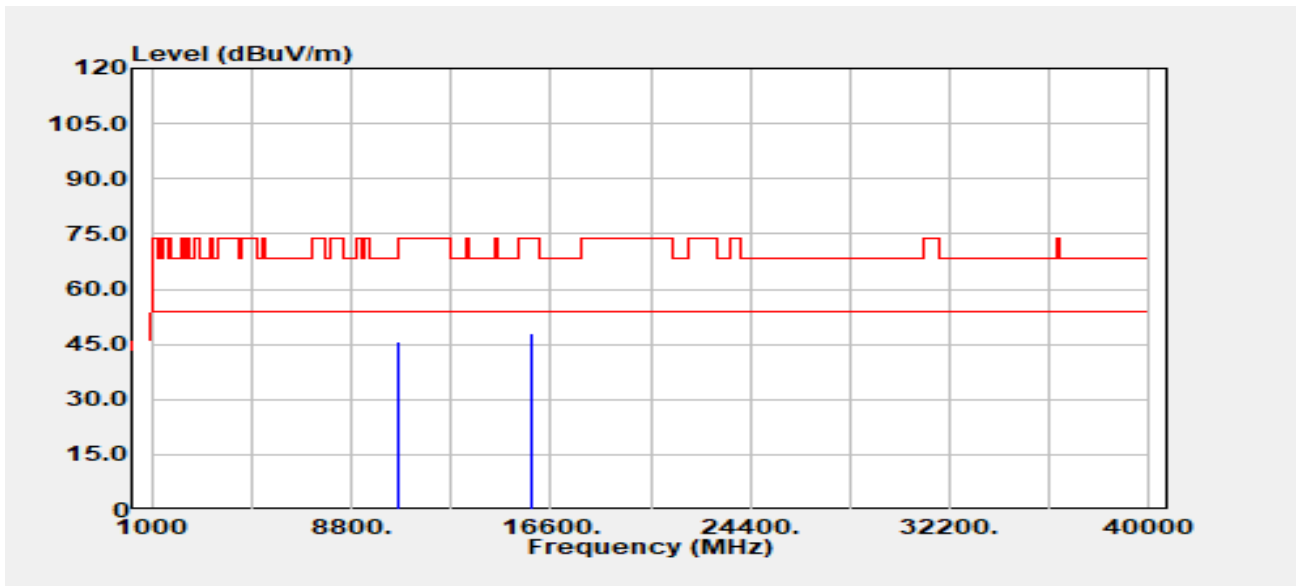


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10600.000 | Peak | 34.20 | 11.53 | 45.73 | 68.20 | -22.47 |
| 15900.000 | Peak | 33.47 | 14.45 | 47.92 | 74.00 | -26.08 |
| 15900.000 | Average | 23.59 | 14.45 | 38.04 | 54.00 | -15.96 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band2
 Frequency :5320 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

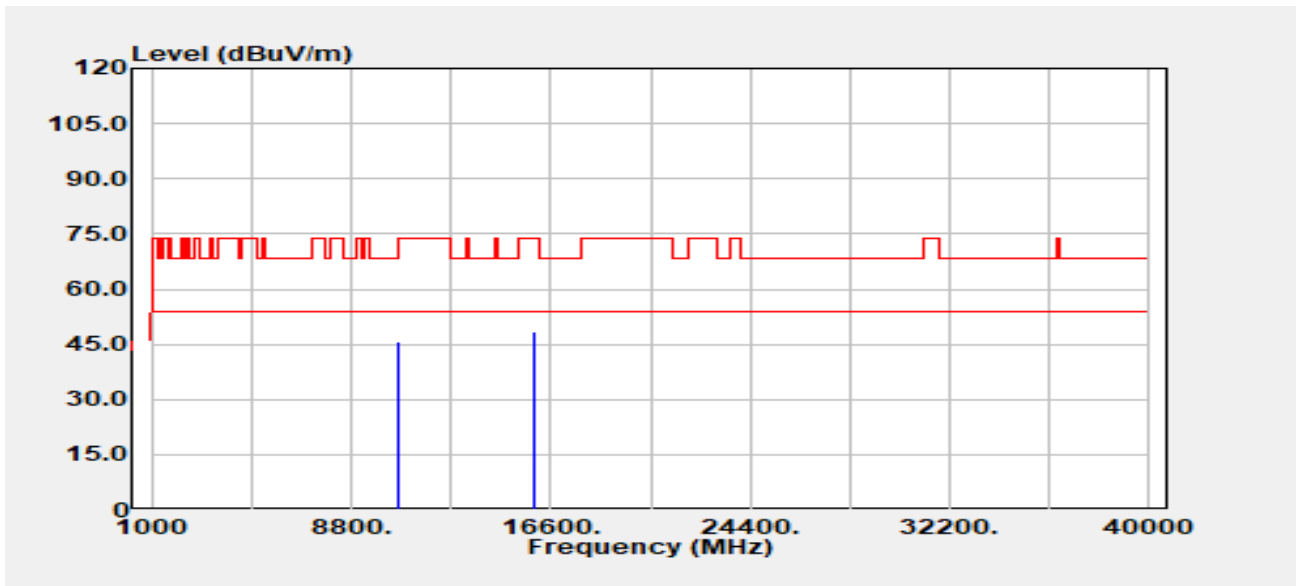


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10640.000 | Peak | 34.16 | 11.50 | 45.66 | 74.00 | -28.34 |
| 10640.000 | Average | 23.93 | 11.50 | 35.44 | 54.00 | -18.56 |
| 15960.000 | Peak | 33.33 | 15.09 | 48.42 | 74.00 | -25.58 |
| 15960.000 | Average | 23.04 | 15.09 | 38.13 | 54.00 | -15.87 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band2
 Frequency :5320 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :


Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

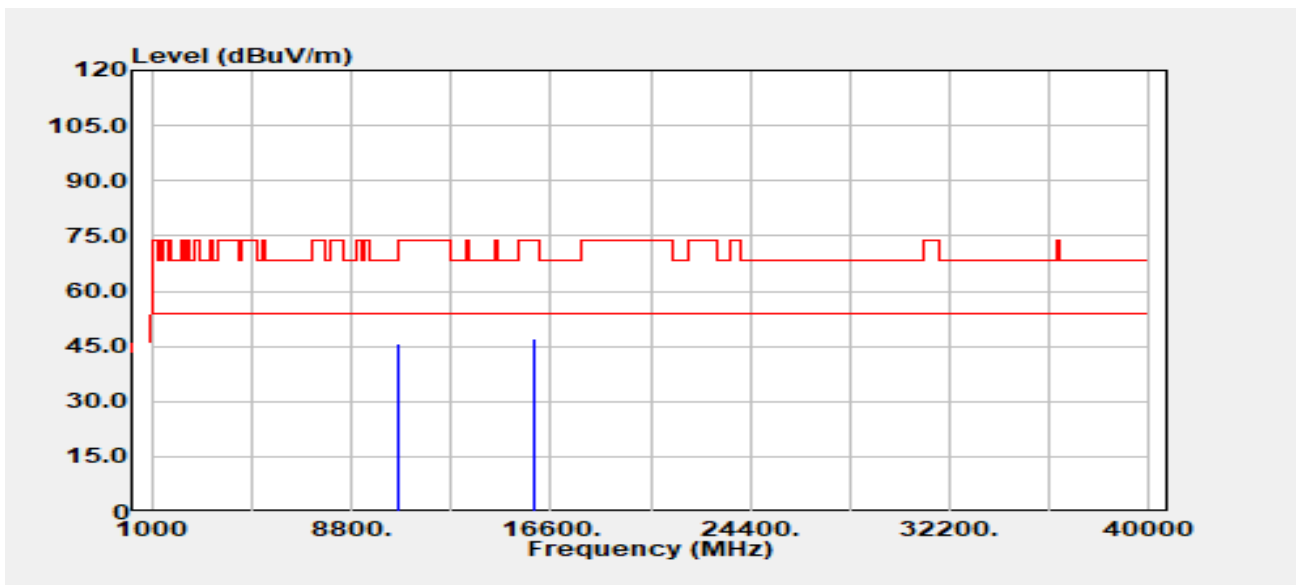

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10640.000 | Peak | 34.15 | 11.50 | 45.65 | 74.00 | -28.35 |
| 10640.000 | Average | 23.90 | 11.50 | 35.41 | 54.00 | -18.59 |
| 15960.000 | Peak | 32.22 | 15.09 | 47.31 | 74.00 | -26.69 |
| 15960.000 | Average | 23.11 | 15.09 | 38.20 | 54.00 | -15.80 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11n20/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5260 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

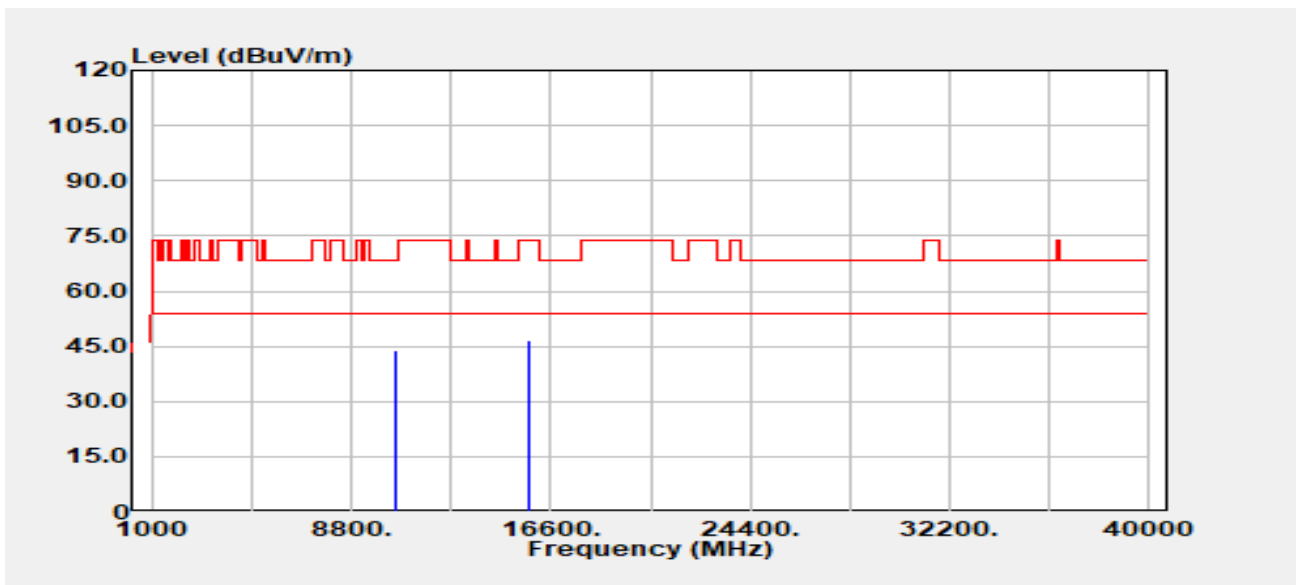


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10520.000 | Peak | 32.72 | 11.41 | 44.13 | 68.20 | -24.07 |
| 15780.000 | Peak | 32.63 | 14.08 | 46.70 | 74.00 | -27.30 |
| 15780.000 | Average | 22.72 | 14.08 | 36.79 | 54.00 | -17.21 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5260 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

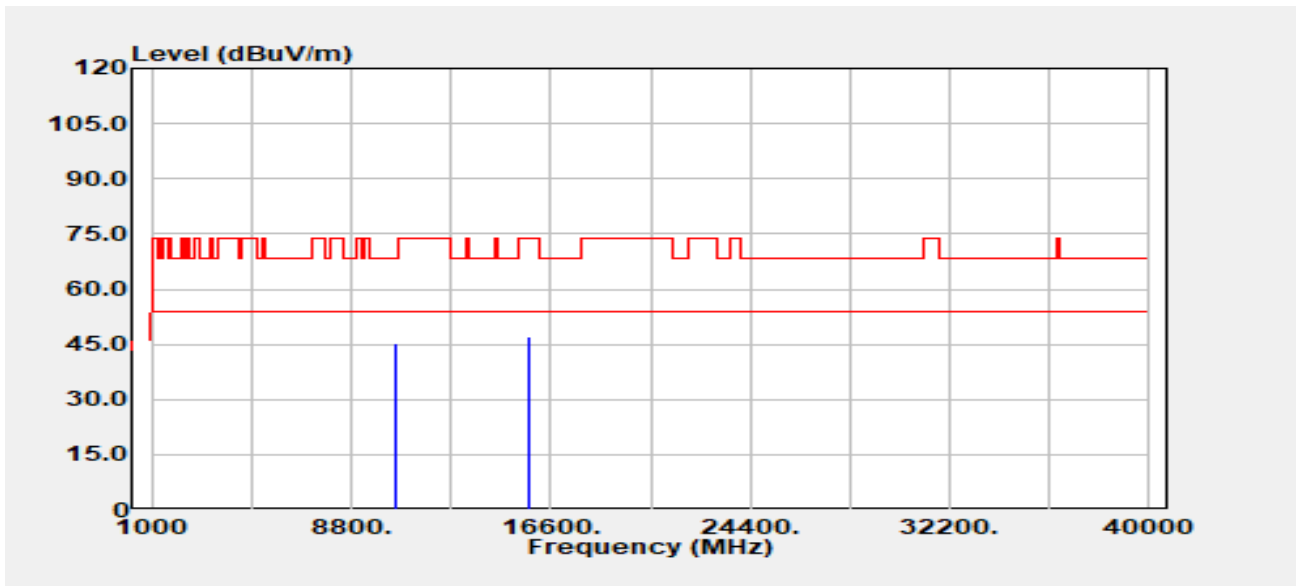


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10520.000 | Peak | 33.89 | 11.41 | 45.30 | 68.20 | -22.90 |
| 15780.000 | Peak | 33.20 | 14.08 | 47.28 | 74.00 | -26.72 |
| 15780.000 | Average | 22.71 | 14.08 | 36.78 | 54.00 | -17.22 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5300 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

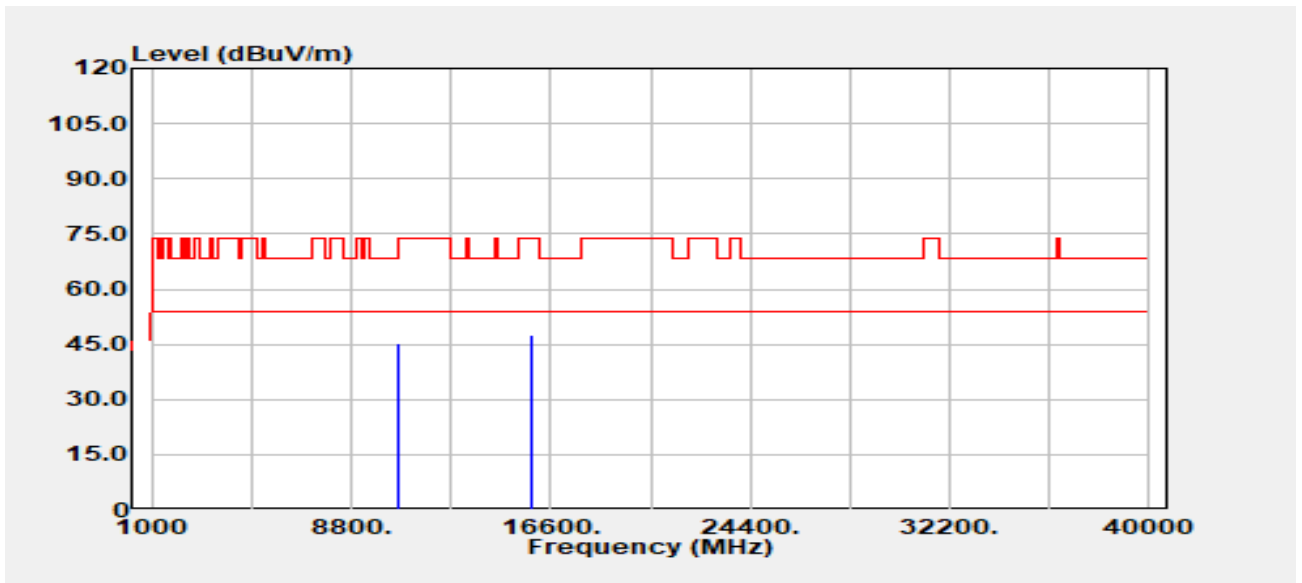


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10600.000 | Peak | 33.69 | 11.53 | 45.22 | 68.20 | -22.98 |
| 15900.000 | Peak | 33.11 | 14.45 | 47.56 | 74.00 | -26.44 |
| 15900.000 | Average | 23.43 | 14.45 | 37.88 | 54.00 | -16.12 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5300 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

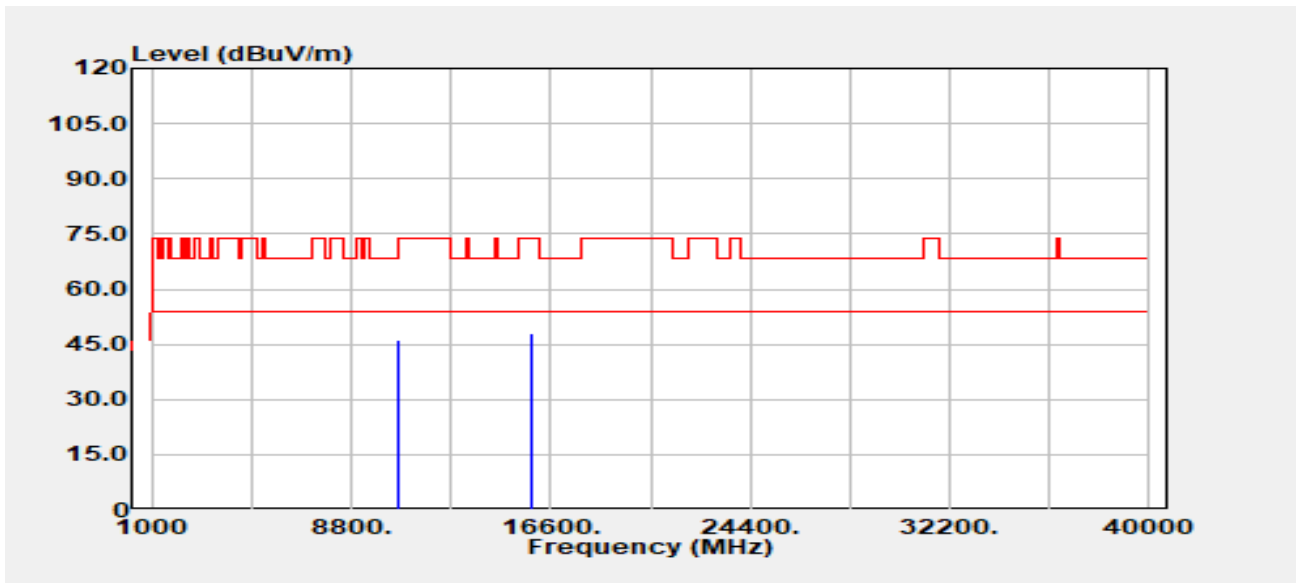


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10600.000 | Peak | 34.65 | 11.53 | 46.18 | 68.20 | -22.02 |
| 15900.000 | Peak | 33.49 | 14.45 | 47.94 | 74.00 | -26.06 |
| 15900.000 | Average | 23.47 | 14.45 | 37.92 | 54.00 | -16.08 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5320 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

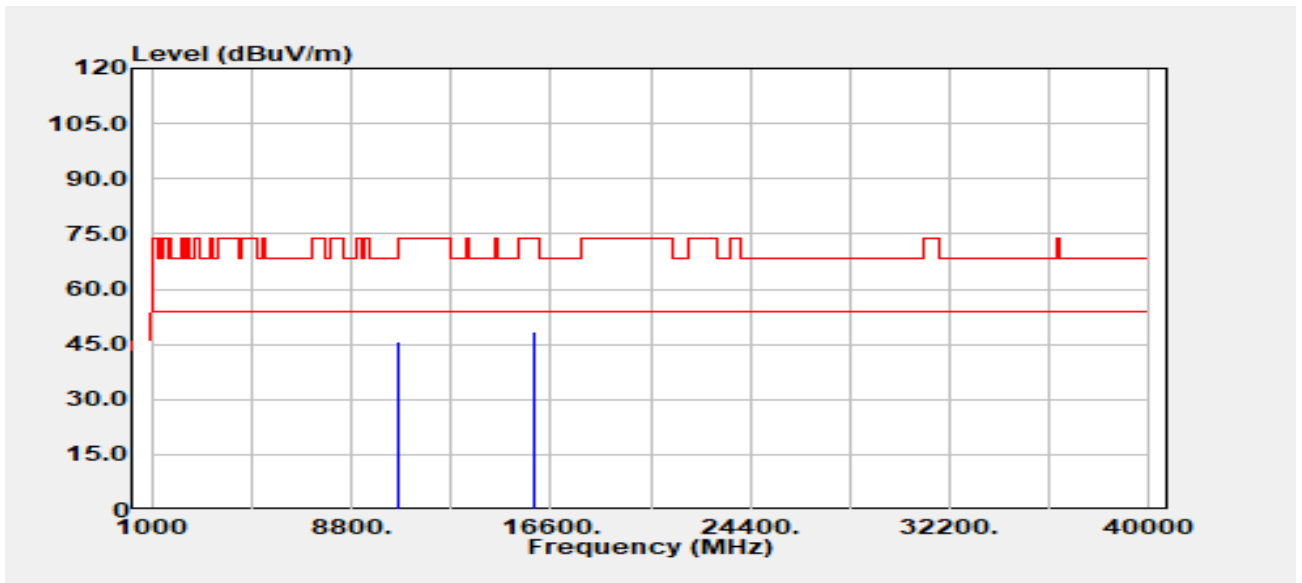


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10640.000 | Peak | 34.24 | 11.50 | 45.74 | 74.00 | -28.26 |
| 10640.000 | Average | 23.90 | 11.50 | 35.40 | 54.00 | -18.60 |
| 15960.000 | Peak | 33.57 | 15.09 | 48.66 | 74.00 | -25.34 |
| 15960.000 | Average | 23.10 | 15.09 | 38.19 | 54.00 | -15.81 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5320 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

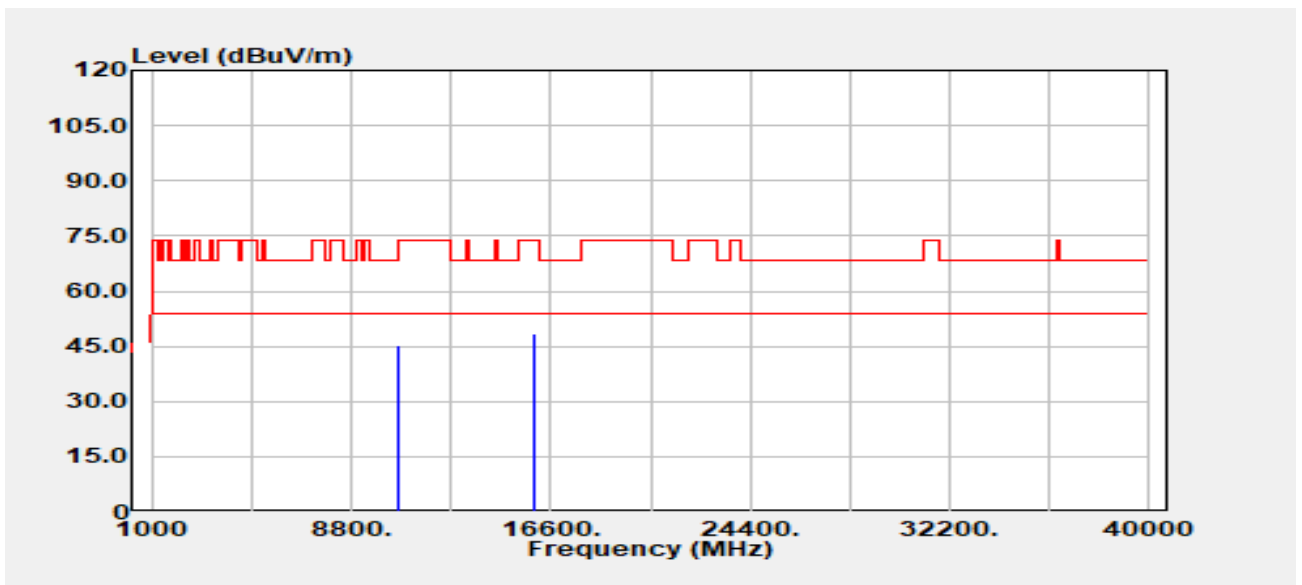


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10640.000 | Peak | 33.81 | 11.50 | 45.31 | 74.00 | -28.69 |
| 10640.000 | Average | 23.88 | 11.50 | 35.38 | 54.00 | -18.62 |
| 15960.000 | Peak | 33.27 | 15.09 | 48.36 | 74.00 | -25.64 |
| 15960.000 | Average | 23.07 | 15.09 | 38.16 | 54.00 | -15.84 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band2
 Frequency :5270 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

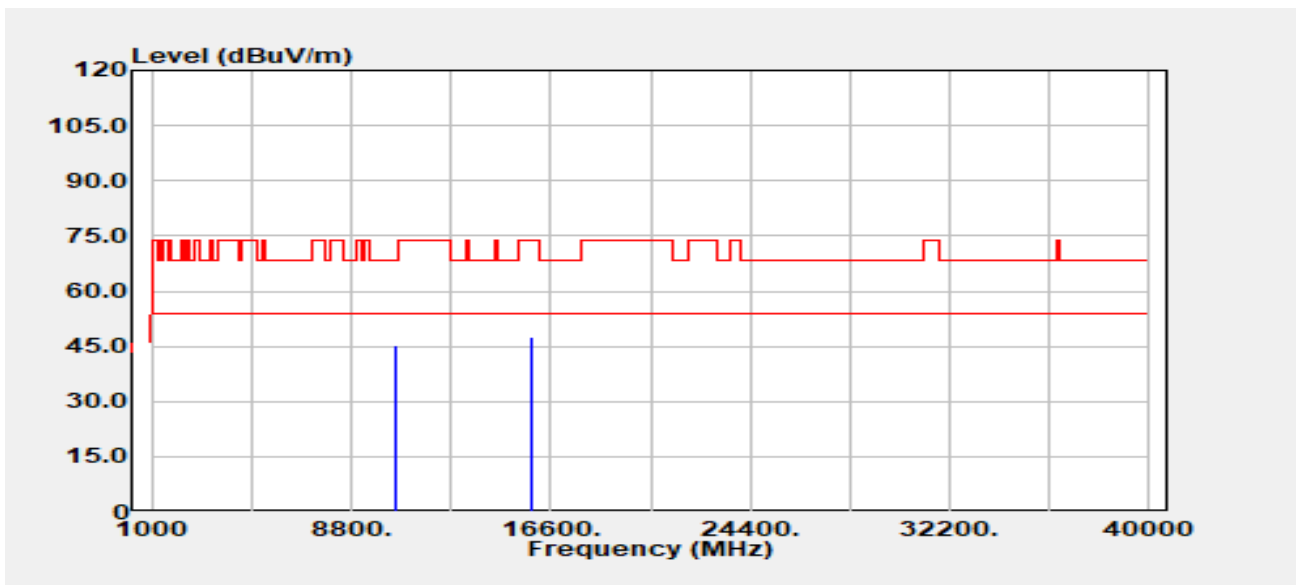


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10540.000 | Peak | 33.78 | 11.41 | 45.19 | 68.20 | -23.01 |
| 15810.000 | Peak | 33.33 | 14.04 | 47.37 | 74.00 | -26.63 |
| 15810.000 | Average | 24.60 | 14.04 | 38.64 | 54.00 | -15.36 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band2
 Frequency :5270 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

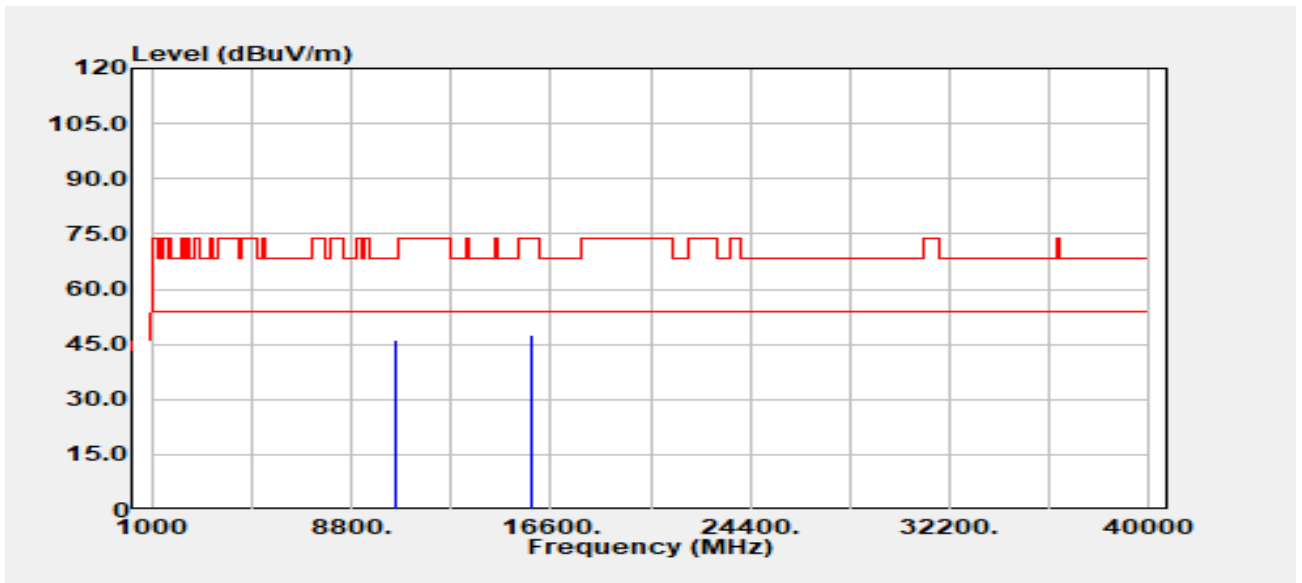


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10540.000 | Peak | 34.79 | 11.41 | 46.20 | 68.20 | -22.00 |
| 15810.000 | Peak | 33.58 | 14.04 | 47.62 | 74.00 | -26.38 |
| 15810.000 | Average | 24.50 | 14.04 | 38.54 | 54.00 | -15.46 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band2
 Frequency :5310 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

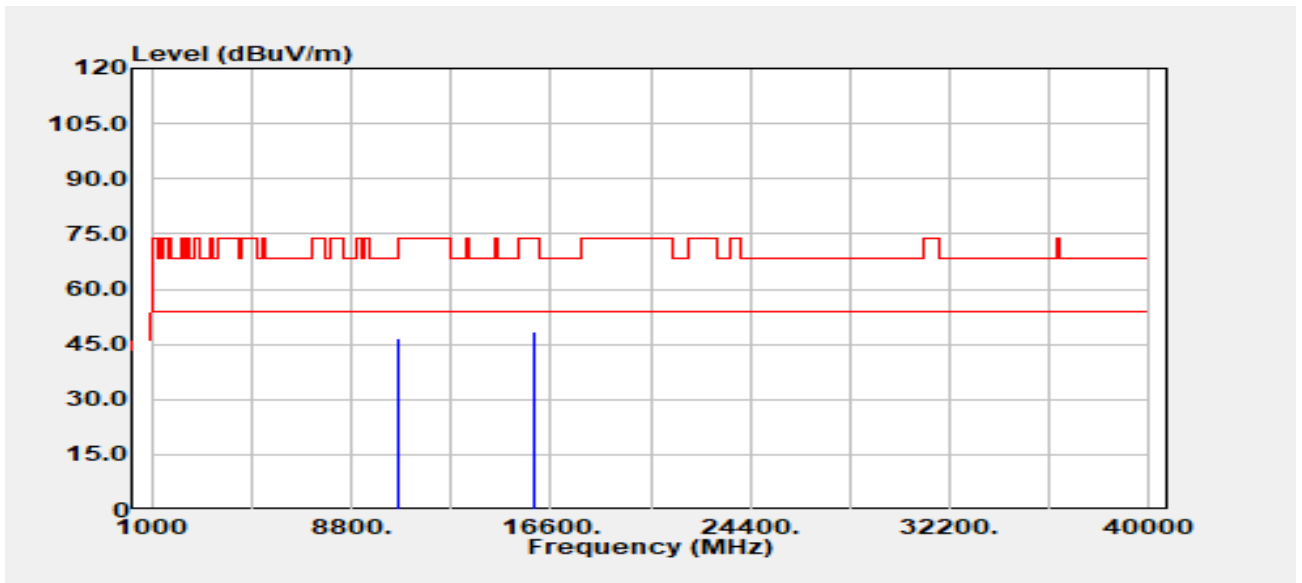


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10620.000 | Peak | 34.93 | 11.52 | 46.45 | 74.00 | -27.55 |
| 10620.000 | Average | 25.39 | 11.52 | 36.91 | 54.00 | -17.09 |
| 15930.000 | Peak | 33.73 | 14.81 | 48.54 | 74.00 | -25.46 |
| 15930.000 | Average | 24.87 | 14.81 | 39.68 | 54.00 | -14.32 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band2
 Frequency :5310 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

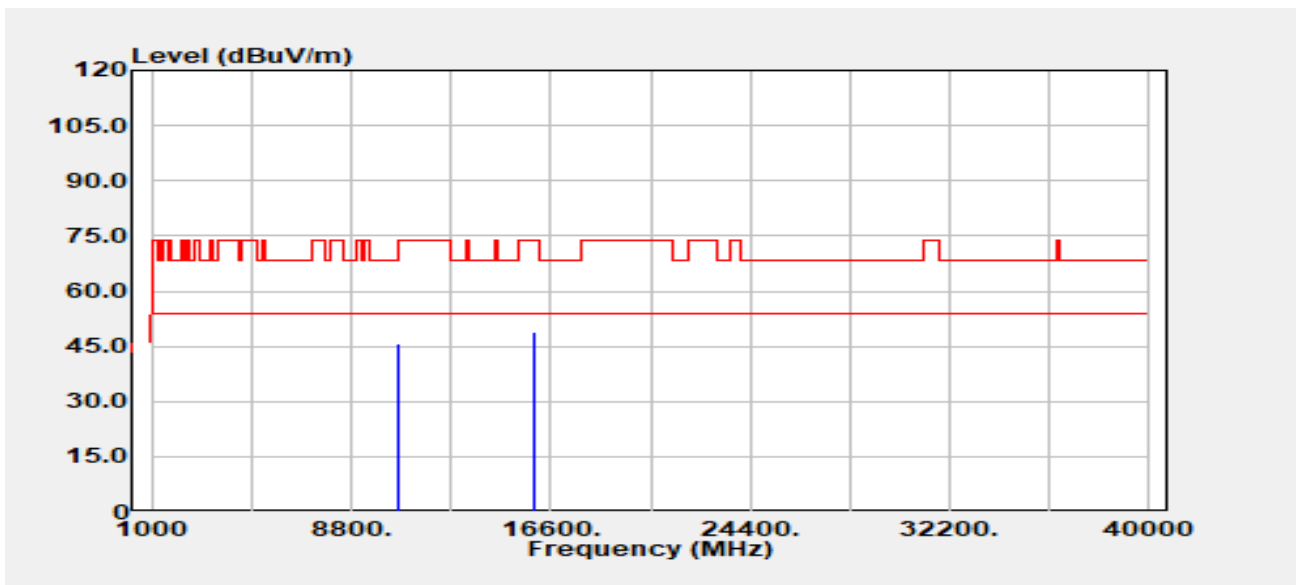


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10620.000 | Peak | 34.38 | 11.52 | 45.90 | 74.00 | -28.10 |
| 10620.000 | Average | 25.48 | 11.52 | 37.00 | 54.00 | -17.00 |
| 15930.000 | Peak | 34.12 | 14.81 | 48.94 | 74.00 | -25.06 |
| 15930.000 | Average | 24.38 | 14.81 | 39.19 | 54.00 | -14.81 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band2
 Frequency :5290 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

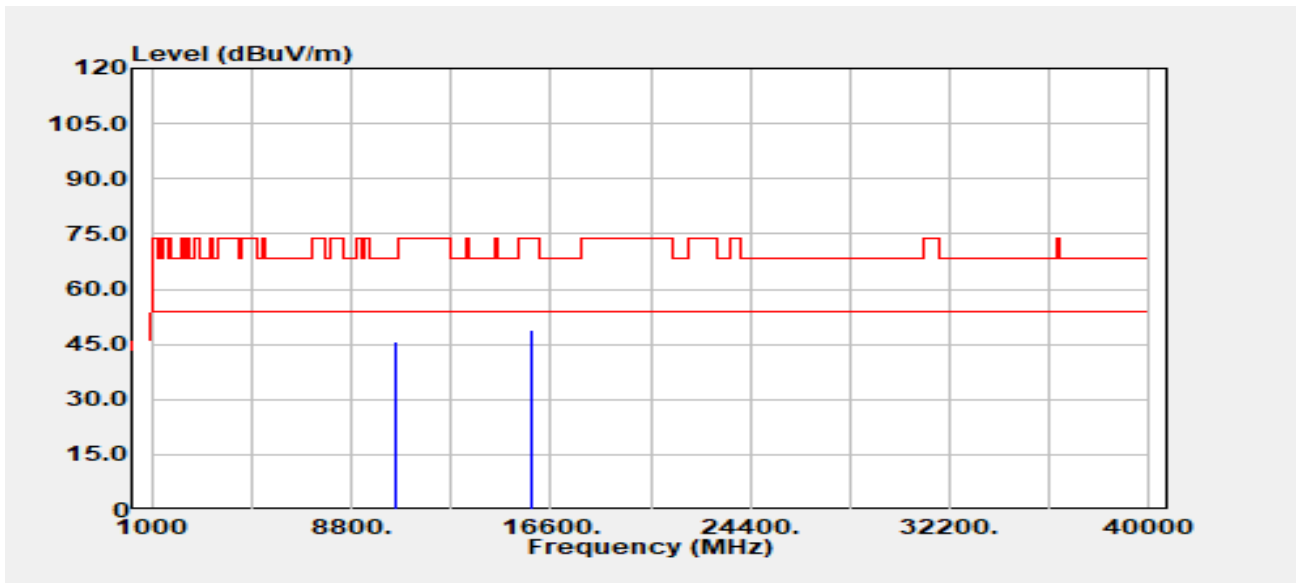


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10580.000 | Peak | 34.12 | 11.48 | 45.60 | 68.20 | -22.60 |
| 15870.000 | Peak | 34.39 | 14.34 | 48.73 | 74.00 | -25.27 |
| 15870.000 | Average | 24.62 | 14.34 | 38.96 | 54.00 | -15.04 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band2
 Frequency :5290 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

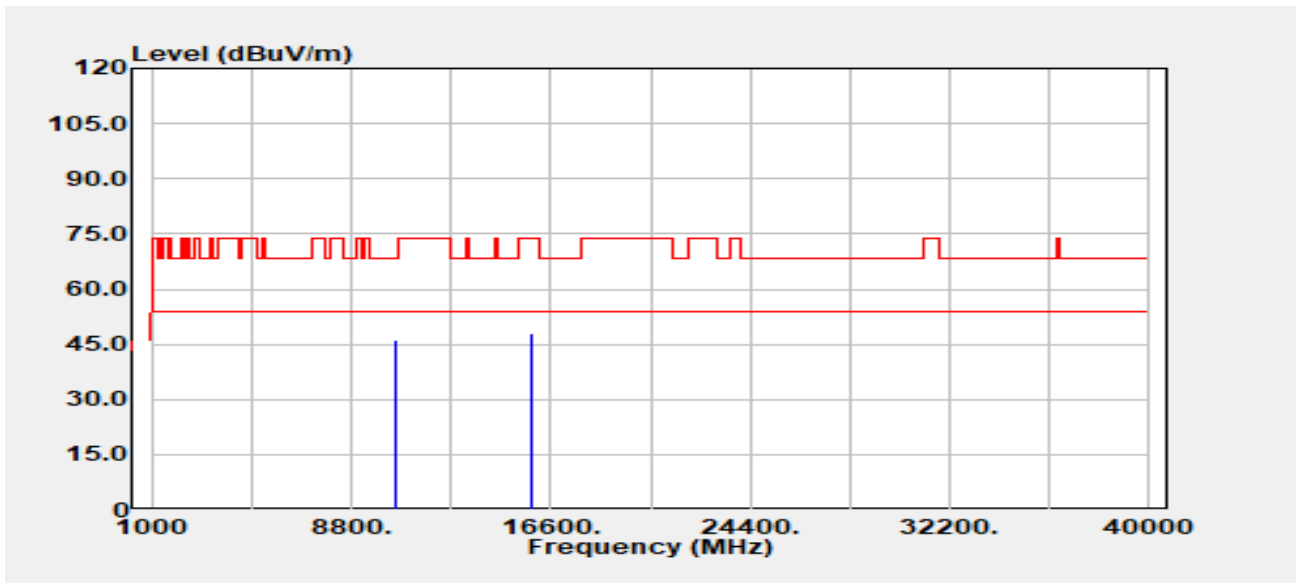


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10580.000 | Peak | 34.85 | 11.48 | 46.33 | 68.20 | -21.87 |
| 15870.000 | Peak | 33.48 | 14.34 | 47.82 | 74.00 | -26.18 |
| 15870.000 | Average | 24.64 | 14.34 | 38.98 | 54.00 | -15.02 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band2_BT EDR | Temp./Humi. | :24.6/58 |
| Frequency | :5290 MHz_2480 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

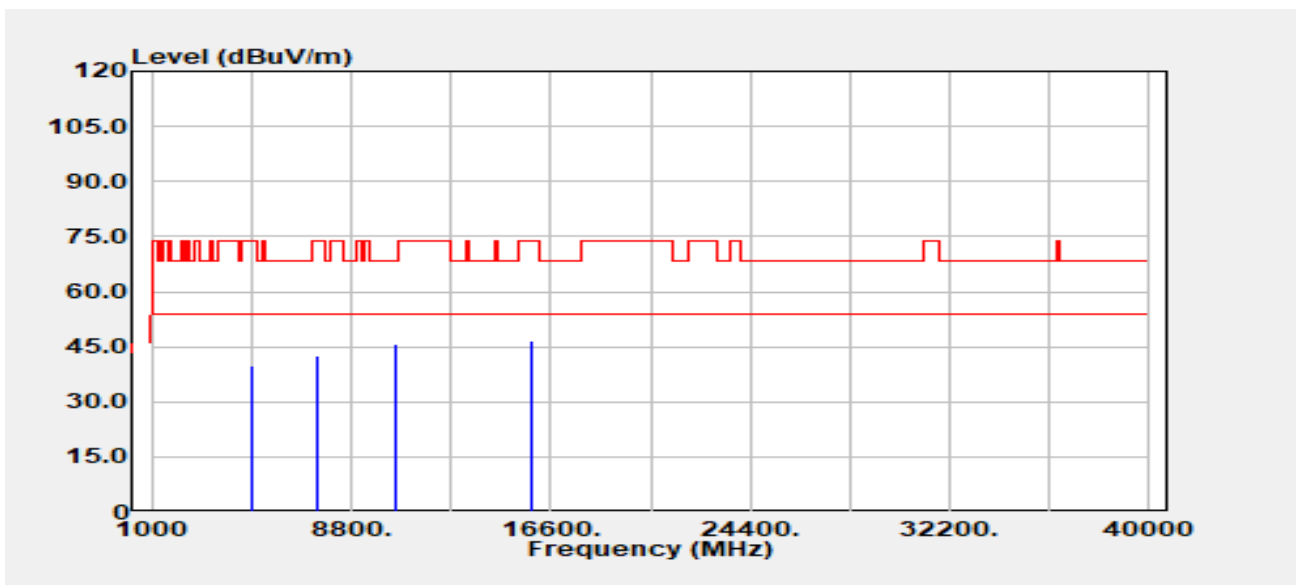


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBUV | Factor dB | Actual FS dBUV/m | Limit dBUV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 4960.000 | Peak | 37.78 | 2.25 | 40.03 | 74.00 | -33.97 |
| 4960.000 | Average | 27.97 | 2.25 | 30.22 | 54.00 | -23.78 |
| 7440.000 | Peak | 34.94 | 7.64 | 42.57 | 74.00 | -31.43 |
| 7440.000 | Average | 24.70 | 7.64 | 32.34 | 54.00 | -21.66 |
| 10580.000 | Peak | 34.09 | 11.48 | 45.57 | 68.20 | -22.63 |
| 15870.000 | Peak | 32.20 | 14.34 | 46.55 | 74.00 | -27.45 |
| 15870.000 | Average | 23.37 | 14.34 | 37.71 | 54.00 | -16.29 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band2_BT EDR | Temp./Humi. | :24.6/58 |
| Frequency | :5290 MHz_2480 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

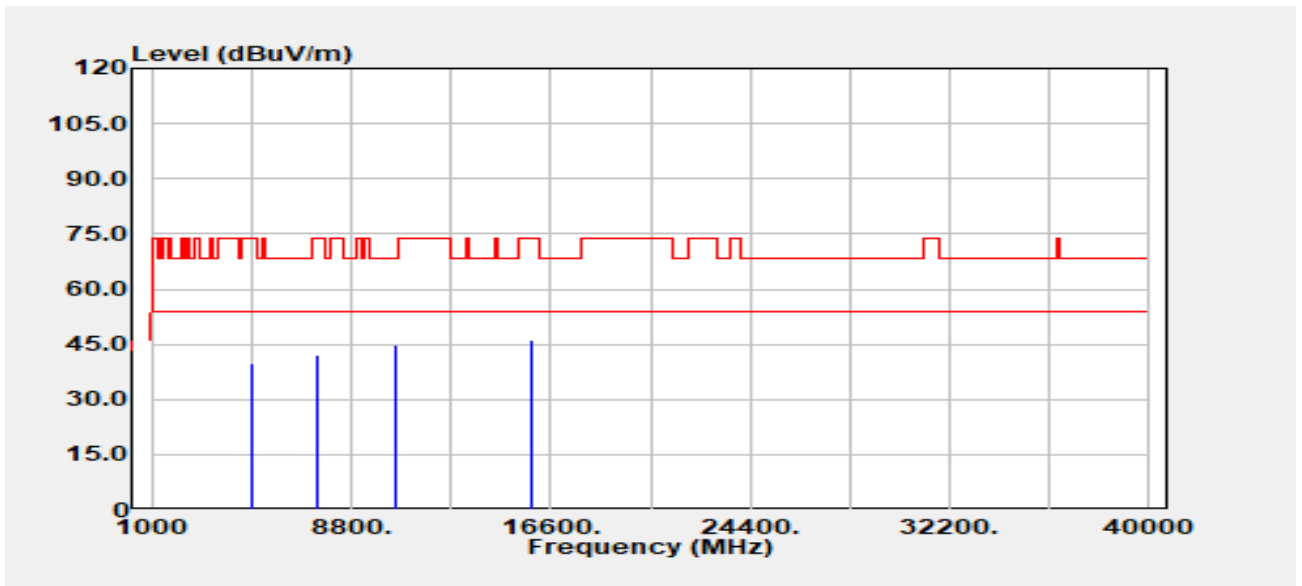


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 4960.000 | Peak | 37.64 | 2.25 | 39.89 | 74.00 | -34.11 |
| 4960.000 | Average | 28.20 | 2.25 | 30.44 | 54.00 | -23.56 |
| 7440.000 | Peak | 34.50 | 7.64 | 42.13 | 74.00 | -31.87 |
| 7440.000 | Average | 24.68 | 7.64 | 32.32 | 54.00 | -21.68 |
| 10580.000 | Peak | 33.36 | 11.48 | 44.84 | 68.20 | -23.36 |
| 15870.000 | Peak | 32.06 | 14.34 | 46.40 | 74.00 | -27.60 |
| 15870.000 | Average | 23.11 | 14.34 | 37.45 | 54.00 | -16.55 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band3
 Frequency :5500 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

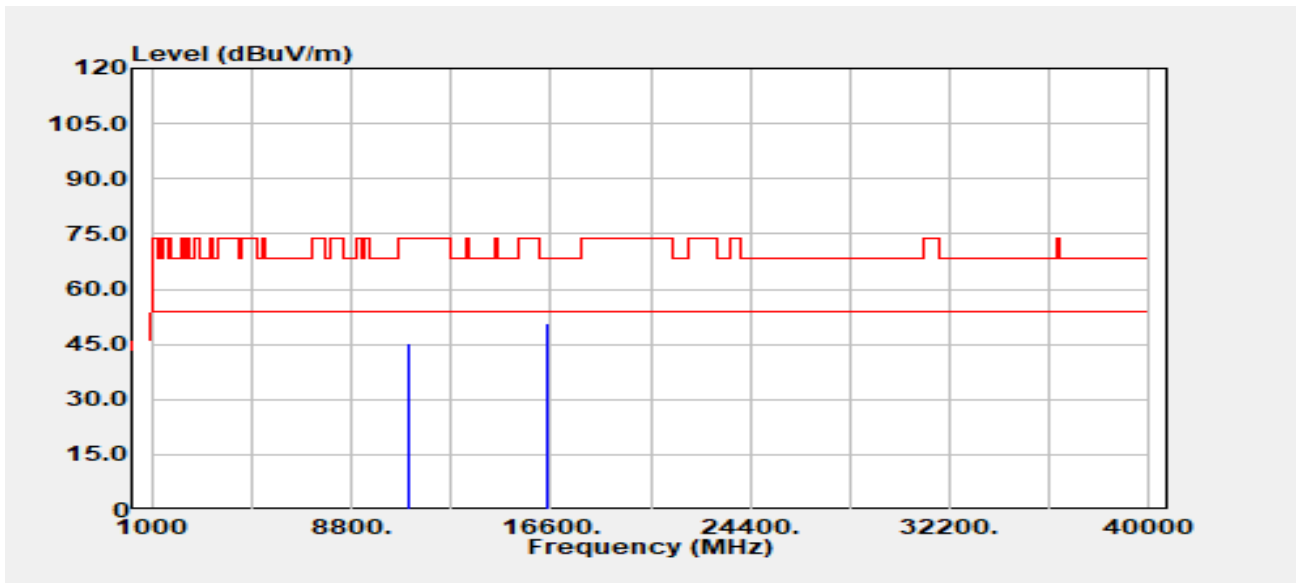


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11000.000 | Peak | 32.64 | 12.42 | 45.06 | 74.00 | -28.94 |
| 11000.000 | Average | 23.61 | 12.42 | 36.03 | 54.00 | -17.97 |
| 16500.000 | Peak | 31.80 | 18.70 | 50.50 | 68.20 | -17.70 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band3
 Frequency :5500 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :


Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

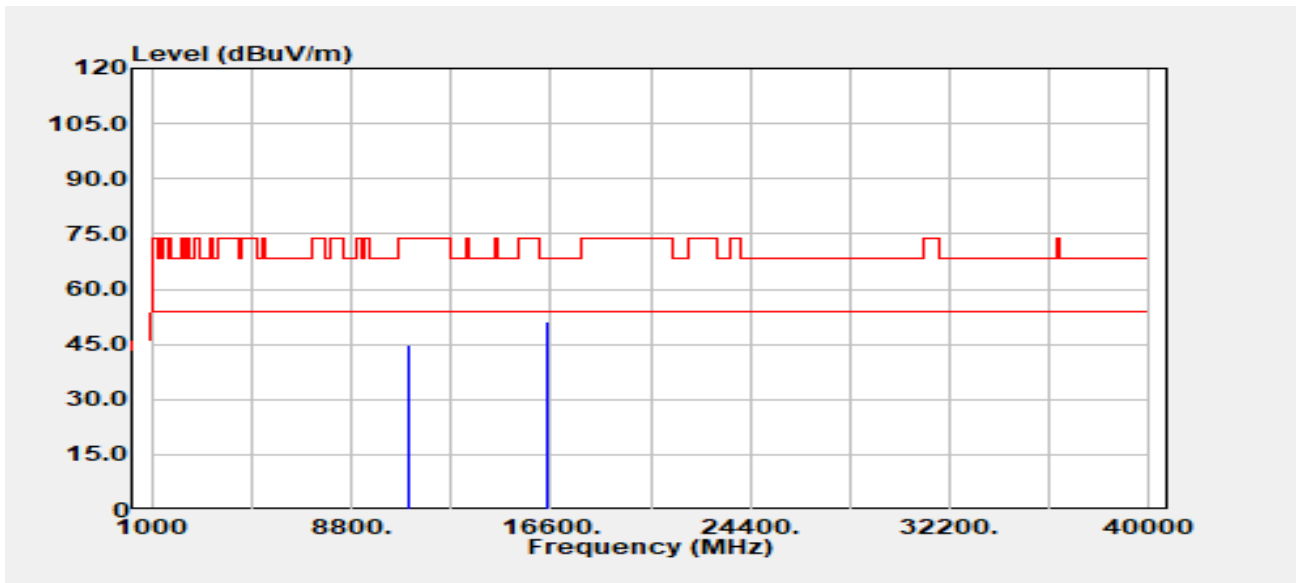

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11000.000 | Peak | 32.38 | 12.42 | 44.80 | 74.00 | -29.20 |
| 11000.000 | Average | 23.51 | 12.42 | 35.93 | 54.00 | -18.07 |
| 16500.000 | Peak | 32.50 | 18.70 | 51.20 | 68.20 | -17.00 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :24.6/58 |
| Frequency | :5580 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

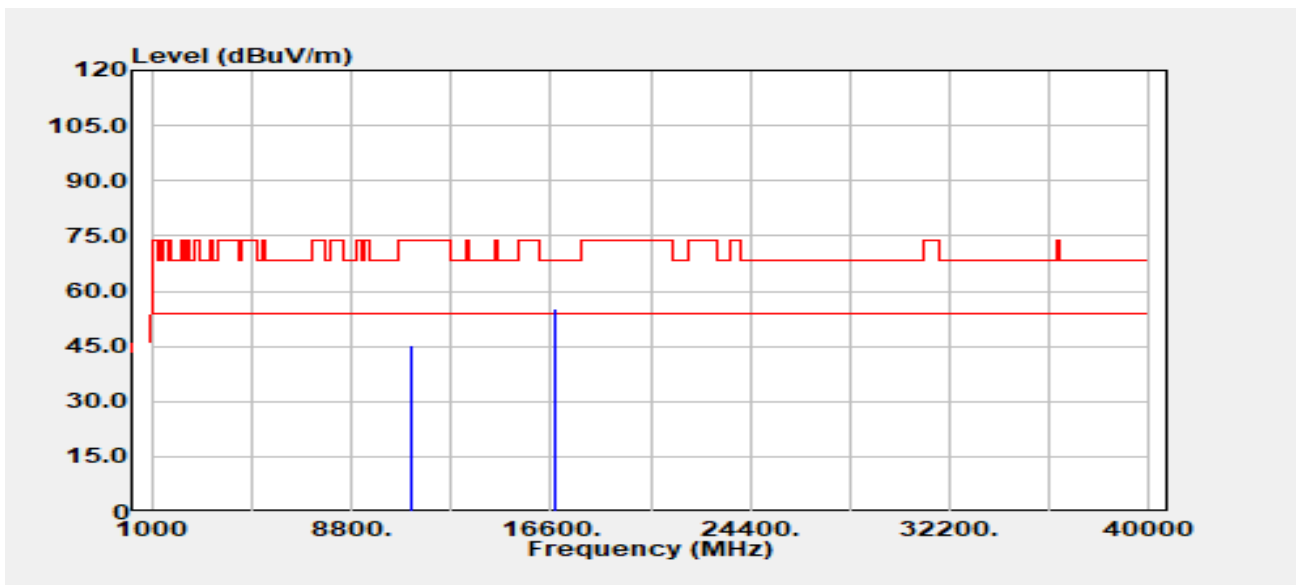


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11160.000 | Peak | 32.93 | 12.48 | 45.41 | 74.00 | -28.59 |
| 11160.000 | Average | 23.76 | 12.48 | 36.24 | 54.00 | -17.76 |
| 16740.000 | Peak | 34.24 | 20.88 | 55.12 | 68.20 | -13.08 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band3
 Frequency :5580 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

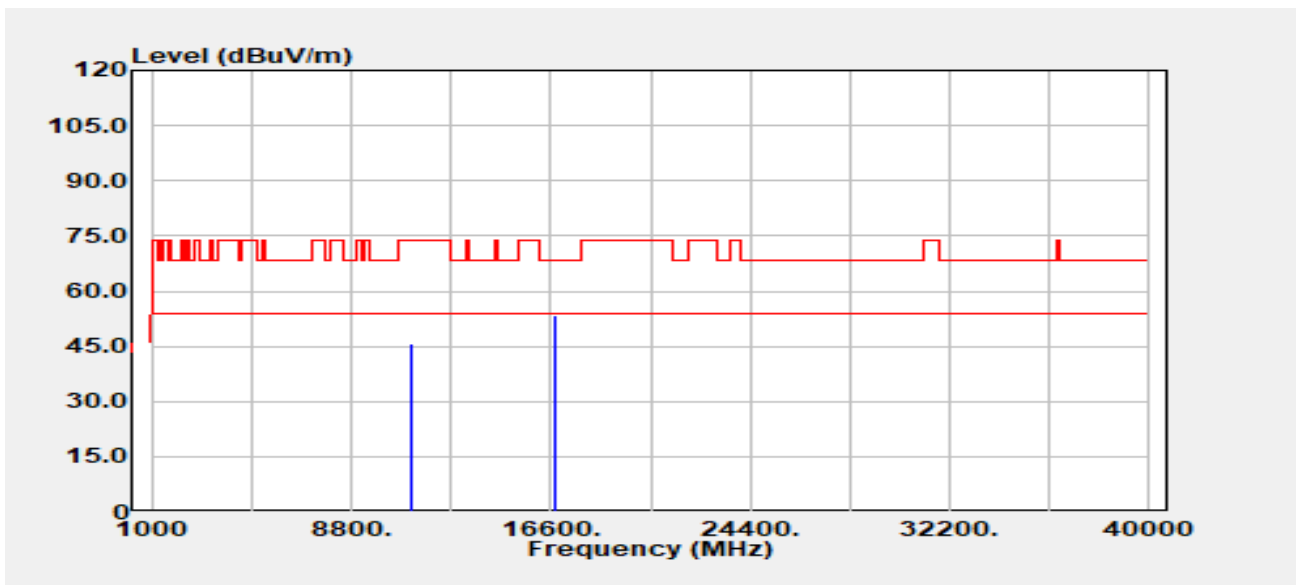


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11160.000 | Peak | 33.07 | 12.48 | 45.54 | 74.00 | -28.46 |
| 11160.000 | Average | 23.62 | 12.48 | 36.10 | 54.00 | -17.90 |
| 16740.000 | Peak | 32.74 | 20.88 | 53.62 | 68.20 | -14.58 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :24.6/58 |
| Frequency | :5700 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

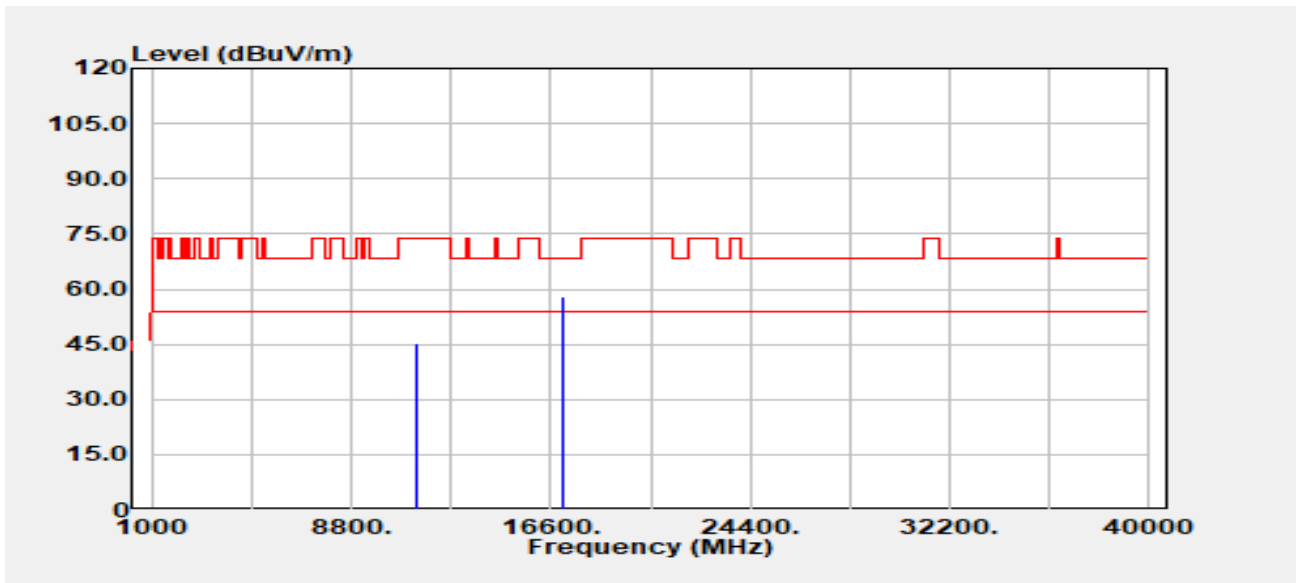


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11400.000 | Peak | 32.77 | 12.39 | 45.16 | 74.00 | -28.84 |
| 11400.000 | Average | 23.52 | 12.39 | 35.91 | 54.00 | -18.09 |
| 17100.000 | Peak | 32.29 | 25.62 | 57.91 | 68.20 | -10.29 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :24.6/58 |
| Frequency | :5700 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

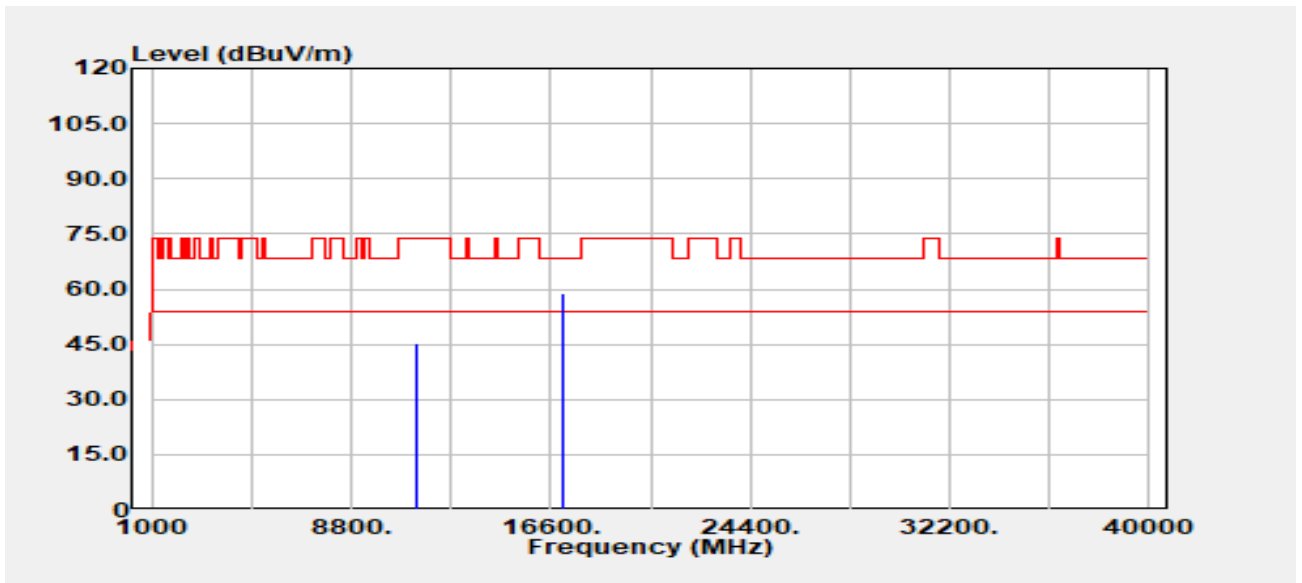


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11400.000 | Peak | 32.99 | 12.39 | 45.38 | 74.00 | -28.62 |
| 11400.000 | Average | 23.41 | 12.39 | 35.80 | 54.00 | -18.20 |
| 17100.000 | Peak | 33.16 | 25.62 | 58.78 | 68.20 | -9.42 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5500 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

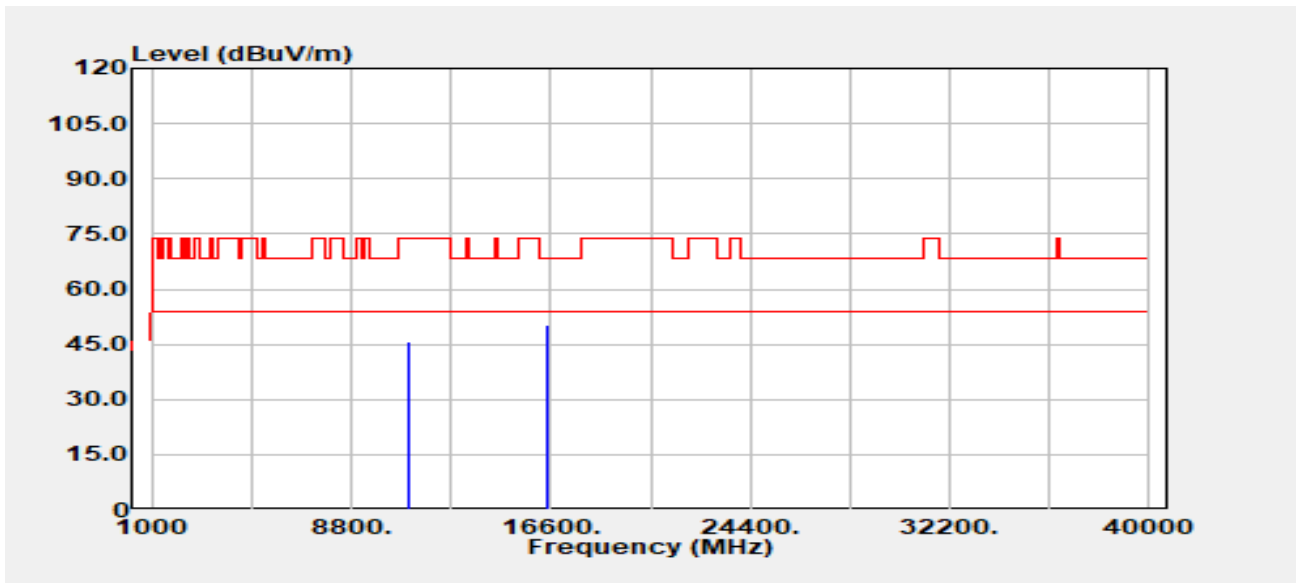


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11000.000 | Peak | 33.41 | 12.42 | 45.83 | 74.00 | -28.17 |
| 11000.000 | Average | 23.47 | 12.42 | 35.89 | 54.00 | -18.11 |
| 16500.000 | Peak | 31.66 | 18.70 | 50.36 | 68.20 | -17.84 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5500 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

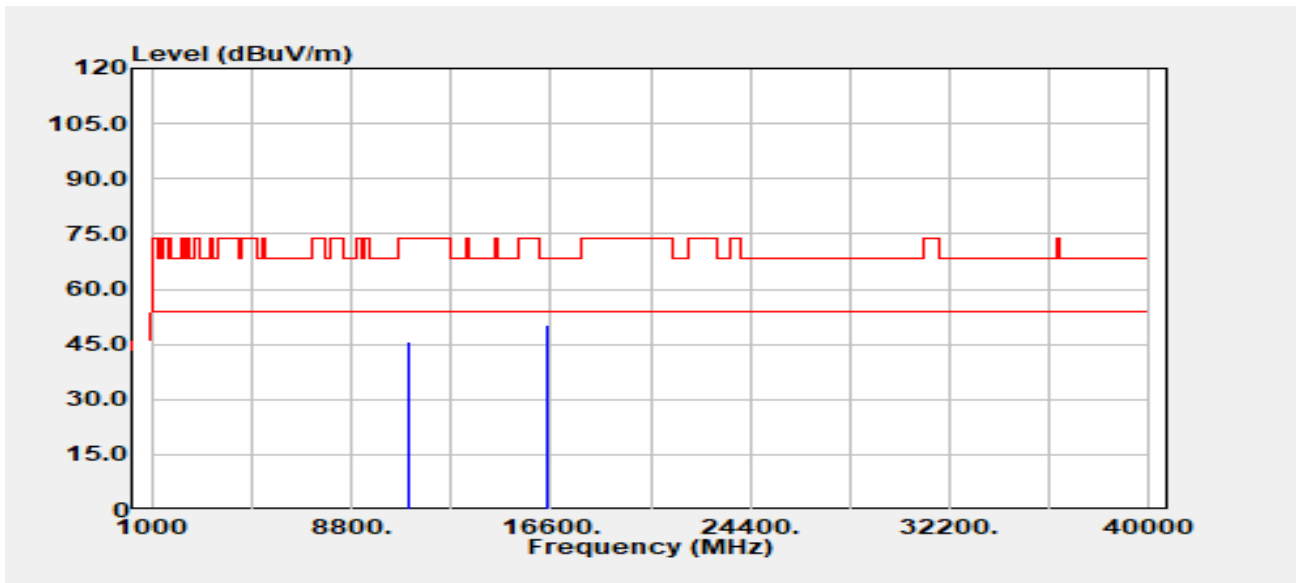


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11000.000 | Peak | 33.33 | 12.42 | 45.75 | 74.00 | -28.25 |
| 11000.000 | Average | 23.43 | 12.42 | 35.85 | 54.00 | -18.15 |
| 16500.000 | Peak | 31.51 | 18.70 | 50.21 | 68.20 | -17.99 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5580 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

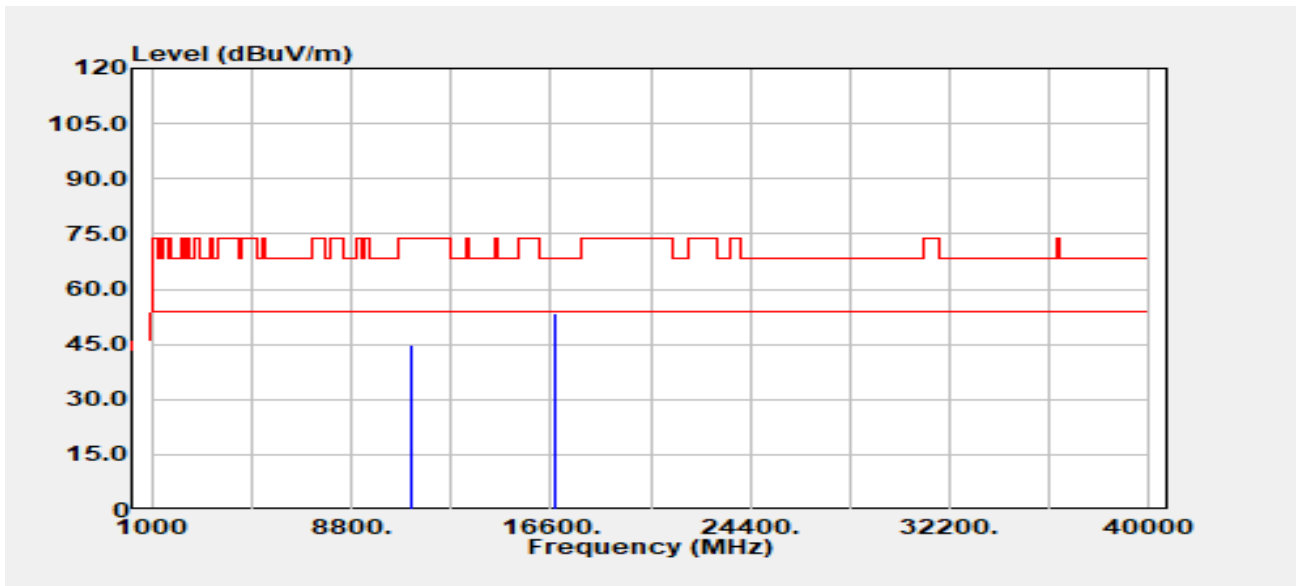


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11160.000 | Peak | 32.54 | 12.48 | 45.02 | 74.00 | -28.98 |
| 11160.000 | Average | 23.76 | 12.48 | 36.24 | 54.00 | -17.76 |
| 16740.000 | Peak | 32.61 | 20.88 | 53.49 | 68.20 | -14.71 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5580 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

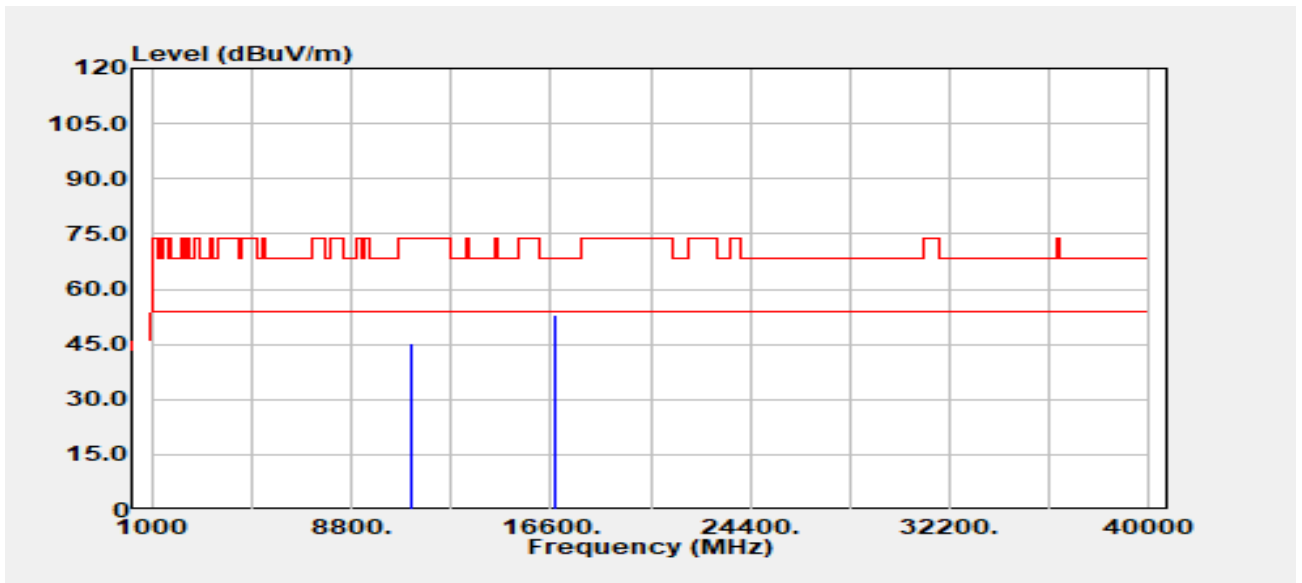


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11160.000 | Peak | 32.91 | 12.48 | 45.39 | 74.00 | -28.61 |
| 11160.000 | Average | 23.46 | 12.48 | 35.93 | 54.00 | -18.07 |
| 16740.000 | Peak | 31.92 | 20.88 | 52.80 | 68.20 | -15.40 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5700 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

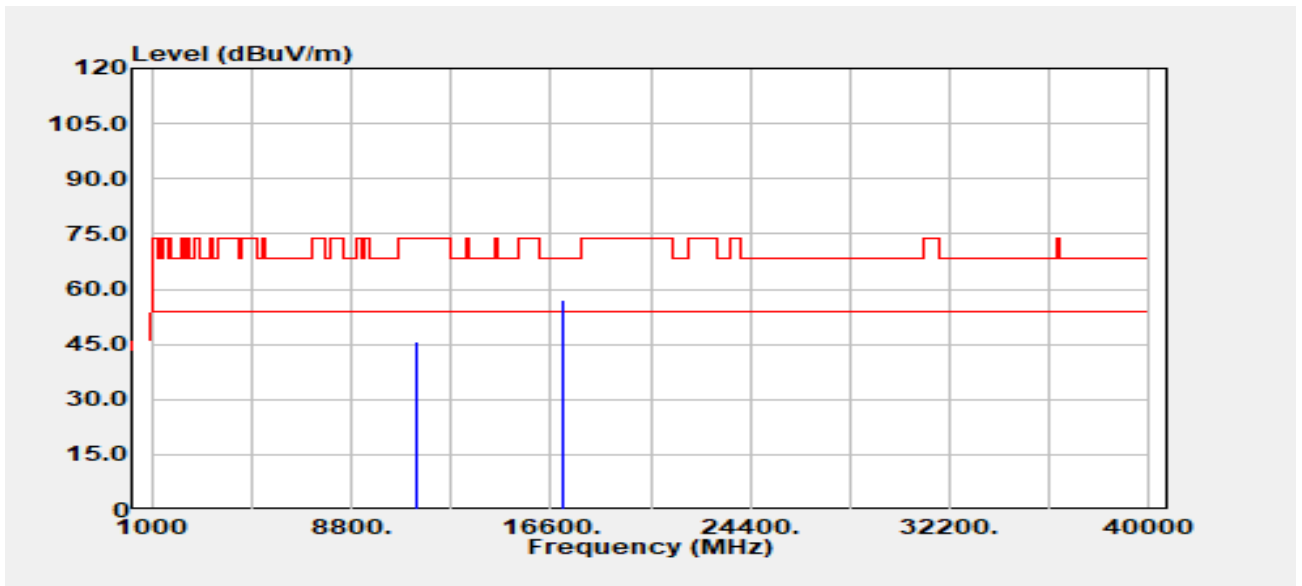


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11400.000 | Peak | 33.30 | 12.39 | 45.69 | 74.00 | -28.31 |
| 11400.000 | Average | 23.34 | 12.39 | 35.73 | 54.00 | -18.27 |
| 17100.000 | Peak | 31.30 | 25.62 | 56.92 | 68.20 | -11.28 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5700 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

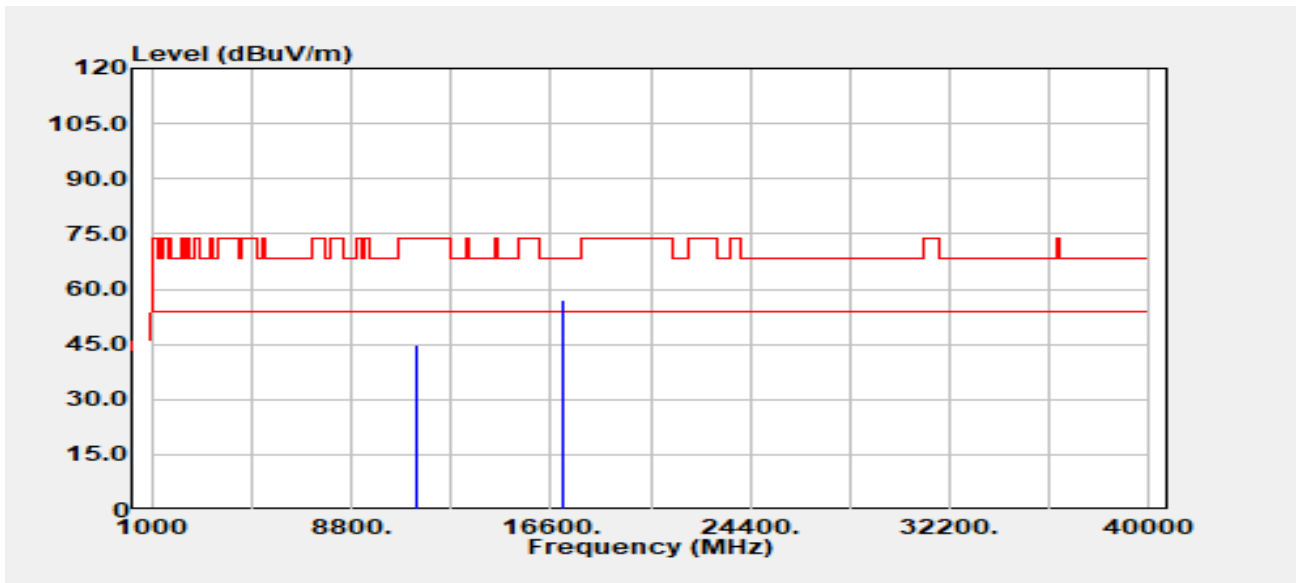


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11400.000 | Peak | 32.62 | 12.39 | 45.01 | 74.00 | -28.99 |
| 11400.000 | Average | 23.49 | 12.39 | 35.88 | 54.00 | -18.12 |
| 17100.000 | Peak | 31.27 | 25.62 | 56.89 | 68.20 | -11.31 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5510 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

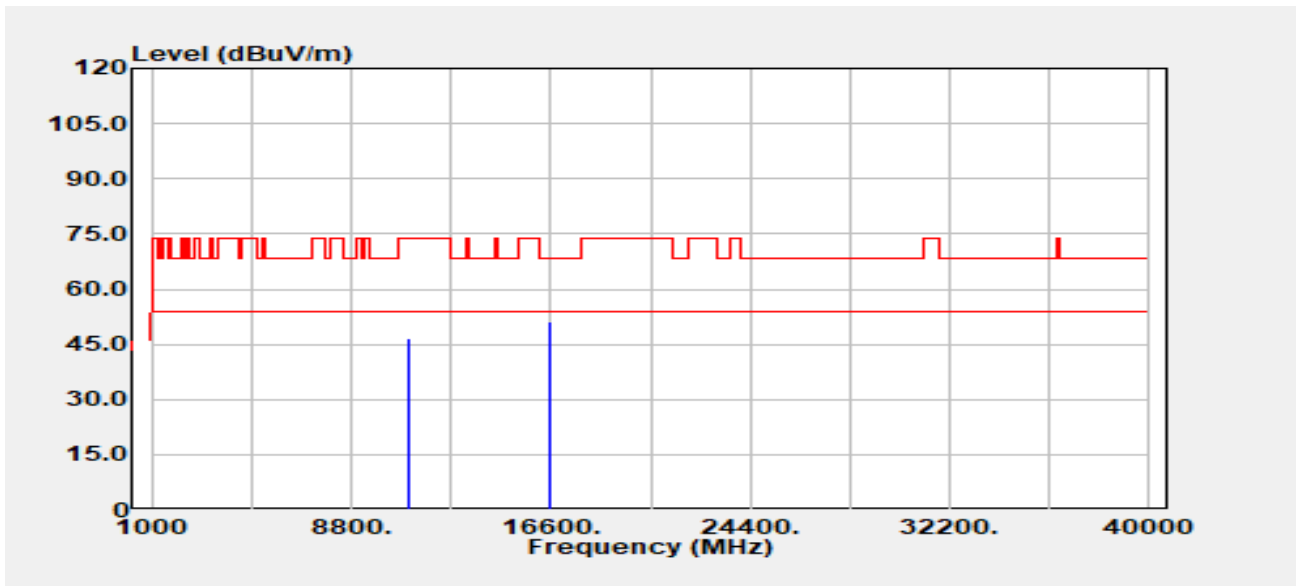


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11020.000 | Peak | 34.07 | 12.39 | 46.46 | 74.00 | -27.54 |
| 11020.000 | Average | 25.01 | 12.39 | 37.40 | 54.00 | -16.60 |
| 16530.000 | Peak | 32.62 | 18.66 | 51.28 | 68.20 | -16.92 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5510 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

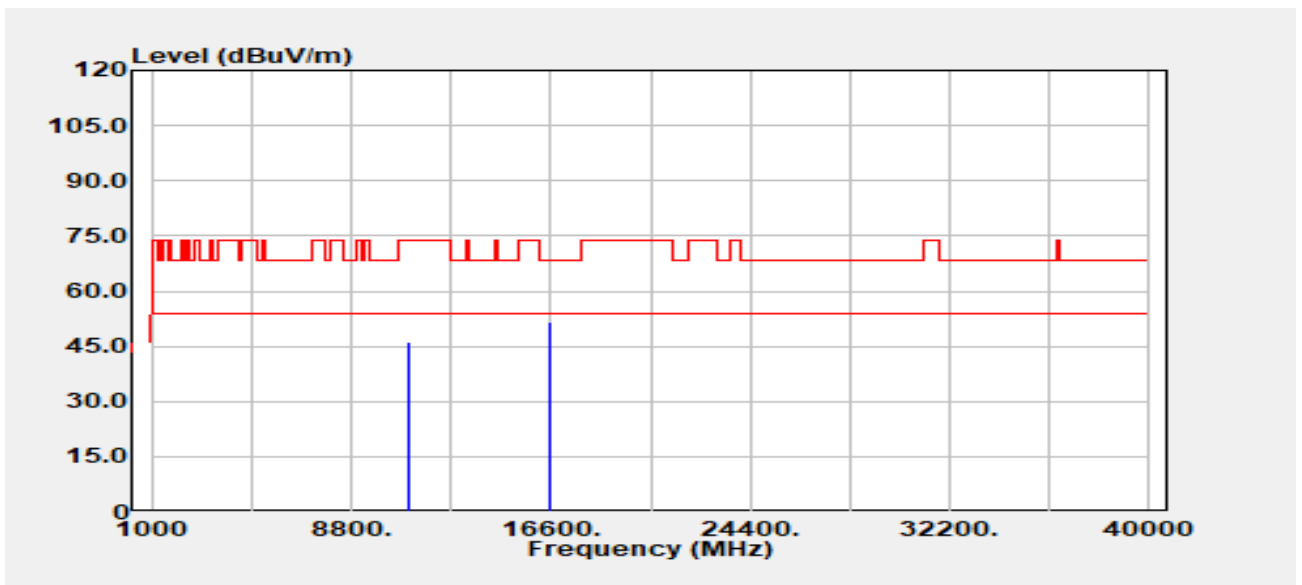


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11020.000 | Peak | 33.92 | 12.39 | 46.31 | 74.00 | -27.69 |
| 11020.000 | Average | 24.94 | 12.39 | 37.33 | 54.00 | -16.67 |
| 16530.000 | Peak | 32.89 | 18.66 | 51.55 | 68.20 | -16.65 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11n40/Band3 | Temp./Humi. | :24.6/57 |
| Frequency | :5550 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

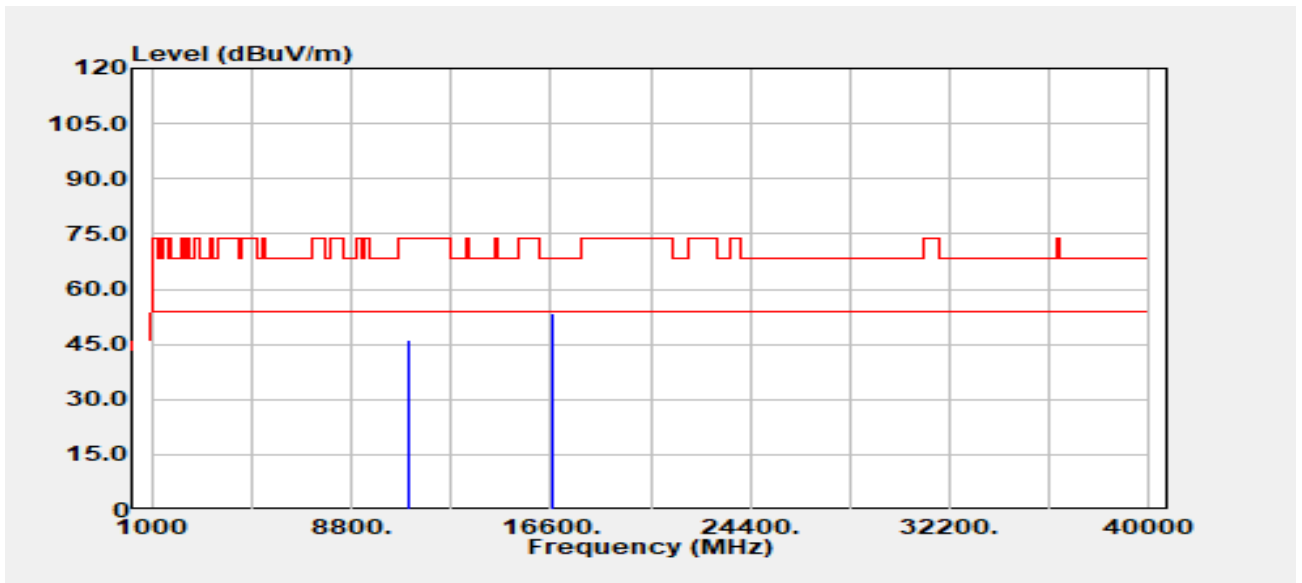


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11100.000 | Peak | 33.81 | 12.60 | 46.41 | 74.00 | -27.59 |
| 11100.000 | Average | 24.16 | 12.60 | 36.76 | 54.00 | -17.24 |
| 16650.000 | Peak | 33.35 | 19.99 | 53.34 | 68.20 | -14.86 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5550 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

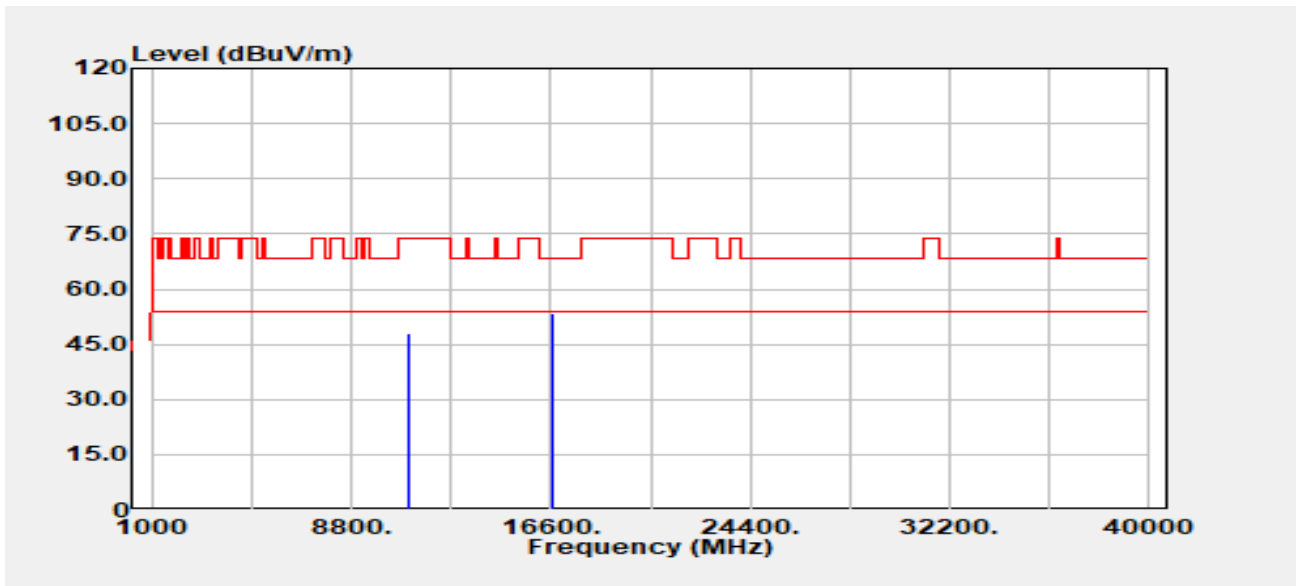


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11100.000 | Peak | 35.23 | 12.60 | 47.83 | 74.00 | -26.17 |
| 11100.000 | Average | 24.83 | 12.60 | 37.43 | 54.00 | -16.57 |
| 16650.000 | Peak | 33.61 | 19.99 | 53.59 | 68.20 | -14.61 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5670 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

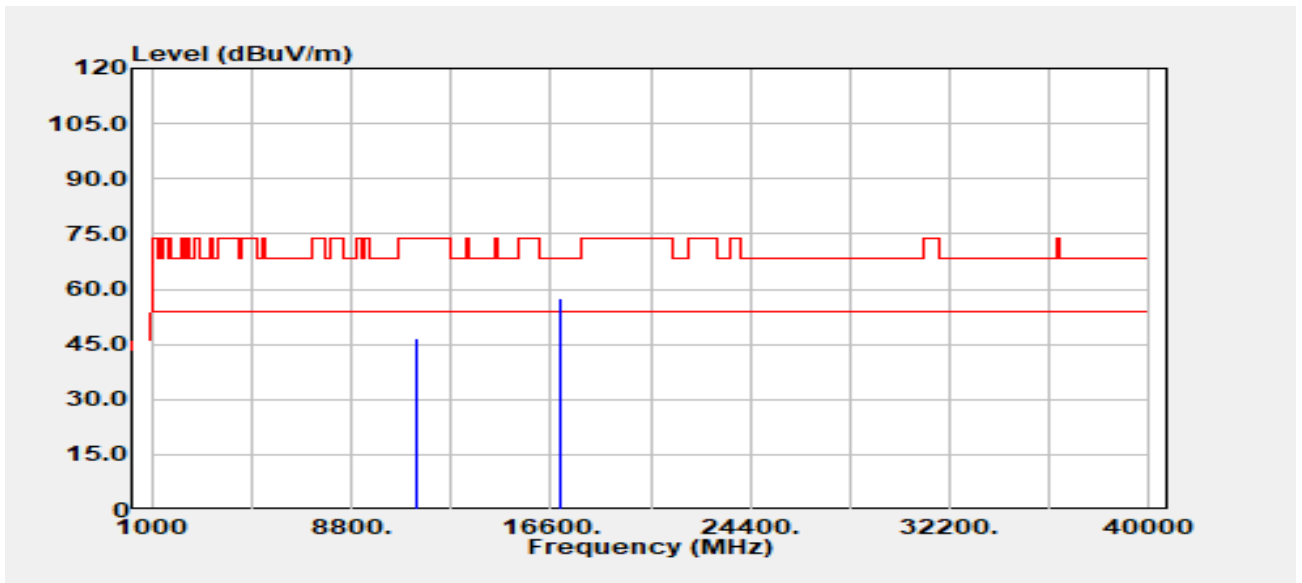


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11340.000 | Peak | 34.01 | 12.55 | 46.57 | 74.00 | -27.43 |
| 11340.000 | Average | 24.21 | 12.55 | 36.76 | 54.00 | -17.24 |
| 17010.000 | Peak | 32.33 | 25.32 | 57.64 | 68.20 | -10.56 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5670 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

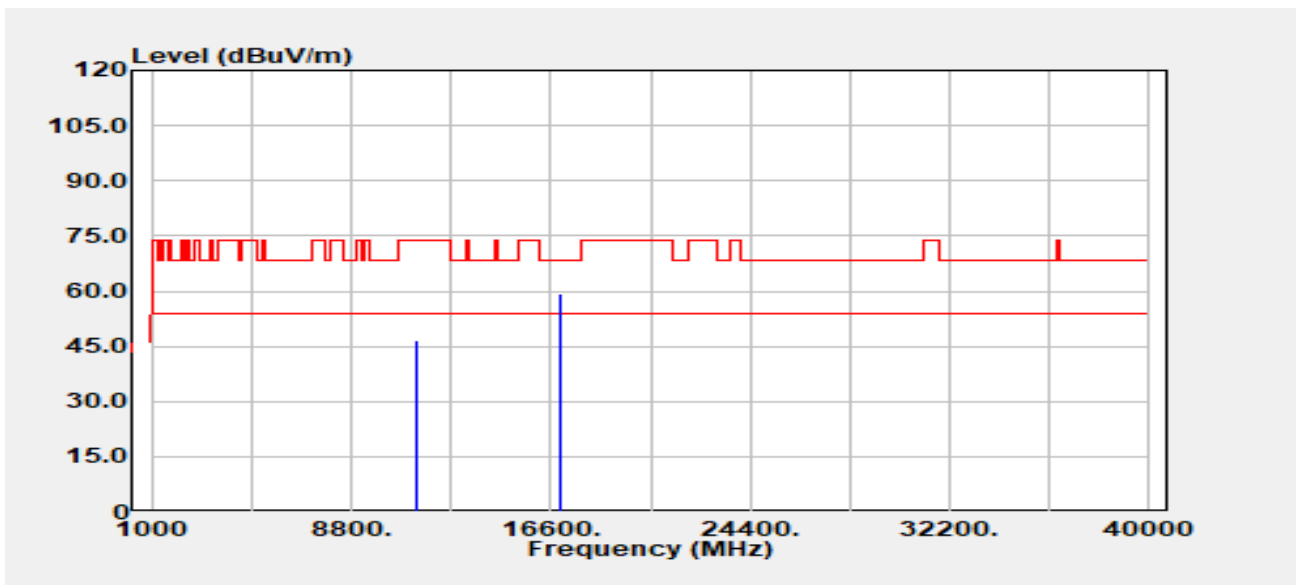


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11340.000 | Peak | 34.22 | 12.55 | 46.77 | 74.00 | -27.23 |
| 11340.000 | Average | 24.62 | 12.55 | 37.17 | 54.00 | -16.83 |
| 17010.000 | Peak | 33.95 | 25.32 | 59.27 | 68.20 | -8.93 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11ac80/Band3 | Temp./Humi. | :24.6/57 |
| Frequency | :5530 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

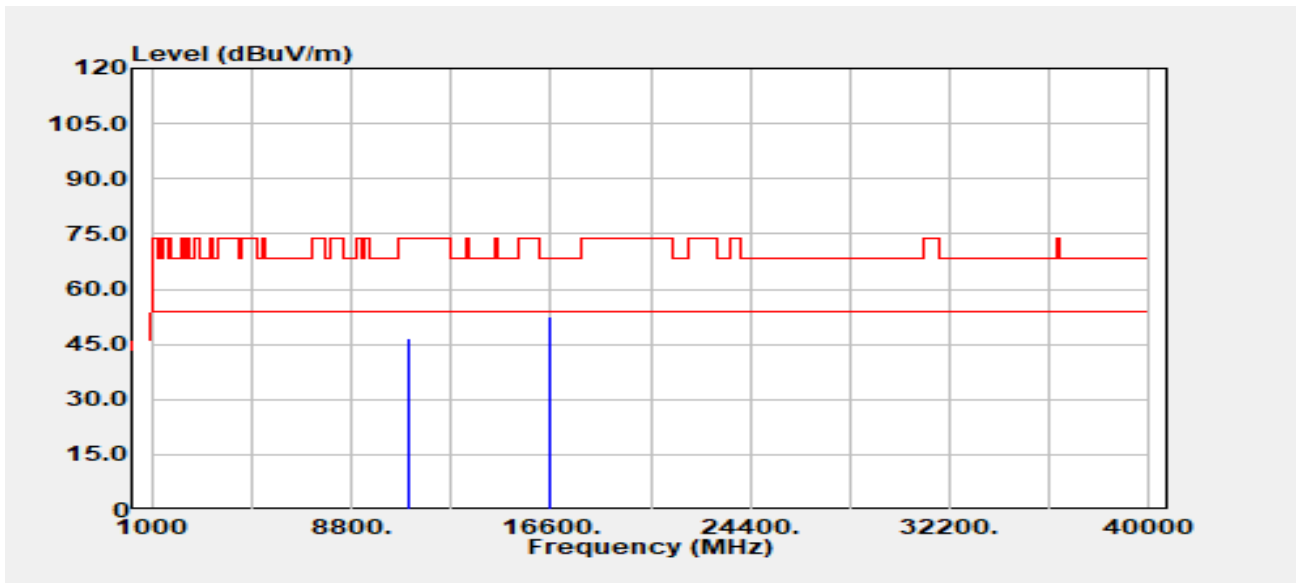


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11060.000 | Peak | 34.21 | 12.40 | 46.60 | 74.00 | -27.40 |
| 11060.000 | Average | 24.93 | 12.40 | 37.33 | 54.00 | -16.67 |
| 16590.000 | Peak | 33.48 | 19.22 | 52.70 | 68.20 | -15.50 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band3
 Frequency :5530 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

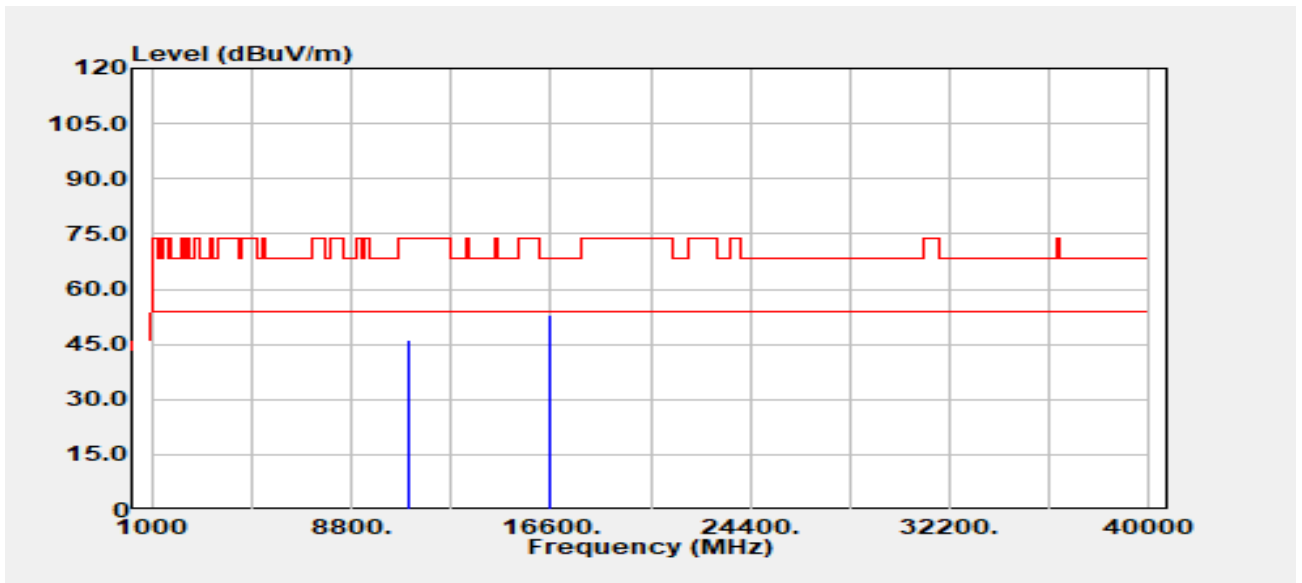


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11060.000 | Peak | 33.92 | 12.40 | 46.31 | 74.00 | -27.69 |
| 11060.000 | Average | 25.02 | 12.40 | 37.42 | 54.00 | -16.58 |
| 16590.000 | Peak | 33.94 | 19.22 | 53.16 | 68.20 | -15.04 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band3
 Frequency :5610 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

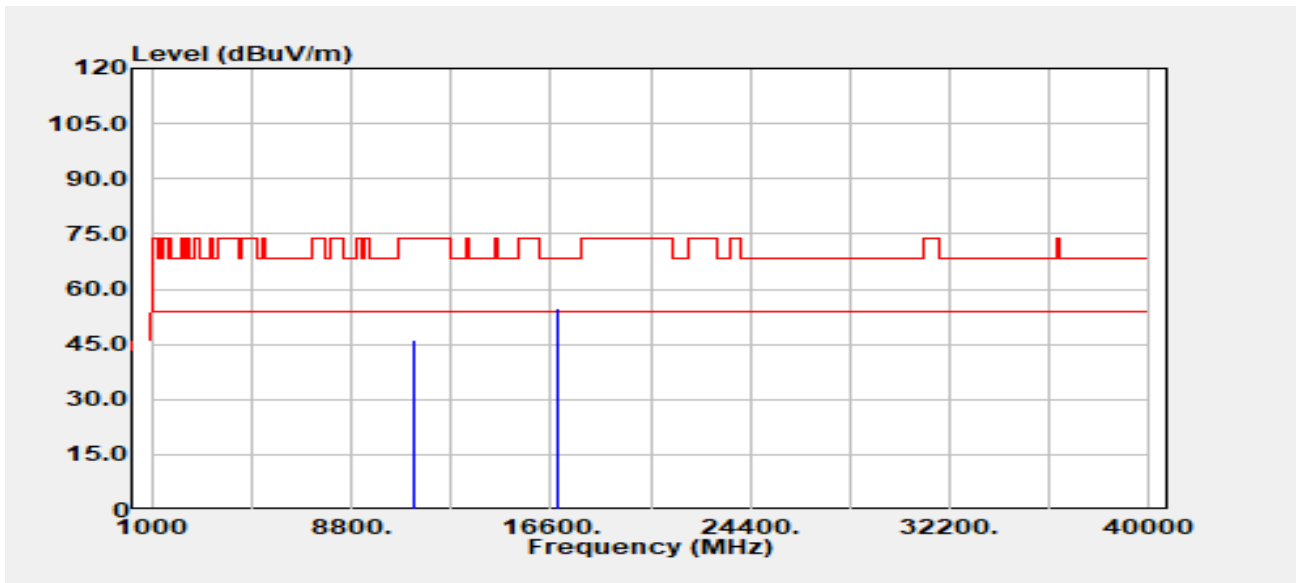


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11220.000 | Peak | 33.66 | 12.60 | 46.27 | 74.00 | -27.73 |
| 11220.000 | Average | 24.87 | 12.60 | 37.47 | 54.00 | -16.53 |
| 16830.000 | Peak | 32.64 | 22.01 | 54.65 | 68.20 | -13.55 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band3
 Frequency :5610 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

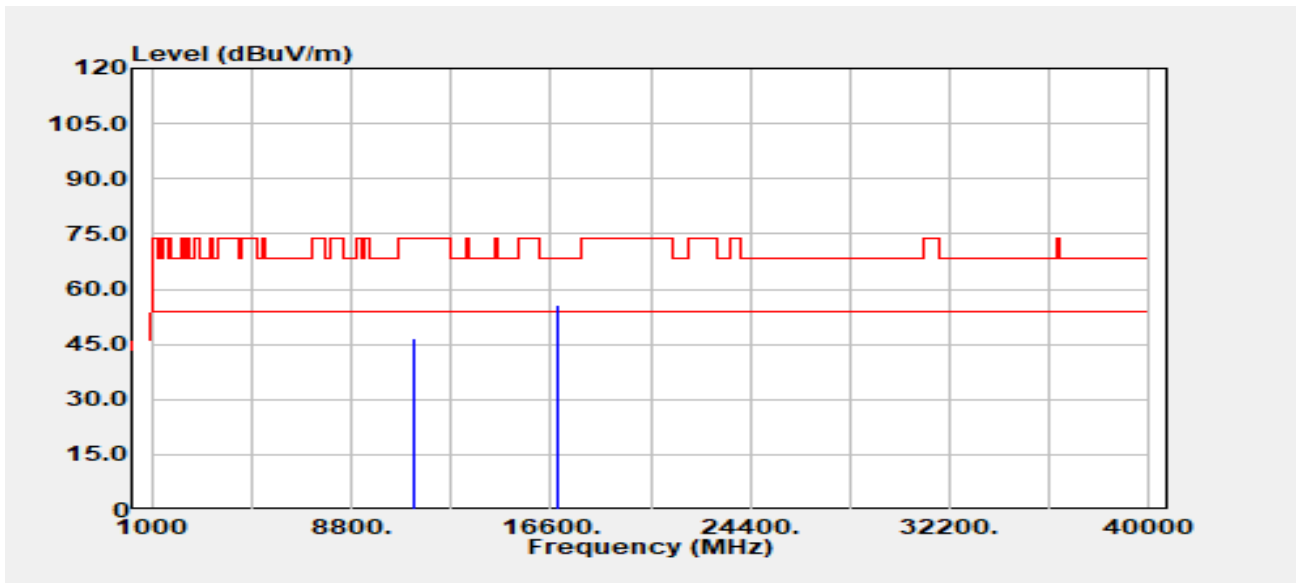


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11220.000 | Peak | 34.21 | 12.60 | 46.81 | 74.00 | -27.19 |
| 11220.000 | Average | 25.01 | 12.60 | 37.61 | 54.00 | -16.39 |
| 16830.000 | Peak | 33.60 | 22.01 | 55.60 | 68.20 | -12.60 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band3~4
 Frequency :5720 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

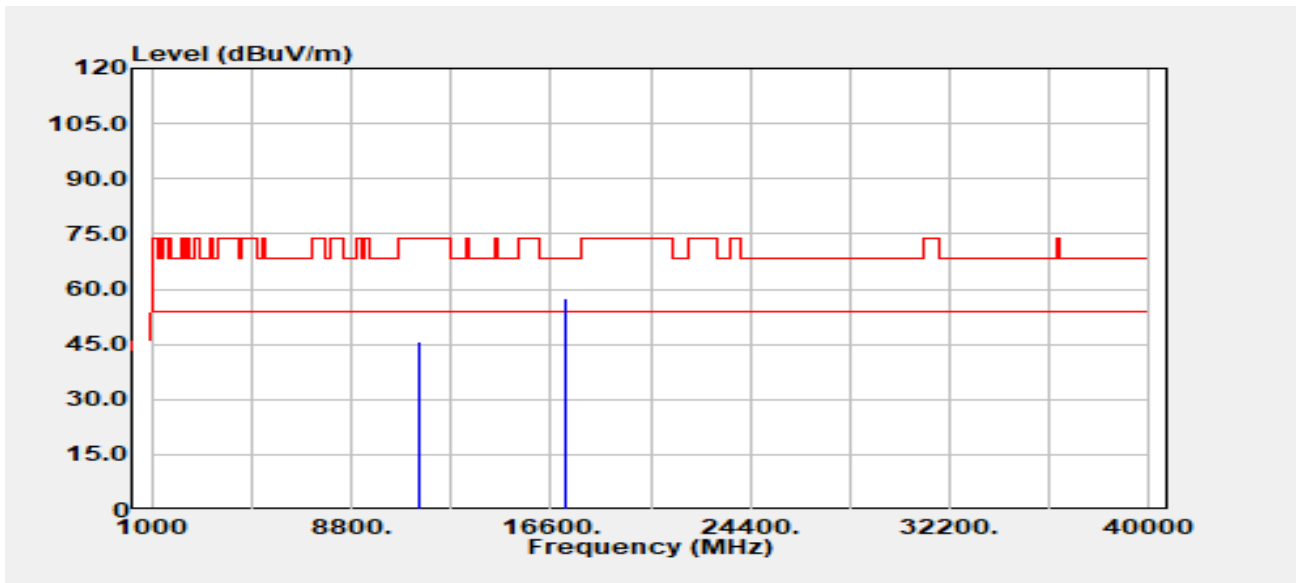


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11440.000 | Peak | 33.40 | 12.33 | 45.72 | 74.00 | -28.28 |
| 11440.000 | Average | 23.46 | 12.33 | 35.78 | 54.00 | -18.22 |
| 17160.000 | Peak | 31.27 | 26.20 | 57.46 | 68.20 | -10.74 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band3~4
 Frequency :5720 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

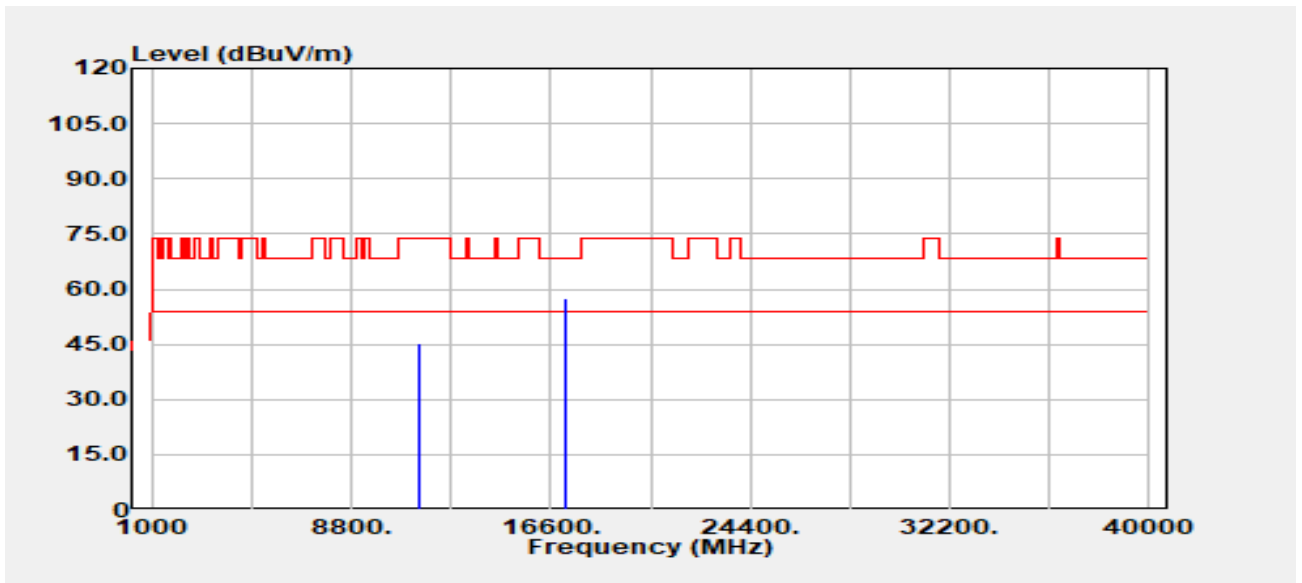


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11440.000 | Peak | 32.98 | 12.33 | 45.31 | 74.00 | -28.69 |
| 11440.000 | Average | 23.34 | 12.33 | 35.67 | 54.00 | -18.33 |
| 17160.000 | Peak | 31.47 | 26.20 | 57.67 | 68.20 | -10.53 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|--------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11n20/Band3~4 | Temp./Humi. | :24.6/58 |
| Frequency | :5720 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

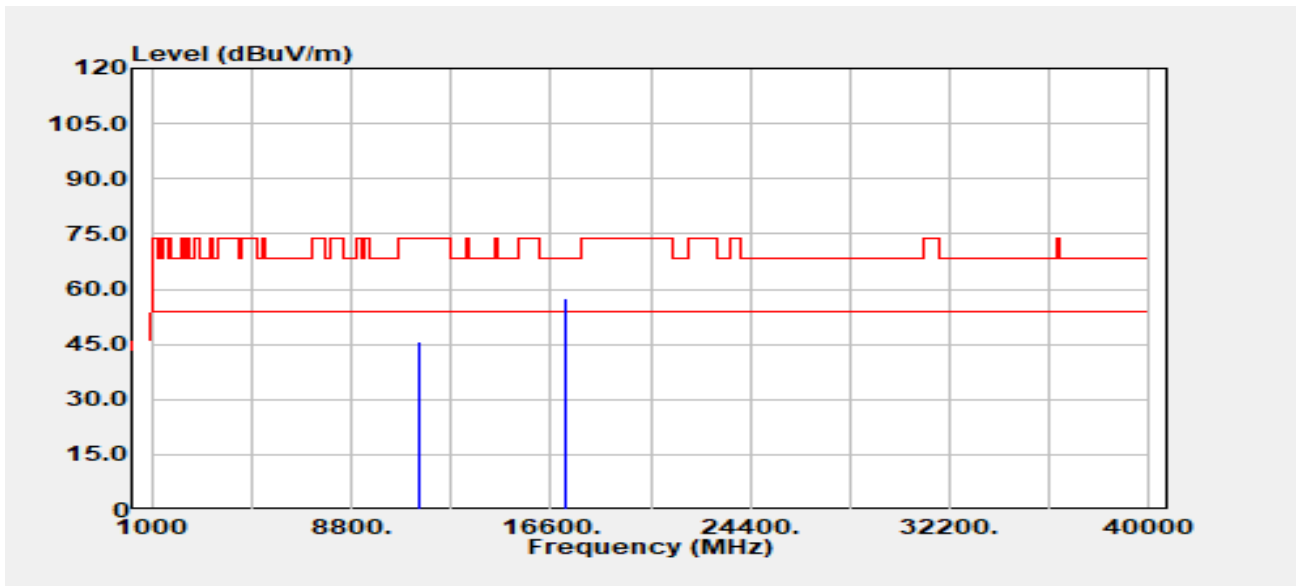


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11440.000 | Peak | 33.32 | 12.33 | 45.64 | 74.00 | -28.36 |
| 11440.000 | Average | 23.46 | 12.33 | 35.79 | 54.00 | -18.21 |
| 17160.000 | Peak | 31.34 | 26.20 | 57.53 | 68.20 | -10.67 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|--------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11n20/Band3~4 | Temp./Humi. | :24.6/58 |
| Frequency | :5720 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

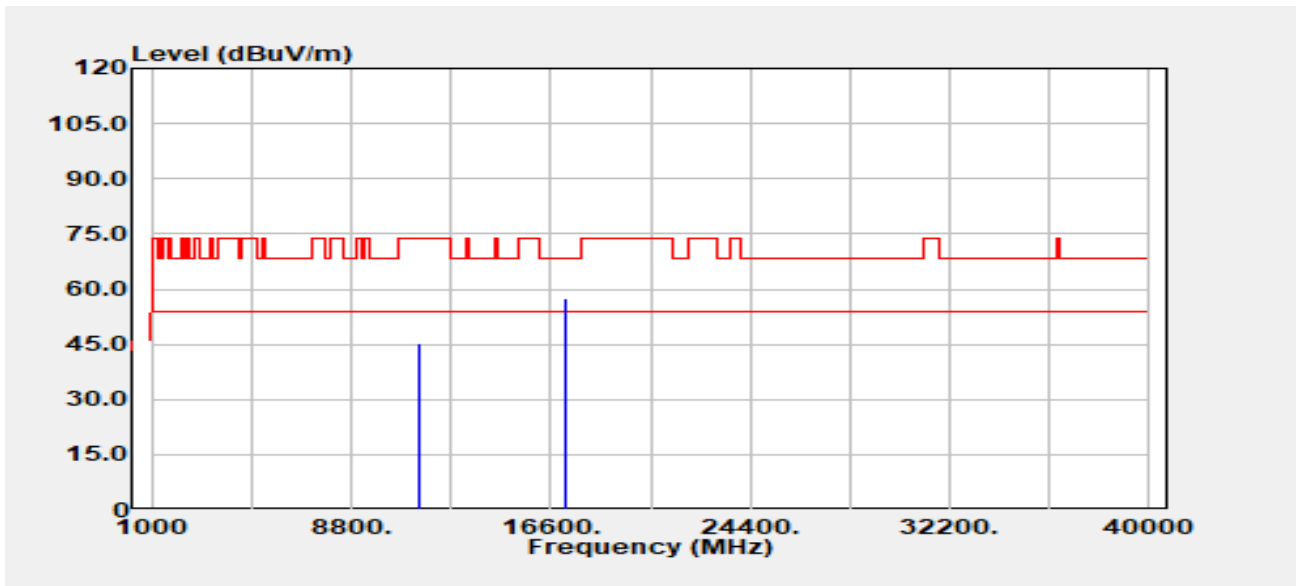


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11440.000 | Peak | 33.06 | 12.33 | 45.38 | 74.00 | -28.62 |
| 11440.000 | Average | 23.41 | 12.33 | 35.73 | 54.00 | -18.27 |
| 17160.000 | Peak | 31.31 | 26.20 | 57.51 | 68.20 | -10.69 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|--------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11n40/Band3~4 | Temp./Humi. | :24.6/57 |
| Frequency | :5710 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

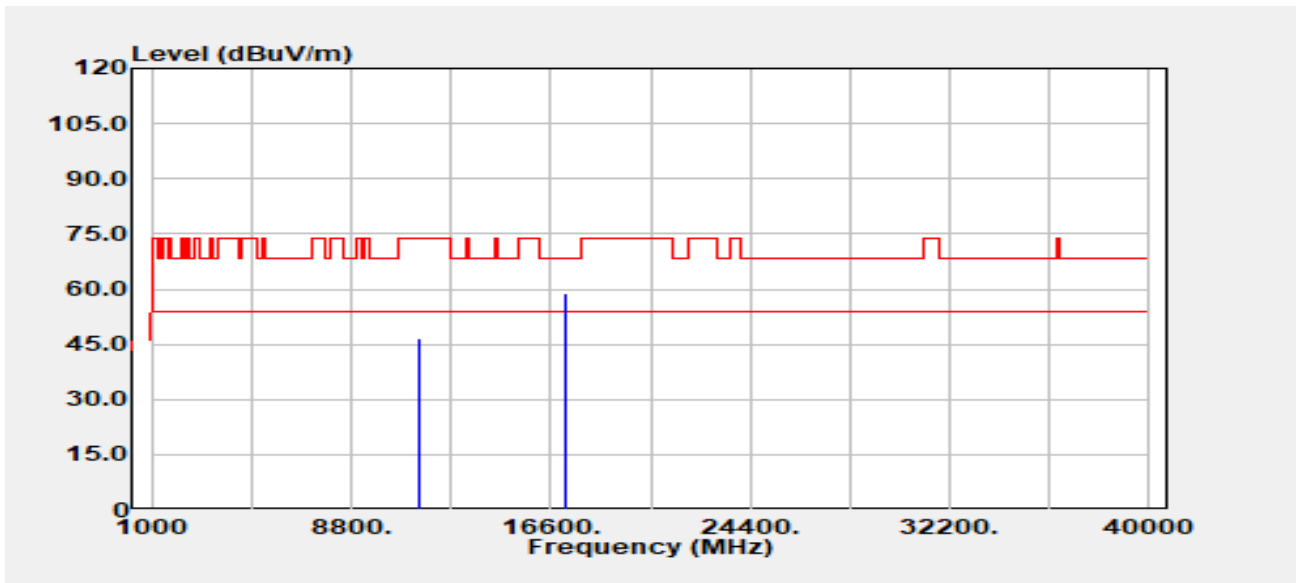


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11420.000 | Peak | 34.22 | 12.36 | 46.58 | 74.00 | -27.42 |
| 11420.000 | Average | 24.61 | 12.36 | 36.97 | 54.00 | -17.03 |
| 17130.000 | Peak | 33.03 | 26.00 | 59.03 | 68.20 | -9.17 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3~4
 Frequency :5710 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :


Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

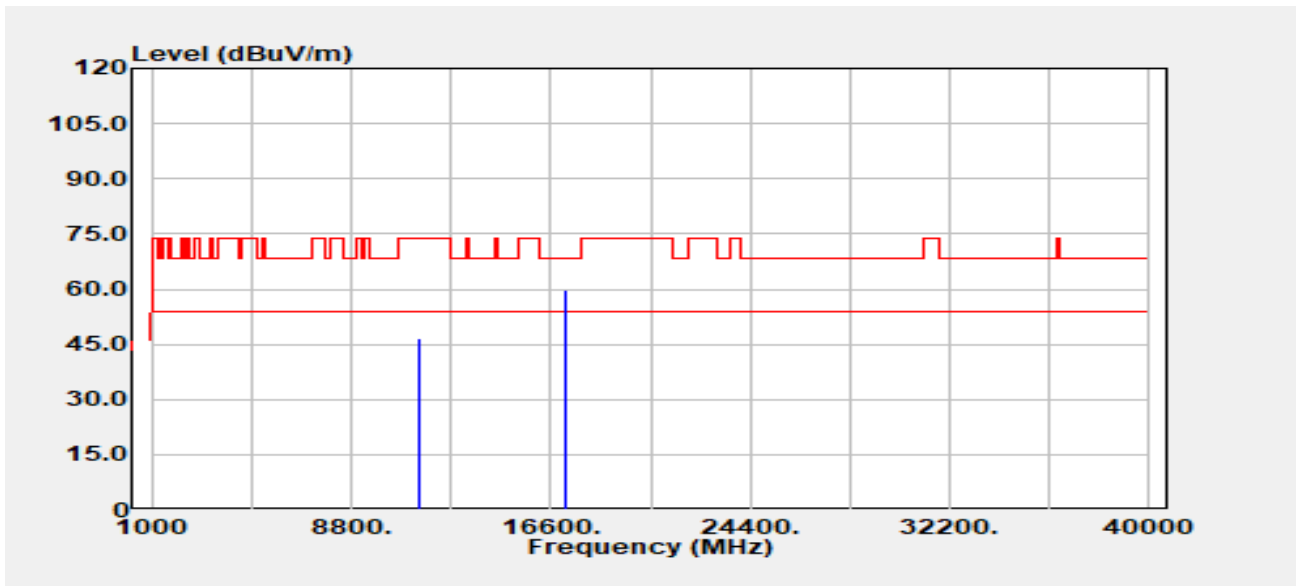

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11420.000 | Peak | 34.21 | 12.36 | 46.57 | 74.00 | -27.43 |
| 11420.000 | Average | 24.77 | 12.36 | 37.13 | 54.00 | -16.87 |
| 17130.000 | Peak | 33.58 | 26.00 | 59.58 | 68.20 | -8.62 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|---------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11ac80/Band3~4 | Temp./Humi. | :24.6/57 |
| Frequency | :5690 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

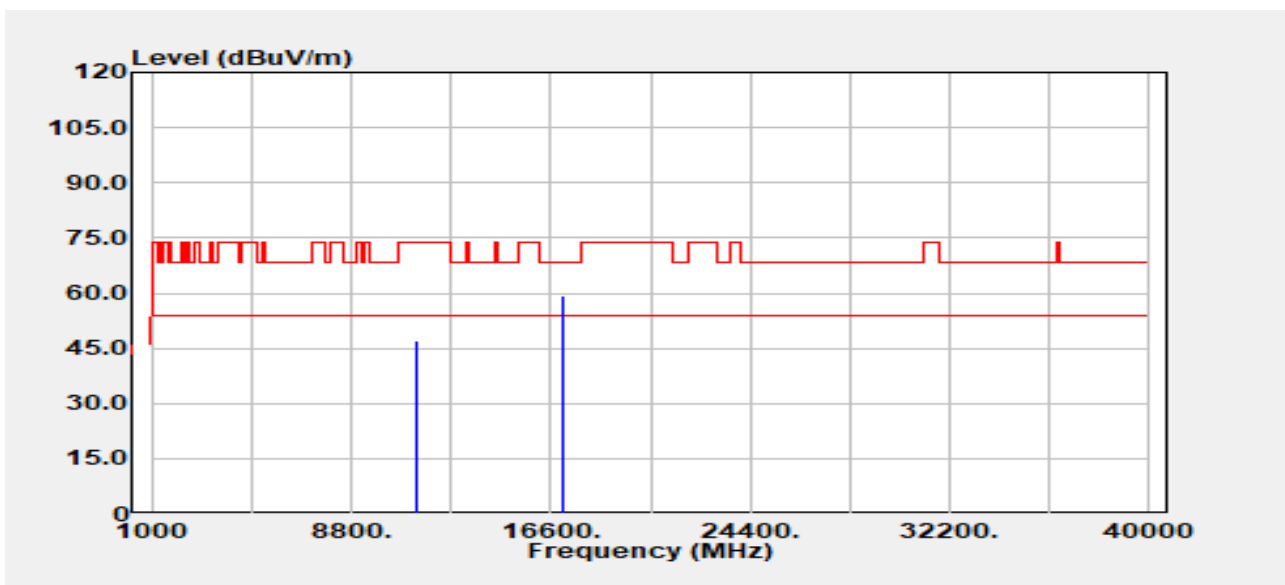


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11380.000 | Peak | 34.66 | 12.47 | 47.12 | 74.00 | -26.88 |
| 11380.000 | Average | 24.86 | 12.47 | 37.33 | 54.00 | -16.67 |
| 17070.000 | Peak | 33.78 | 25.70 | 59.48 | 68.20 | -8.72 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|---------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11ac80/Band3~4 | Temp./Humi. | :24.6/57 |
| Frequency | :5690 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

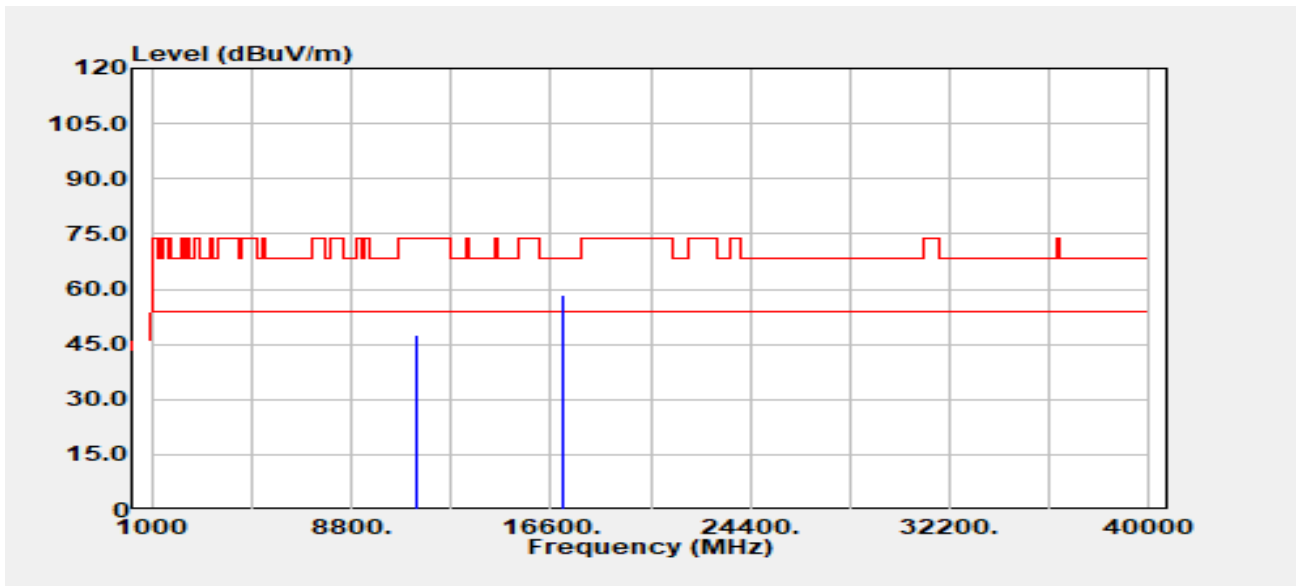


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11380.000 | Peak | 34.95 | 12.47 | 47.42 | 74.00 | -26.58 |
| 11380.000 | Average | 24.78 | 12.47 | 37.25 | 54.00 | -16.75 |
| 17070.000 | Peak | 32.63 | 25.70 | 58.34 | 68.20 | -9.86 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5745 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

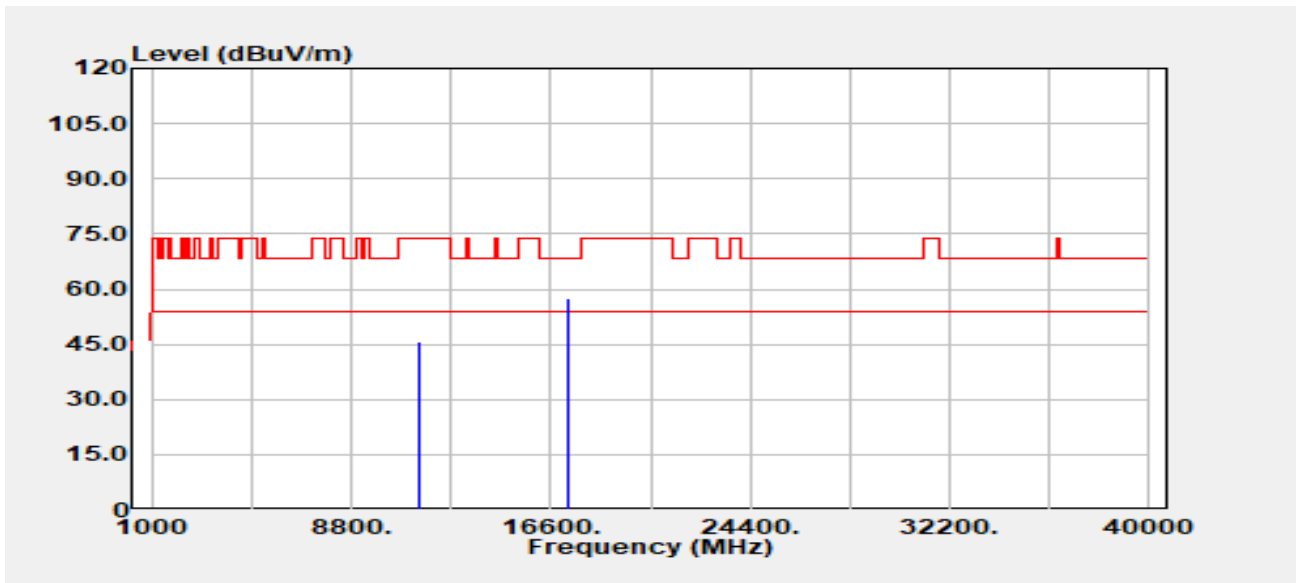


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11490.000 | Peak | 33.35 | 12.39 | 45.74 | 74.00 | -28.26 |
| 11490.000 | Average | 23.35 | 12.39 | 35.74 | 54.00 | -18.26 |
| 17235.000 | Peak | 31.58 | 26.10 | 57.69 | 68.20 | -10.51 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5745 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

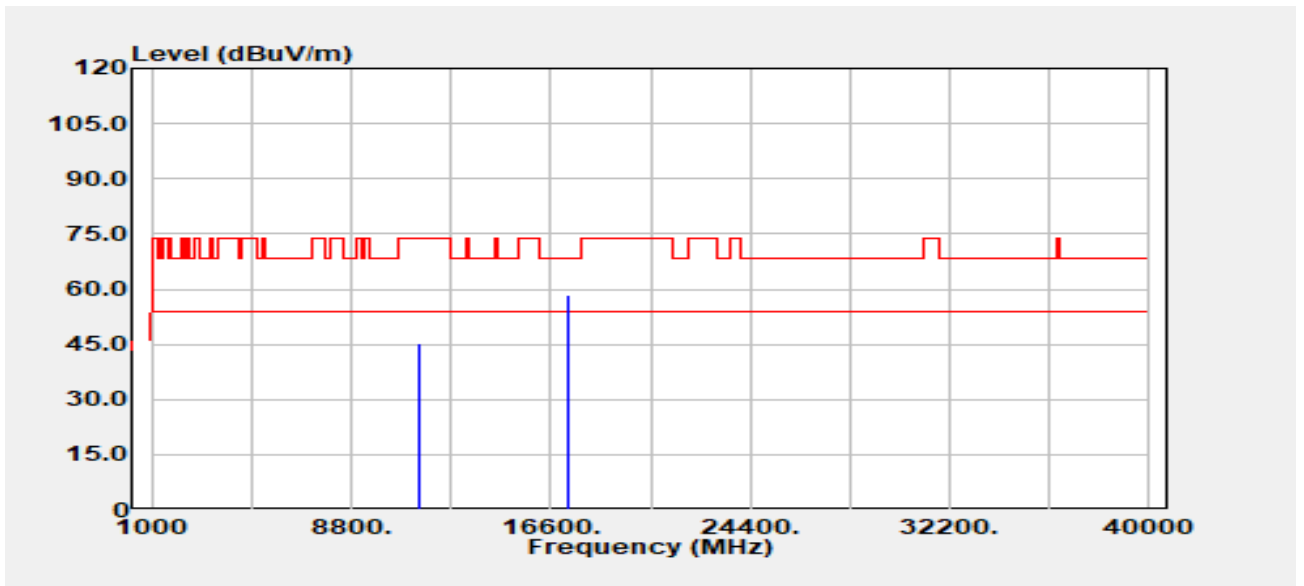


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11490.000 | Peak | 32.67 | 12.39 | 45.06 | 74.00 | -28.94 |
| 11490.000 | Average | 23.60 | 12.39 | 35.99 | 54.00 | -18.01 |
| 17235.000 | Peak | 32.30 | 26.10 | 58.41 | 68.20 | -9.79 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5785 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

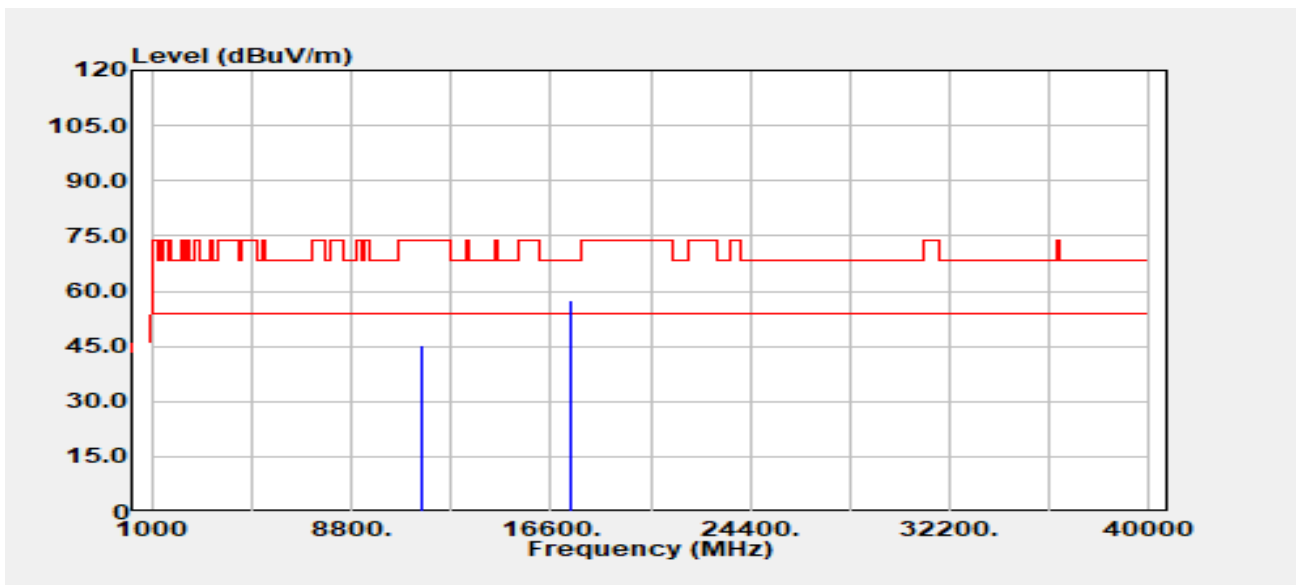


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11570.000 | Peak | 32.90 | 12.49 | 45.39 | 74.00 | -28.61 |
| 11570.000 | Average | 23.29 | 12.49 | 35.78 | 54.00 | -18.22 |
| 17355.000 | Peak | 31.94 | 25.47 | 57.40 | 68.20 | -10.80 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5785 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

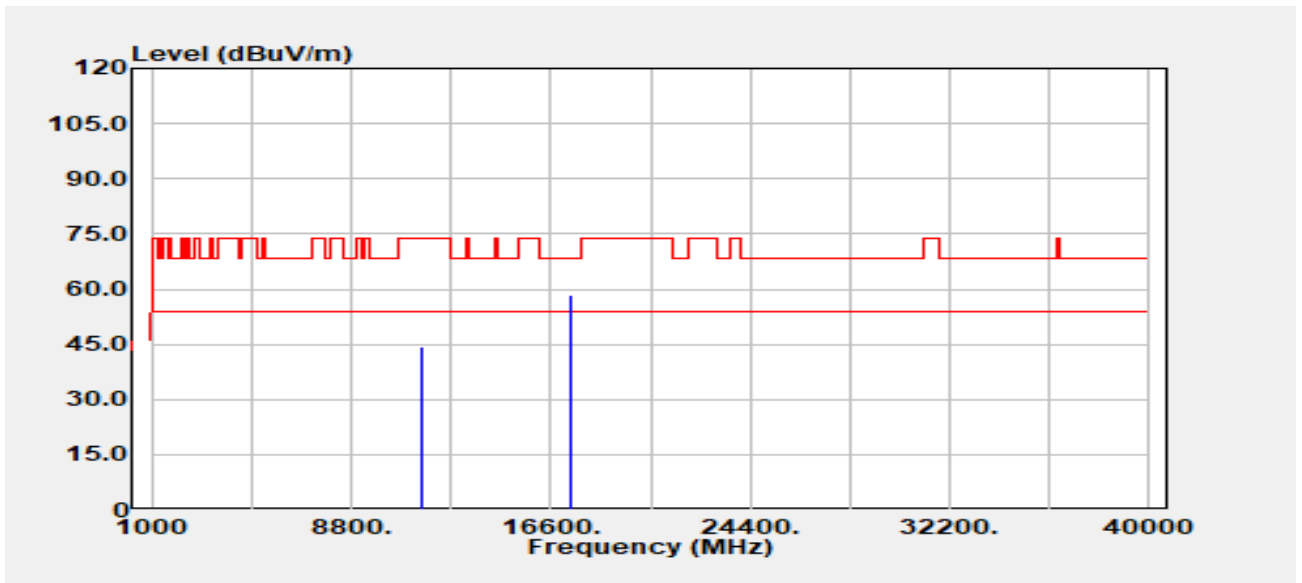


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11570.000 | Peak | 31.88 | 12.49 | 44.37 | 74.00 | -29.63 |
| 11570.000 | Average | 23.25 | 12.49 | 35.74 | 54.00 | -18.26 |
| 17355.000 | Peak | 33.08 | 25.47 | 58.55 | 68.20 | -9.65 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5825 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

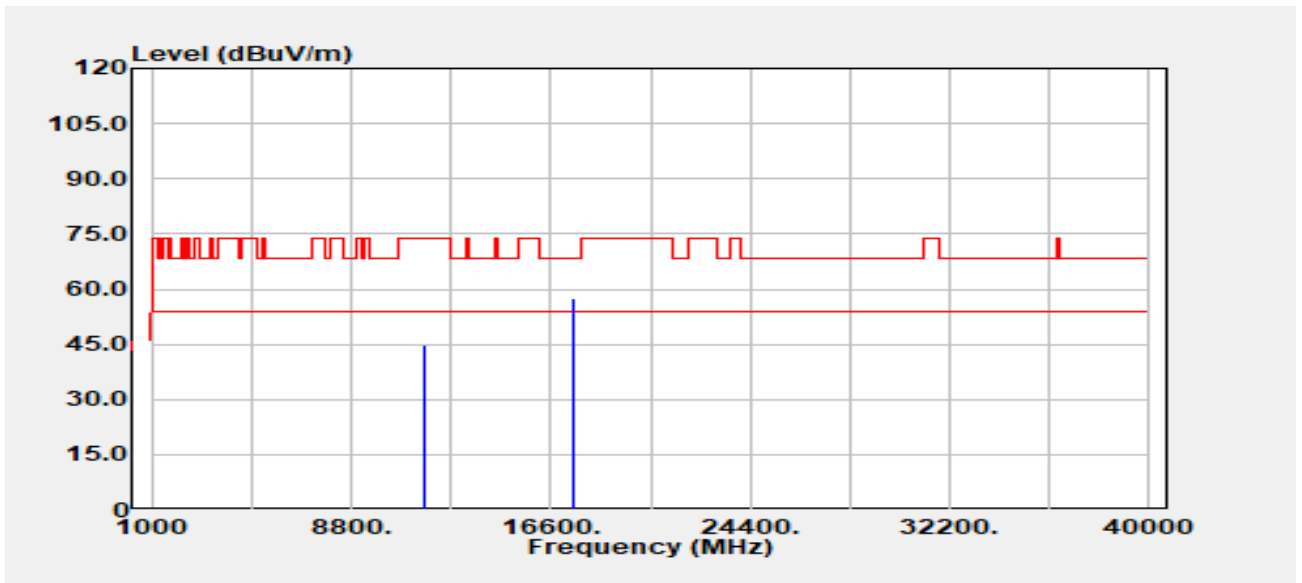


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11650.000 | Peak | 32.38 | 12.43 | 44.81 | 74.00 | -29.19 |
| 11650.000 | Average | 23.39 | 12.43 | 35.82 | 54.00 | -18.18 |
| 17475.000 | Peak | 32.44 | 25.06 | 57.50 | 68.20 | -10.70 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5825 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

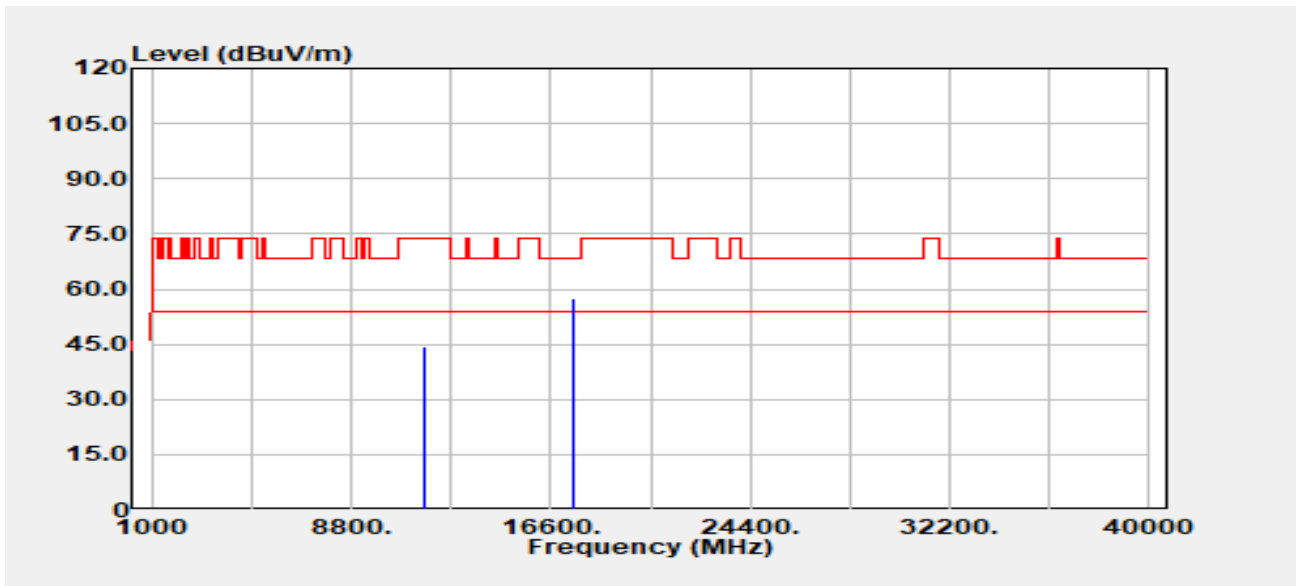


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11650.000 | Peak | 31.98 | 12.43 | 44.41 | 74.00 | -29.59 |
| 11650.000 | Average | 23.12 | 12.43 | 35.54 | 54.00 | -18.46 |
| 17475.000 | Peak | 32.67 | 25.06 | 57.73 | 68.20 | -10.47 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5745 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

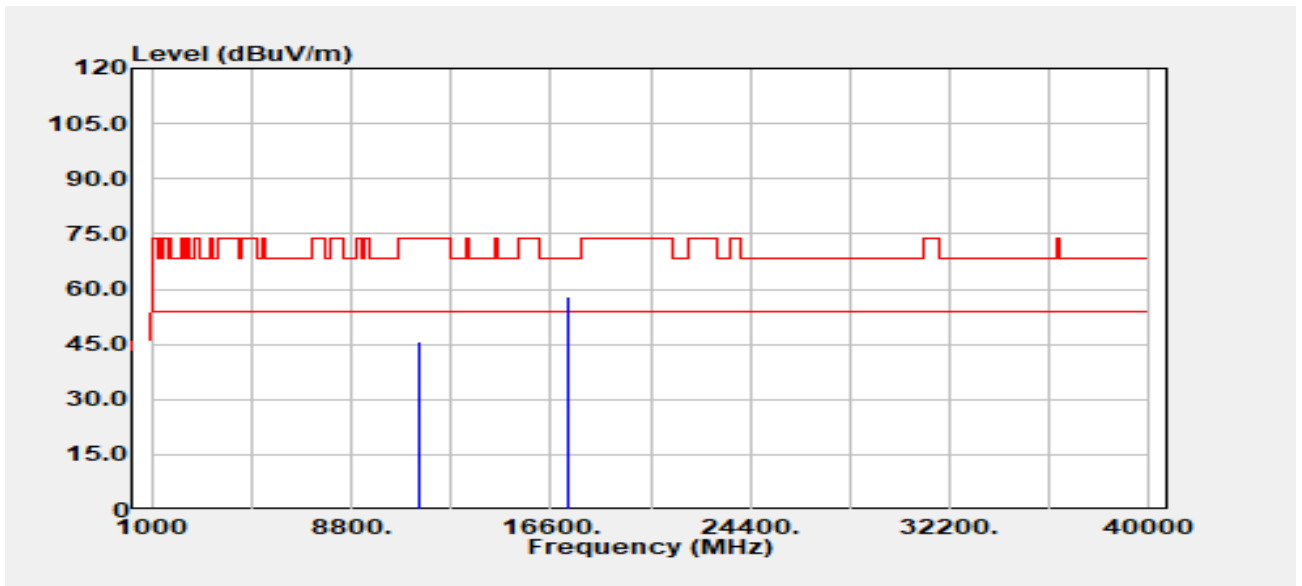


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11490.000 | Peak | 33.24 | 12.39 | 45.63 | 74.00 | -28.37 |
| 11490.000 | Average | 23.49 | 12.39 | 35.88 | 54.00 | -18.12 |
| 17235.000 | Peak | 31.98 | 26.10 | 58.08 | 68.20 | -10.12 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5745 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

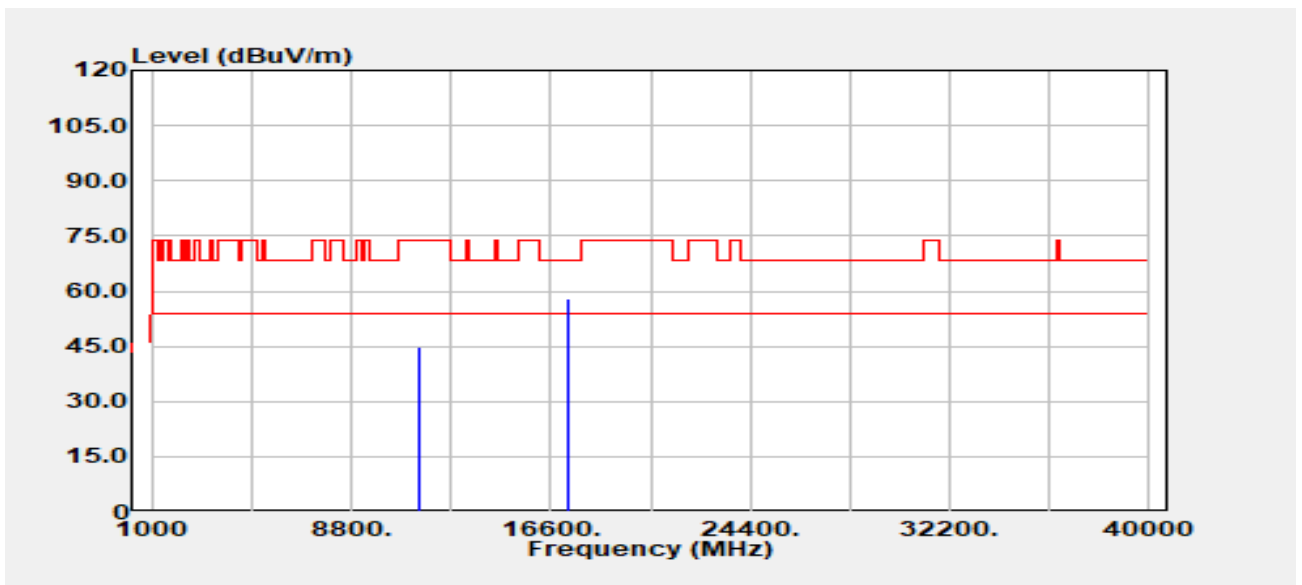


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11490.000 | Peak | 32.44 | 12.39 | 44.83 | 74.00 | -29.17 |
| 11490.000 | Average | 23.47 | 12.39 | 35.86 | 54.00 | -18.14 |
| 17235.000 | Peak | 31.99 | 26.10 | 58.10 | 68.20 | -10.10 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5785 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

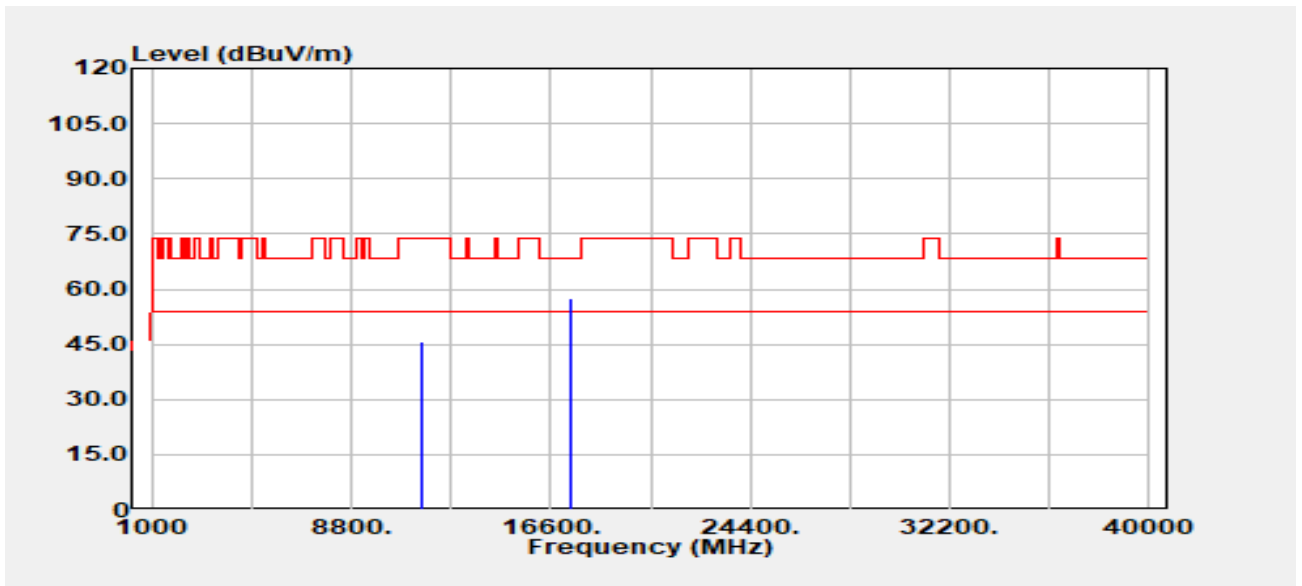


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11570.000 | Peak | 33.16 | 12.49 | 45.65 | 74.00 | -28.35 |
| 11570.000 | Average | 23.34 | 12.49 | 35.83 | 54.00 | -18.17 |
| 17355.000 | Peak | 32.26 | 25.47 | 57.73 | 68.20 | -10.47 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5785 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

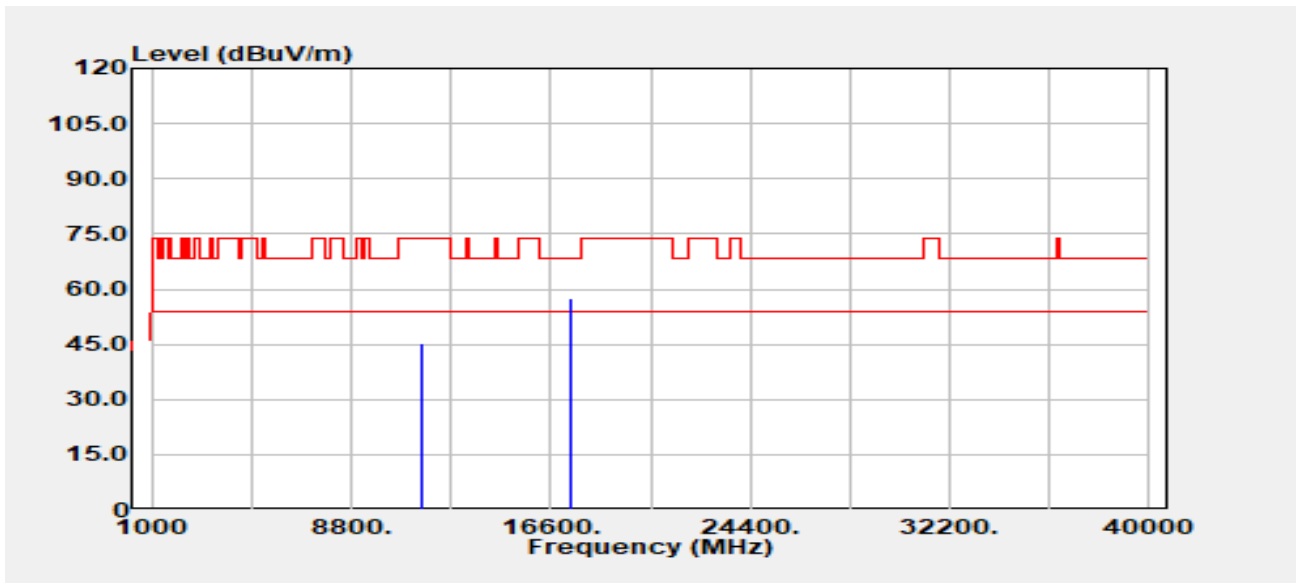


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11570.000 | Peak | 32.91 | 12.49 | 45.40 | 74.00 | -28.60 |
| 11570.000 | Average | 23.30 | 12.49 | 35.79 | 54.00 | -18.21 |
| 17355.000 | Peak | 32.12 | 25.47 | 57.59 | 68.20 | -10.61 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5825 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

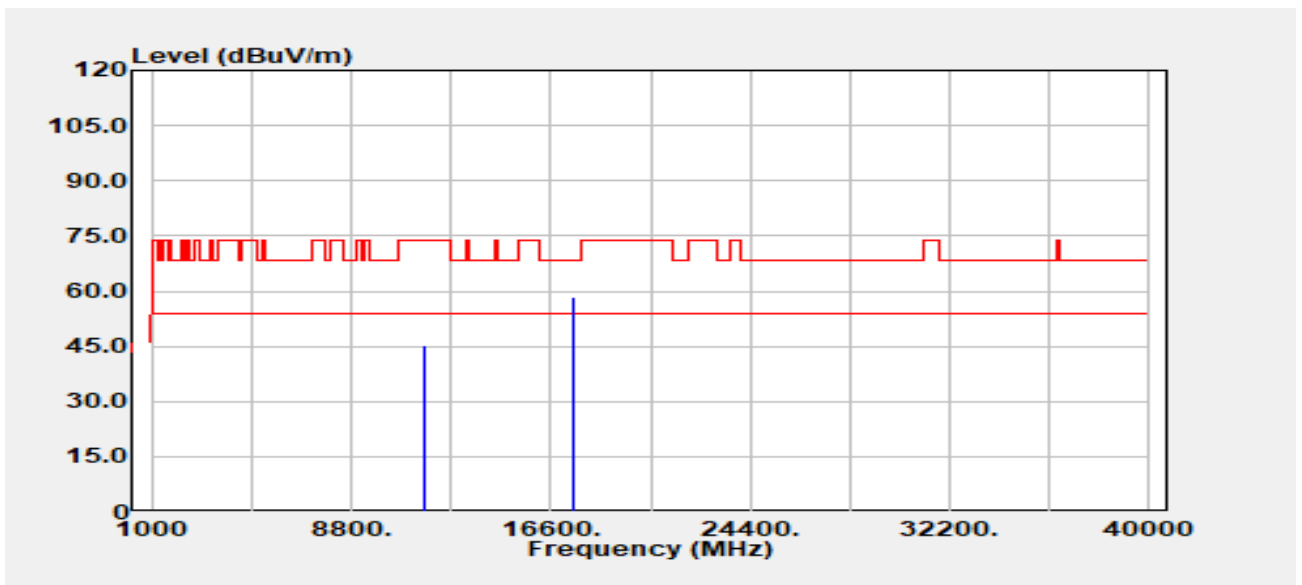


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11650.000 | Peak | 33.08 | 12.43 | 45.51 | 74.00 | -28.49 |
| 11650.000 | Average | 23.31 | 12.43 | 35.74 | 54.00 | -18.26 |
| 17475.000 | Peak | 33.23 | 25.06 | 58.29 | 68.20 | -9.91 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5825 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

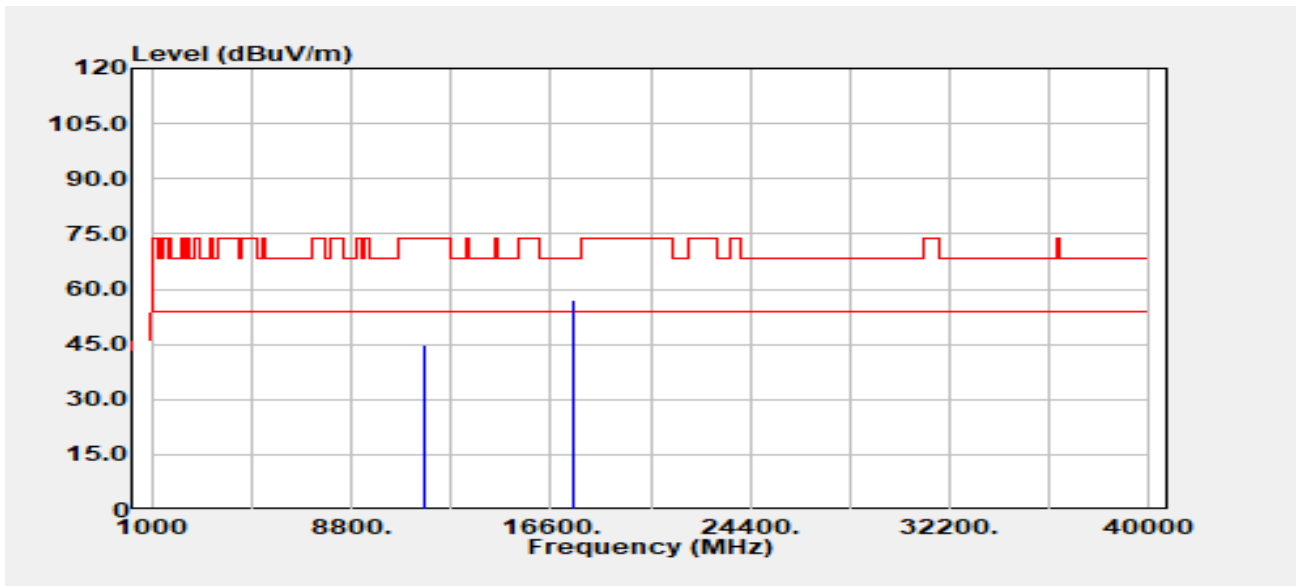


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11650.000 | Peak | 32.45 | 12.43 | 44.87 | 74.00 | -29.13 |
| 11650.000 | Average | 23.39 | 12.43 | 35.82 | 54.00 | -18.18 |
| 17475.000 | Peak | 32.14 | 25.06 | 57.20 | 68.20 | -11.00 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

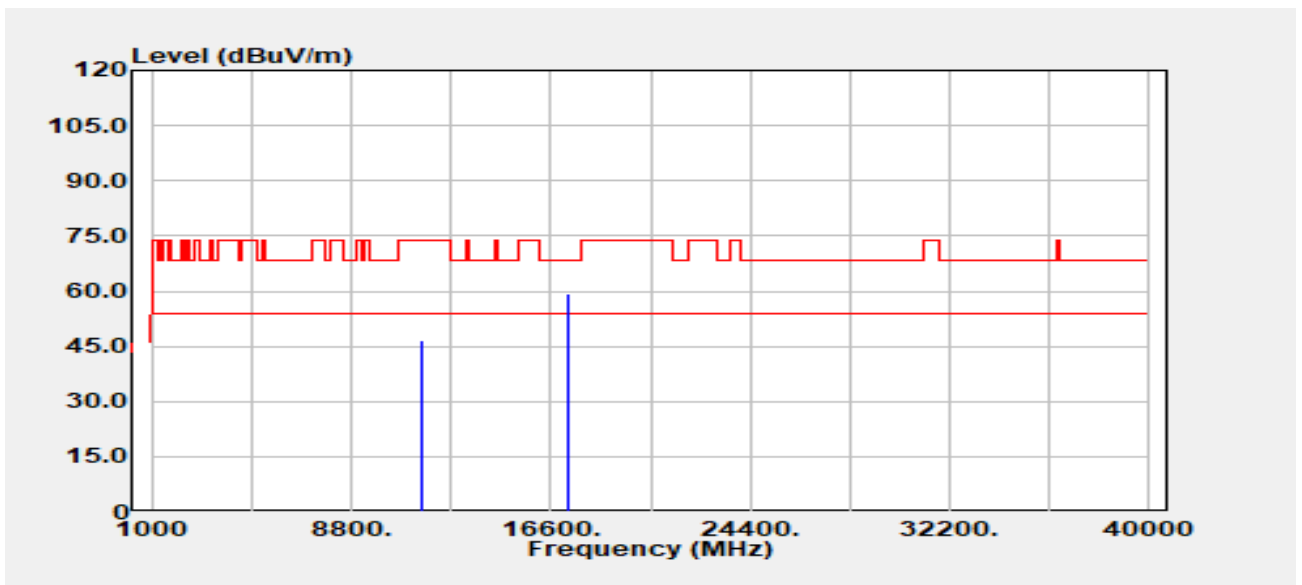


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11510.000 | Peak | 34.06 | 12.43 | 46.49 | 74.00 | -27.51 |
| 11510.000 | Average | 24.26 | 12.43 | 36.69 | 54.00 | -17.31 |
| 17265.000 | Peak | 33.11 | 26.14 | 59.25 | 68.20 | -8.95 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

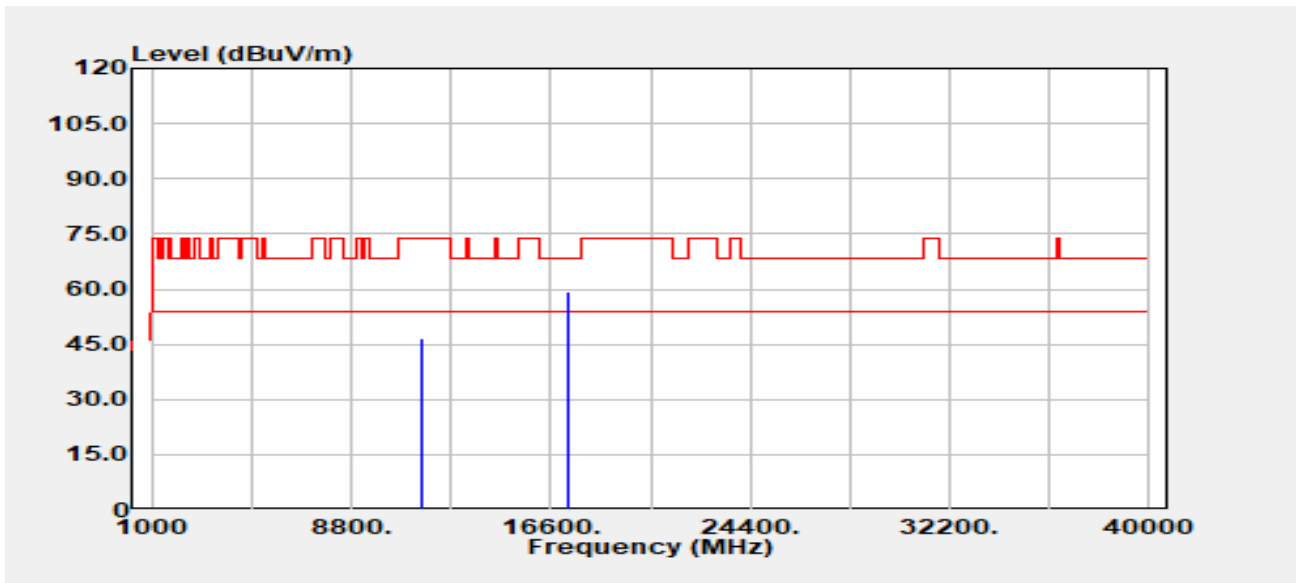


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11510.000 | Peak | 34.22 | 12.43 | 46.65 | 74.00 | -27.35 |
| 11510.000 | Average | 24.75 | 12.43 | 37.18 | 54.00 | -16.82 |
| 17265.000 | Peak | 33.09 | 26.14 | 59.22 | 68.20 | -8.98 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5795 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

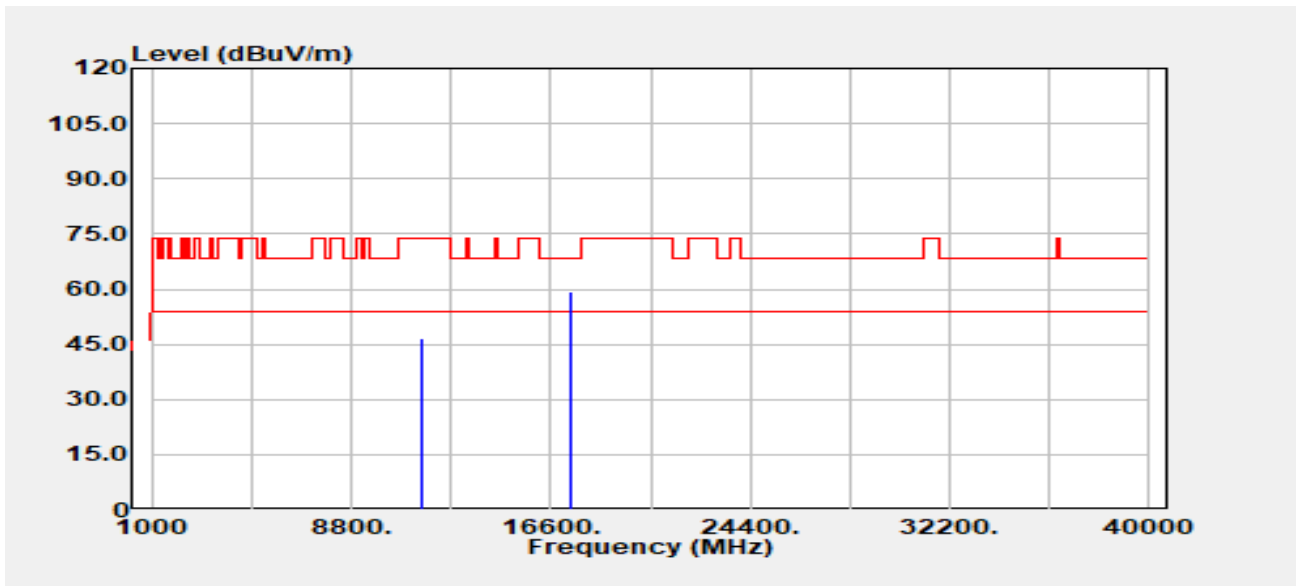


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11590.000 | Peak | 34.33 | 12.48 | 46.81 | 74.00 | -27.19 |
| 11590.000 | Average | 24.66 | 12.48 | 37.14 | 54.00 | -16.86 |
| 17385.000 | Peak | 33.88 | 25.27 | 59.15 | 68.20 | -9.05 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5795 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

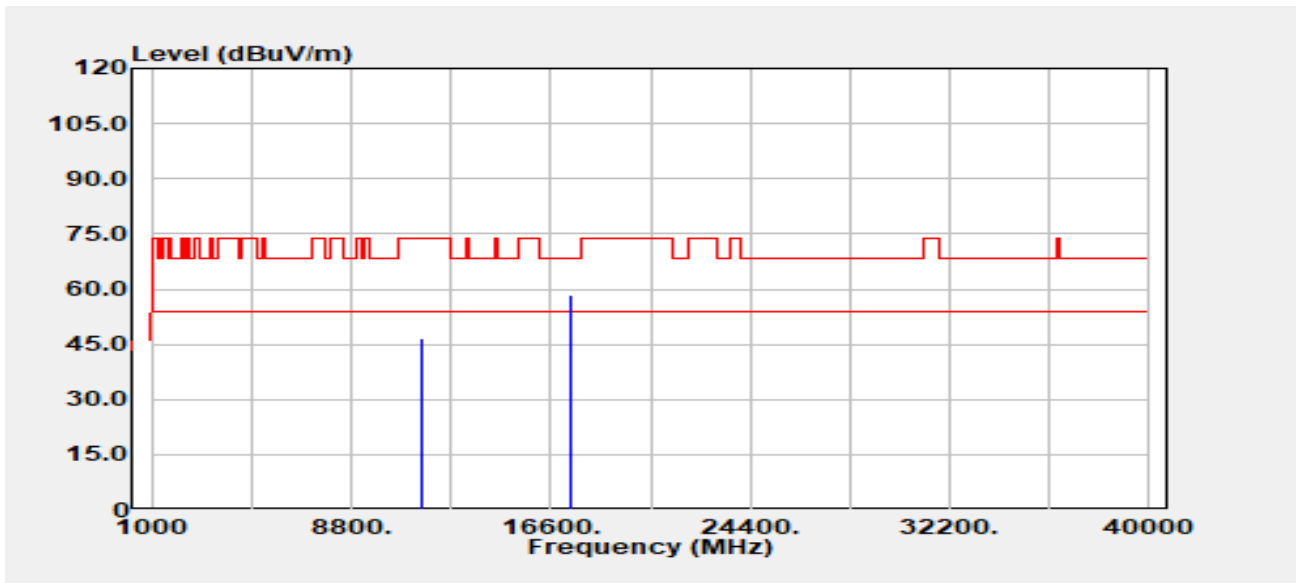


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11590.000 | Peak | 34.19 | 12.48 | 46.67 | 74.00 | -27.33 |
| 11590.000 | Average | 24.79 | 12.48 | 37.27 | 54.00 | -16.73 |
| 17385.000 | Peak | 33.18 | 25.27 | 58.45 | 68.20 | -9.75 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band4
 Frequency :5775 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

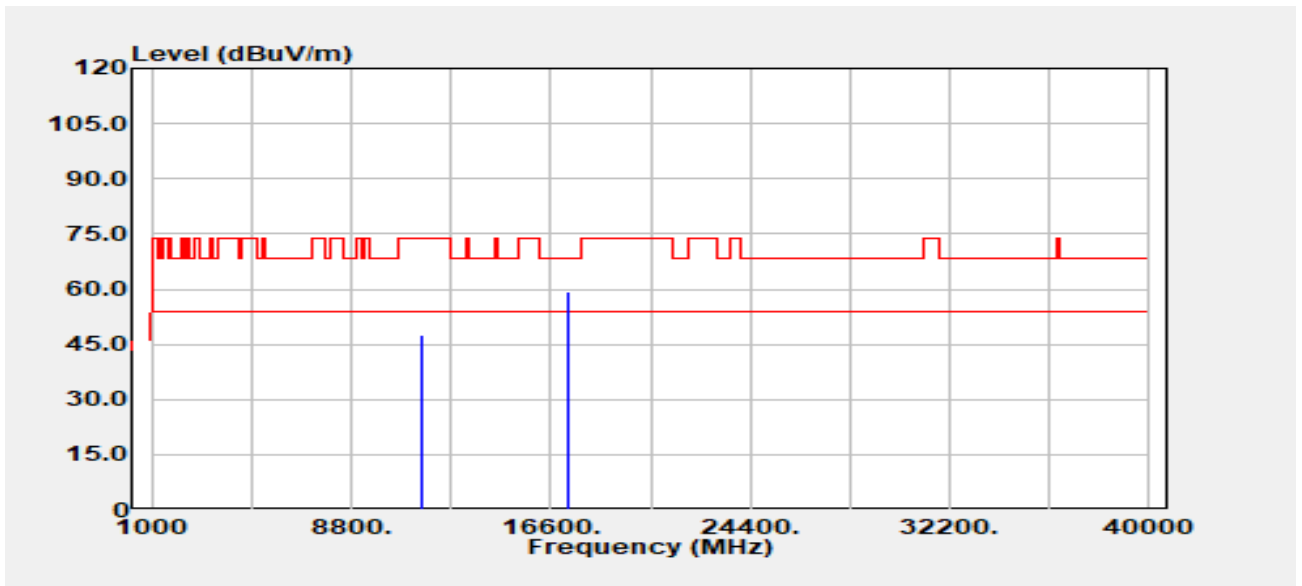


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11550.000 | Peak | 34.85 | 12.51 | 47.35 | 74.00 | -26.65 |
| 11550.000 | Average | 24.96 | 12.51 | 37.47 | 54.00 | -16.54 |
| 17325.000 | Peak | 33.68 | 25.79 | 59.47 | 68.20 | -8.73 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band4
 Frequency :5775 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :


Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

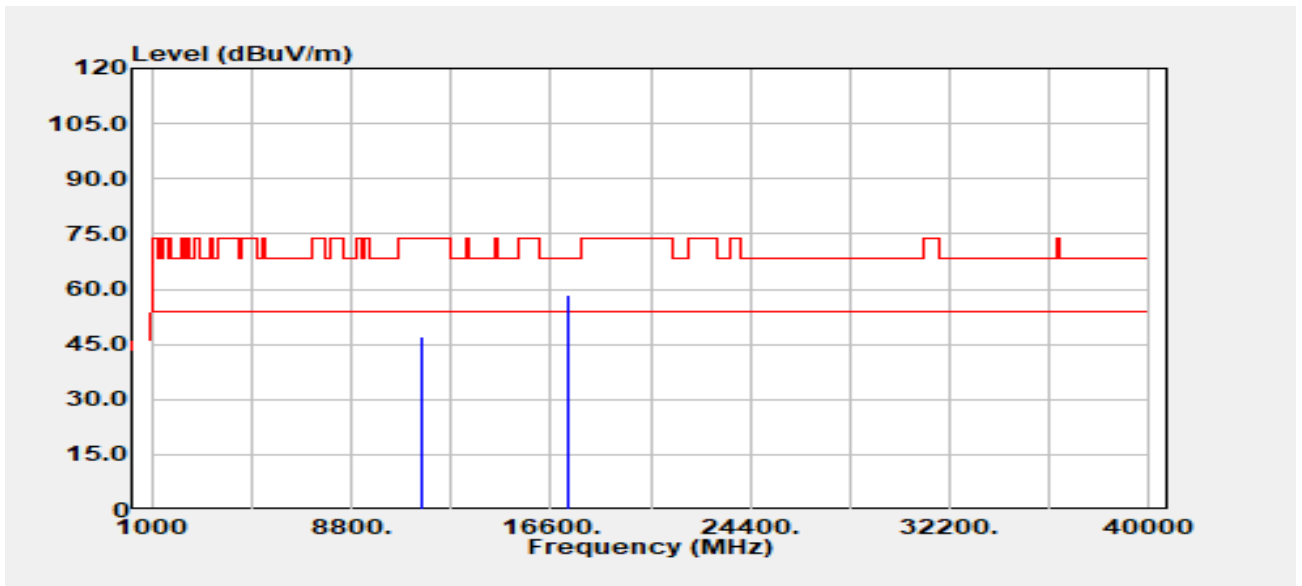

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11550.000 | Peak | 34.71 | 12.51 | 47.21 | 74.00 | -26.79 |
| 11550.000 | Average | 24.79 | 12.51 | 37.30 | 54.00 | -16.71 |
| 17325.000 | Peak | 32.74 | 25.79 | 58.53 | 68.20 | -9.67 |

TX Test Data: (IC_Below 1GHz)

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band1 | Temp./Humi. | :24.6/58 |
| Frequency | :5210 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

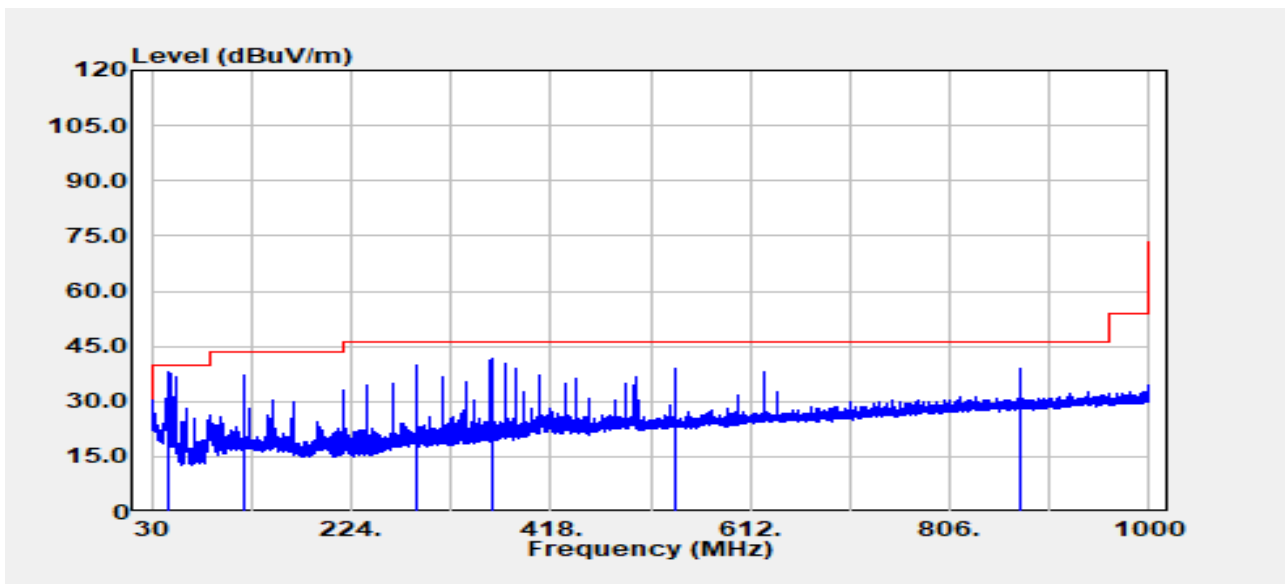


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 46.490 | Peak | 52.09 | -14.14 | 37.96 | 40.00 | -2.04 |
| 119.968 | Peak | 46.44 | -9.21 | 37.23 | 43.50 | -6.27 |
| 288.020 | Peak | 48.69 | -8.79 | 39.90 | 46.00 | -6.10 |
| 360.043 | Peak | 48.84 | -7.18 | 41.67 | 46.00 | -4.33 |
| 539.978 | Peak | 42.01 | -2.85 | 39.15 | 46.00 | -6.85 |
| 874.991 | Peak | 36.60 | 2.57 | 39.17 | 46.00 | -6.83 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band1 | Temp./Humi. | :24.6/58 |
| Frequency | :5210 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

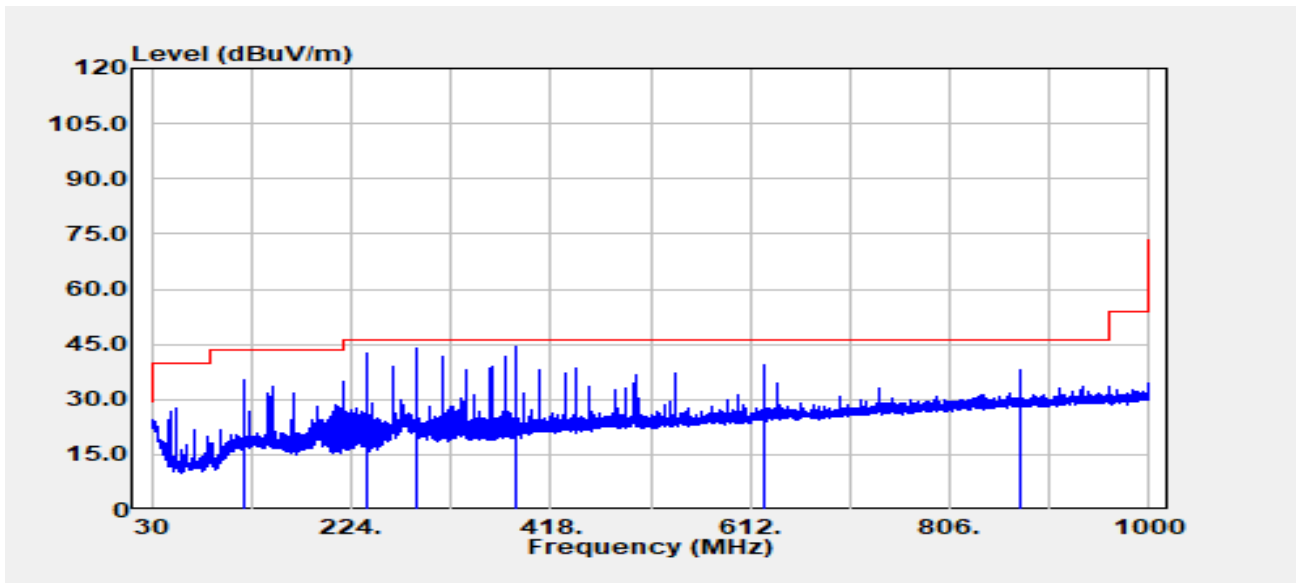


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 119.968 | Peak | 44.68 | -9.21 | 35.47 | 43.50 | -8.03 |
| 240.005 | Peak | 53.26 | -10.75 | 42.51 | 46.00 | -3.49 |
| 288.020 | Peak | 52.80 | -8.79 | 44.01 | 46.00 | -1.99 |
| 384.050 | Peak | 50.88 | -6.48 | 44.40 | 46.00 | -1.60 |
| 624.974 | Peak | 40.66 | -1.16 | 39.50 | 46.00 | -6.50 |
| 874.991 | Peak | 35.65 | 2.57 | 38.22 | 46.00 | -7.78 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5290 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

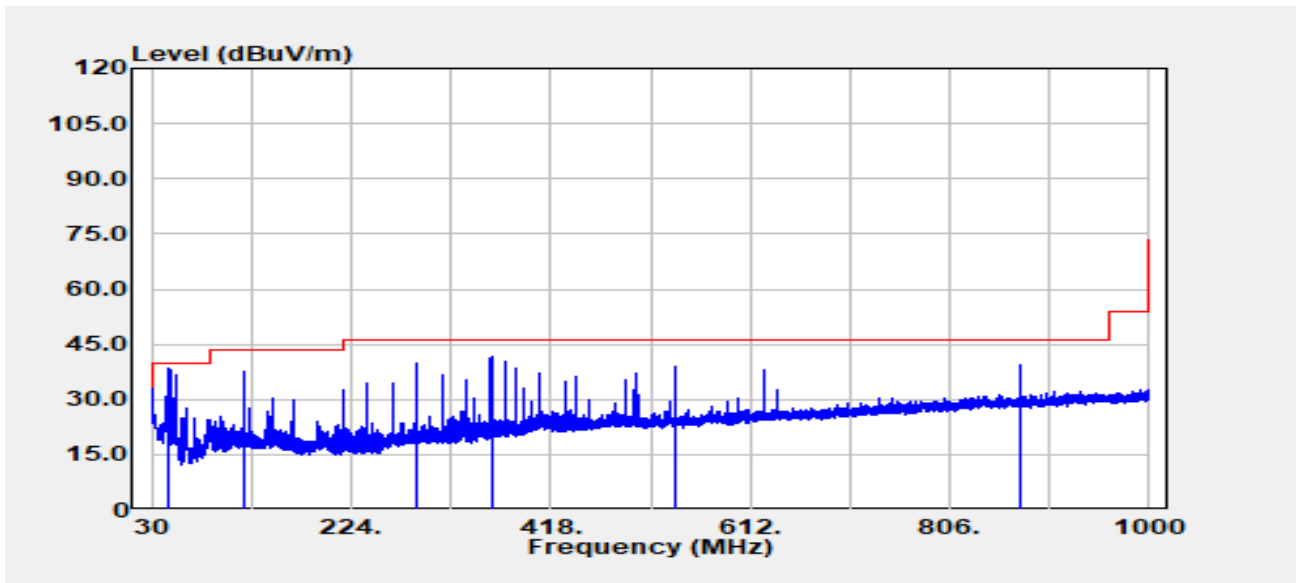


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 46.611 | Peak | 52.60 | -14.25 | 38.36 | 40.00 | -1.64 |
| 119.968 | Peak | 46.85 | -9.21 | 37.64 | 43.50 | -5.86 |
| 288.020 | Peak | 48.61 | -8.79 | 39.82 | 46.00 | -6.18 |
| 360.043 | Peak | 48.88 | -7.18 | 41.70 | 46.00 | -4.30 |
| 539.978 | Peak | 41.86 | -2.85 | 39.01 | 46.00 | -6.99 |
| 874.991 | Peak | 36.81 | 2.57 | 39.38 | 46.00 | -6.62 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5290 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

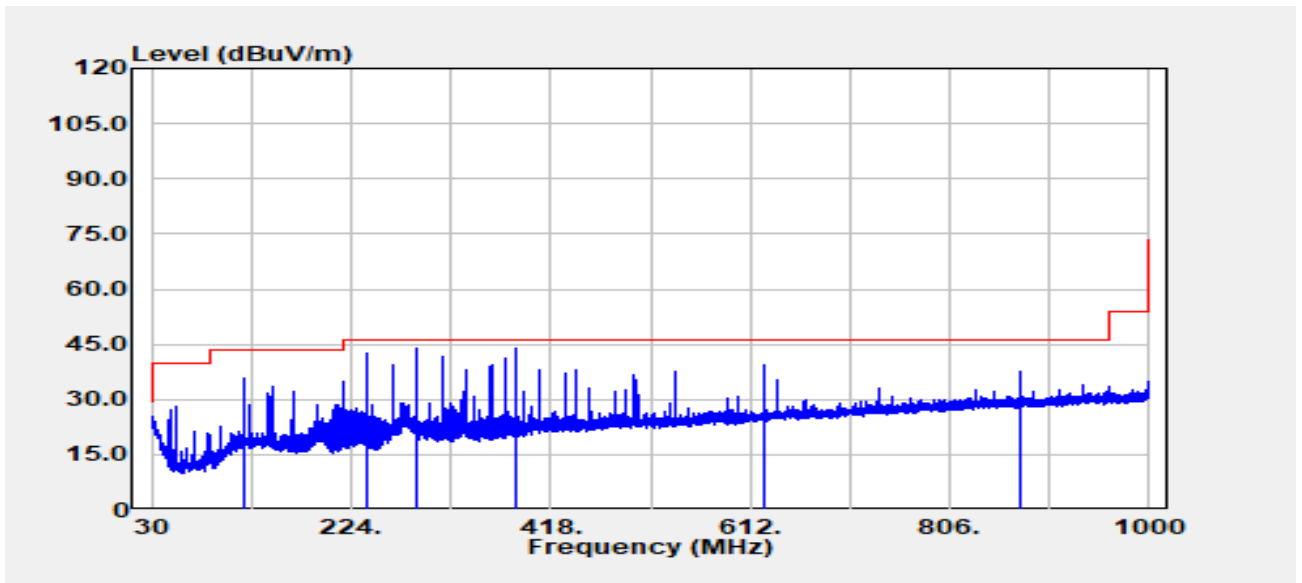


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 119.968 | Peak | 44.83 | -9.21 | 35.62 | 43.50 | -7.88 |
| 240.005 | Peak | 53.23 | -10.75 | 42.48 | 46.00 | -3.52 |
| 288.020 | Peak | 52.79 | -8.79 | 44.00 | 46.00 | -2.00 |
| 384.050 | Peak | 50.42 | -6.48 | 43.94 | 46.00 | -2.06 |
| 624.974 | Peak | 40.54 | -1.16 | 39.38 | 46.00 | -6.62 |
| 874.991 | Peak | 34.82 | 2.57 | 37.39 | 46.00 | -8.61 |

Report No.: TMWK2308002691KR


Rev.: 00

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11n40/Band3 | Temp./Humi. | :24.6/58 |
| Frequency | :5510 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

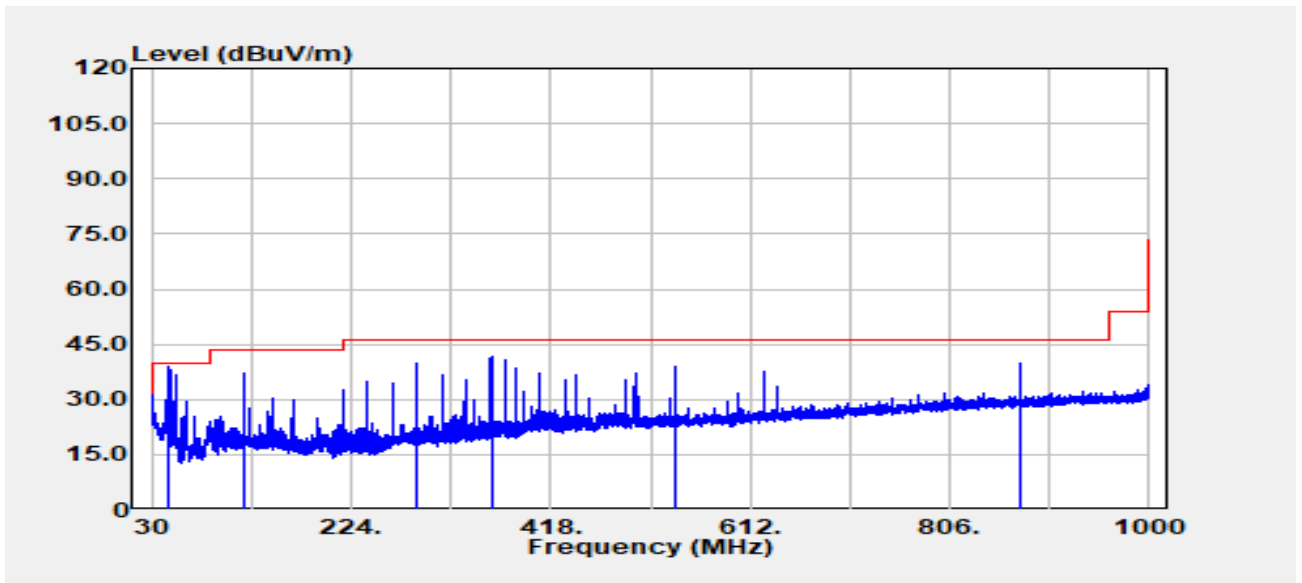

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 46.369 | Peak | 52.78 | -14.03 | 38.76 | 40.00 | -1.24 |
| 119.968 | Peak | 46.39 | -9.21 | 37.18 | 43.50 | -6.32 |
| 288.020 | Peak | 48.54 | -8.79 | 39.75 | 46.00 | -6.25 |
| 360.043 | Peak | 48.69 | -7.18 | 41.52 | 46.00 | -4.48 |
| 539.978 | Peak | 41.96 | -2.85 | 39.11 | 46.00 | -6.89 |
| 874.991 | Peak | 37.11 | 2.57 | 39.68 | 46.00 | -6.32 |

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11n40/Band3 | Temp./Humi. | :24.6/58 |
| Frequency | :5510 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

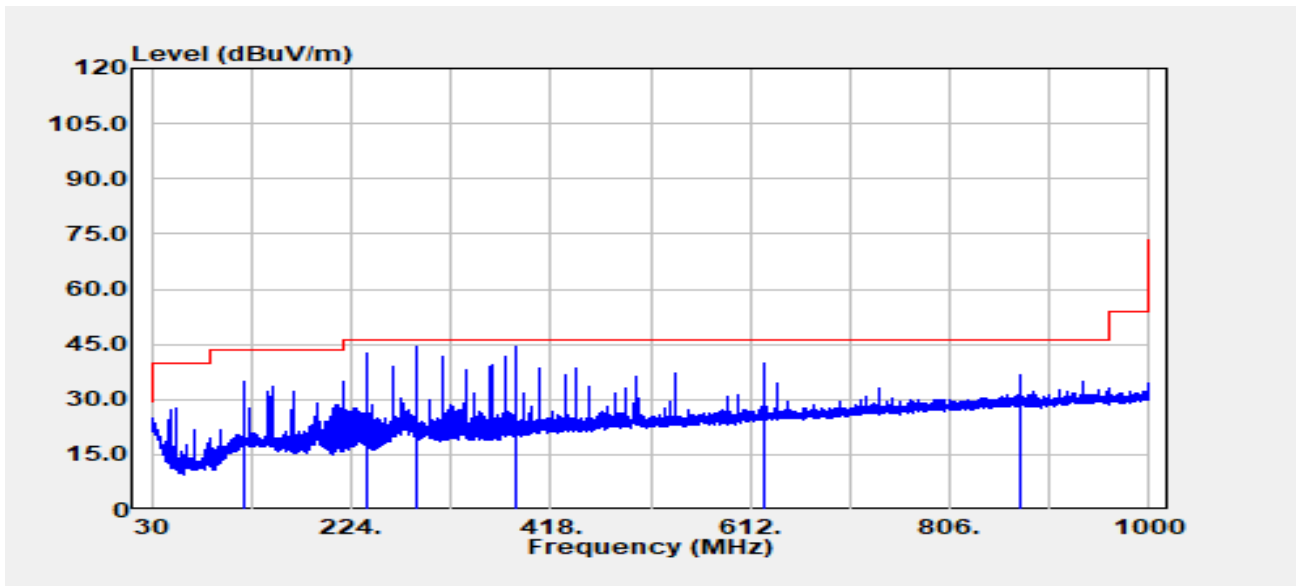


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 119.968 | Peak | 44.17 | -9.21 | 34.96 | 43.50 | -8.54 |
| 240.005 | Peak | 53.49 | -10.75 | 42.74 | 46.00 | -3.26 |
| 288.020 | Peak | 52.99 | -8.79 | 44.20 | 46.00 | -1.80 |
| 384.050 | Peak | 50.74 | -6.48 | 44.27 | 46.00 | -1.73 |
| 624.974 | Peak | 40.90 | -1.16 | 39.74 | 46.00 | -6.26 |
| 874.991 | Peak | 34.17 | 2.57 | 36.74 | 46.00 | -9.26 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

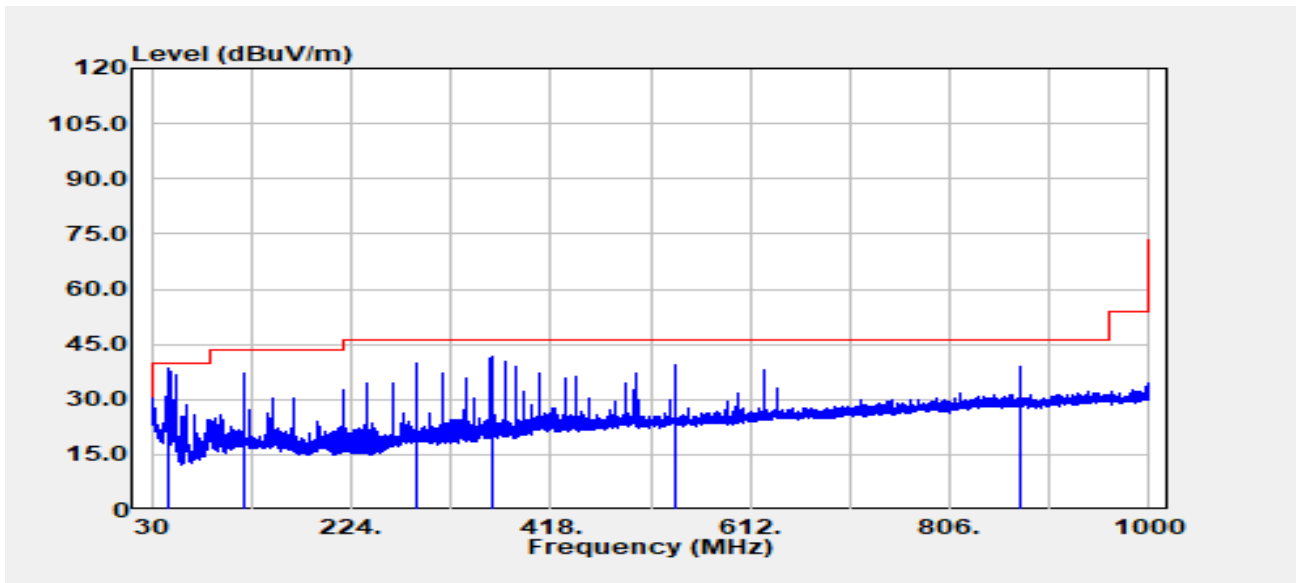


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 46.611 | Peak | 52.65 | -14.25 | 38.40 | 40.00 | -1.60 |
| 119.968 | Peak | 46.51 | -9.21 | 37.30 | 43.50 | -6.20 |
| 288.020 | Peak | 48.71 | -8.79 | 39.93 | 46.00 | -6.07 |
| 360.043 | Peak | 48.72 | -7.18 | 41.54 | 46.00 | -4.46 |
| 539.978 | Peak | 42.02 | -2.85 | 39.17 | 46.00 | -6.83 |
| 874.991 | Peak | 36.37 | 2.57 | 38.94 | 46.00 | -7.06 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :


Test Date :2023-09-01
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

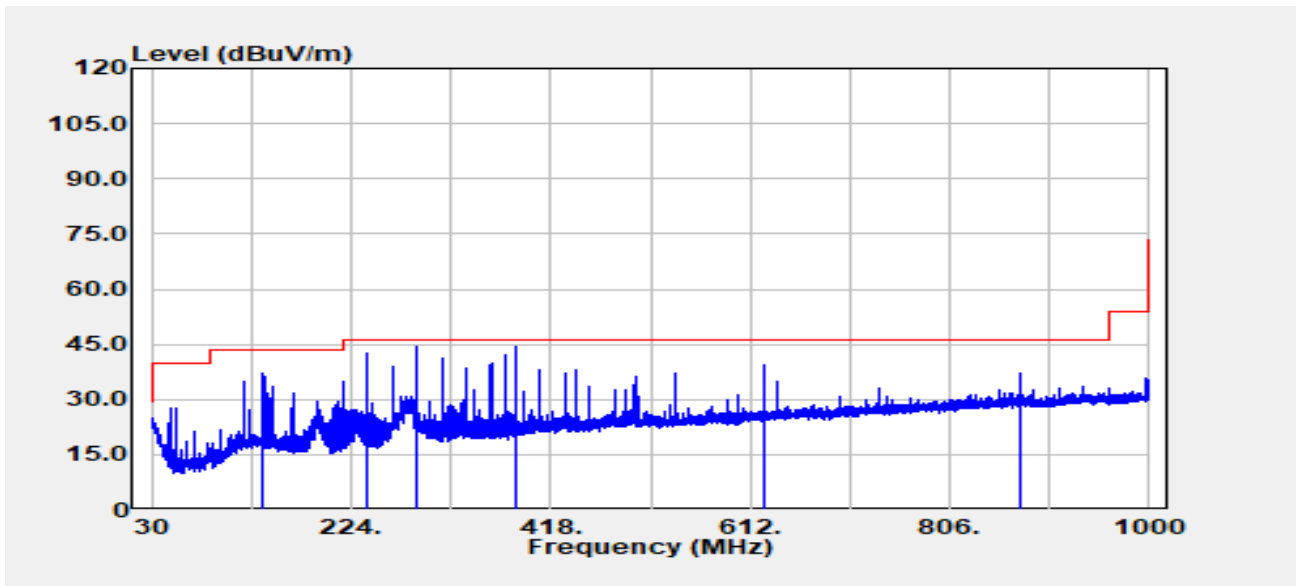

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 138.883 | Peak | 46.80 | -9.86 | 36.94 | 43.50 | -6.56 |
| 240.005 | Peak | 53.52 | -10.75 | 42.77 | 46.00 | -3.23 |
| 288.020 | Peak | 53.09 | -8.79 | 44.30 | 46.00 | -1.70 |
| 384.050 | Peak | 50.63 | -6.48 | 44.15 | 46.00 | -1.85 |
| 624.974 | Peak | 40.70 | -1.16 | 39.53 | 46.00 | -6.47 |
| 874.991 | Peak | 34.71 | 2.57 | 37.28 | 46.00 | -8.72 |

TX Test Data: (IC_Above 1GHz)

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band1 | Temp./Humi. | :24.6/57 |
| Frequency | :5180 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

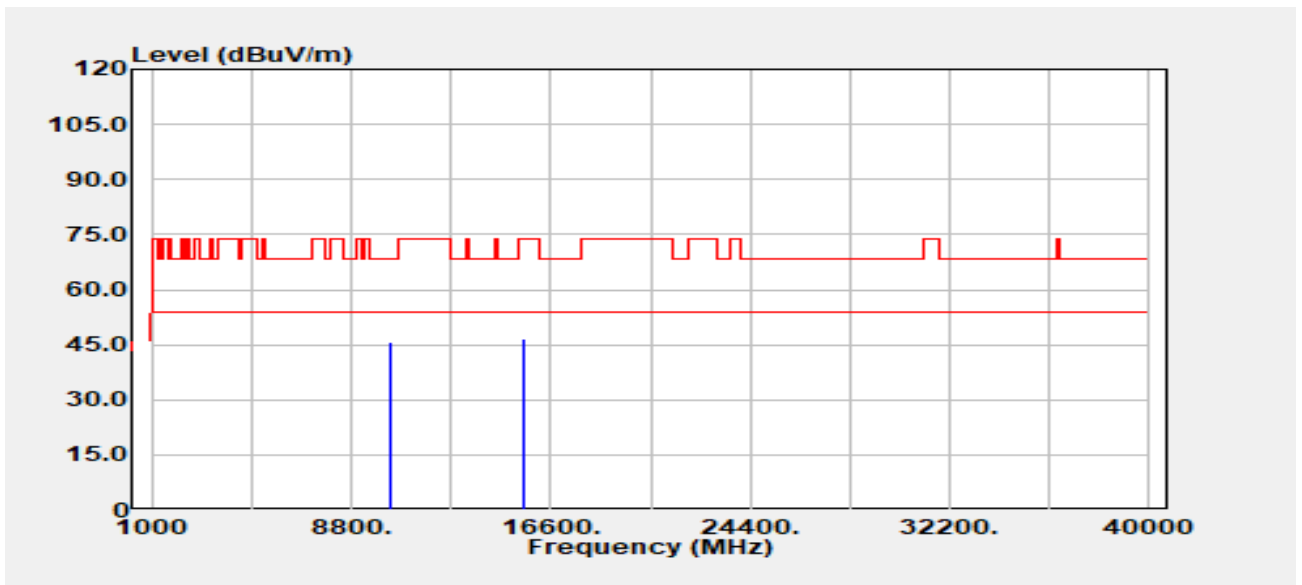


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10360.000 | Peak | 34.62 | 11.26 | 45.88 | 68.20 | -22.32 |
| 15540.000 | Peak | 34.31 | 12.38 | 46.69 | 74.00 | -27.31 |
| 15540.000 | Average | 24.75 | 12.38 | 37.13 | 54.00 | -16.87 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band1 | Temp./Humi. | :24.6/57 |
| Frequency | :5180 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

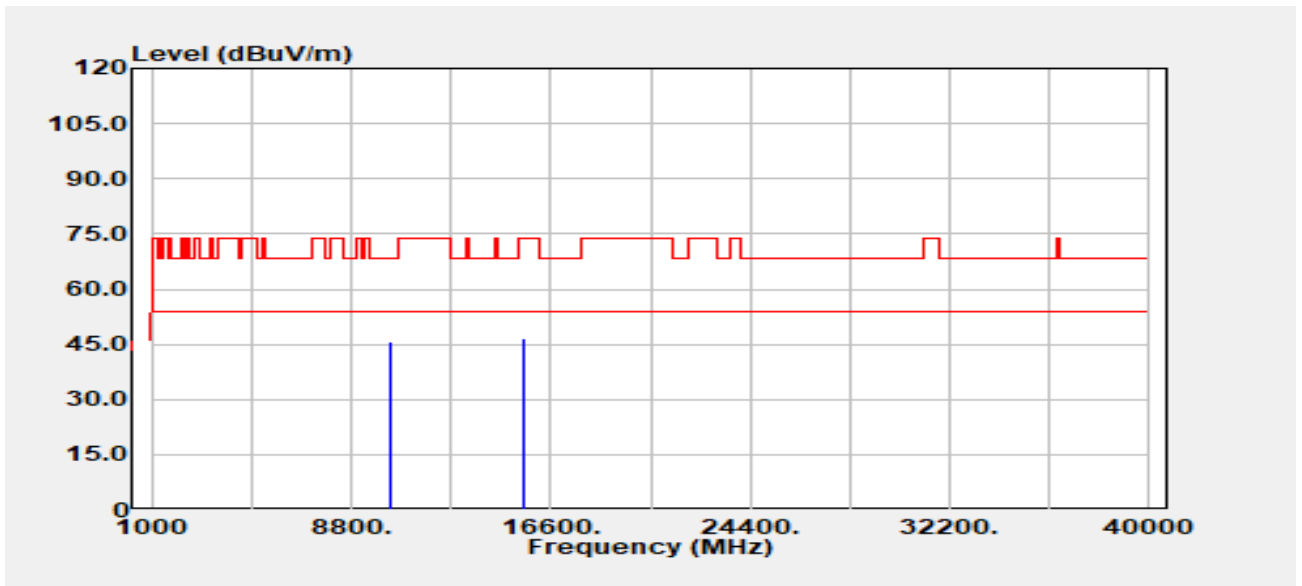


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10360.000 | Peak | 34.63 | 11.26 | 45.90 | 68.20 | -22.30 |
| 15540.000 | Peak | 34.33 | 12.38 | 46.71 | 74.00 | -27.29 |
| 15540.000 | Average | 24.72 | 12.38 | 37.10 | 54.00 | -16.90 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band1
 Frequency :5220 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :


Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

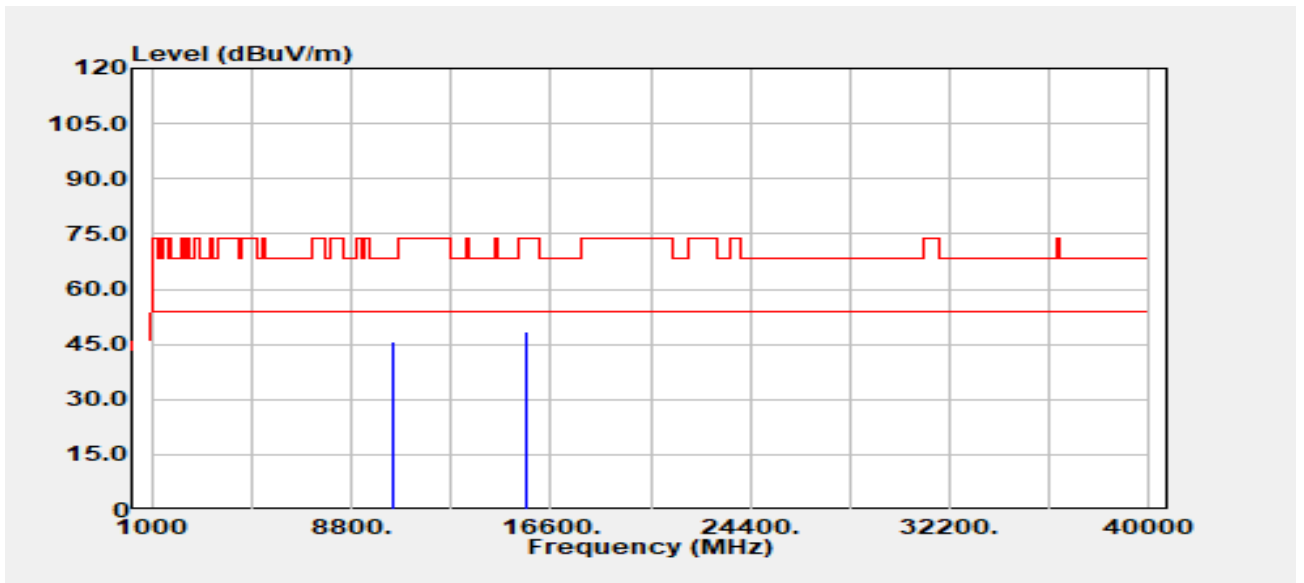

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10440.000 | Peak | 34.53 | 11.25 | 45.78 | 68.20 | -22.42 |
| 15660.000 | Peak | 34.75 | 13.53 | 48.28 | 74.00 | -25.72 |
| 15660.000 | Average | 24.86 | 13.53 | 38.38 | 54.00 | -15.62 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band1 | Temp./Humi. | :24.6/57 |
| Frequency | :5220 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

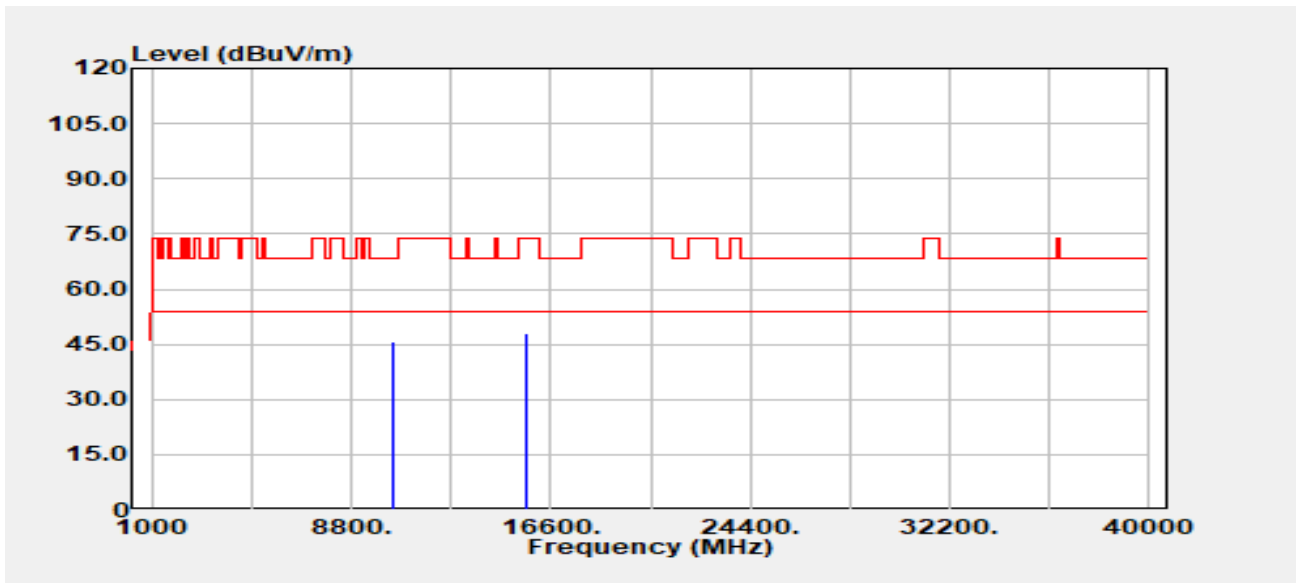


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10440.000 | Peak | 34.31 | 11.25 | 45.56 | 68.20 | -22.64 |
| 15660.000 | Peak | 34.36 | 13.53 | 47.89 | 74.00 | -26.11 |
| 15660.000 | Average | 24.98 | 13.53 | 38.51 | 54.00 | -15.49 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band1 | Temp./Humi. | :24.6/57 |
| Frequency | :5240 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

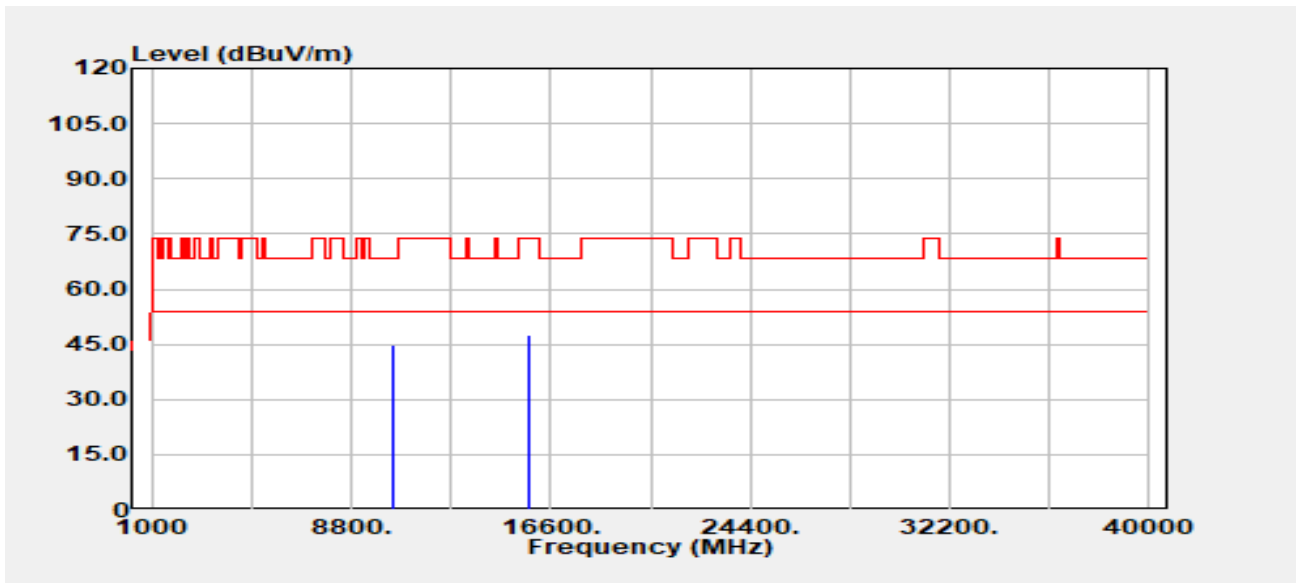


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10480.000 | Peak | 33.29 | 11.35 | 44.64 | 68.20 | -23.56 |
| 15720.000 | Peak | 33.55 | 14.11 | 47.66 | 74.00 | -26.34 |
| 15720.000 | Average | 24.45 | 14.11 | 38.55 | 54.00 | -15.45 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band1 | Temp./Humi. | :24.6/57 |
| Frequency | :5240 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

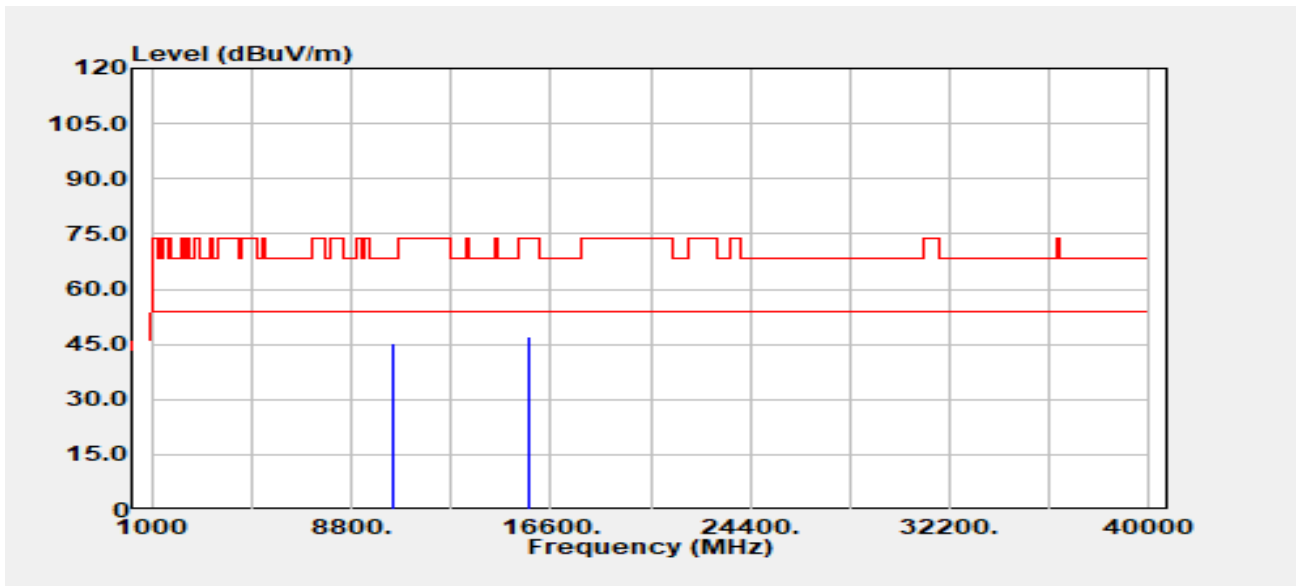


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10480.000 | Peak | 33.99 | 11.35 | 45.35 | 68.20 | -22.85 |
| 15720.000 | Peak | 33.16 | 14.11 | 47.26 | 74.00 | -26.74 |
| 15720.000 | Average | 24.34 | 14.11 | 38.45 | 54.00 | -15.55 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5180 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

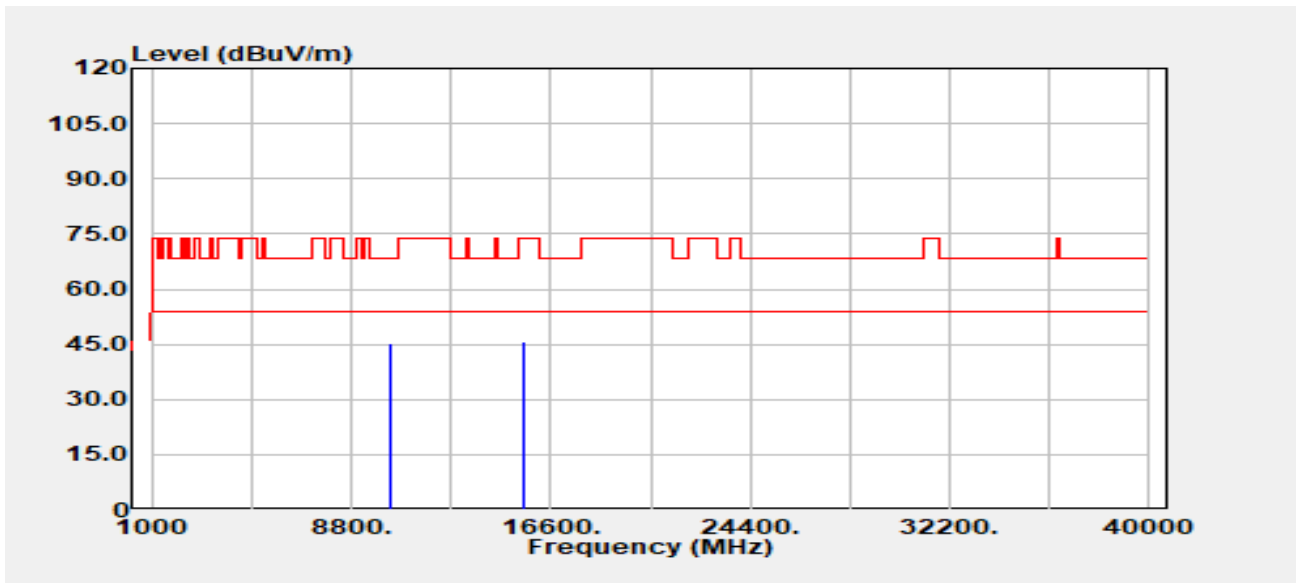


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10360.000 | Peak | 33.81 | 11.26 | 45.07 | 68.20 | -23.13 |
| 15540.000 | Peak | 33.28 | 12.38 | 45.65 | 74.00 | -28.35 |
| 15540.000 | Average | 24.05 | 12.38 | 36.43 | 54.00 | -17.57 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5180 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

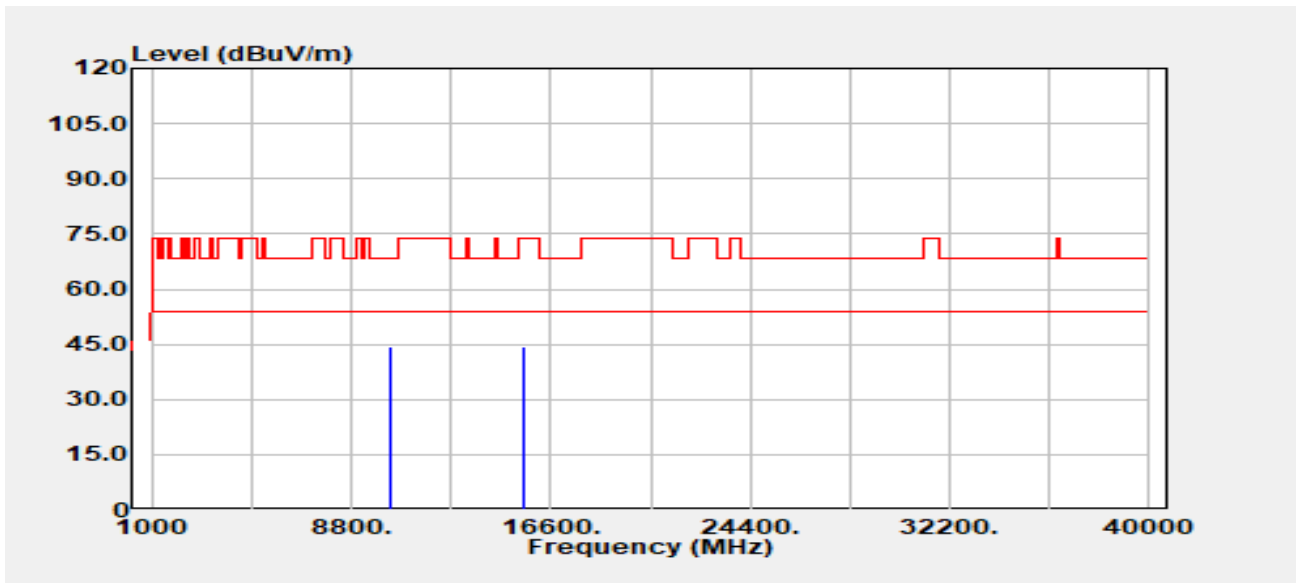


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10360.000 | Peak | 33.22 | 11.26 | 44.48 | 68.20 | -23.72 |
| 15540.000 | Peak | 32.21 | 12.38 | 44.59 | 74.00 | -29.41 |
| 15540.000 | Average | 24.09 | 12.38 | 36.47 | 54.00 | -17.53 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5220 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

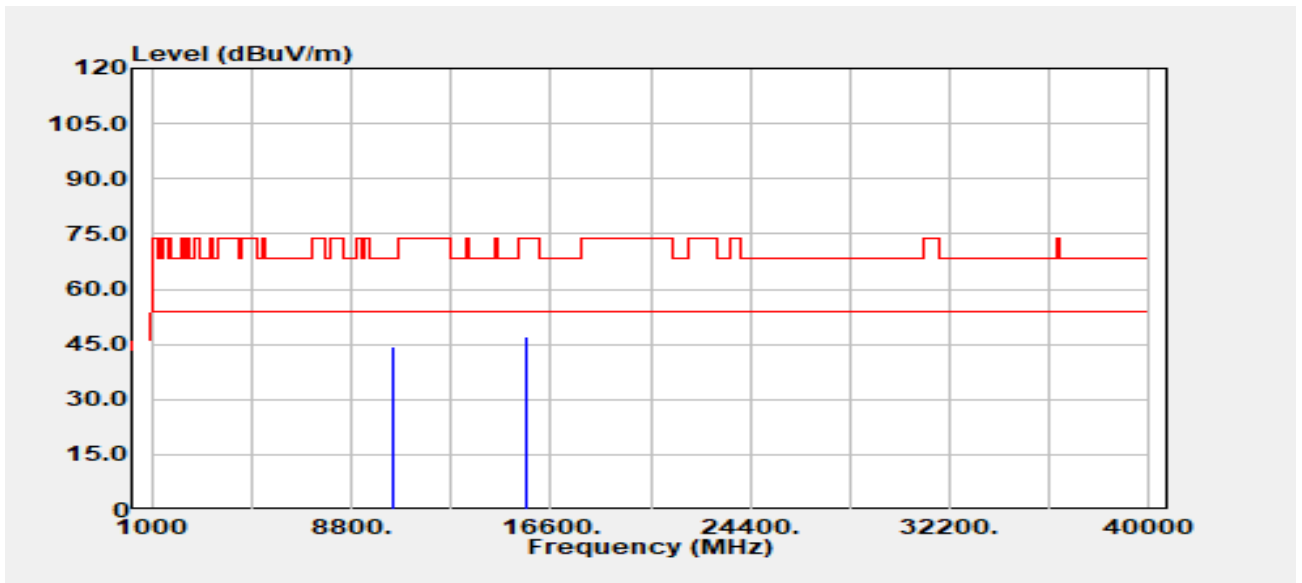


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10440.000 | Peak | 33.32 | 11.25 | 44.57 | 68.20 | -23.63 |
| 15660.000 | Peak | 33.41 | 13.53 | 46.94 | 74.00 | -27.06 |
| 15660.000 | Average | 24.13 | 13.53 | 37.65 | 54.00 | -16.35 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5220 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

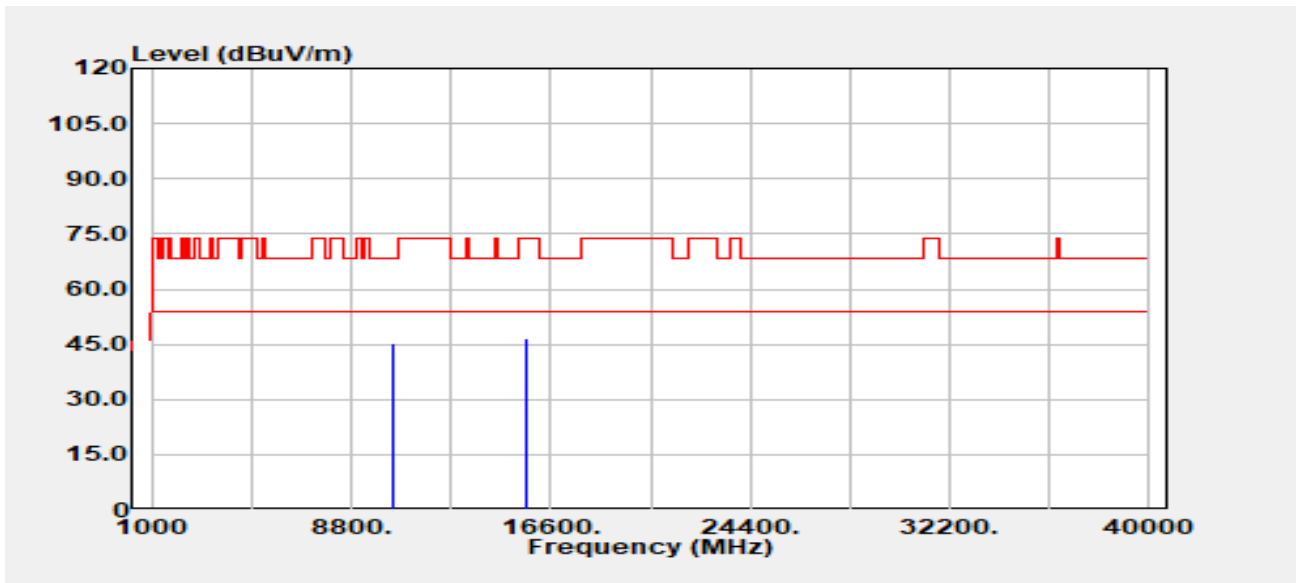


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10440.000 | Peak | 34.22 | 11.25 | 45.47 | 68.20 | -22.73 |
| 15660.000 | Peak | 33.09 | 13.53 | 46.62 | 74.00 | -27.39 |
| 15660.000 | Average | 24.03 | 13.53 | 37.55 | 54.00 | -16.45 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5240 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

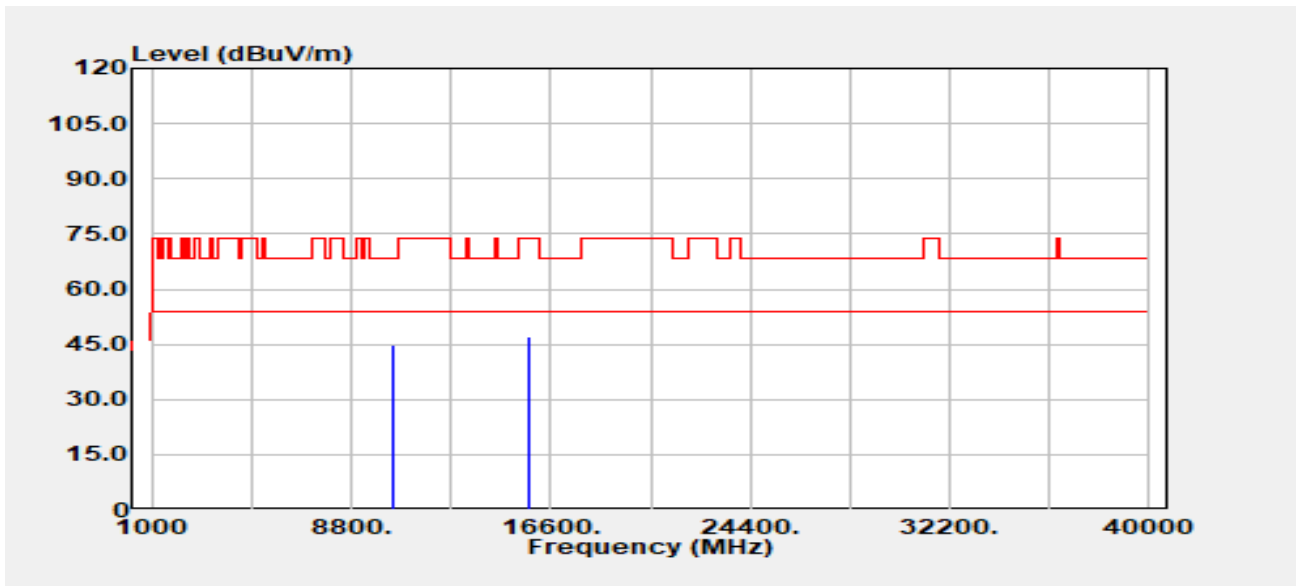


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10480.000 | Peak | 33.47 | 11.35 | 44.83 | 68.20 | -23.37 |
| 15720.000 | Peak | 32.98 | 14.11 | 47.09 | 74.00 | -26.91 |
| 15720.000 | Average | 23.66 | 14.11 | 37.77 | 54.00 | -16.23 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band1
 Frequency :5240 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

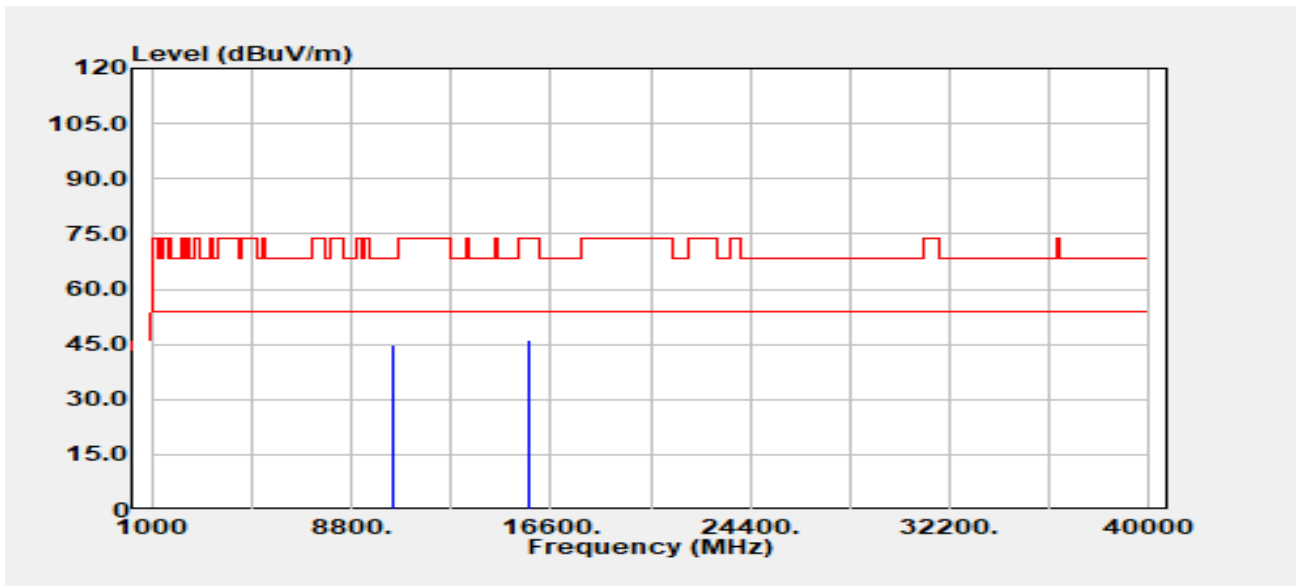


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10480.000 | Peak | 33.50 | 11.35 | 44.85 | 68.20 | -23.35 |
| 15720.000 | Peak | 32.15 | 14.11 | 46.26 | 74.00 | -27.74 |
| 15720.000 | Average | 23.67 | 14.11 | 37.78 | 54.00 | -16.22 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band1
 Frequency :5190 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

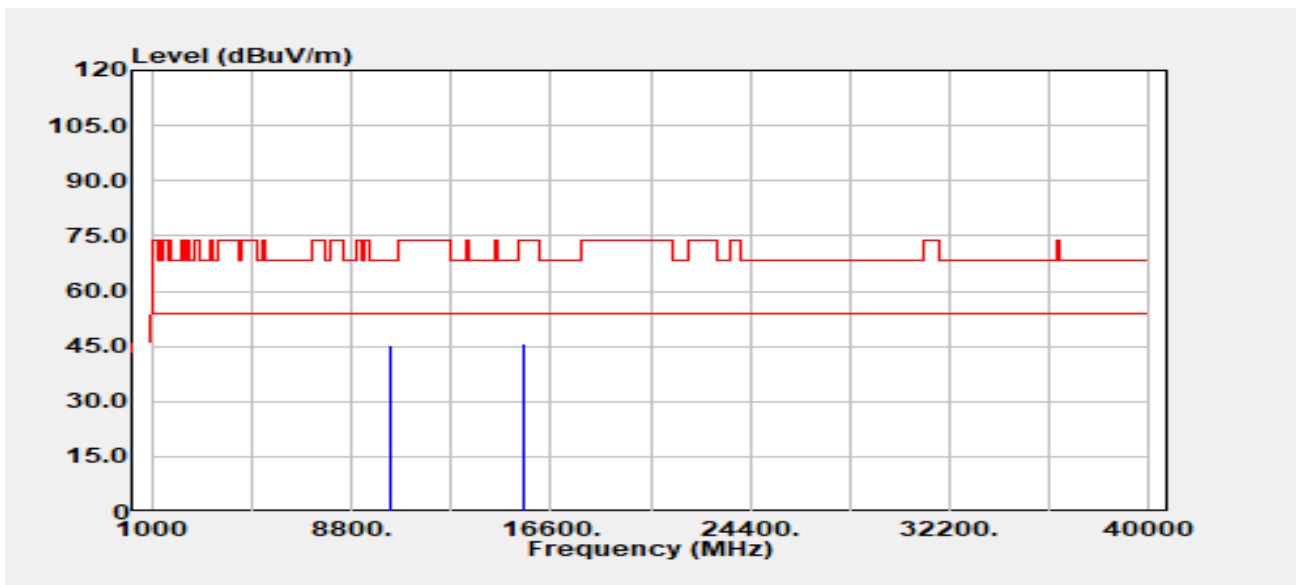


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10380.000 | Peak | 33.91 | 11.22 | 45.13 | 68.20 | -23.07 |
| 15570.000 | Peak | 33.26 | 12.41 | 45.67 | 74.00 | -28.33 |
| 15570.000 | Average | 23.96 | 12.41 | 36.37 | 54.00 | -17.63 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band1
 Frequency :5190 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

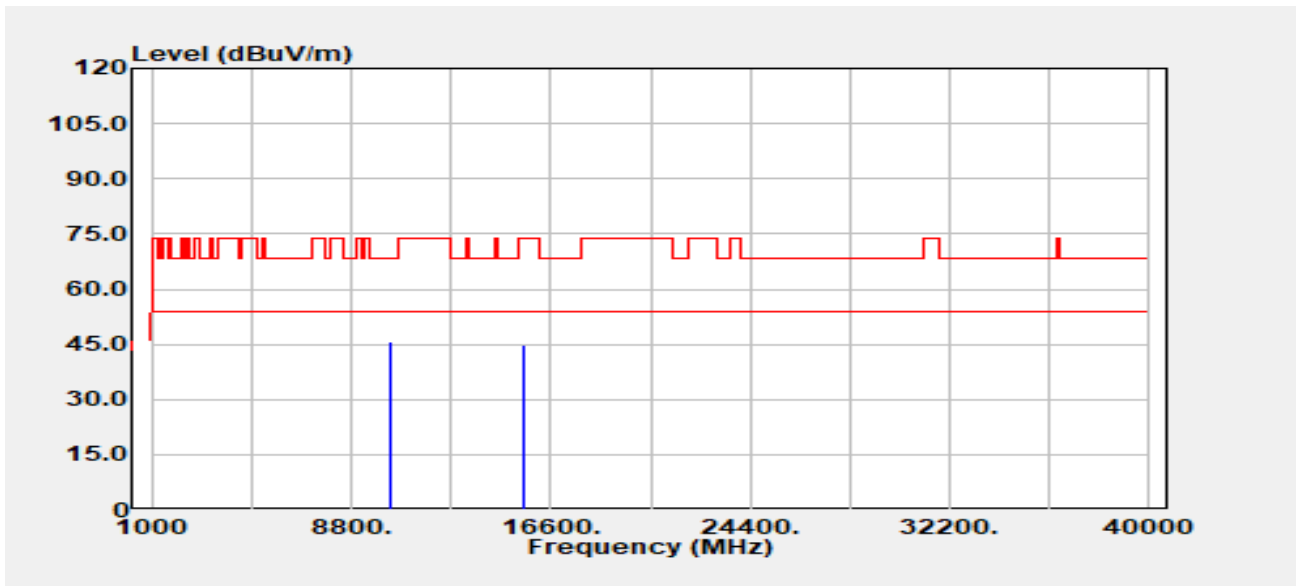


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10380.000 | Peak | 34.30 | 11.22 | 45.52 | 68.20 | -22.68 |
| 15570.000 | Peak | 32.52 | 12.41 | 44.94 | 74.00 | -29.06 |
| 15570.000 | Average | 23.95 | 12.41 | 36.36 | 54.00 | -17.64 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band1
 Frequency :5230 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

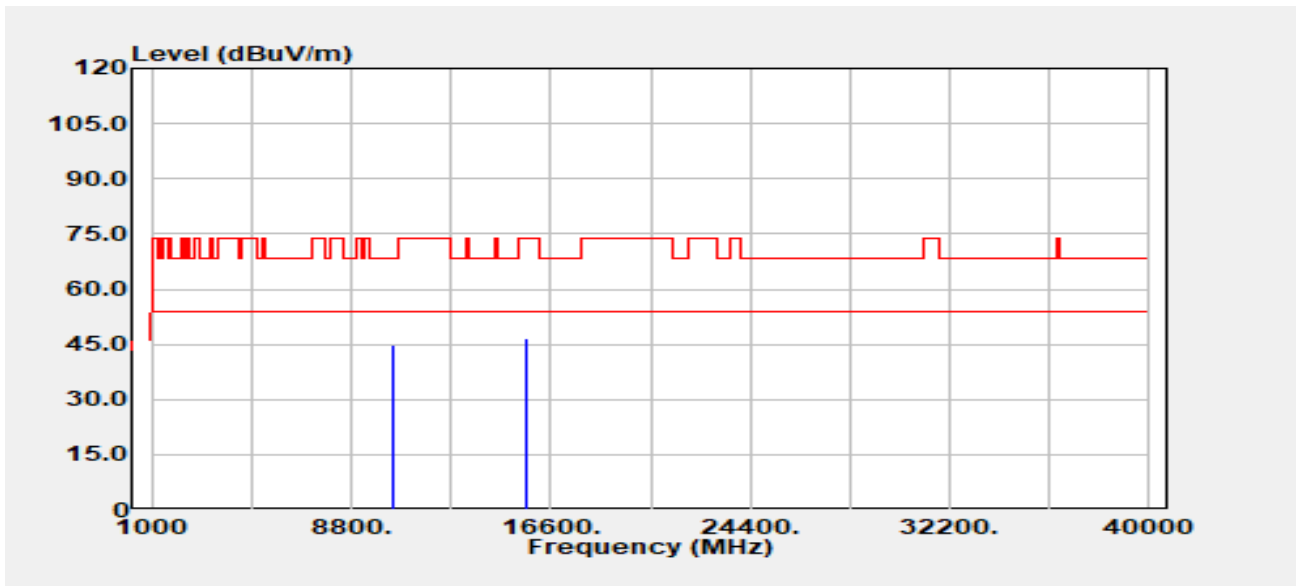


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10460.000 | Peak | 33.68 | 11.30 | 44.97 | 68.20 | -23.23 |
| 15690.000 | Peak | 32.71 | 13.90 | 46.62 | 74.00 | -27.38 |
| 15690.000 | Average | 23.80 | 13.90 | 37.70 | 54.00 | -16.30 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band1
 Frequency :5230 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

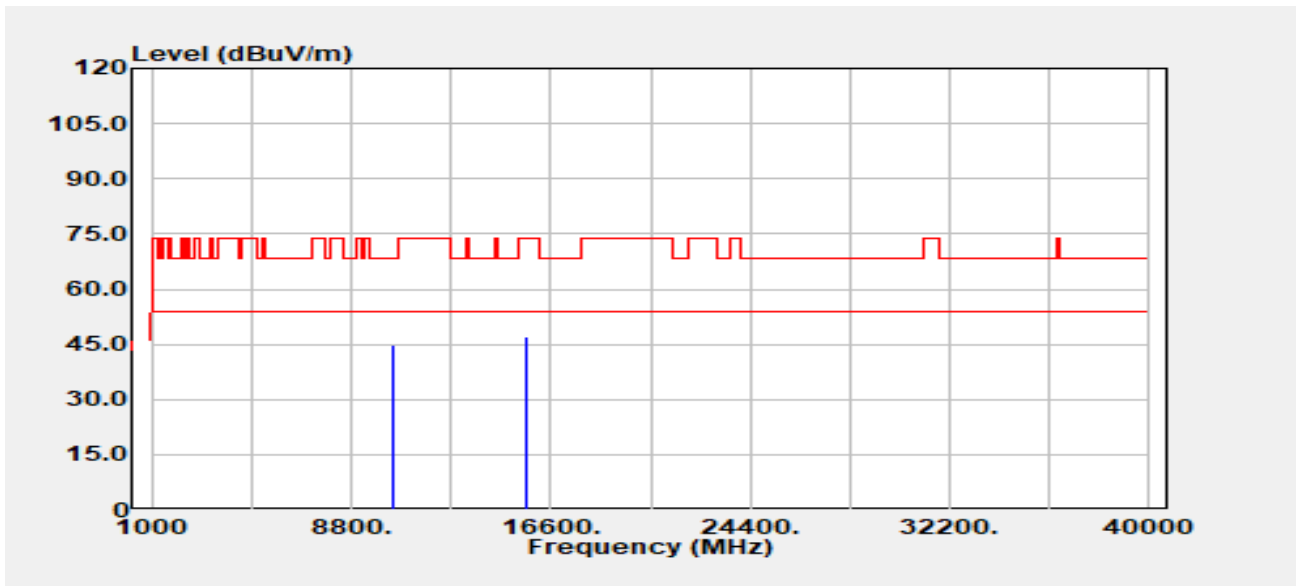


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10460.000 | Peak | 33.62 | 11.30 | 44.92 | 68.20 | -23.28 |
| 15690.000 | Peak | 33.39 | 13.90 | 47.30 | 74.00 | -26.70 |
| 15690.000 | Average | 23.88 | 13.90 | 37.79 | 54.00 | -16.21 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band1
 Frequency :5210 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :


Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

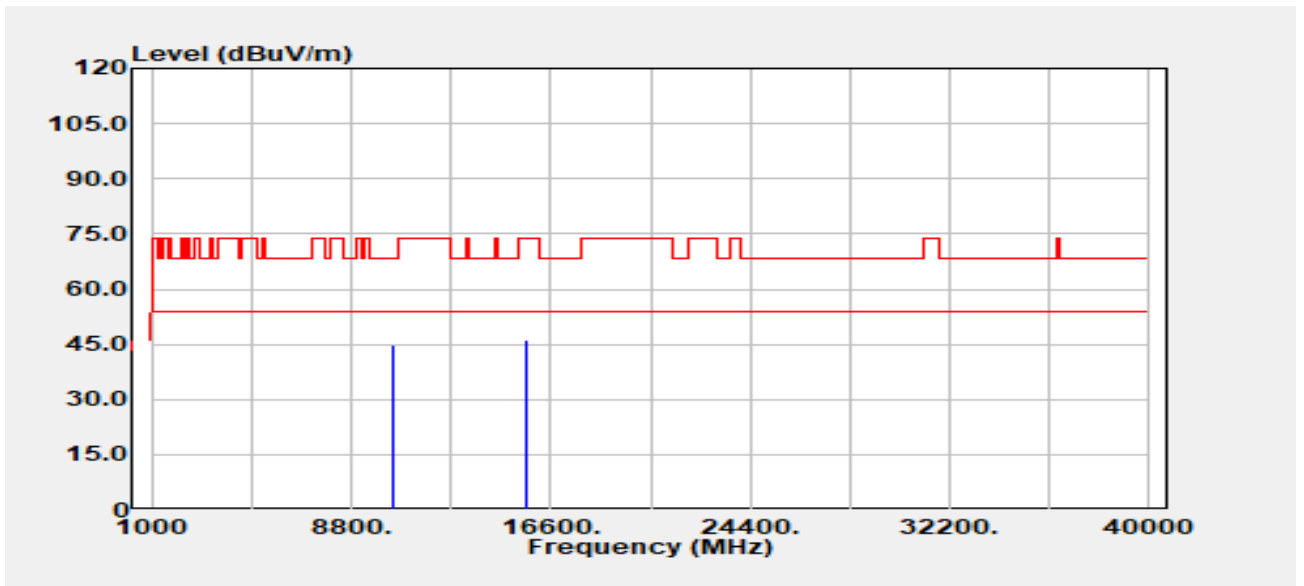

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10420.000 | Peak | 33.85 | 11.21 | 45.06 | 68.20 | -23.14 |
| 15630.000 | Peak | 33.21 | 13.06 | 46.26 | 74.00 | -27.74 |
| 15630.000 | Average | 24.68 | 13.06 | 37.74 | 54.00 | -16.26 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5260 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

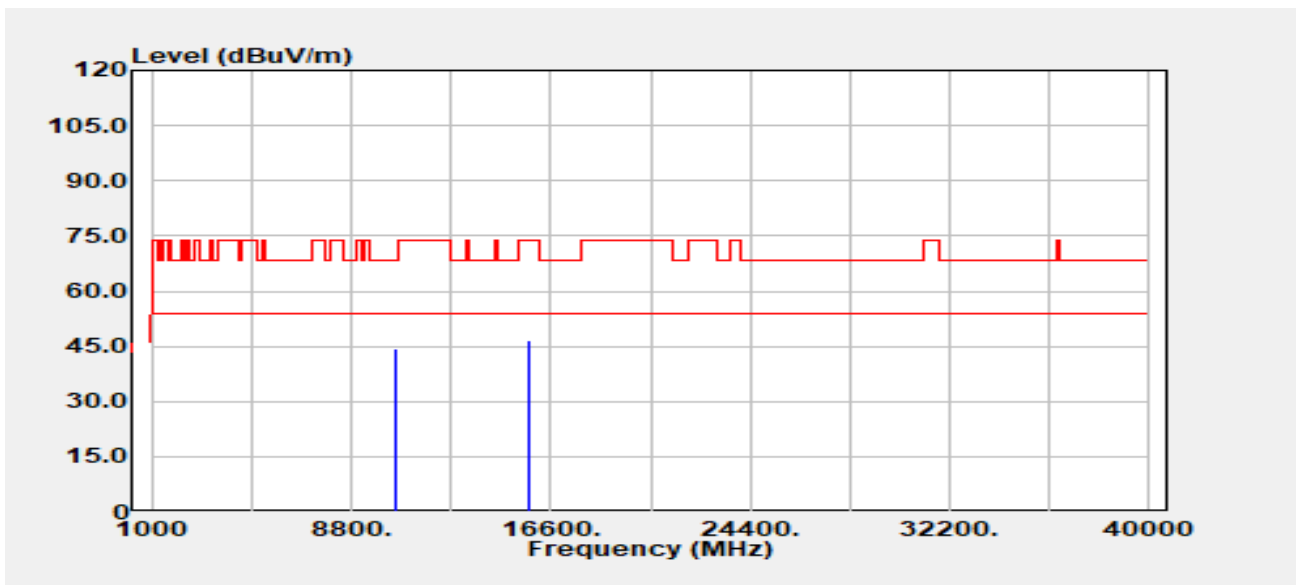


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10520.000 | Peak | 32.82 | 11.41 | 44.23 | 68.20 | -23.97 |
| 15780.000 | Peak | 32.61 | 14.08 | 46.68 | 74.00 | -27.32 |
| 15780.000 | Average | 23.00 | 14.08 | 37.08 | 54.00 | -16.92 |

Report No.: TMWK2308002691KR


Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5260 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

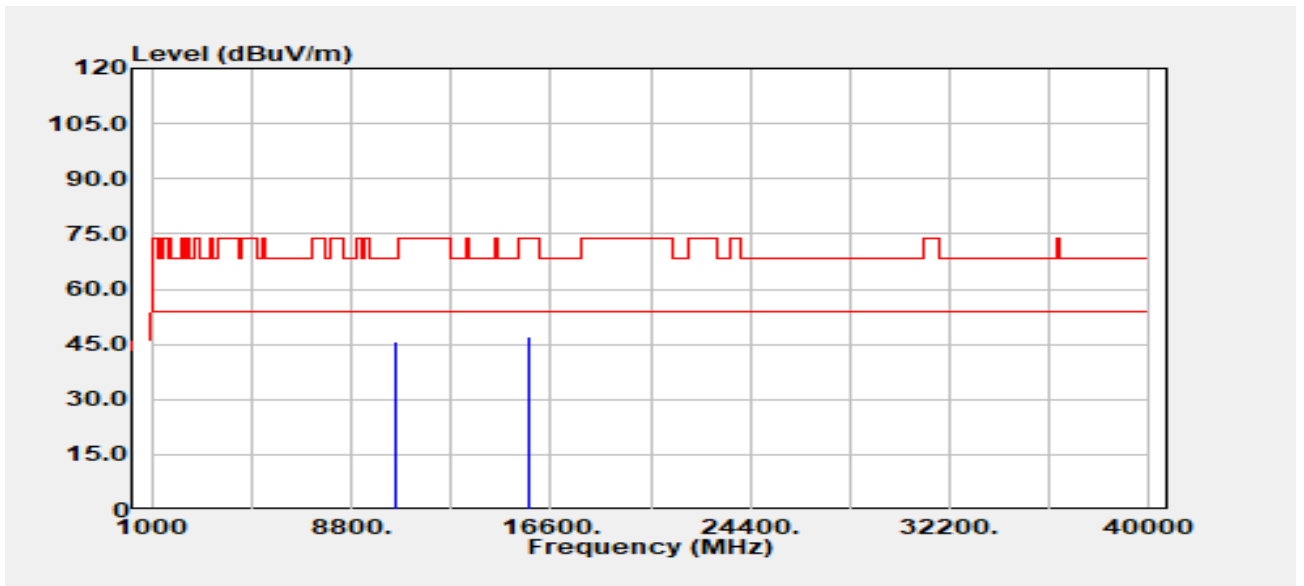

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10520.000 | Peak | 34.17 | 11.41 | 45.58 | 68.20 | -22.62 |
| 15780.000 | Peak | 33.16 | 14.08 | 47.23 | 74.00 | -26.77 |
| 15780.000 | Average | 22.93 | 14.08 | 37.00 | 54.00 | -17.00 |

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5300 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

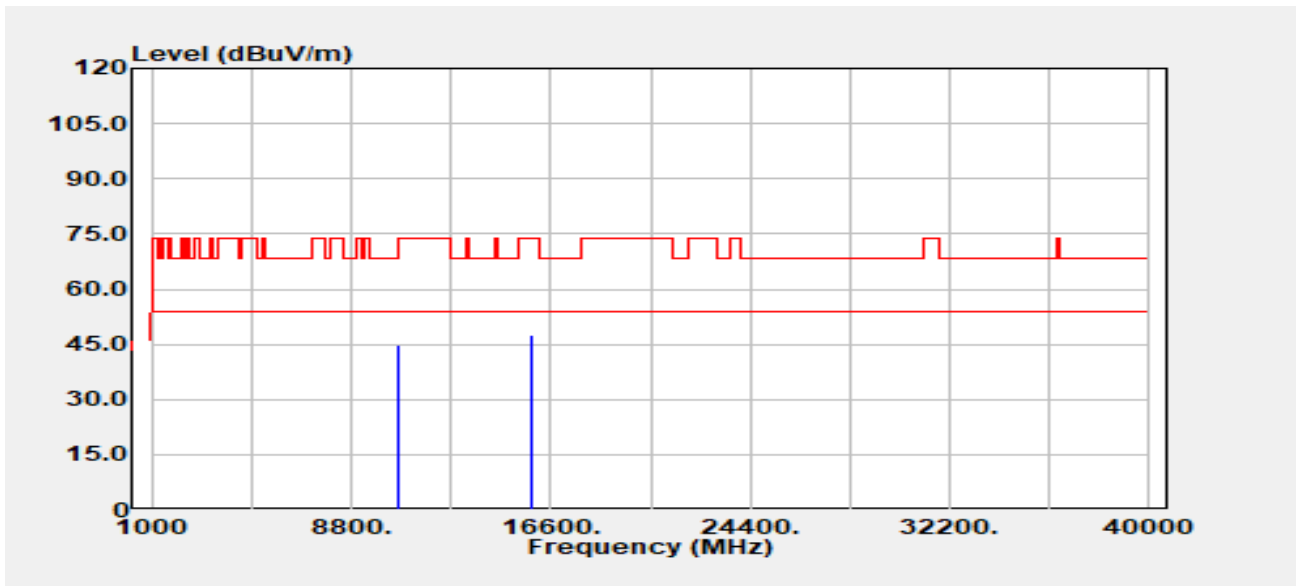


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10600.000 | Peak | 33.28 | 11.53 | 44.81 | 68.20 | -23.39 |
| 15900.000 | Peak | 33.18 | 14.45 | 47.63 | 74.00 | -26.37 |
| 15900.000 | Average | 23.58 | 14.45 | 38.03 | 54.00 | -15.97 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band2
 Frequency :5300 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

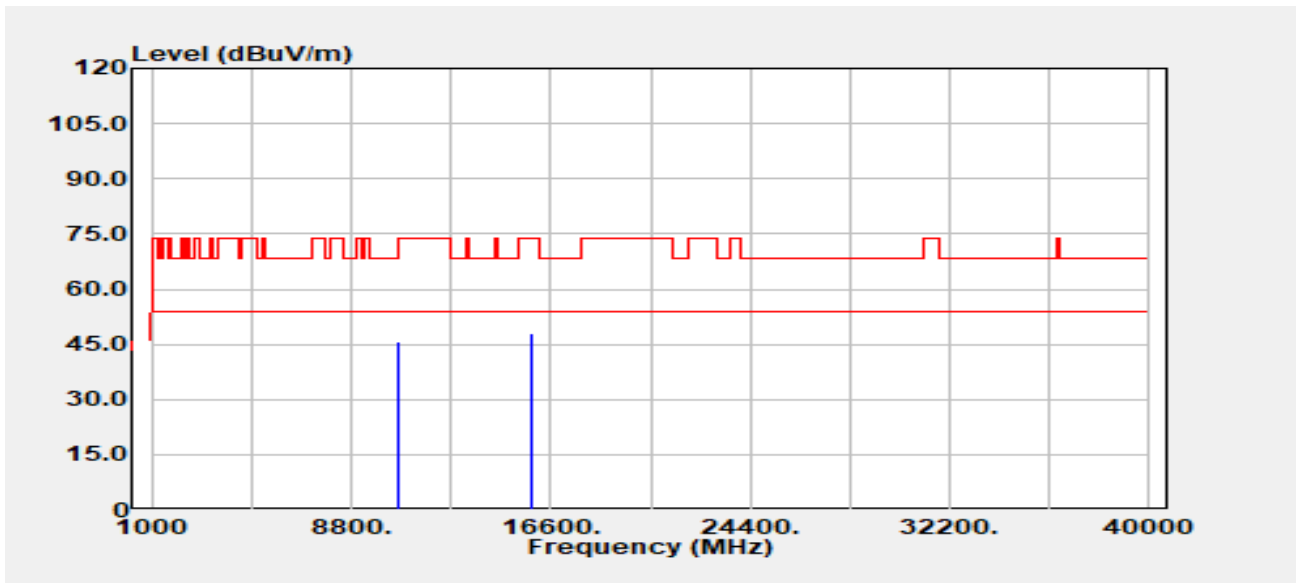


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10600.000 | Peak | 34.20 | 11.53 | 45.73 | 68.20 | -22.47 |
| 15900.000 | Peak | 33.47 | 14.45 | 47.92 | 74.00 | -26.08 |
| 15900.000 | Average | 23.59 | 14.45 | 38.04 | 54.00 | -15.96 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band2 | Temp./Humi. | :24.6/58 |
| Frequency | :5320 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

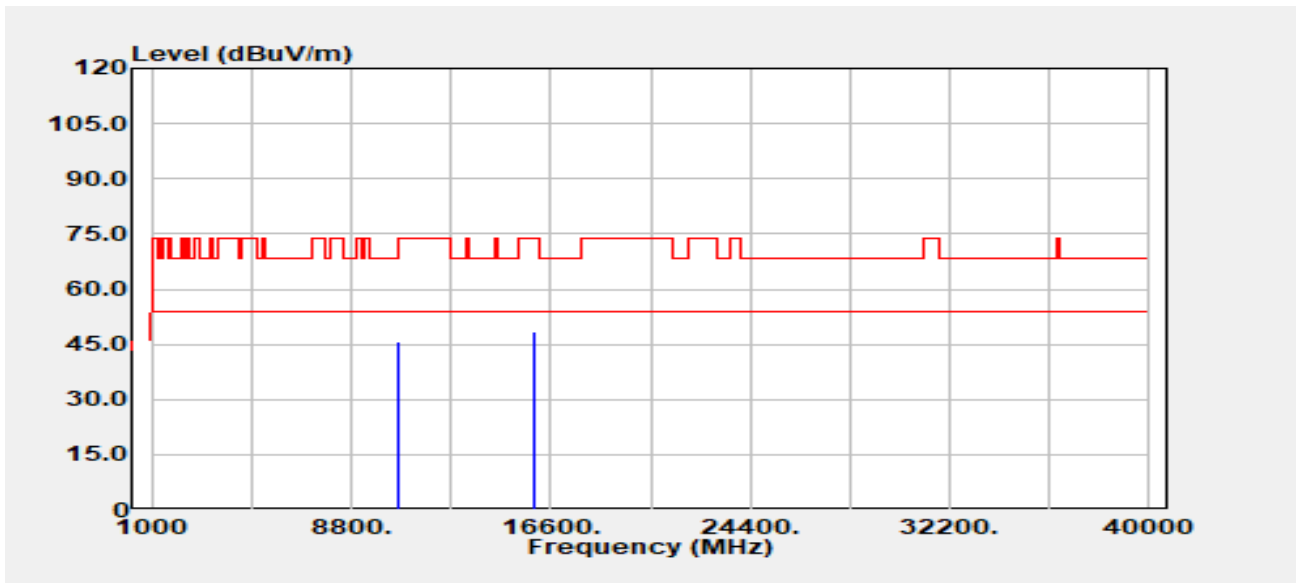


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10640.000 | Peak | 34.16 | 11.50 | 45.66 | 74.00 | -28.34 |
| 10640.000 | Average | 23.93 | 11.50 | 35.44 | 54.00 | -18.56 |
| 15960.000 | Peak | 33.33 | 15.09 | 48.42 | 74.00 | -25.58 |
| 15960.000 | Average | 23.04 | 15.09 | 38.13 | 54.00 | -15.87 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band2
 Frequency :5320 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

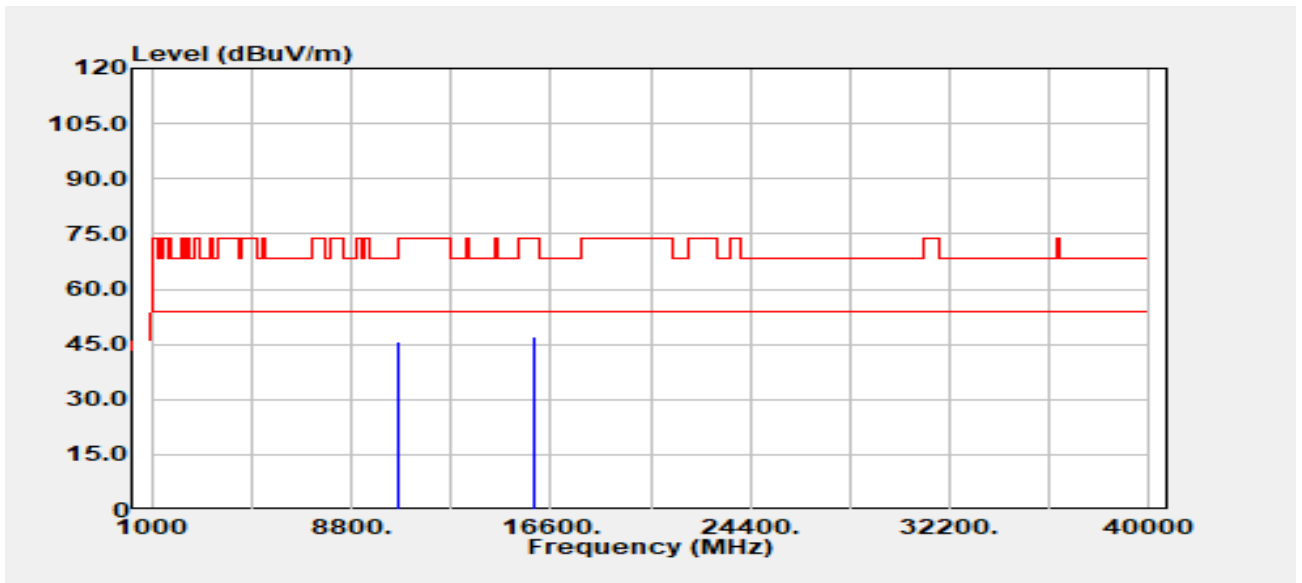


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10640.000 | Peak | 34.15 | 11.50 | 45.65 | 74.00 | -28.35 |
| 10640.000 | Average | 23.90 | 11.50 | 35.41 | 54.00 | -18.59 |
| 15960.000 | Peak | 32.22 | 15.09 | 47.31 | 74.00 | -26.69 |
| 15960.000 | Average | 23.11 | 15.09 | 38.20 | 54.00 | -15.80 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5260 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

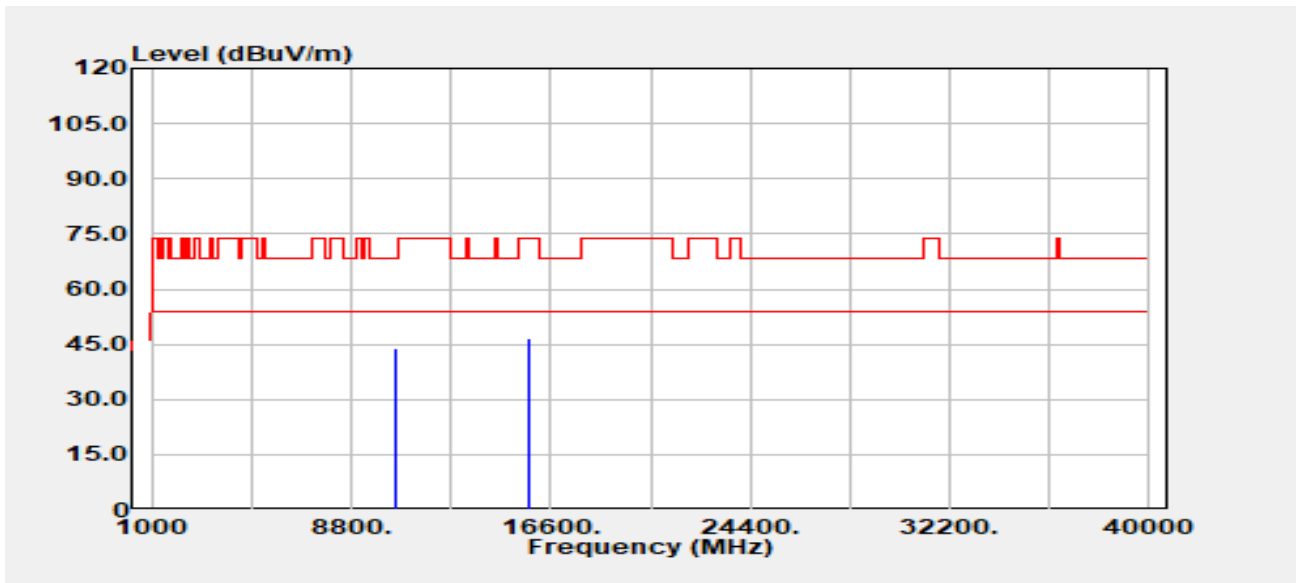


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10520.000 | Peak | 32.72 | 11.41 | 44.13 | 68.20 | -24.07 |
| 15780.000 | Peak | 32.63 | 14.08 | 46.70 | 74.00 | -27.30 |
| 15780.000 | Average | 22.72 | 14.08 | 36.79 | 54.00 | -17.21 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5260 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

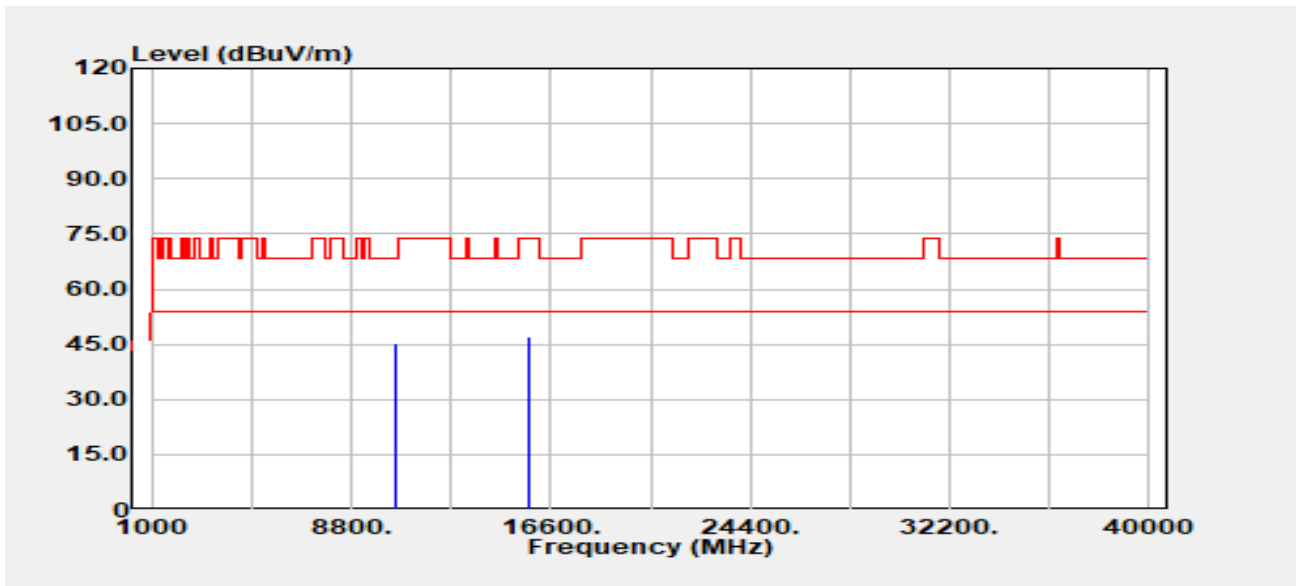


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10520.000 | Peak | 33.89 | 11.41 | 45.30 | 68.20 | -22.90 |
| 15780.000 | Peak | 33.20 | 14.08 | 47.28 | 74.00 | -26.72 |
| 15780.000 | Average | 22.71 | 14.08 | 36.78 | 54.00 | -17.22 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5300 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

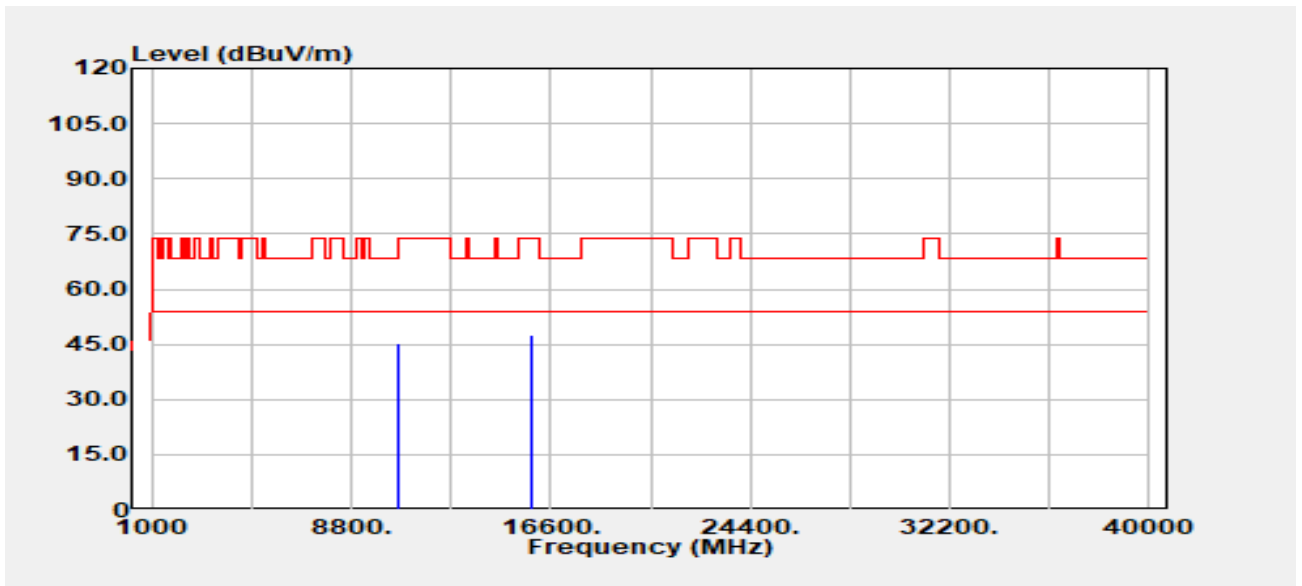


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10600.000 | Peak | 33.69 | 11.53 | 45.22 | 68.20 | -22.98 |
| 15900.000 | Peak | 33.11 | 14.45 | 47.56 | 74.00 | -26.44 |
| 15900.000 | Average | 23.43 | 14.45 | 37.88 | 54.00 | -16.12 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5300 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

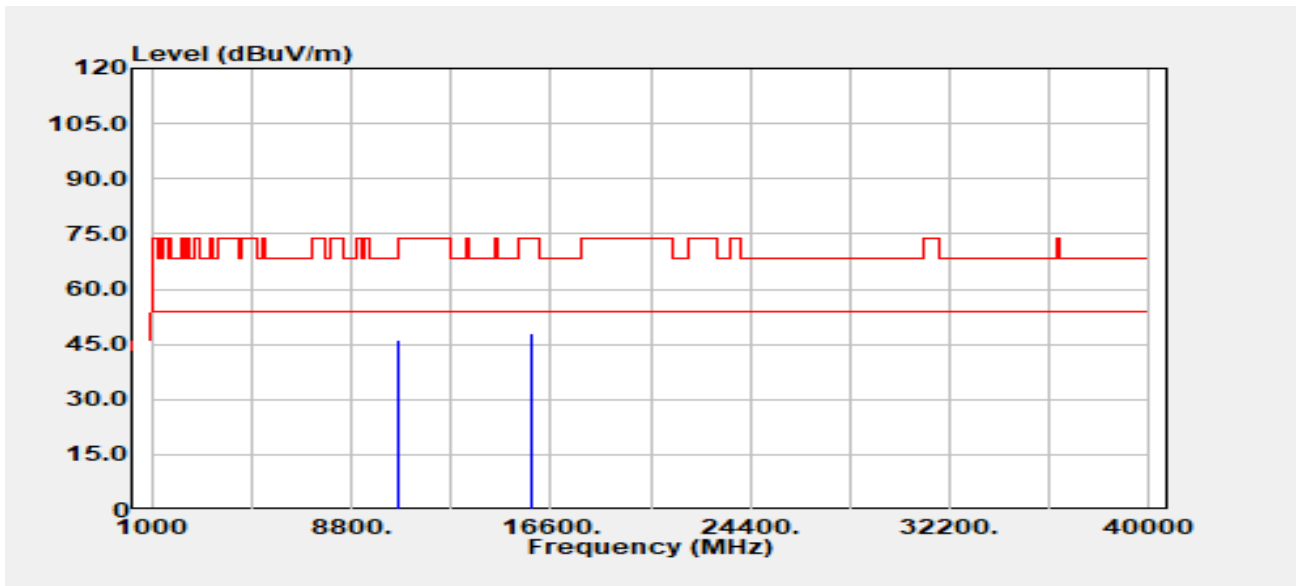


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10600.000 | Peak | 34.65 | 11.53 | 46.18 | 68.20 | -22.02 |
| 15900.000 | Peak | 33.49 | 14.45 | 47.94 | 74.00 | -26.06 |
| 15900.000 | Average | 23.47 | 14.45 | 37.92 | 54.00 | -16.08 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5320 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

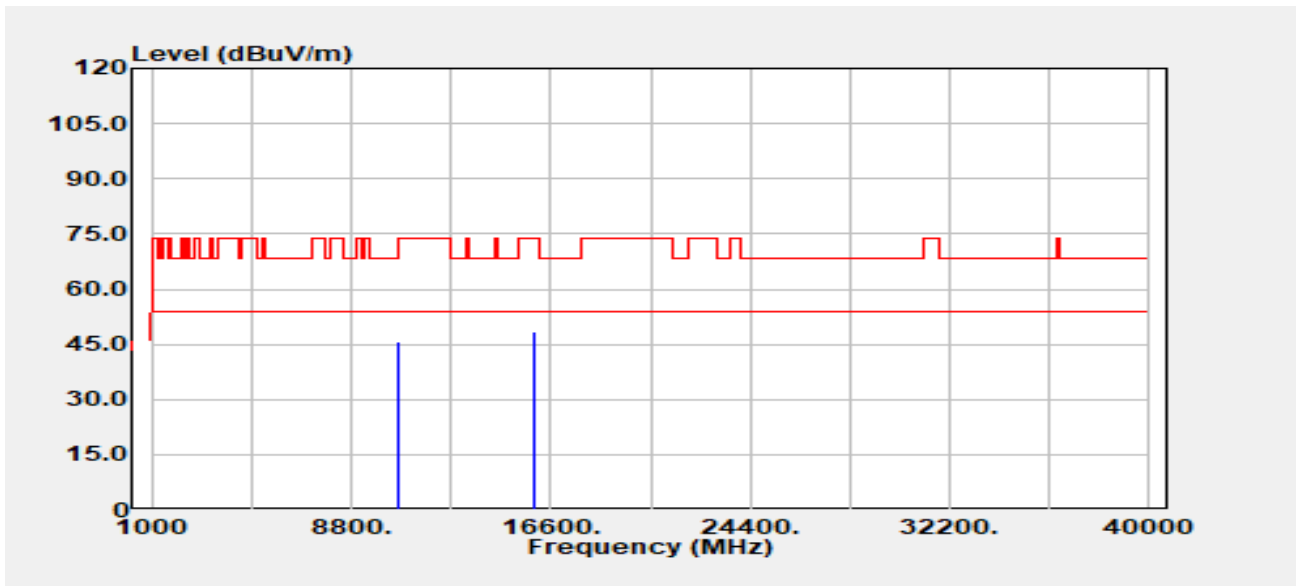


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10640.000 | Peak | 34.24 | 11.50 | 45.74 | 74.00 | -28.26 |
| 10640.000 | Average | 23.90 | 11.50 | 35.40 | 54.00 | -18.60 |
| 15960.000 | Peak | 33.57 | 15.09 | 48.66 | 74.00 | -25.34 |
| 15960.000 | Average | 23.10 | 15.09 | 38.19 | 54.00 | -15.81 |

Report No.: TMWK2308002691KR

Rev.: 00


Project Number :TM-2308000057P
 Operation Band :802.11n20/Band2
 Frequency :5320 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

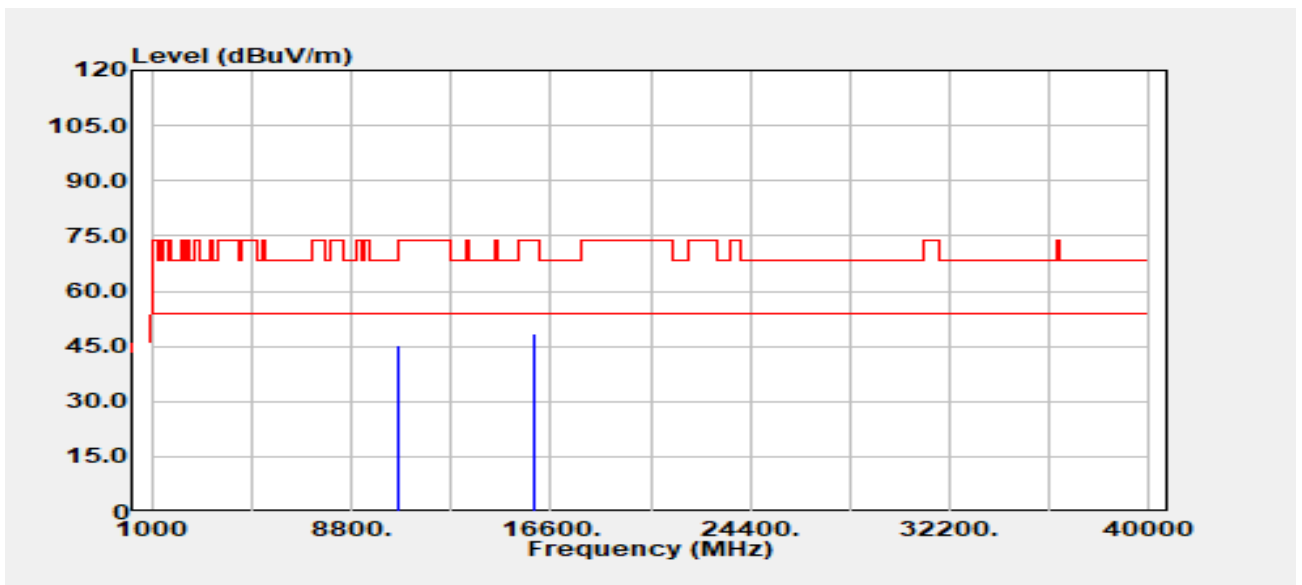

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10640.000 | Peak | 33.81 | 11.50 | 45.31 | 74.00 | -28.69 |
| 10640.000 | Average | 23.88 | 11.50 | 35.38 | 54.00 | -18.62 |
| 15960.000 | Peak | 33.27 | 15.09 | 48.36 | 74.00 | -25.64 |
| 15960.000 | Average | 23.07 | 15.09 | 38.16 | 54.00 | -15.84 |


| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11n40/Band2 | Temp./Humi. | :24.6/57 |
| Frequency | :5270 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

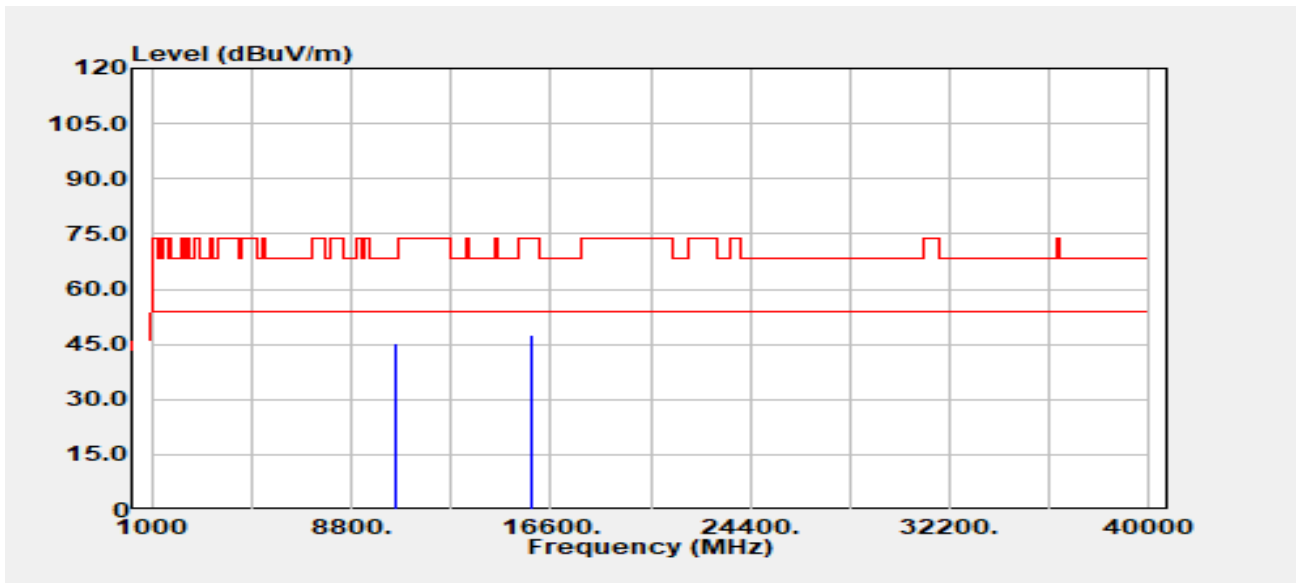

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10540.000 | Peak | 33.78 | 11.41 | 45.19 | 68.20 | -23.01 |
| 15810.000 | Peak | 33.33 | 14.04 | 47.37 | 74.00 | -26.63 |
| 15810.000 | Average | 24.60 | 14.04 | 38.64 | 54.00 | -15.36 |

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band2
 Frequency :5270 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

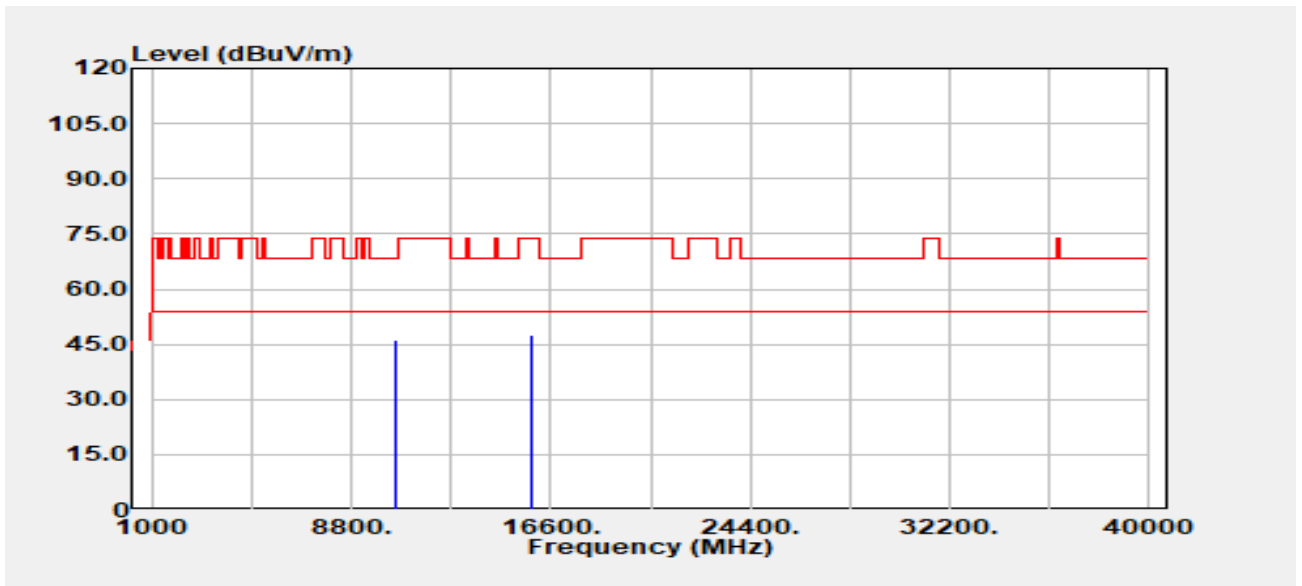


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10540.000 | Peak | 34.79 | 11.41 | 46.20 | 68.20 | -22.00 |
| 15810.000 | Peak | 33.58 | 14.04 | 47.62 | 74.00 | -26.38 |
| 15810.000 | Average | 24.50 | 14.04 | 38.54 | 54.00 | -15.46 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11n40/Band2 | Temp./Humi. | :24.6/57 |
| Frequency | :5310 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

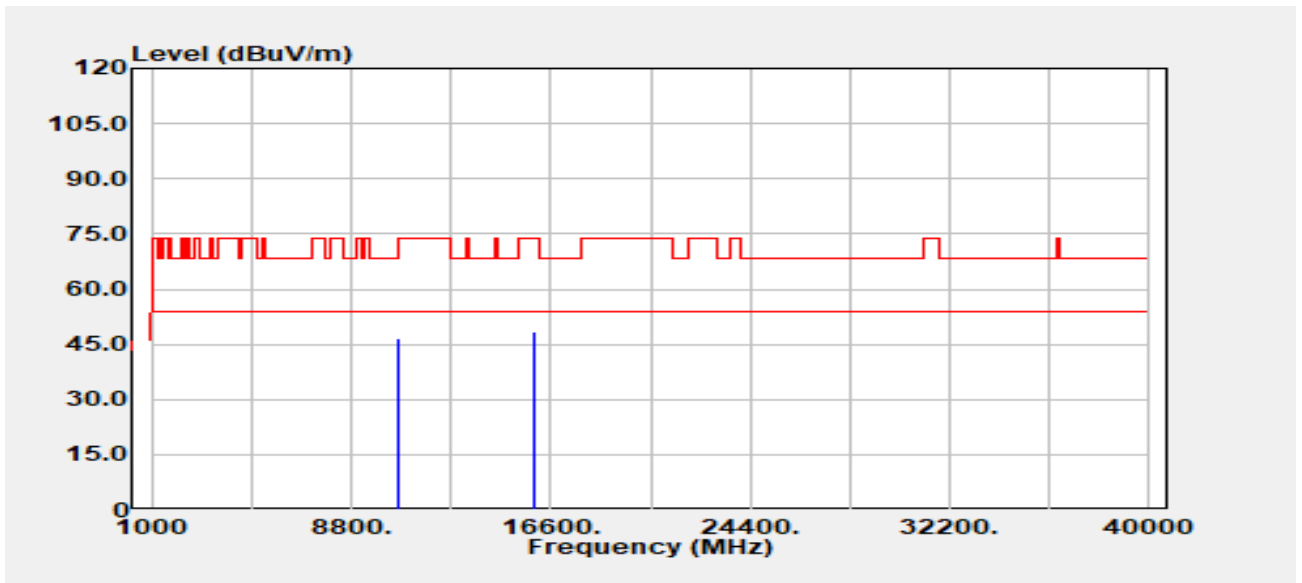


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10620.000 | Peak | 34.93 | 11.52 | 46.45 | 74.00 | -27.55 |
| 10620.000 | Average | 25.39 | 11.52 | 36.91 | 54.00 | -17.09 |
| 15930.000 | Peak | 33.73 | 14.81 | 48.54 | 74.00 | -25.46 |
| 15930.000 | Average | 24.87 | 14.81 | 39.68 | 54.00 | -14.32 |

Report No.: TMWK2308002691KR

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band2
 Frequency :5310 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

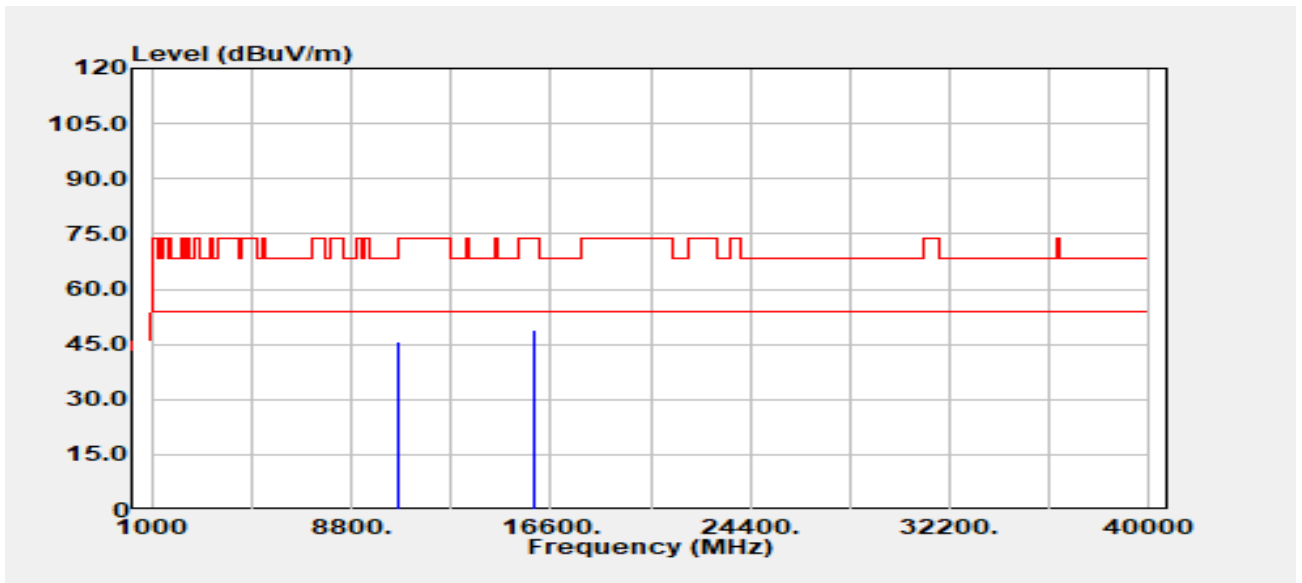


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10620.000 | Peak | 34.38 | 11.52 | 45.90 | 74.00 | -28.10 |
| 10620.000 | Average | 25.48 | 11.52 | 37.00 | 54.00 | -17.00 |
| 15930.000 | Peak | 34.12 | 14.81 | 48.94 | 74.00 | -25.06 |
| 15930.000 | Average | 24.38 | 14.81 | 39.19 | 54.00 | -14.81 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band2
 Frequency :5290 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

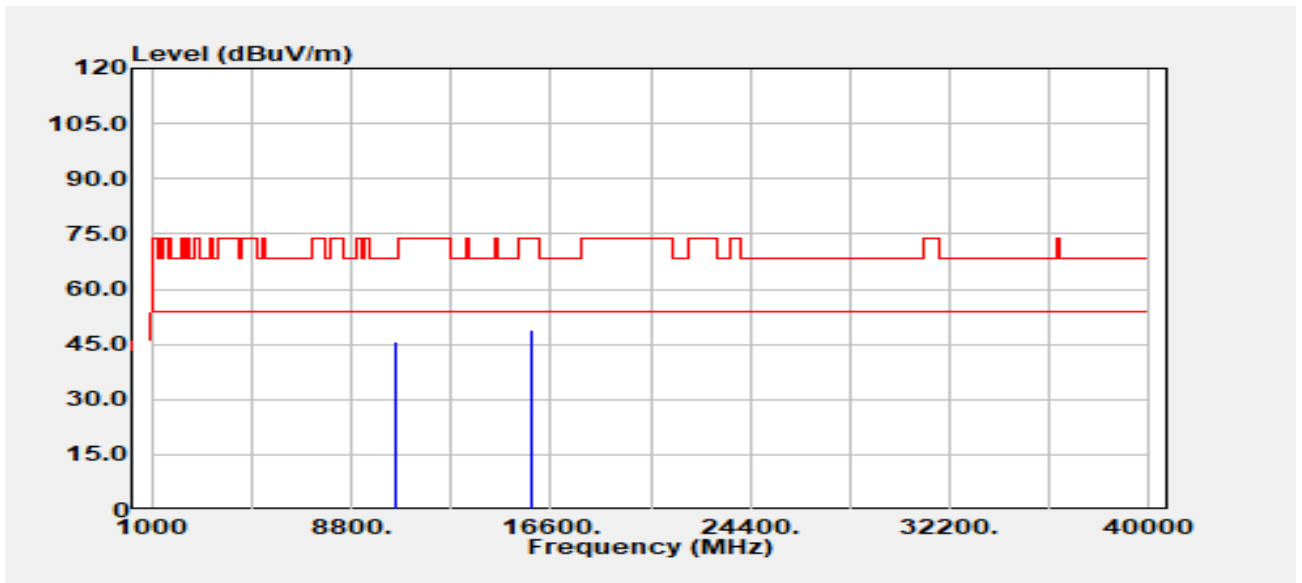


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10580.000 | Peak | 34.12 | 11.48 | 45.60 | 68.20 | -22.60 |
| 15870.000 | Peak | 34.39 | 14.34 | 48.73 | 74.00 | -25.27 |
| 15870.000 | Average | 24.62 | 14.34 | 38.96 | 54.00 | -15.04 |

Report No.: TMWK2308002691KR

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band2
 Frequency :5290 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

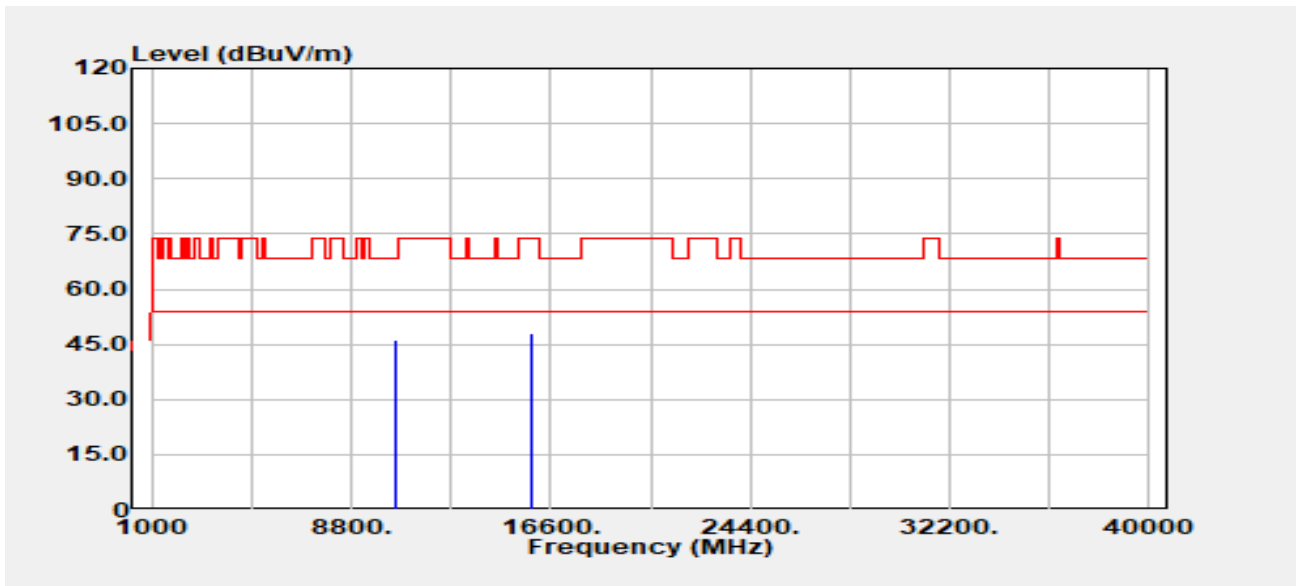


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 10580.000 | Peak | 34.85 | 11.48 | 46.33 | 68.20 | -21.87 |
| 15870.000 | Peak | 33.48 | 14.34 | 47.82 | 74.00 | -26.18 |
| 15870.000 | Average | 24.64 | 14.34 | 38.98 | 54.00 | -15.02 |

Report No.: TMWK2308002691KR


Rev.: 00

| | | | |
|----------------|-----------------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band2_BT EDR | Temp./Humi. | :24.6/58 |
| Frequency | :5290 MHz_2480 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

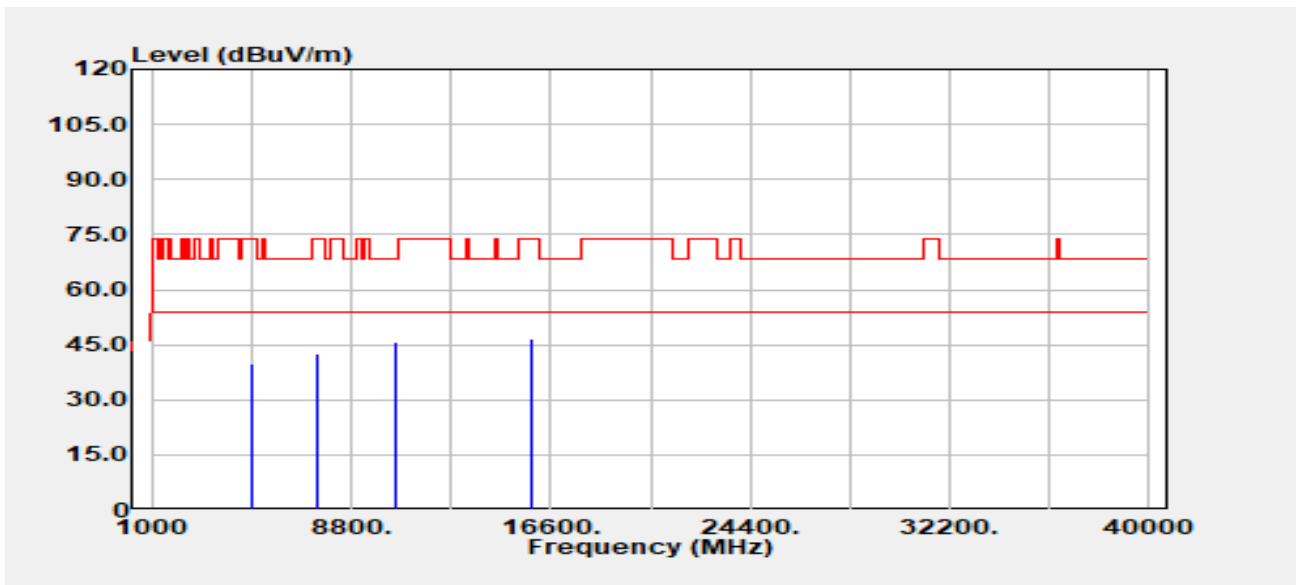

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBUV | Factor dB | Actual FS dBUV/m | Limit dBUV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 4960.000 | Peak | 37.78 | 2.25 | 40.03 | 74.00 | -33.97 |
| 4960.000 | Average | 27.97 | 2.25 | 30.22 | 54.00 | -23.78 |
| 7440.000 | Peak | 34.94 | 7.64 | 42.57 | 74.00 | -31.43 |
| 7440.000 | Average | 24.70 | 7.64 | 32.34 | 54.00 | -21.66 |
| 10580.000 | Peak | 34.09 | 11.48 | 45.57 | 68.20 | -22.63 |
| 15870.000 | Peak | 32.20 | 14.34 | 46.55 | 74.00 | -27.45 |
| 15870.000 | Average | 23.37 | 14.34 | 37.71 | 54.00 | -16.29 |


| | | | |
|----------------|-----------------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band2_BT EDR | Temp./Humi. | :24.6/58 |
| Frequency | :5290 MHz_2480 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

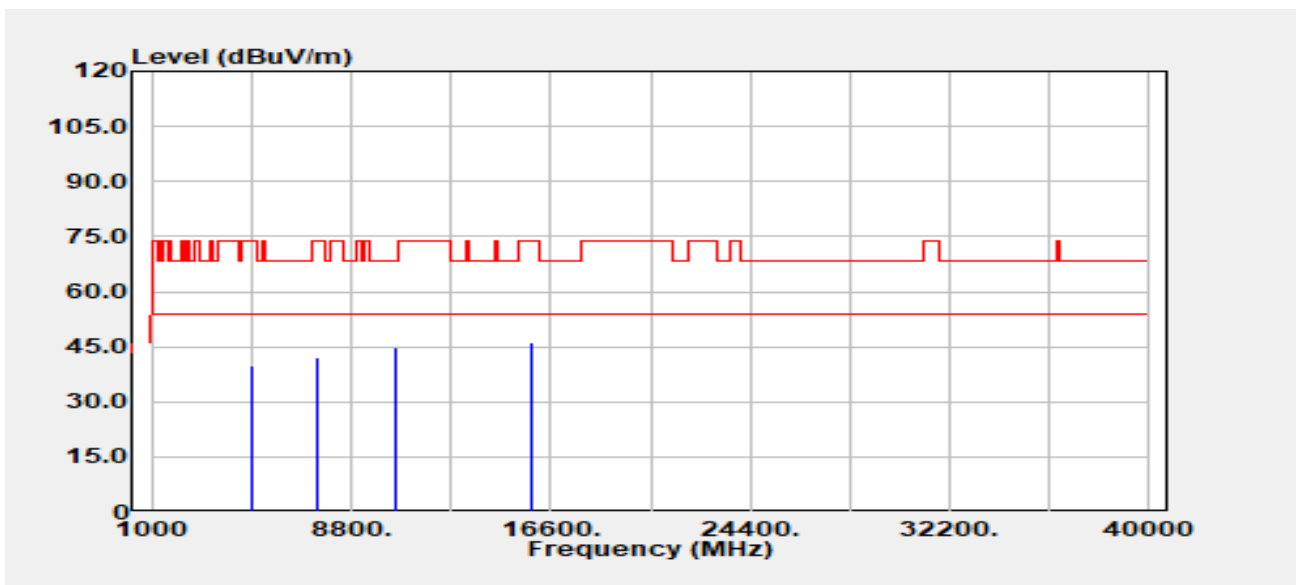

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level d μ V | Factor dB | Actual FS d μ V/m | Limit d μ V/m | Margin dB |
|--------------|------------------------------|-------------------------------------|--------------|-----------------------------|----------------------|--------------|
| 4960.000 | Peak | 37.64 | 2.25 | 39.89 | 74.00 | -34.11 |
| 4960.000 | Average | 28.20 | 2.25 | 30.44 | 54.00 | -23.56 |
| 7440.000 | Peak | 34.50 | 7.64 | 42.13 | 74.00 | -31.87 |
| 7440.000 | Average | 24.68 | 7.64 | 32.32 | 54.00 | -21.68 |
| 10580.000 | Peak | 33.36 | 11.48 | 44.84 | 68.20 | -23.36 |
| 15870.000 | Peak | 32.06 | 14.34 | 46.40 | 74.00 | -27.60 |
| 15870.000 | Average | 23.11 | 14.34 | 37.45 | 54.00 | -16.55 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :24.6/58 |
| Frequency | :5500 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

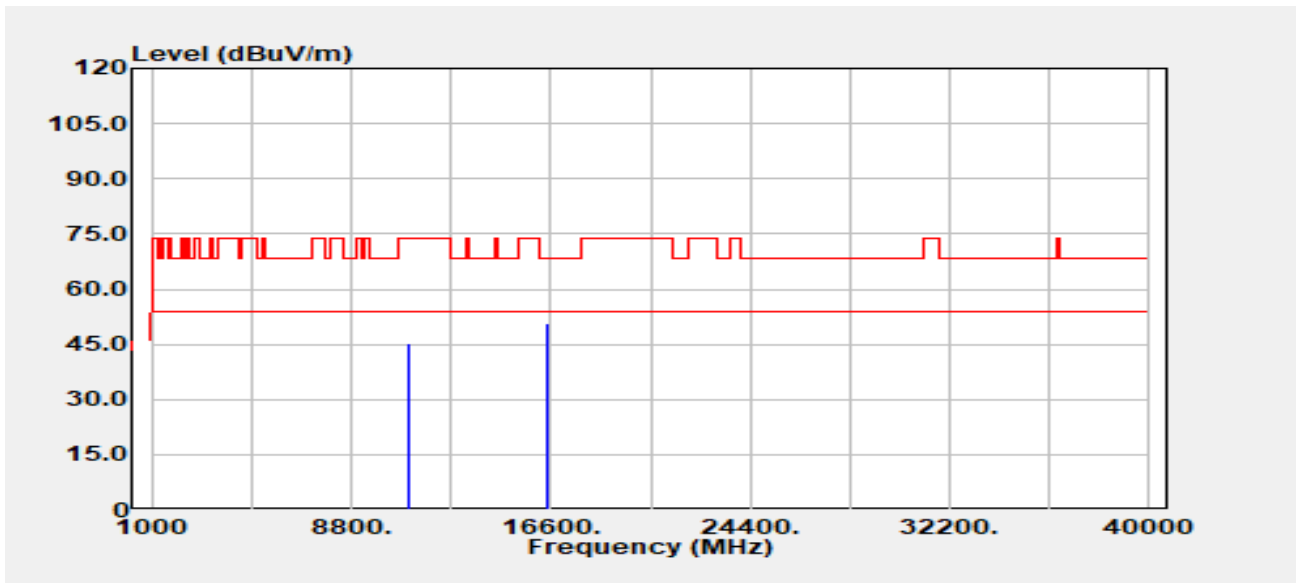


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11000.000 | Peak | 32.64 | 12.42 | 45.06 | 74.00 | -28.94 |
| 11000.000 | Average | 23.61 | 12.42 | 36.03 | 54.00 | -17.97 |
| 16500.000 | Peak | 31.80 | 18.70 | 50.50 | 68.20 | -17.70 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band3
 Frequency :5500 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

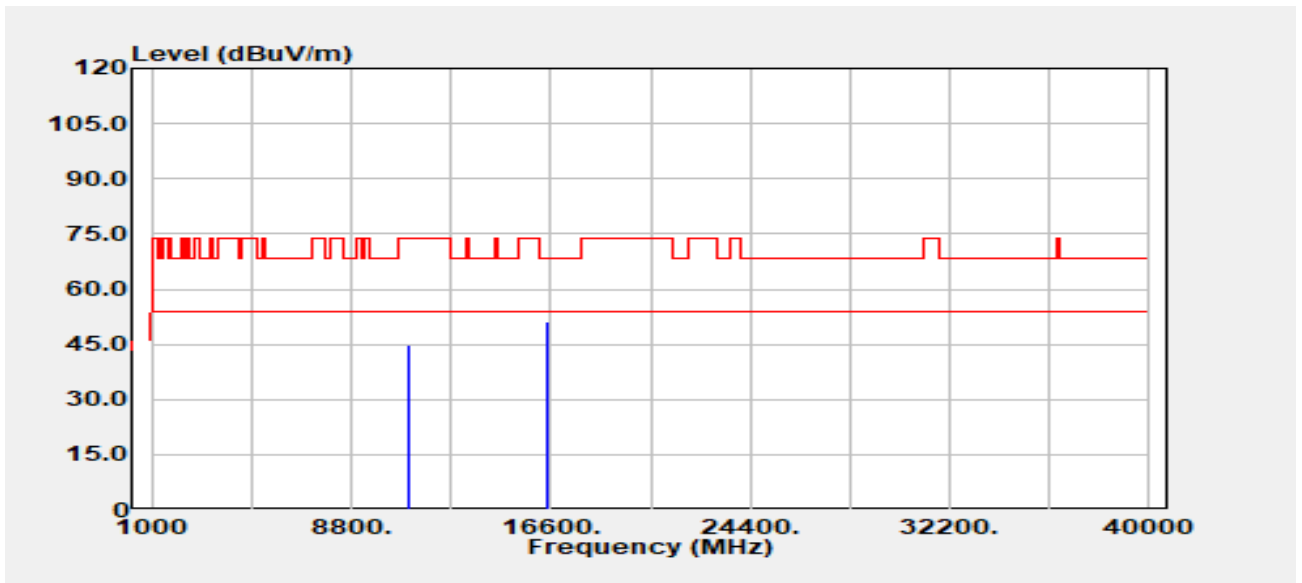


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11000.000 | Peak | 32.38 | 12.42 | 44.80 | 74.00 | -29.20 |
| 11000.000 | Average | 23.51 | 12.42 | 35.93 | 54.00 | -18.07 |
| 16500.000 | Peak | 32.50 | 18.70 | 51.20 | 68.20 | -17.00 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :24.6/58 |
| Frequency | :5580 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

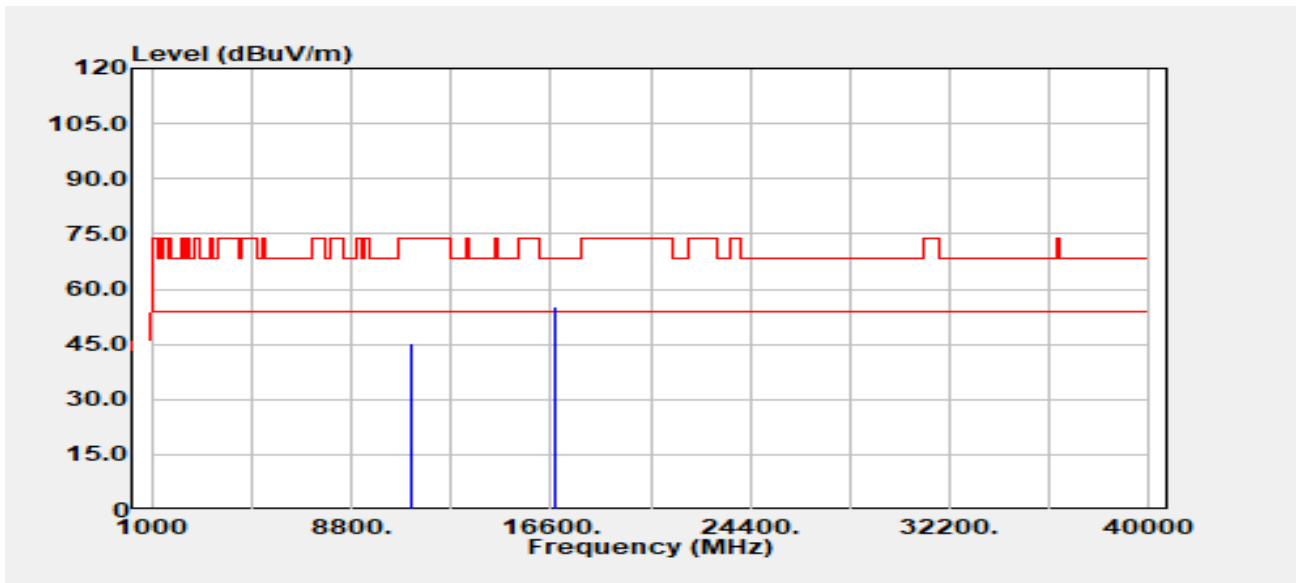


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11160.000 | Peak | 32.93 | 12.48 | 45.41 | 74.00 | -28.59 |
| 11160.000 | Average | 23.76 | 12.48 | 36.24 | 54.00 | -17.76 |
| 16740.000 | Peak | 34.24 | 20.88 | 55.12 | 68.20 | -13.08 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :24.6/58 |
| Frequency | :5580 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

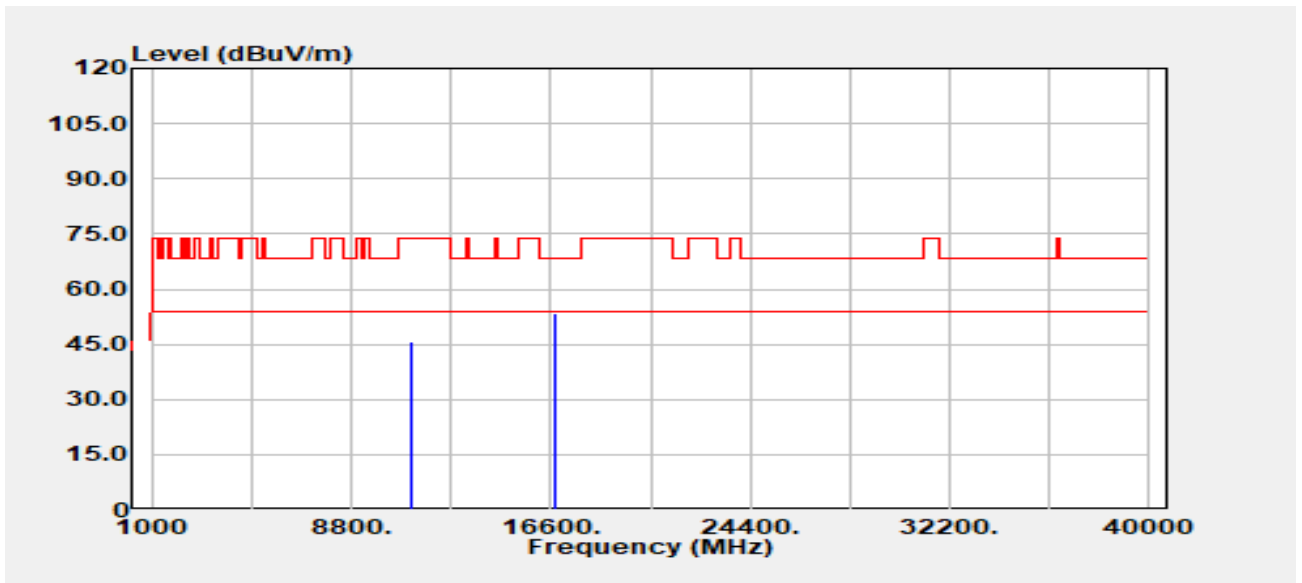


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11160.000 | Peak | 33.07 | 12.48 | 45.54 | 74.00 | -28.46 |
| 11160.000 | Average | 23.62 | 12.48 | 36.10 | 54.00 | -17.90 |
| 16740.000 | Peak | 32.74 | 20.88 | 53.62 | 68.20 | -14.58 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band3 | Temp./Humi. | :24.6/58 |
| Frequency | :5700 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

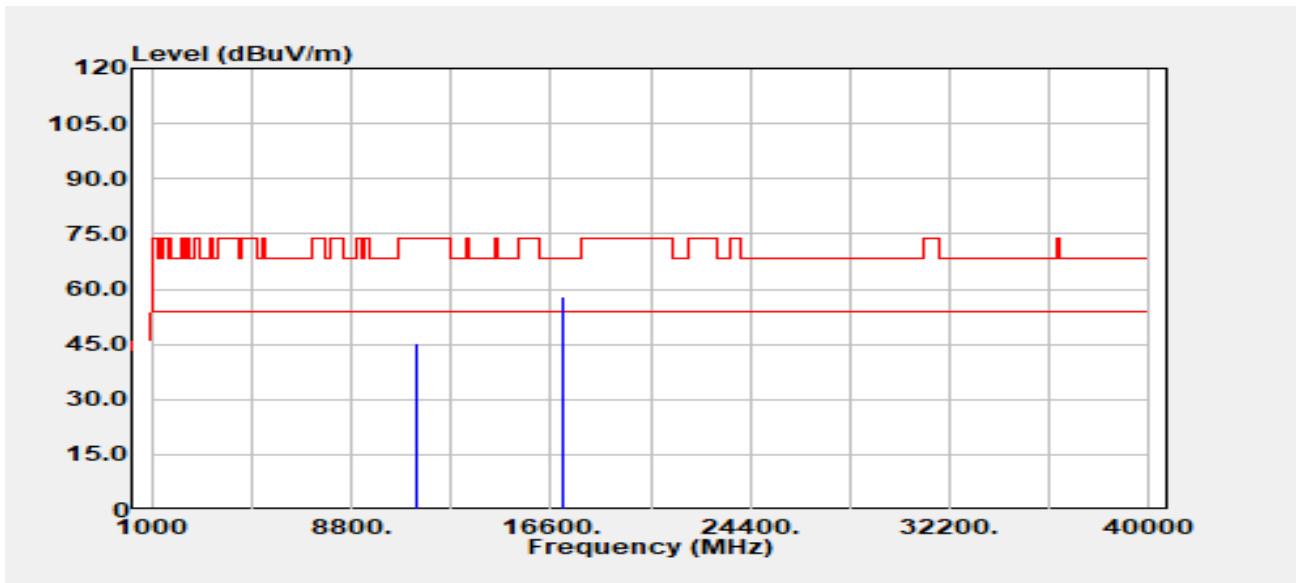


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11400.000 | Peak | 32.77 | 12.39 | 45.16 | 74.00 | -28.84 |
| 11400.000 | Average | 23.52 | 12.39 | 35.91 | 54.00 | -18.09 |
| 17100.000 | Peak | 32.29 | 25.62 | 57.91 | 68.20 | -10.29 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band3
 Frequency :5700 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

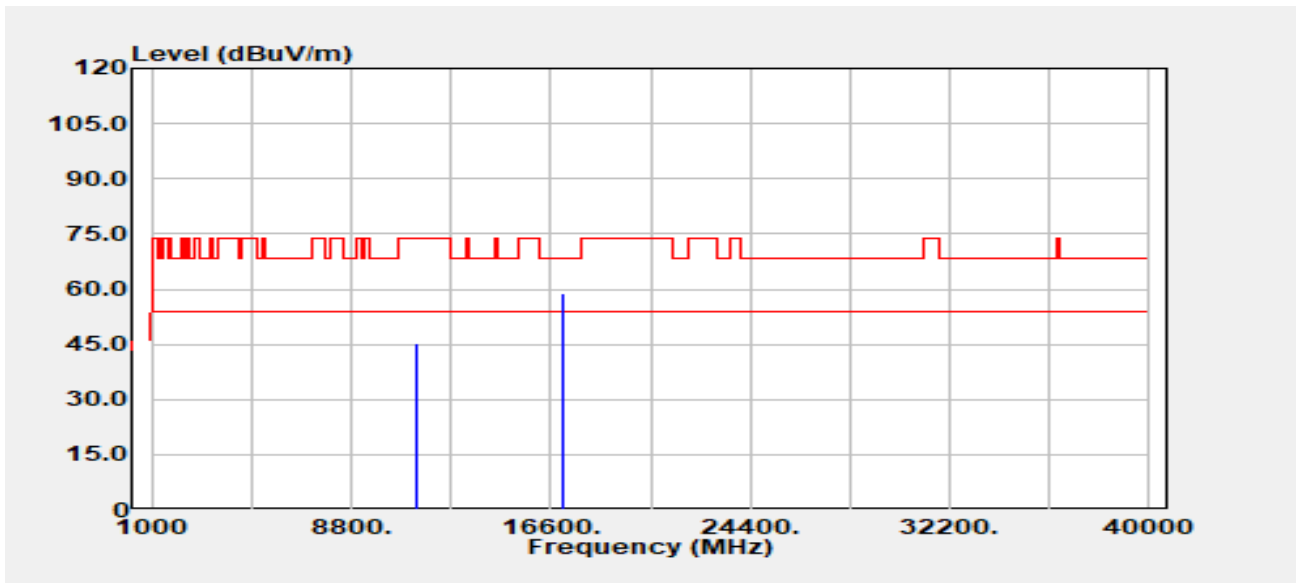


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11400.000 | Peak | 32.99 | 12.39 | 45.38 | 74.00 | -28.62 |
| 11400.000 | Average | 23.41 | 12.39 | 35.80 | 54.00 | -18.20 |
| 17100.000 | Peak | 33.16 | 25.62 | 58.78 | 68.20 | -9.42 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5500 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

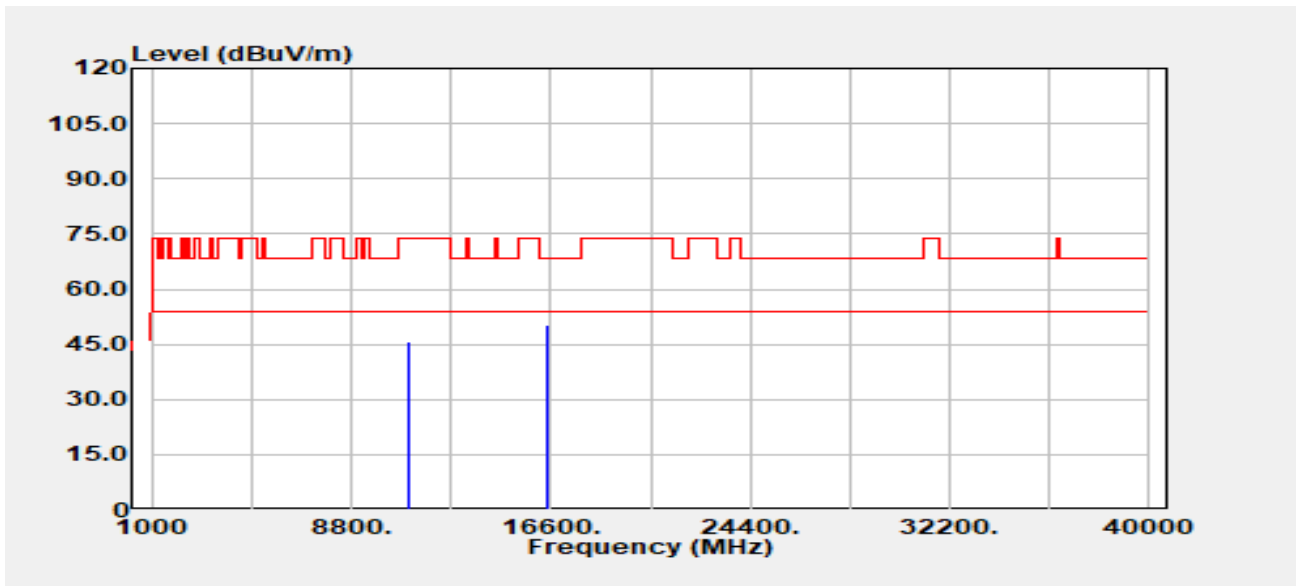


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11000.000 | Peak | 33.41 | 12.42 | 45.83 | 74.00 | -28.17 |
| 11000.000 | Average | 23.47 | 12.42 | 35.89 | 54.00 | -18.11 |
| 16500.000 | Peak | 31.66 | 18.70 | 50.36 | 68.20 | -17.84 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5500 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

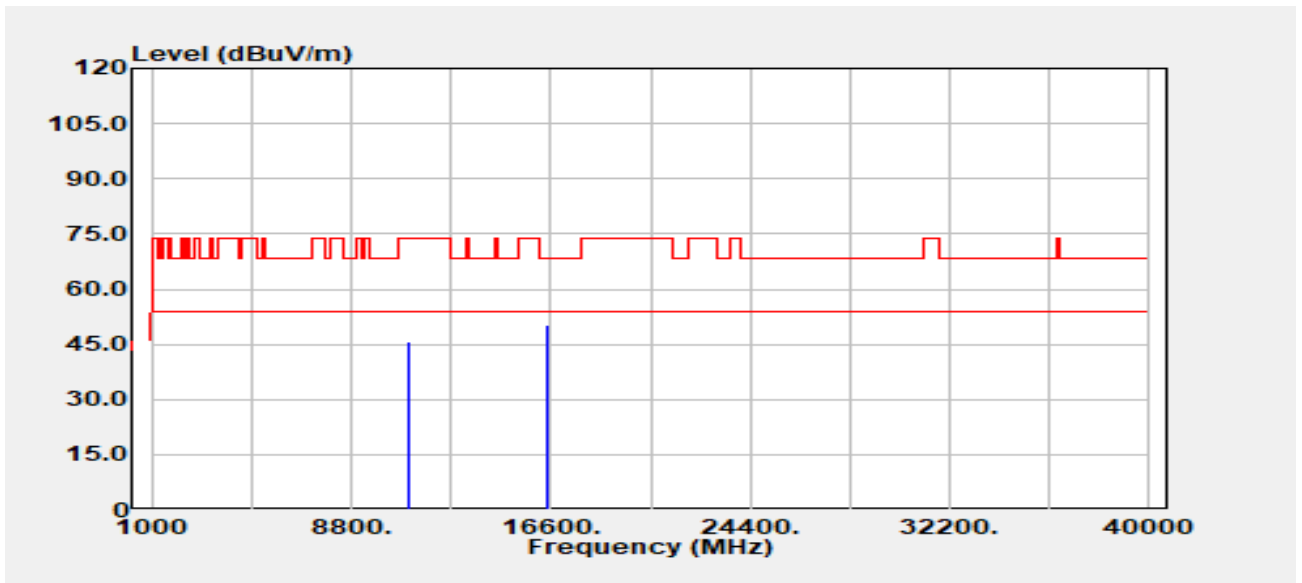


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11000.000 | Peak | 33.33 | 12.42 | 45.75 | 74.00 | -28.25 |
| 11000.000 | Average | 23.43 | 12.42 | 35.85 | 54.00 | -18.15 |
| 16500.000 | Peak | 31.51 | 18.70 | 50.21 | 68.20 | -17.99 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5580 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

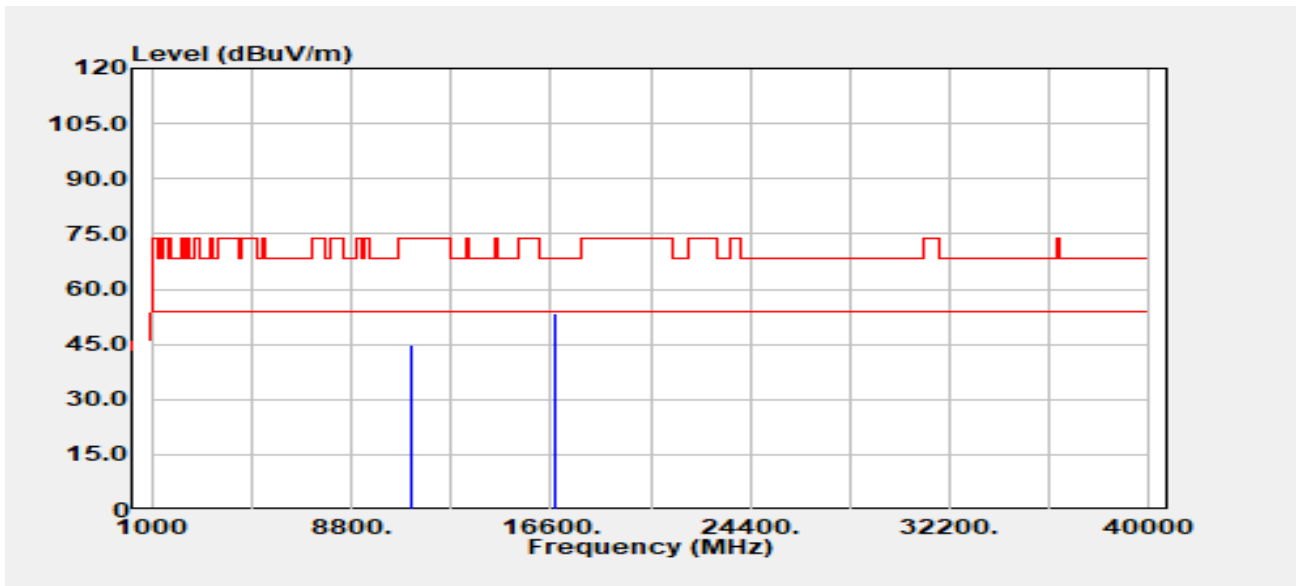


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11160.000 | Peak | 32.54 | 12.48 | 45.02 | 74.00 | -28.98 |
| 11160.000 | Average | 23.76 | 12.48 | 36.24 | 54.00 | -17.76 |
| 16740.000 | Peak | 32.61 | 20.88 | 53.49 | 68.20 | -14.71 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5580 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

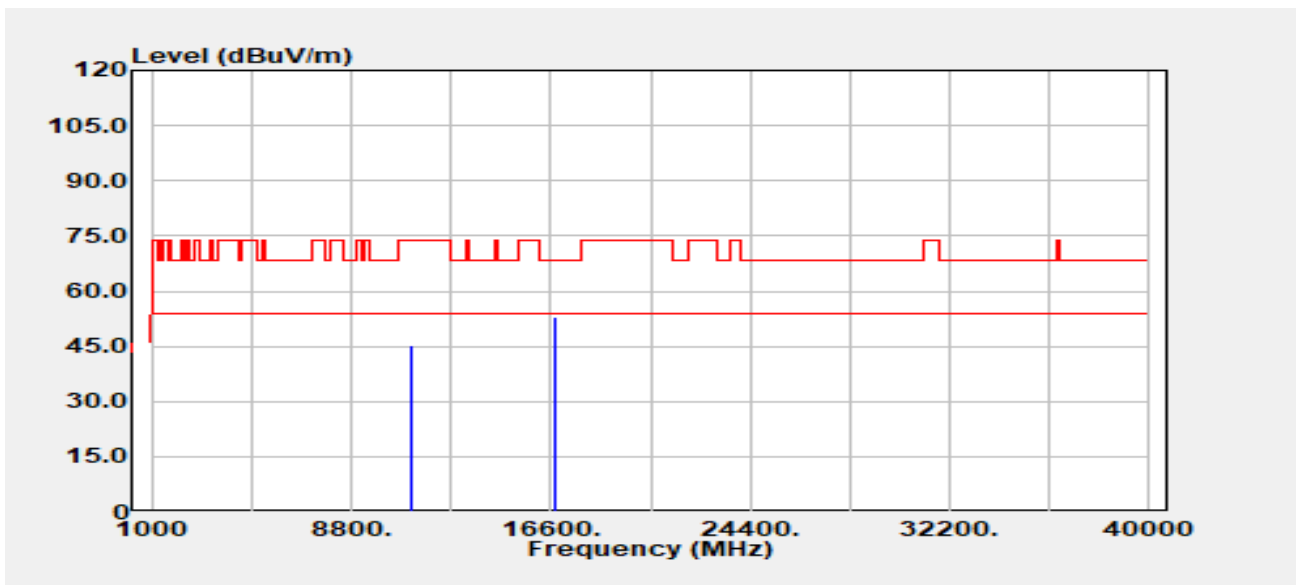


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11160.000 | Peak | 32.91 | 12.48 | 45.39 | 74.00 | -28.61 |
| 11160.000 | Average | 23.46 | 12.48 | 35.93 | 54.00 | -18.07 |
| 16740.000 | Peak | 31.92 | 20.88 | 52.80 | 68.20 | -15.40 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5700 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

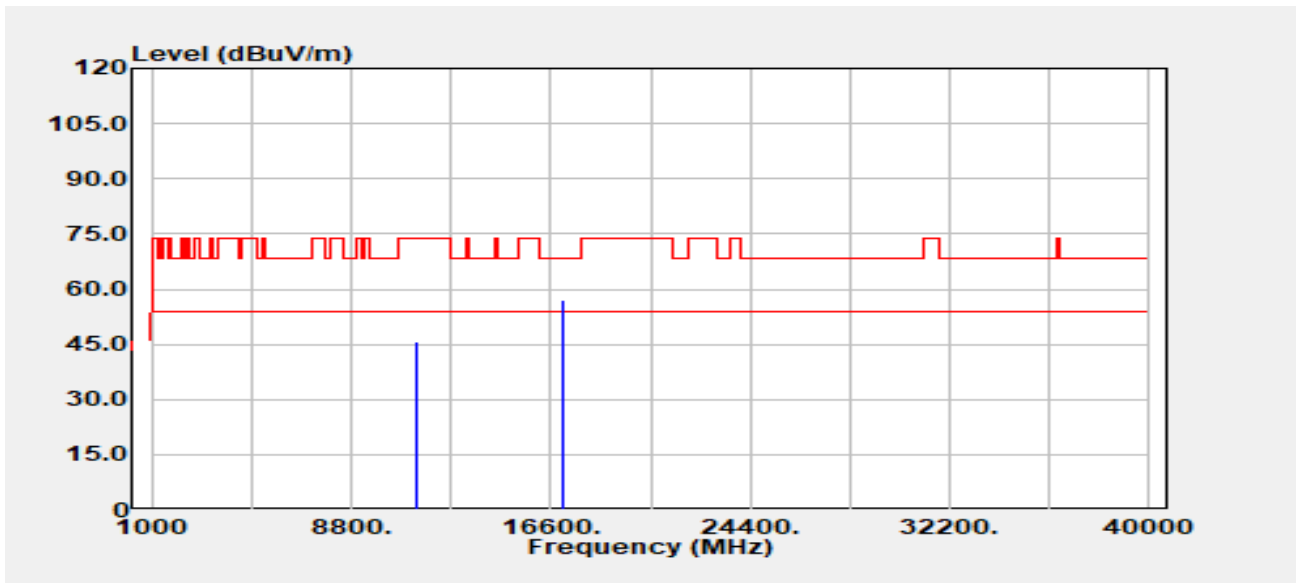


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11400.000 | Peak | 33.30 | 12.39 | 45.69 | 74.00 | -28.31 |
| 11400.000 | Average | 23.34 | 12.39 | 35.73 | 54.00 | -18.27 |
| 17100.000 | Peak | 31.30 | 25.62 | 56.92 | 68.20 | -11.28 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band3
 Frequency :5700 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

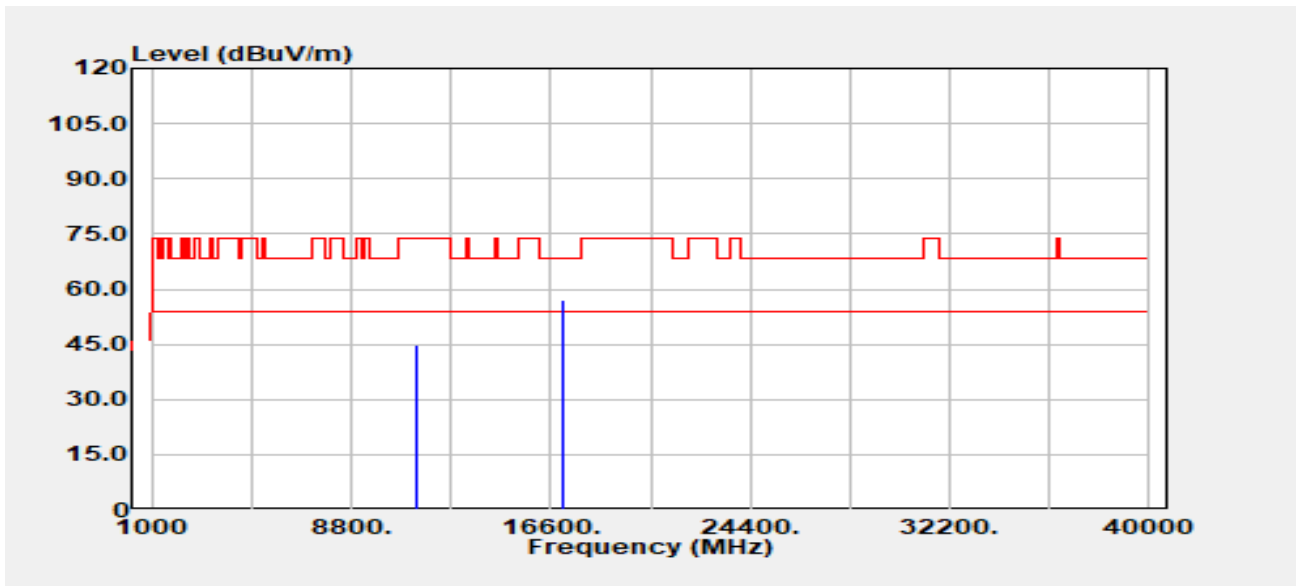


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11400.000 | Peak | 32.62 | 12.39 | 45.01 | 74.00 | -28.99 |
| 11400.000 | Average | 23.49 | 12.39 | 35.88 | 54.00 | -18.12 |
| 17100.000 | Peak | 31.27 | 25.62 | 56.89 | 68.20 | -11.31 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5510 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

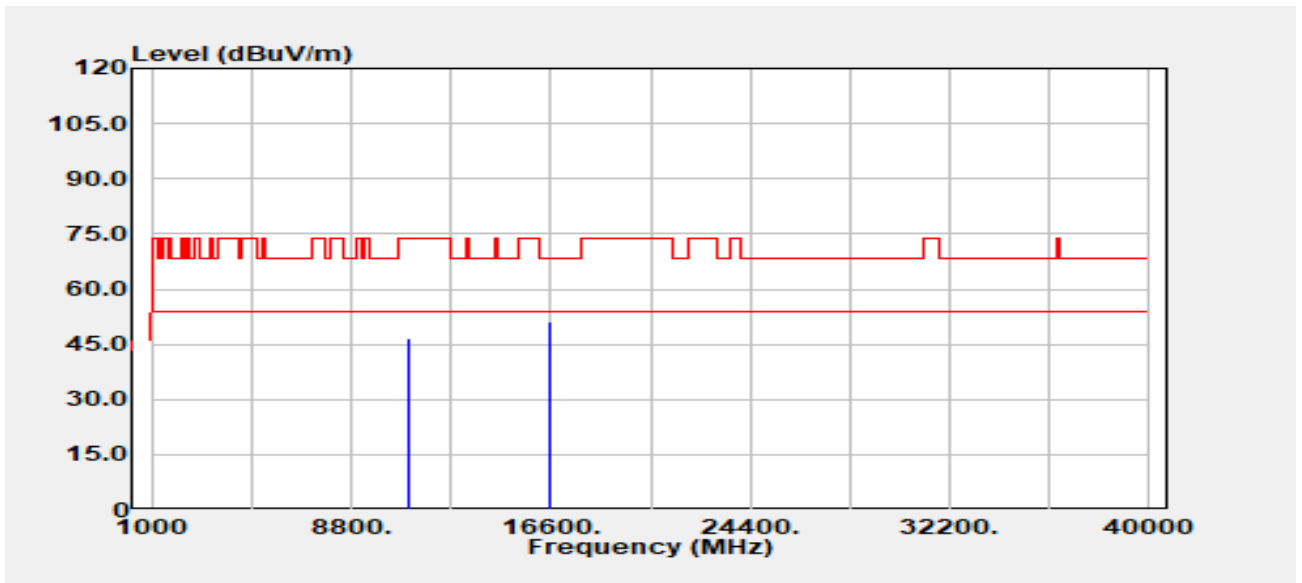


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11020.000 | Peak | 34.07 | 12.39 | 46.46 | 74.00 | -27.54 |
| 11020.000 | Average | 25.01 | 12.39 | 37.40 | 54.00 | -16.60 |
| 16530.000 | Peak | 32.62 | 18.66 | 51.28 | 68.20 | -16.92 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5510 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

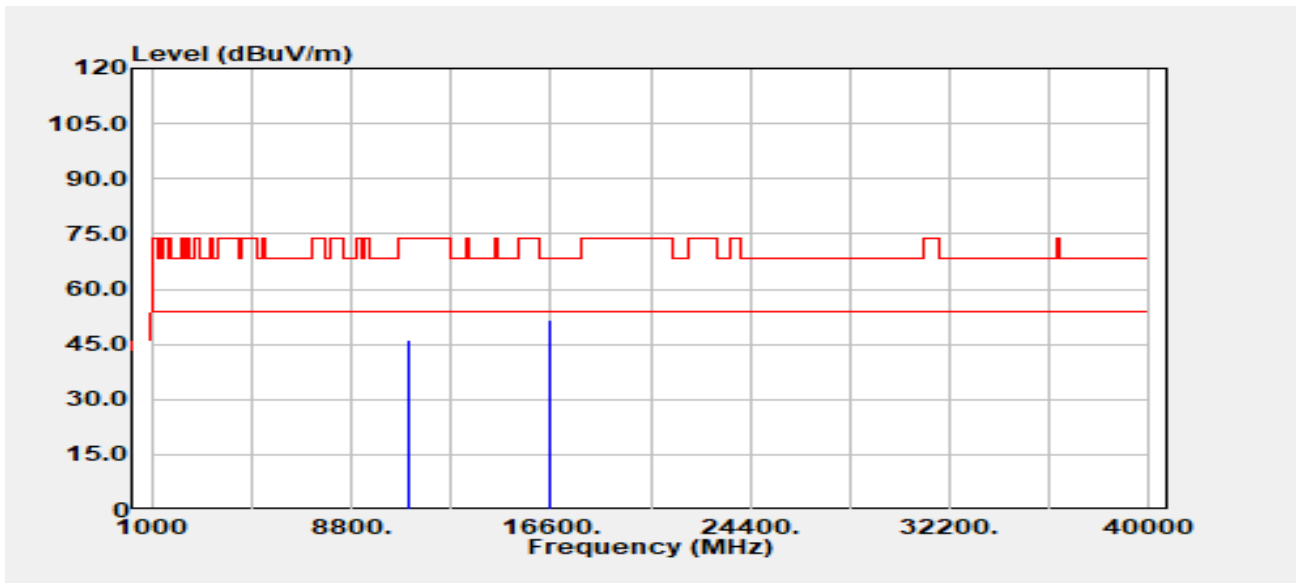


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11020.000 | Peak | 33.92 | 12.39 | 46.31 | 74.00 | -27.69 |
| 11020.000 | Average | 24.94 | 12.39 | 37.33 | 54.00 | -16.67 |
| 16530.000 | Peak | 32.89 | 18.66 | 51.55 | 68.20 | -16.65 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5550 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :VERTICAL
 Engineer :Tony.Chao
 Test Chamber : 966A

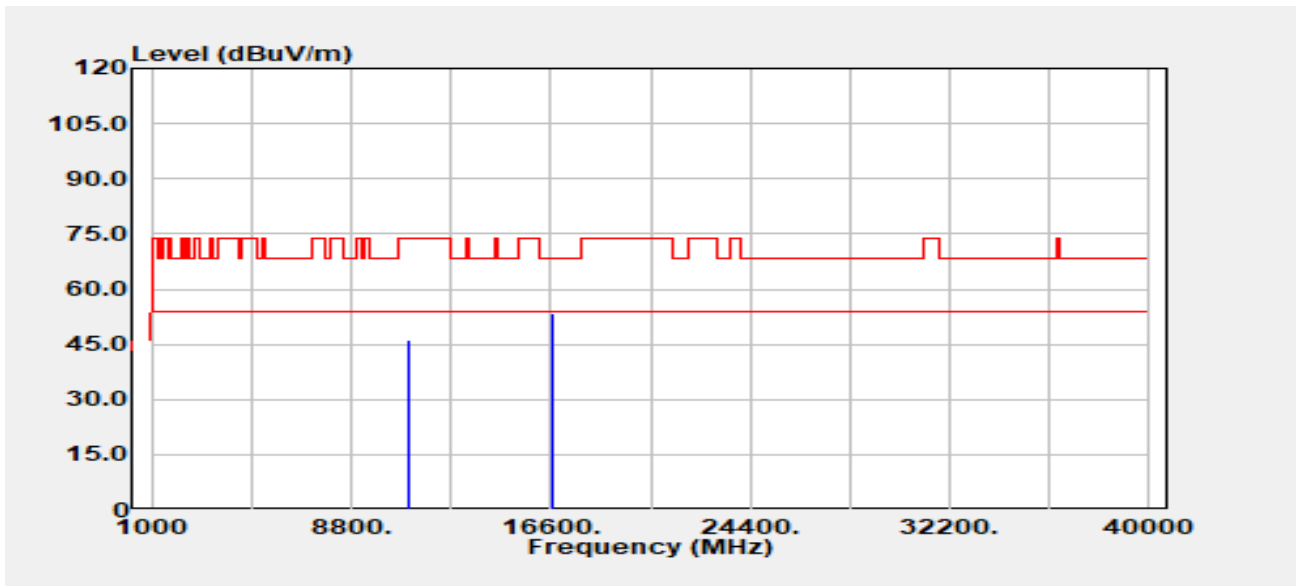


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11100.000 | Peak | 33.81 | 12.60 | 46.41 | 74.00 | -27.59 |
| 11100.000 | Average | 24.16 | 12.60 | 36.76 | 54.00 | -17.24 |
| 16650.000 | Peak | 33.35 | 19.99 | 53.34 | 68.20 | -14.86 |

Report No.: TMWK2308002691KR

Rev.: 00


Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5550 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

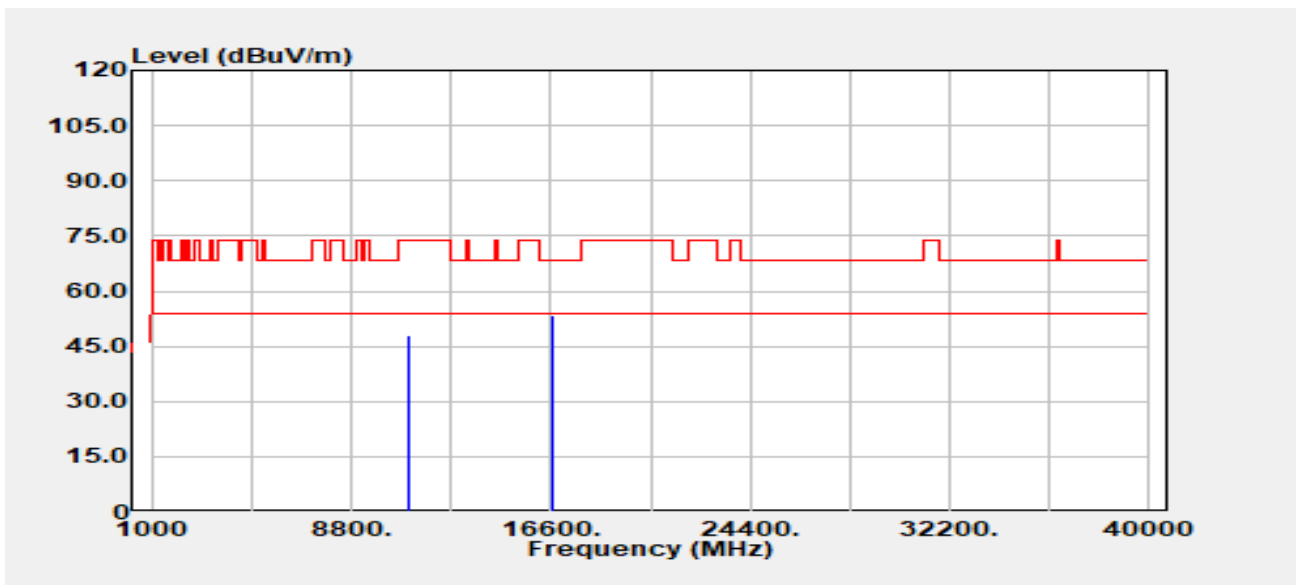

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11100.000 | Peak | 35.23 | 12.60 | 47.83 | 74.00 | -26.17 |
| 11100.000 | Average | 24.83 | 12.60 | 37.43 | 54.00 | -16.57 |
| 16650.000 | Peak | 33.61 | 19.99 | 53.59 | 68.20 | -14.61 |

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11n40/Band3 | Temp./Humi. | :24.6/57 |
| Frequency | :5670 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

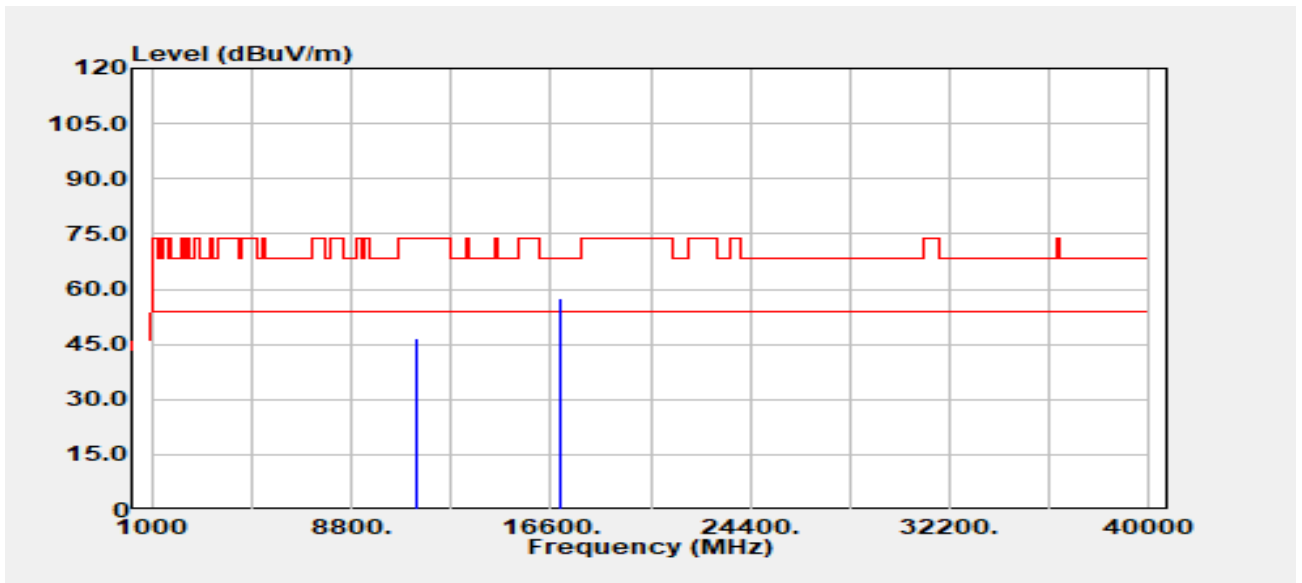


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11340.000 | Peak | 34.01 | 12.55 | 46.57 | 74.00 | -27.43 |
| 11340.000 | Average | 24.21 | 12.55 | 36.76 | 54.00 | -17.24 |
| 17010.000 | Peak | 32.33 | 25.32 | 57.64 | 68.20 | -10.56 |

Report No.: TMWK2308002691KR

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3
 Frequency :5670 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

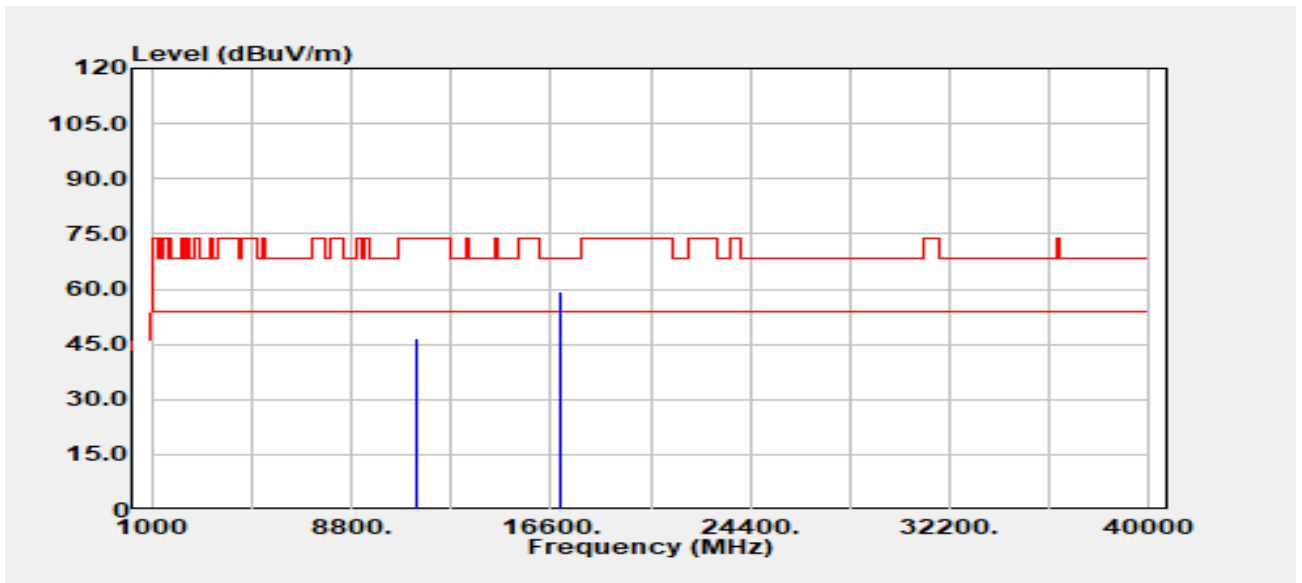


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11340.000 | Peak | 34.22 | 12.55 | 46.77 | 74.00 | -27.23 |
| 11340.000 | Average | 24.62 | 12.55 | 37.17 | 54.00 | -16.83 |
| 17010.000 | Peak | 33.95 | 25.32 | 59.27 | 68.20 | -8.93 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11ac80/Band3 | Temp./Humi. | :24.6/57 |
| Frequency | :5530 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

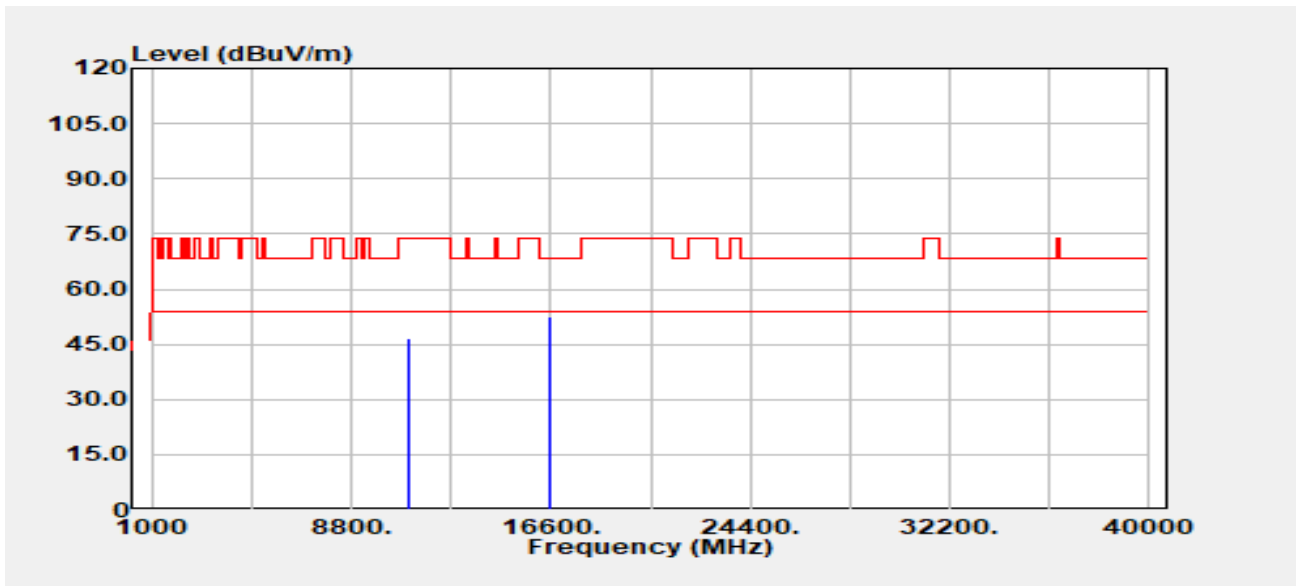


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11060.000 | Peak | 34.21 | 12.40 | 46.60 | 74.00 | -27.40 |
| 11060.000 | Average | 24.93 | 12.40 | 37.33 | 54.00 | -16.67 |
| 16590.000 | Peak | 33.48 | 19.22 | 52.70 | 68.20 | -15.50 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band3
 Frequency :5530 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :


Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

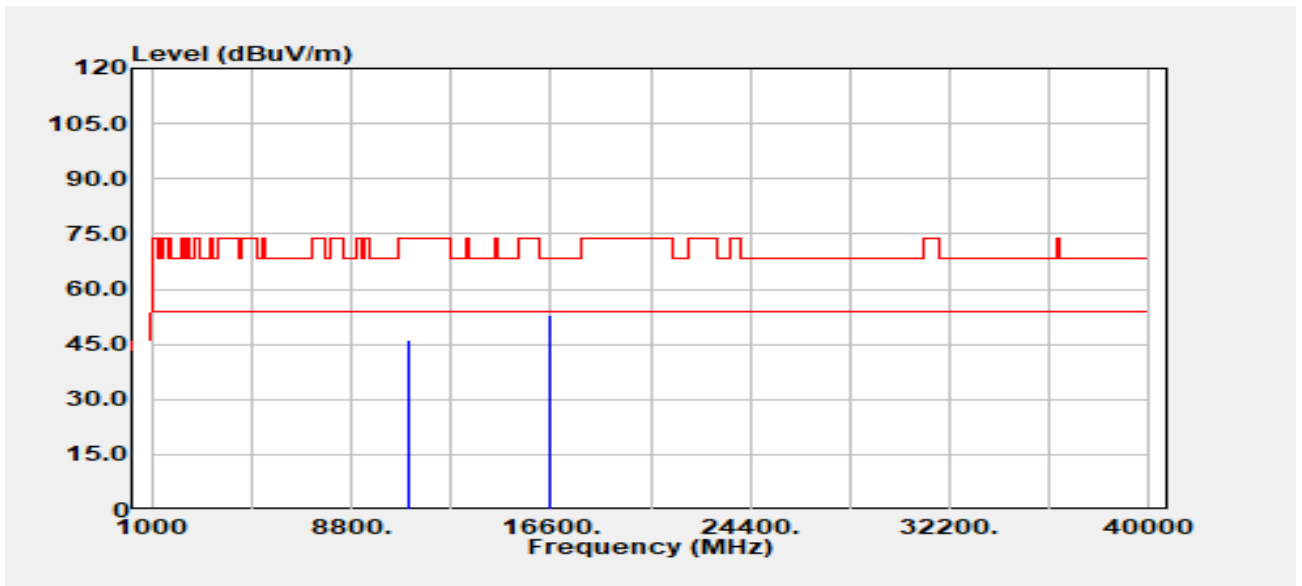

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11060.000 | Peak | 33.92 | 12.40 | 46.31 | 74.00 | -27.69 |
| 11060.000 | Average | 25.02 | 12.40 | 37.42 | 54.00 | -16.58 |
| 16590.000 | Peak | 33.94 | 19.22 | 53.16 | 68.20 | -15.04 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11ac80/Band3 | Temp./Humi. | :24.6/57 |
| Frequency | :5610 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

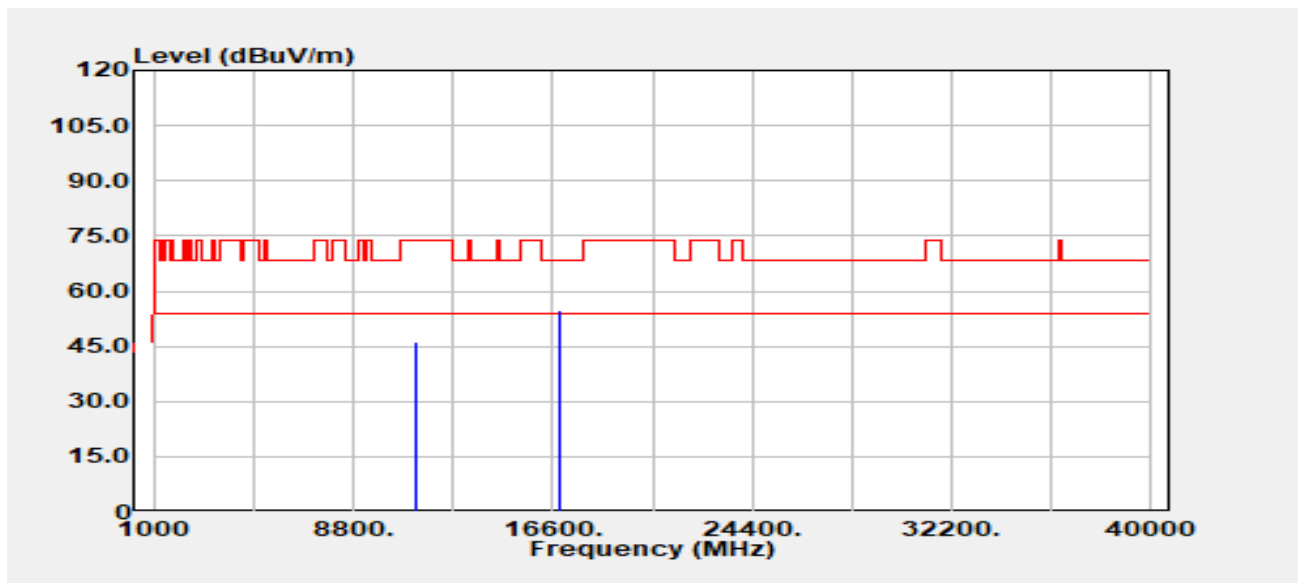


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11220.000 | Peak | 33.66 | 12.60 | 46.27 | 74.00 | -27.73 |
| 11220.000 | Average | 24.87 | 12.60 | 37.47 | 54.00 | -16.53 |
| 16830.000 | Peak | 32.64 | 22.01 | 54.65 | 68.20 | -13.55 |

Report No.: TMWK2308002691KR

Project Number :TM-2308000057P
 Operation Band :802.11ac80/Band3
 Frequency :5610 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

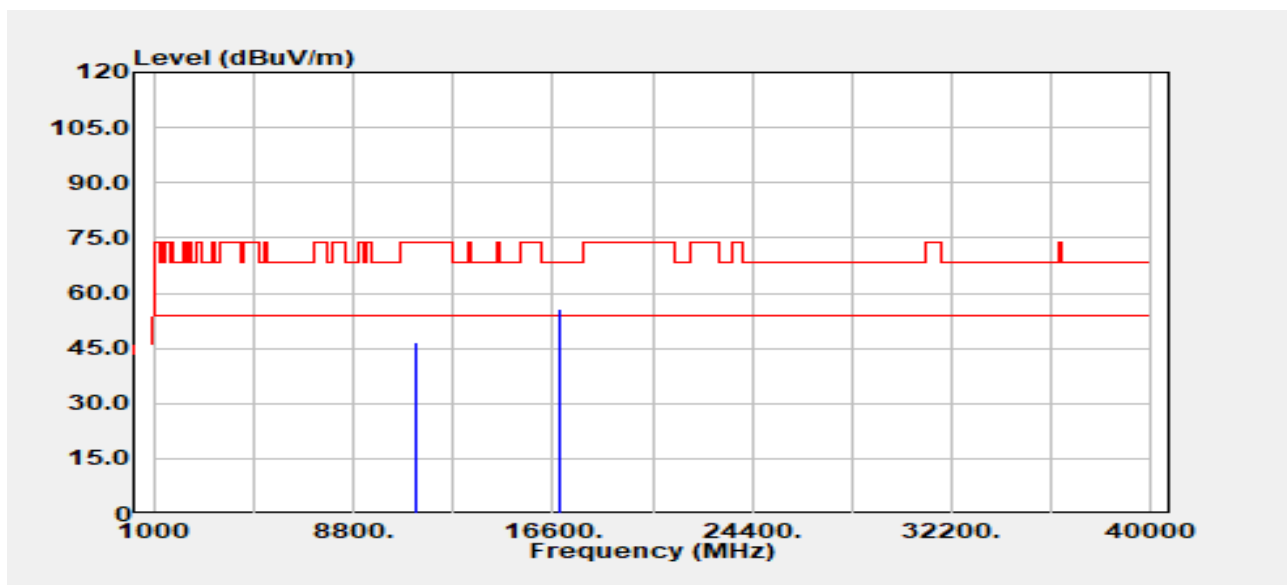


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|-----------|------------------------|--------------------------|-----------|------------------|--------------|-----------|
| 11220.000 | Peak | 34.21 | 12.60 | 46.81 | 74.00 | -27.19 |
| 11220.000 | Average | 25.01 | 12.60 | 37.61 | 54.00 | -16.39 |
| 16830.000 | Peak | 33.60 | 22.01 | 55.60 | 68.20 | -12.60 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band3~4
 Frequency :5720 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :


Test Date :2023-08-30
 Temp./Humi. :24.6/58
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

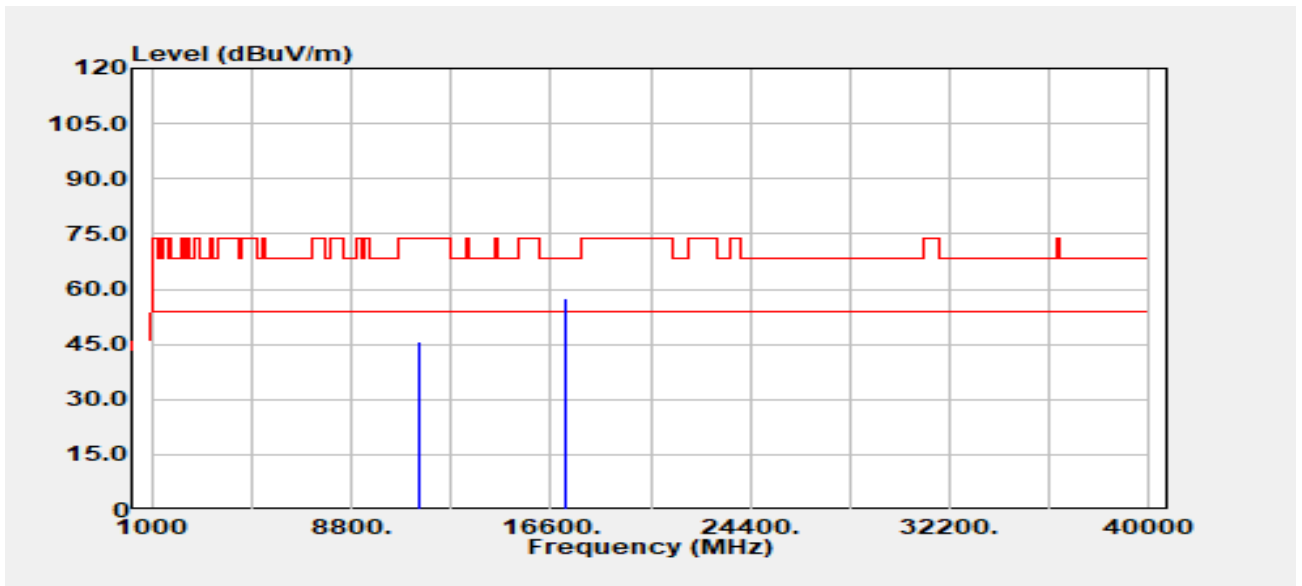

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11440.000 | Peak | 33.40 | 12.33 | 45.72 | 74.00 | -28.28 |
| 11440.000 | Average | 23.46 | 12.33 | 35.78 | 54.00 | -18.22 |
| 17160.000 | Peak | 31.27 | 26.20 | 57.46 | 68.20 | -10.74 |

Report No.: TMWK2308002691KR


| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11a/Band3~4 | Temp./Humi. | :24.6/58 |
| Frequency | :5720 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

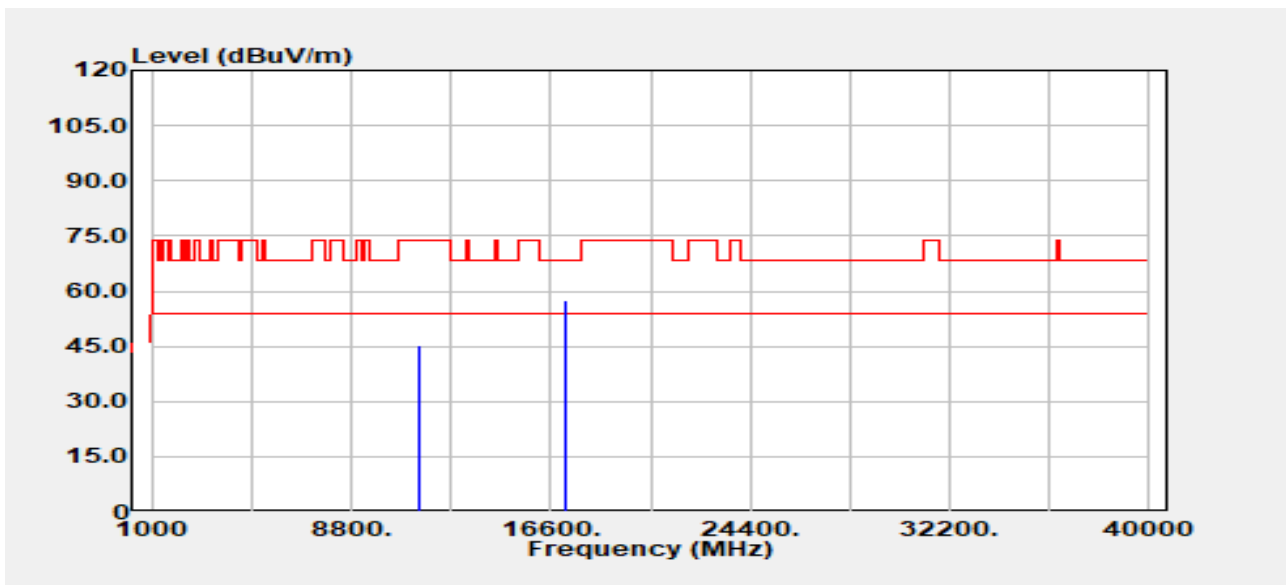

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11440.000 | Peak | 32.98 | 12.33 | 45.31 | 74.00 | -28.69 |
| 11440.000 | Average | 23.34 | 12.33 | 35.67 | 54.00 | -18.33 |
| 17160.000 | Peak | 31.47 | 26.20 | 57.67 | 68.20 | -10.53 |

Report No.: TMWK2308002691KR


| | | | |
|----------------|--------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11n20/Band3~4 | Temp./Humi. | :24.6/58 |
| Frequency | :5720 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

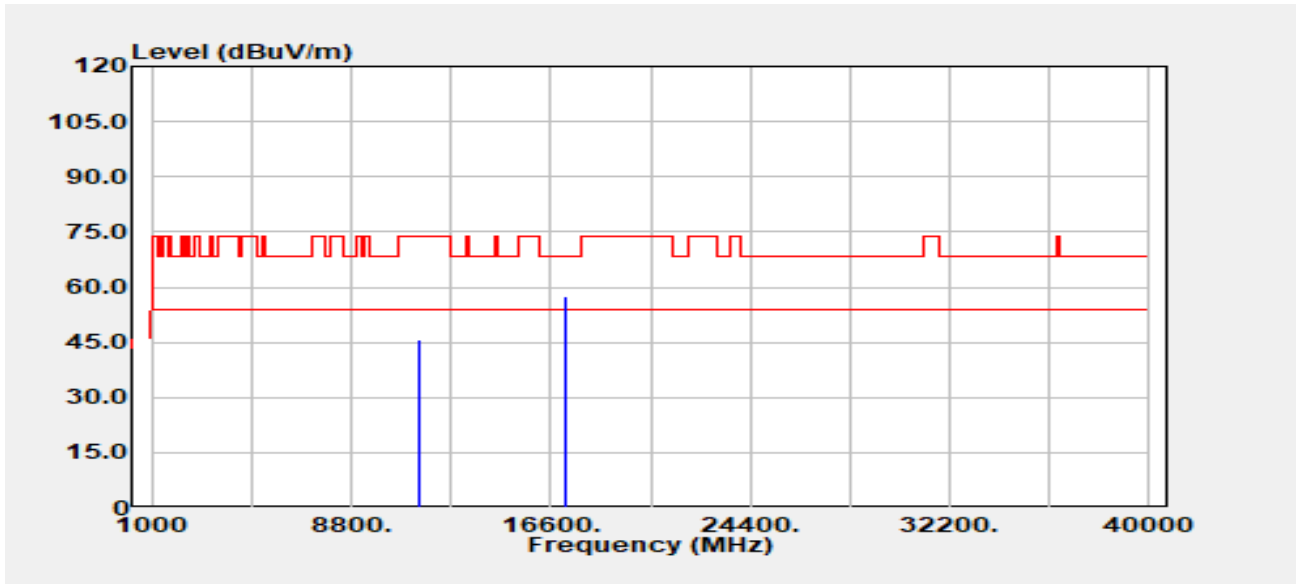

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11440.000 | Peak | 33.32 | 12.33 | 45.64 | 74.00 | -28.36 |
| 11440.000 | Average | 23.46 | 12.33 | 35.79 | 54.00 | -18.21 |
| 17160.000 | Peak | 31.34 | 26.20 | 57.53 | 68.20 | -10.67 |

Report No.: TMWK2308002691KR


| | | | |
|----------------|--------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-30 |
| Operation Band | :802.11n20/Band3~4 | Temp./Humi. | :24.6/58 |
| Frequency | :5720 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

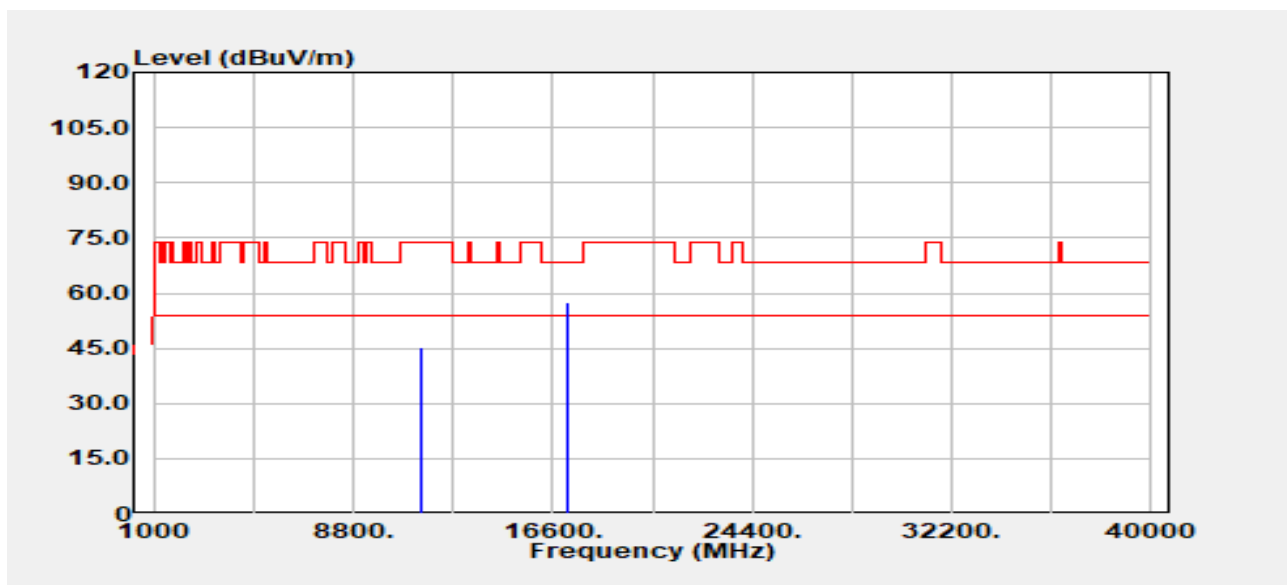

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11440.000 | Peak | 33.06 | 12.33 | 45.38 | 74.00 | -28.62 |
| 11440.000 | Average | 23.41 | 12.33 | 35.73 | 54.00 | -18.27 |
| 17160.000 | Peak | 31.31 | 26.20 | 57.51 | 68.20 | -10.69 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|--------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11n40/Band3~4 | Temp./Humi. | :24.6/57 |
| Frequency | :5710 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

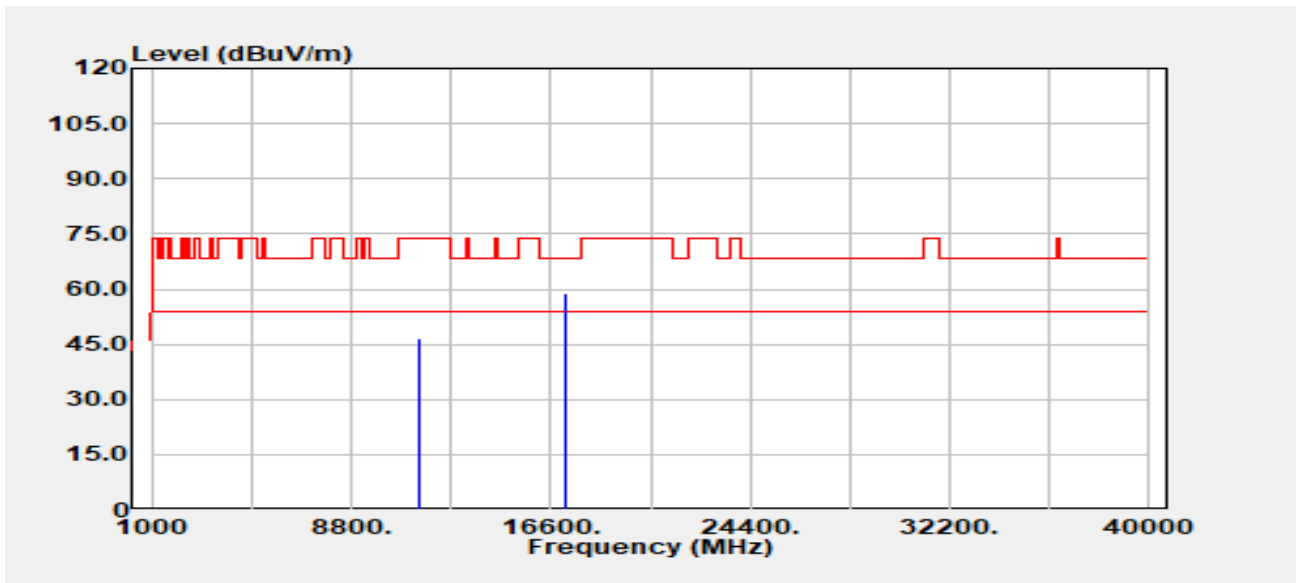


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11420.000 | Peak | 34.22 | 12.36 | 46.58 | 74.00 | -27.42 |
| 11420.000 | Average | 24.61 | 12.36 | 36.97 | 54.00 | -17.03 |
| 17130.000 | Peak | 33.03 | 26.00 | 59.03 | 68.20 | -9.17 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band3~4
 Frequency :5710 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :HORIZONTAL
 Engineer :Tony.Chao
 Test Chamber : 966A

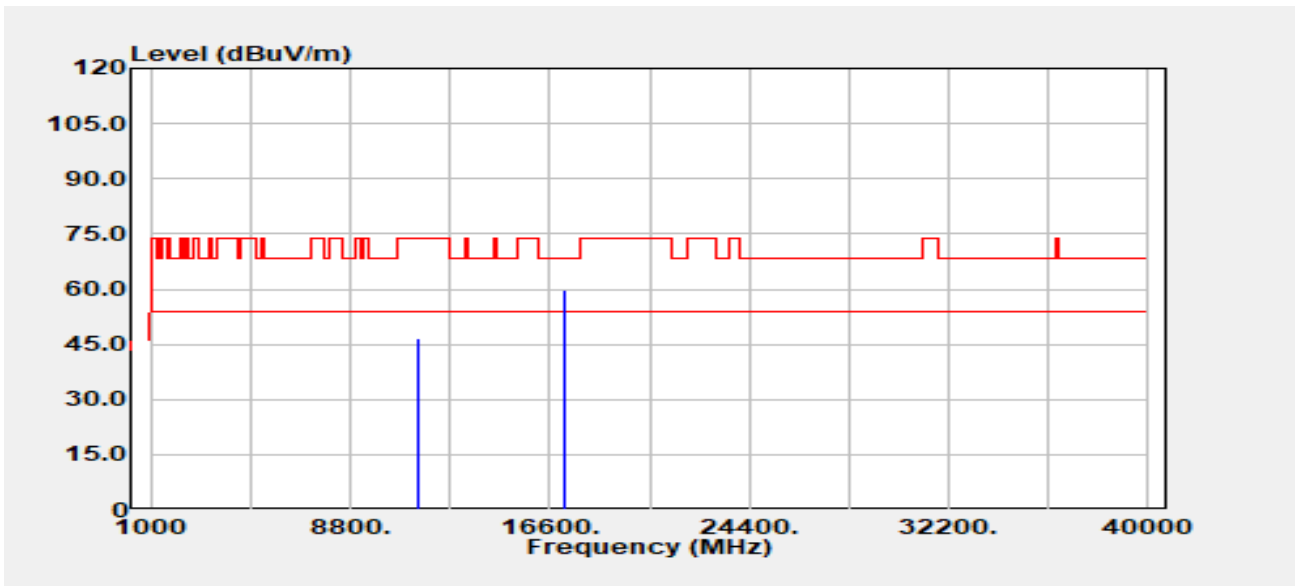


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11420.000 | Peak | 34.21 | 12.36 | 46.57 | 74.00 | -27.43 |
| 11420.000 | Average | 24.77 | 12.36 | 37.13 | 54.00 | -16.87 |
| 17130.000 | Peak | 33.58 | 26.00 | 59.58 | 68.20 | -8.62 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|---------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11ac80/Band3~4 | Temp./Humi. | :24.6/57 |
| Frequency | :5690 MHz | Antenna Pol. | :VERTICAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

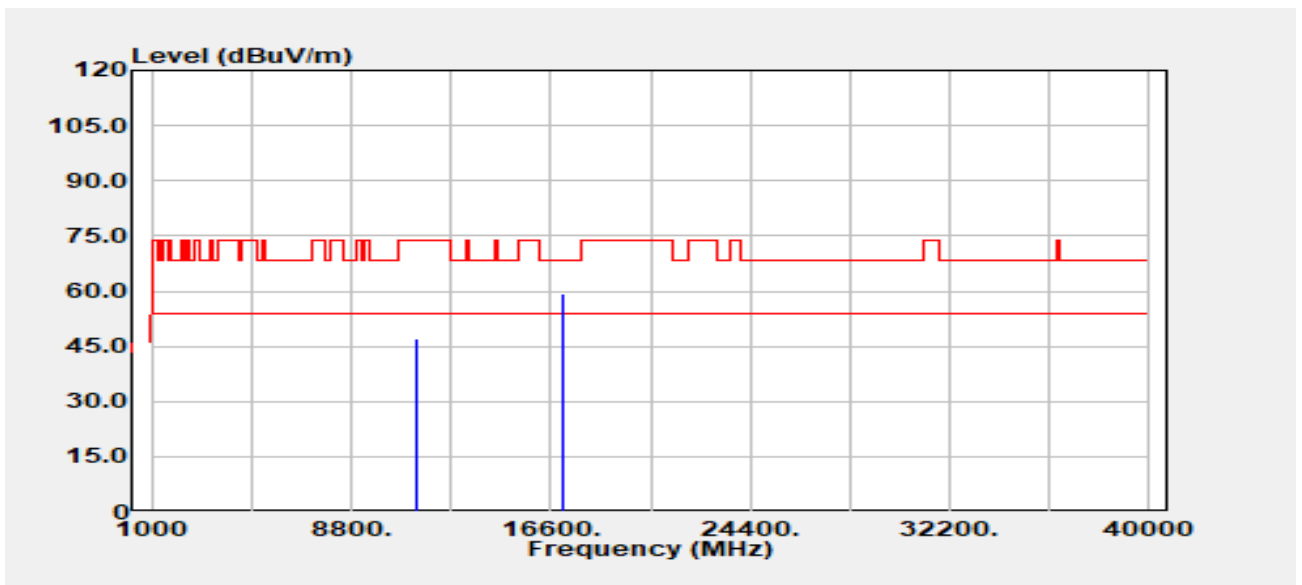


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11380.000 | Peak | 34.66 | 12.47 | 47.12 | 74.00 | -26.88 |
| 11380.000 | Average | 24.86 | 12.47 | 37.33 | 54.00 | -16.67 |
| 17070.000 | Peak | 33.78 | 25.70 | 59.48 | 68.20 | -8.72 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|---------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11ac80/Band3~4 | Temp./Humi. | :24.6/57 |
| Frequency | :5690 MHz | Antenna Pol. | :HORIZONTAL |
| Operation Mode | :TX | Engineer | :Tony.Chao |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

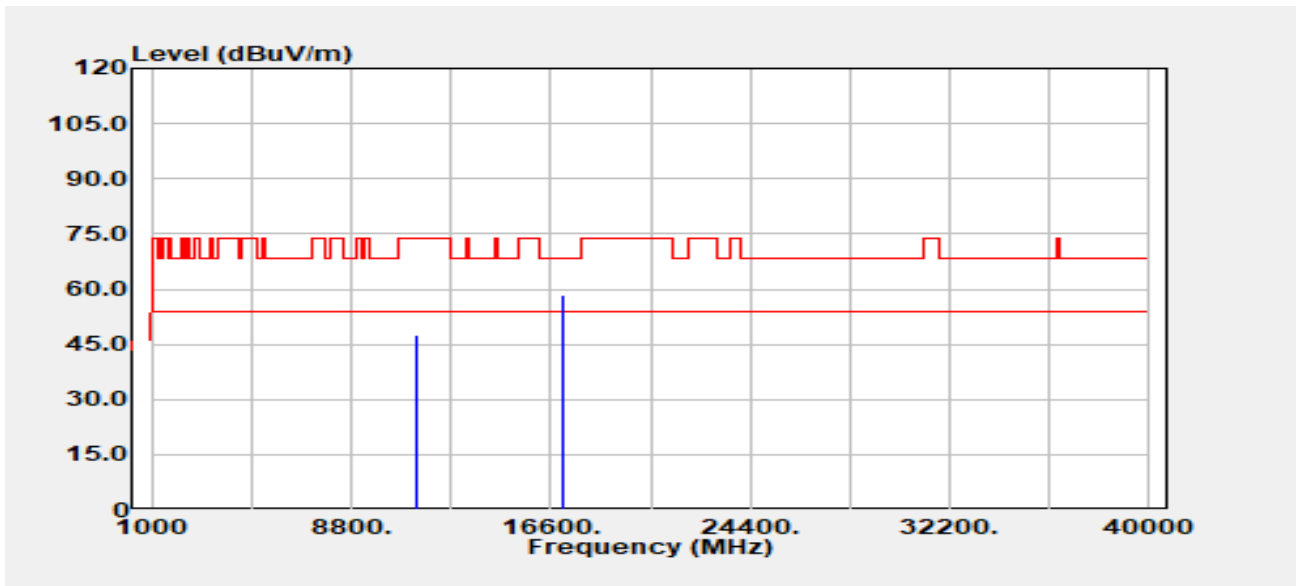


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11380.000 | Peak | 34.95 | 12.47 | 47.42 | 74.00 | -26.58 |
| 11380.000 | Average | 24.78 | 12.47 | 37.25 | 54.00 | -16.75 |
| 17070.000 | Peak | 32.63 | 25.70 | 58.34 | 68.20 | -9.86 |

Report No.: TMWK2308002691KR

Rev.: 00

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band1 | Temp./Humi. | :24.6/57 |
| Frequency | :5210 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

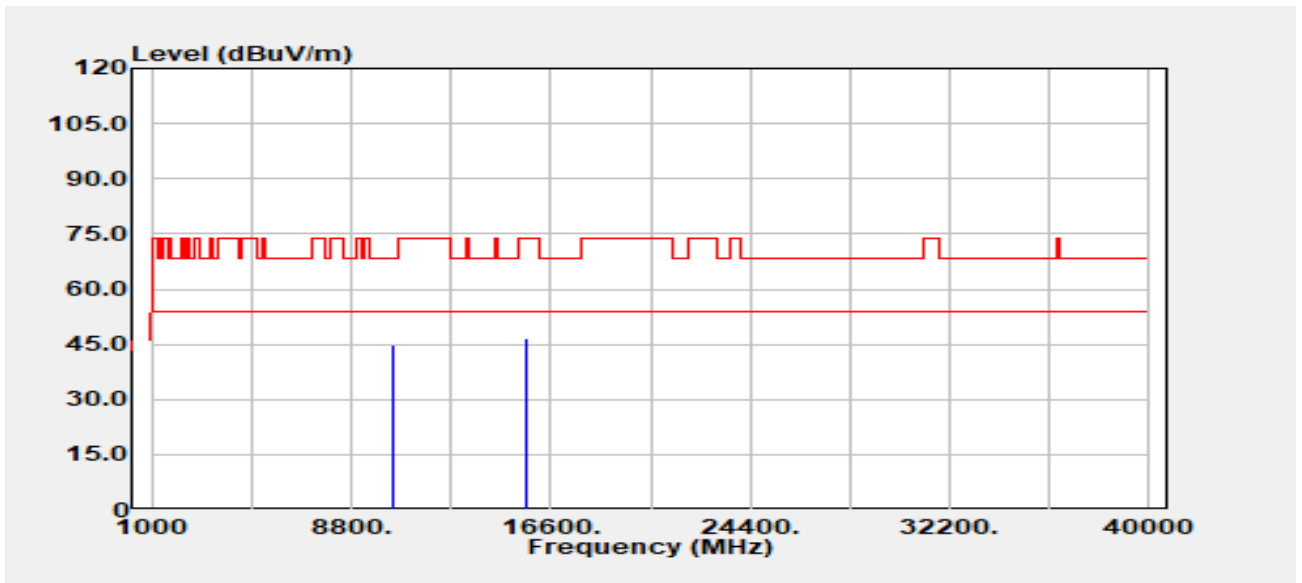


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 10420.000 | Peak | 33.84 | 11.21 | 45.05 | 68.20 | -23.15 |
| 15630.000 | Peak | 33.37 | 13.06 | 46.43 | 74.00 | -27.57 |
| 15630.000 | Average | 24.51 | 13.06 | 37.56 | 54.00 | -16.44 |

Report No.: TMWK2308002691KR

Rev.: 00


Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5745 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

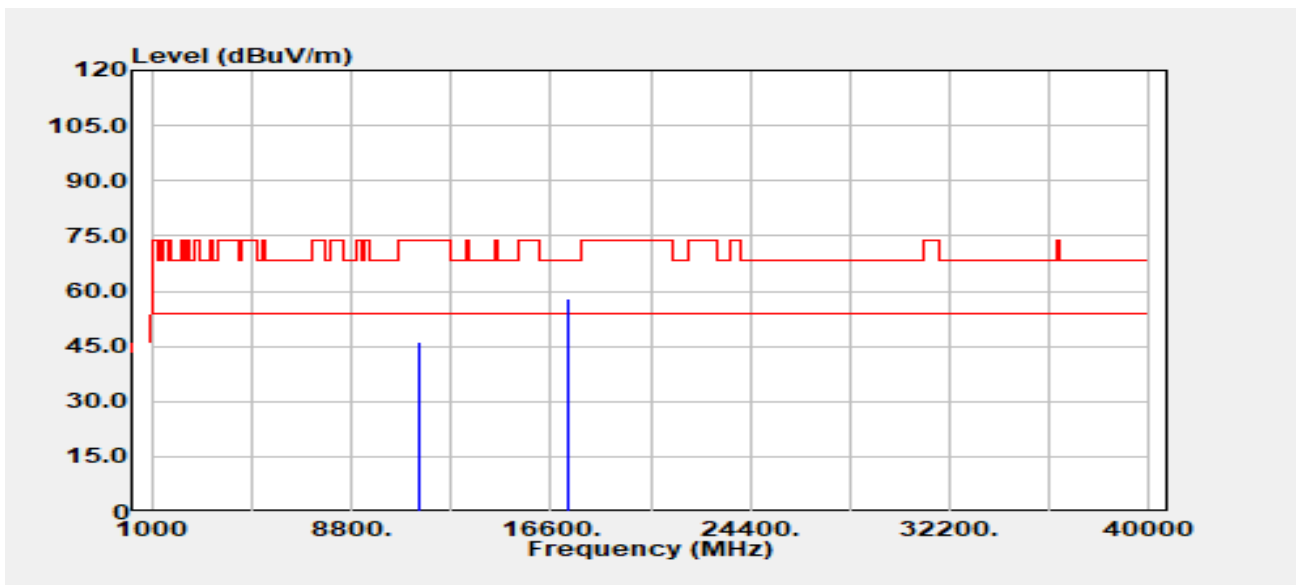

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11490.000 | Peak | 33.96 | 12.39 | 46.35 | 74.00 | -27.65 |
| 11490.000 | Average | 24.68 | 12.39 | 37.07 | 54.00 | -16.93 |
| 17235.000 | Peak | 32.02 | 26.10 | 58.13 | 68.20 | -10.07 |


| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :24.6/57 |
| Frequency | :5745 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

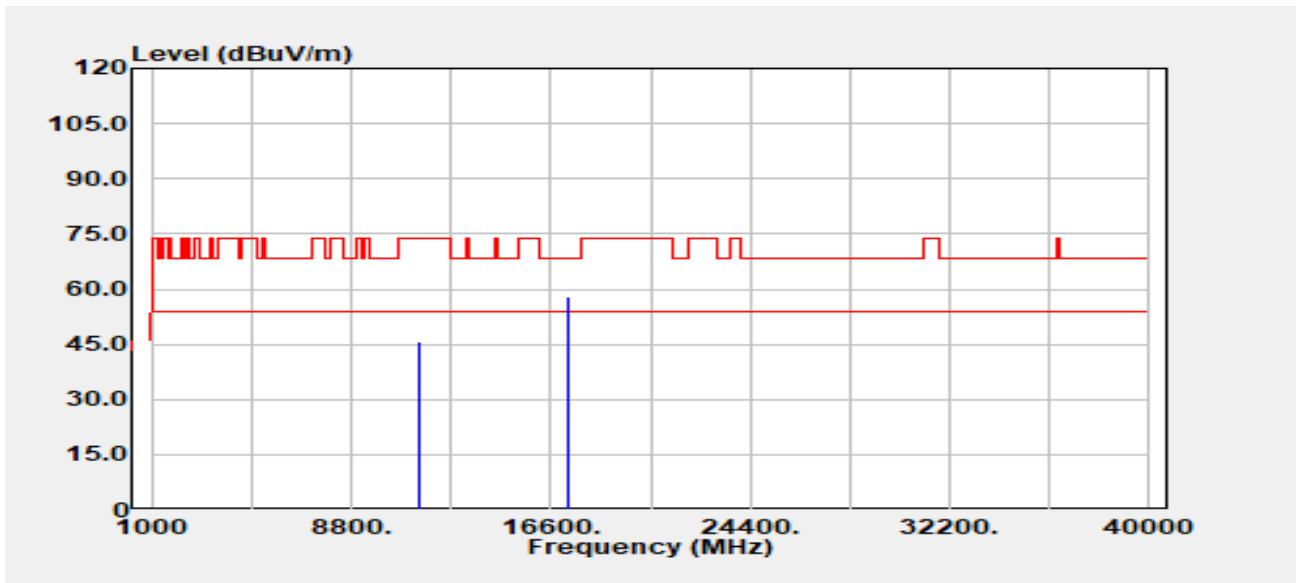

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11490.000 | Peak | 33.22 | 12.39 | 45.61 | 74.00 | -28.39 |
| 11490.000 | Average | 24.61 | 12.39 | 37.00 | 54.00 | -17.00 |
| 17235.000 | Peak | 31.77 | 26.10 | 57.87 | 68.20 | -10.33 |

Report No.: TMWK2308002691KR


| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :24.6/57 |
| Frequency | :5785 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

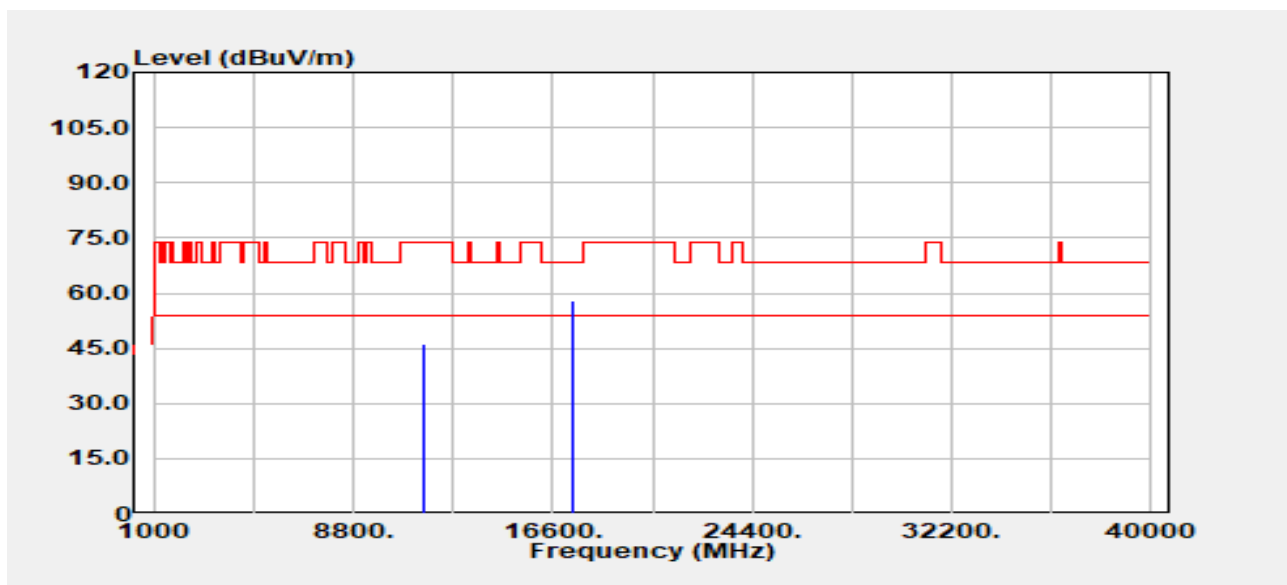

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11570.000 | Peak | 33.56 | 12.49 | 46.06 | 74.00 | -27.94 |
| 11570.000 | Average | 24.66 | 12.49 | 37.16 | 54.00 | -16.84 |
| 17355.000 | Peak | 32.56 | 25.47 | 58.03 | 68.20 | -10.17 |

Report No.: TMWK2308002691KR


| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :24.6/57 |
| Frequency | :5785 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

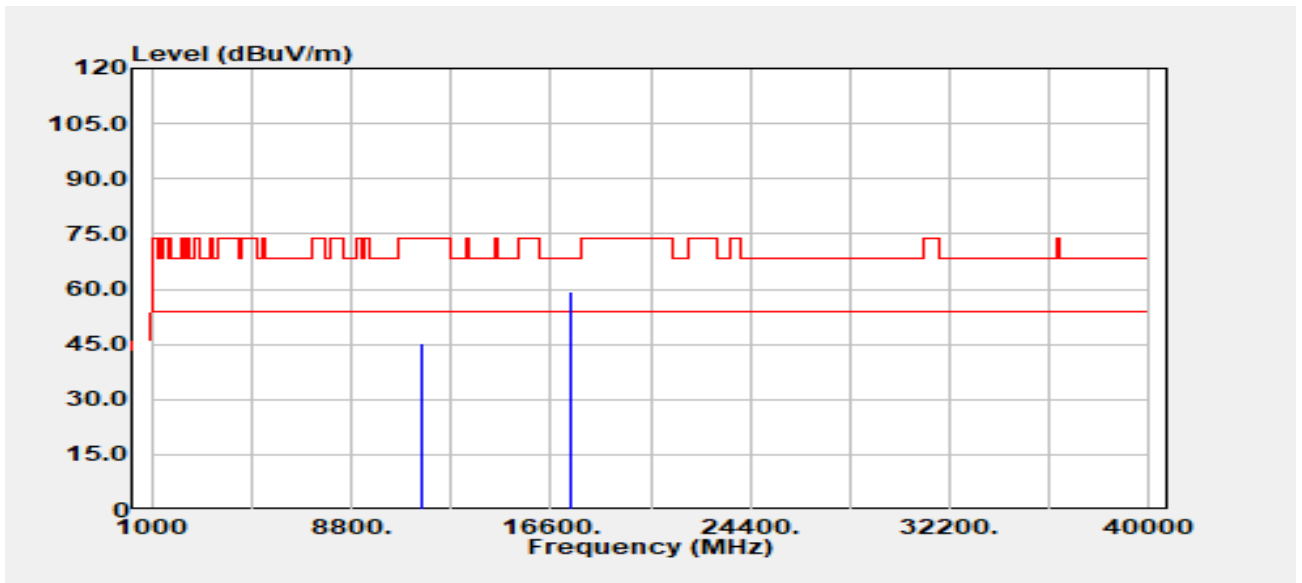

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11570.000 | Peak | 32.93 | 12.49 | 45.43 | 74.00 | -28.57 |
| 11570.000 | Average | 24.53 | 12.49 | 37.02 | 54.00 | -16.98 |
| 17355.000 | Peak | 33.63 | 25.47 | 59.10 | 68.20 | -9.10 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|-----------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-08-31 |
| Operation Band | :802.11a/Band4 | Temp./Humi. | :24.6/57 |
| Frequency | :5825 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

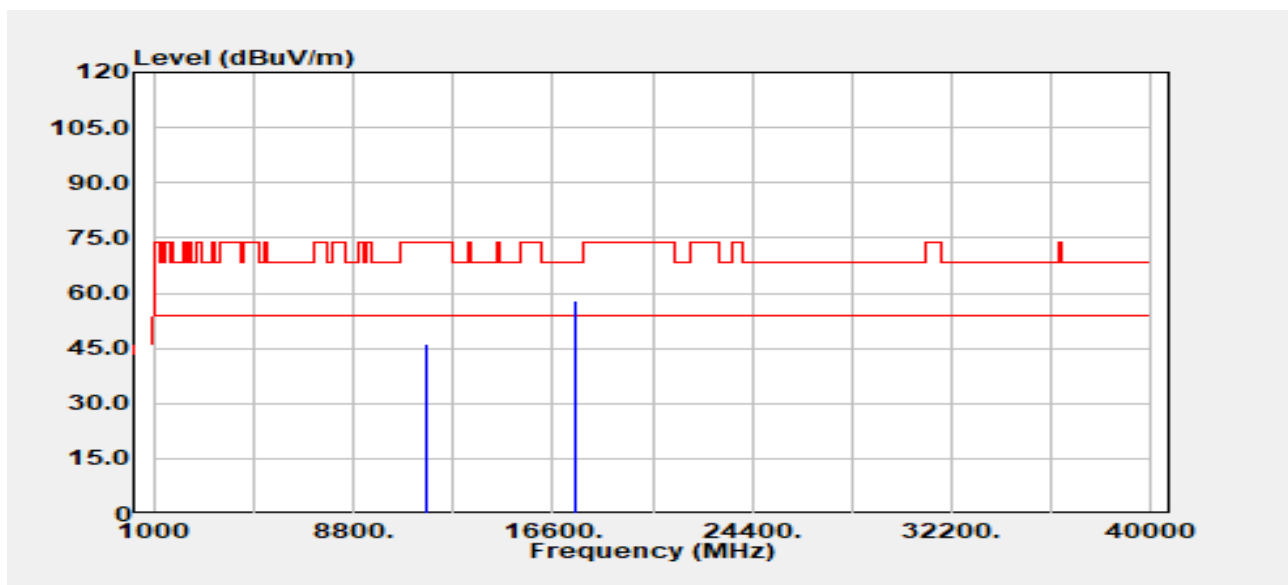


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11650.000 | Peak | 33.94 | 12.43 | 46.37 | 74.00 | -27.63 |
| 11650.000 | Average | 24.46 | 12.43 | 36.89 | 54.00 | -17.11 |
| 17475.000 | Peak | 33.08 | 25.06 | 58.14 | 68.20 | -10.06 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11a/Band4
 Frequency :5825 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-08-31
 Temp./Humi. :24.6/57
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

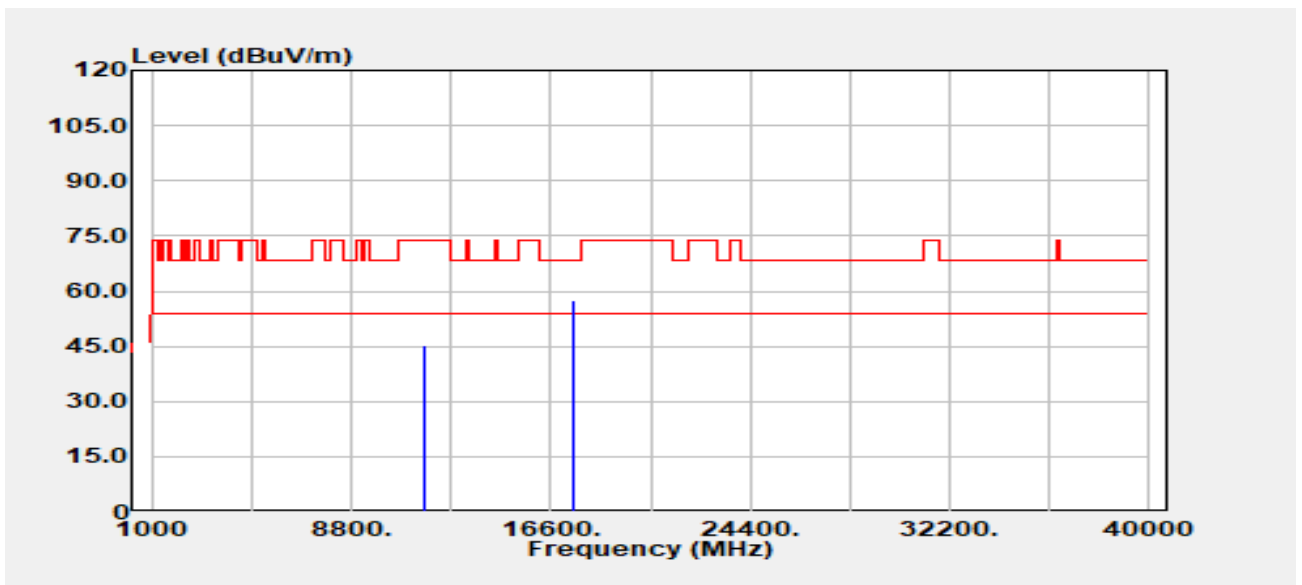


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11650.000 | Peak | 32.94 | 12.43 | 45.37 | 74.00 | -28.63 |
| 11650.000 | Average | 24.60 | 12.43 | 37.02 | 54.00 | -16.98 |
| 17475.000 | Peak | 32.35 | 25.06 | 57.41 | 68.20 | -10.79 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5745 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

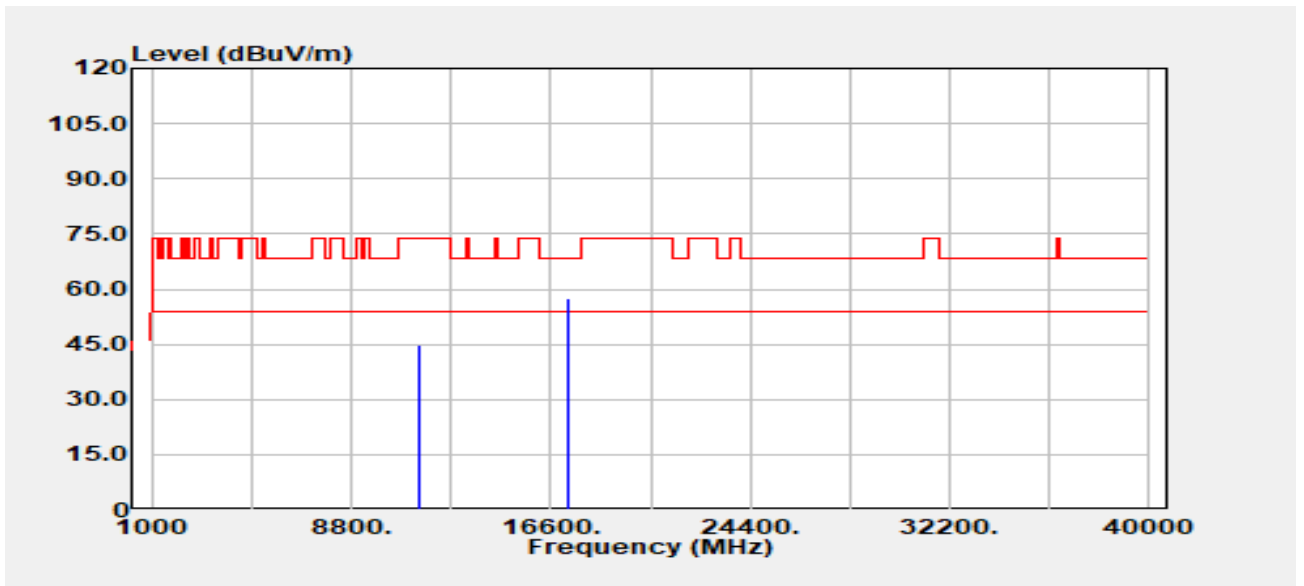


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11490.000 | Peak | 32.50 | 12.39 | 44.89 | 74.00 | -29.11 |
| 11490.000 | Average | 24.15 | 12.39 | 36.54 | 54.00 | -17.46 |
| 17235.000 | Peak | 31.19 | 26.10 | 57.29 | 68.20 | -10.91 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5745 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

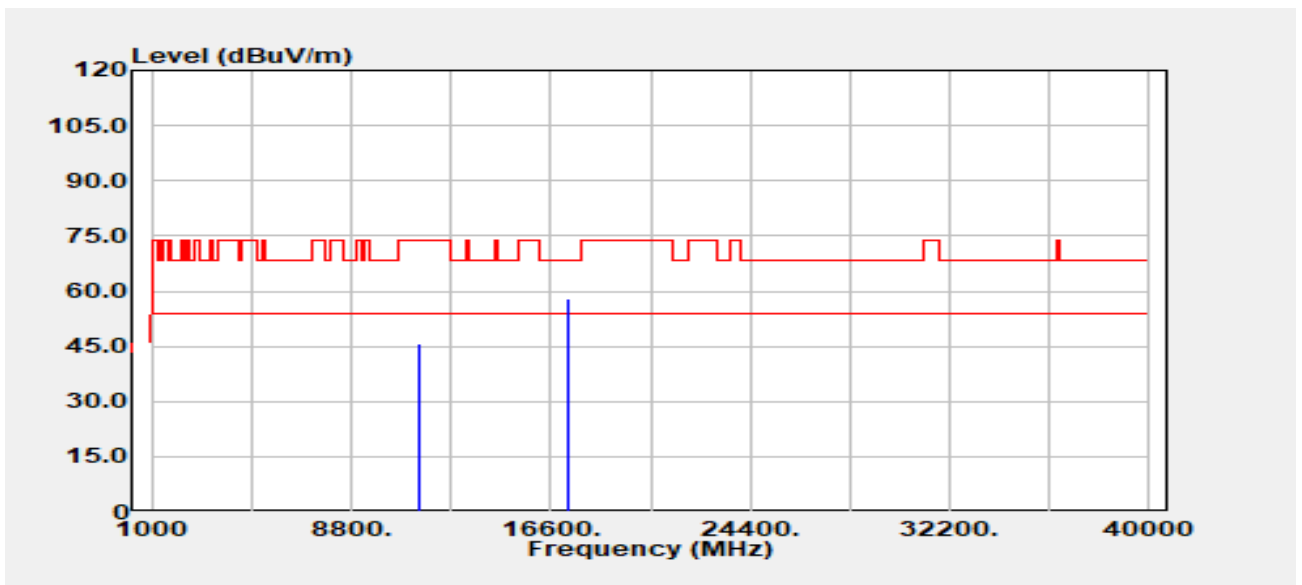


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11490.000 | Peak | 33.28 | 12.39 | 45.67 | 74.00 | -28.33 |
| 11490.000 | Average | 24.01 | 12.39 | 36.40 | 54.00 | -17.60 |
| 17235.000 | Peak | 31.86 | 26.10 | 57.96 | 68.20 | -10.24 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5785 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

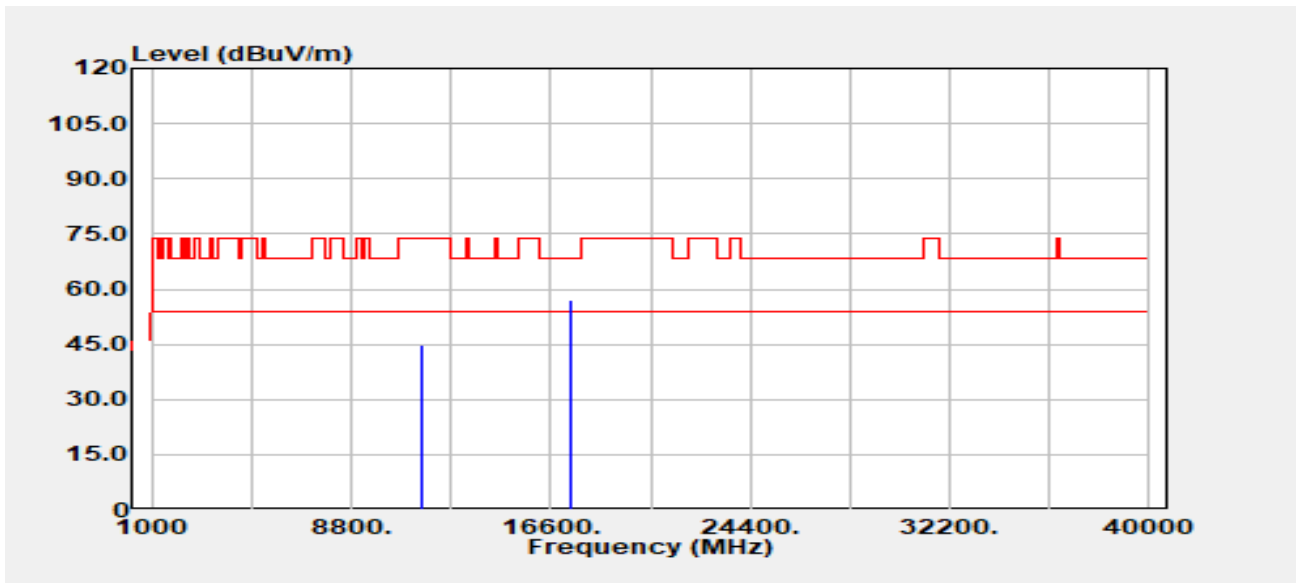


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11570.000 | Peak | 32.42 | 12.49 | 44.91 | 74.00 | -29.09 |
| 11570.000 | Average | 23.84 | 12.49 | 36.33 | 54.00 | -17.67 |
| 17355.000 | Peak | 31.54 | 25.47 | 57.01 | 68.20 | -11.19 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5785 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

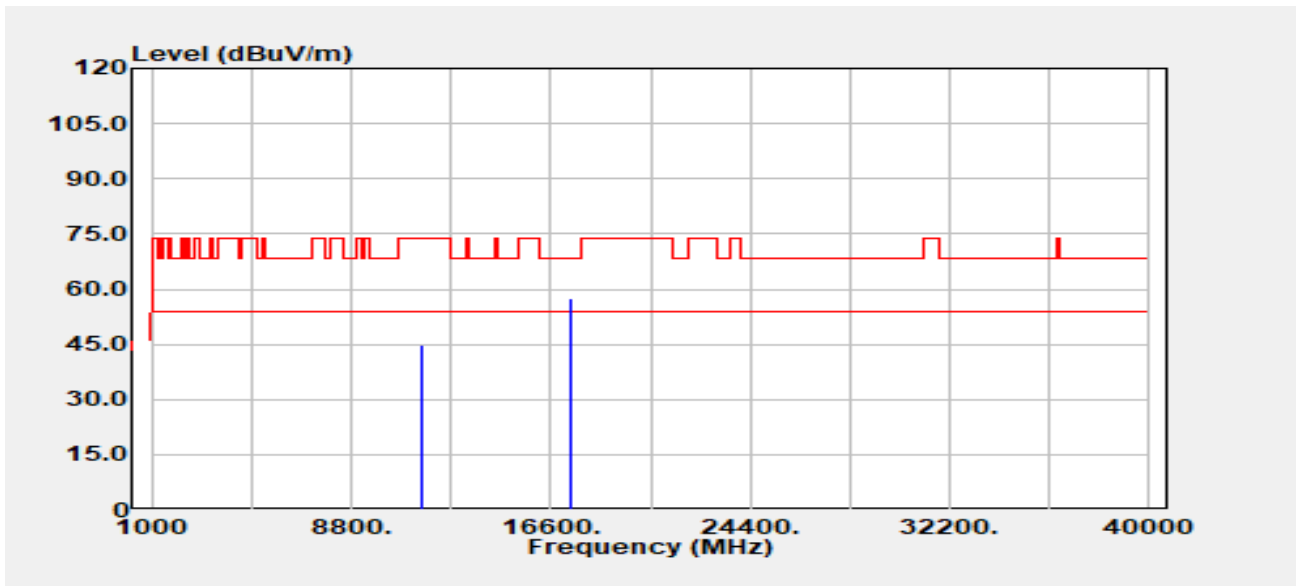


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11570.000 | Peak | 32.53 | 12.49 | 45.02 | 74.00 | -28.98 |
| 11570.000 | Average | 23.96 | 12.49 | 36.45 | 54.00 | -17.55 |
| 17355.000 | Peak | 32.01 | 25.47 | 57.48 | 68.20 | -10.72 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5825 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

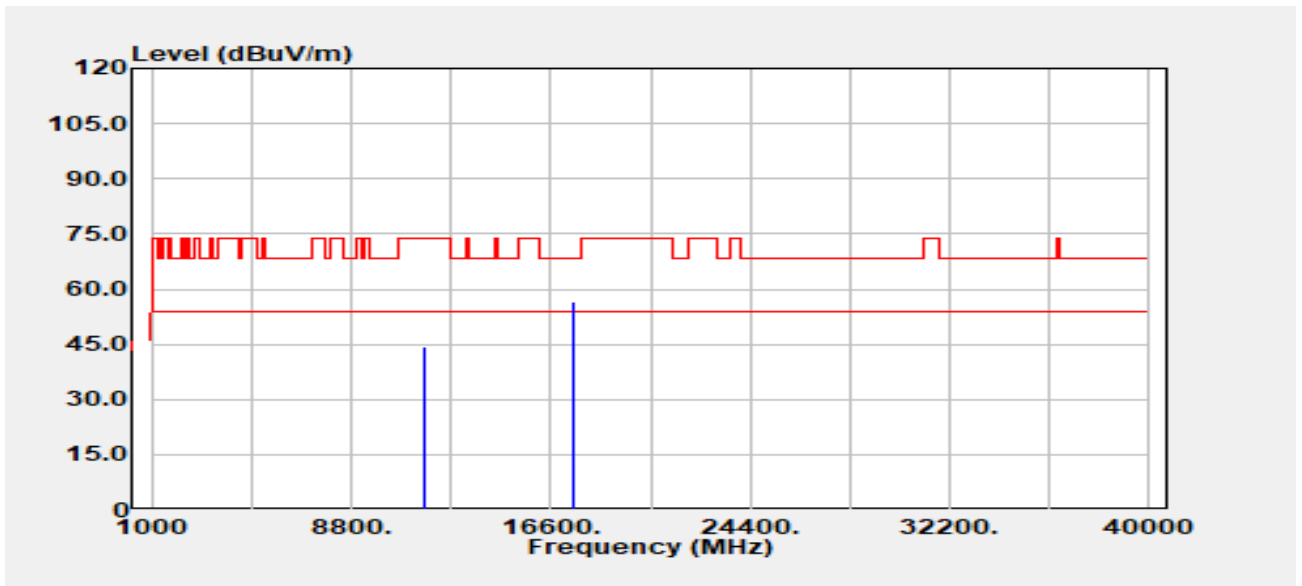


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11650.000 | Peak | 32.06 | 12.43 | 44.48 | 74.00 | -29.52 |
| 11650.000 | Average | 23.86 | 12.43 | 36.28 | 54.00 | -17.72 |
| 17475.000 | Peak | 31.57 | 25.06 | 56.63 | 68.20 | -11.57 |

Report No.: TMWK2308002691KR

Rev.: 00

Project Number :TM-2308000057P
 Operation Band :802.11n20/Band4
 Frequency :5825 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Horizontal
 Engineer :Ray.Li
 Test Chamber : 966A

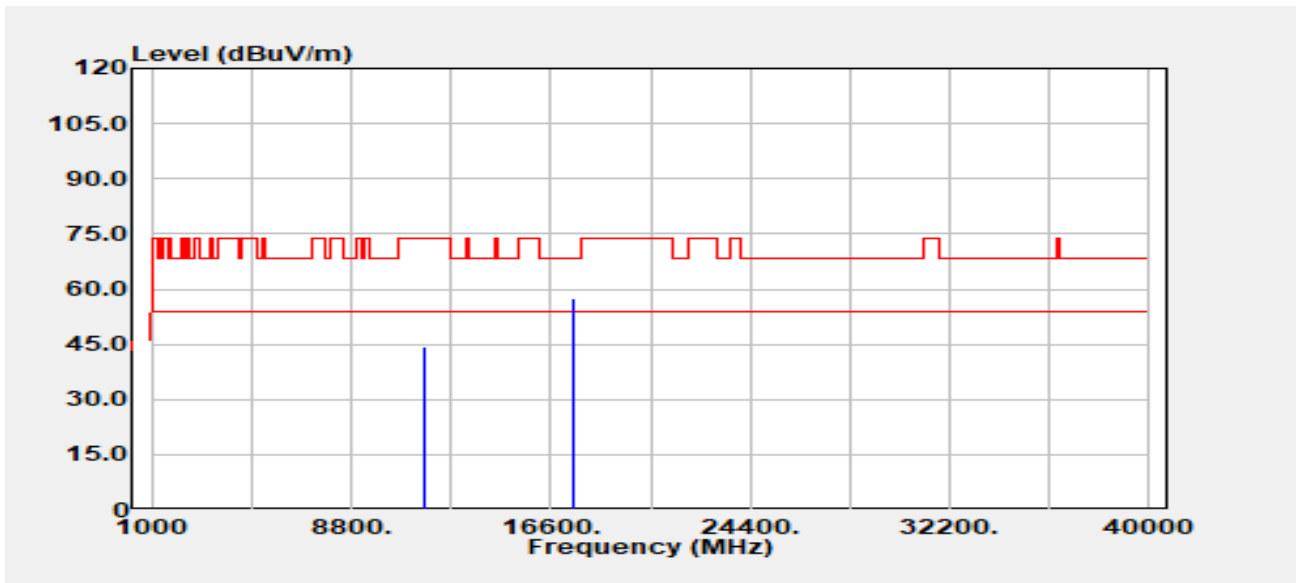


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11650.000 | Peak | 31.96 | 12.43 | 44.38 | 74.00 | -29.62 |
| 11650.000 | Average | 24.08 | 12.43 | 36.50 | 54.00 | -17.50 |
| 17475.000 | Peak | 32.52 | 25.06 | 57.58 | 68.20 | -10.62 |

Report No.: TMWK2308002691KR

Rev.: 00


Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5755 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

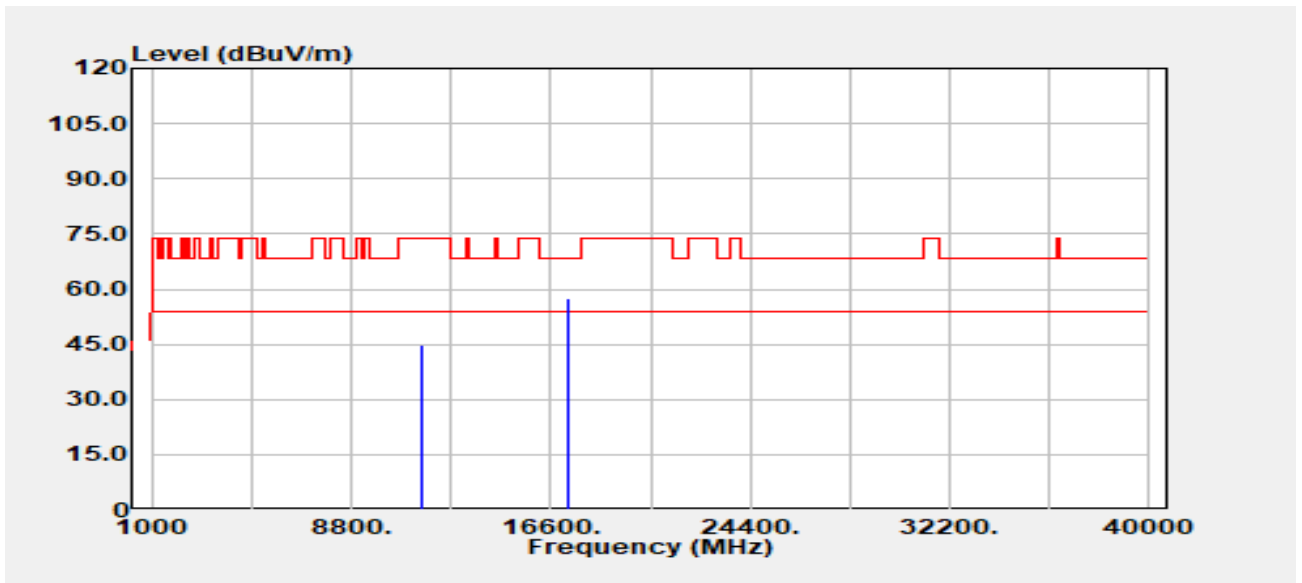

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11510.000 | Peak | 32.45 | 12.43 | 44.87 | 74.00 | -29.13 |
| 11510.000 | Average | 23.97 | 12.43 | 36.40 | 54.00 | -17.60 |
| 17265.000 | Peak | 31.54 | 26.14 | 57.68 | 68.20 | -10.52 |

| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11n40/Band4 | Temp./Humi. | :24.6/57 |
| Frequency | :5755 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

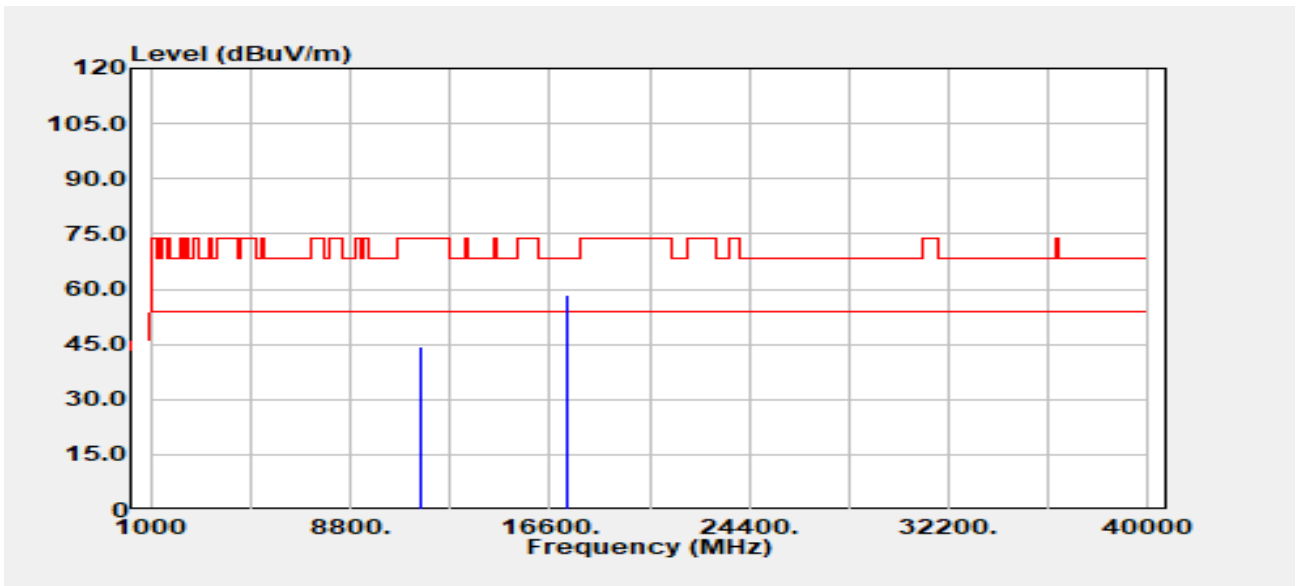


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11510.000 | Peak | 31.95 | 12.43 | 44.38 | 74.00 | -29.62 |
| 11510.000 | Average | 24.00 | 12.43 | 36.42 | 54.00 | -17.58 |
| 17265.000 | Peak | 32.35 | 26.14 | 58.49 | 68.20 | -9.71 |

Report No.: TMWK2308002691KR

Project Number :TM-2308000057P
 Operation Band :802.11n40/Band4
 Frequency :5795 MHz
 Operation Mode :TX
 EUT Pol :E2
 Setting :

Test Date :2023-09-01
 Temp./Humi. :24.6/57
 Antenna Pol. :Vertical
 Engineer :Ray.Li
 Test Chamber : 966A

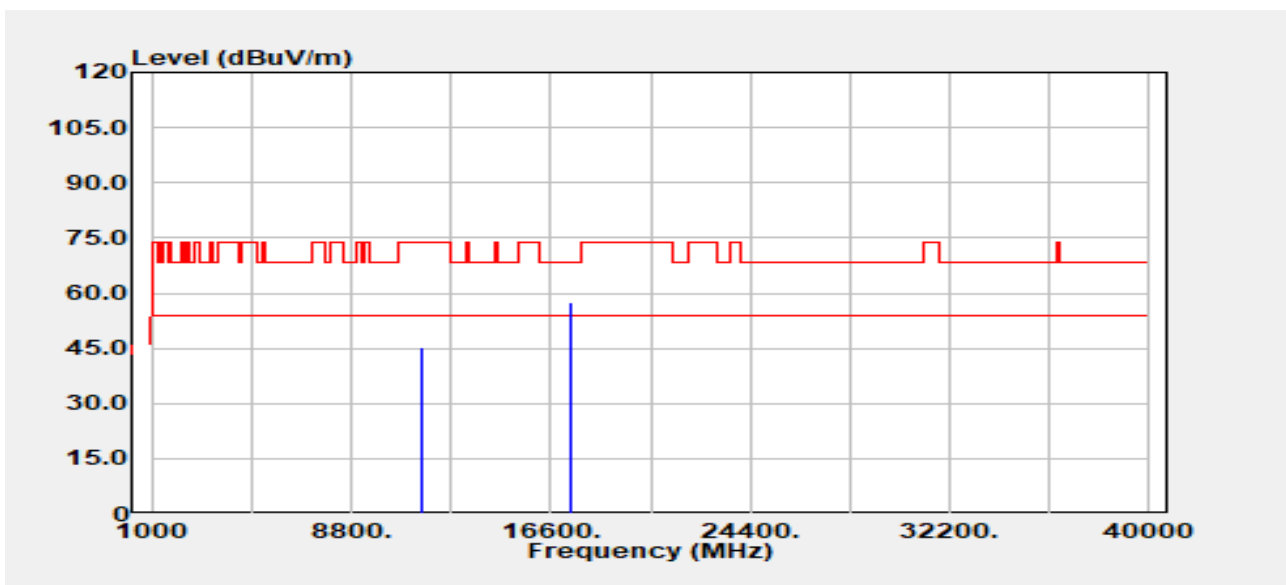


| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBμV | Factor dB | Actual FS dBμV/m | Limit dBμV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11590.000 | Peak | 32.86 | 12.48 | 45.34 | 74.00 | -28.66 |
| 11590.000 | Average | 23.98 | 12.48 | 36.46 | 54.00 | -17.54 |
| 17385.000 | Peak | 32.27 | 25.27 | 57.54 | 68.20 | -10.66 |

Report No.: TMWK2308002691KR

Rev.: 00


| | | | |
|----------------|------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11n40/Band4 | Temp./Humi. | :24.6/57 |
| Frequency | :5795 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

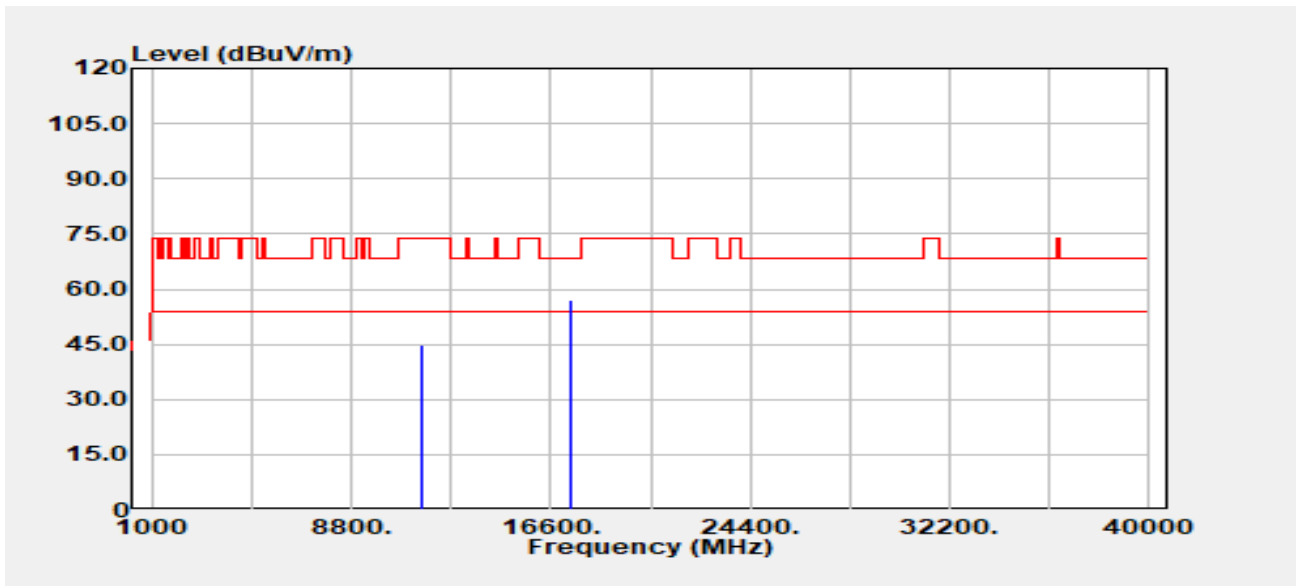

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11590.000 | Peak | 32.42 | 12.48 | 44.90 | 74.00 | -29.10 |
| 11590.000 | Average | 23.91 | 12.48 | 36.38 | 54.00 | -17.62 |
| 17385.000 | Peak | 31.74 | 25.27 | 57.01 | 68.20 | -11.19 |

Report No.: TMWK2308002691KR


| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band4 | Temp./Humi. | :24.6/57 |
| Frequency | :5775 MHz | Antenna Pol. | :Vertical |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

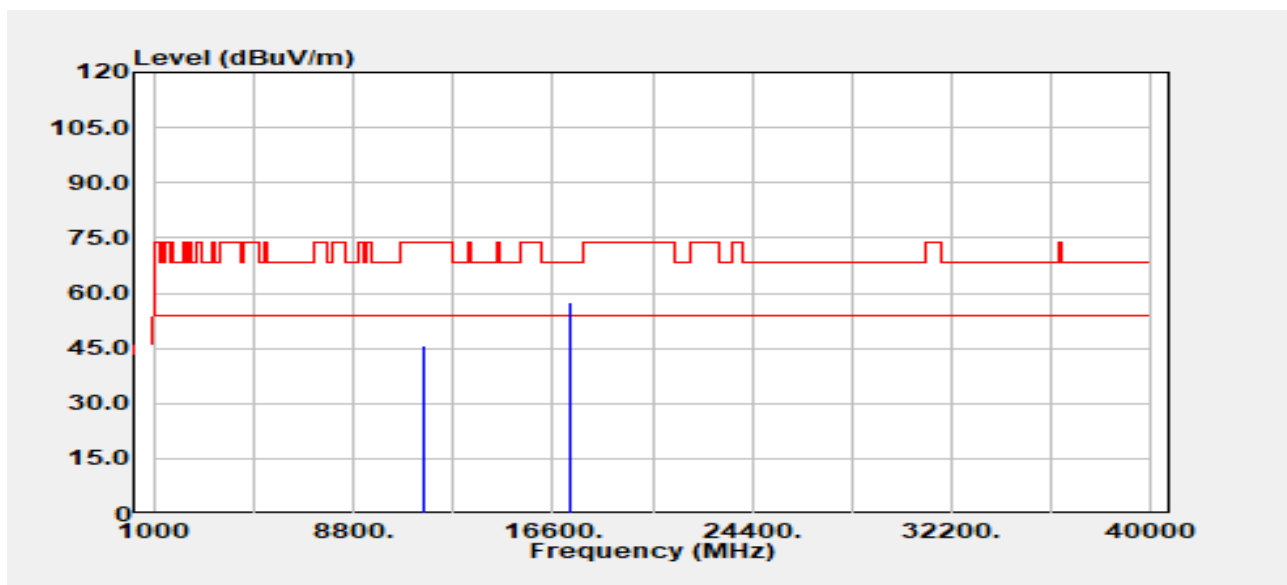

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dB μ V | Factor dB | Actual FS dB μ V/m | Limit dB μ V/m | Margin dB |
|--------------|------------------------------|--------------------------------------|--------------|------------------------------|-----------------------|--------------|
| 11550.000 | Peak | 33.42 | 12.51 | 45.92 | 74.00 | -28.08 |
| 11550.000 | Average | 24.39 | 12.51 | 36.89 | 54.00 | -17.11 |
| 17325.000 | Peak | 31.92 | 25.79 | 57.71 | 68.20 | -10.49 |

Report No.: TMWK2308002691KR

| | | | |
|----------------|-------------------|--------------|-------------|
| Project Number | :TM-2308000057P | Test Date | :2023-09-01 |
| Operation Band | :802.11ac80/Band4 | Temp./Humi. | :24.6/57 |
| Frequency | :5775 MHz | Antenna Pol. | :Horizontal |
| Operation Mode | :TX | Engineer | :Ray.Li |
| EUT Pol | :E2 | Test Chamber | : 966A |
| Setting | : | | |

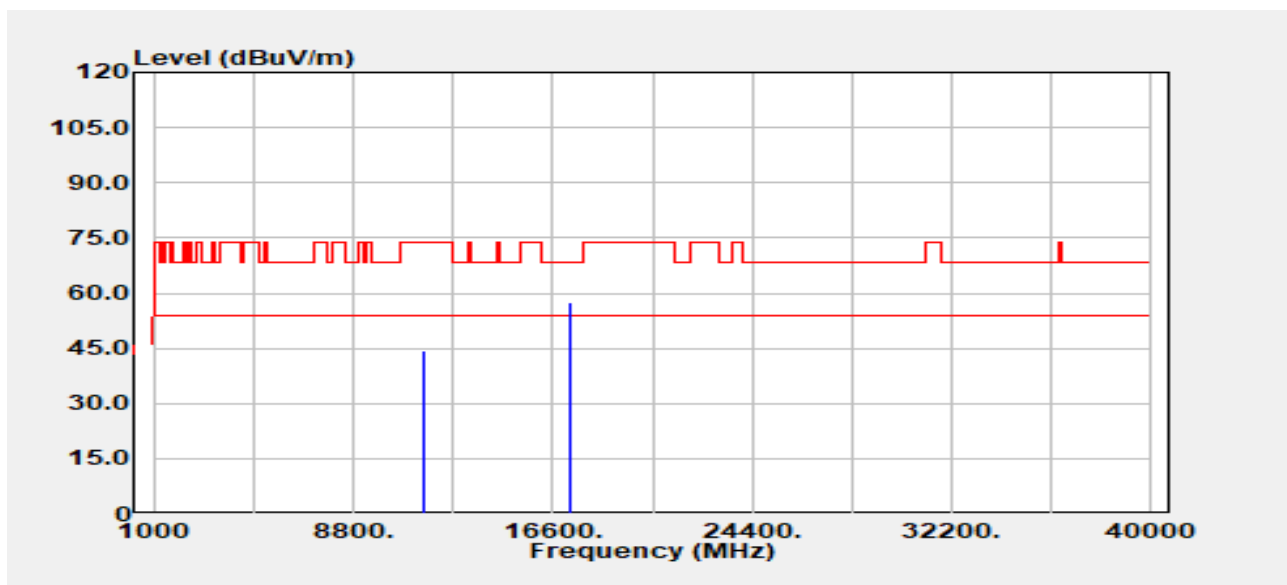

| Freq. MHz | Detector Mode PK/QP/AV | Spectrum Read Level dBuV | Factor dB | Actual FS dBuV/m | Limit dBuV/m | Margin dB |
|--------------|------------------------------|--------------------------------|--------------|------------------------|-----------------|--------------|
| 11550.000 | Peak | 31.92 | 12.51 | 44.43 | 74.00 | -29.57 |
| 11550.000 | Average | 24.33 | 12.51 | 36.84 | 54.00 | -17.16 |
| 17325.000 | Peak | 31.90 | 25.79 | 57.69 | 68.20 | -10.51 |

- End of Test Report -