

TEST REPORT

ACCORDING TO: FCC CFR 47 PART 15 Subpart C, section 15.231(a)

FOR:

Aquatron Robotic Systems Ltd.

Remote controller

Part numbers:

RC0100100, RC0100200

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Transmitter characteristics	5
7	Transmitter tests according to FCC 47CFR part 15 subpart C requirements	6
7.1	Periodic operation requirements	6
7.2	Field strength of emissions.....	14
7.3	Occupied bandwidth test	52
7.4	Antenna requirements.....	55
7.5	Radiated emission measurements	56
8	APPENDIX A Test equipment and ancillaries used for tests.....	60
9	APPENDIX B Test laboratory description.....	61
10	APPENDIX C Abbreviations and acronyms	62
11	APPENDIX D Test equipment correction factors	63
12	APPENDIX E Measurement uncertainties.....	70
13	APPENDIX F Specification references	70

1 Applicant information

Client name: Aquatron Robotic Systems Ltd.
Address: P.O.Box 1088, Alon Tavor Industrial Zone, Afula Elite 18550, Israel
Telephone: +972 4658 0000
Fax: +972 4652 3520
E-mail: arnold@aquatron.co.il
Contact name: Mr. Arnold Goodez

2 Equipment under test attributes

Product name: Remote controller
Product type: Transmitter
Operating frequency: 433.92 MHz
Part numbers: RC0100100 (software release 1.6)
RC0100200 (software release 5.0)
Receipt date: 5/9/2007

3 Manufacturer information

Manufacturer name: Aquatron Robotic Systems Ltd.
Address: P.O.Box 1088, Alon Tavor Industrial Zone, Afula Elite 18550, Israel
Telephone: +972 4658 0000
Fax: +972 4652 3520
E-mail: arnold@aquatron.co.il
Contact name: Mr. Arnold Goodez

4 Test details

Project ID: 17721
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 5/9/2007
Test completed: 8/26/2007; 11/21/2007
Test specification: FCC Part 15, subpart C, §15.231(a); subpart B, §15.109

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.231(a), Periodic operation requirements	Pass
Section 15.231(b), Field strength of emissions	Pass
Section 15.231(c), Occupied bandwidth	Pass
Section 15.207(a), Conducted emission	Not required
Section 15.203, Antenna requirement	Pass
Unintentional emissions	
Section 15.107, Conducted emission at AC power port	Not required
Section 15.109, Radiated emission	Pass
Section 15.111, Conducted emission at receiver antenna port	Not required

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report replaces the previously issued test report identified by Doc ID: AQARAD_FCC.17721.

	Name and Title	Date	Signature
Tested by:	Mr. S. Samokha, test engineer	November 21, 2007	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	November 21, 2007	
Approved by:	Mr. M. Nikishin, EMC and radio group leader	November 21, 2007	

6 EUT description

6.1 General information


The EUT is a remote controller, which is equipped with an integral antenna and is powered by 3.6V Lithium battery. The EUT operates at 433.92 MHz. The EUT clocks are 8 MHz and 10 MHz.

The EUT model RC0100100 has 6 buttons and is intended for commercial use.


The EUT model RC0100200 has 4 buttons and is intended for residential use.

6.2 Test configuration

RC0100100

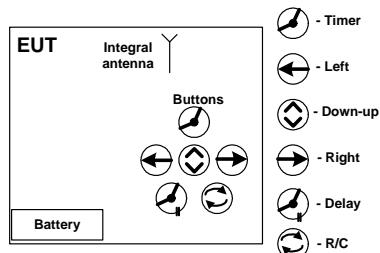

RC0100200

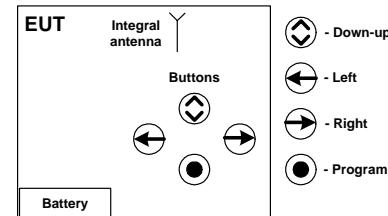

6.3 Transmitter characteristics

Type of equipment						
X	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Intended use		Condition of use				
fixed		Always at a distance more than 2 m from all people				
mobile		Always at a distance more than 20 cm from all people				
X	portable	May operate at a distance closer than 20 cm to human body				
Assigned frequency range		433.05 – 434.79 MHz				
Operating frequency range		433.92 MHz				
RF channel spacing		60 kHz				
Maximum rated output power		At transmitter 50 Ω RF output connector				
		Effective radiated power (for equipment with no RF connector)				
		dBm				
		-8.73 dBm				
Is transmitter output power variable?		No				
		continuous variable				
		X	stepped variable with stepsize			
			3 dB			
		minimum RF power				
		-18 dBm				
		maximum RF power				
		-8.73 dBm				
Antenna connection						
unique coupling	standard connector	X	integral	with temporary RF connector		
				without temporary RF connector		
Transmitter 99% power bandwidth						
60 kHz						
Transmitter aggregate data rate/s						
9300 Bps						
Type of modulation						
FSK						
Type of multiplexing						
TDMA						
Transmitter power source						
X	Battery	Nominal rated voltage	3.6 VDC	Battery type		
	DC	Nominal rated voltage	VDC	Lithium		
	AC mains	Nominal rated voltage	VAC	Frequency		
				Hz		

Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 10:19:41 AM	Relative Humidity:	43 %
Temperature: 24.7 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

7 Transmitter tests according to FCC 47CFR part 15 subpart C requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not last longer than 2 seconds per hour (button pressed/released).

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated manually. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in the associated plots.

Figure 7.1.1 Setup for transmitter shut down test



Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 10:19:41 AM	Relative Humidity:	43 %
Temperature: 24.7 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Table 7.1.1 Periodic operation requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	Plots 7.1.1 – 7.1.10	Comply
Transmitter activated automatically shall cease transmission within 5 seconds	NA	NA
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	NA	NA


Reference numbers of test equipment used

HL 0337	HL 3001					
---------	---------	--	--	--	--	--


Full description is given in Appendix A.

Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 10:19:41 AM	Relative Humidity:	43 %
Temperature: 24.7 °C	Air Pressure: 1002 hPa	Power Supply: Battery	
Remarks:			

Plot 7.1.1 Transmitter shut down test result
RC0100200, "Down-up", "Program" buttons

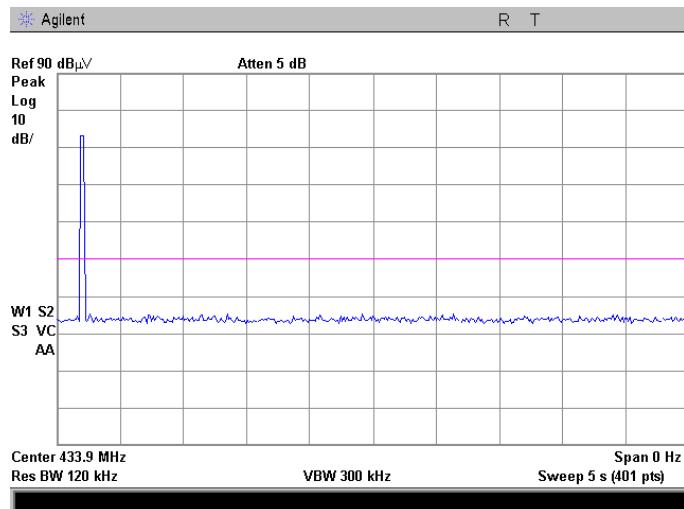


Plot 7.1.2 Transmission pulse duration
RC0100200, "Down-up", "Program" buttons

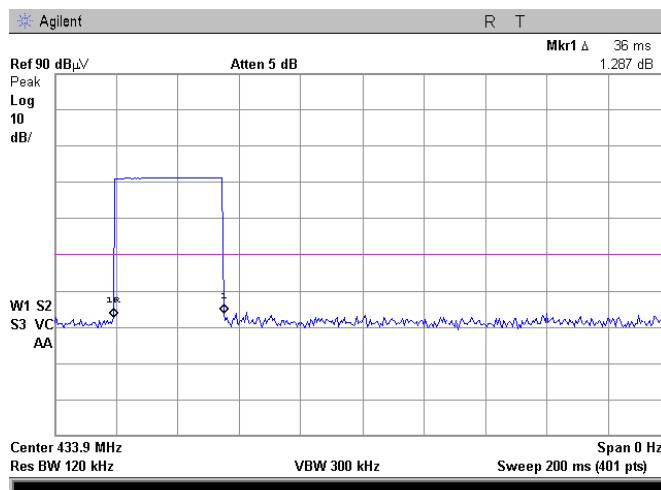


Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 10:19:41 AM	Relative Humidity:	43 %
Temperature: 24.7 °C	Air Pressure: 1002 hPa	Power Supply: Battery	
Remarks:			

Plot 7.1.3 Transmitter shut down test result
RC0100200, "Left", "Right" buttons

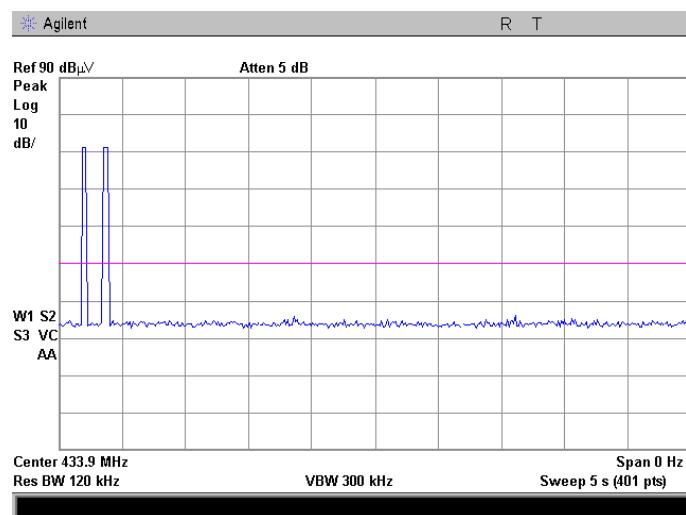

Plot 7.1.4 Transmission pulse duration
RC0100200, "Left", "Right" buttons

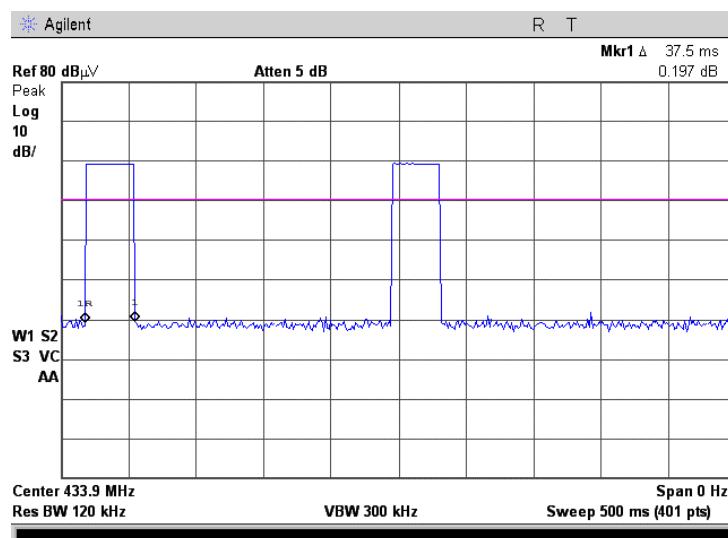




HERMON LABORATORIES


Report ID: AQARAD_FCC.17721_rev1.doc
Date of Issue: November 2007

Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 10:19:41 AM	Relative Humidity:	43 %
Temperature: 24.7 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

**Plot 7.1.5 Transmission pulse duration
RC0100200, "Left", "Right" buttons**

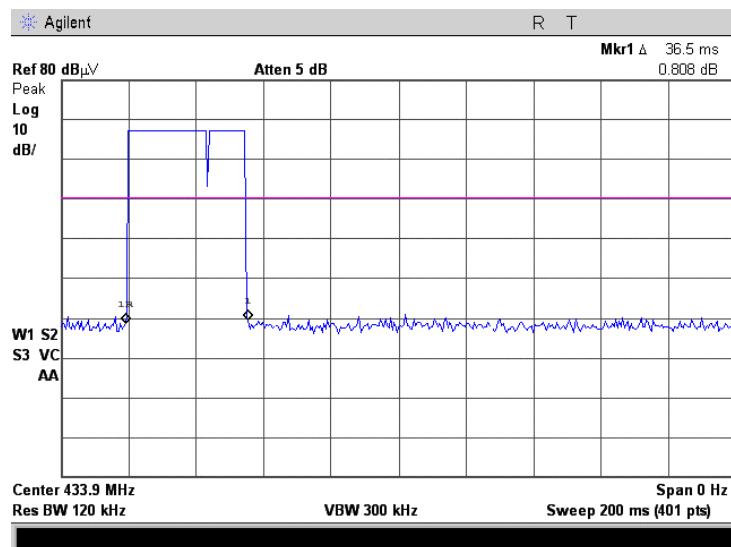


**Plot 7.1.6 Transmission pulse period
RC0100200, "Left", "Right" buttons**

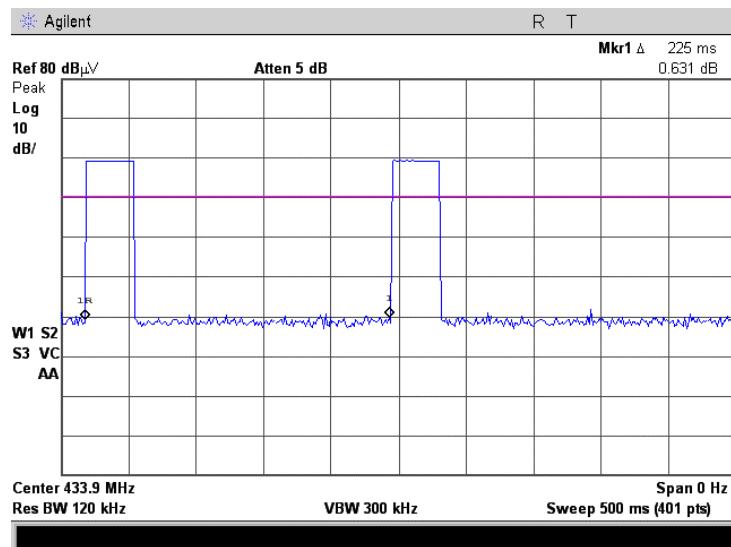


Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 10:19:41 AM	Relative Humidity:	43 %
Temperature: 24.7 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Plot 7.1.7 Transmitter shut down test result
RC0100100, "Down-up", "Timer", "Delay", "R/C" buttons

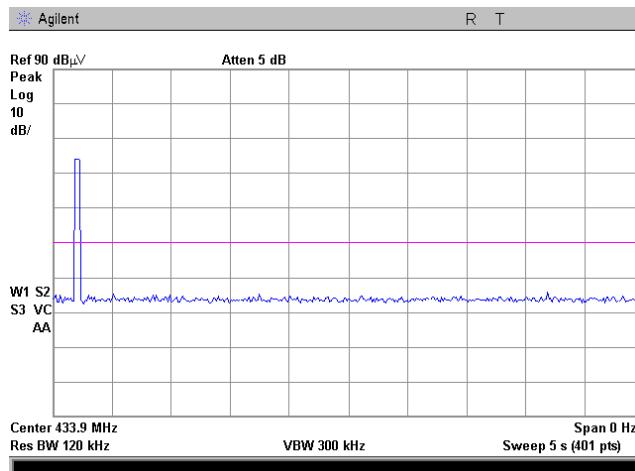


Plot 7.1.8 Transmission pulse duration
RC0100100, "Down-up", "Timer", "Delay", "R/C" buttons

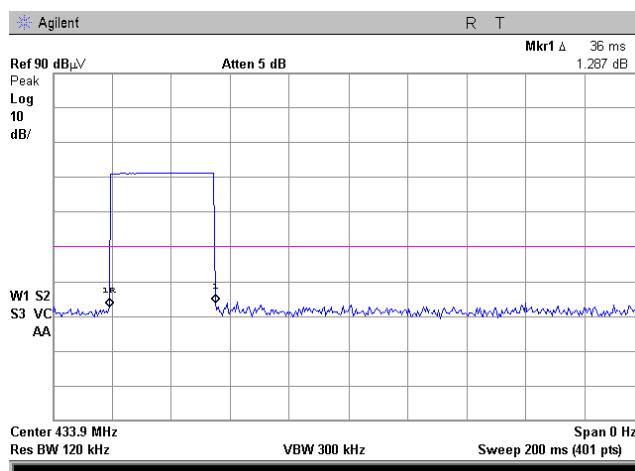


Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 10:19:41 AM	Relative Humidity:	43 %
Temperature: 24.7 °C	Air Pressure: 1002 hPa	Power Supply: Battery	
Remarks:			

Plot 7.1.9 Transmitter shut down test result
RC0100100, "Left", "Right" buttons

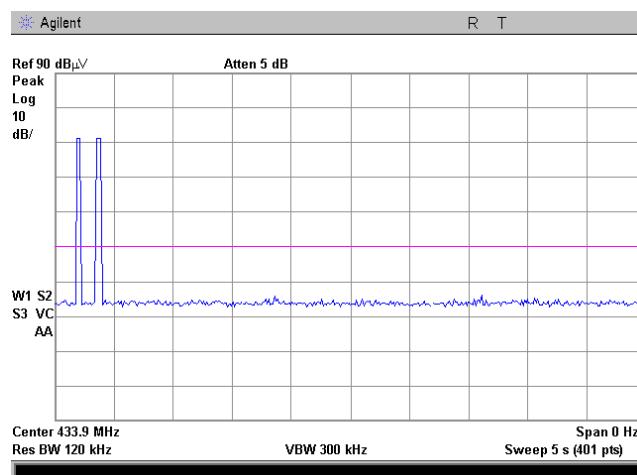


Plot 7.1.10 Transmission pulse duration
RC0100100, "Left", "Right" buttons

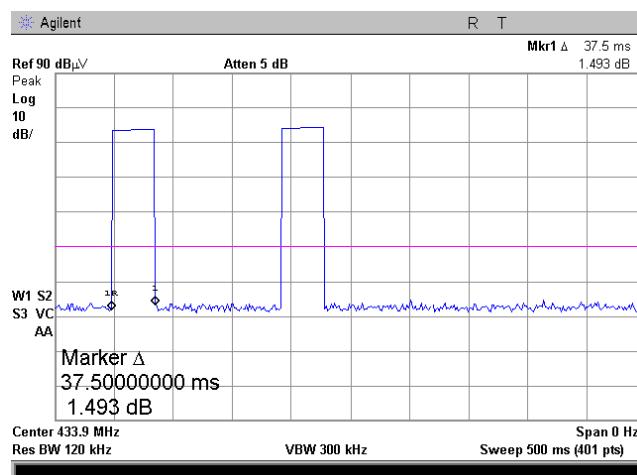


Test specification:	Section 15.231(a), Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 10:19:41 AM	Relative Humidity:	43 %
Temperature: 24.7 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

**Plot 7.1.11 Transmission pulse period
RC0100100, "Left", "Right" buttons**

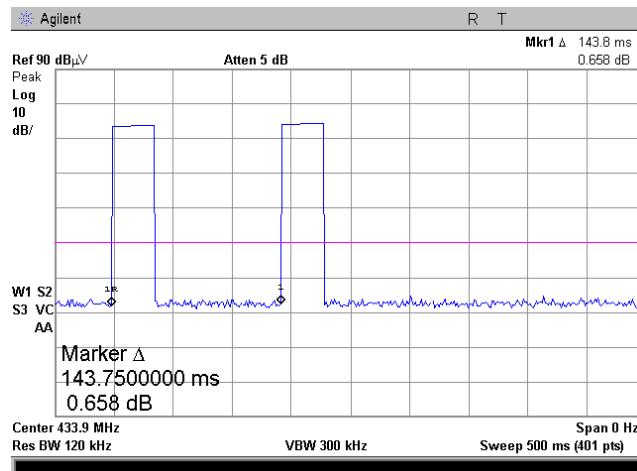

**Plot 7.1.12 Transmission burst duration
RC0100100, "Left", "Right" buttons**

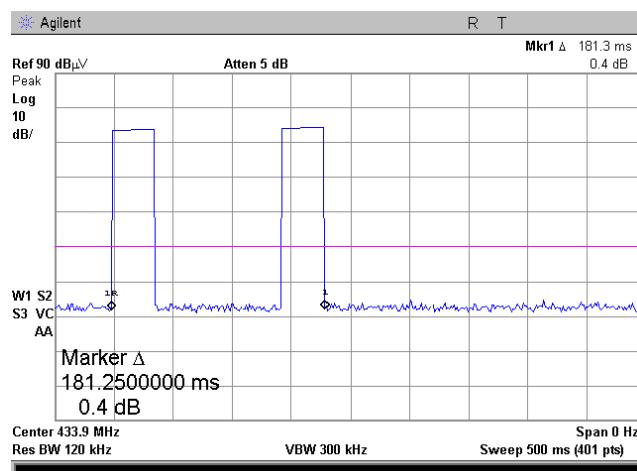

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

7.2 Field strength of emissions

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
433.9	100.82	80.82

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	80.82	60.82
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705		73.8 – 63.0**			
1.705 – 30.0*		69.5			
30 – 88	NA	40.0	NA		
88 – 216		43.5			
216 – 960		46.0			
960 – 1000		54.0			
Above 1000	74.0	NA	54.0		

* - The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lim_{S2} = Lim_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(µV/m) was calculated as follows:

$$Lim_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$Lim_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.2.2.3 The worst test results (the lowest margins) were found in the EUT part number RC0100200, Z-axis position, recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were found in the EUT part number RC0100200, Z-axis position, recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz


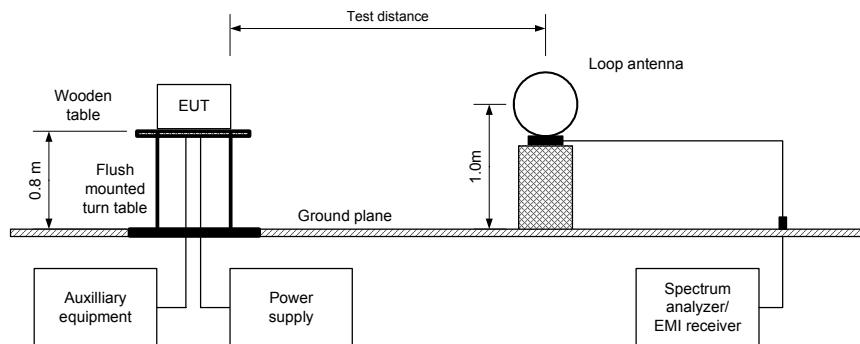


Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz

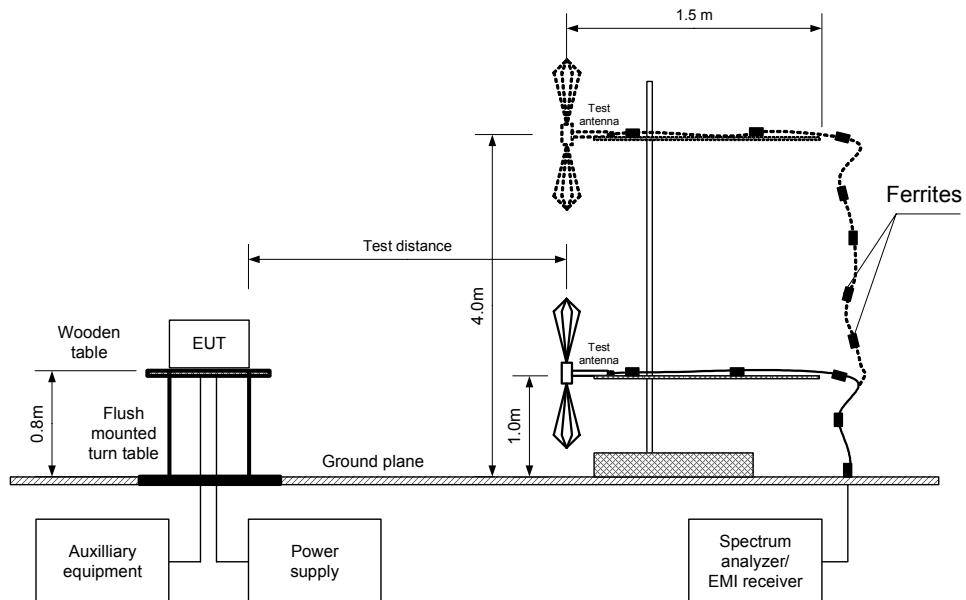

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz
EUT part number RC0100200

TEST DISTANCE:	3 m
EUT POSITION:	Z-Axis
MODULATION:	FSK
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
TRANSMITTER OUTPUT POWER:	0.134 mW
INVESTIGATED FREQUENCY RANGE:	0.009 - 4400 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Log periodic (200 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
Fundamental emission											
433.9	V	1.3	164	86.5	100.82	-14.32	-8.79	77.71	80.82	-3.11	Pass
Spurious emissions											
867.90	V	1.3	196	56.8	80.82	-30.02	-8.79	48.01	60.82	-12.81	Pass
1.3020	V	1.0	162	55.7	74.00	-18.30	-8.79	46.91	54.00	-7.09	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = dB below (negative if above) specification limit.

Table 7.2.4 Average factor calculation

Transmission		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms		
36.36	206.1	-	-8.79

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{100\text{ms}} \right)$$

Reference numbers of test equipment used

HL 0415	HL 0446	HL 0465	HL 0521	HL 0569	HL 0589	HL 0593	HL 0594
HL 0604	HL 1004	HL 1424	HL 1430	HL 1947	HL 2009	HL 2259	HL 2432
HL 2780							

Full description is given in Appendix A.

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE: 3 m
 EUT POSITION: 3 orthogonal
 MODULATION: FSK
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1.0 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 ≥ Resolution bandwidth
 VIDEO BANDWIDTH: Active loop (9 kHz – 30 MHz)
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No spurious emissions were found.								Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Table 7.2.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used

HL 0415	HL 0446	HL 0465	HL 0521	HL 0589	HL 0593	HL 0594	HL 0604
HL 1004	HL 2009						


Full description is given in Appendix A.

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Plot 7.2.1 Radiated emission measurements from 9 to 150 kHz
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis

 10:24:24 JUN 29, 2007
 ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 9.8 kHz
 71.07 dB μ V/m

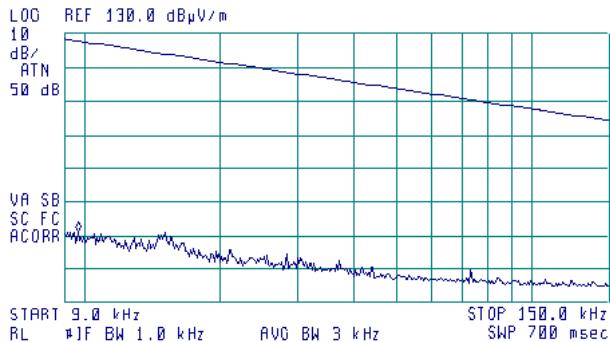

Plot 7.2.2 Radiated emission measurements from 0.15 to 30 MHz
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis

 10:28:28 JUN 29, 2007
 ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 170 kHz
 57.84 dB μ V/m




Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Plot 7.2.3 Radiated emission measurements from 30 to 1000 MHz
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis

09:41:30 JUN 29, 2007

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 431.5 MHz
 66.26 dB μ V/m

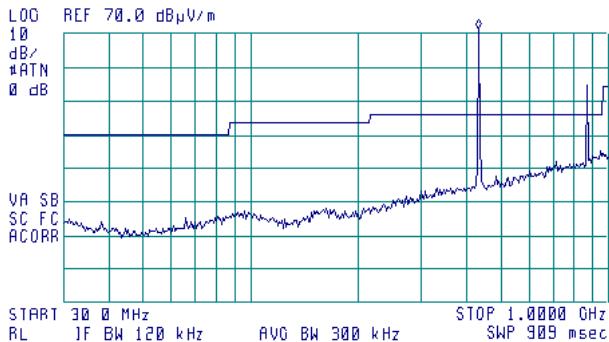


Plot 7.2.4 Radiated emission measurements from 30 to 1000 MHz
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Z-Axis

08:55:18 JUN 29, 2007


ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 431.5 MHz
 64.72 dB μ V/m

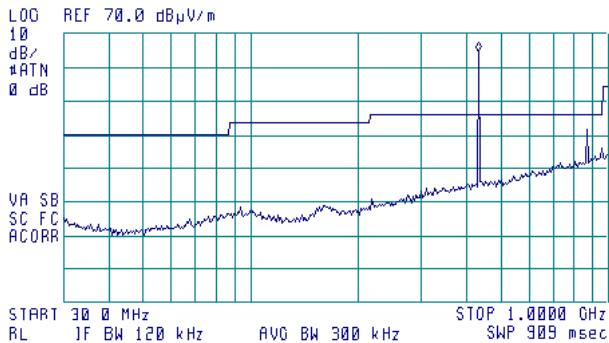

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.5 Radiated emission measurements from 1000 to 2000 MHz
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis

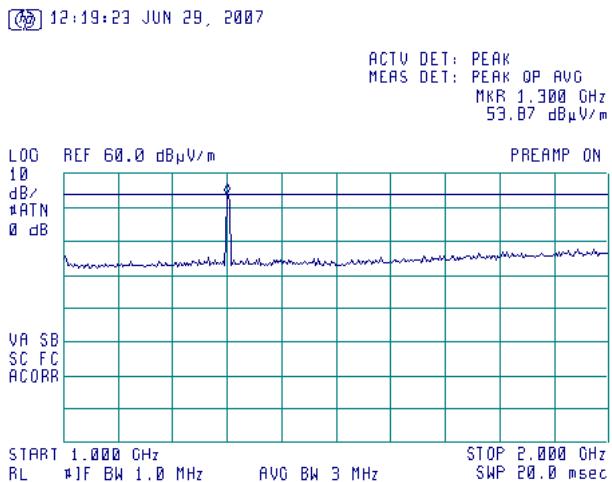

Plot 7.2.6 Radiated emission measurements from 1000 to 2000 MHz
EUT part number RC0100200


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Z-Axis

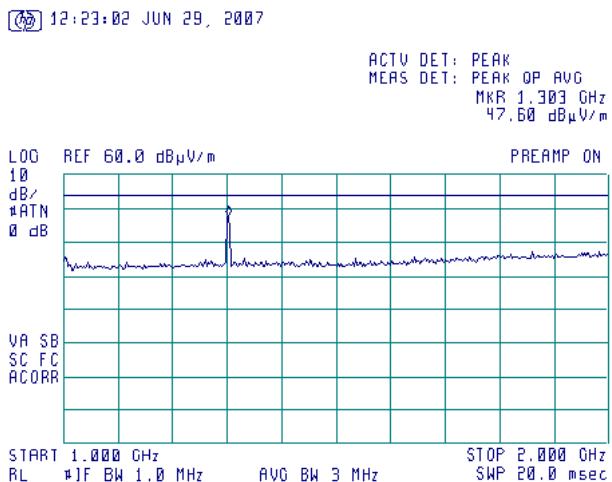

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.7 Radiated emission measurements from 2 GHz to 4.4 GHz
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis

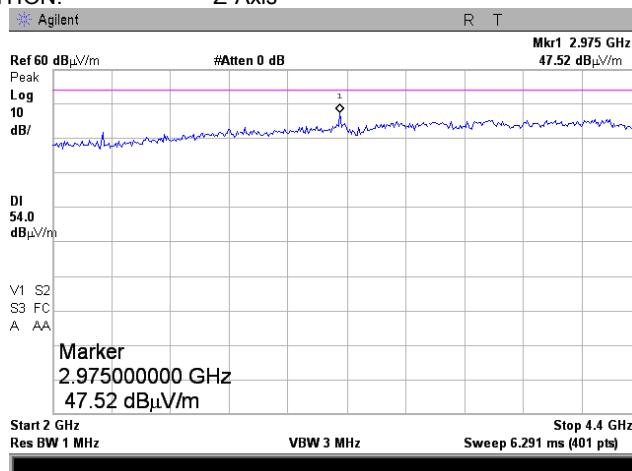

Plot 7.2.8 Radiated emission measurements from 2 GHz to 4.4 GHz
EUT part number RC0100200


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Z-Axis

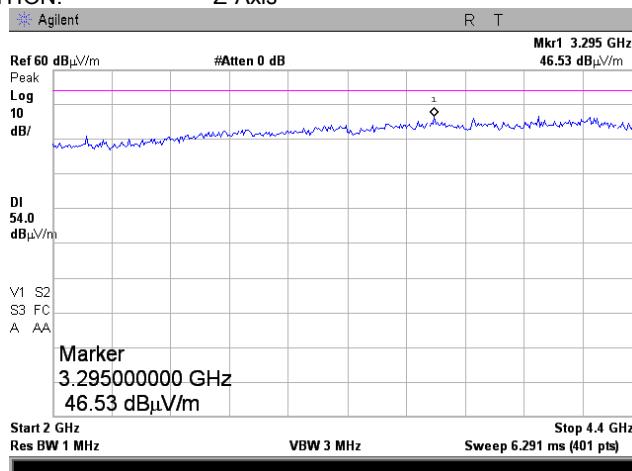

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.9 Radiated emission measurements at the fundamental frequency
EUT part number RC0100200

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-Axis

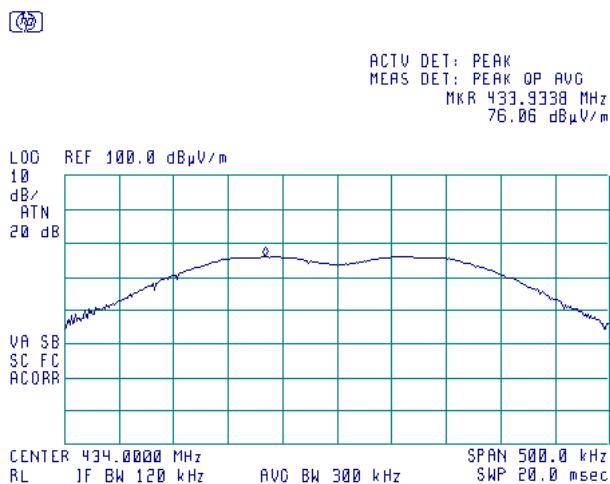

Plot 7.2.10 Radiated emission measurements at the fundamental frequency
EUT part number RC0100200


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: X-Axis

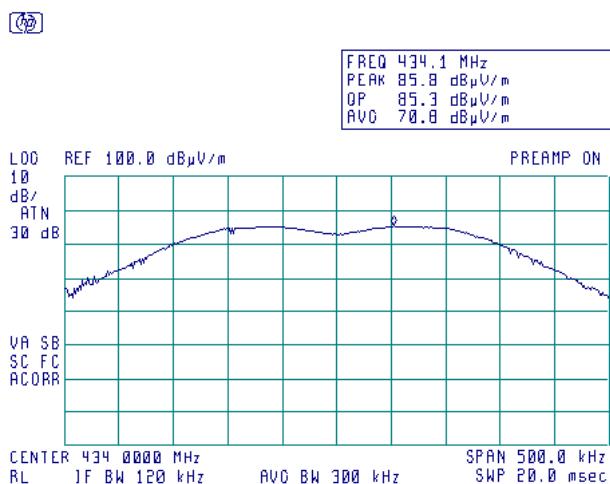

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.11 Radiated emission measurements at the fundamental frequency
EUT part number RC0100200

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Y-Axis

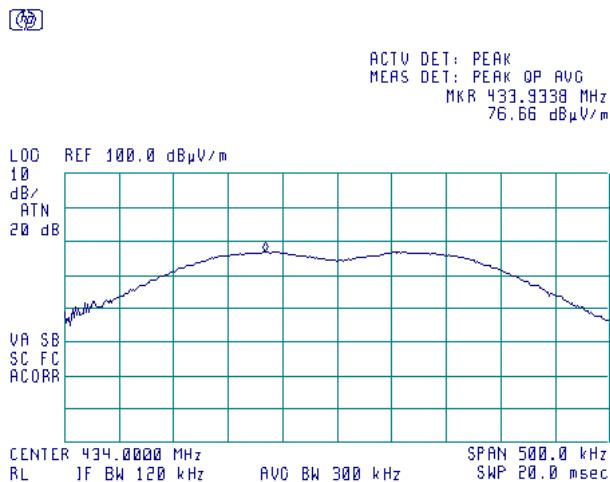

Plot 7.2.12 Radiated emission measurements at the fundamental frequency
EUT part number RC0100200


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Y-Axis

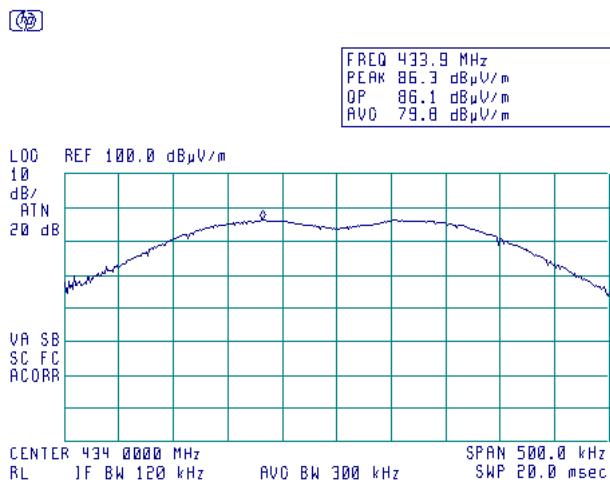

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.13 Radiated emission measurements at the fundamental frequency
EUT part number RC0100200

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis

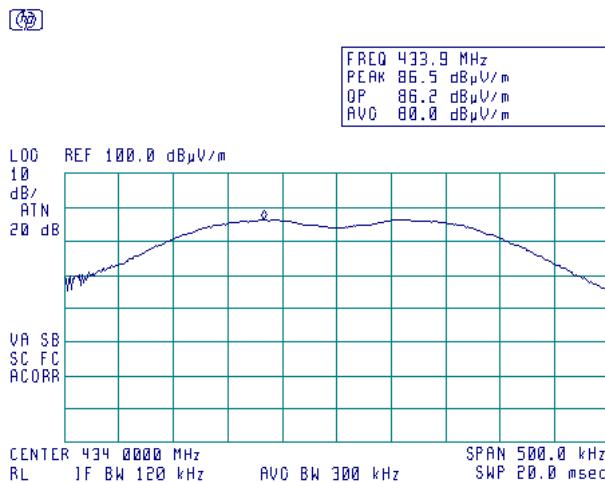

Plot 7.2.14 Radiated emission measurements at the fundamental frequency
EUT part number RC0100200

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Z-Axis

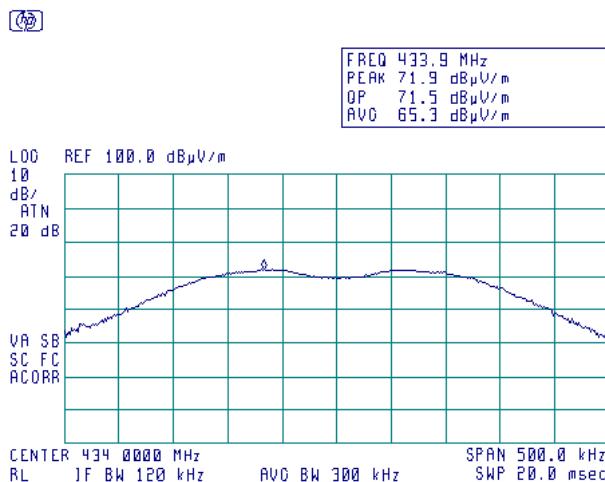


Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Plot 7.2.15 Radiated emission measurements at the second harmonic frequency
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis

09:05:04 JUN 29, 2007

FREQ 867.9 MHz
 PEAK 56.8 dB μ V/m
 OP 56.3 dB μ V/m
 AVO 49.8 dB μ V/m

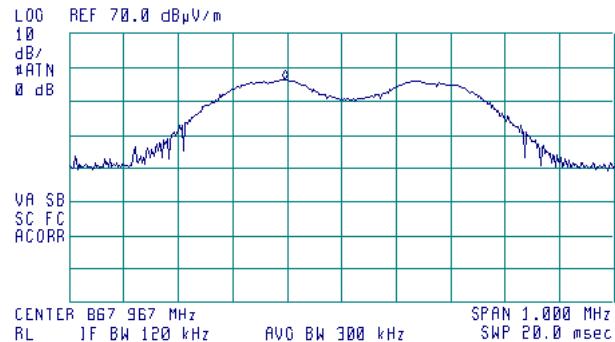


Plot 7.2.16 Radiated emission measurements at the second harmonic frequency
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Z-Axis

09:10:18 JUN 29, 2007

FREQ 868.1 MHz
 PEAK 43.6 dB μ V/m
 OP 41.3 dB μ V/m
 AVO 26.4 dB μ V/m

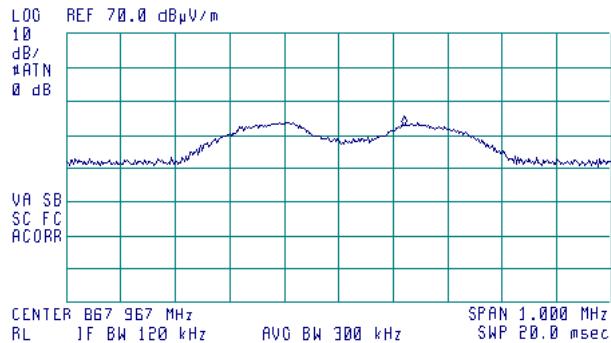


Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Plot 7.2.17 Radiated emission measurements at the third harmonic frequency
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis


⌚ 12:30:47 JUN 29, 2007

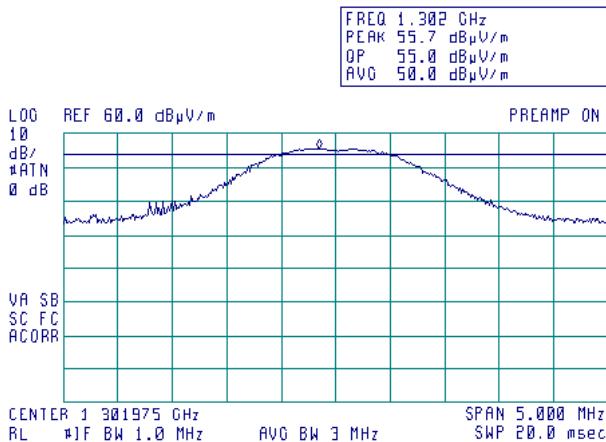

Plot 7.2.18 Radiated emission measurements at the third harmonic frequency
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Z-Axis


⌚ 12:26:29 JUN 29, 2007

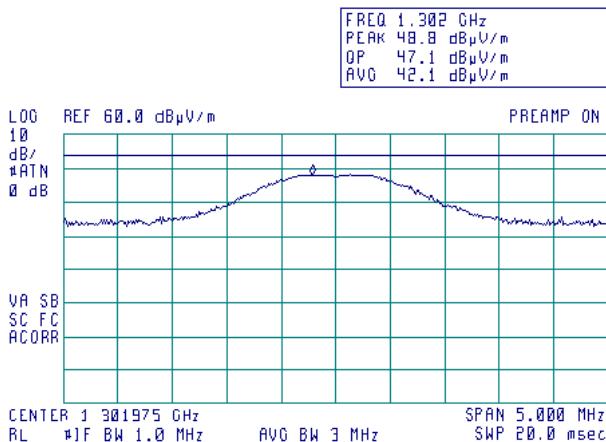

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.19 Radiated emission measurements at the forth harmonic frequency
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis

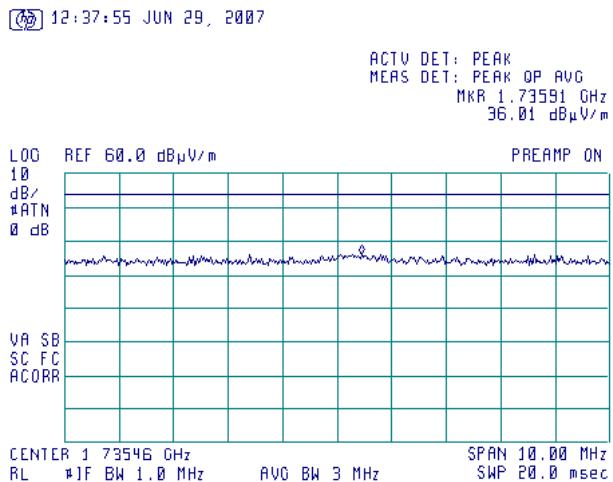

Plot 7.2.20 Radiated emission measurements at the forth harmonic frequency
EUT part number RC0100200


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Z-Axis

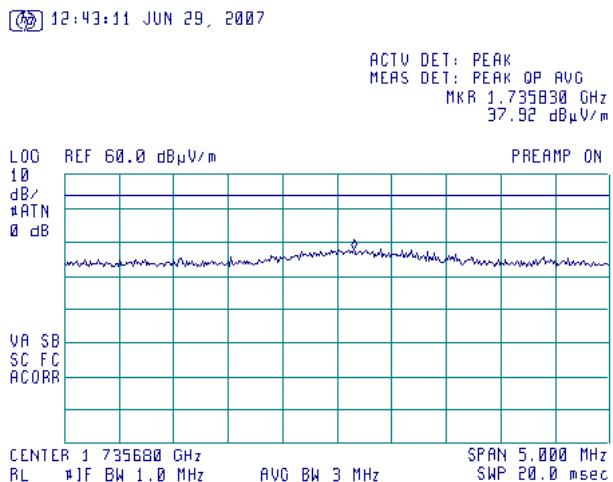

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.21 Radiated emission measurements at the fifth harmonic frequency
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-Axis

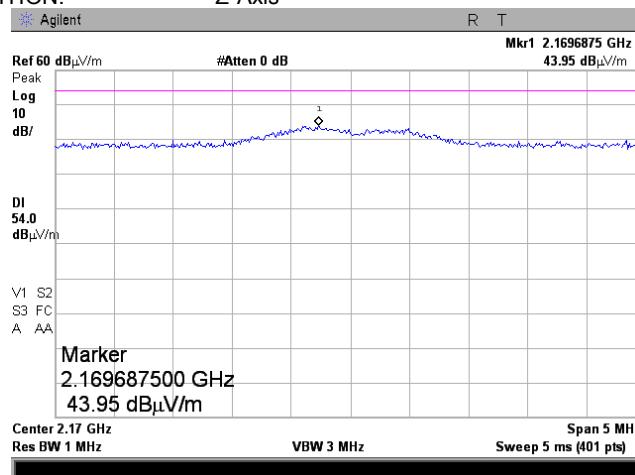

Plot 7.2.22 Radiated emission measurements at the fifth harmonic frequency
EUT part number RC0100200


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-Axis

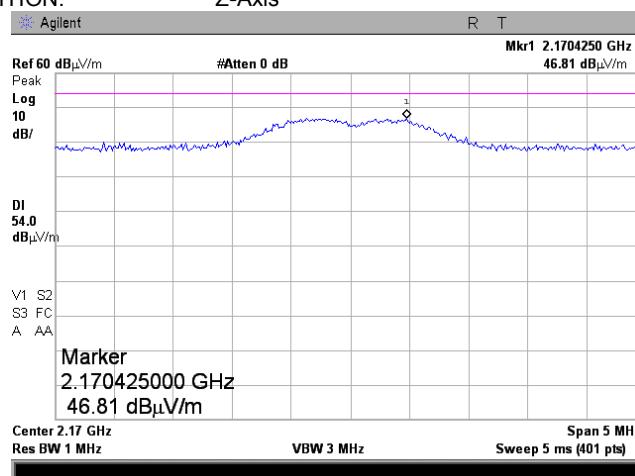

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.23 Radiated emission measurements at the sixth harmonic frequency
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis

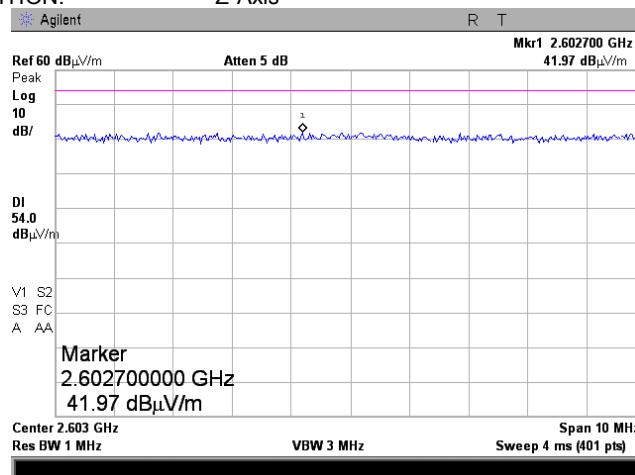

Plot 7.2.24 Radiated emission measurements at the sixth harmonic frequency
EUT part number RC0100200


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Z-Axis

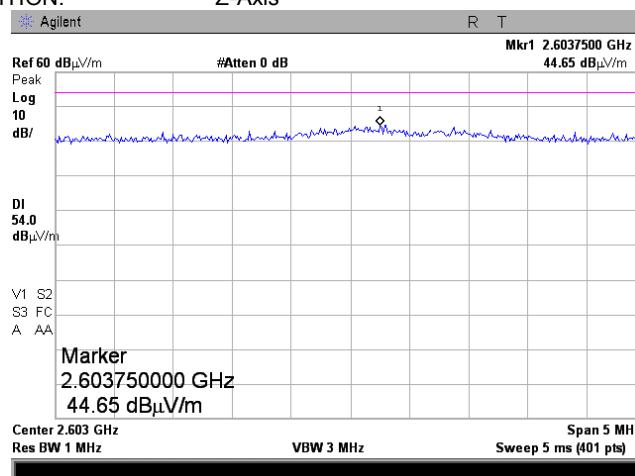

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.25 Radiated emission measurements at the seventh harmonic frequency
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis

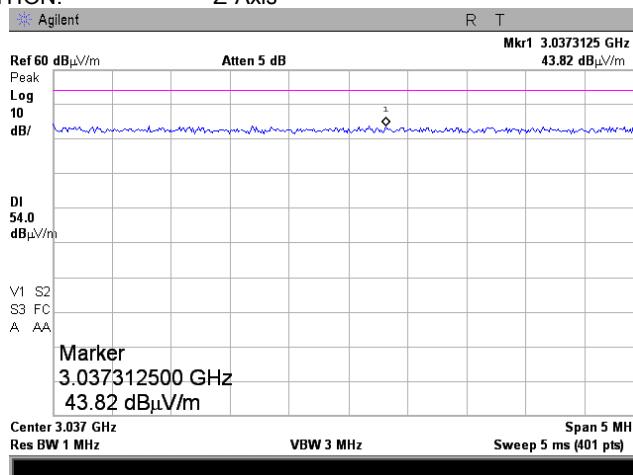

Plot 7.2.26 Radiated emission measurements at the seventh harmonic frequency
EUT part number RC0100200


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Z-Axis

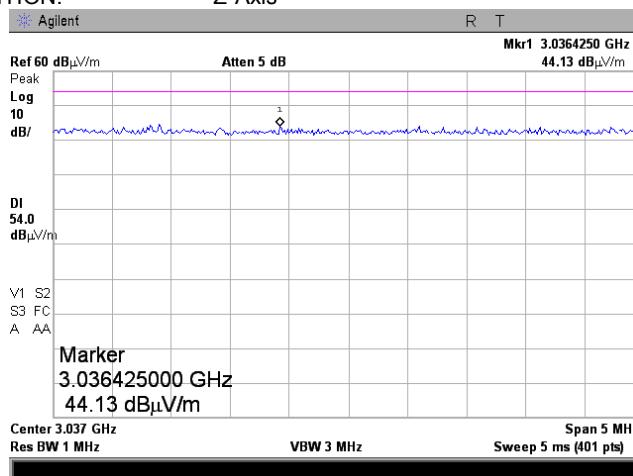

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


**Plot 7.2.27 Radiated emission measurements at the eighth harmonic frequency
EUT part number RC0100200**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-Axis

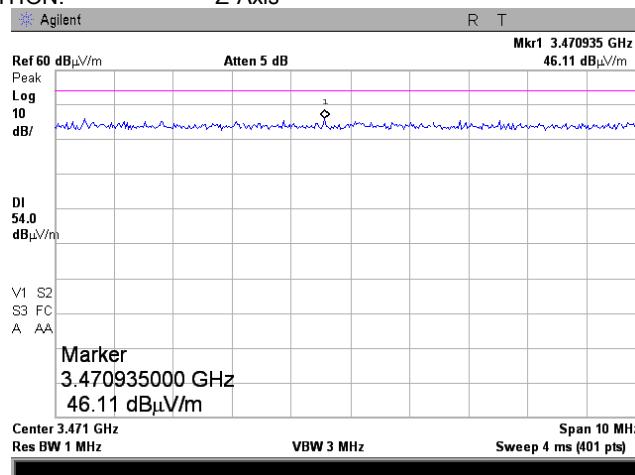

**Plot 7.2.28 Radiated emission measurements at the eighth harmonic frequency
EUT part number RC0100200**


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-Axis

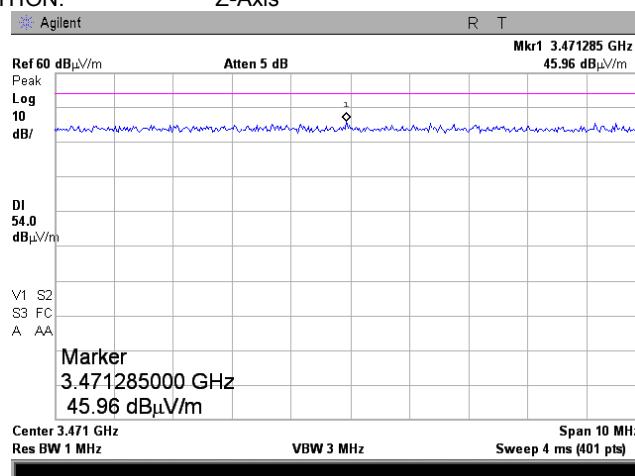

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.29 Radiated emission measurements at the ninth harmonic frequency
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-Axis

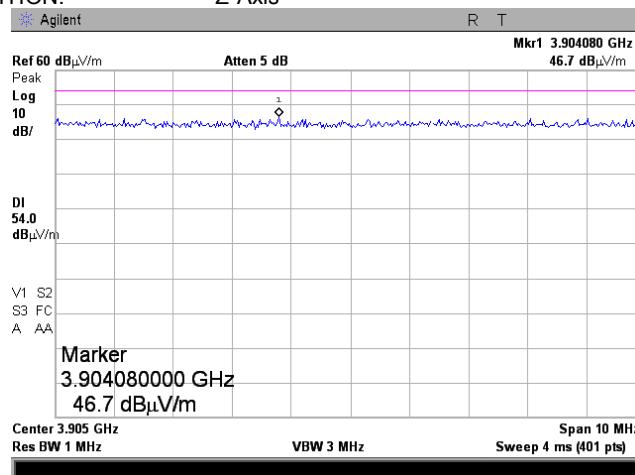

Plot 7.2.30 Radiated emission measurements at the ninth harmonic frequency
EUT part number RC0100200


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-Axis

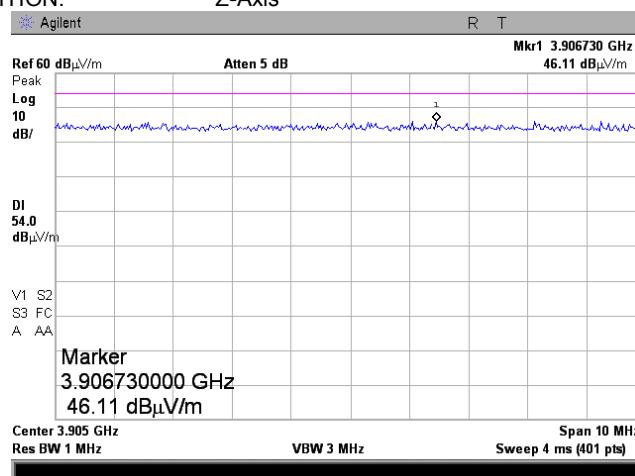

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.31 Radiated emission measurements at the tenth harmonic frequency
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-Axis

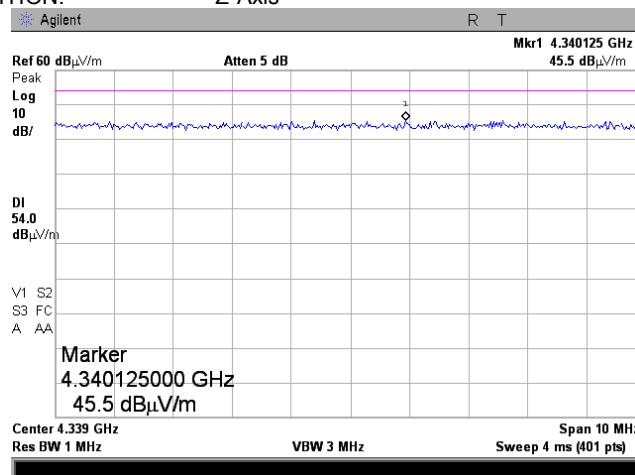

Plot 7.2.32 Radiated emission measurements at the tenth harmonic frequency
EUT part number RC0100200

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-Axis

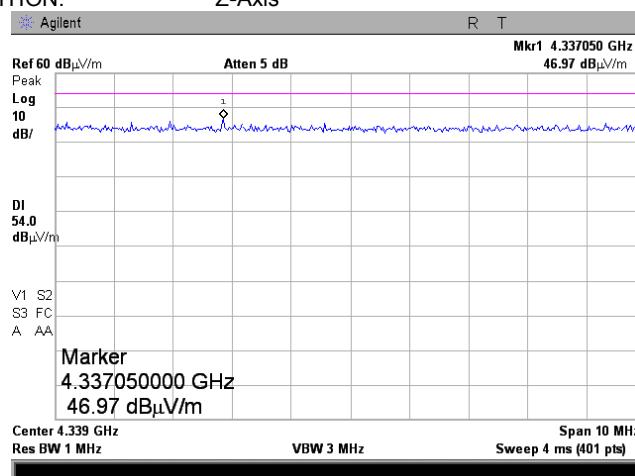




HERMON LABORATORIES


Report ID: AQARAD_FCC.17721_rev1.doc
Date of Issue: November 2007

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Plot 7.2.33 Transmission pulse duration
EUT part number RC0100200

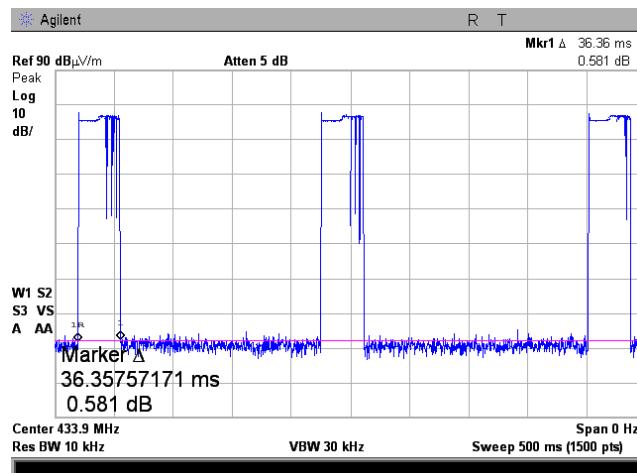

Plot 7.2.34 Transmission pulse period
EUT part number RC0100200

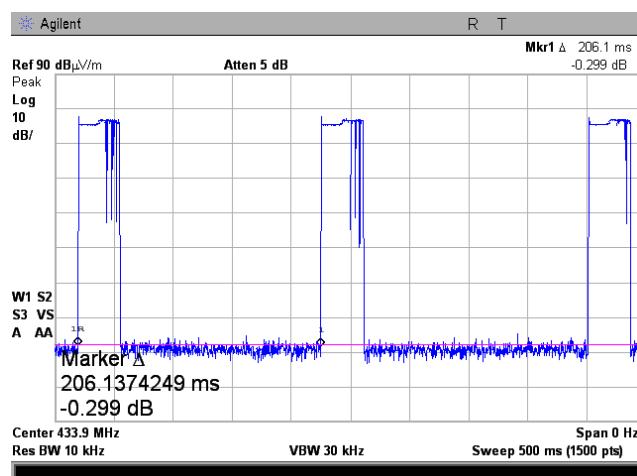


Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Plot 7.2.35 Radiated emission measurements from 9 to 150 kHz
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-Axis

10:34:24 JUN 29, 2007

ACTV DET: PEAK
 MERS DET: PEAK OP AVG
 MKR 9.8 kHz
 71.17 dB μ V/m

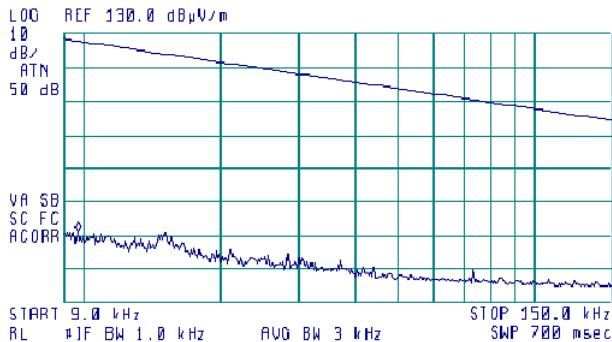


Plot 7.2.36 Radiated emission measurements from 0.15 to 30 MHz
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-Axis

10:38:28 JUN 29, 2007


ACTV DET: PEAK
 MERS DET: PEAK OP AVG
 MKR 170 kHz
 57.44 dB μ V/m

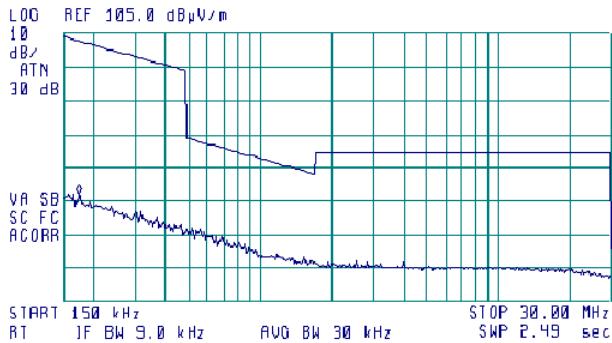

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.37 Radiated emission measurements from 30 to 1000 MHz
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-Axis

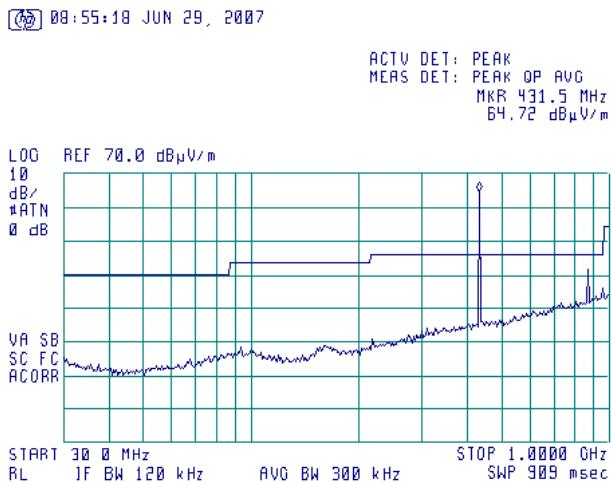

Plot 7.2.38 Radiated emission measurements from 30 to 1000 MHz
EUT part number RC0100100


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: X-Axis

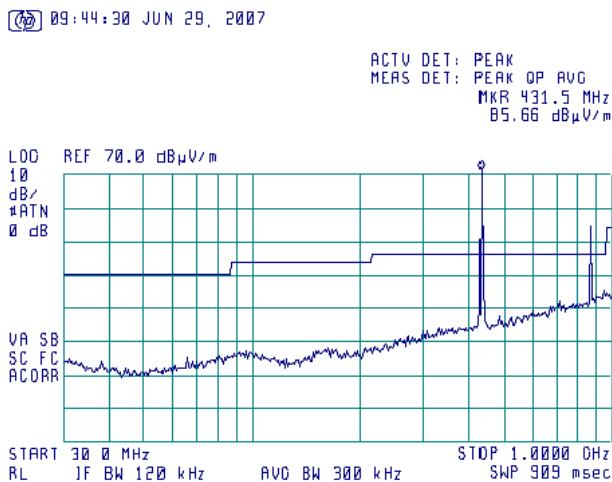

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.39 Radiated emission measurements from 1000 to 2000 MHz
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-Axis

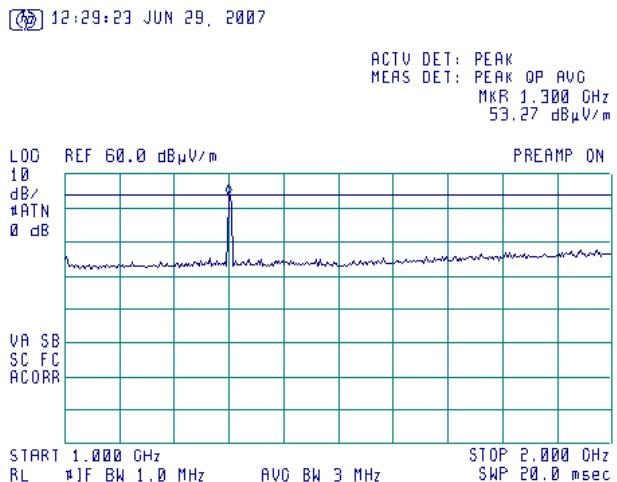

Plot 7.2.40 Radiated emission measurements from 1000 to 2000 MHz
EUT part number RC0100100


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: X-Axis

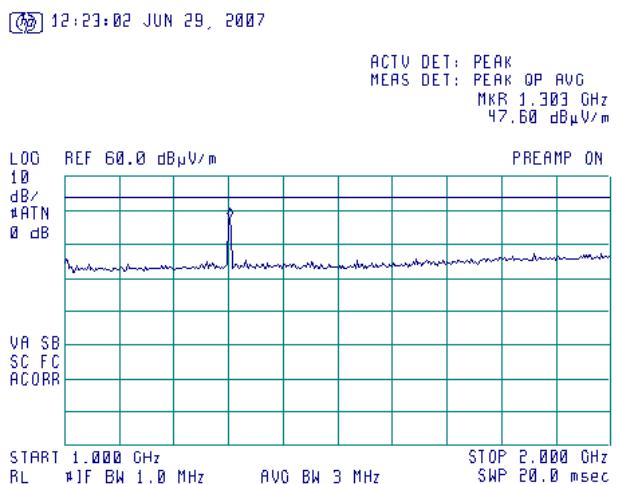

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.41 Radiated emission measurements from 2 GHz to 4.4 GHz
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-Axis

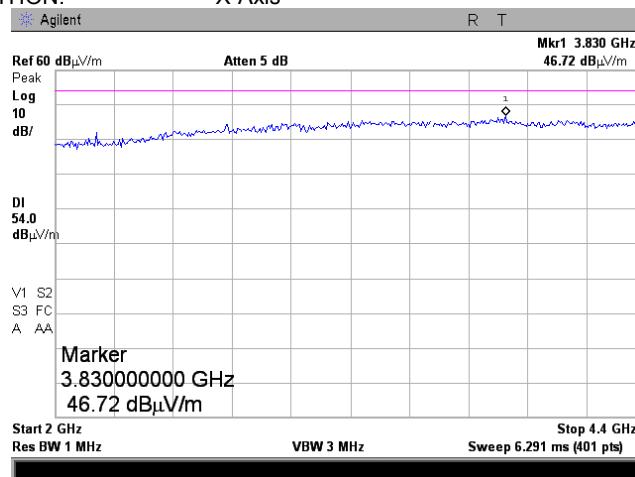

Plot 7.2.42 Radiated emission measurements from 2 GHz to 4.4 GHz
EUT part number RC0100100


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-Axis

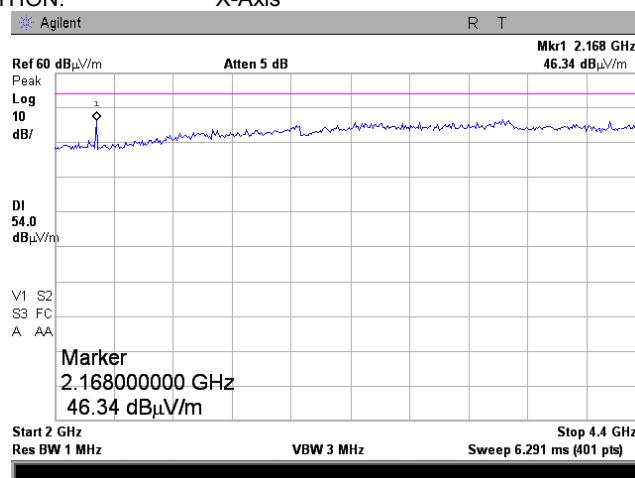

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.43 Radiated emission measurements at the fundamental frequency
EUT part number RC0100100

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-Axis

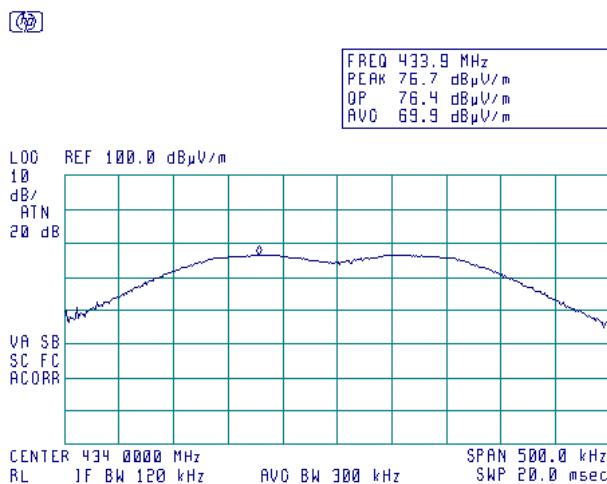

Plot 7.2.44 Radiated emission measurements at the fundamental frequency
EUT part number RC0100100


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: X-Axis

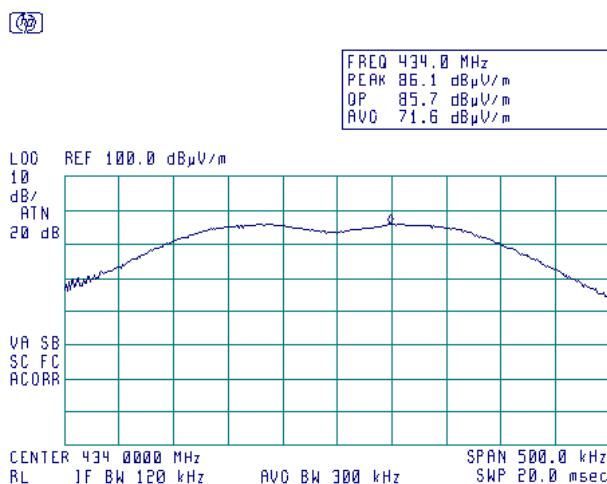

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.45 Radiated emission measurements at the fundamental frequency
EUT part number RC0100100

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Y-Axis

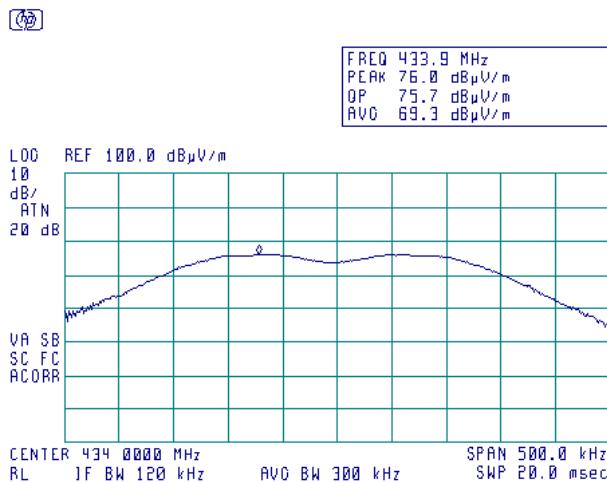

Plot 7.2.46 Radiated emission measurements at the fundamental frequency
EUT part number RC0100100


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Y-Axis

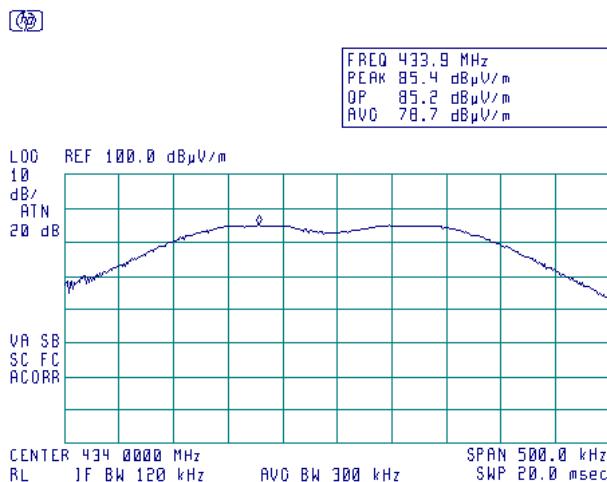

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.47 Radiated emission measurements at the fundamental frequency
EUT part number RC0100100

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-Axis

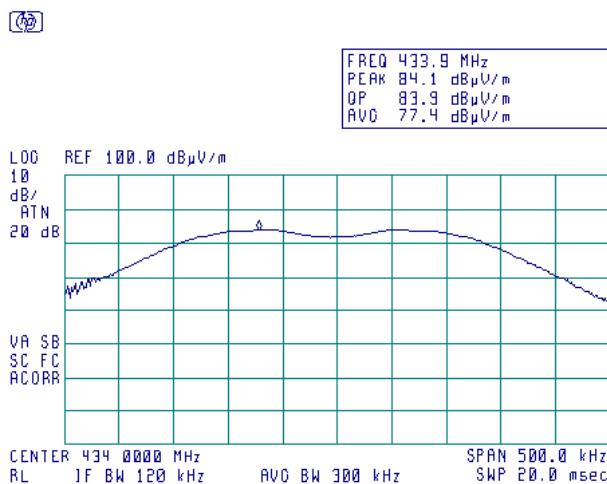

Plot 7.2.48 Radiated emission measurements at the fundamental frequency
EUT part number RC0100100

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Z-Axis

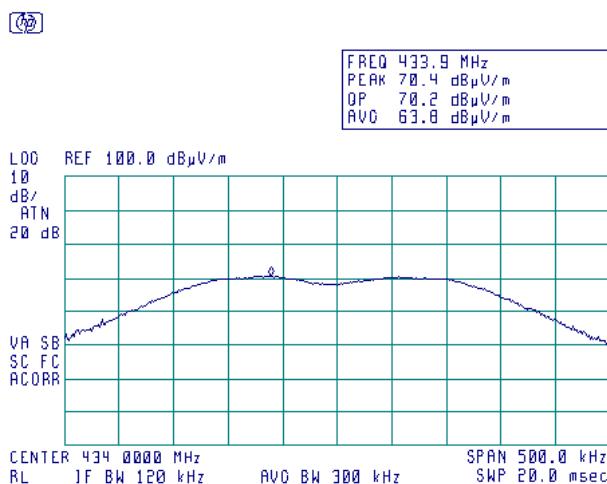


Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Plot 7.2.49 Radiated emission measurements at the second harmonic frequency
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-Axis

09:16:10 JUN 29, 2007

FREQ 868.1 MHz
PEAK 44.6 dB μ V/m
QP 41.3 dB μ V/m
AVG 26.4 dB μ V/m

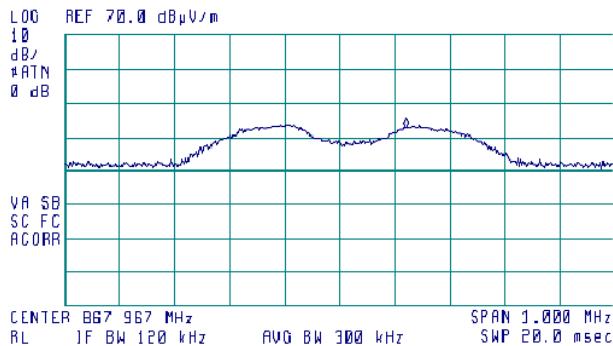


Plot 7.2.50 Radiated emission measurements at the second harmonic frequency
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-Axis

09:45:04 JUN 29, 2007

FREQ 867.9 MHz
PEAK 56.6 dB μ V/m
QP 56.3 dB μ V/m
AVG 49.8 dB μ V/m

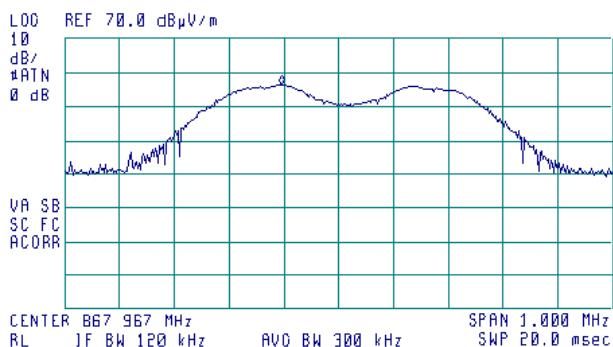



HERMON LABORATORIES


Report ID: AQRAD_FCC.17721_rev1.doc
Date of Issue: November 2007

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Plot 7.2.51 Radiated emission measurements at the third harmonic frequency
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-Axis


⌚ 12:26:29 JUN 29, 2007

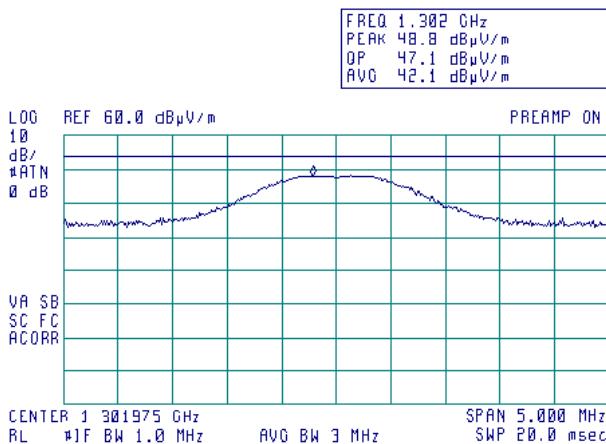

Plot 7.2.52 Radiated emission measurements at the third harmonic frequency
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-Axis


⌚ 12:33:47 JUN 29, 2007

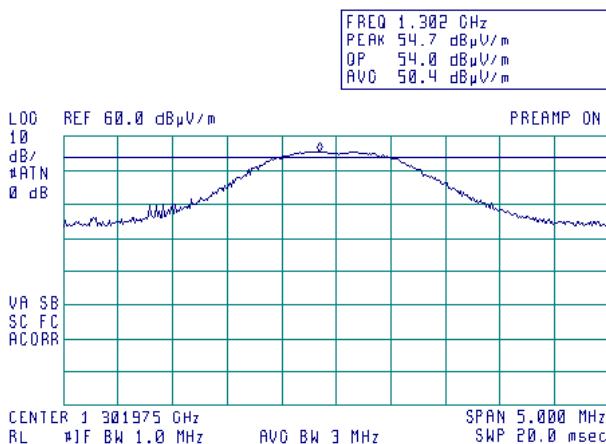

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.53 Radiated emission measurements at the forth harmonic frequency
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-Axis

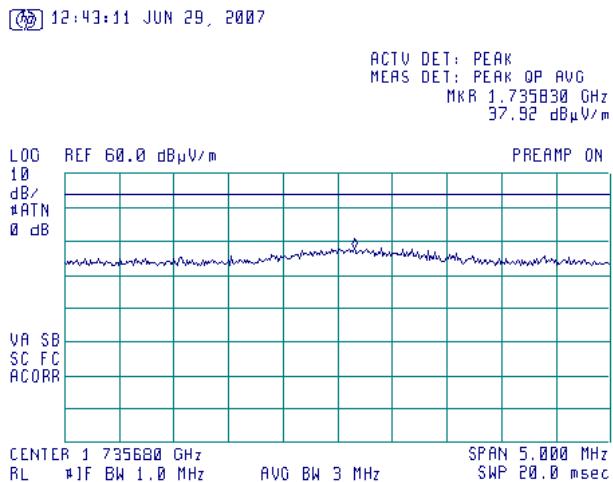

Plot 7.2.54 Radiated emission measurements at the forth harmonic frequency
EUT part number RC0100100


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: X-Axis

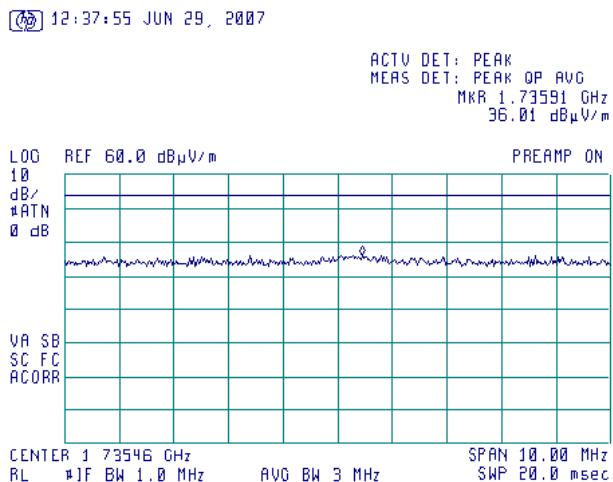

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.55 Radiated emission measurements at the fifth harmonic frequency
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-Axis

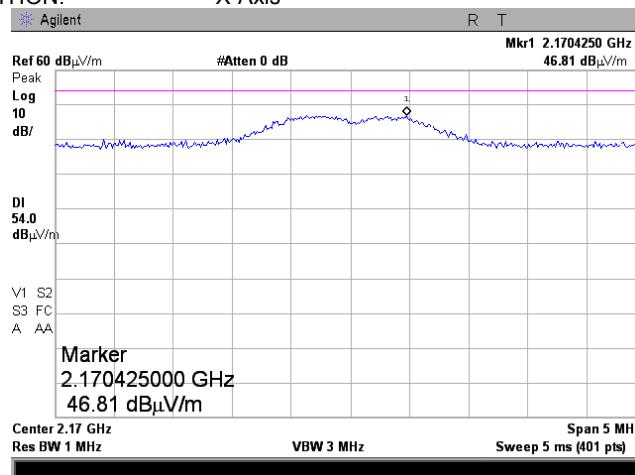

Plot 7.2.56 Radiated emission measurements at the fifth harmonic frequency
EUT part number RC0100100


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-Axis

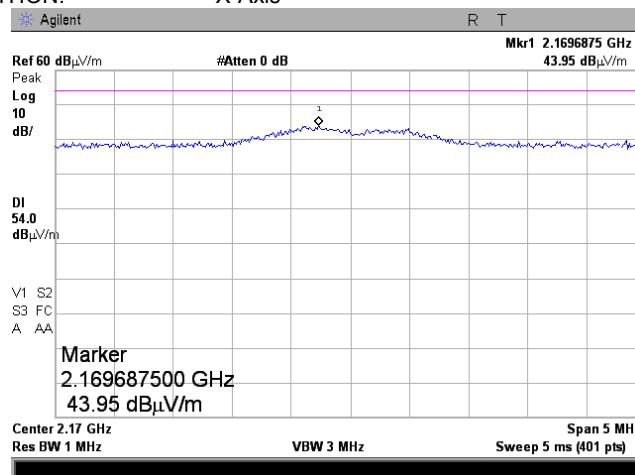

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.57 Radiated emission measurements at the sixth harmonic frequency
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-Axis

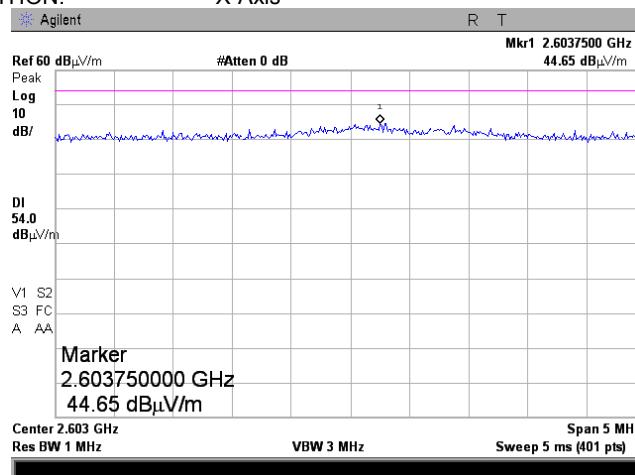

Plot 7.2.58 Radiated emission measurements at the sixth harmonic frequency
EUT part number RC0100100


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-Axis

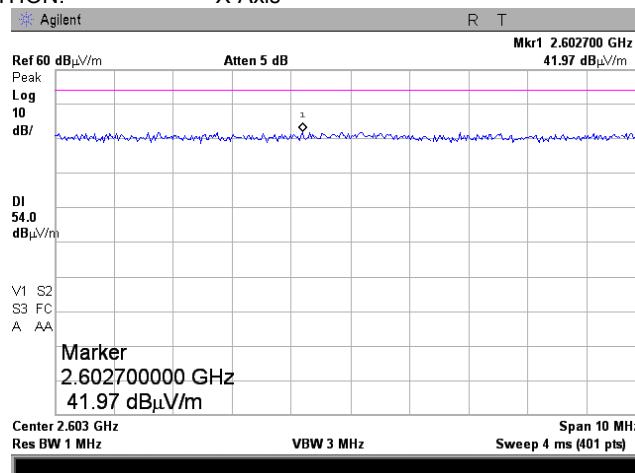

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.59 Radiated emission measurements at the seventh harmonic frequency
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-Axis

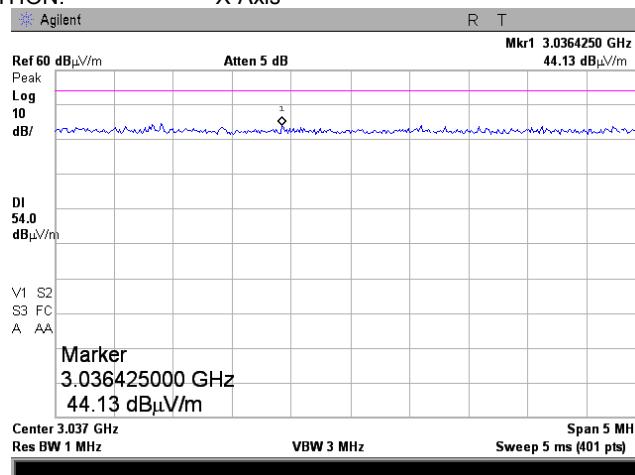

Plot 7.2.60 Radiated emission measurements at the seventh harmonic frequency
EUT part number RC0100100


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-Axis

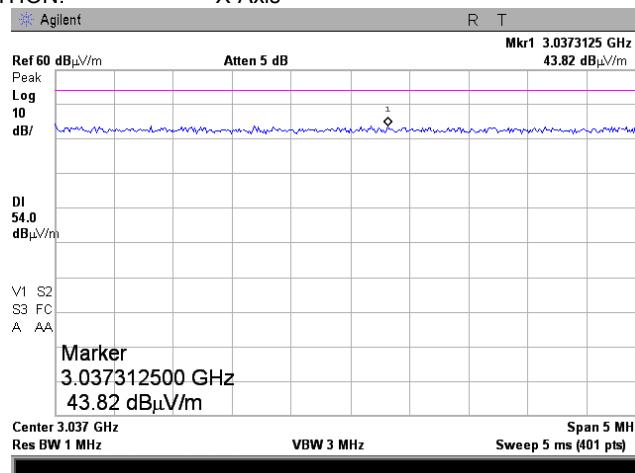

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


**Plot 7.2.61 Radiated emission measurements at the eighth harmonic frequency
EUT part number RC0100100**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-Axis

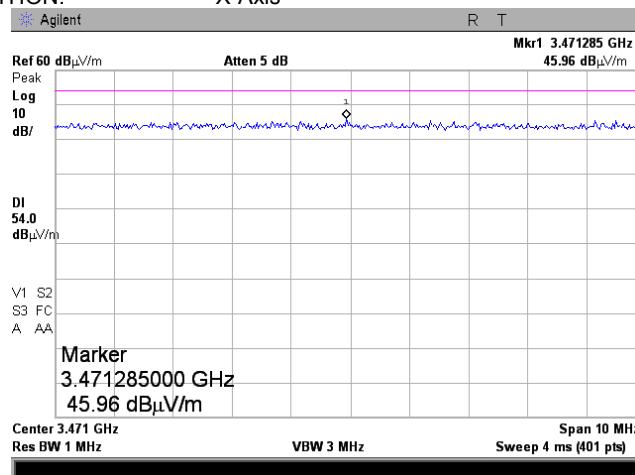

**Plot 7.2.62 Radiated emission measurements at the eighth harmonic frequency
EUT part number RC0100100**


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-Axis

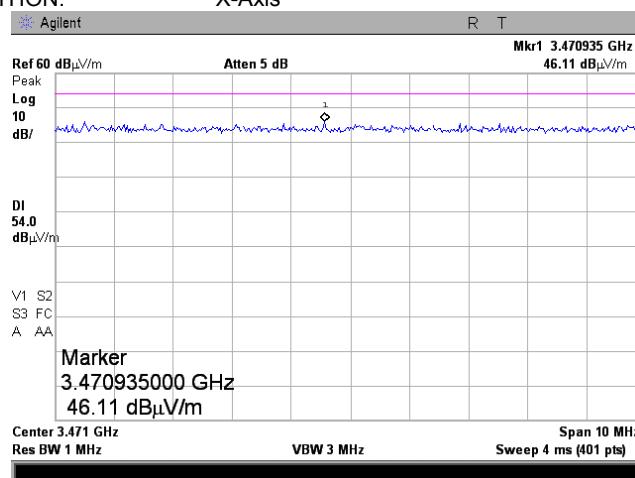

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.63 Radiated emission measurements at the ninth harmonic frequency
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-Axis

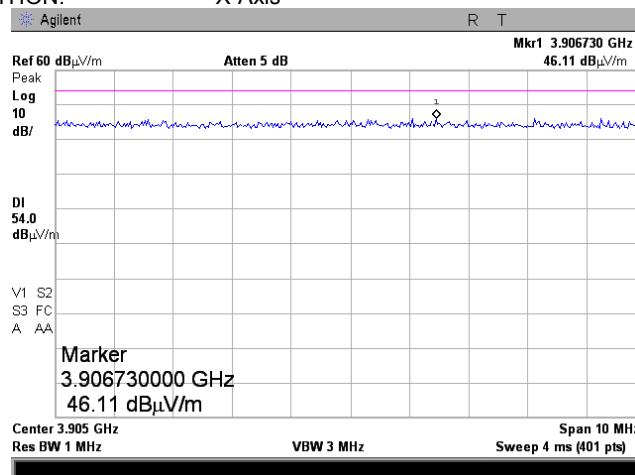

Plot 7.2.64 Radiated emission measurements at the ninth harmonic frequency
EUT part number RC0100100


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-Axis

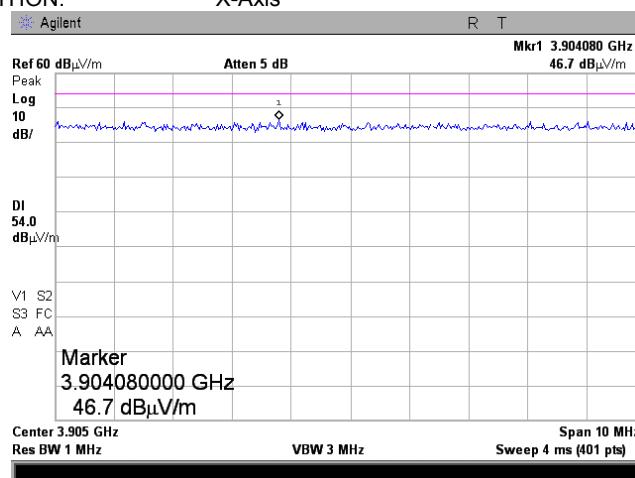

Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			


Plot 7.2.65 Radiated emission measurements at the tenth harmonic frequency
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-Axis

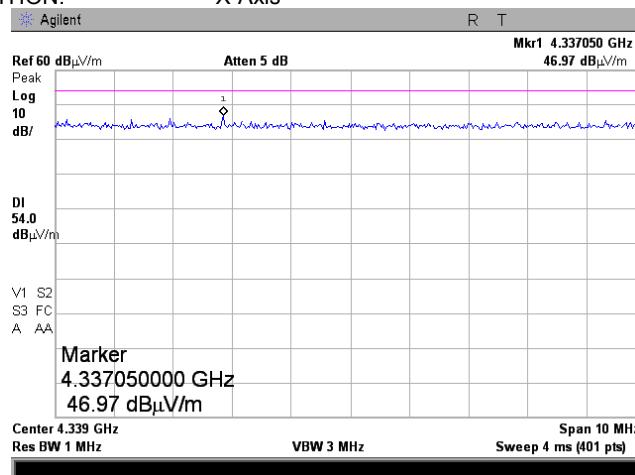


Plot 7.2.66 Radiated emission measurements at the tenth harmonic frequency
EUT part number RC0100100

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-Axis

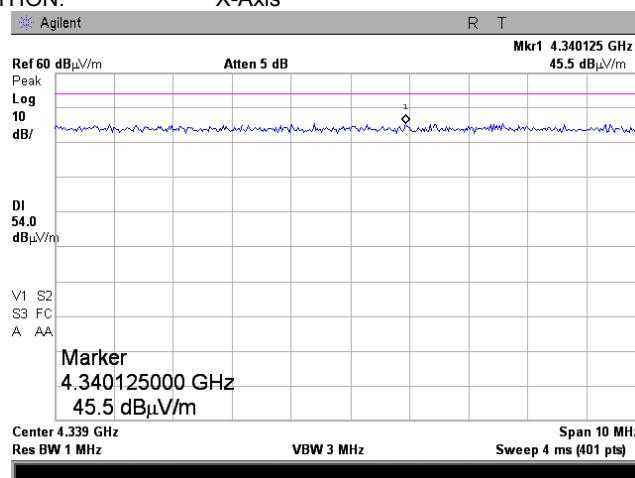


Test specification:	Section 15.231(b), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/16/2007 12:07:26 PM	Relative Humidity:	42 %
Temperature: 24.3 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

Plot 7.2.67 Transmission pulse duration
EUT part number RC0100100

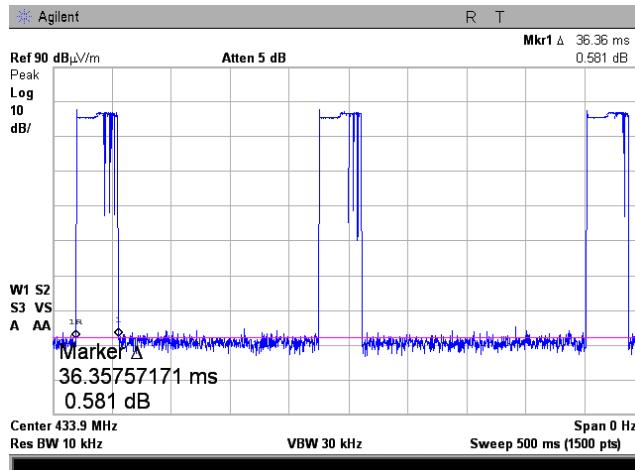

Plot 7.2.68 Transmission pulse period
EUT part number RC0100100

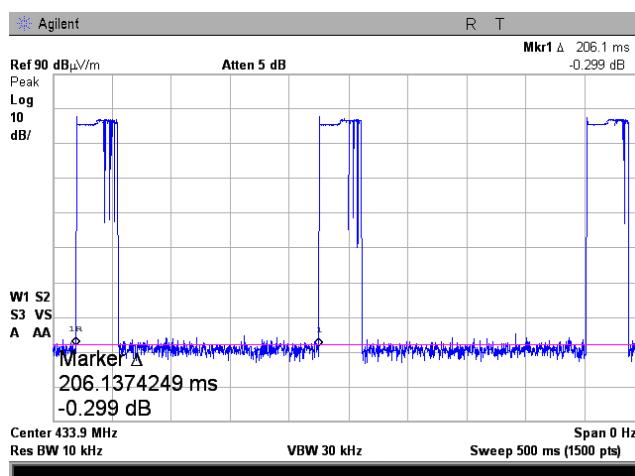

Test specification:	Section 15.231(c), Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/26/2007 8:21:17 AM	Relative Humidity:	40 %
Temperature: 24.7 °C	Air Pressure: 1006 hPa	Power Supply:	Battery
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1. The test results are provided in Table 7.3.2 and associated plots.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 - 900	20.0	0.25
Above 900		0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was set to transmit modulated carrier.

The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and shown in associated plots. The worst test results are provided in

7.3.2.3 Table 7.3.2.

Figure 7.3.1 Occupied bandwidth test setup



Test specification:	Section 15.231(c), Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/26/2007 8:21:17 AM	Relative Humidity:	40 %
Temperature: 24.7 °C	Air Pressure: 1006 hPa	Power Supply:	Battery
Remarks:			

Table 7.3.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 10 kHz
 VIDEO BANDWIDTH: 30 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: FSK

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
EUT part number RC0100100					
433.9	242.5	0.25	1084.75	-842.25	Pass
EUT part number RC0100200					
433.9	233.75	0.25	1084.75	-851.0	Pass


Reference numbers of test equipment used

HL 0337	HL 3001							
---------	---------	--	--	--	--	--	--	--


Full description is given in Appendix A.

Test specification:	Section 15.231(c), Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	8/26/2007 8:21:17 AM	Relative Humidity:	40 %
Temperature: 24.7 °C	Air Pressure: 1006 hPa	Power Supply: Battery	
Remarks:			

**Plot 7.3.1 Occupied bandwidth test result
EUT part number RC0100200**

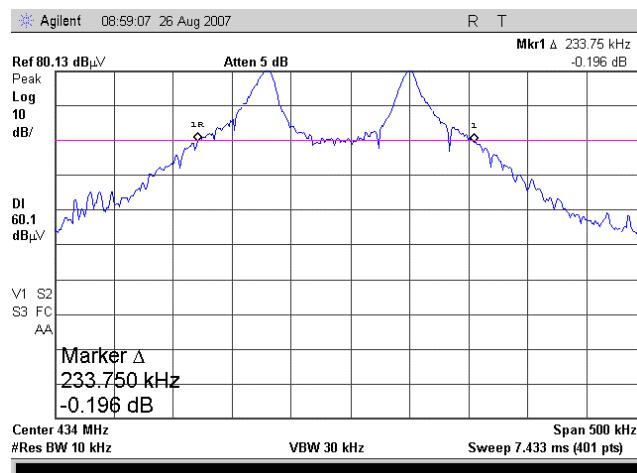

**Plot 7.3.2 Occupied bandwidth test result
EUT part number RC0100100**

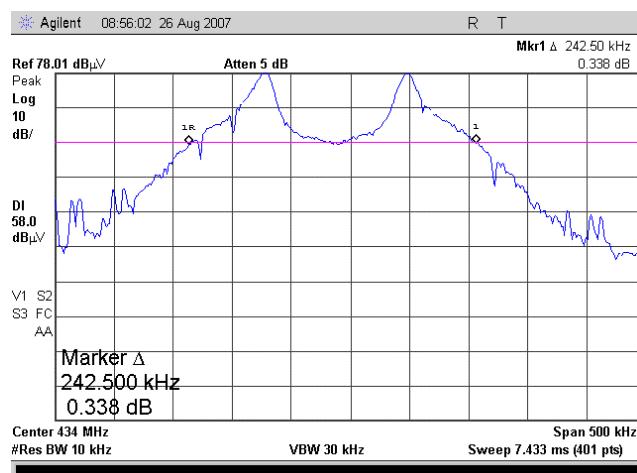

Test specification:	Section 15.203, Antenna requirement		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	6/28/2007 1:27:59 PM	Relative Humidity:	42 %
Temperature: 24.7 °C	Air Pressure: 1002 hPa	Power Supply:	Battery
Remarks:			

7.4 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly



Test specification:	Section 15.109, Radiated emissions, Class B		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	7/5/2007 8:33:40 AM	Relative Humidity:	45 %
Temperature: 24.0 °C	Air Pressure: 1003 hPa	Power Supply:	Battery
Remarks:			

7.5 Radiated emission measurements

7.5.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Radiated emission test limits


Frequency, MHz	Class B limit, dB(μ V/m)		Class A limit, dB(μ V/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log (S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and the performance check was conducted.
- 7.5.2.2 The specified frequency range was investigated with biconiclog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 7.5.2.3 The test results were recorded in Table 7.5.2 and shown in the associated plots.

Figure 7.5.1 Setup for radiated emission measurements in anechoic chamber

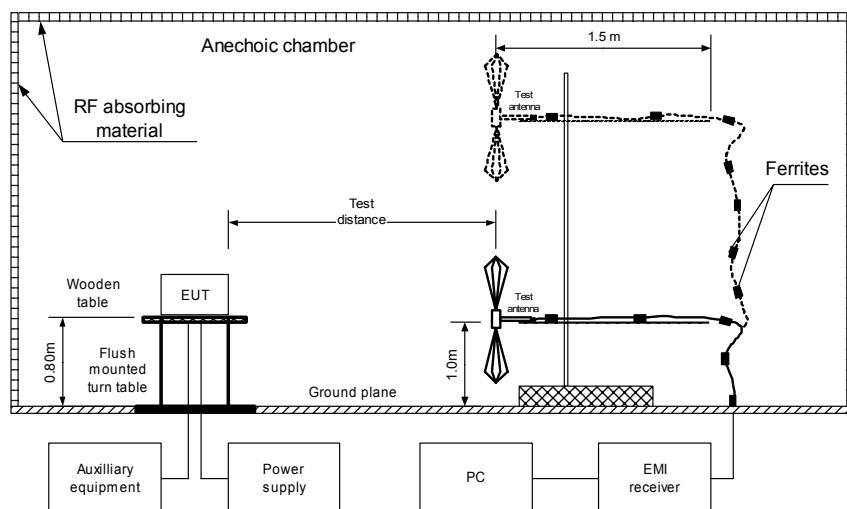

Test specification:	Section 15.109, Radiated emissions, Class B		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	7/5/2007 8:33:40 AM	Relative Humidity:	45 %
Temperature: 24.0 °C	Air Pressure: 1003 hPa	Power Supply: Battery	
Remarks:			

Table 7.5.2 Radiated emission test results

EUT SET UP:

TABLE-TOP

LIMIT:

Class B

EUT OPERATING MODE:

Standby

TEST SITE:

SEMI ANECHOIC CHAMBER

TEST DISTANCE:

3 m

DETECTOR USED:

PEAK

FREQUENCY RANGE:

30 MHz – 1000 MHz

RESOLUTION BANDWIDTH:

120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found.								

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 0465	HL 0521	HL 0589	HL 0593	HL 0594	HL 0604	HL 1004	HL 2009
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.

Test specification:	Section 15.109, Radiated emissions, Class B		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	7/5/2007 8:33:40 AM	Relative Humidity:	45 %
Temperature: 24.0 °C	Air Pressure: 1003 hPa	Power Supply: Battery	
Remarks:			


**Plot 7.5.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization
EUT part number RC0100200**

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Standby

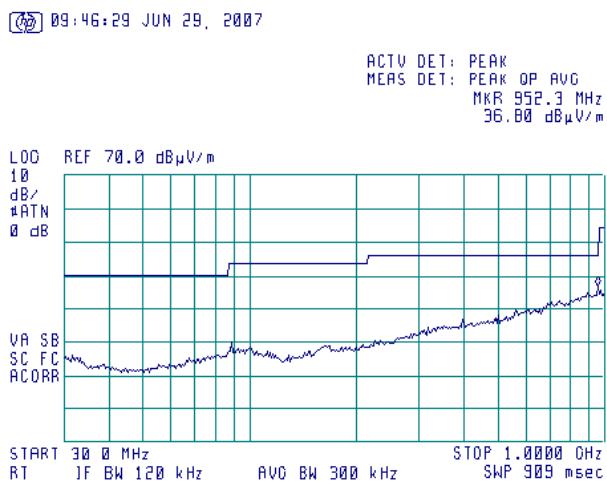

**Plot 7.5.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization
EUT part number RC0100200**


TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Standby

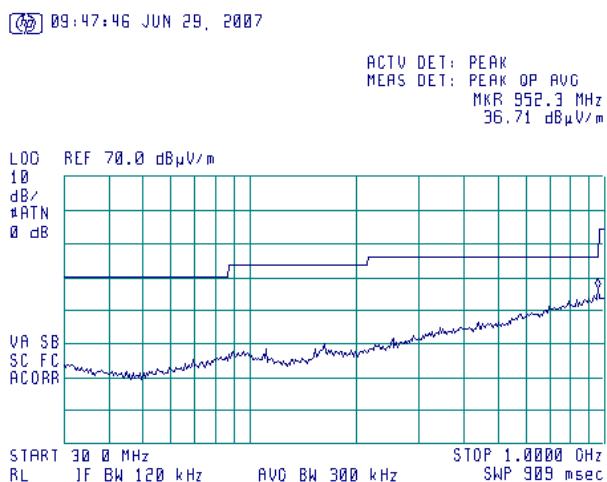

Test specification:	Section 15.109, Radiated emissions, Class B		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	7/5/2007 8:33:40 AM	Relative Humidity:	45 %
Temperature: 24.0 °C	Air Pressure: 1003 hPa	Power Supply: Battery	
Remarks:			


**Plot 7.5.3 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization
EUT part number RC0100100**

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Standby

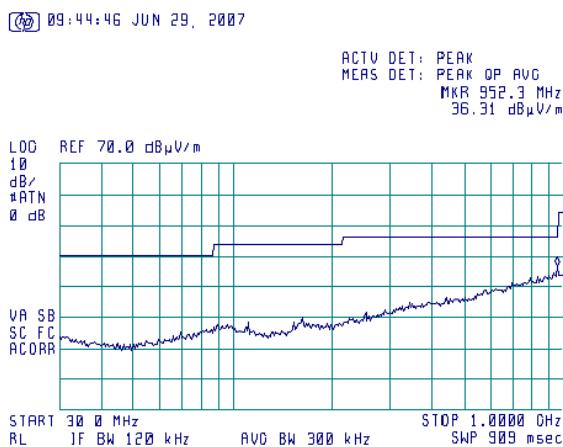

**Plot 7.5.4 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization
EUT part number RC0100100**

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Standby

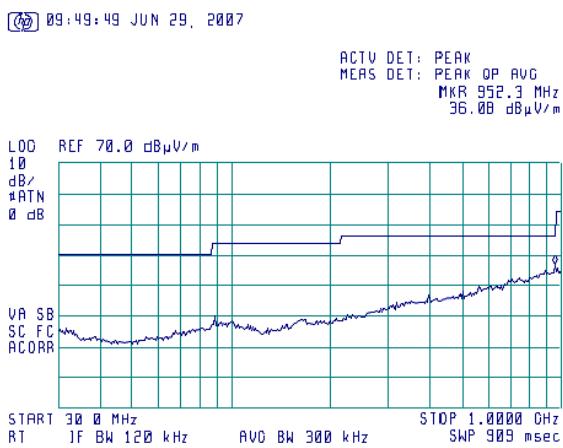

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0337	Probe Set, Hand held, 5 probes	Electro-Metrics	EHFP-30	238	08-Jun-07	08-Jun-08
0415	Cable, Coax, RF, RG-214	HL	CC-3	056	02-Dec-06	02-Dec-07
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	28-Jun-07	28-Jun-08
0465	Anechoic Chamber 9(L) x 6.5(W) x 5.5(H) m	HL	AC - 1	023	11-Nov-06	11-Nov-07
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	26-Sep-06	26-Sep-07
0569	Antenna, Log Periodic, 200 - 1000 MHz	Electro-Metrics	LPA 25/30	1953	10-Jan-07	10-Jan-08
0589	Cable Coaxial, GORE A2P01POL118, 2.3 m	HL	GORE-3	176	02-Dec-06	02-Dec-07
0593	Antenna Mast, 1-4 m Pneumatic	Madgesh	AM-F1	101	02-Feb-07	02-Feb-08
0594	Turn Table FOR ANECHOIC CHAMBER flush mount d=1.2 m Pneumatic	HL	TT-WDC1	102	26-Jan-07	26-Jan-08
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-Jan-07	10-Jan-08
1004	Cable Coaxial , ANDREW PSWJ4 , 6m	HL	ANDREW -6	163	02-Dec-06	02-Dec-07
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies	8564EC	3946A002 19	30-Aug-06	30-Aug-07
1430	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL1432	Agilent Technologies	8542E	3807A002 62,3705A0 0217	01-Sep-06	01-Sep-07
1947	Cable 18GHz, 6.5 m, blue	Rhophase Microwave Limited	NPS-1803A-6500-NPS	T4974	17-Oct-06	17-Oct-07
2009	Cable RF, 8 m	Alpha Wire	RG-214	C-56	20-May-07	20-May-08
2259	Amplifier Low Noise 2-20 GHz	Sophia Wireless	LNA0220-C	0223	05-Nov-06	05-Nov-07
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	03-Mar-07	03-Mar-08
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 6	11-Jun-07	11-Jun-08
3001	EMC Analyzer, 9 kHz to 3 GHz	Agilent Technologies	E7402A	US394401 80	22-Nov-06	22-Nov-07

9 APPENDIX B Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, telecommunications, environmental, safety standards, and by AMTAC (UK) for safety of medical devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01) and approved by Israel Ministry of environmental protection, radiation hazards department (Permit number 1158).

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

10 APPENDIX C Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
BB	broad band
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
dBΩ	decibel referred to one Ohm
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
ITE	information technology equipment
k	kilo
kHz	kilohertz
LISN	line impedance stabilization network
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
NT	not tested
OATS	open area test site
Ω	Ohm
PCB	printed circuit board
PM	pulse modulation
PS	power supply
ppm	part per million (10-6)
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
VA	volt-ampere
WB	wideband

11 APPENDIX D Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Log periodic antenna factor

Electro-Metrics, model LPA-25/30, serial number 1953

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
200	15.2	625	25.2
225	15.1	650	25.8
250	16.3	675	27.2
275	17.2	700	27.6
300	19.6	725	27.6
325	18.4	750	27.6
350	19.0	775	28.0
375	20.0	800	28.2
400	20.9	825	29.4
425	21.3	850	29.9
450	22.1	875	30.0
475	22.7	900	30.4
500	23.2	925	30.6
525	23.9	950	30.8
550	24.2	975	31.6
575	24.6	1000	32.1
600	24.7		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor

Biconilog antenna EMCO, model 3141, serial number 1011

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	560	19.8	1300	27.0
28	7.8	580	20.6	1320	27.8
30	7.8	600	21.3	1340	28.3
40	7.2	620	21.5	1360	28.2
60	7.1	640	21.2	1380	27.9
70	8.5	660	21.4	1400	27.9
80	9.4	680	21.9	1420	27.9
90	9.8	700	22.2	1440	27.8
100	9.7	720	22.2	1460	27.8
110	9.3	740	22.1	1480	28.0
120	8.8	760	22.3	1500	28.5
130	8.7	780	22.6	1520	28.9
140	9.2	800	22.7	1540	29.6
150	9.8	820	22.9	1560	29.8
160	10.2	840	23.1	1580	29.6
170	10.4	860	23.4	1600	29.5
180	10.4	880	23.8	1620	29.3
190	10.3	900	24.1	1640	29.2
200	10.6	920	24.1	1660	29.4
220	11.6	940	24.0	1680	29.6
240	12.4	960	24.1	1700	29.8
260	12.8	980	24.5	1720	30.3
280	13.7	1000	24.9	1740	30.8
300	14.7	1020	25.0	1760	31.1
320	15.2	1040	25.2	1780	31.0
340	15.4	1060	25.4	1800	30.9
360	16.1	1080	25.6	1820	30.7
380	16.4	1100	25.7	1840	30.6
400	16.6	1120	26.0	1860	30.6
420	16.7	1140	26.4	1880	30.6
440	17.0	1160	27.0	1900	30.6
460	17.7	1180	27.0	1920	30.7
480	18.1	1200	26.7	1940	30.9
500	18.5	1220	26.5	1960	31.2
520	19.1	1240	26.5	1980	31.6
540	19.5	1260	26.5	2000	32.0
		1280	26.6		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Double-ridged waveguide horn antenna
EMC Test Systems, model 3115, serial number: 00027177

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Cable Coaxial, GORE A2P01POL118, 2.3 m, model:GORE-3, s/n 176 (HL 0589)
 + Cable Coaxial, ANDREW PSWJ4, 6m, model: ANDREW-6, s/n 163 (HL 1004)
 Calibration data

No.	Parameter	SET, MHz	Measured, dB	Deviation, dB	Tolerance (Specification), dB	Meas. Uncert., dB	Notes
1	Insertion Loss	30	0.33	-	≤ 6.5	±0.12	
2		50	0.40	-			
3		100	0.57	-			
4		300	0.97	-			
5		500	1.25	-			
6		800	1.59	-			
7		1000	1.81	-			
8		1200	1.97	-			
9		1400	2.15	-			
10		1600	2.28	-			
11		1800	2.43	-			
12		2000	2.61	-			
13		2200	2.75	-			
14		2400	2.89	-			
15		2600	2.97	-			
16	Insertion Loss	2800	3.21	-	≤ 6.5	±0.12	
17		3000	3.32	-			
18		3300	3.47	-			
19		3600	3.62	-			
20		3900	3.84	-			
21		4200	3.92	-			
22		4500	4.07	-	±0.17		
23		4800	4.36	-			
24		5100	4.62	-			
25		5400	4.78	-			
26		5700	5.16	-			
27		6000	5.67	-			
28		6500	5.99	-			

Cable RF, 8 m, model:RG-214, s/n C-56 (HL 2009)
Calibration data

No.	Parameter	SET, MHz	Measured, dB	Deviation	Tolerance (Specification)	Meas. Uncert., dB	Notes
1	Insertion Loss	1	0.10	NA	NA	± 0.12	
2		10	0.14				
3		30	0.25				
4		50	0.34				
5		100	0.53				
6		300	0.99				
7		500	1.31				
8		800	1.73				
9		1000	1.98				
10		1100	2.11				
11		1200	2.21				
12		1300	2.35				
13		1400	2.46				
14		1500	2.55				
15		1600	2.68				
16		1700	2.78				
17		1800	2.88				
18		1900	2.98				
19		2000	3.09				

Cable 18GHz, 6.5 m, blue, model: NPS-1803A-6500-NPS, s/n T4974 (HL 1947)
Calibration data

Frequency, GHz	Insertion Loss, dB
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Insertion Loss, dB
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92

Cable coaxial, RG-58/RG-214, model:CC-3, s/n 056 (HL 0415)
Calibration data

Frequency	Measured attenuation
10 kHz	0.05 dB
100 kHz	0.05 dB
1 MHz	0.03 dB
10 MHz	0.22 dB
20 MHz	0.33 dB
30 MHz	0.45 dB
40 MHz	0.53 dB
50 MHz	0.60 dB
60 MHz	0.65dB
70 MHz	0.74 dB
80 MHz	0.81 dB
90 MHz	0.83 dB
100 MHz	0.90dB
200 MHz	1.36 dB
300 MHz	1.71 dB
400 MHz	2.01 dB
500 MHz	2.36 dB
600 MHz	2.53 dB
700 MHz	2.77 dB
800 MHz	3.03 dB
900 MHz	3.19 dB
1000 MHz	3.46 dB
1200 MHz	3.76 dB
1400 MHz	4.22 dB
1600 MHz	4.51 dB
1800 MHz	4.78 dB
2000 MHz	5.34 dB
2500 MHz	6.05 dB
2900 MHz	6.75 dB

12 APPENDIX E Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 10 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

13 APPENDIX F Specification references

FCC 47CFR part 15: 2006	Radio Frequency Devices.
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.