



## FCC and IC RADIO TEST REPORT

Applicant's company	Ralink Technology Corporation
Applicant Address	5F., No.36, Taiyuan St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.
FCC ID	VQF-RT3090BC4
IC	7542A-RT3090BC4
Manufacturer's company	Ralink Technology Corporation
Manufacturer Address	5F., No.36, Taiyuan St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.

Product Name	802.11b/g/n 1T1R combo card (Tested inside of HP Notebook PC, H110UI1)
Brand Name	Ralink
Model Name	RT3090BC4
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247 IC RSS-210 Annex 8
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Nov. 15, 2009
Final Test Date	May 03, 2010
Submission Type	Class II Change
Multiple Listing	Please refer to section 3.7

### Statement

**Test result included is only for the Bluetooth part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003, 47 CFR FCC Part 15 Subpart C and IC RSS-210 Issue 7.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies .....	5
3.5. Table for Test Modes.....	5
3.6. Table for Testing Locations.....	5
3.7. Table for Class II Change .....	5
3.8. Table for Supporting Units .....	6
3.9. Table for Parameters of Test Software Setting .....	6
3.10. Test Configurations .....	7
<b>4. TEST RESULT .....</b>	<b>10</b>
4.1. AC Power Line Conducted Emissions Measurement.....	10
4.2. Radiated Emissions Measurement.....	14
4.3. Antenna Requirements .....	21
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>22</b>
<b>6. TEST LOCATION.....</b>	<b>23</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>24</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A7</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B5</b>
<b>APPENDIX C. CO-LOCATION TEST REPORT .....</b>	<b>C1 ~ C3</b>
<b>APPENDIX D. RSS-GEN RECEIVER TEST REPORT .....</b>	<b>D1~D22</b>



## History of This Test Report

Original Issue Date: May 04, 2010

Report No.: FR9D0210-04AB, CR9D0210-04AB

- No additional attachment.
- Additional attachment were issued as following record:



## 1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11b/g/n 1T1R combo card  
Brand Name : Ralink  
Model Name : RT3090BC4  
Applicant : Ralink Technology Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247  
IC RSS-210 Annex 8

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 15, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads "Jordan Hsiao 2010.5.5".

Jordan Hsiao

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C and IC RSS-210 issue 7				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207/RSS-Gen 7.2.2	AC Power Line Conducted Emissions	Complies	14.35 dB
-	15.247(b)(1)/A8.4	Maximum Peak Conducted Output Power	Complies	-
-	15.247(a)(1)/A8.1	Hopping Channel Separation	Complies	-
-	15.247(b)(1)/A8.1	Number of Hopping Frequency	Complies	-
-	15.247(a)(1)/A8.1	Dwell Time	Complies	-
4.2	15.247(d)/A8.5	Radiated Emissions	Complies	5.03 dB
-	15.247(d)/A8.5	Band Edge Emissions	Complies	-
4.3	15.203/RSS-Gen 7.1.4	Antenna Requirements	Complies	-

**Note:**

The RF module is verified. Please reference Sporton project number: 9D0210-01.

The module inserts to Notebook, so this report tests above item.

The information for host Notebook:

Product Name: 11b/g/n 1T1R WLAN Mini Card

(Tested inside of HP Notebook PC, H110UI1)

ODM: Flextronics

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Power Type	From host system
Modulation	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rate (Mbps)	GFSK: 1 ; $\pi/4$ -QPSK: 2 ; 8DPSK: 3
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79
Channel Band Width (99%)	852.00 kHz
Conducted Output Power	4.52 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

#### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		Remark
A	YAGEO	B2885050G00003	PIFA Antenna	Reversed-SMA	Main	1.17	TX/RX
					Aux.	-0.85	
B	ACON	APP6P-700419	PIFA Antenna	Reversed-SMA	Main	0.52	TX/RX
					Aux.	-0.59	
C	Amphenol	FL5130-11-002-C	PIFA Antenna	I-PEX	Main	0.30	TX/RX
					Aux.	-0.20	


Note: The EUT has three types of antennas.

Due to Ant. A ~ Ant. C is the same type antenna, only the higher gain antenna "Ant. A" was tested and recorded in this report.

The EUT supports the antenna with TX/RX diversity function for WLAN and Bluetooth.

When Connector 1 is WLAN function, Connector 2 must be Bluetooth function.

Oppositely, if Connector 2 is WLAN function, Connector 1 must be Bluetooth function.

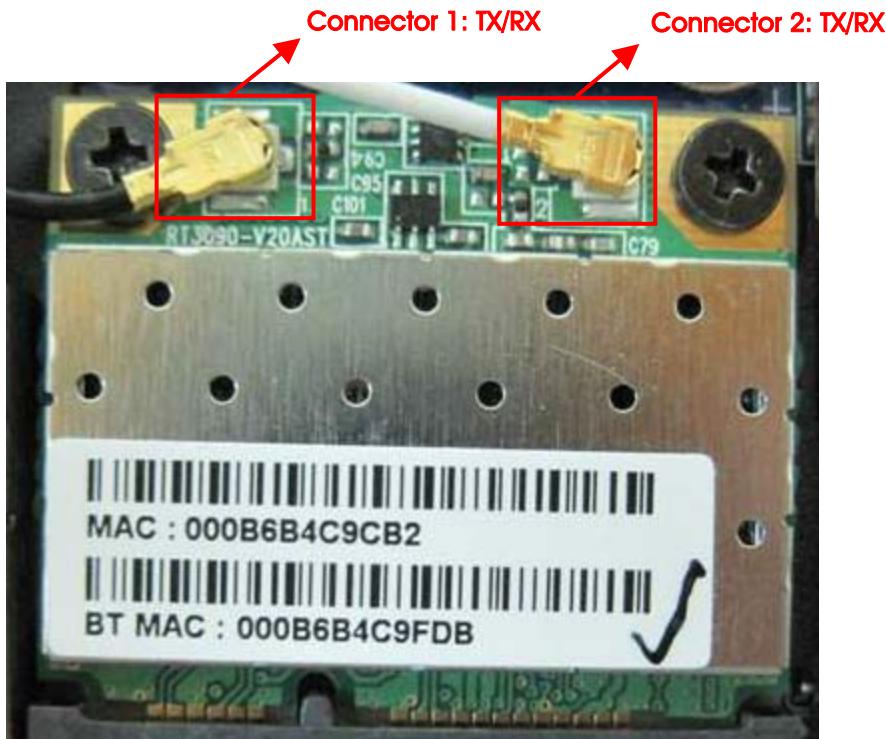

### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz		

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	Normal Link	3 Mbps	Hopping 0~78	-
Radiated Emissions Below 1GHz	8DPSK	3 Mbps	39	A
Radiated Emissions Above 1GHz	8DPSK	3 Mbps	0/39/78	A

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	480872	IC 4086	-
CO04-HY	Conduction	Hwa Ya	480872	IC 4086	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: 9D0210-01

Below is the table for the change of the product with respect to the original one.

Description	Performance Checking
<p>This Module is restricted only on the platform.</p> <p>The platform is a Notebook, which was defined as a mobile device.</p> <p>The information for host Notebook:</p> <p>Product Name: 11b/g/n 1T1R WLAN Mini Card (Tested inside of HP Notebook PC, H110UI1)</p> <p>ODM: Flextronics</p>	<p>AC Conducted Emissions</p> <p>Radiated Emissions</p>

### 3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Modem	ACEEX	DM1414	IFAXDM1414
Mouse	ICOOBY	AMS0706W	DoC
Notebook	HP	H110UI1	DOC
Wireless AP	Planex	GW-AP54SGX	N/A
Notebook	DELL	PP25L	E2K4965AGNM

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of Bluetooth

Test Software Version	Bluetest		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	63	63	63



During the test, the following programs under WIN XP were executed:

Executed "Bluetest" was executed the test program to control the EUT continuously transmit Bluetooth signal.


### 3.10. Test Configurations

#### 3.10.1. Radiation Emissions Test Configuration


Test Configuration: 9KHz~1GHz

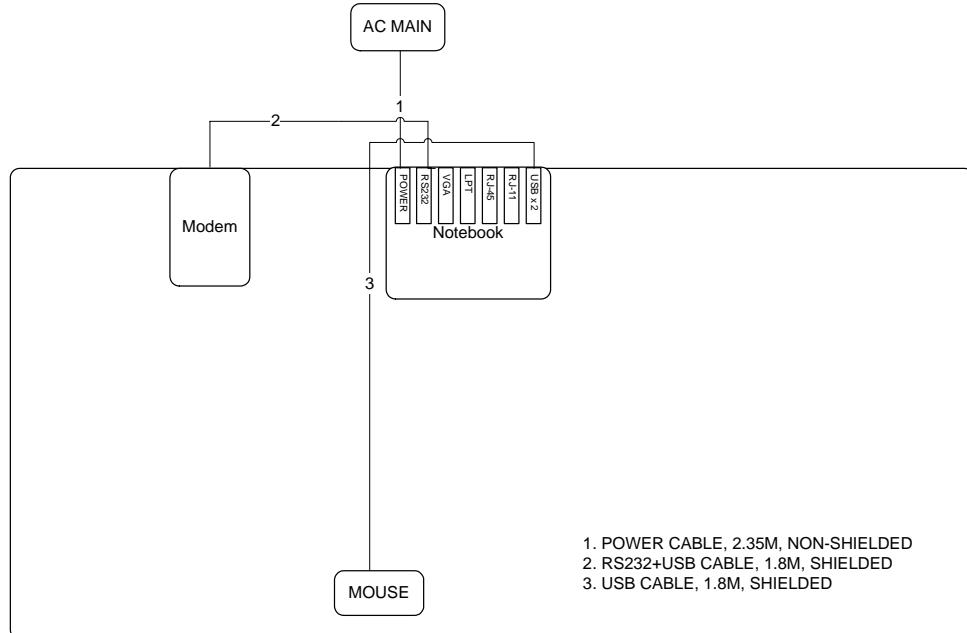

**Test Configuration: above 1GHz**

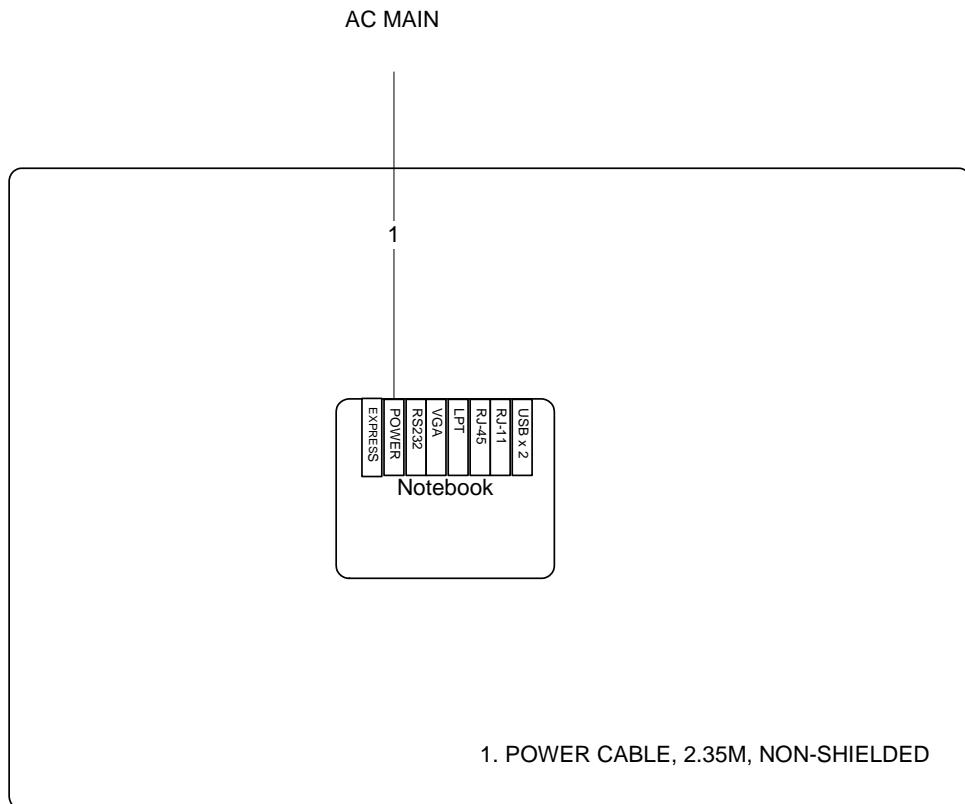

### 3.10.2. AC Power Line Conduction Emissions Test Configuration

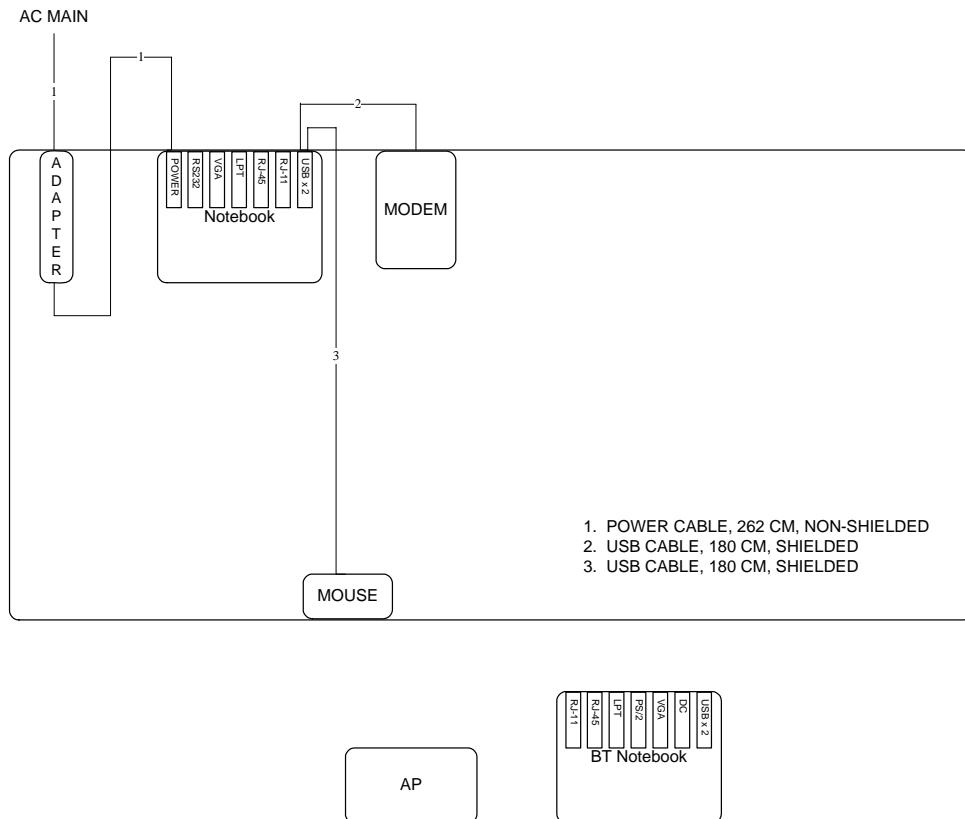

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

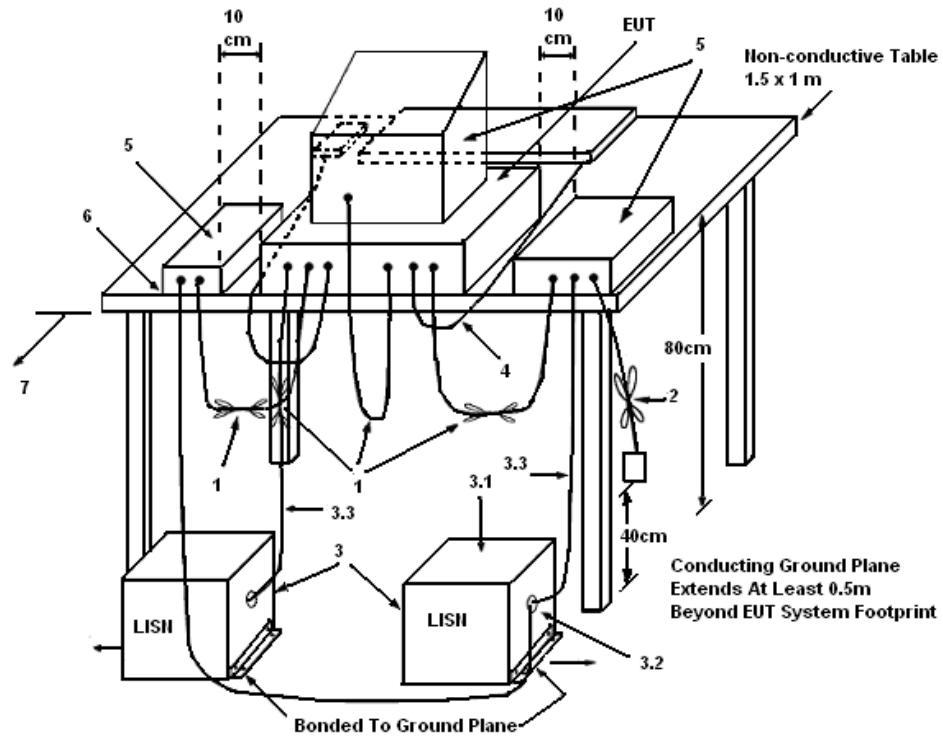

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25.1°C	Humidity	54.3%
Test Engineer	Aric Li	Phase	Line
Configuration	Normal Link		

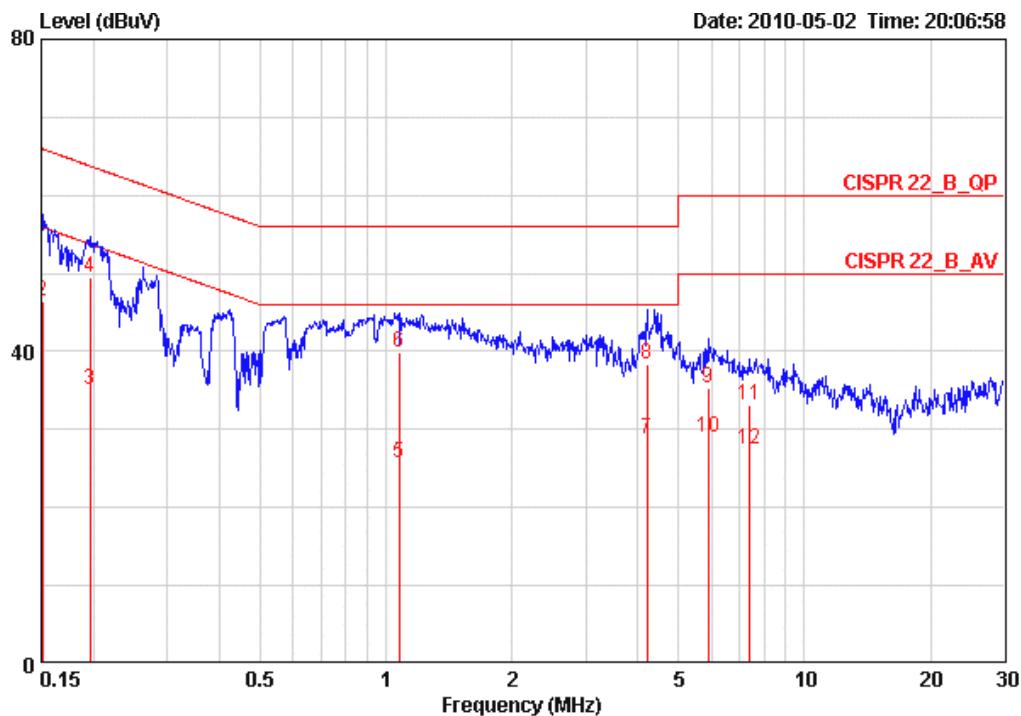

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		MHz	dB	Line	Level	Factor	
1	0.15080	24.26	-31.69	55.96	23.99	0.07	0.20 AVERAGE
2	0.15080	46.53	-19.42	65.96	46.26	0.07	0.20 QP
3	0.19654	35.05	-18.70	53.76	34.80	0.05	0.20 AVERAGE
4	0.19654	49.40	-14.35	63.76	49.15	0.05	0.20 QP
5	1.077	25.79	-20.21	46.00	25.58	0.03	0.18 AVERAGE
6	1.077	39.92	-16.08	56.00	39.71	0.03	0.18 QP
7	4.202	28.75	-17.25	46.00	28.34	0.11	0.30 AVERAGE
8	4.202	38.36	-17.64	56.00	37.95	0.11	0.30 QP
9	5.898	35.28	-24.72	60.00	34.77	0.21	0.30 QP
10	5.898	29.04	-20.96	50.00	28.53	0.21	0.30 AVERAGE
11	7.368	33.18	-26.82	60.00	32.54	0.27	0.38 QP
12	7.368	27.38	-22.62	50.00	26.74	0.27	0.38 AVERAGE

Temperature	25.1°C	Humidity	54.3%
Test Engineer	Aric Li	Phase	Neutral
Configuration	Normal Link		

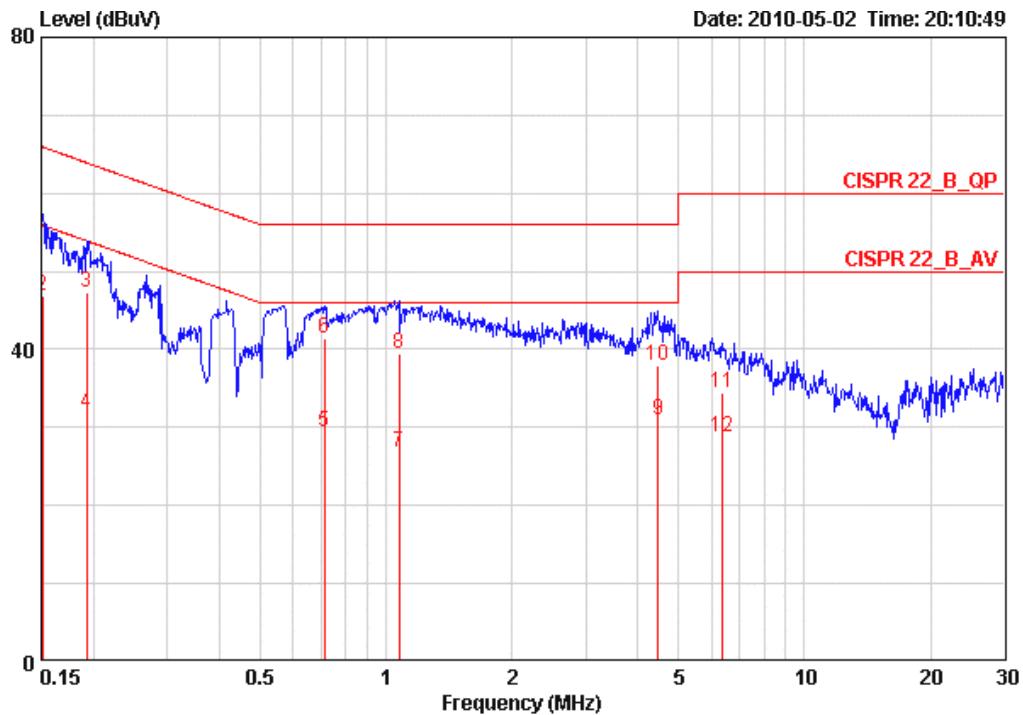

Freq	Over		Limit	Read	LISN	Cable	Remark
	MHz	dBuV					
1	0.15080	22.37	-33.58	55.96	22.07	0.10	0.20 AVERAGE
2	0.15080	46.87	-19.08	65.96	46.57	0.10	0.20 QP
3	0.19242	47.30	-16.63	63.93	47.02	0.08	0.20 QP
4	0.19242	31.73	-22.20	53.93	31.45	0.08	0.20 AVERAGE
5	0.71219	29.52	-16.48	46.00	29.25	0.07	0.20 AVERAGE
6	0.71219	41.51	-14.49	56.00	41.24	0.07	0.20 QP
7	1.077	26.85	-19.15	46.00	26.60	0.07	0.18 AVERAGE
8	1.077	39.47	-16.53	56.00	39.22	0.07	0.18 QP
9	4.478	30.99	-15.01	46.00	30.52	0.17	0.30 AVERAGE
10	4.478	37.85	-18.15	56.00	37.38	0.17	0.30 QP
11	6.386	34.53	-25.47	60.00	33.89	0.27	0.37 QP
12	6.386	28.84	-21.16	50.00	28.20	0.27	0.37 AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Radiated Emissions Measurement

### 4.2.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a)/2.2(a), then the 15.209(a)/2.2(b) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.2.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.2.4. Test Setup Layout

For radiated emissions below 30MHz

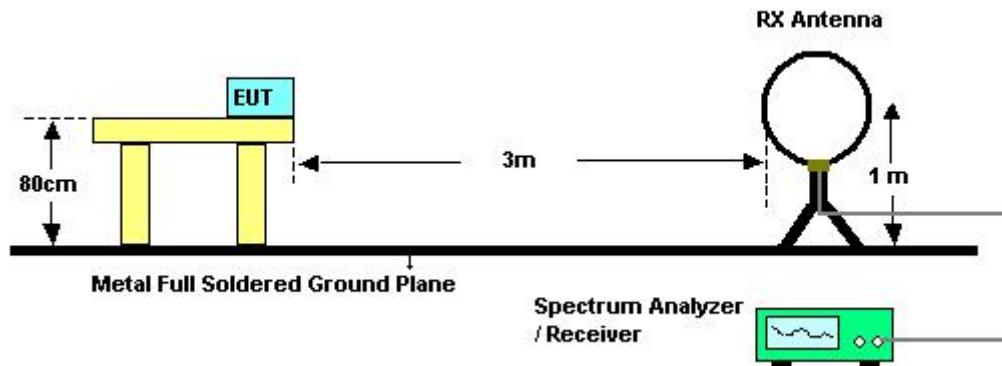

For radiated emissions above 30MHz

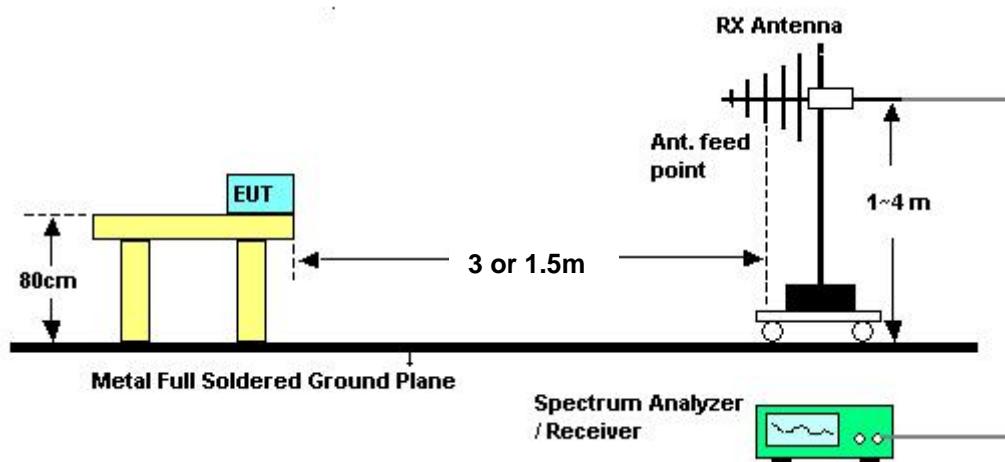

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23°C	Humidity	56%
Test Engineer	Alan Huang	Test Date	May 03, 2010

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.2.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	23°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Normal Link

##### Horizontal

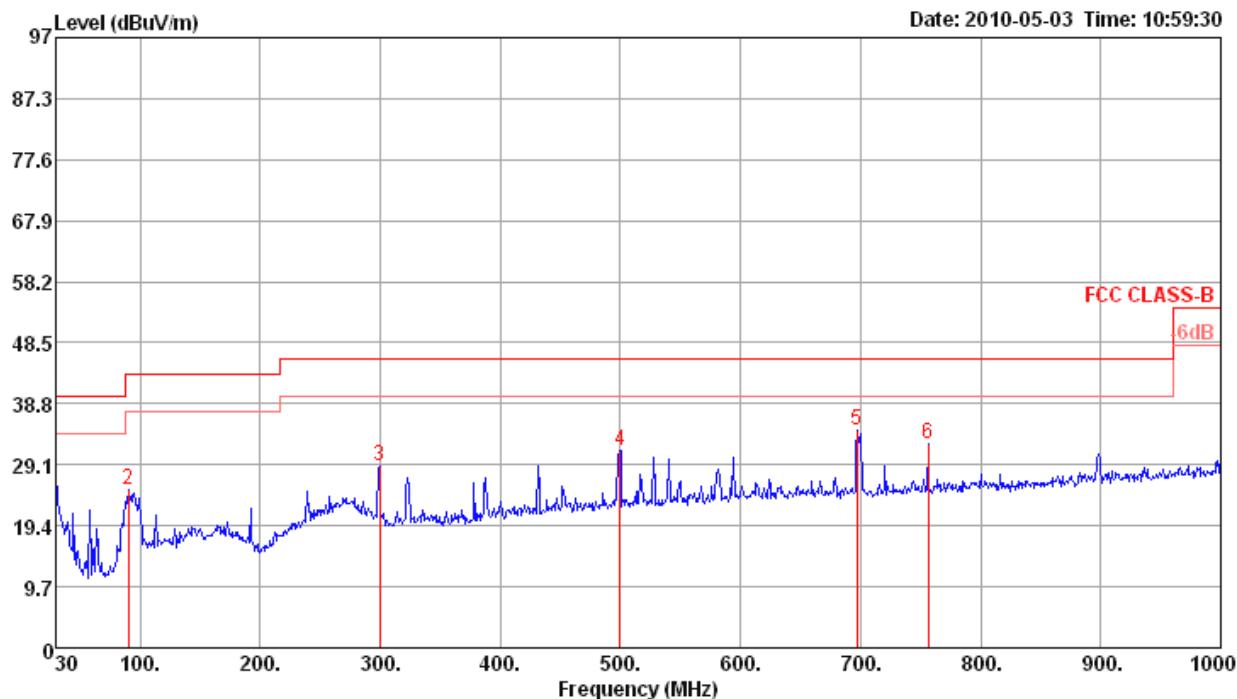

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	30.00	27.90	40.00	-12.10	36.44	0.50	27.80	18.76	0	100 Peak	HORIZONTAL
2	90.14	25.20	43.50	-18.30	42.76	1.10	27.64	8.98	0	100 Peak	HORIZONTAL
3	299.66	28.94	46.00	-17.06	40.38	2.10	26.90	13.36	0	100 Peak	HORIZONTAL
4	499.48	31.36	46.00	-14.64	39.14	2.70	28.09	17.61	0	100 Peak	HORIZONTAL
5	697.36	34.63	46.00	-11.37	40.24	3.31	28.00	19.08	0	100 Peak	HORIZONTAL
6	756.53	32.40	46.00	-13.60	37.23	3.47	27.77	19.47	0	100 Peak	HORIZONTAL

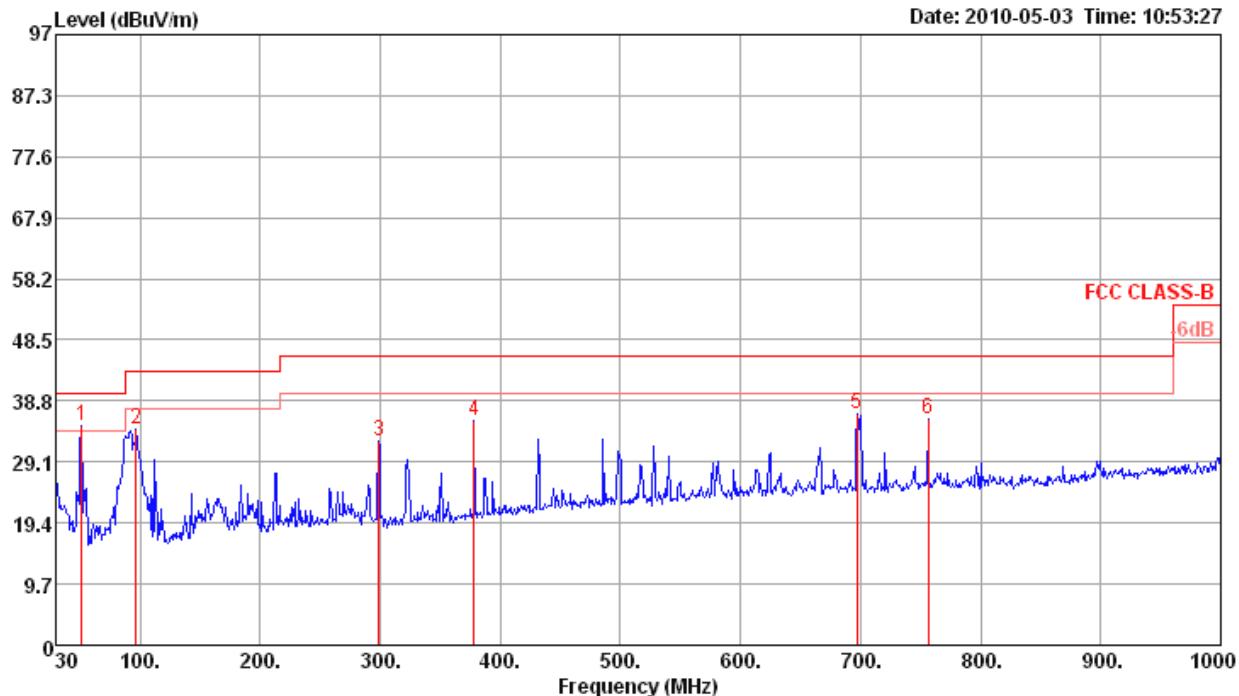**Vertical**


Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	51.34	34.97	40.00	-5.03	53.69	0.72	27.79	8.35	0	400 Peak	VERTICAL
2	96.93	34.22	43.50	-9.28	50.31	1.14	27.62	10.39	0	400 Peak	VERTICAL
3	298.69	32.38	46.00	-13.62	43.83	2.10	26.90	13.35	0	400 Peak	VERTICAL
4	378.23	35.53	46.00	-10.47	45.24	2.26	27.45	15.48	0	400 Peak	VERTICAL
5	697.36	36.83	46.00	-9.17	42.44	3.31	28.00	19.08	0	400 Peak	VERTICAL
6	756.53	35.99	46.00	-10.01	40.82	3.47	27.77	19.47	0	400 Peak	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.2.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	23°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	Channel 39
Test Date	Apr. 27, 2010		

## Horizontal

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	deg	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4881.84	45.76	74.00	-28.24	45.34	3.01	35.15	32.56	253	116	Peak	HORIZONTAL
2	4882.03	35.82	54.00	-18.18	35.40	3.01	35.15	32.56	253	116	Average	HORIZONTAL

## Vertical

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	deg	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	4881.77	47.13	74.00	-26.87	46.71	3.01	35.15	32.56	148	100	Peak	VERTICAL
2	4882.01	39.67	54.00	-14.33	39.25	3.01	35.15	32.56	148	100	Average	VERTICAL

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.3. Antenna Requirements

### 4.3.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.3.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2010	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2010	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2010	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2010	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 11, 2009	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 23, 2010	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100305	9 kHz - 40 GHz	Feb. 03, 2010	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2010	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan. 16, 2010	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2010	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: Calibration Interval of instruments listed above is two year.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sportun International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

**Accreditation Criteria** : ISO/IEC 17025:2005  
**Accreditation Number** : 1190  
**Originally Accredited** : December 15, 2003  
**Effective Period** : January 10, 2010 to January 09, 2013  
**Accredited Scope** : Testing Field, see described in the Appendix  
**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory  
for Commodities Inspection  
Accreditation Program for Telecommunication Equipment  
Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition  
Arrangement with Foreign Authorities



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : December 30, 2009

P1, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix