

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Notebook Computer
Model No. : LGP53, P450, PB450, PD450, PV450
Brand Name : LG
Filing Type : Existing Change
Applicant : LG Electronics Inc.
19-1, Cheongho-ri, Jinwi-myeon,
Pyeongtaek-si, Gyeonggi-do, 451-713, Korea.
FCC ID : VQF-RT3090BC4
Manufacturer : LG Electronics Inc.
No. 25, The Third Street Kunshan Export
Processing Zone, Jiangsu, P.R.C.
Received Date : May 23, 2011
Final Test Date : May 31, 2011

Statement

Test result included is only for the 802.11b/g/n part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT	2
2 GENERAL INFORMATION.....	3
2.1 Product Details.....	3
2.2 Accessories.....	3
2.3 Table for Filed Antenna.....	3
2.4 Table for Carrier Frequencies	4
2.5 Table for Test Modes	4
2.6 Table for Testing Locations.....	4
2.7 Table for Supporting Units	5
2.8 EUT Operation during Test	5
2.9 Test Configuration.....	6
3 TEST RESULT	7
3.1 AC Power Line Conducted Emissions Measurement	7
3.2 Radiated Emissions Measurement	11
3.3 Band Edge and Fundamental Emissions Measurement.....	41
3.4 Antenna Requirements	46
4 LIST OF MEASURING EQUIPMENTS.....	47
5 TEST LOCATION.....	48
6 TAF CERTIFICATE OF ACCREDITATION.....	49
APPENDIX A. TEST PHOTOS	A1 ~ A6
APPENDIX B. PHOTOGRAPHS OF EUT	B1 ~ B21

History of This Test Report

Original Issue Date: Jun. 07, 2011

Report No.: FR151308AN

■ No additional attachment.

□ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description
FR151308AN	Jun. 07, 2011	Additional antennas and full system application. This report covers Conducted and Radiated Emission tests only. Original Sporton report reference is FR9D0210-01AA.

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Notebook Computer
Model No. : LGP53, P450, PB450, PD450, PV450
Brand Name : LG
Applicant : LG Electronics Inc.
19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si,
Gyeonggi-do, 451-713, Korea.

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 23, 2011 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Wayne Hsu / Vice Manager

SPORTON International Inc.

No.52 Hwa Ya 1st Rd, Hwa Ya Technology Park, Kwei-Shan Hsiang, Taoyuan Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	4.32 dB
-	15.247(b)(3)	Peak Output Power	Complies	-
-	15.247(e)	Power Spectral Density	Complies	-
-	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
3.2	15.247(d)	Radiated Emissions	Complies	3.05 dB
3.3	15.247(d)	Band Edge Emissions	Complies	3.72 dB
3.4	15.203	Antenna Requirements	Complies	-

Note: The module has already tested of Standard clause 15.247(b)(3)、15.247(e)、15.247(a)(2) please refer to Sporton No. FR9D0210-01AA.

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7℃	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2 GENERAL INFORMATION

2.1 Product Details

Only the radio detail of IEEE 802.11b/g/n is shown in this report. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	19V from Adapter ; 10.8Vdc from Li-ion Battery
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g/n
Data Modulation	DSSS (DBPSK / DQPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11n see the items 2.3
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11b/g/n (20MHz) : 11 ; 11n (40MHz) : 7

2.2 Accessories

Please refer to the specifications or user's manual.

2.3 Table for Filed Antenna

Brand	Antenna Part No.	Antenna Type	Connector	Gain (dBi)	Remark
ACON	Main Antenna : DC33000X400 (APP6P-700557)	PIFA Antenna	U.FL	1.94	Tx1 / Rx1
	Aux Antenna : DC33000X410 (APP6P-700558)			1.96	Tx2 / Rx2

Brand	Antenna Part No.	Antenna Type	Connector	Gain (dBi)	Remark
WHAYU	Main Antenna : DC33000V700 (C435-520083-A)	PIFA Antenna	U.FL	-1.36	Tx1 / Rx1
	Aux Antenna : DC33000V710 (C435-520084-A)			1.23	Tx2 / Rx2

Brand	Antenna Part No.	Antenna Type	Connector	Gain (dBi)	Remark
WNC	Main Antenna : DC33000V500 (81.EL415.G07)	PIFA Antenna	U.FL	0.69	Tx1 / Rx1
	Aux Antenna : DC33000V510 (81.EL415.G08)			1.45	Tx2 / Rx2

EUT may match the three antennas use. Performed the worst configuration for higher gain was test in final test report.

Note : The antenna was 1T1R Spatial Multiplexing MIMO configuration.

IEEE 802.11n Modulation Scheme

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps)	
					20MHz	40MHz	20MHz	40MHz	800nsGI	
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

2.4 Table for Carrier Frequencies

IEEE 802.11b/g/n 20MHz bandwidth systems use channel 1~11.

IEEE 802.11n 40MHz bandwidth systems use channel 3~9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

2.5 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
AC Power Line Conducted Emissions	Normal Mode	Auto	-
Radiated Emissions 9kHz~1GHz			
Radiated Emissions 1GHz~10 th Harmonic			
Band Edge Emissions			
	11b/CCK	11 Mbps	1/6/11
	11g/BPSK	6 Mbps	1/6/11
	MCS 0 (20MHz)	6.5 Mbps	1/6/11
	MCS0 (40MHz)	13 Mbps	3/6/9

2.6 Table for Testing Locations

Test Site No.	Site Category	Location
CO04-HY	Conduction	Hwa Ya
03CH03-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).

2.7 Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Mouse	Microsoft	1004	DOC
iPod	APPLE	A1051	DoC
Wireless AP (Remote workstation)	D-Link	DNS-G120	N/A

** The EUT was tested alone only Radiated Emissions tested.

2.8 EUT Operation during Test**<Conducted Emissions>**

An executive program, "EMCTEST.EXE" under Window 7, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The EUT reads the test program from the hard disk drive and runs it.
- c. The EUT sends "H" messages to the panel and displays "H" patterns on the screen.
- d. Repeat the steps from b to c.

At the same time, the following programs were executed:

- Executed " PING.EXE " was executed to link with the remote workstation to receive and transmit data by wireless.
- Executed "YouCam3," to the image captured from the CCD camera.


<Radiated Emissions>

- Executed "RT3X9XQA.exe" to keep transmitting signals at fixed frequency.


2.9 Test Configuration

2.9.1 Radiation Emissions Test Configuration

For radiated emissions 9kHz~1GHz

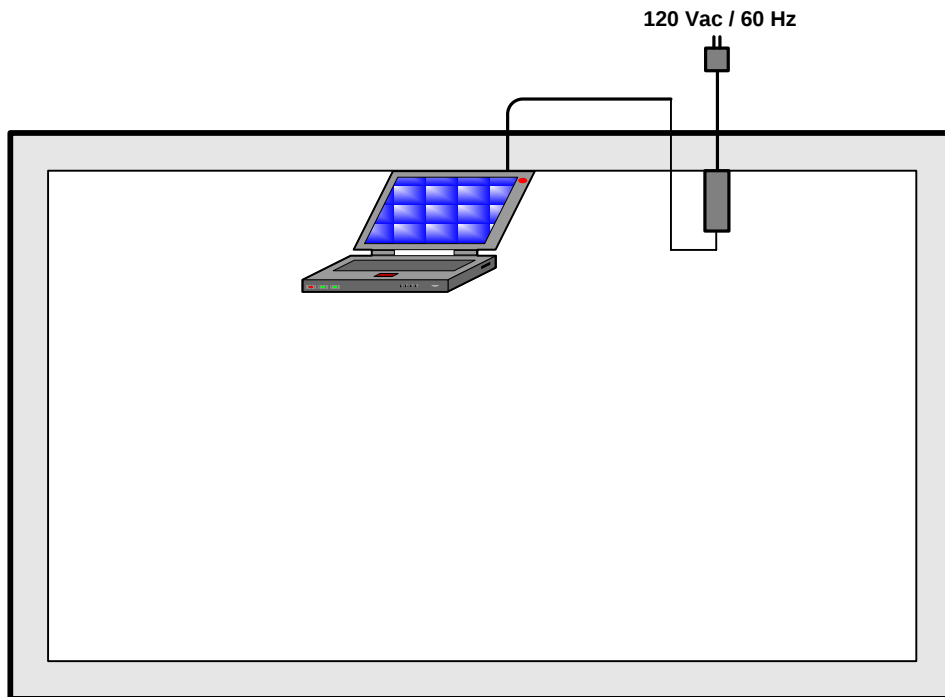

For radiated emissions above 1GHz

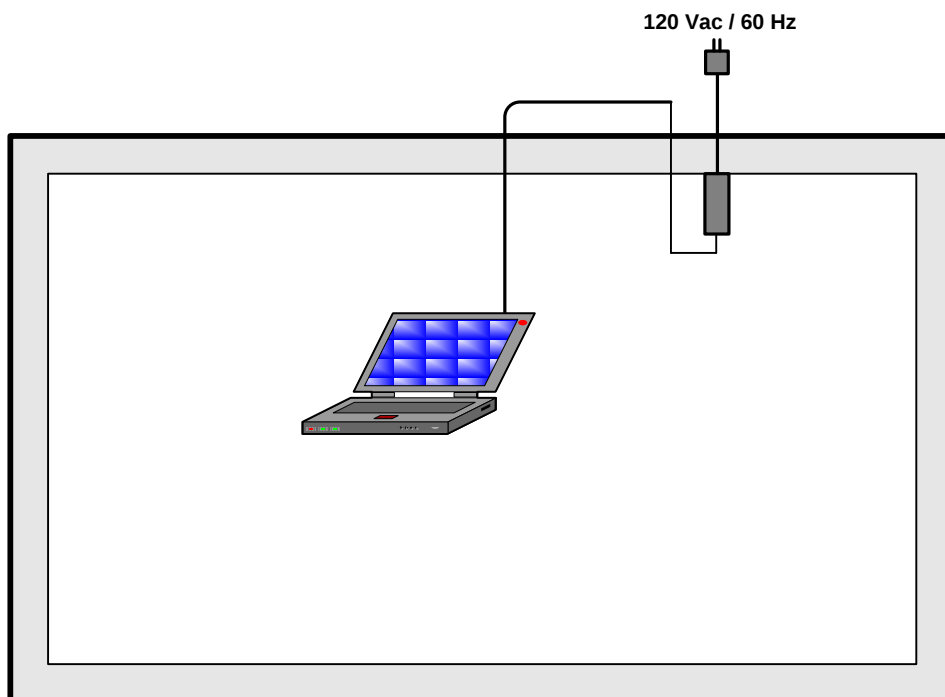

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


3.1.3 Test Procedures

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


Final Test Date	May 31, 2011	Test Site No.	CO04-HY
Temperature	25.8°C	Humidity	58.9%
Test Engineer	Jason	Configuration	Normal Mode

Line

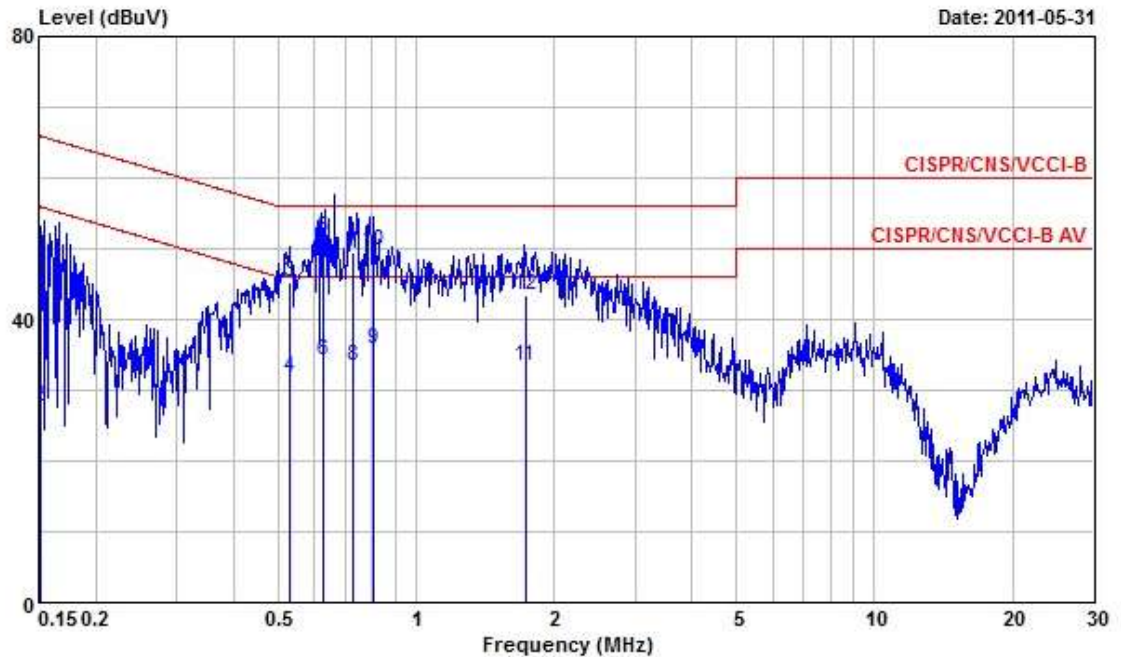

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1516860	49.43	-16.48	65.91	49.28	0.09	0.06	QP
2	0.1516860	27.57	-28.34	55.91	27.42	0.09	0.06	Average
3	0.5293420	45.32	-10.68	56.00	45.09	0.10	0.13	QP
4	0.5293420	31.94	-14.06	46.00	31.71	0.10	0.13	Average
5	0.6254790	51.68	-4.32	56.00	51.43	0.10	0.15	QP
6	0.6254790	34.27	-11.73	46.00	34.02	0.10	0.15	Average
7	0.7306230	49.36	-6.64	56.00	49.09	0.10	0.17	QP
8	0.7306230	33.30	-12.70	46.00	33.03	0.10	0.17	Average
9	0.8045990	35.70	-10.30	46.00	35.41	0.11	0.18	Average
10	0.8045990	49.72	-6.28	56.00	49.43	0.11	0.18	QP
11	1.730	33.33	-12.67	46.00	33.00	0.13	0.20	Average
12	1.730	43.48	-12.52	56.00	43.15	0.13	0.20	QP

Neutral

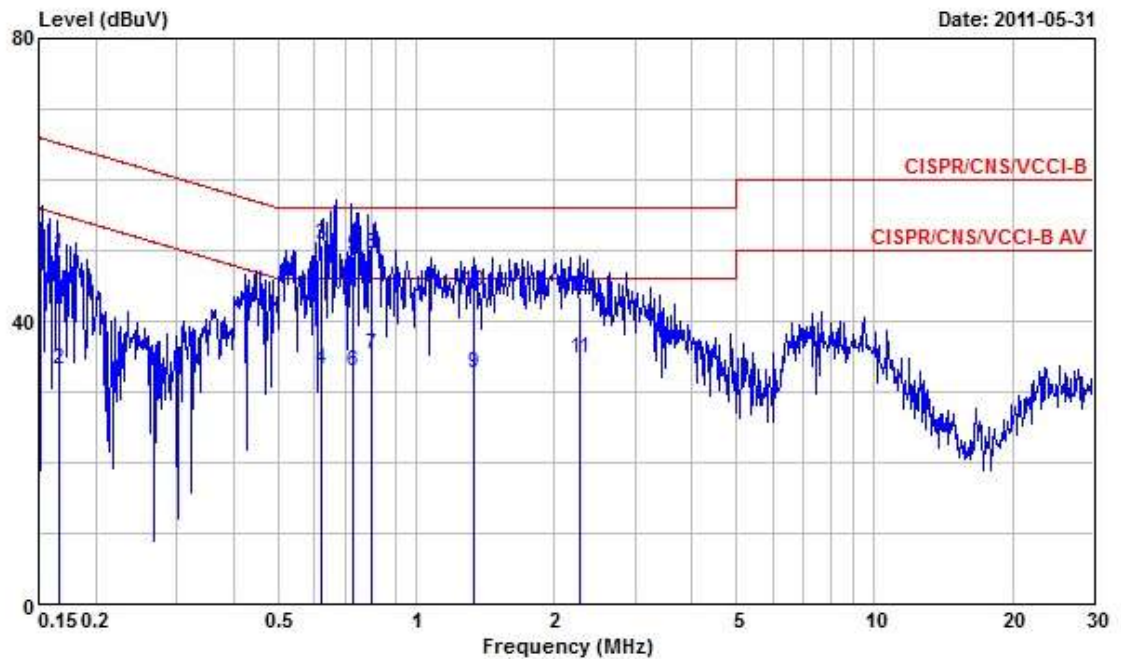

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1656030	49.49	-15.69	65.18	49.34	0.08	0.07	QP
2	0.1656030	33.05	-22.13	55.18	32.90	0.08	0.07	Average
3	0.6223160	50.91	-5.09	56.00	50.67	0.09	0.15	QP
4	0.6223160	33.15	-12.85	46.00	32.91	0.09	0.15	Average
5	0.7301740	49.15	-6.85	56.00	48.89	0.09	0.17	QP
6	0.7301740	32.97	-13.03	46.00	32.71	0.09	0.17	Average
7	0.8013740	35.27	-10.73	46.00	34.99	0.10	0.18	Average
8	0.8013740	49.51	-6.49	56.00	49.23	0.10	0.18	QP
9	1.330	32.53	-13.47	46.00	32.23	0.10	0.20	Average
10	1.330	44.12	-11.88	56.00	43.82	0.10	0.20	QP
11	2.280	34.77	-11.23	46.00	34.45	0.12	0.20	Average
12	2.280	43.39	-12.61	56.00	43.07	0.12	0.20	QP

Note:
Level = Read Level + LISN Factor + Cable Loss.

3.2 Radiated Emissions Measurement

3.2.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.2.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.2.4 Test Setup Layout

For radiated emissions below 30MHz

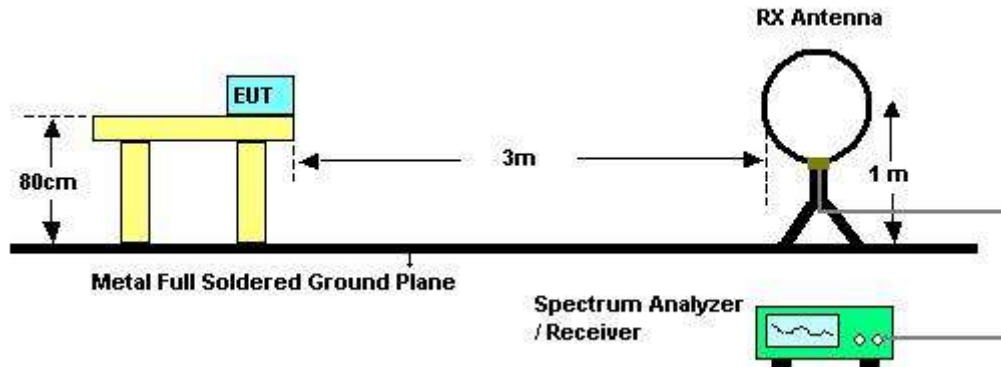

For radiated emissions above 30MHz

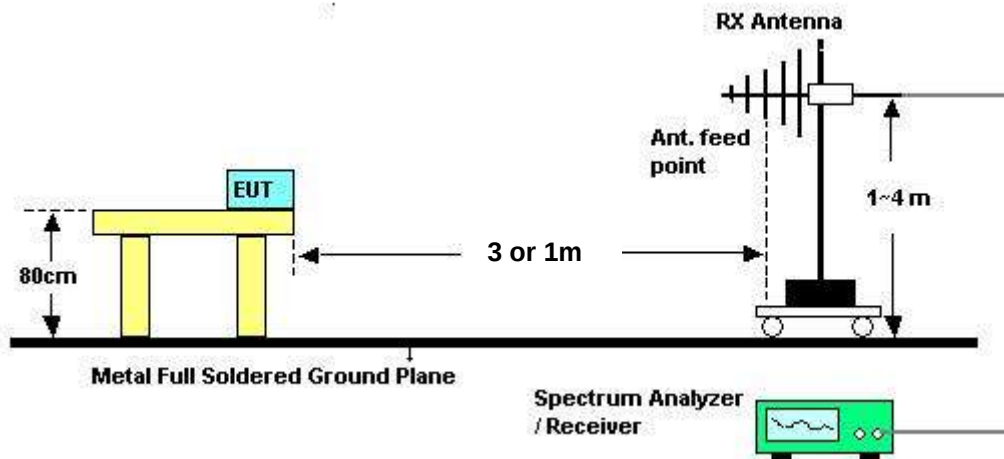

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Results of Radiated Emissions (9kHz~30MHz)

Final Test Date	May 25, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.2.8 Results of Radiated Emissions (30MHz~1GHz)


Final Test Date	May 25, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	Normal Mode

Horizontal

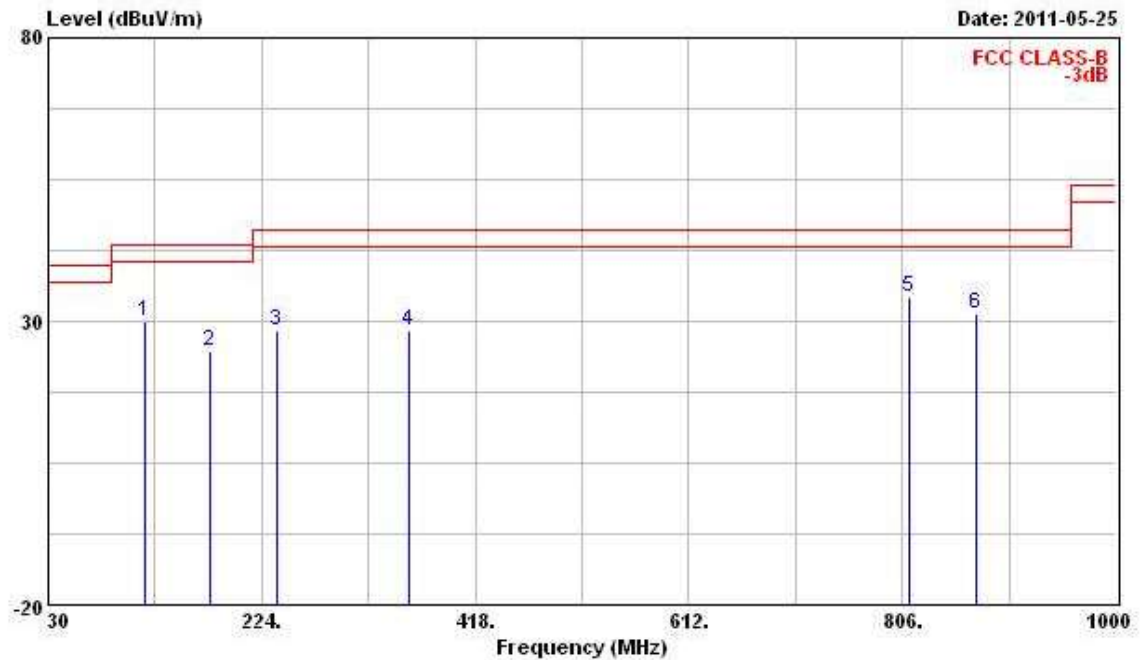

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	118.270	29.89	-13.61	43.50	43.87	12.61	0.94	27.53	Peak
2	176.470	24.73	-18.77	43.50	41.97	9.31	1.33	27.88	Peak
3	237.580	28.22	-17.78	46.00	43.39	11.32	1.51	28.00	Peak
4	357.860	28.28	-17.72	46.00	39.31	15.18	2.27	28.48	Peak
5 @	811.820	34.23	-11.77	46.00	38.46	20.77	4.46	29.46	Peak
6	873.900	31.26	-14.74	46.00	34.98	20.93	4.74	29.40	Peak

Vertical

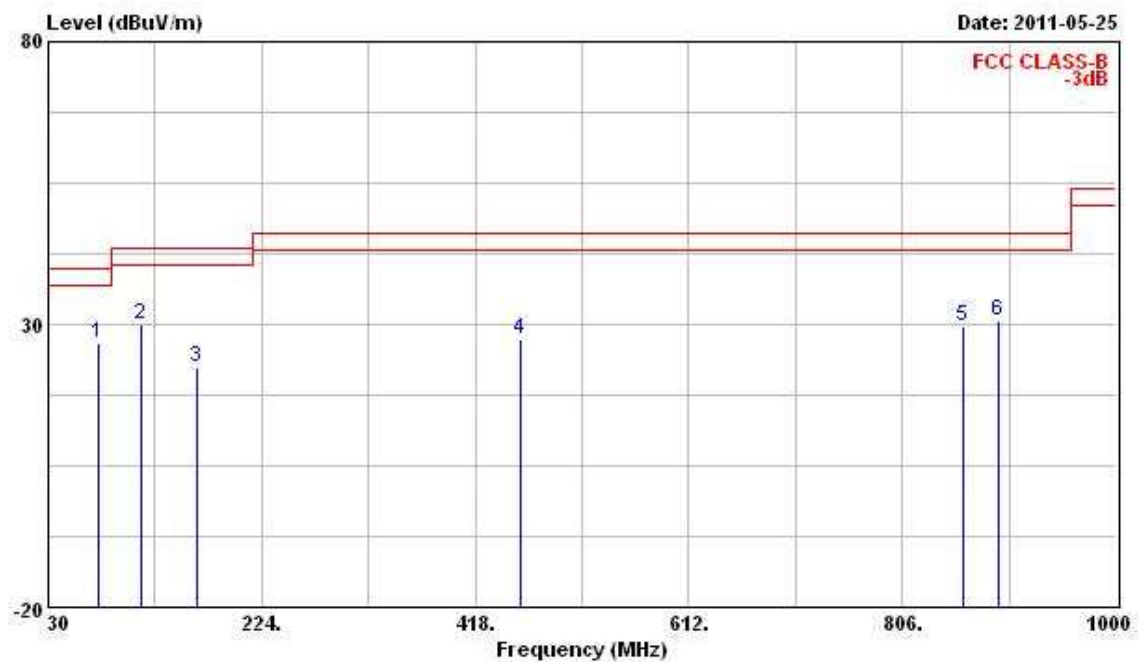

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	75.590	26.80	-13.20	40.00	47.36	6.68	0.12	27.36	Peak
2	114.390	30.15	-13.35	43.50	44.19	12.52	0.95	27.50	Peak
3	164.830	22.54	-20.96	43.50	39.23	9.89	1.24	27.83	Peak
4	458.740	27.42	-18.58	46.00	36.44	17.26	2.71	28.99	Peak
5	862.260	29.57	-16.43	46.00	33.42	20.89	4.68	29.42	Peak
6	893.300	30.51	-15.49	46.00	34.02	21.01	4.84	29.36	Peak

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.2.9 Results for Radiated Emissions (1GHz~10th Harmonic)


Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11b Ch. 1

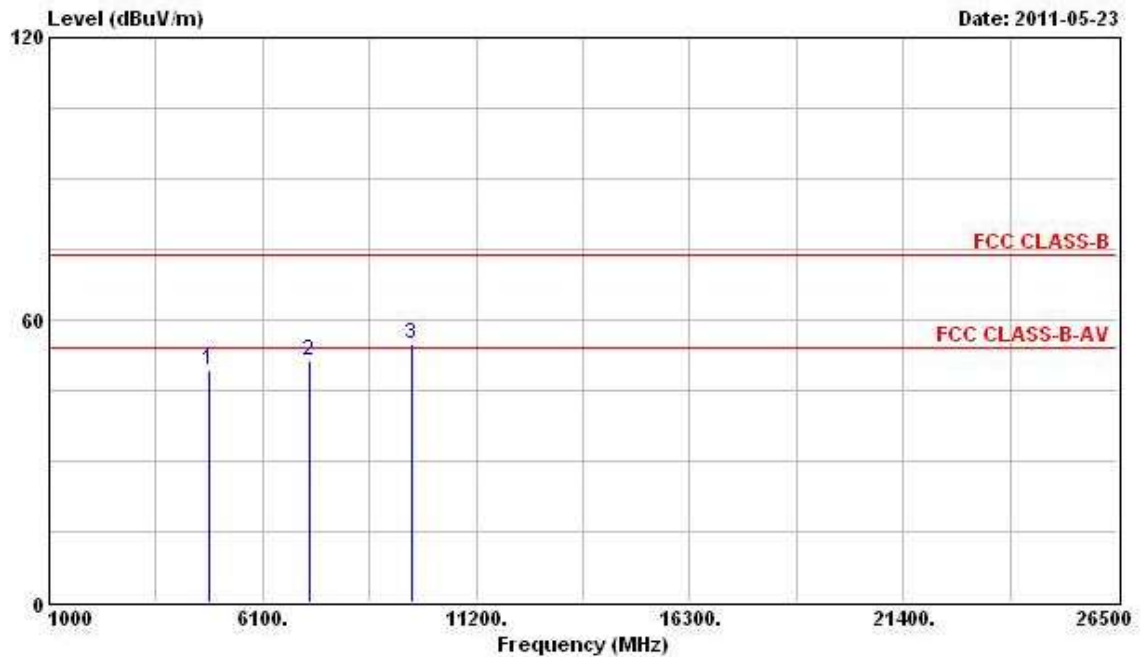Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4824.000	49.25	-4.75	54.00	43.39	33.06	5.43	32.63	PK
2	7236.000	51.35			43.56	35.53	5.14	32.89	Peak
3	9648.000	55.04			43.27	38.41	6.70	33.34	Peak

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

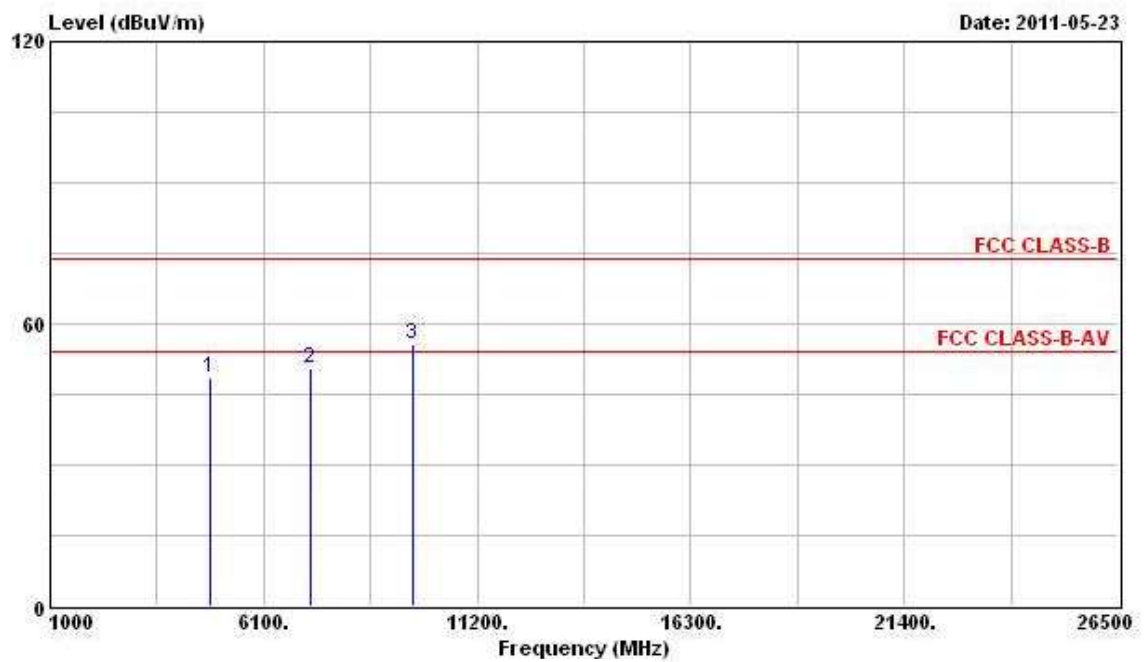

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
			Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4824.000	48.45	-5.55	54.00	42.59	33.06	5.43	32.63 PK
2	7236.000	50.68			42.89	35.53	5.14	32.89 Peak
3	9648.000	55.68			43.91	38.41	6.70	33.34 Peak

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11b Ch. 6

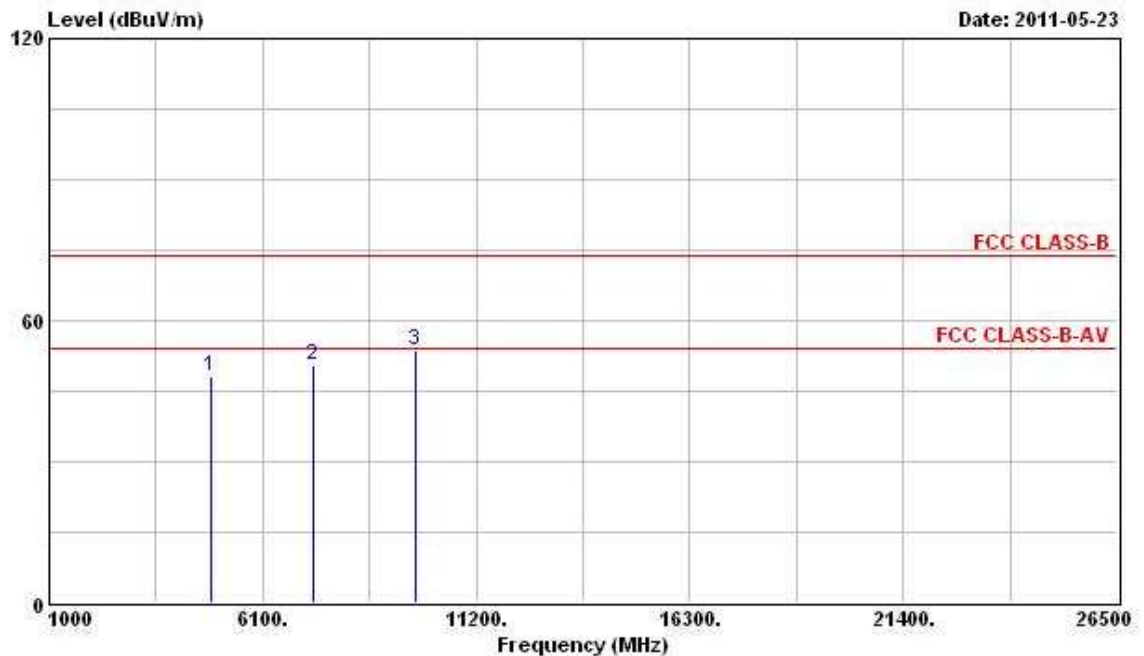Horizontal

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	4874.000	48.17	-5.83	54.00	42.21	33.16	5.43	32.62	PK
2 @	7311.000	50.35	-3.65	54.00	42.21	35.68	5.36	32.90	PK
3	9748.000	53.88			41.86	38.62	6.74	33.34	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

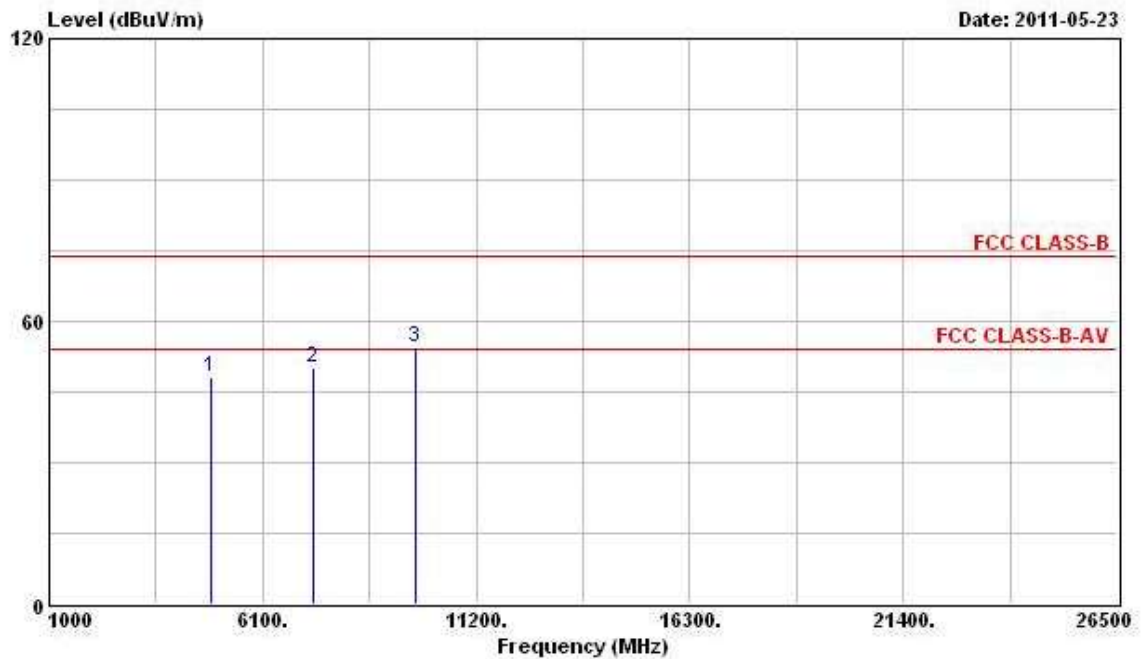

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	47.97	-6.03	54.00	42.01	33.16	5.43	32.62	PK
2	7311.000	49.99	-4.01	54.00	41.85	35.68	5.36	32.90	PK
3	9748.000	54.38			42.36	38.62	6.74	33.34	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11b Ch. 11

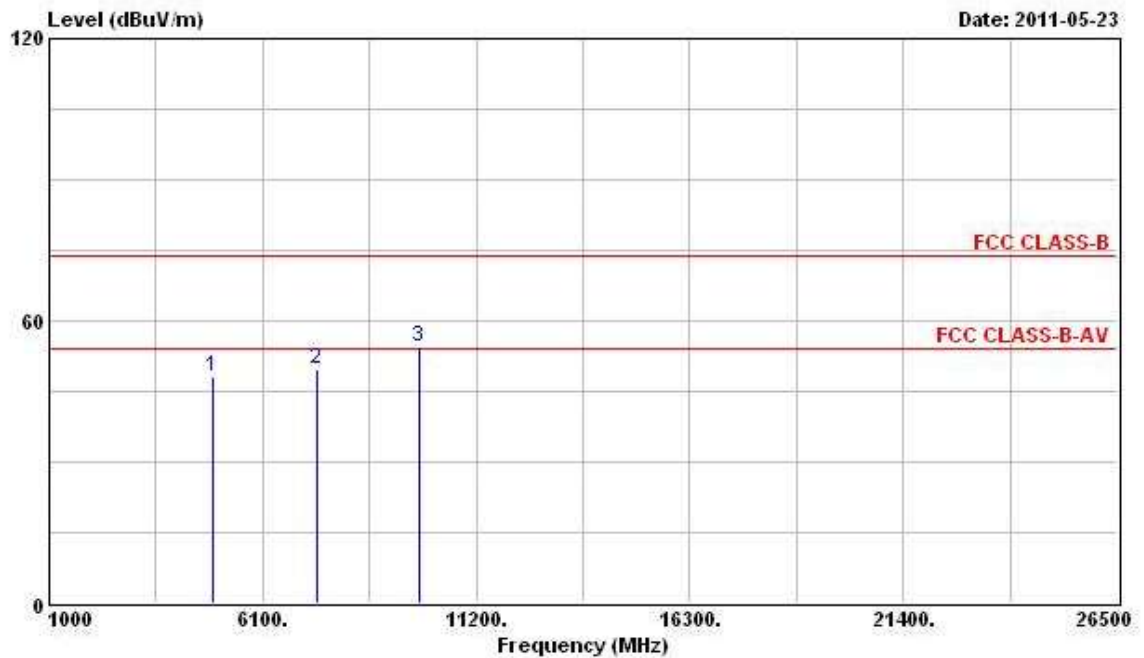Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4924.000	48.29	-5.71	54.00	42.23	33.26	5.41	32.61	PK
2	7386.000	49.92	-4.08	54.00	41.40	35.87	5.57	32.92	PK
3	9848.000	54.33			42.07	38.79	6.80	33.33	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

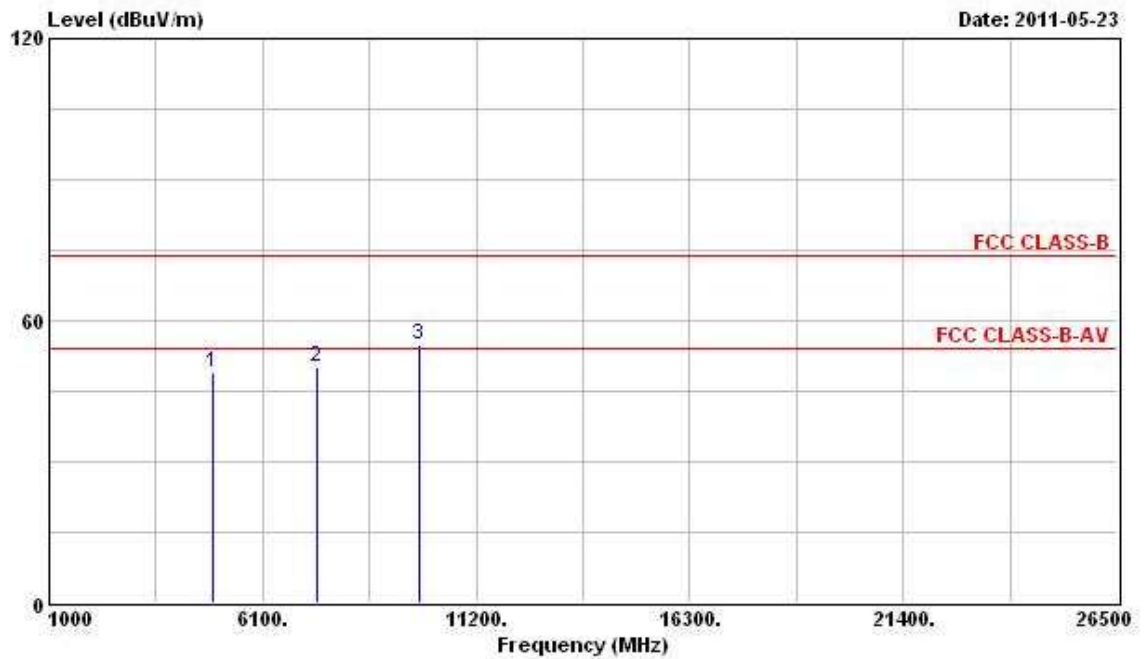

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4924.000	48.95	-5.05	54.00	42.89	33.26	5.41	32.61 PK
2	7386.000	50.14	-3.86	54.00	41.62	35.87	5.57	32.92 PK
3	9848.000	54.85			42.59	38.79	6.80	33.33 Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11g Ch. 1

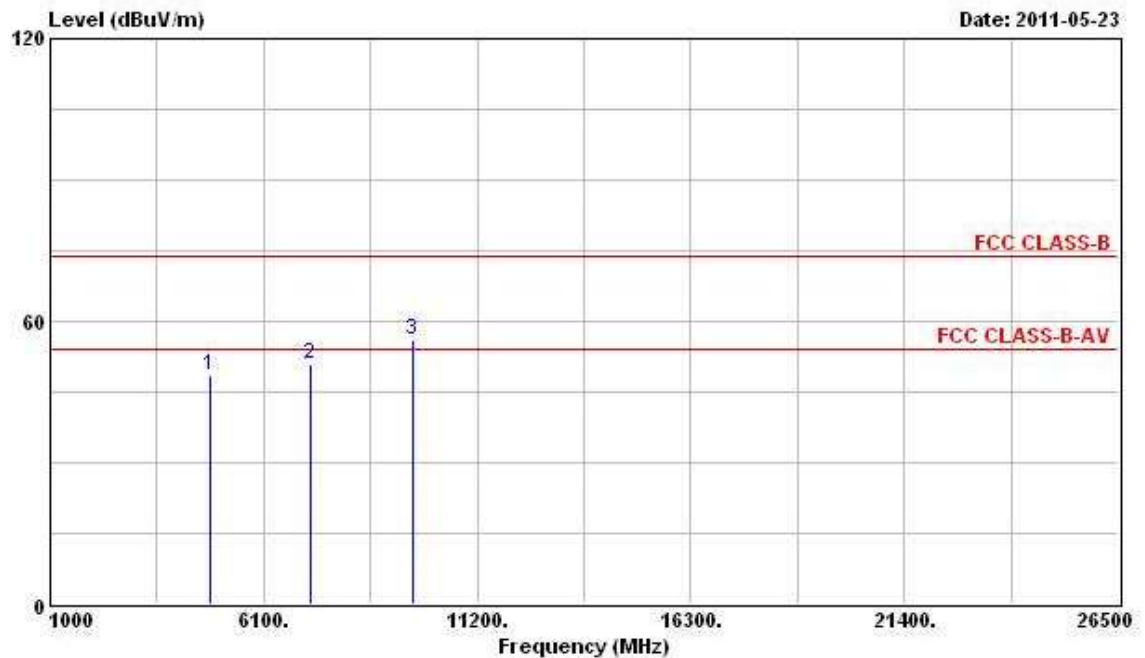Horizontal

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
			Limit	Line	Level	Factor	Loss	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4824.000	48.47	-5.53	54.00	42.61	33.06	5.43	32.63 PK
2	7236.000	50.93			43.14	35.53	5.14	32.89 Peak
3	9648.000	56.03			44.26	38.41	6.70	33.34 Peak

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

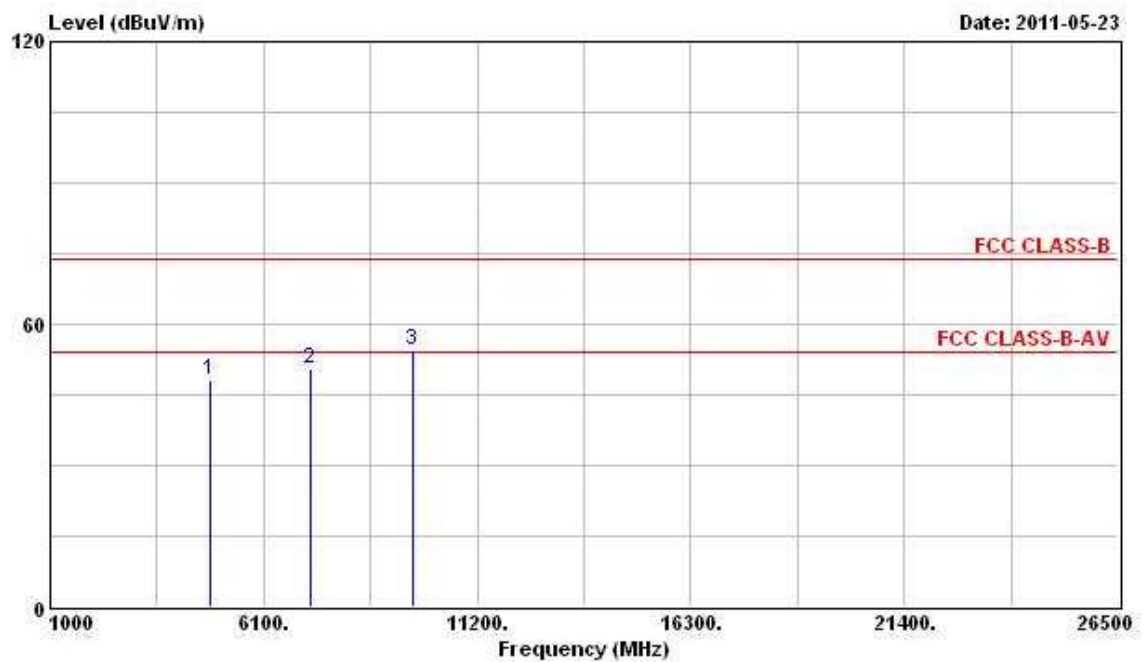

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4824.000	48.19	-5.81	54.00	42.33	33.06	5.43	32.63	PK
2	7236.000	50.60			42.81	35.53	5.14	32.89	Peak
3	9648.000	54.48			42.71	38.41	6.70	33.34	Peak

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11g Ch. 6

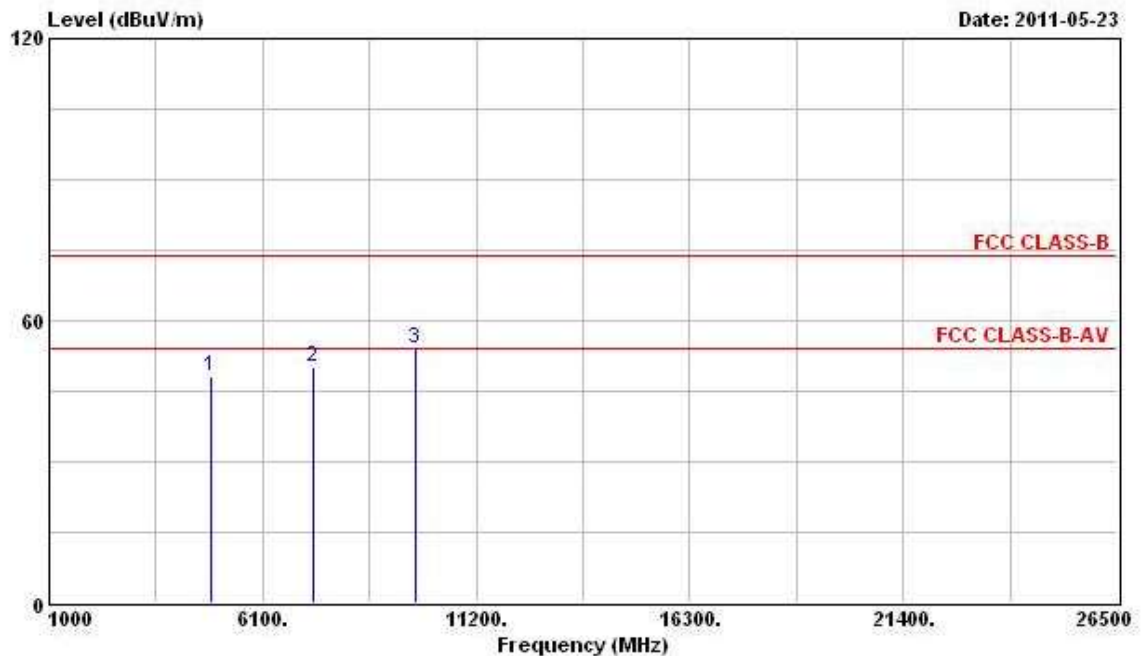Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	4874.000	48.06	-5.94	54.00	42.10	33.16	5.43	32.62	PK
2 @	7311.000	50.19	-3.81	54.00	42.05	35.68	5.36	32.90	PK
3	9748.000	54.03			42.01	38.62	6.74	33.34	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

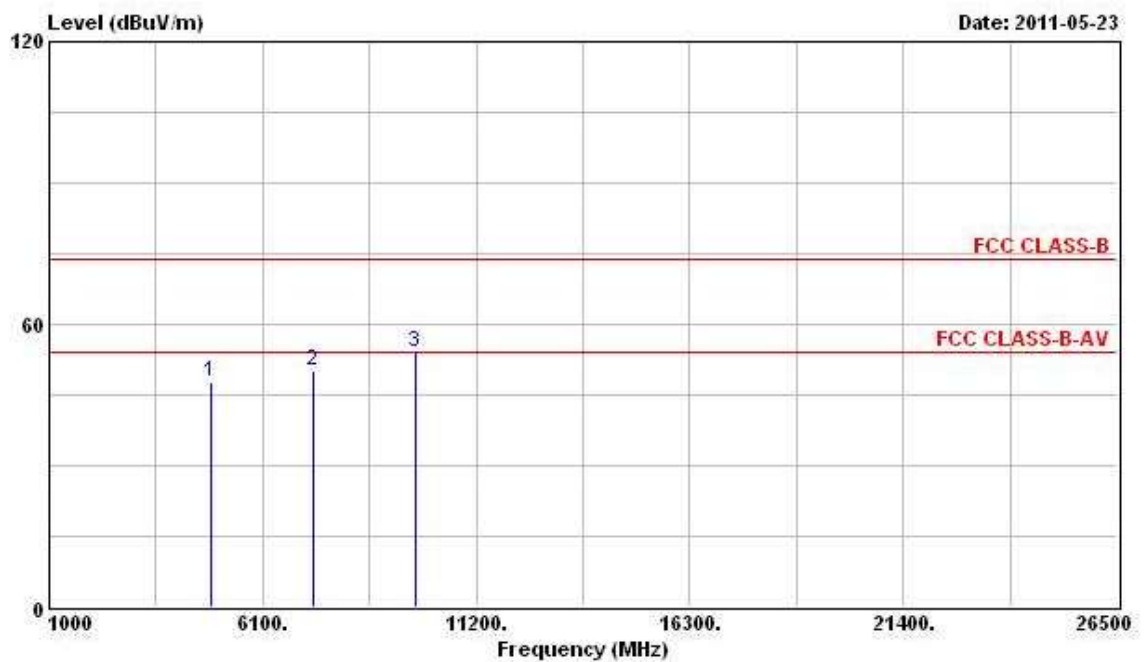

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	47.86	-6.14	54.00	41.90	33.16	5.43	32.62	PK
2	7311.000	50.17	-3.83	54.00	42.03	35.68	5.36	32.90	PK
3	9748.000	54.08			42.06	38.62	6.74	33.34	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11g Ch. 11

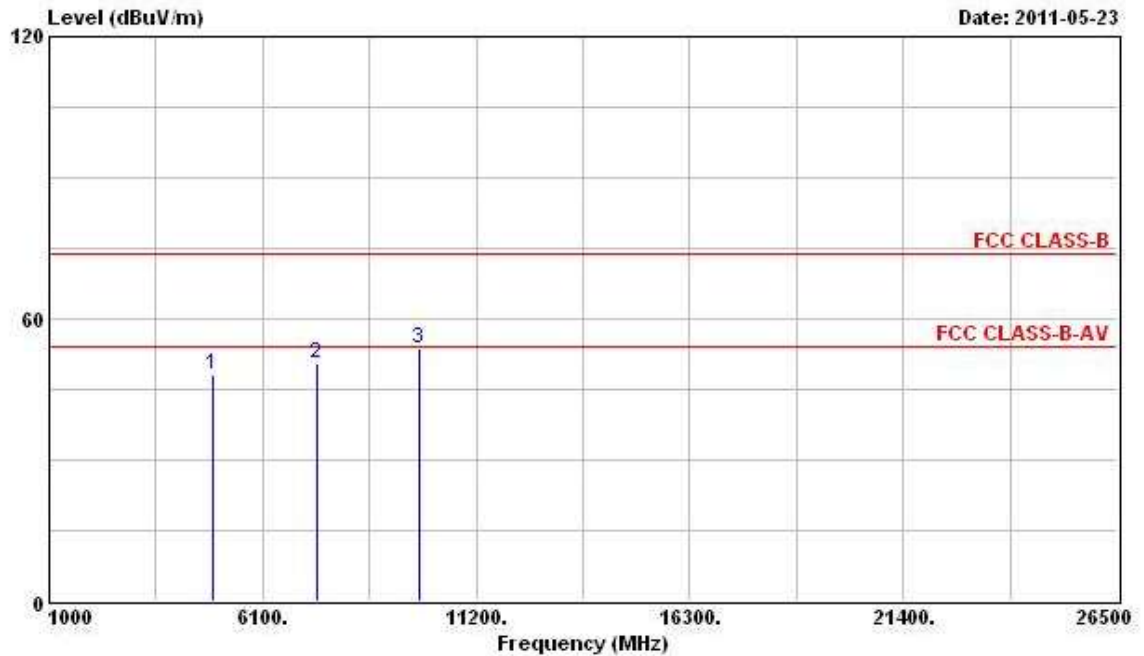Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4924.000	48.22	-5.78	54.00	42.16	33.26	5.41	32.61 PK
2	7386.000	50.67	-3.33	54.00	42.15	35.87	5.57	32.92 PK
3	9848.000	53.88			41.62	38.79	6.80	33.33 Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

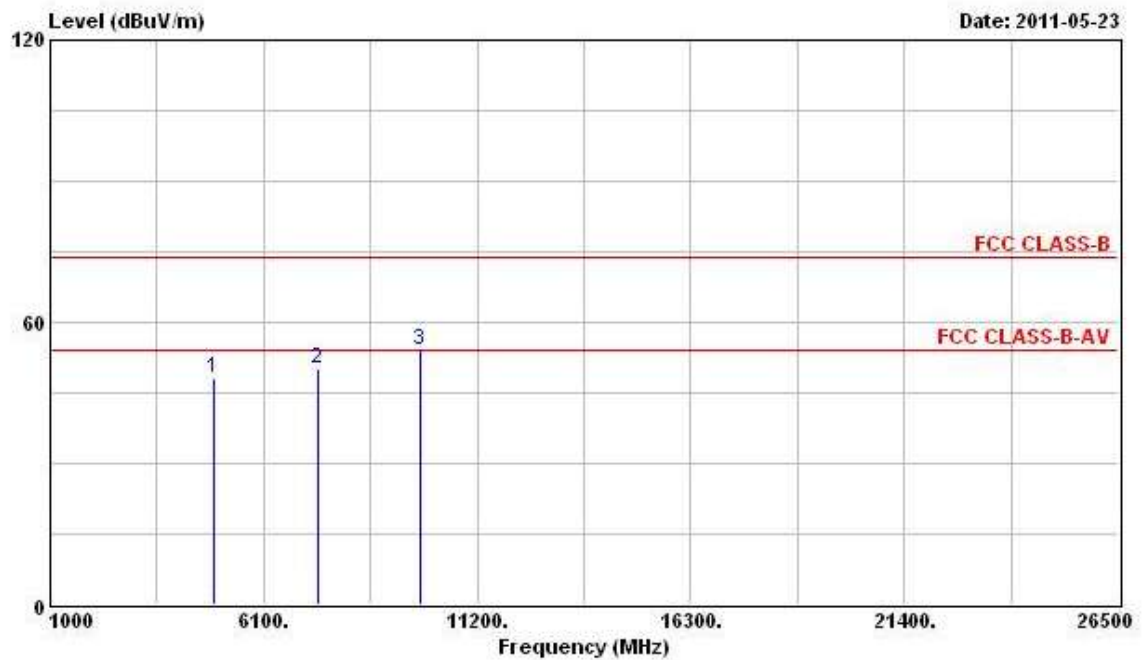

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4924.000	48.19	-5.81	54.00	42.13	33.26	5.41	32.61 PK
2	7386.000	50.08	-3.92	54.00	41.56	35.87	5.57	32.92 PK
3	9848.000	54.07			41.81	38.79	6.80	33.33 Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11n Ch. 1 (20MHz)

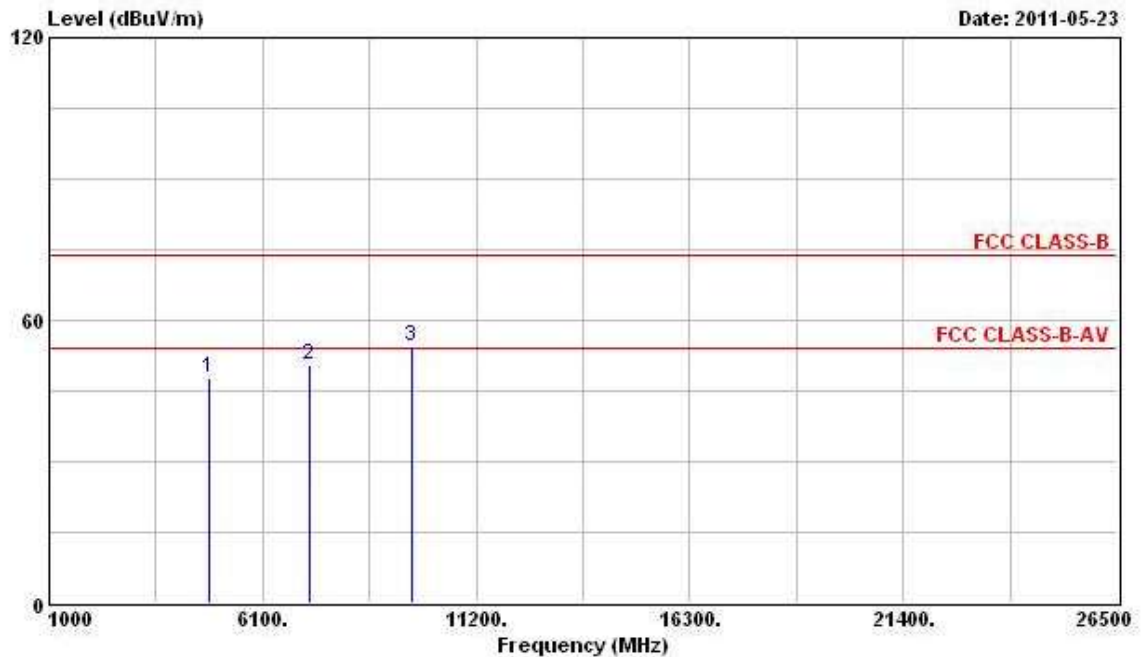Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4824.000	47.74	-6.26	54.00	41.88	33.06	5.43	32.63 PK
2	7236.000	50.36			42.57	35.53	5.14	32.89 Peak
3	9648.000	54.40			42.63	38.41	6.70	33.34 Peak

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

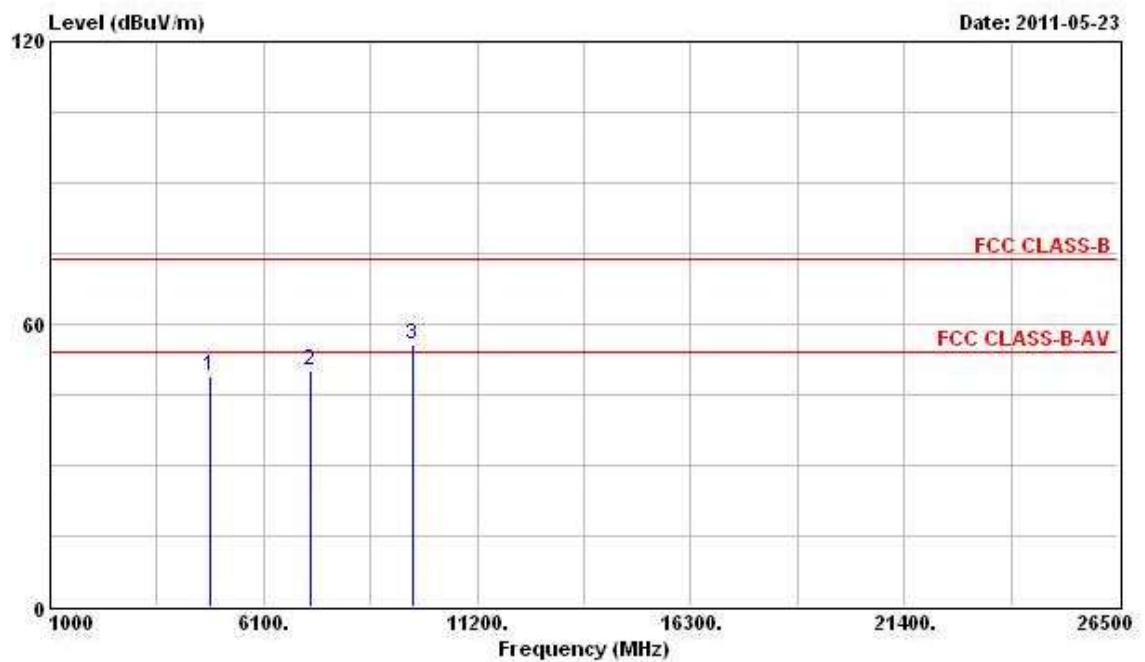

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
			Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4824.000	48.84	-5.16	54.00	42.98	33.06	5.43	32.63 PK
2	7236.000	50.06			42.27	35.53	5.14	32.89 Peak
3	9648.000	55.52			43.75	38.41	6.70	33.34 Peak

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11n Ch. 6 (20MHz)

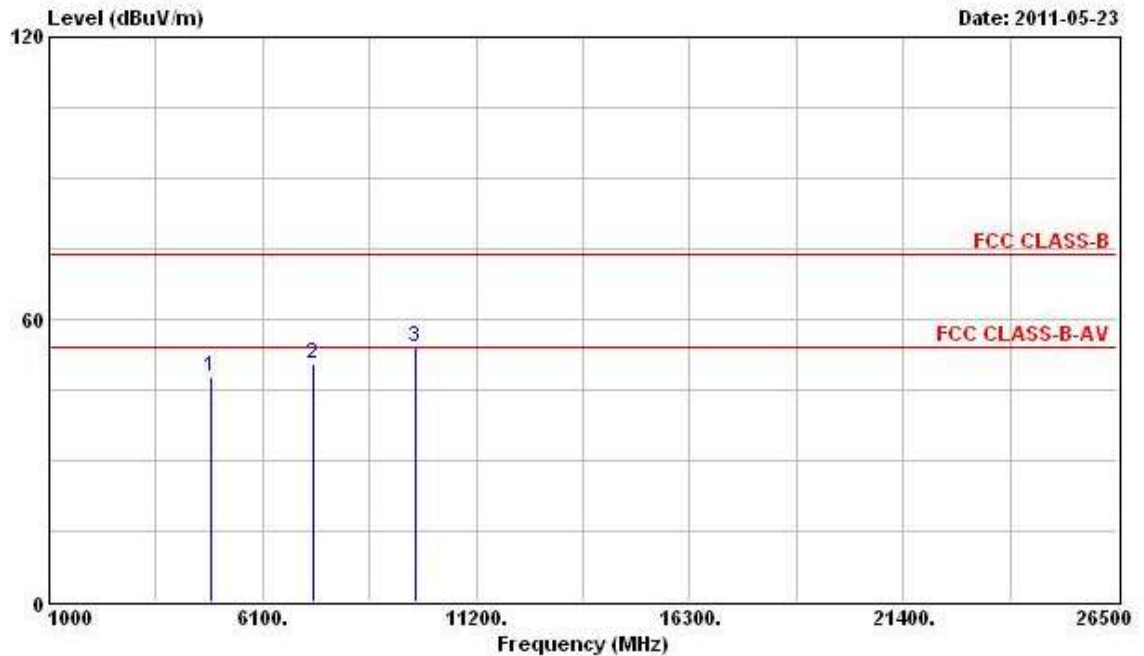Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4874.000	47.59	-6.41	54.00	41.63	33.16	5.43	32.62 PK
2	7311.000	50.65	-3.35	54.00	42.51	35.68	5.36	32.90 PK
3	9748.000	54.21			42.19	38.62	6.74	33.34 Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

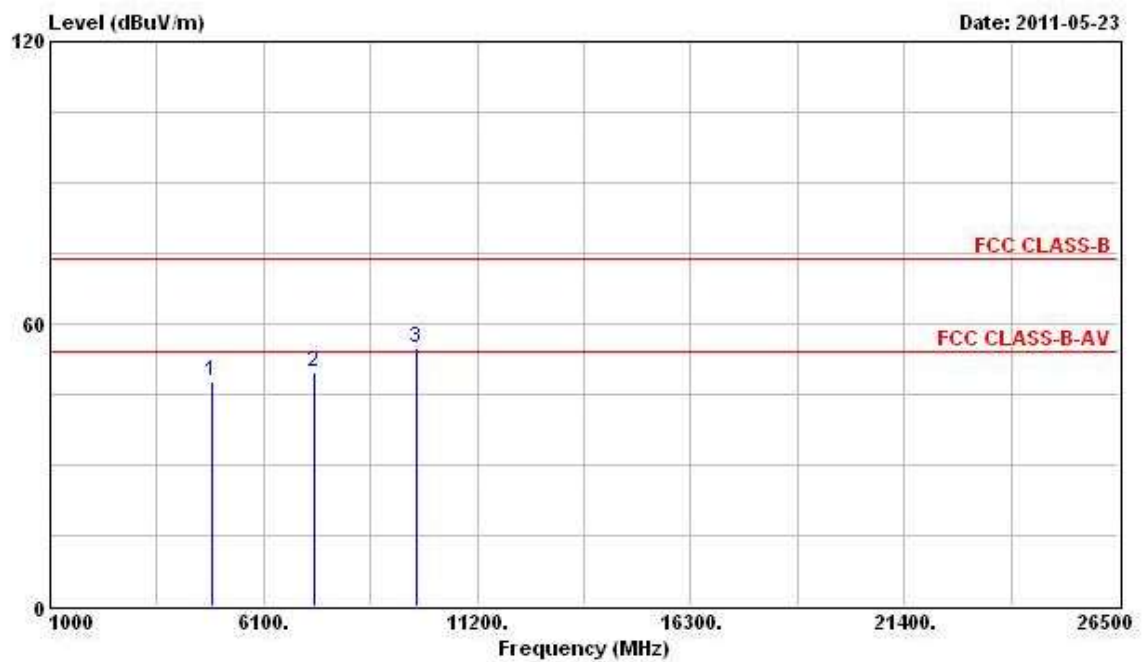

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	47.91	-6.09	54.00	41.95	33.16	5.43	32.62	PK
2	7311.000	49.84	-4.16	54.00	41.70	35.68	5.36	32.90	PK
3	9748.000	55.02			43.00	38.62	6.74	33.34	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11n Ch. 11 (20MHz)

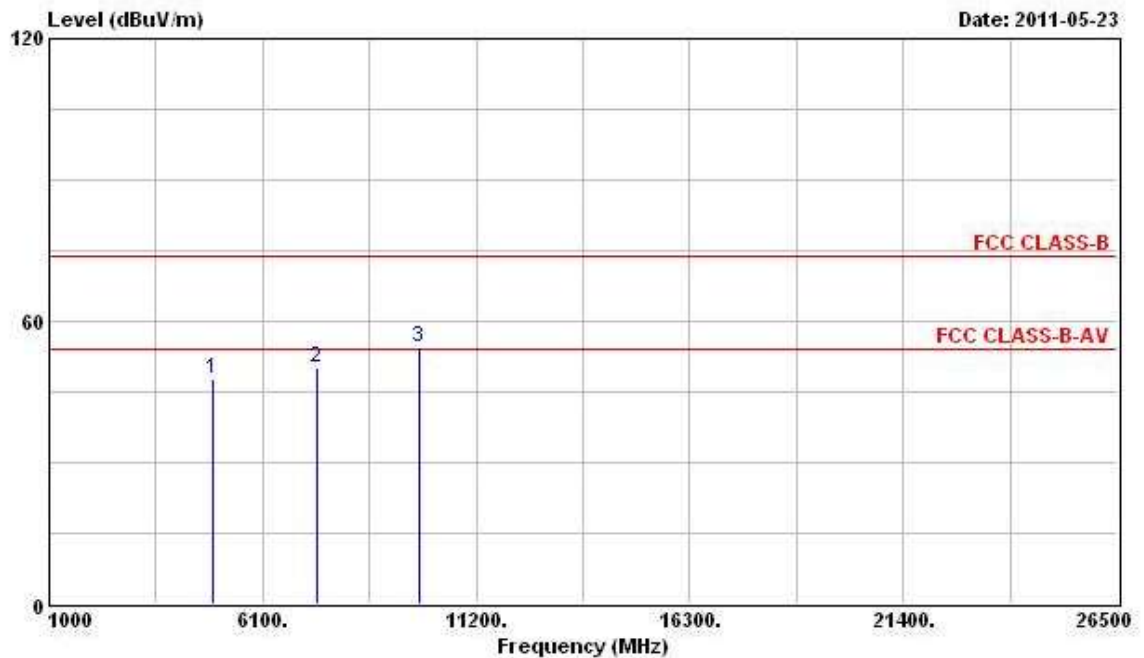Horizontal

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
			Limit	Line	Level	Factor	Loss	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1 @	4924.000	47.90	-6.10	54.00	41.84	33.26	5.41	32.61 PK
2 @	7386.000	50.26	-3.74	54.00	41.74	35.87	5.57	32.92 PK
3	9848.000	54.54			42.28	38.79	6.80	33.33 Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

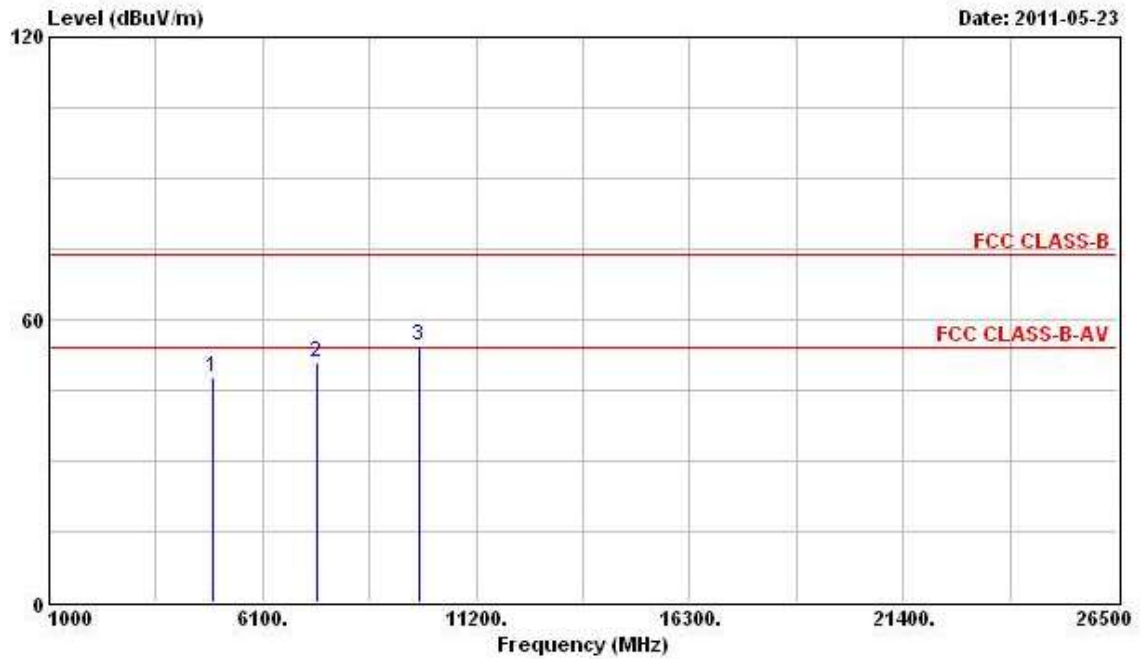

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4924.000	47.60	-6.40	54.00	41.54	33.26	5.41	32.61 PK
2	7386.000	50.95	-3.05	54.00	42.43	35.87	5.57	32.92 PK
3	9848.000	54.50			42.24	38.79	6.80	33.33 Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	May 24, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11n Ch. 3 (40MHz)

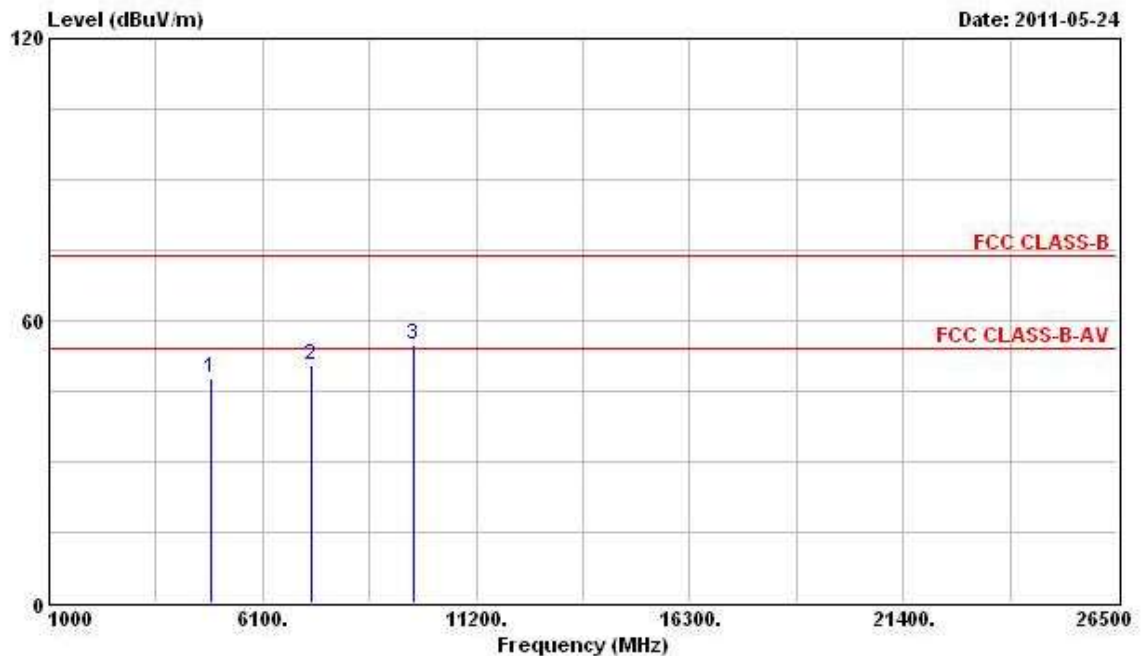Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	4844.000	47.73	-6.27	54.00	41.84	33.09	5.43	32.63	PK
2 @	7266.000	50.43	-3.57	54.00	42.47	35.61	5.25	32.89	PK
3	9688.000	54.92			43.06	38.48	6.72	33.34	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

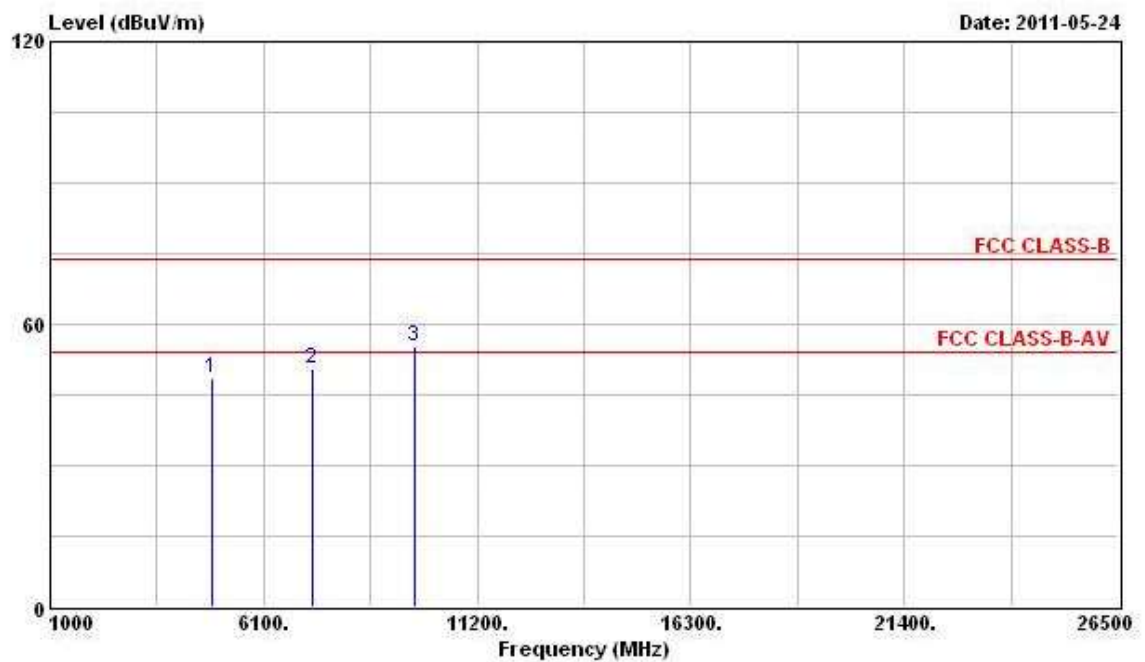

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4844.000	48.58	-5.42	54.00	42.69	33.09	5.43	32.63	PK
2	7266.000	50.57	-3.43	54.00	42.61	35.61	5.25	32.89	PK
3	9688.000	55.41			43.55	38.48	6.72	33.34	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	May 24, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11n Ch. 6 (40MHz)

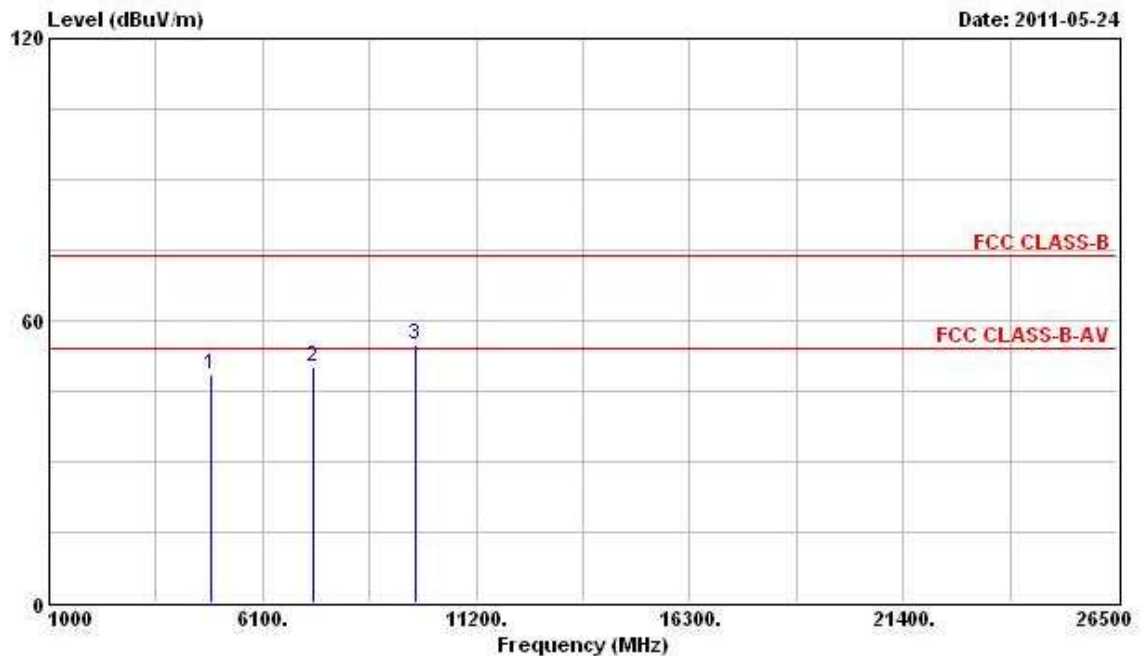Horizontal

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	4874.000	48.52	-5.48	54.00	42.56	33.16	5.43	32.62	PK
2 @	7311.000	50.23	-3.77	54.00	42.09	35.68	5.36	32.90	PK
3	9748.000	54.70			42.68	38.62	6.74	33.34	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Vertical

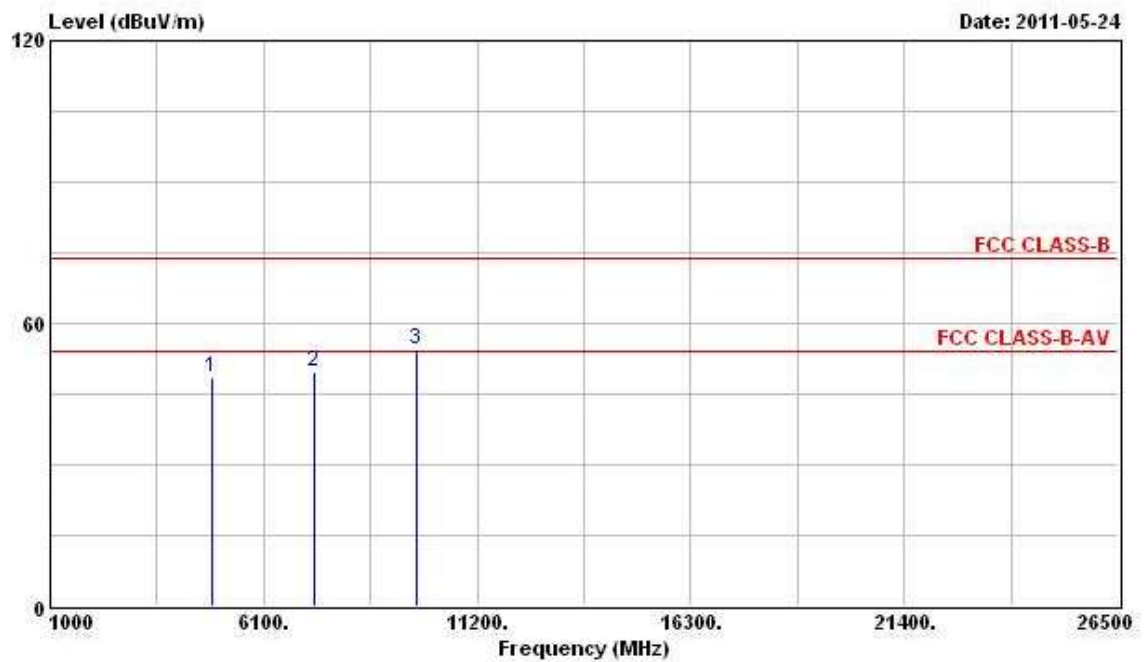

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4874.000	48.46	-5.54	54.00	42.50	33.16	5.43	32.62	PK
2	7311.000	49.60	-4.40	54.00	41.46	35.68	5.36	32.90	PK
3	9748.000	54.41			42.39	38.62	6.74	33.34	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).


Final Test Date	May 24, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11n Ch. 9 (40MHz)

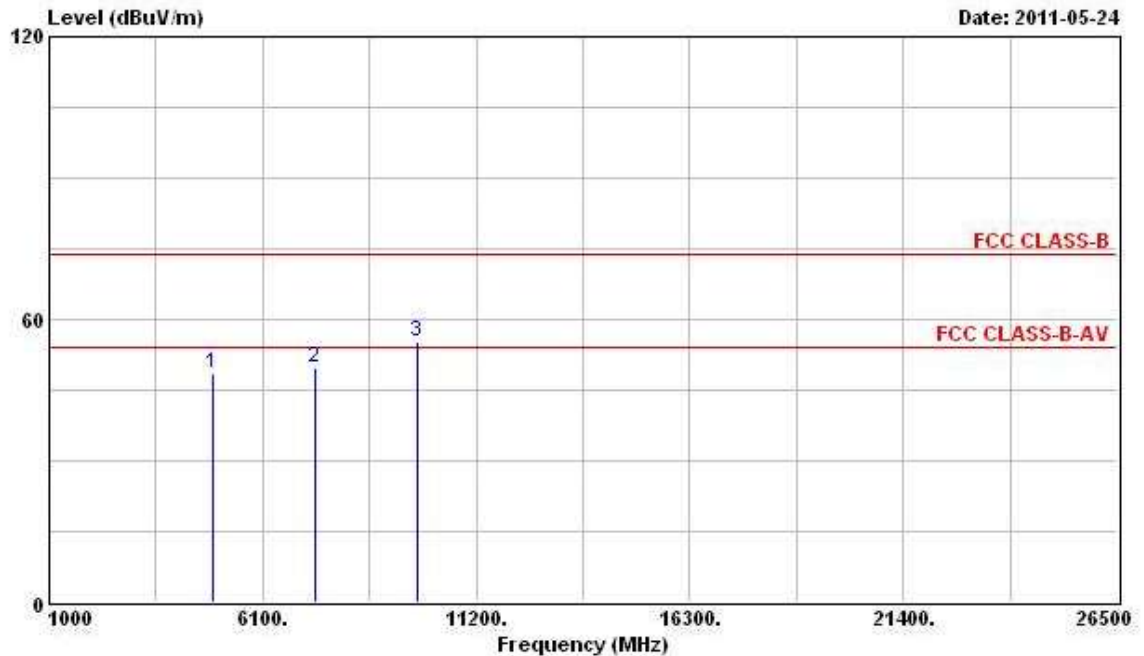Horizontal

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
			Limit	Line	Level	Factor	Loss	Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1 @	4904.000	48.60	-5.40	54.00	42.57	33.23	5.42	32.62 PK
2 @	7356.000	49.58	-4.42	54.00	41.24	35.80	5.46	32.92 PK
3	9808.000	55.32			43.15	38.72	6.78	33.33 Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).

Vertical

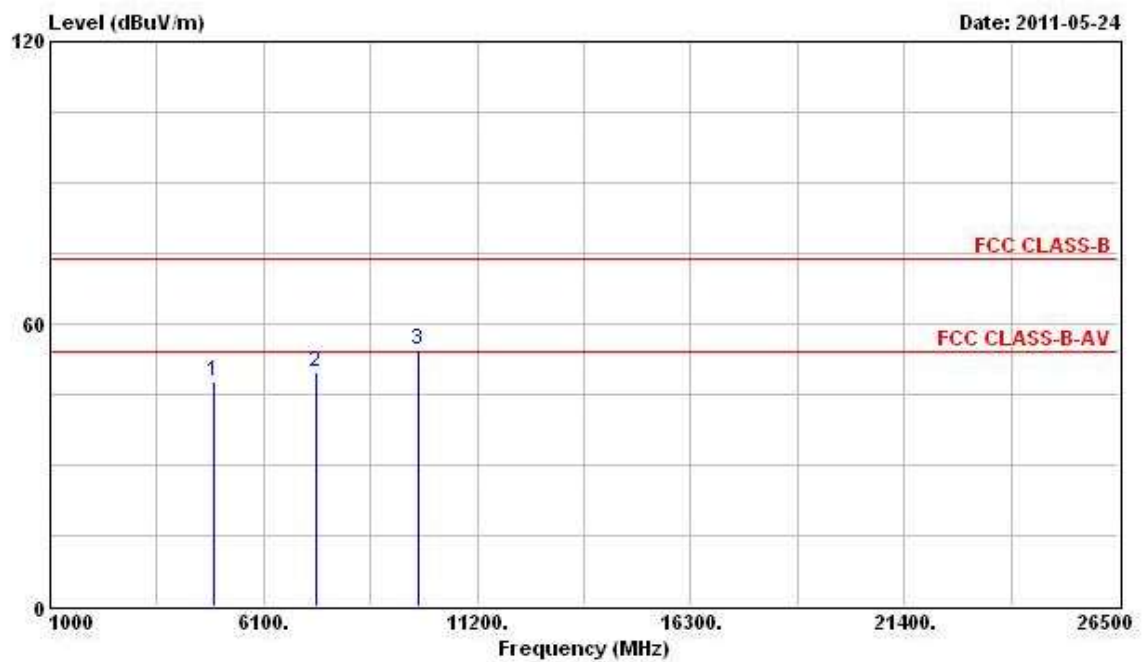

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4904.000	47.94	-6.06	54.00	41.91	33.23	5.42	32.62	PK
2	7356.000	49.90	-4.10	54.00	41.56	35.80	5.46	32.92	PK
3	9808.000	54.47			42.30	38.72	6.78	33.33	Peak

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.3.7).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.3 Band Edge and Fundamental Emissions Measurement

3.3.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.3.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	11MHz / 1MHz for Peak

3.3.3 Test Procedures

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.3.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.5.4.

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of Band Edge and Fundamental Emissions

Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11b Ch. 1, 6, 11

Channel 1

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 ☺	2390.000	63.13	-10.87	74.00	30.34	28.13	4.65	0.00	Peak
2 ☺	2412.980	115.53			82.72	28.16	4.65	0.00	Peak
1 ☺	2390.000	49.52	-4.48	54.00	16.73	28.13	4.65	0.00	Average
2 ☺	2413.930	107.20			74.39	28.16	4.65	0.00	Average

The item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 ☺	2435.970	115.48			82.58	28.19	4.71	0.00	Peak
1 ☺	2436.540	107.31			74.38	28.22	4.71	0.00	Average

The item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Limit	Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 ☺	2463.140	110.96	-----	-----	77.95	28.24	4.77	0.00	Peak
2	2488.220	60.35	-13.65	74.00	27.28	28.30	4.77	0.00	Peak
1 ☺	2463.330	102.56			69.55	28.24	4.77	0.00	Average
2 ☺	2483.660	46.48	-7.52	54.00	13.44	28.27	4.77	0.00	Average

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11g Ch. 1, 6, 11

Channel 1

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2390.000	70.28	-3.72	74.00	37.49	28.13	4.65	0.00	Peak
2 @	2416.970	113.23			80.42	28.16	4.65	0.00	Peak
1 @	2390.000	49.55	-4.45	54.00	16.76	28.13	4.65	0.00	Average
2 @	2413.930	101.60			68.79	28.16	4.65	0.00	Average

The item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2439.770	111.34			78.41	28.22	4.71	0.00	Peak
1 @	2435.210	99.62			66.72	28.19	4.71	0.00	Average

The item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2467.130	107.26			74.25	28.24	4.77	0.00	Peak
2	2495.820	59.32	-14.68	74.00	26.25	28.30	4.77	0.00	Peak
1 @	2463.900	95.81			62.80	28.24	4.77	0.00	Average
2 @	2483.500	45.91	-8.09	54.00	12.87	28.27	4.77	0.00	Average

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11n Ch. 1, 6, 11 (20MHz)

Channel 1

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2358.260	60.54	-13.46	74.00	27.87	28.08	4.59	0.00	Peak
2 ☺	2415.260	108.74			75.93	28.16	4.65	0.00	Peak
1 ☺	2359.970	48.02	-5.98	54.00	15.35	28.08	4.59	0.00	Average
2 ☺	2414.690	97.98			65.17	28.16	4.65	0.00	Average

The item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 ☺	2435.020	110.22			77.32	28.19	4.71	0.00	Peak
1 ☺	2433.690	99.27			66.37	28.19	4.71	0.00	Average

The item 1 is Fundamental Emissions.

Channel 11

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 ☺	2463.900	106.34			73.33	28.24	4.77	0.00	Peak
2	2492.210	59.37	-14.63	74.00	26.30	28.30	4.77	0.00	Peak
1 ☺	2463.900	95.55			62.54	28.24	4.77	0.00	Average
2 ☺	2483.660	46.10	-7.90	54.00	13.06	28.27	4.77	0.00	Average

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	May 23, 2011	Test Site No.	03CH03-HY
Temperature	25°C	Humidity	55%
Test Engineer	Streak	Configuration	802.11n Ch. 3, 6, 9 (40MHz)

Channel 3

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 ☐	2390.000	64.69	-9.31	74.00	31.90	28.13	4.65	0.00	Peak
2 ☐	2431.220	104.86			71.96	28.19	4.71	0.00	Peak
1 ☐	2390.000	49.55	-4.45	54.00	16.76	28.13	4.65	0.00	Average
2 ☐	2431.410	94.05			61.15	28.19	4.71	0.00	Average

The item 2 is Fundamental Emissions.

Channel 6

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 ☐	2448.700	103.21			70.28	28.22	4.71	0.00	Peak
1 ☐	2448.700	92.48			59.55	28.22	4.71	0.00	Average

The item 1 is Fundamental Emissions.

Channel 9

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 ☐	2463.330	102.90			69.89	28.24	4.77	0.00	Peak
2 ☐	2486.890	61.10	-12.90	74.00	28.06	28.27	4.77	0.00	Peak
1 ☐	2462.570	92.26			59.25	28.24	4.77	0.00	Average
2 ☐	2484.610	47.97	-6.03	54.00	14.93	28.27	4.77	0.00	Average

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.4 Antenna Requirements

3.4.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.4.2 Antenna Connector Construction

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

4 LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 20, 2011	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99041	9kHz – 30MHz	Mar. 10, 2011	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	May. 04, 2011	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz – 30MHz	Apr. 21, 2011	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 18, 2010	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 25, 2011	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Aug. 02, 2010	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9 kHz - 40 GHz	Nov. 17, 2010	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Oct. 16, 2010	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.13, 2011	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 18, 2011	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 18, 2011	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 29, 2010*	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.

5 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan HsCaing, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou ShCaing, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION


財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate No. : L1190-110111

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 11, 2011

PI, total 24 pages