



Attachment 1 – System Validation Plots

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Head 900 MHz)**DUT: Dipole 900 MHz; Type: D900V2; Serial: 153**

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.941 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (measured) = 2.80 mW/g

Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.4 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 3.58 W/kg

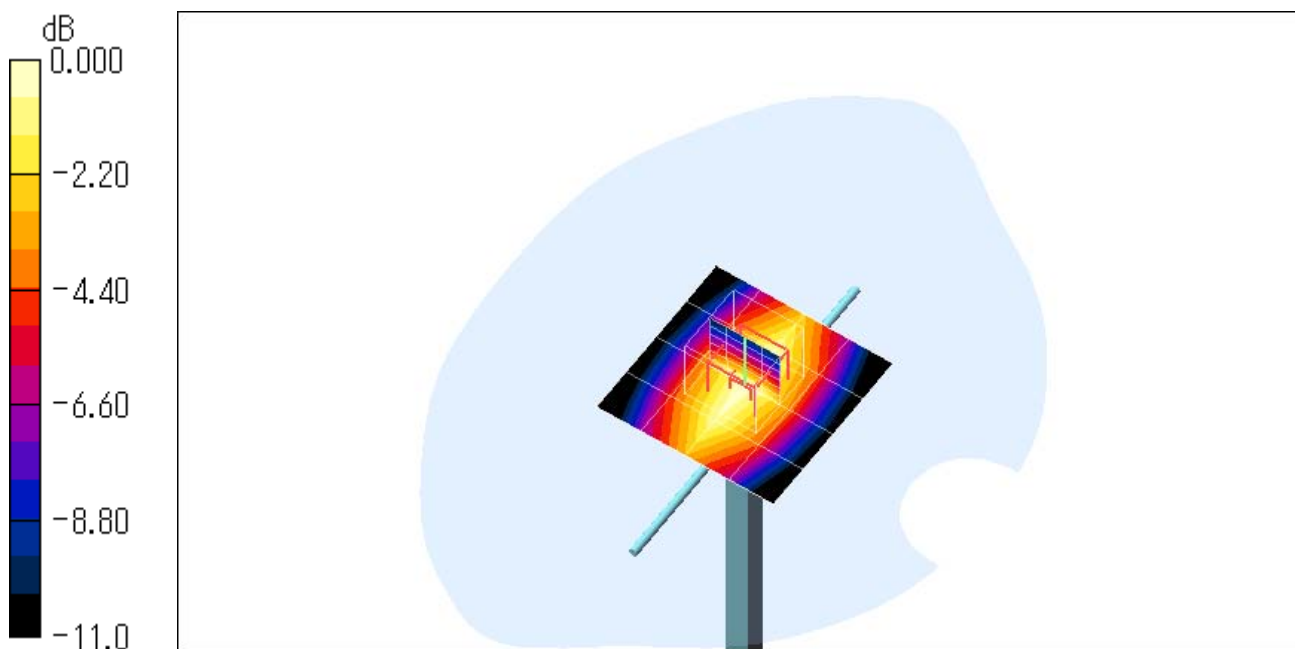SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.67 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Body 900 MHz)**DUT: Dipole 900 MHz; Type: D900V2; Serial: 153**

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.18, 6.18, 6.18); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (measured) = 3.06 mW/g

Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.7 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 3.90 W/kg

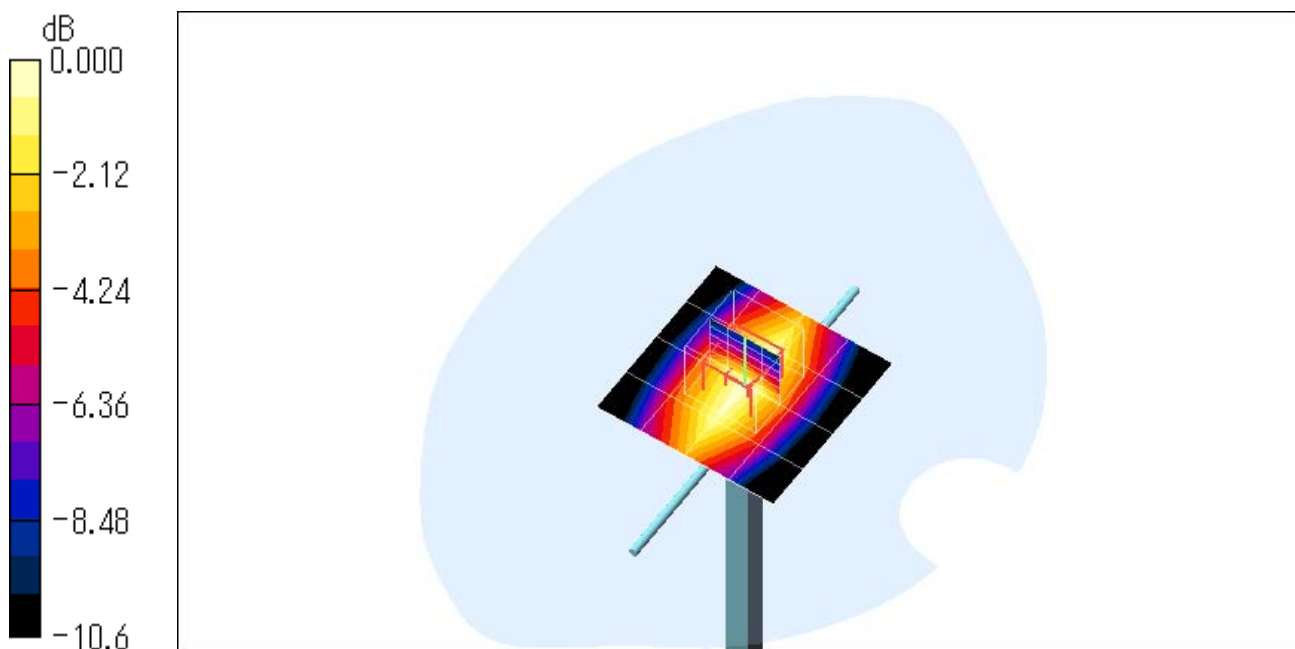SAR(1 g) = 2.81 mW/g; SAR(10 g) = 1.85 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Head 1800 MHz)**DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d038**

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: HSL1800 Medium parameters used: $f = 1800$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: dx=20mm, dy=20mm


Maximum value of SAR (measured) = 10.4 mW/g

Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,

dz=5mm

Reference Value = 92.2 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 16.1 W/kg

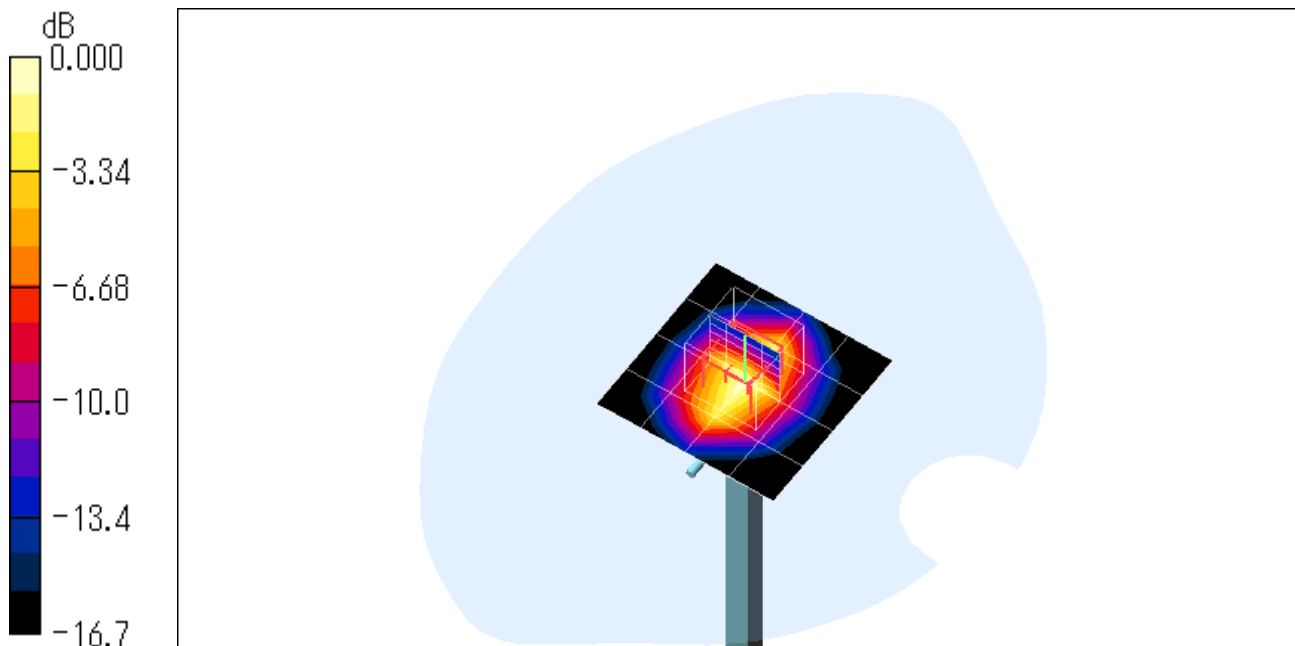SAR(1 g) = 9.26 mW/g; SAR(10 g) = 4.95 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

System Validation (Body 1800 MHz)

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d038

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium: M1800 Medium parameters used: $f = 1800$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.8, 4.8, 4.8); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Antenna Input Power 250 mW/Area Scan (5x5x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 11.0 mW/g

Antenna Input Power 250 mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,


dz=5mm

Reference Value = 91.9 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 15.7 W/kg

SAR(1 g) = 9.69 mW/g; SAR(10 g) = 5.27 mW/g

Maximum value of SAR (measured) = 10.9 mW/g

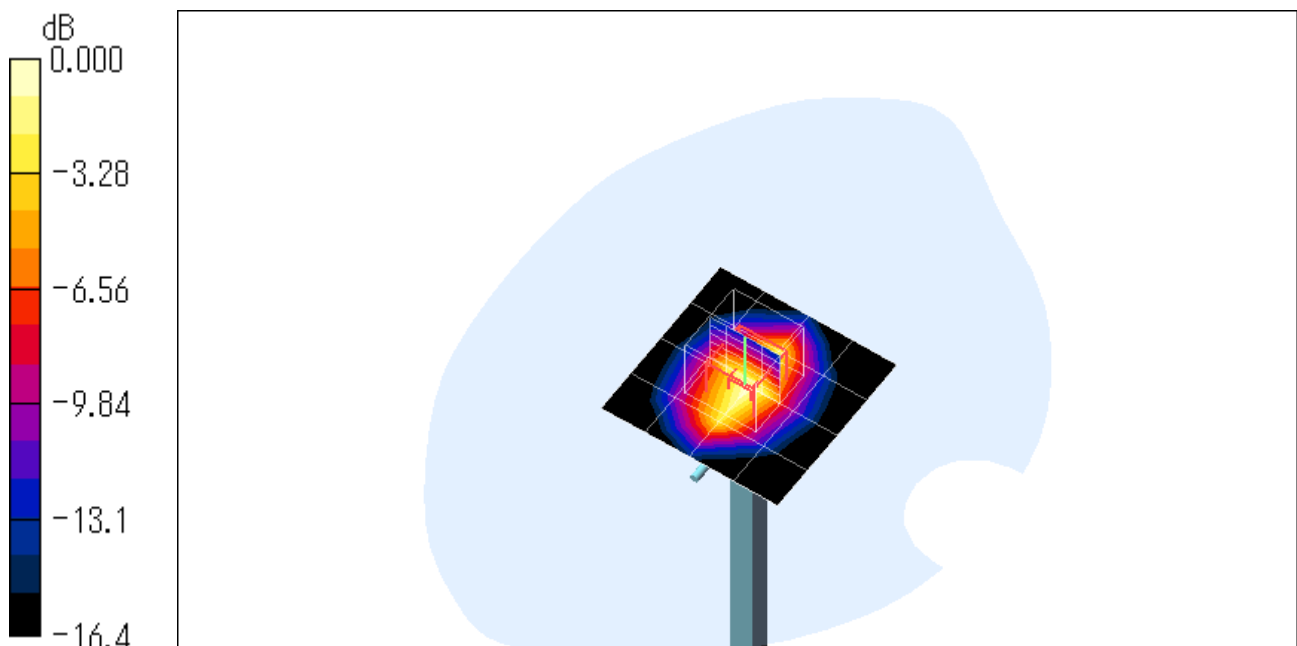

0 dB = 10.9mW/g



Attachment 2-1 – SAR Test Plots (WCDMA 850 MHz)

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 4182ch (836.4MHz) - open style**DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.226 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.333 W/kg

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.247 mW/g

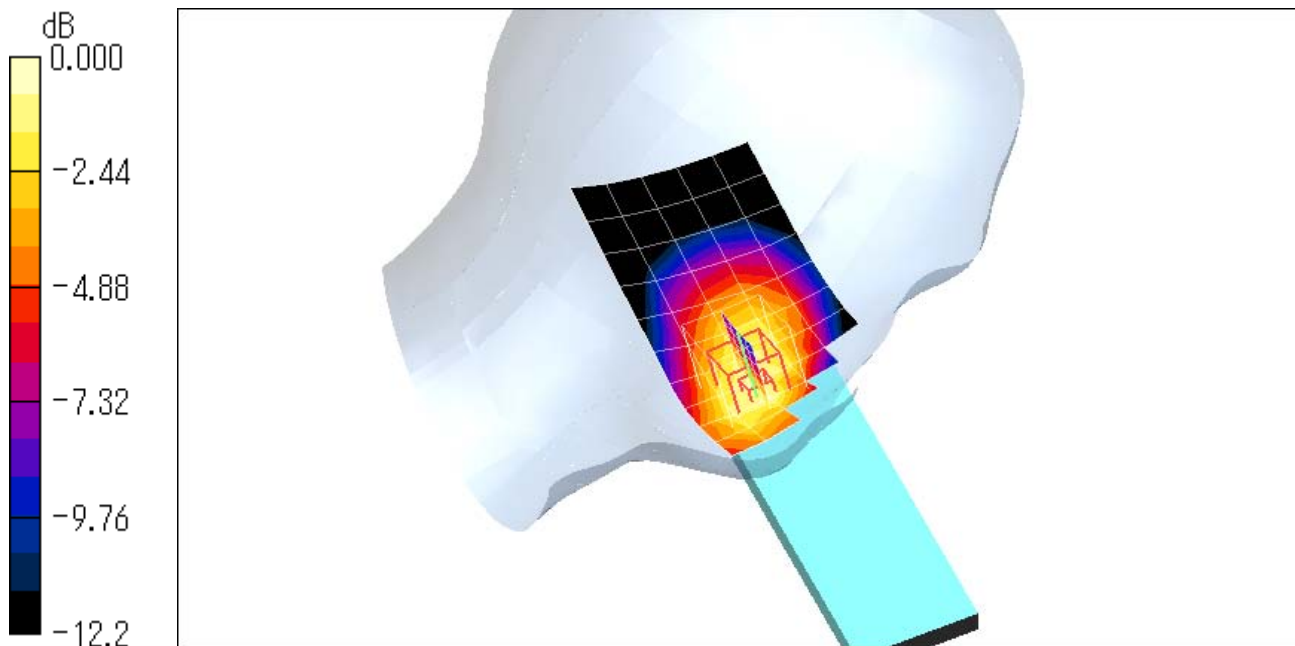

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Ear/Tilt 4182ch (836.4MHz) - open style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.076 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.58 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.086 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.077 mW/g

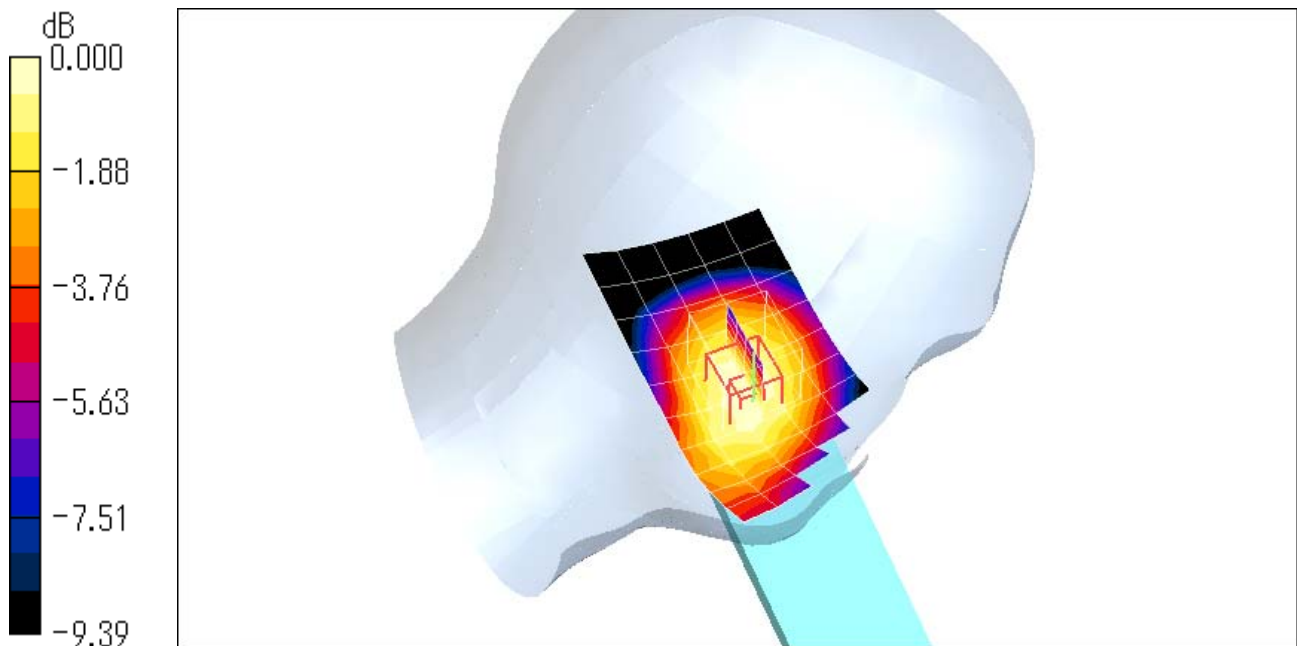

0 dB = 0.077mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4132ch (826.4MHz) - open style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.221 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.7 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.232 mW/g

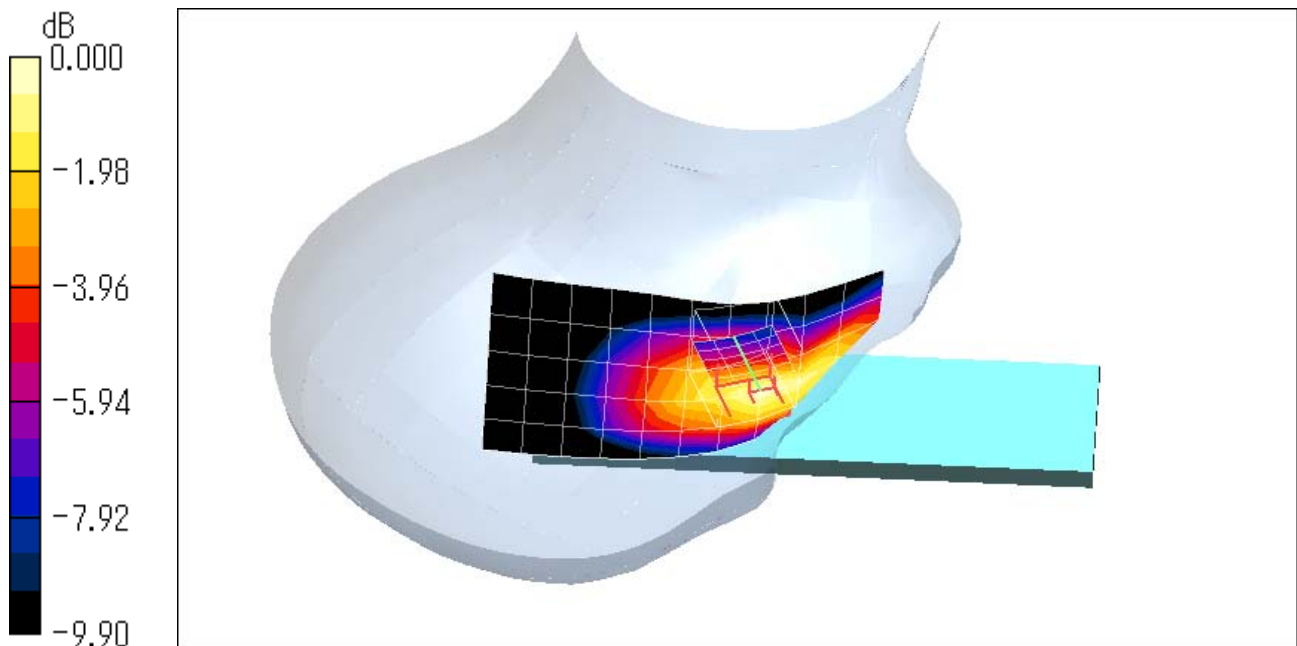

0 dB = 0.232mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4182ch (836.4MHz) - open style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.244 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.9 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.161 mW/g

Maximum value of SAR (measured) = 0.254 mW/g

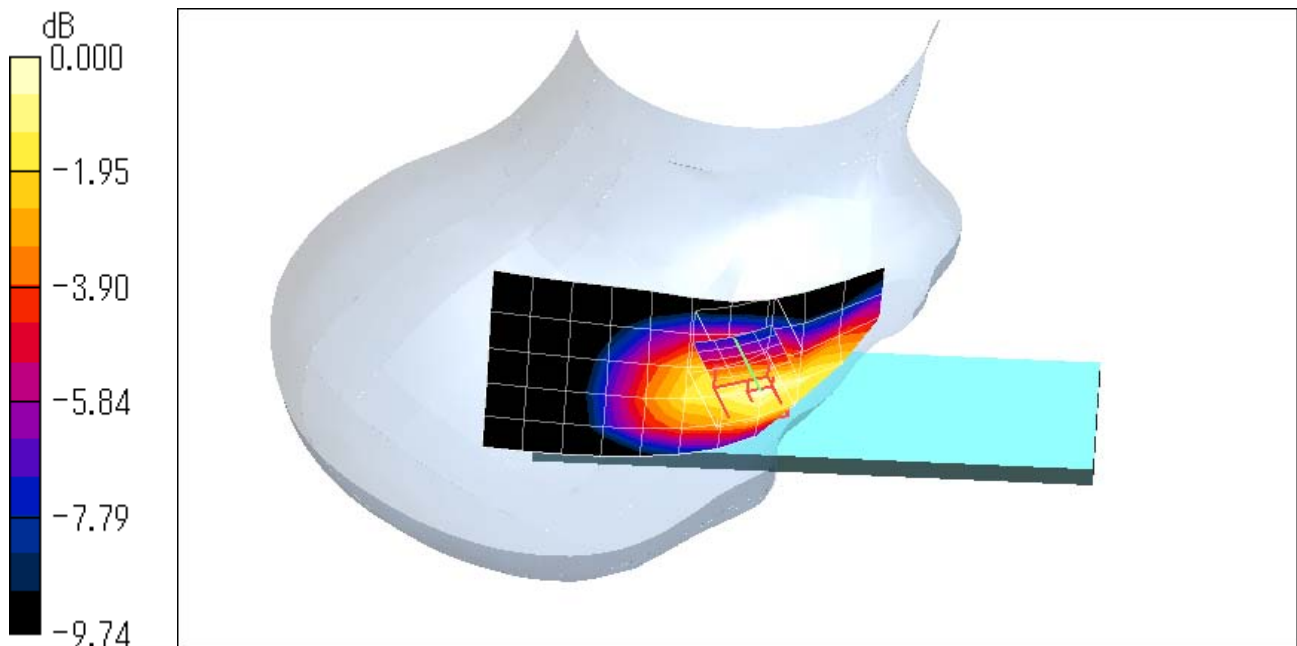

0 dB = 0.254mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4233ch (846.6MHz) - open style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.260 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.3 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.250 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.267 mW/g

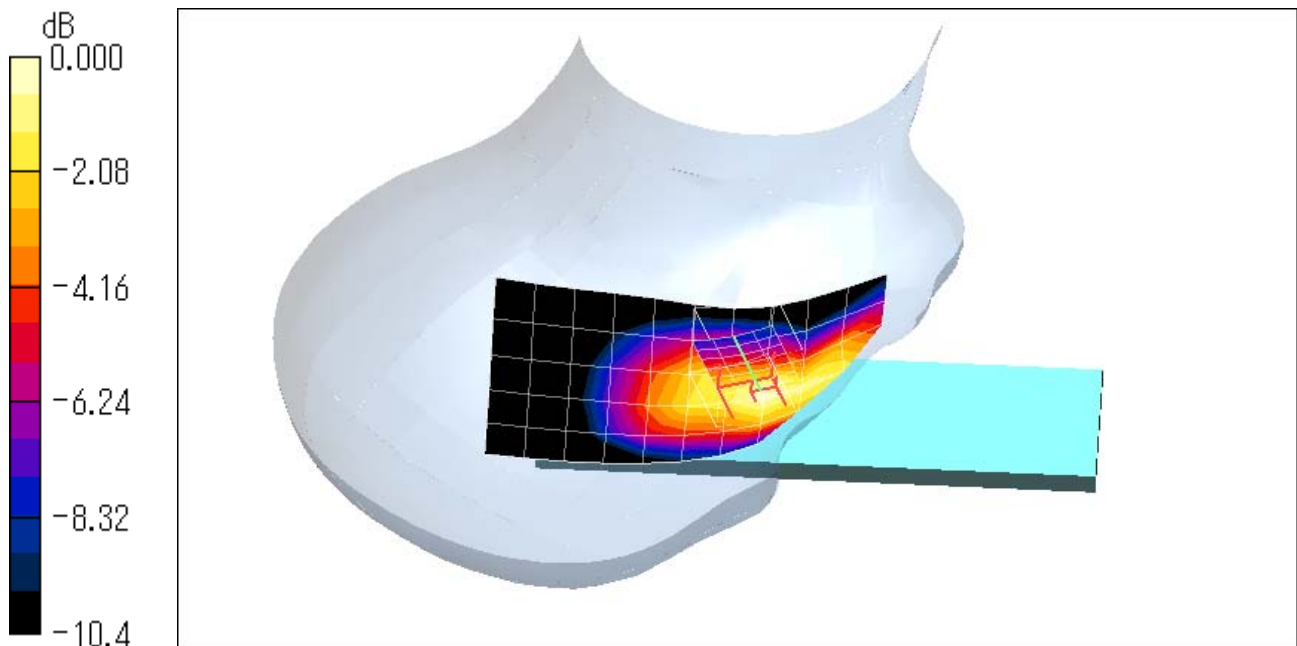

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4233ch (846.6MHz) - open style**DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1


Medium: HSL900 Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

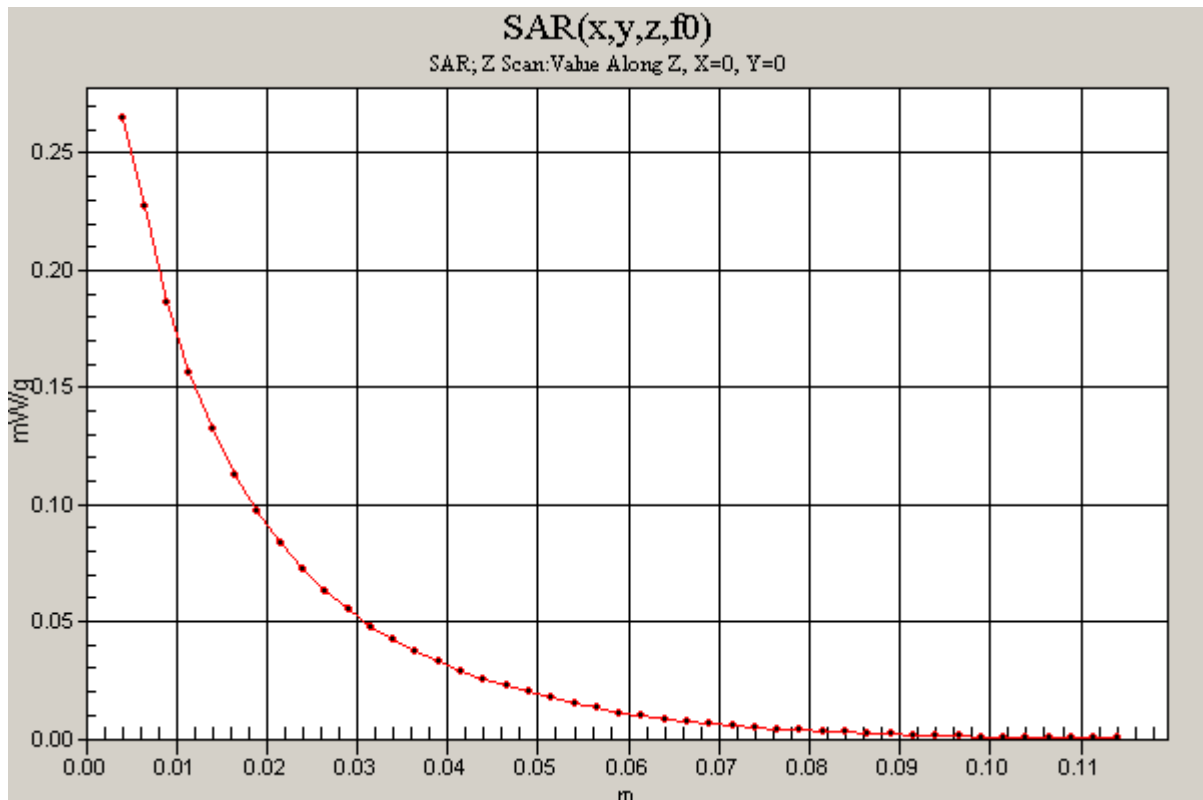Cheek/Touch Position/Z Scan (1x1x45): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm
Maximum value of SAR (measured) = 0.265 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Ear/Tilt 4182ch (836.4MHz) - open style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.085 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.1 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.092 W/kg

SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.083 mW/g

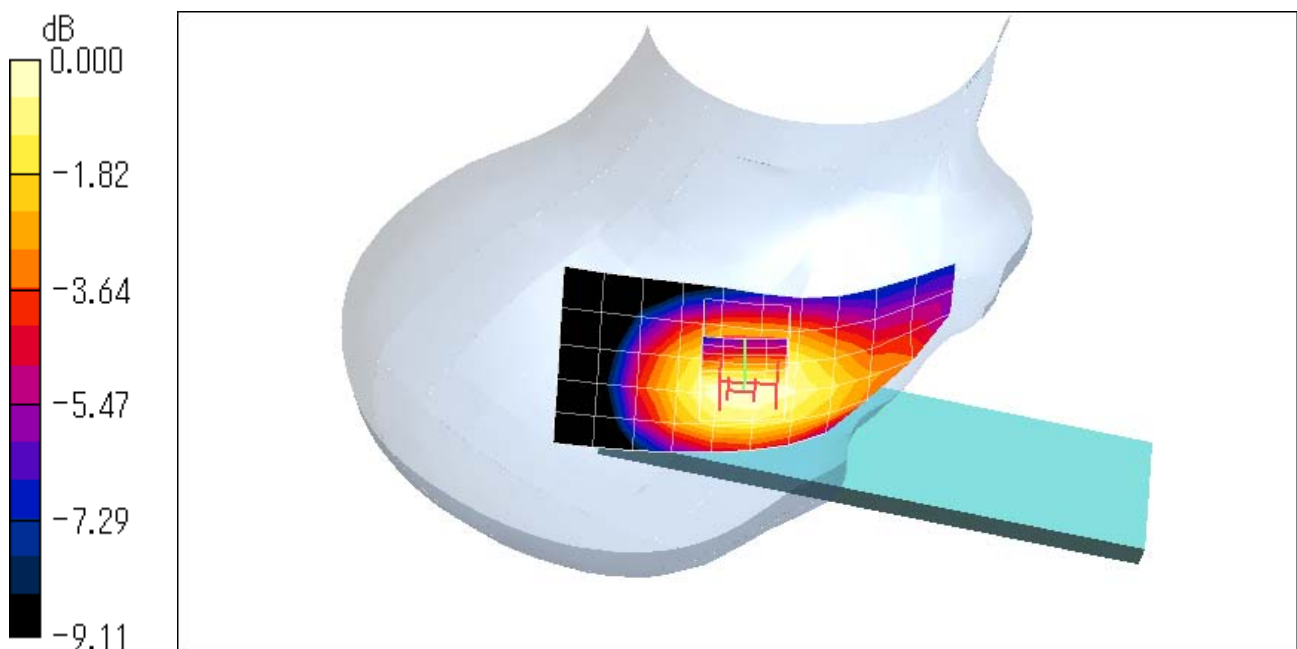

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 4182ch (836.4MHz) - swivel style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (10x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.187 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.7 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.186 mW/g; SAR(10 g) = 0.134 mW/g

Maximum value of SAR (measured) = 0.198 mW/g

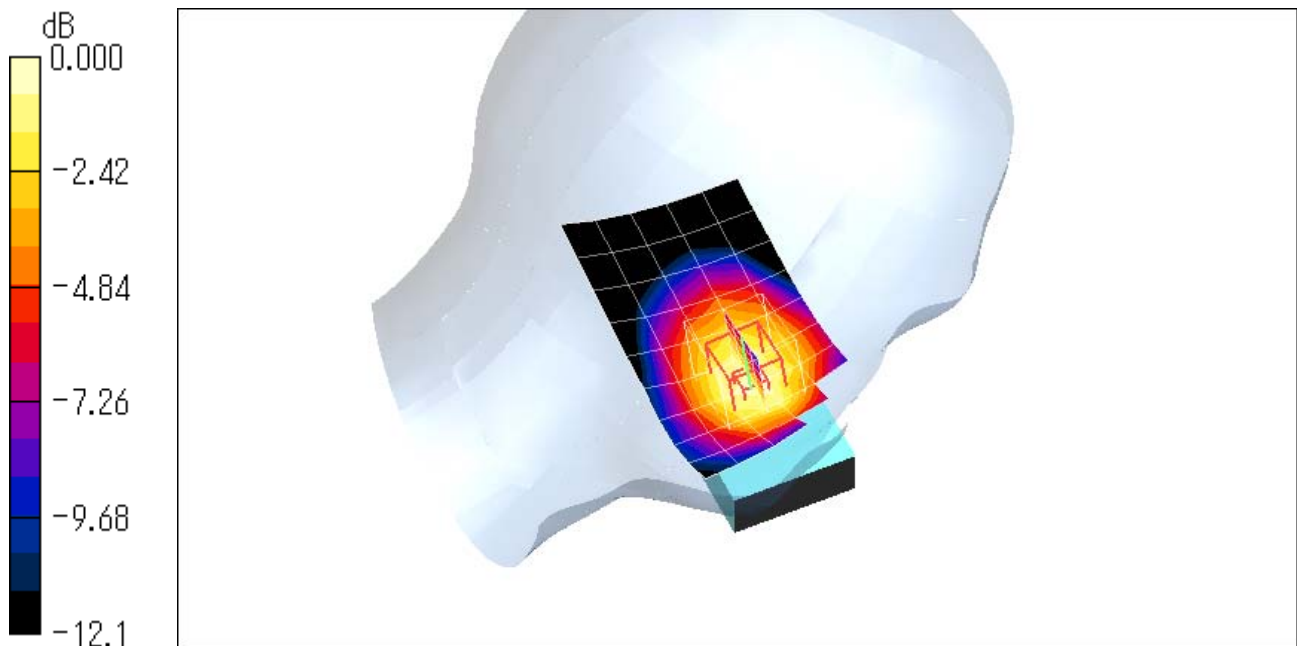

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Ear/Tilt 4182ch (836.4MHz) - swivel style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.118 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.115 mW/g; SAR(10 g) = 0.088 mW/g

Maximum value of SAR (measured) = 0.120 mW/g

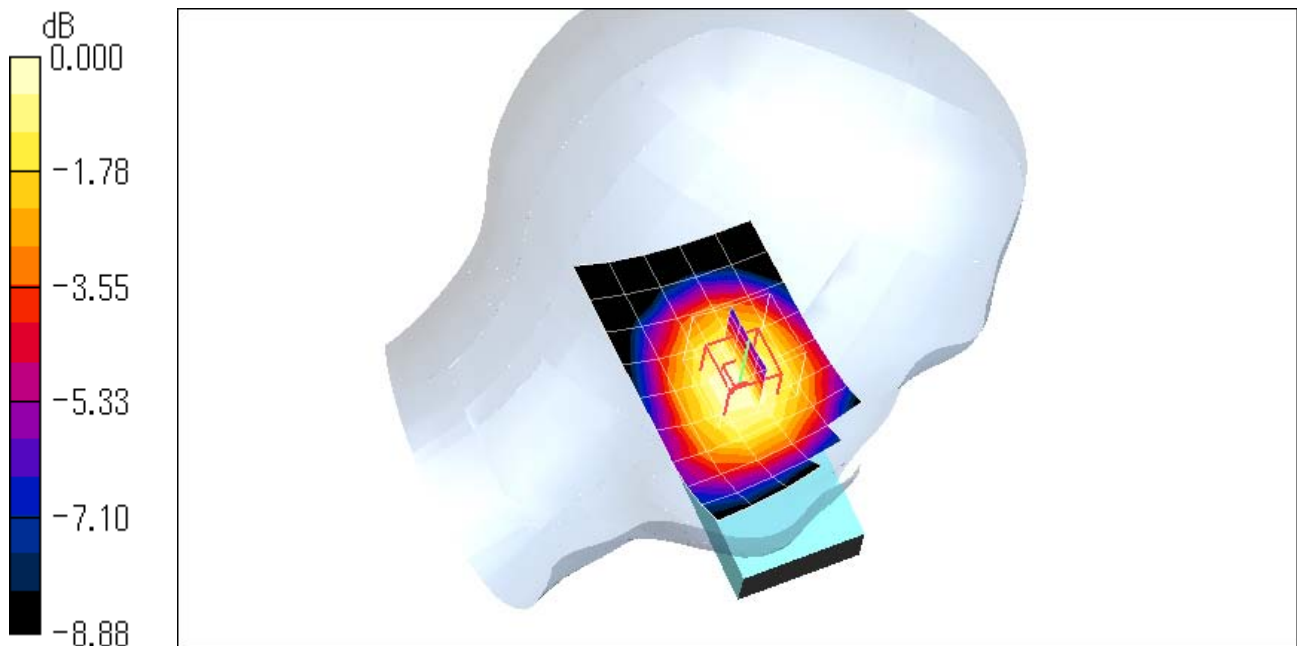

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4182ch (836.4MHz) - swivel style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (10x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.217 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.2 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.230 mW/g

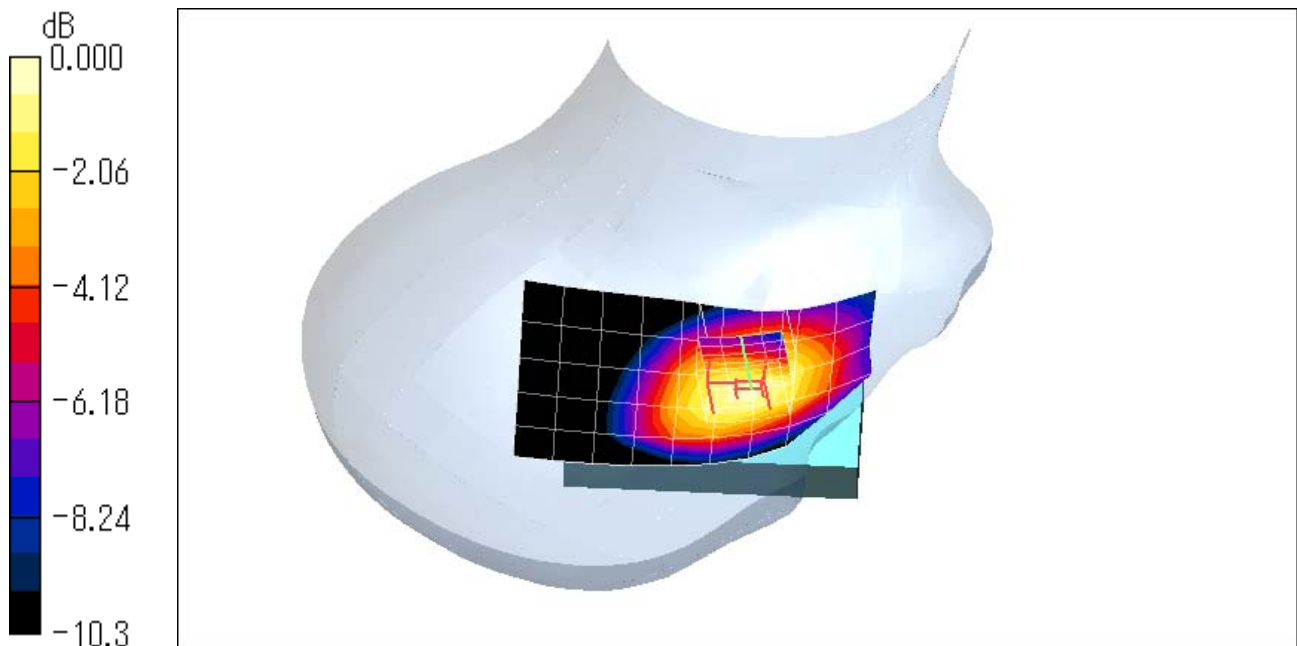

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Ear/Tilt 4182ch (836.4MHz) - swivel style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.888 \text{ mho/m}$; $\epsilon_r = 42.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (10x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.115 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.7 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.127 mW/g

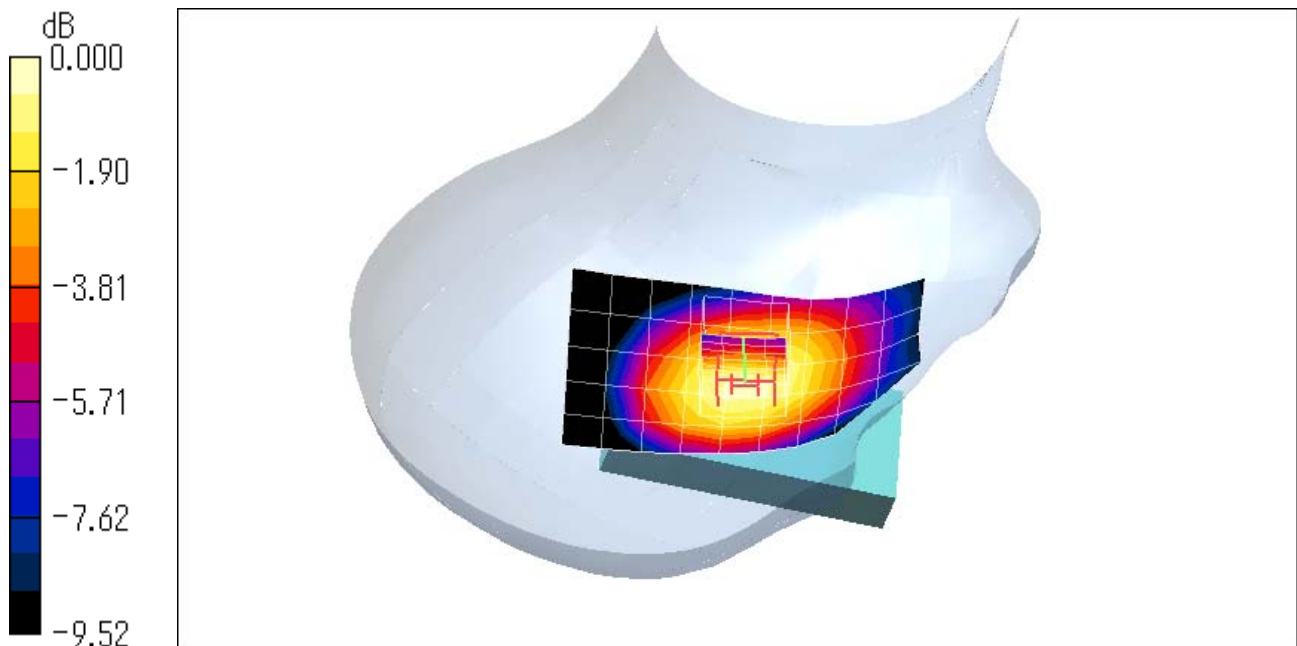

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4132ch (826.4MHz) - close style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.18, 6.18, 6.18); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.333 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.9 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.329 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 0.352 mW/g

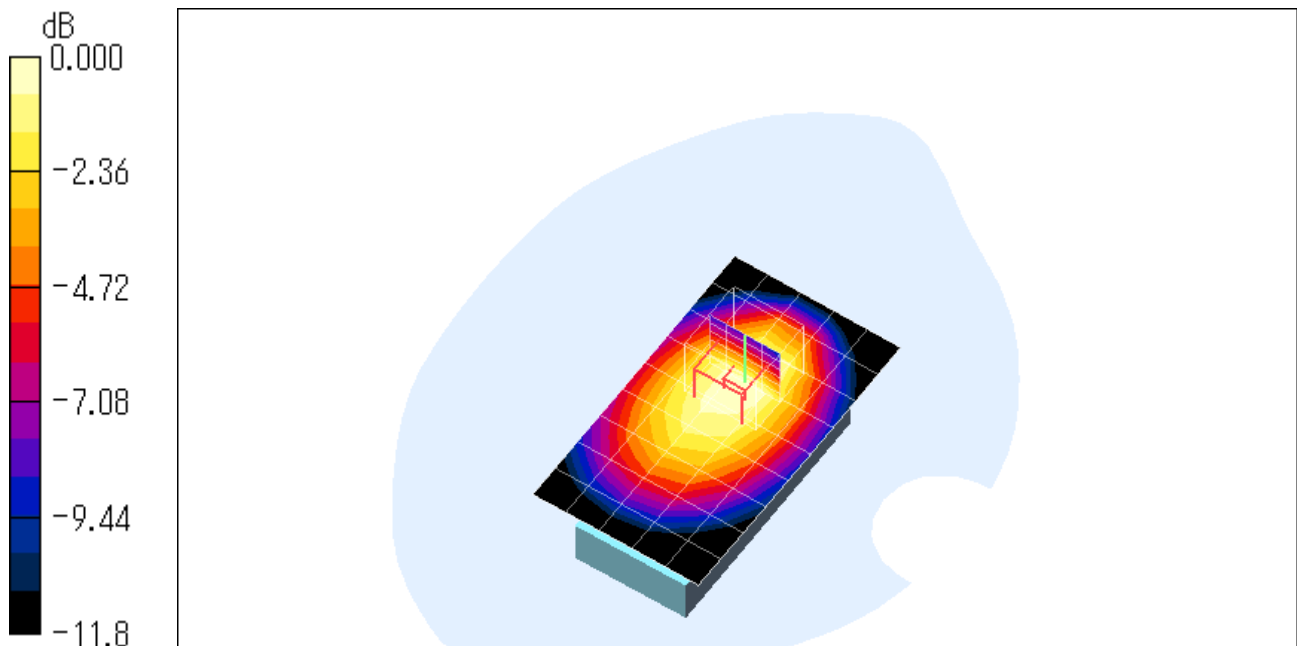

0 dB = 0.352mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4132ch (826.4MHz) - close style**DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section


Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.18, 6.18, 6.18); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Z Scan (1x1x45): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

Maximum value of SAR (measured) = 0.352 mW/g

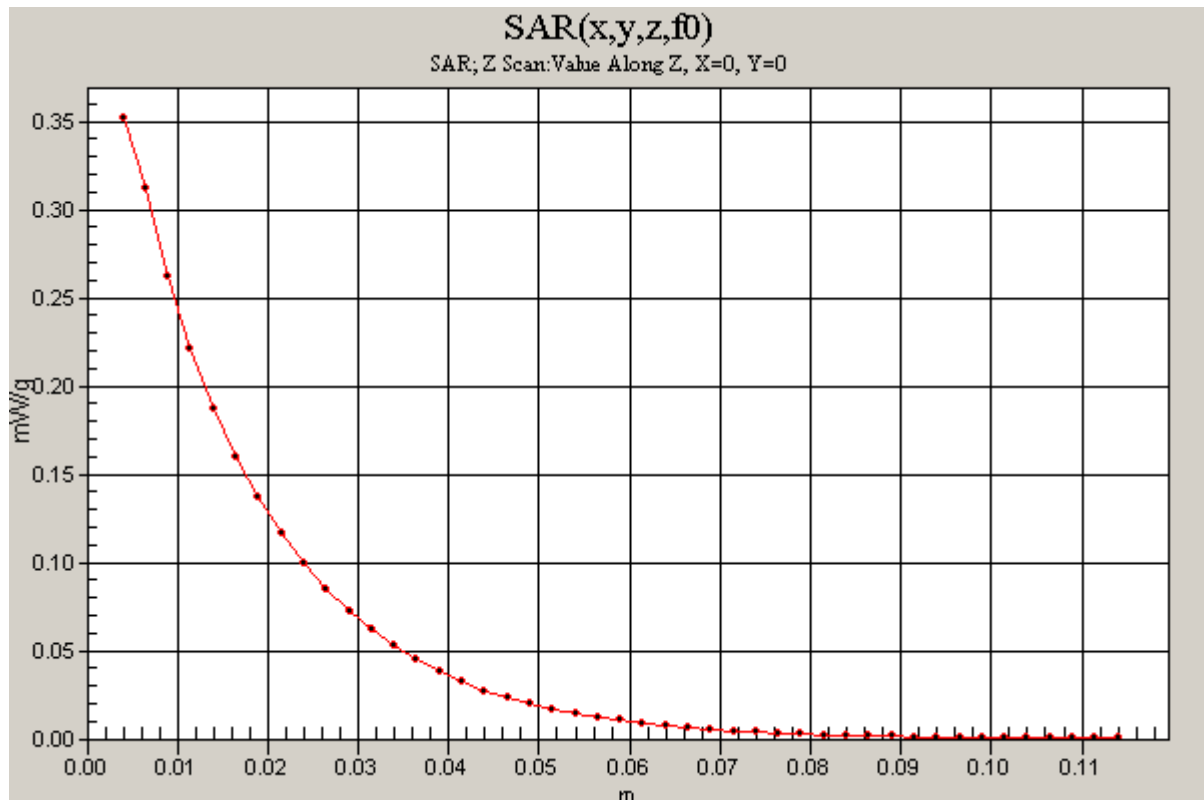

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4182ch (836.4MHz) - close style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.18, 6.18, 6.18); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.316 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.3 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.222 mW/g

Maximum value of SAR (measured) = 0.331 mW/g

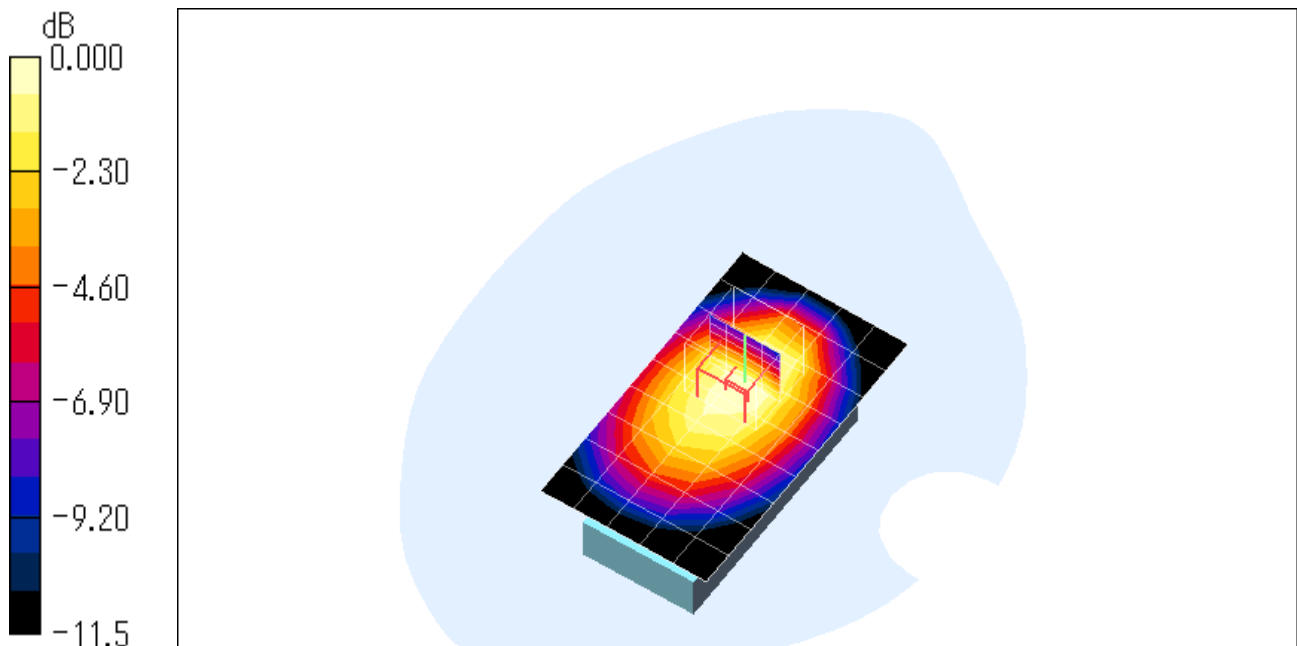

0 dB = 0.331mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4233ch (846.6MHz) - close style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.18, 6.18, 6.18); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.309 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.2 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.330 mW/g

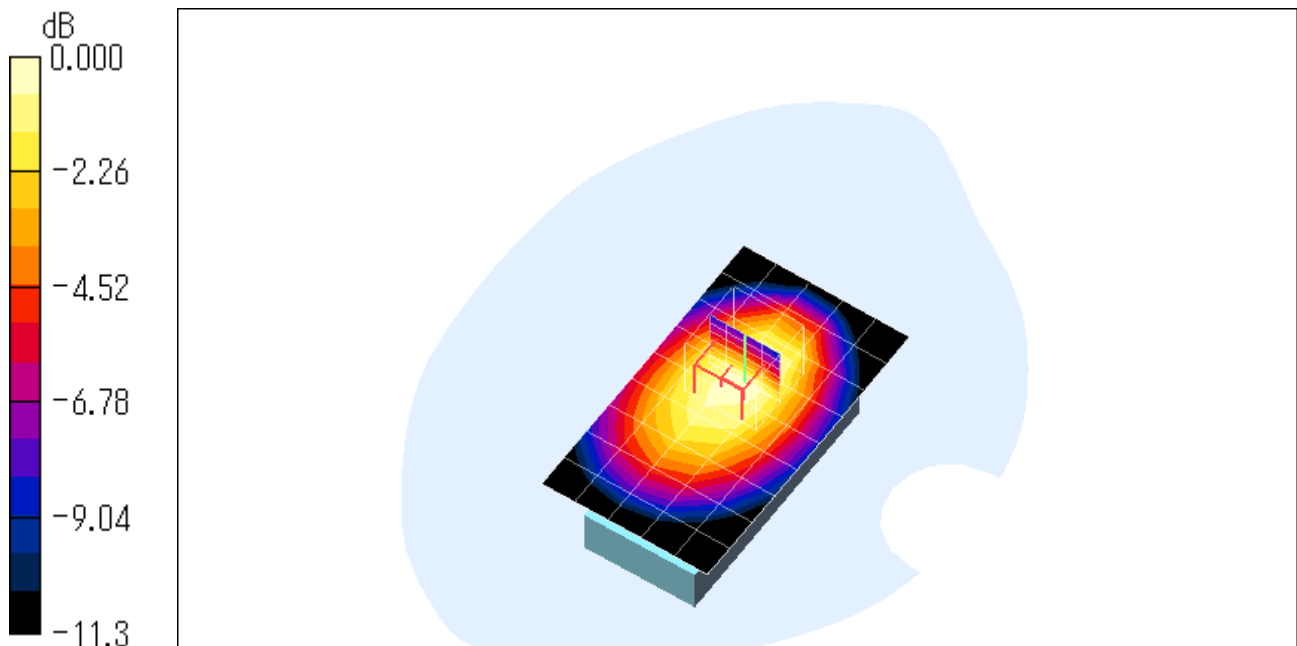

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4182ch (836.4MHz) - viewer style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.18, 6.18, 6.18); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.275 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.7 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.289 mW/g

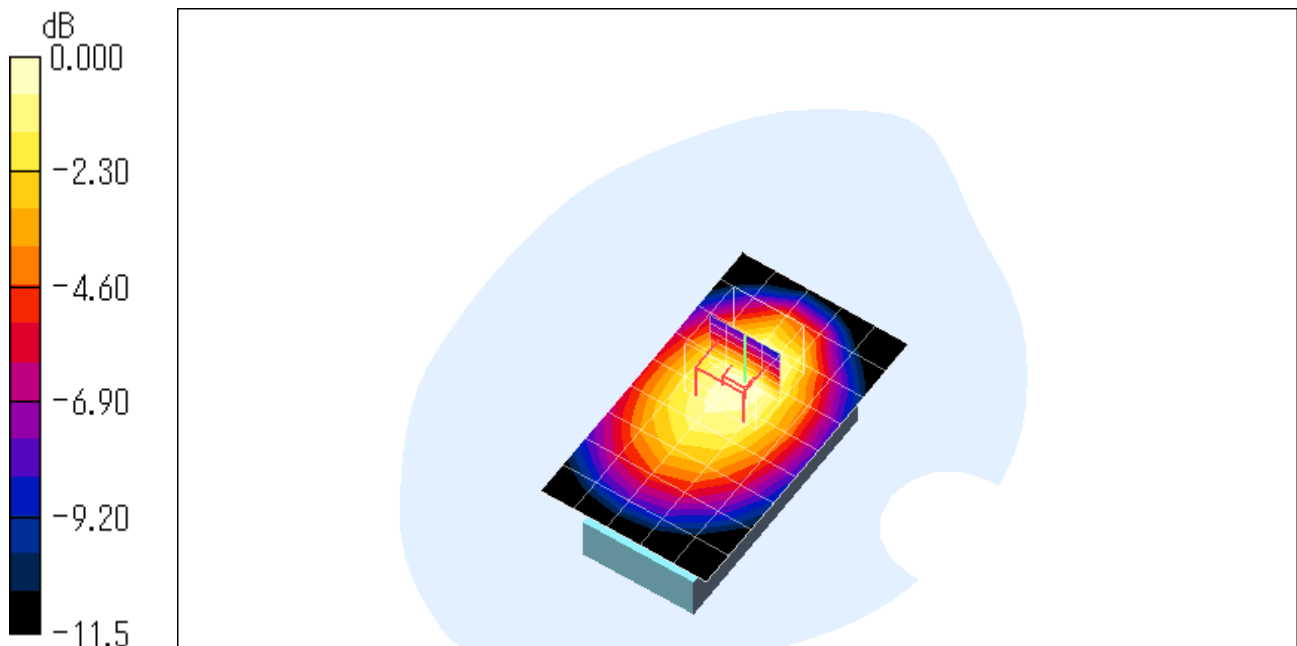

0 dB = 0.289mW/g



Attachment 2-2 – SAR Test Plots (PCS 1900 MHz)

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 512ch (1850.2MHz) - open style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.267 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.281 mW/g; SAR(10 g) = 0.169 mW/g

Maximum value of SAR (measured) = 0.312 mW/g

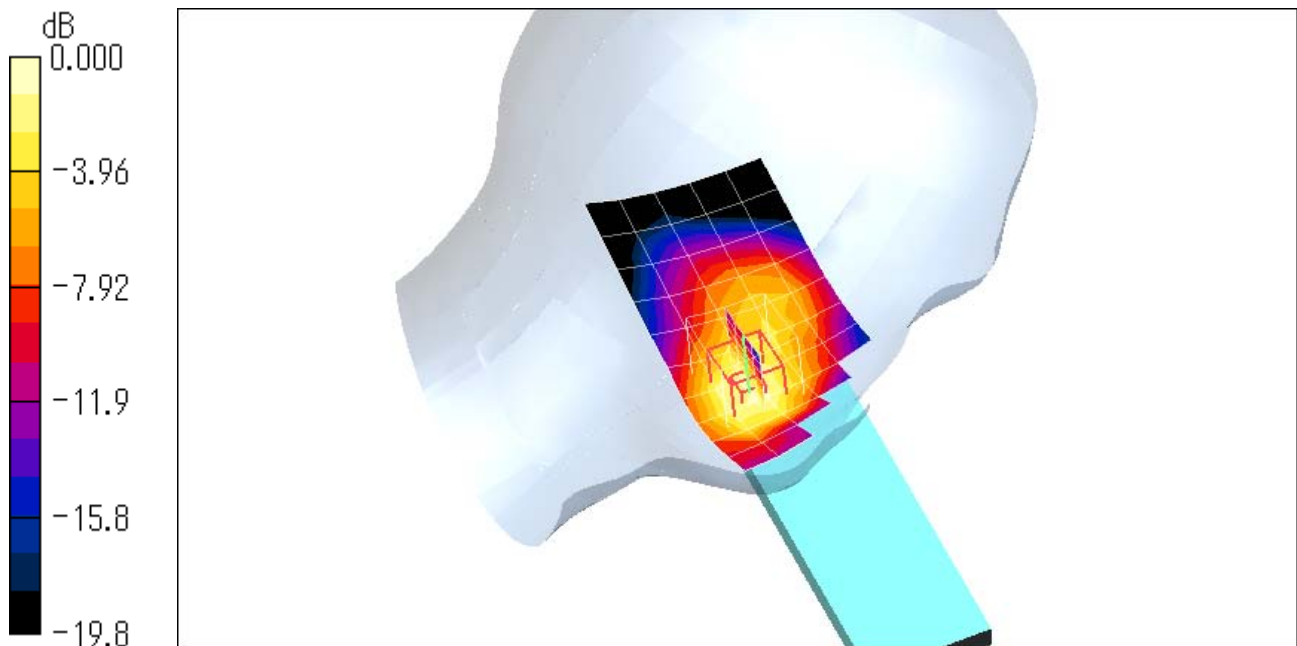

0 dB = 0.312mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 661ch (1880.0MHz) - open style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.294 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.9 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.310 mW/g; SAR(10 g) = 0.183 mW/g

Maximum value of SAR (measured) = 0.341 mW/g

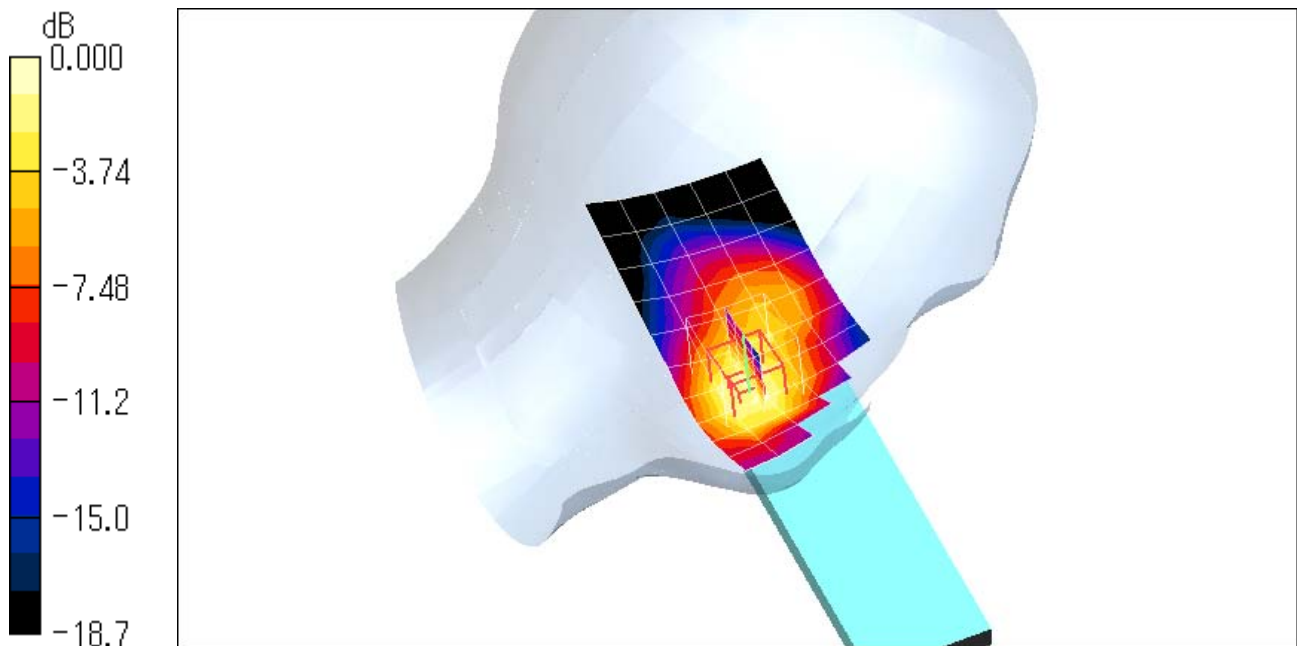

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 810ch (1909.8MHz) - open style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.338 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.6 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.577 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 0.407 mW/g

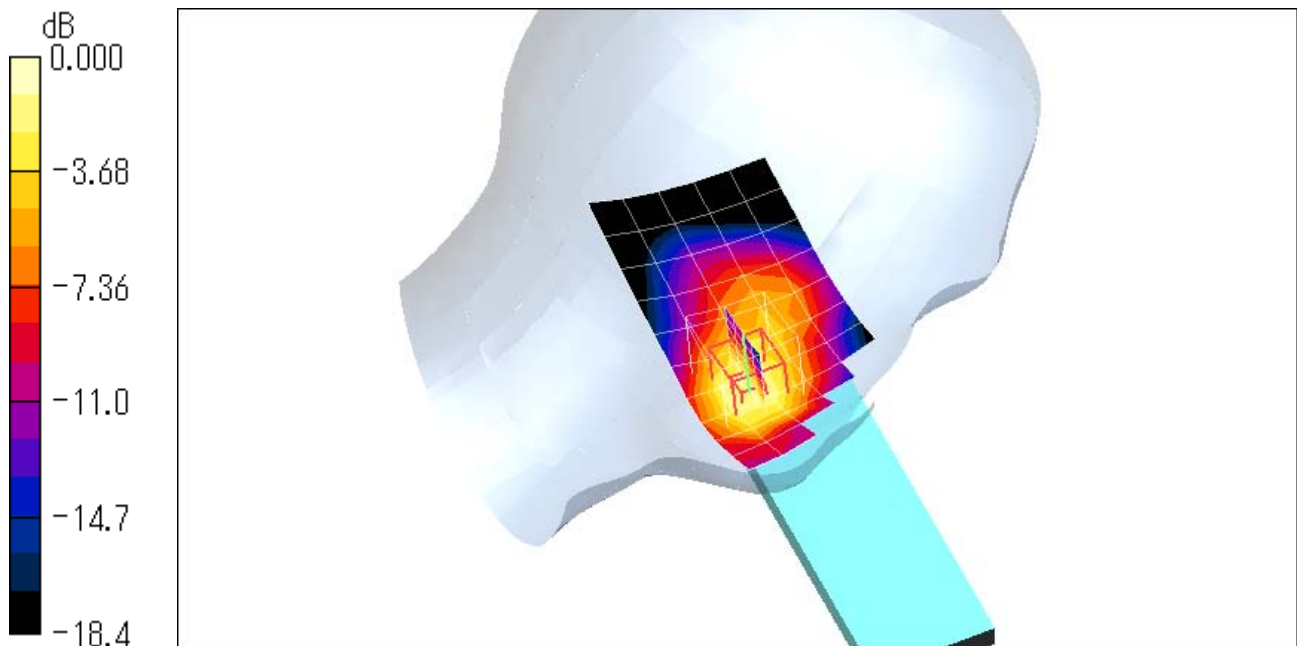

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 810ch (1909.8MHz) - open style**DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8


Medium: HSL1900 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

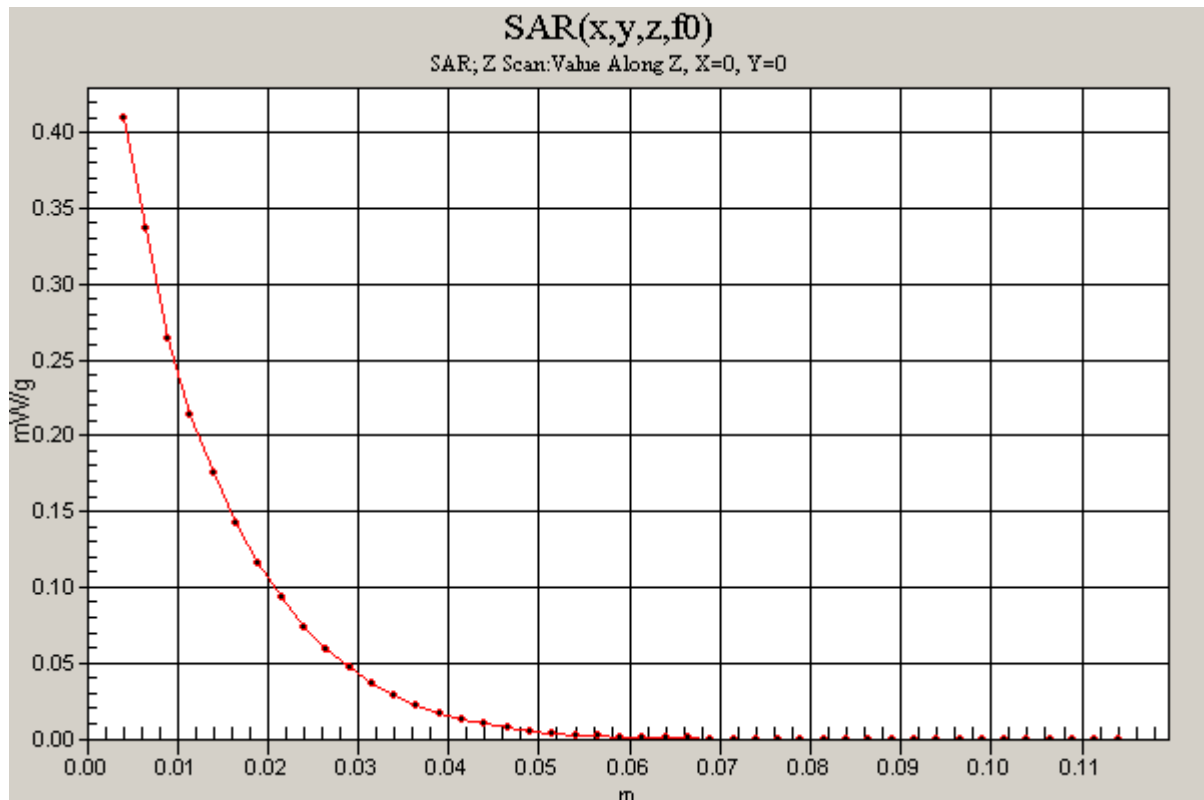Cheek/Touch Position/Z Scan (1x1x45): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm
Maximum value of SAR (measured) = 0.409 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Ear/Tilt 661ch (1880.0MHz) - open style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.172 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.15 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.161 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.171 mW/g

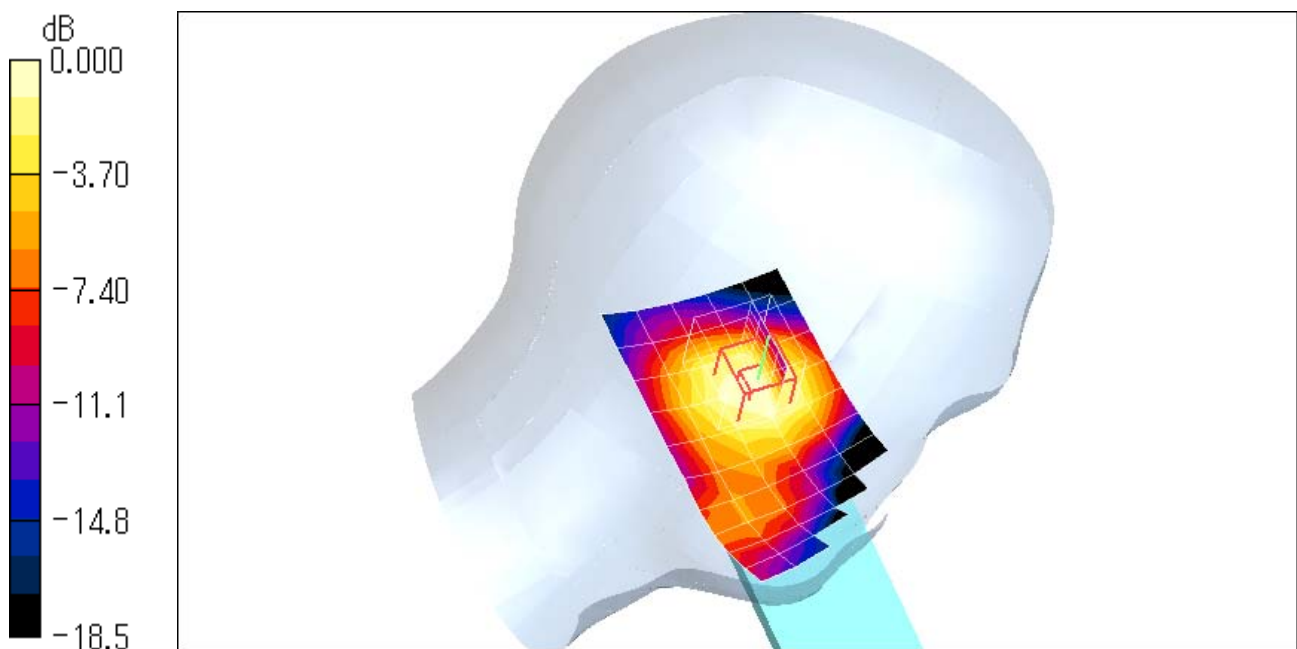

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 661ch (1880.0MHz) - open style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.192 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.209 mW/g

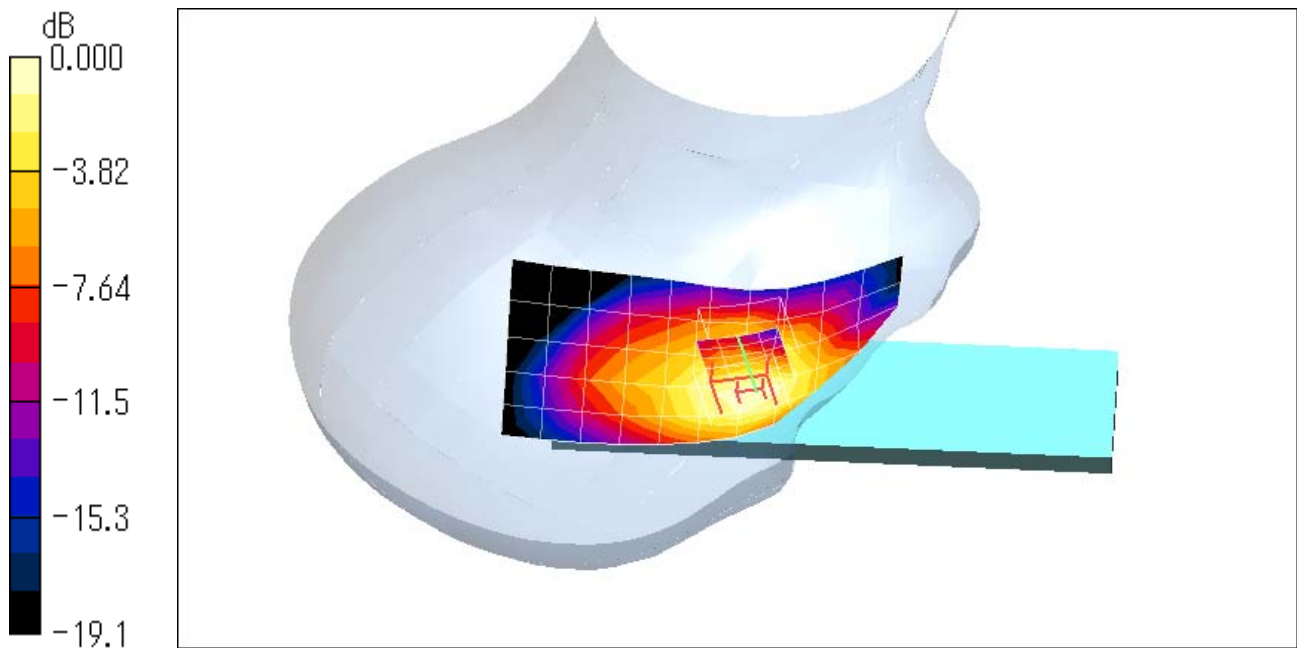

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Ear/Tilt 661ch (1880.0MHz) - open style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.158 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.01 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.161 mW/g

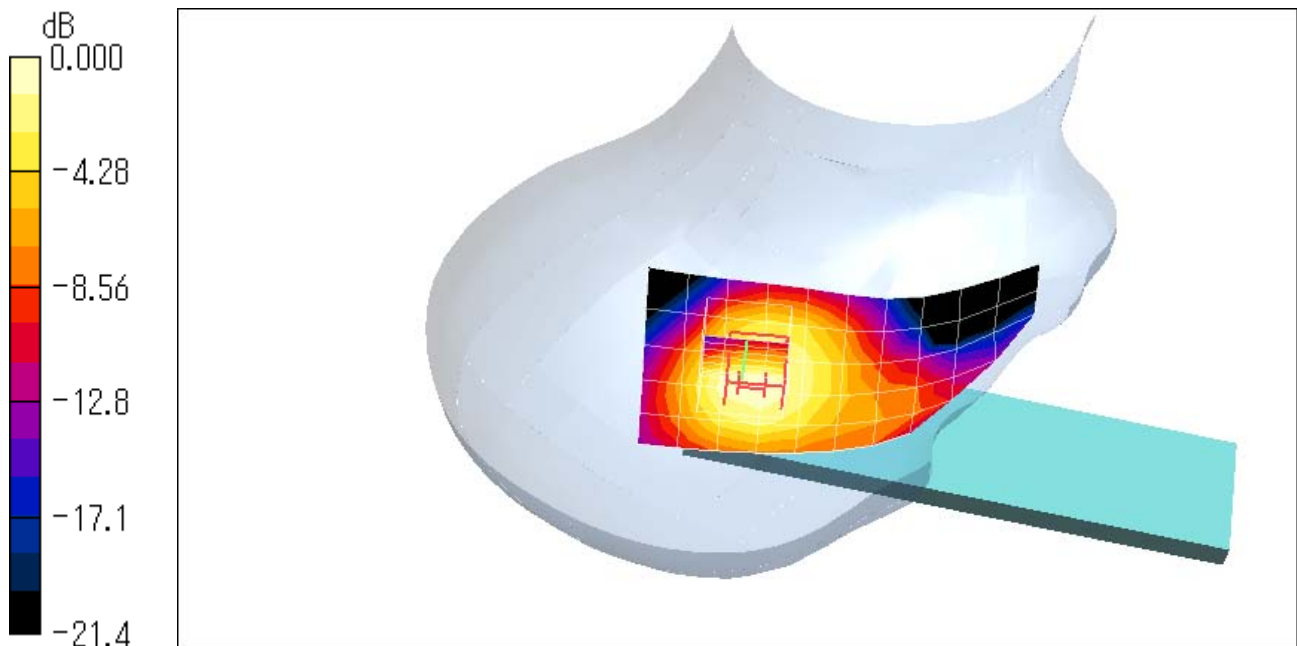

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 661ch (1880.0MHz) - swivel style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (10x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.300 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.6 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.299 mW/g; SAR(10 g) = 0.191 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

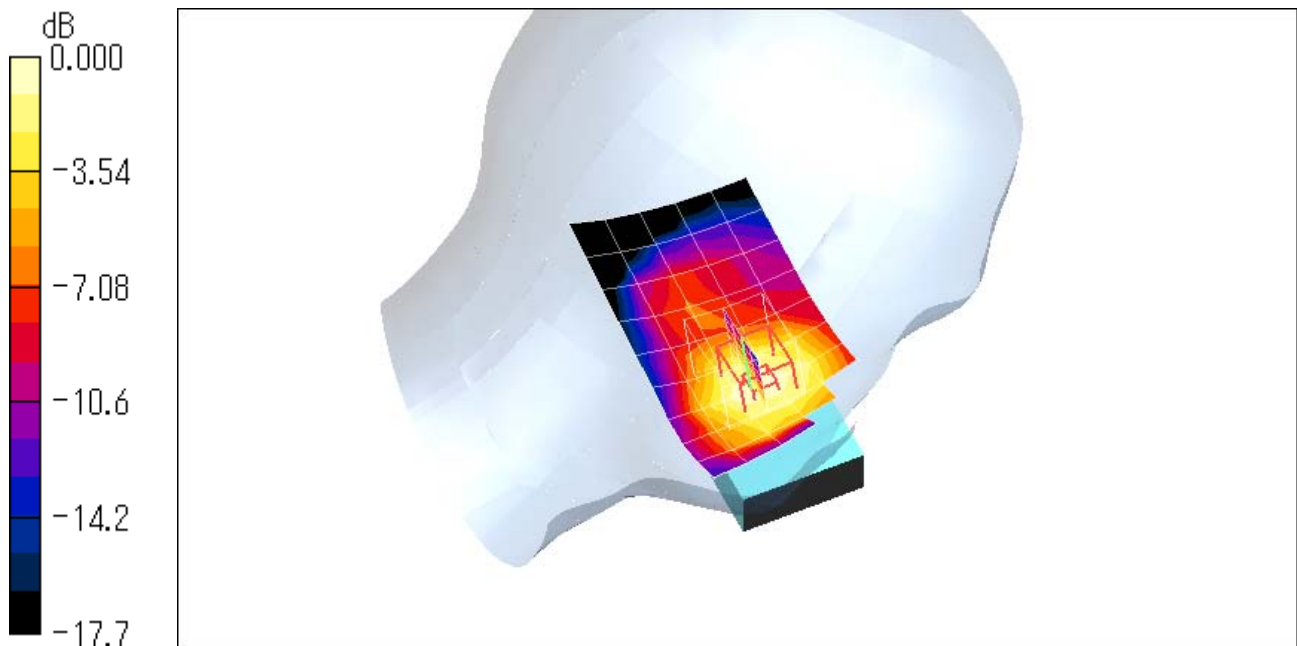

0 dB = 0.317mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Ear/Tilt 661ch (1880.0MHz) - swivel style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.139 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.83 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.145 mW/g

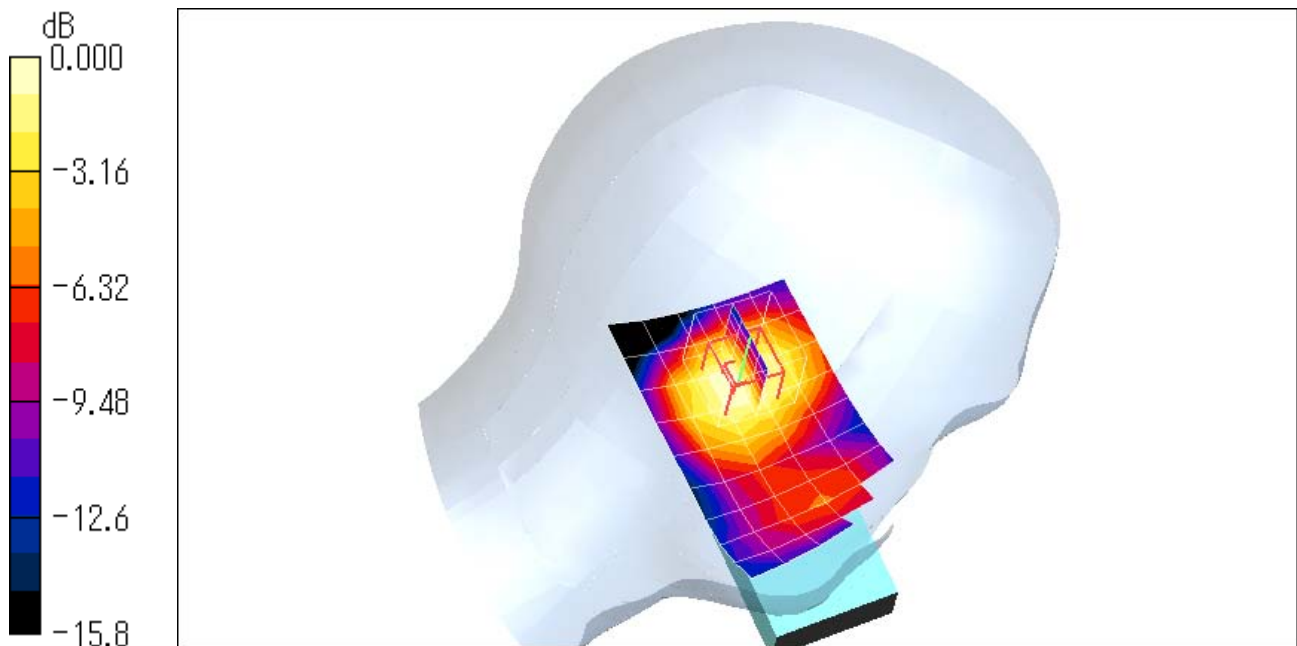

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 661ch (1880.0MHz) - swivel style

DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.293 mW/g


Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.286 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.302 mW/g

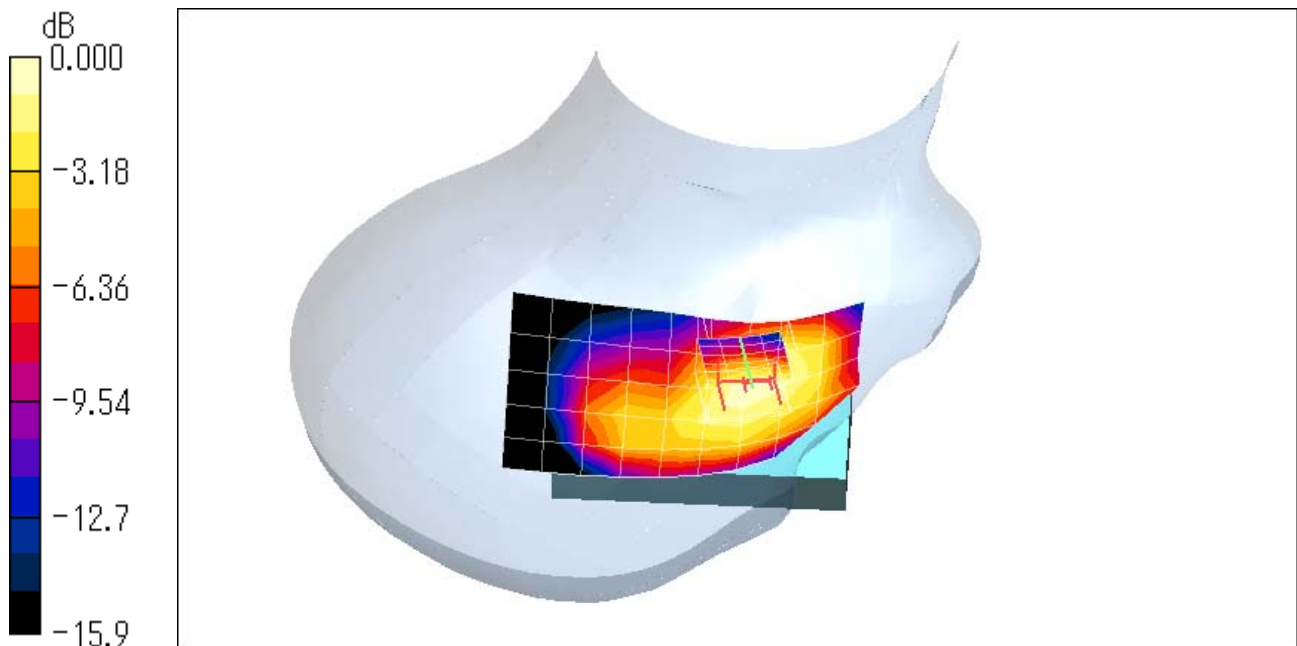

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Ear/Tilt 661ch (1880.0MHz) - swivel style**DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(5.36, 5.36, 5.36); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (10x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.193 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.36 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.202 mW/g

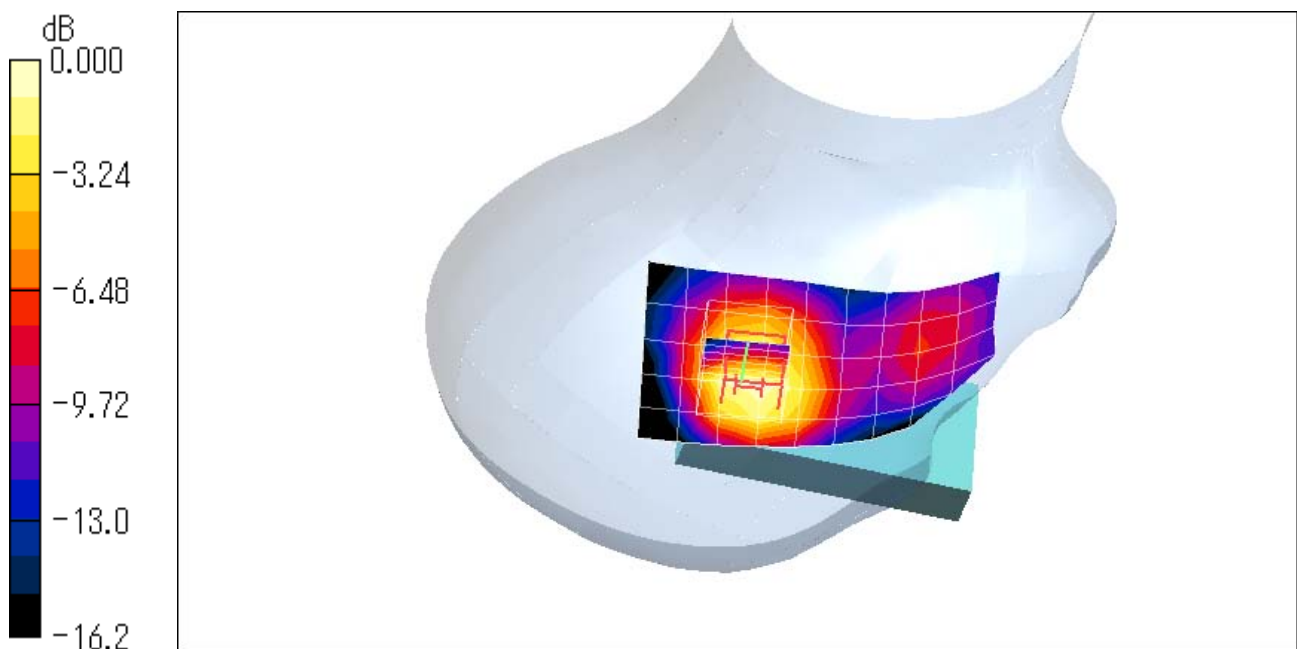

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 512ch (1850.2MHz) - close style**DUT: Cellular Phone; Type: F-01A; Serial: 359935010014839**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: M1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(4.8, 4.8, 4.8); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2007/11/07
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.316 mW/g

Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.99 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.530 W/kg

SAR(1 g) = 0.339 mW/g; SAR(10 g) = 0.203 mW/g

Maximum value of SAR (measured) = 0.369 mW/g

