


A.3 SAR Measurement Data


A.3.1 Left Head

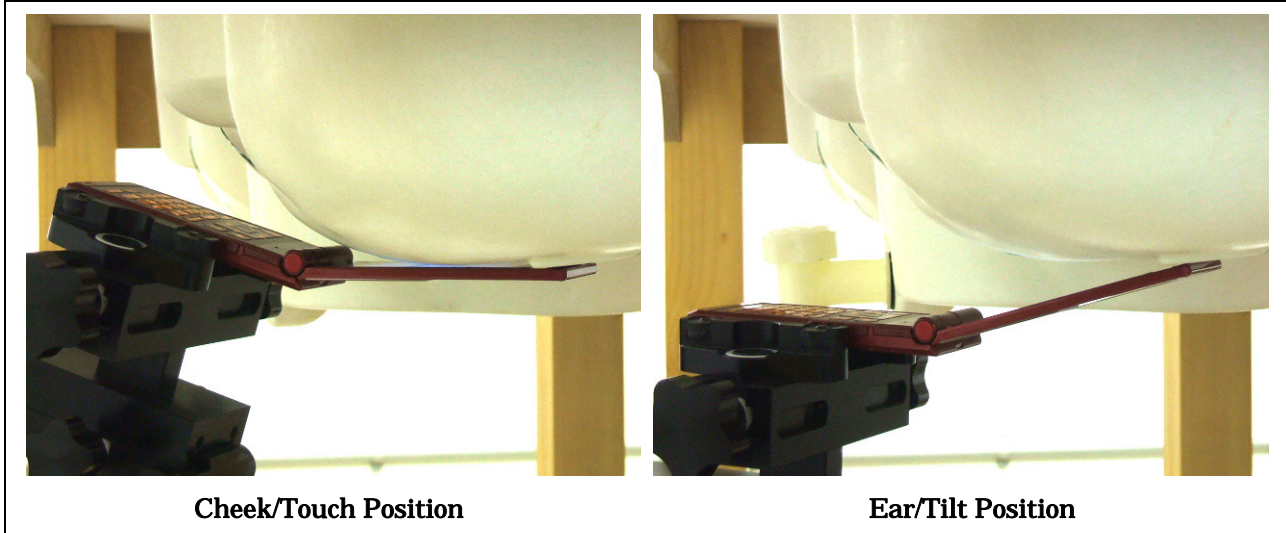

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)							Date : November 11, 2008
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.84	0.015		0.442	22.0
	4233	846.60	--	--		**	--
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.84	-0.050		0.104	22.0
	4233	846.60	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR is measured using a 12.2 kbps RMC.
 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 5. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

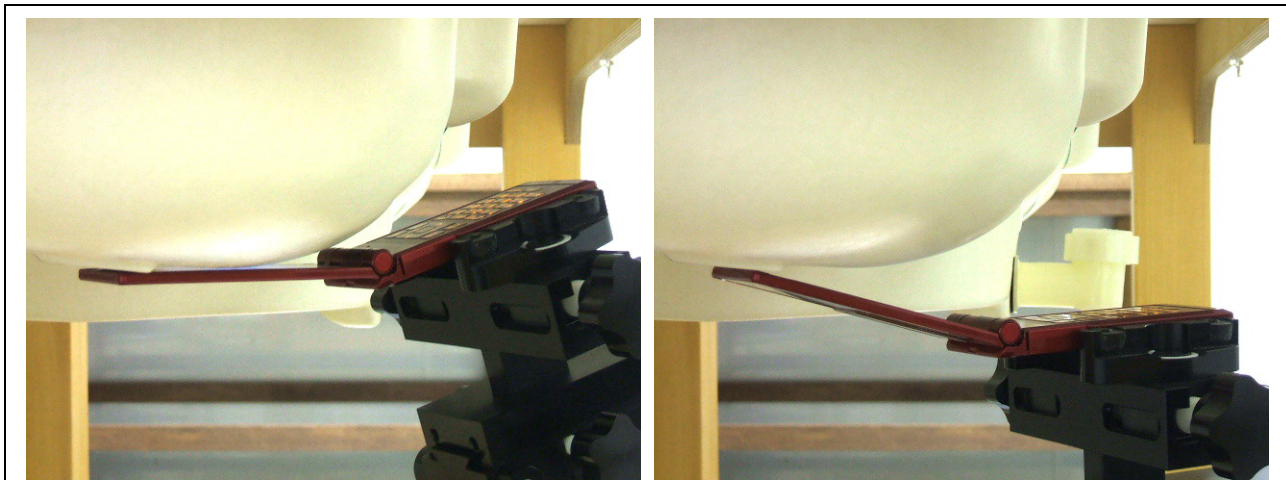

Cheek/Touch Position


Ear/Tilt Position

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)					Date : November 11, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	23.86	0.007	1.6	0.595	22.0
	4182	836.40	23.84	-0.087		0.518	22.0
	4233	846.60	23.69	-0.033		0.468	22.0
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.84	-0.052		0.105	22.0
	4233	846.60	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
5. Please refer to attachment for the result presentation in plot format.

A.3.3 Body-worn Position

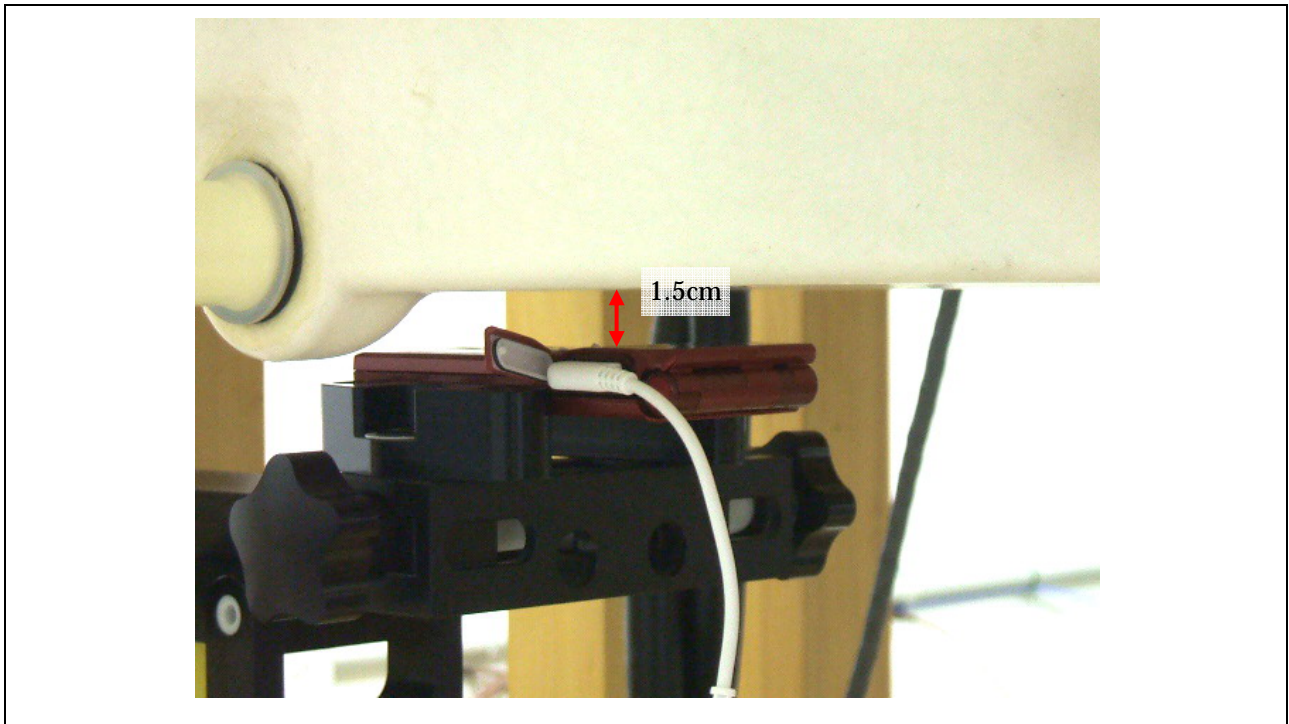

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)					Date : November 10, 2008		
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	4132	826.40	23.86	-0.038	1.6	0.498	22.0
	4182	836.40	23.84	-0.022		0.588	22.0
	4233	846.60	23.69	-0.048		0.493	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.