

FCC Test Report

FCC ID : VQK-F02J
Equipment : Mobile Phone
Model No. : F-02J
Brand Name : FUJITSU
Applicant : FUJITSU LIMITED
Address : 1-1, Kamikodanaka 4-chome, Nakahara-ku,
Kawasaki 211-8588, Japan
Standard : 47 CFR FCC Part 15.247
Received Date : May 25, 2016
Tested Date : Jun. 19 ~ Jun. 23, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List.....	7
1.3	Test Setup Chart.....	7
1.4	The Equipment List	8
1.5	Test Standards	10
1.6	Measurement Uncertainty	10
2	TEST CONFIGURATION.....	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details.....	11
3	TRANSMITTER TEST RESULTS	12
3.1	Conducted Emissions	12
3.2	Unwanted Emissions into Restricted Frequency Bands	15
3.3	Unwanted Emissions into Non-Restricted Frequency Bands.....	31
3.4	Conducted Output Power	36
3.5	Number of Hopping Frequency.....	38
3.6	20dB and Occupied Bandwidth	40
3.7	Channel Separation	42
3.8	Number of Dwell Time.....	44
4	TEST LABORATORY INFORMATION	47

Release Record

Report No.	Version	Description	Issued Date
FR652501AD	Rev. 01	Initial issue	Jul. 12, 2016

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.469MHz 31.82 (Margin -14.72dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 317.12MHz 34.74 (Margin -11.26dB) - PK	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 10.81	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Product Details

Product Name	Mobile Phone
Brand Name	FUJITSU
Model Name	F-02J
IMEI Code	358094070021952 / 358094070021978
H/W Version	v2.1.0
S/W Version	R015.1

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: Bluetooth BR uses a GFSK.
 Note 3: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK and 8DPSK.

1.1.3 Antenna Details

Ant. No.	Type	Connector	Antenna Gain (dBi)
1	$\lambda/4$ Monopole	No	-2.0

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5.0Vdc from AC adapter 3.8Vdc from Battery
--------------------------	---

1.1.5 Accessories

No.	Equipment	Description
1	Battery	Brand Name: NTT docomo Model Name: F33 Power Rating: 3.8Vdc, 1500mAh, 5.7Wh
2	Cradle	Brand Name: NTT docomo Model Name: F49 Input/Output Rating: 5Vdc, 1.5A

1.1.6 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

1.1.7 Test Tool and Duty Cycle

Test Tool	QRCT, Version: 3.0.54.0
-----------	-------------------------

1.1.8 Power Setting


Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
GFSK/1Mbps	9	9	9
$\pi/4$ -DQPSK	9	9	9
8DPSK/3Mbps	9	9	9

1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	C0GB4X1	DoC	---
2	Earphone	APPLE	MD827FE/A	6	---	1.2m non-shielded w/o core
3	Earphone adapter	NTT docomo	Earphone adapter 02	---	---	0.37m non-shielded w/o core
4	Adapter	NTT docomo	AC Adapter 04	---	---	Remarks: I/P: 100-240Vac, 0.22A, 50-60Hz, 0.4A O/P: 5.0Vdc, 1.8A Power line: 1m, non-shielded with 2 cores

Note: No.3 & No. 4 are provided by applicant.

1.3 Test Setup Chart

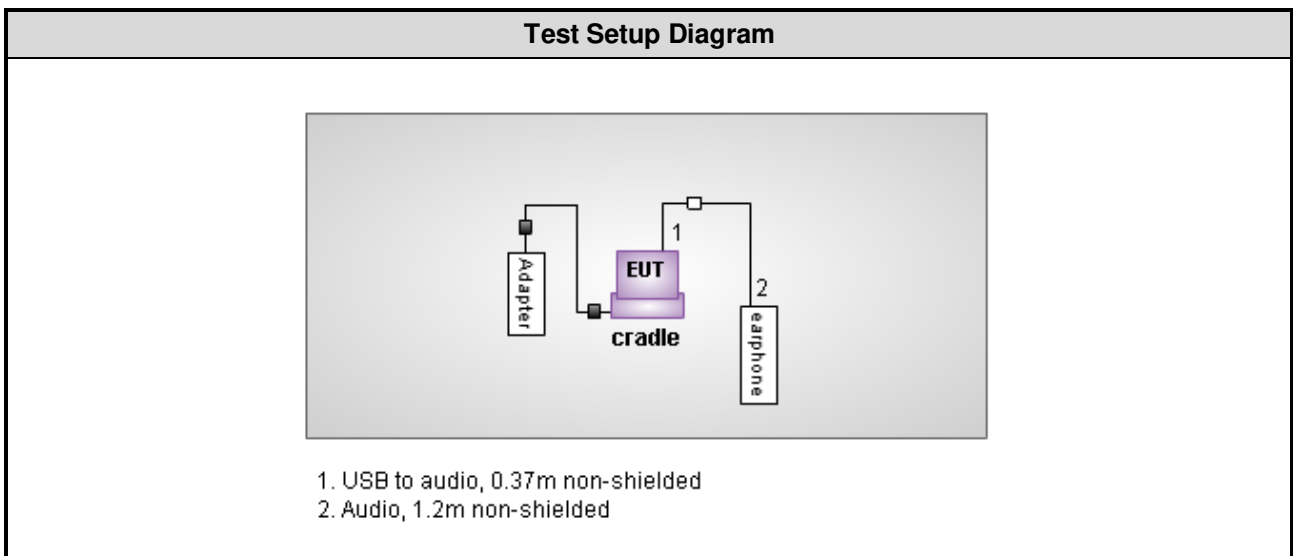

Note: Notebook is disconnected from EUT and removed from test table when EUT is set to transmit continuously.

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (03CH03-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	Agilent	N9010A	MY53400091	Sep. 14, 2015	Sep. 13, 2016
Receiver	Agilent	N9038A	MY53290044	Oct. 14, 2015	Oct. 13, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-562	Nov. 16, 2015	Nov. 15, 2016
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 24, 2016	Feb. 23, 2017
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016
Preamplifier	EMC	EMC02325	980187	Sep. 21, 2015	Sep. 20, 2016
Preamplifier	Agilent	83017A	MY53270014	Sep. 07, 2015	Sep. 06, 2016
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 05, 2016	Feb. 04, 2017
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 05, 2016	Feb. 04, 2017
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 05, 2016	Feb. 04, 2017
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Feb. 05, 2016	Feb. 04, 2017
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Feb. 05, 2016	Feb. 04, 2017
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Feb. 05, 2016	Feb. 04, 2017
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 16, 2015	Nov. 15, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2016	Feb. 16, 2017
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

FCC Public notice DA 00-705

ANSI C63.10-2013

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.134 Hz
Conducted power	± 0.808 dB
Power density	± 0.463 dB
Conducted emission	± 2.670 dB
AC conducted emission	± 2.90 dB
Radiated emission ≤ 1 GHz	± 3.66 dB
Radiated emission > 1 GHz	± 5.37 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 63%	Howard Huang
Radiated Emissions	03CH03-WS	20-24°C / 63-66%	Brad Wu Warren Lee
RF Conducted	TH01-WS	22°C / 64%	Alex Huang

➤ FCC site registration No.: 207696

➤ IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)
Conducted Emissions	8DPSK	2441	3Mbps
Radiated Emissions ≤ 1GHz	8DPSK	2441	3Mbps
Radiated Emissions > 1GHz	GFSK	2402, 2441, 2480	1Mbps
	8DPSK	2402, 2441, 2480	3Mbps
Conducted Output Power	GFSK	2402, 2441, 2480	1Mbps
	π/4 QDPSK	2402, 2441, 2480	2Mbps
	8DPSK	2402, 2441, 2480	3Mbps
Number of Hopping Channels	GFSK	2402~2480	1Mbps
	8DPSK	2402~2480	3Mbps
Hopping Channel Separation	GFSK	2402, 2441, 2480	1Mbps
	8DPSK	2402, 2441, 2480	3Mbps
Dwell Time	GFSK	2402	1Mbps
	8DPSK	2402	3Mbps

NOTE:

1. Adapter and cradle mode had been covered during the pretest and found that **cradle mode** was the worst case and was selected for final test

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

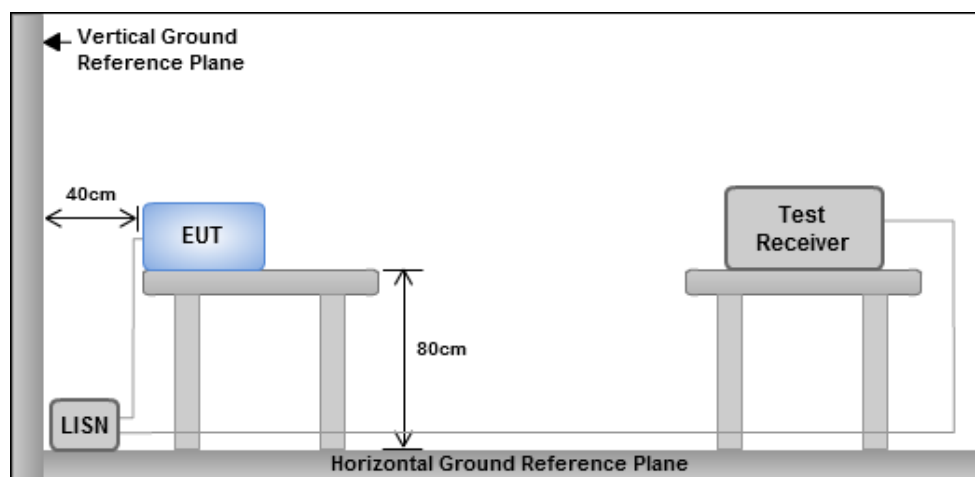


- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

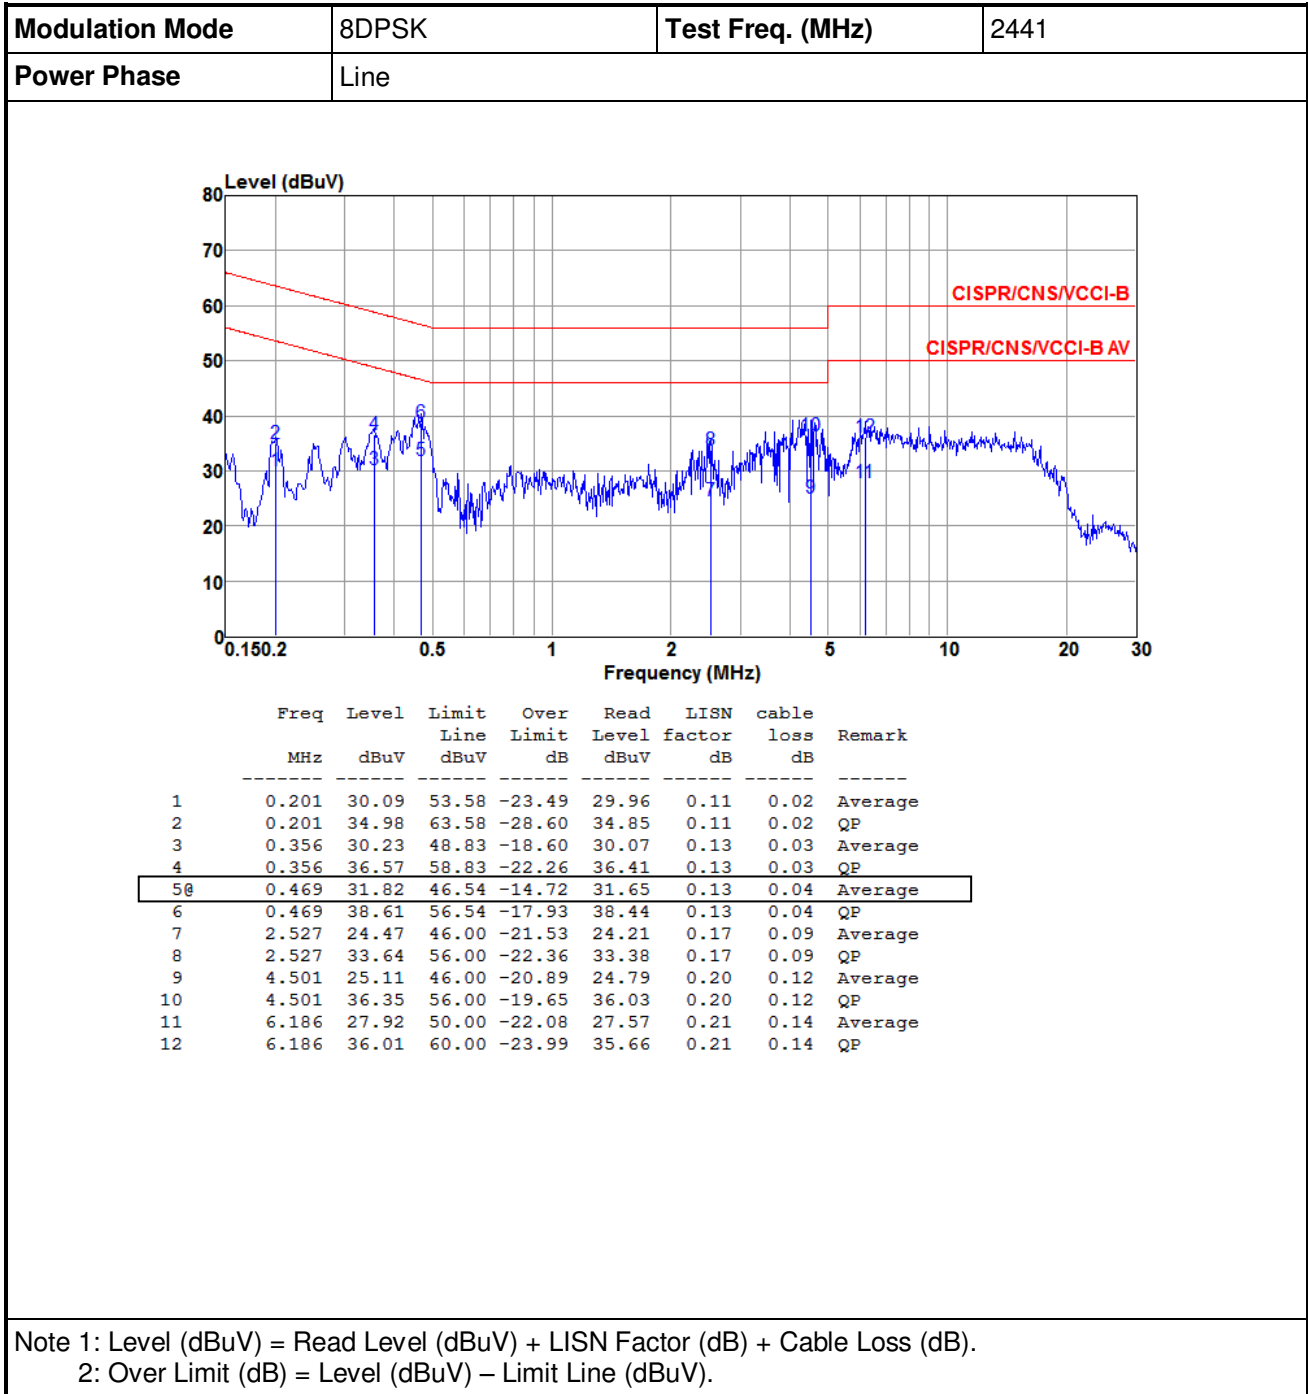

Modulation Mode	8DPSK	Test Freq. (MHz)	2441
Power Phase	Neutral		

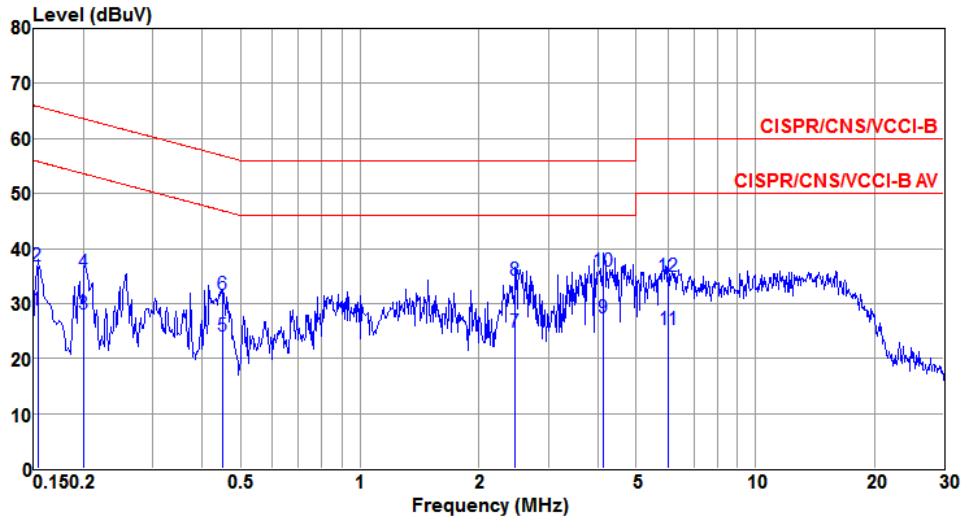

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	28.72	55.82	-27.10	28.57	0.13	0.02	Average
2	0.153	36.74	65.82	-29.08	36.59	0.13	0.02	QP
3	0.201	28.17	53.58	-25.41	28.05	0.10	0.02	Average
4	0.201	35.57	63.58	-28.01	35.45	0.10	0.02	QP
5	0.449	24.13	46.89	-22.76	23.96	0.14	0.03	Average
6	0.449	31.71	56.89	-25.18	31.54	0.14	0.03	QP
7	2.474	24.72	46.00	-21.28	24.46	0.17	0.09	Average
8	2.474	34.32	56.00	-21.68	34.06	0.17	0.09	QP
9@	4.136	27.48	46.00	-18.52	27.19	0.17	0.12	Average
10	4.136	35.82	56.00	-20.18	35.53	0.17	0.12	QP
11	6.024	25.19	50.00	-24.81	24.84	0.21	0.14	Average
12	6.024	34.95	60.00	-25.05	34.60	0.21	0.14	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. Radiated emission above 1GHz / Peak value
RBW=1MHz, VBW=3MHz and Peak detector


Radiated emission above 1GHz / Average value for harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:
3.
$$20\log(\text{Duty cycle}) = 20\log \frac{1\text{s} / 1600 * 5}{100 \text{ ms}} = -30.1\text{dB}$$
4. Radiated emission above 1GHz / Average value for other emissions
RBW=1MHz, VBW=1/T and Peak detector

3.2.3 Test Setup


Radiated Emissions below 1 GHz

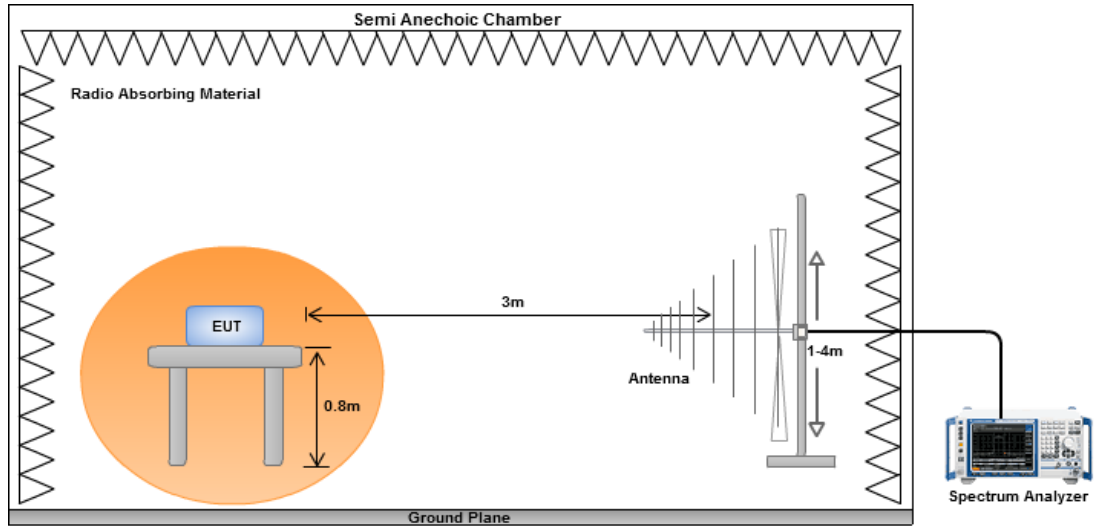


Radiated Emissions above 1 GHz

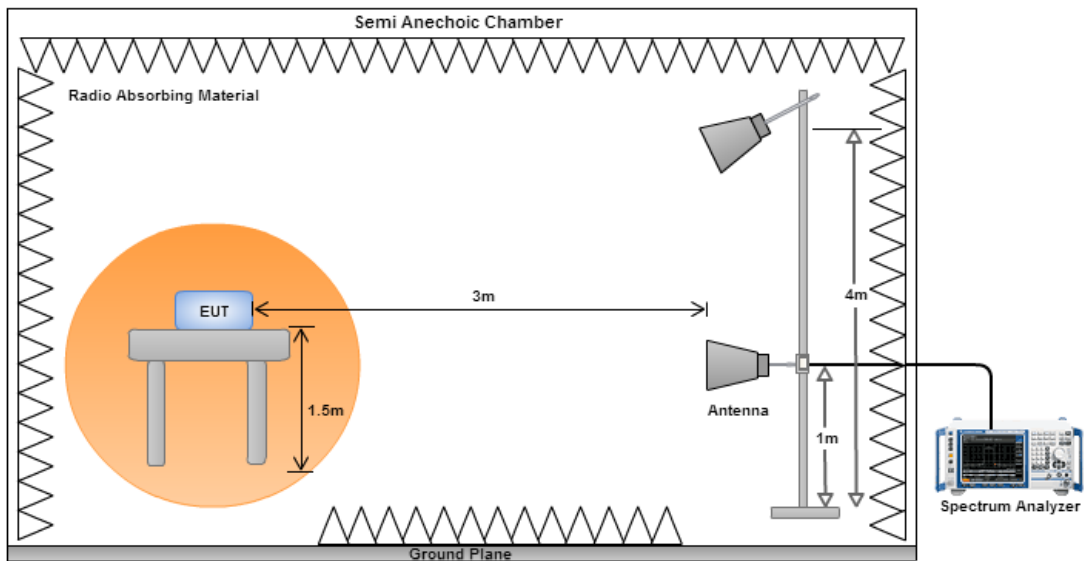

3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

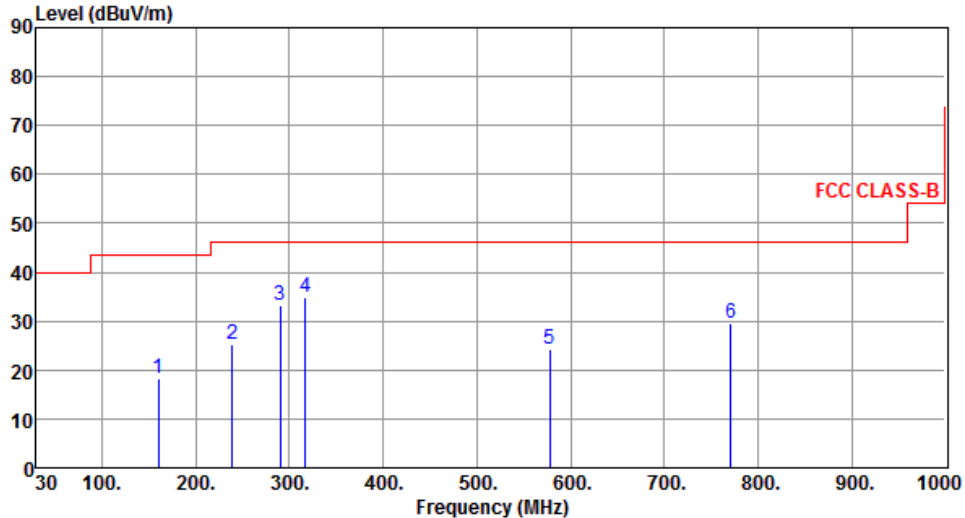Modulation	8DPSK	Test Freq. (MHz)	2441																																																																						
Polarization	Horizontal																																																																								
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 300 MHz, and 55 dBuV/m from 300 to 1000 MHz. Six blue vertical lines represent emission peaks labeled 1 through 6, with their respective levels and frequencies listed in the table below.</p>																																																																									
<table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>159.98</td> <td>18.28</td> <td>43.50</td> <td>-25.22</td> <td>31.37</td> <td>-13.09</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>239.52</td> <td>25.38</td> <td>46.00</td> <td>-20.62</td> <td>39.85</td> <td>-14.47</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>289.96</td> <td>33.09</td> <td>46.00</td> <td>-12.91</td> <td>45.74</td> <td>-12.65</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr style="border: 2px solid black;"> <td>4</td> <td>317.12</td> <td>34.74</td> <td>46.00</td> <td>-11.26</td> <td>46.70</td> <td>-11.96</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>578.05</td> <td>24.17</td> <td>46.00</td> <td>-21.83</td> <td>30.31</td> <td>-6.14</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>771.08</td> <td>29.50</td> <td>46.00</td> <td>-16.50</td> <td>32.06</td> <td>-2.56</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	159.98	18.28	43.50	-25.22	31.37	-13.09	Peak	---	---	2	239.52	25.38	46.00	-20.62	39.85	-14.47	Peak	---	---	3	289.96	33.09	46.00	-12.91	45.74	-12.65	Peak	---	---	4	317.12	34.74	46.00	-11.26	46.70	-11.96	Peak	---	---	5	578.05	24.17	46.00	-21.83	30.31	-6.14	Peak	---	---	6	771.08	29.50	46.00	-16.50	32.06	-2.56	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	159.98	18.28	43.50	-25.22	31.37	-13.09	Peak	---	---																																																																
2	239.52	25.38	46.00	-20.62	39.85	-14.47	Peak	---	---																																																																
3	289.96	33.09	46.00	-12.91	45.74	-12.65	Peak	---	---																																																																
4	317.12	34.74	46.00	-11.26	46.70	-11.96	Peak	---	---																																																																
5	578.05	24.17	46.00	-21.83	30.31	-6.14	Peak	---	---																																																																
6	771.08	29.50	46.00	-16.50	32.06	-2.56	Peak	---	---																																																																
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																									

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical		

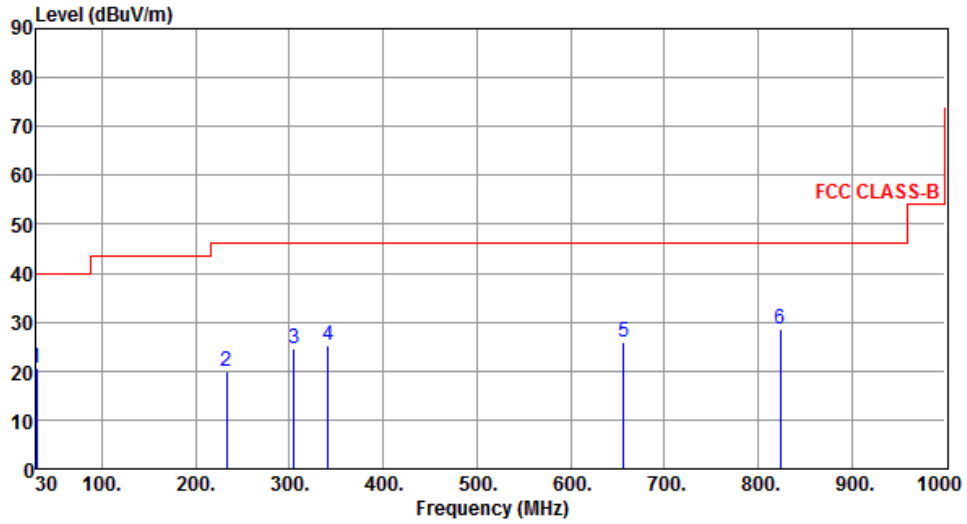

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.00	20.48	40.00	-19.52	34.48	-14.00	Peak	---	---
2	232.73	19.81	46.00	-26.19	34.70	-14.89	Peak	---	---
3	304.51	24.51	46.00	-21.49	36.75	-12.24	Peak	---	---
4	341.37	25.27	46.00	-20.73	36.71	-11.44	Peak	---	---
5	656.62	25.98	46.00	-20.02	30.61	-4.63	Peak	---	---
6	823.46	28.49	46.00	-17.51	30.25	-1.76	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

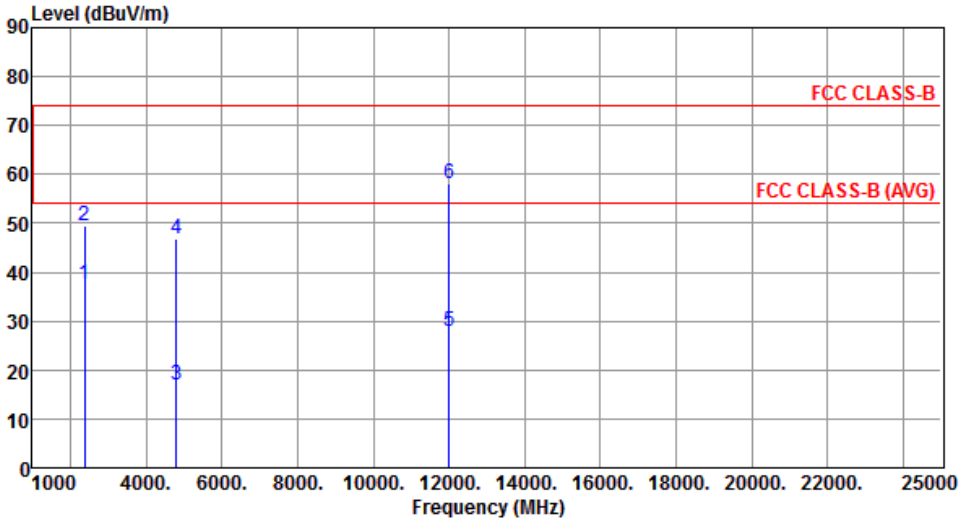Modulation	GFSK	Test Freq. (MHz)	2402						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	37.41	54.00	-16.59	38.51	-1.10	Average	152	169
2	2390.00	49.56	74.00	-24.44	50.66	-1.10	Peak	152	169
3	4804.00	16.85	54.00	-37.15	11.60	5.25	Average	120	149
4	4804.00	46.95	74.00	-27.05	41.70	5.25	Peak	120	149
5	12010.00	27.89	54.00	-26.11	12.82	15.07	Average	125	81
6	12010.00	57.99	74.00	-16.01	42.92	15.07	Peak	125	81
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

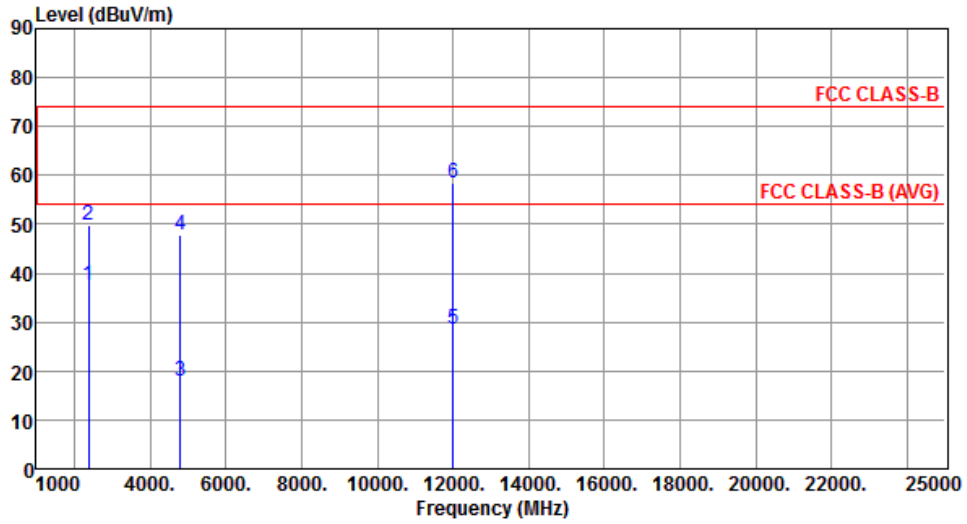


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.59	54.00	-16.41	38.69	-1.10	Average	165	72
2	2390.00	49.72	74.00	-24.28	50.82	-1.10	Peak	165	72
3	4804.00	17.82	54.00	-36.18	12.57	5.25	Average	152	169
4	4804.00	47.92	74.00	-26.08	42.67	5.25	Peak	152	169
5	12010.00	28.49	54.00	-25.51	13.42	15.07	Average	135	162
6	12010.00	58.59	74.00	-15.41	43.52	15.07	Peak	135	162

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal		

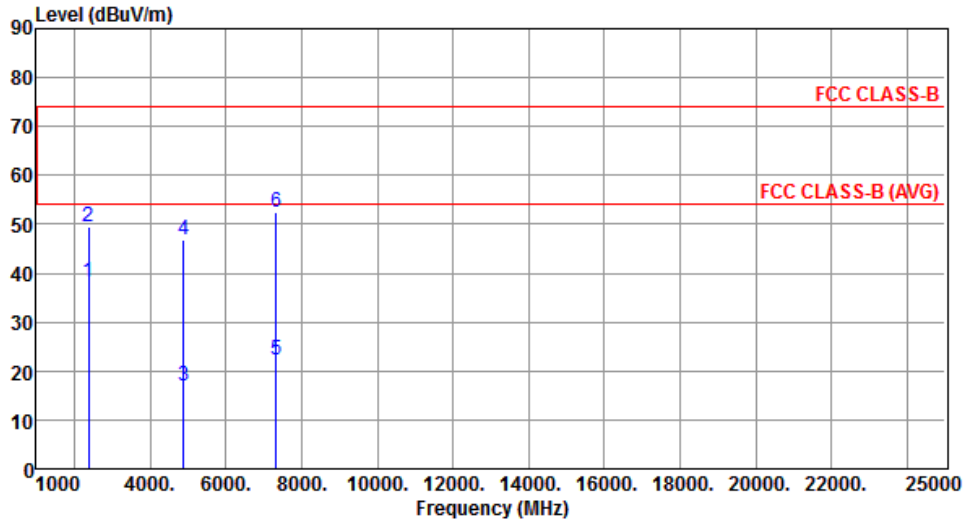


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.11	54.00	-15.89	39.21	-1.10	Average	156	192
2	2390.00	49.52	74.00	-24.48	50.62	-1.10	Peak	156	192
3	4882.00	16.88	54.00	-37.12	11.44	5.44	Average	121	96
4	4882.00	46.98	74.00	-27.02	41.54	5.44	Peak	121	96
5	7323.00	22.35	54.00	-31.65	12.07	10.28	Average	129	38
6	7323.00	52.45	74.00	-21.55	42.17	10.28	Peak	129	38

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical		

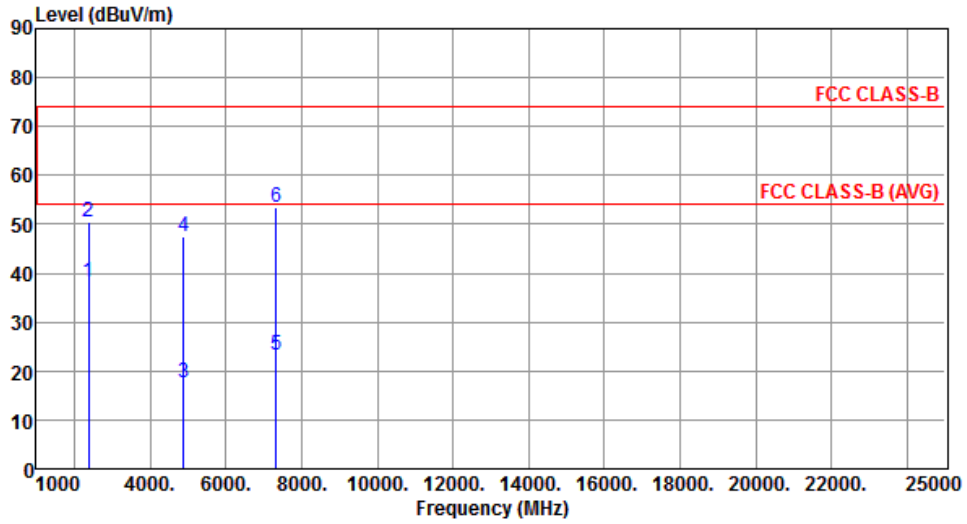


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.29	54.00	-15.71	39.39	-1.10	Average	156	91
2	2390.00	50.46	74.00	-23.54	51.56	-1.10	Peak	156	91
3	4882.00	17.54	54.00	-36.46	12.10	5.44	Average	141	99
4	4882.00	47.64	74.00	-26.36	42.20	5.44	Peak	141	99
5	7323.00	23.36	54.00	-30.64	13.08	10.28	Average	152	161
6	7323.00	53.46	74.00	-20.54	43.18	10.28	Peak	152	161

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal		

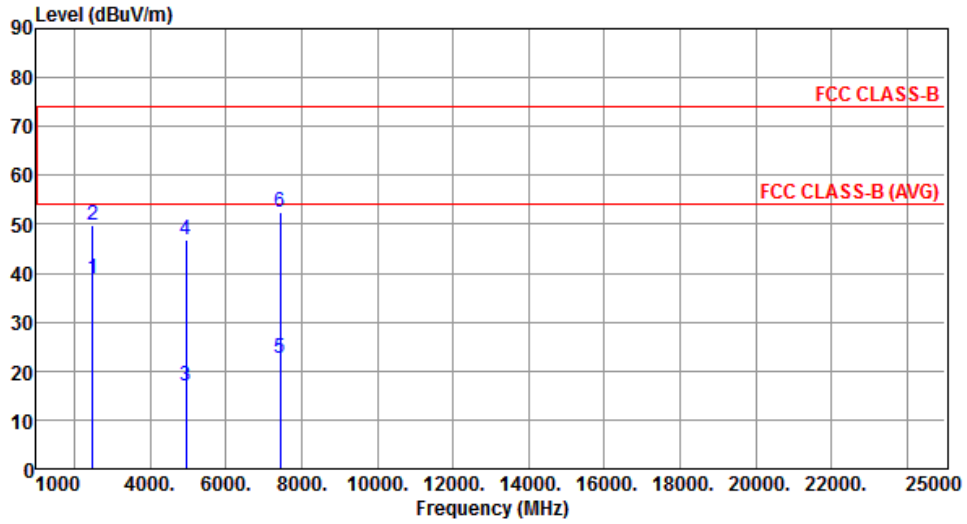


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.86	54.00	-15.14	39.47	-0.61	Average	151	162
2	2483.50	49.72	74.00	-24.28	50.33	-0.61	Peak	151	162
3	4960.00	16.85	54.00	-37.15	11.23	5.62	Average	121	96
4	4960.00	46.95	74.00	-27.05	41.33	5.62	Peak	121	96
5	7440.00	22.46	54.00	-31.54	11.90	10.56	Average	140	205
6	7440.00	52.56	74.00	-21.44	42.00	10.56	Peak	140	205

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

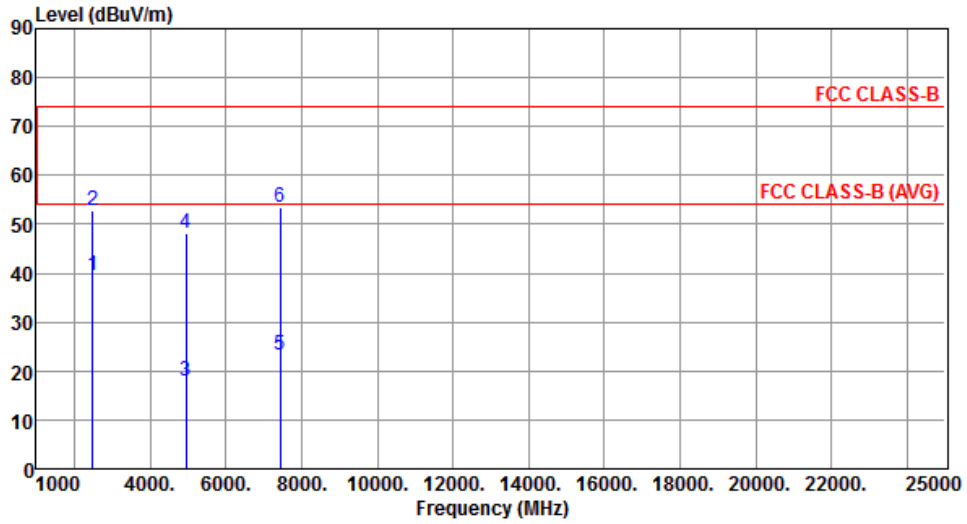


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.47	54.00	-14.53	40.08	-0.61	Average	163	74
2	2483.50	52.76	74.00	-21.24	53.37	-0.61	Peak	163	74
3	4960.00	18.03	54.00	-35.97	12.41	5.62	Average	152	143
4	4960.00	48.13	74.00	-25.87	42.51	5.62	Peak	152	143
5	7440.00	23.36	54.00	-30.64	12.80	10.56	Average	159	135
6	7440.00	53.46	74.00	-20.54	42.90	10.56	Peak	159	135

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK

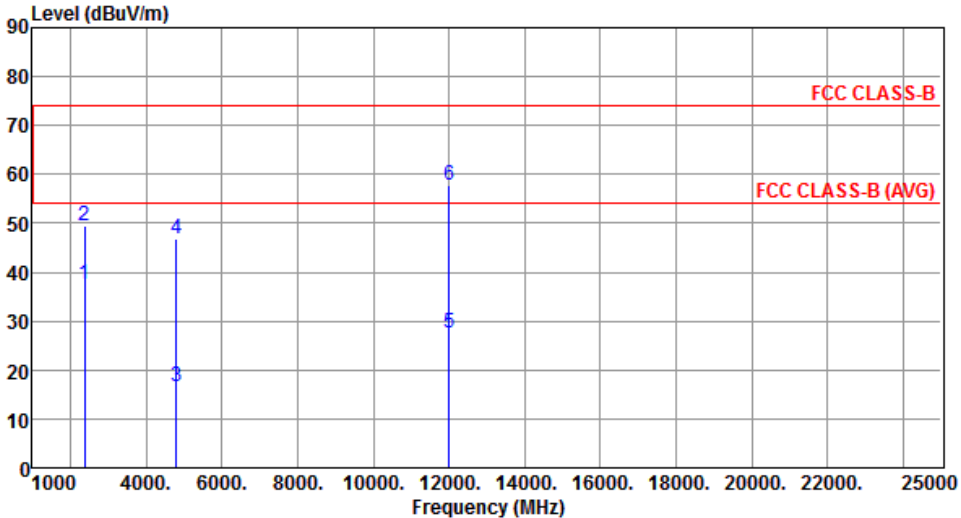Modulation	8DPSK	Test Freq. (MHz)	2402						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	37.45	54.00	-16.55	38.55	-1.10	Average	155	168
2	2390.00	49.62	74.00	-24.38	50.72	-1.10	Peak	155	168
3	4804.00	16.74	54.00	-37.26	11.49	5.25	Average	122	151
4	4804.00	46.84	74.00	-27.16	41.59	5.25	Peak	122	151
5	12010.00	27.59	54.00	-26.41	12.52	15.07	Average	128	85
6	12010.00	57.69	74.00	-16.31	42.62	15.07	Peak	128	85
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical		

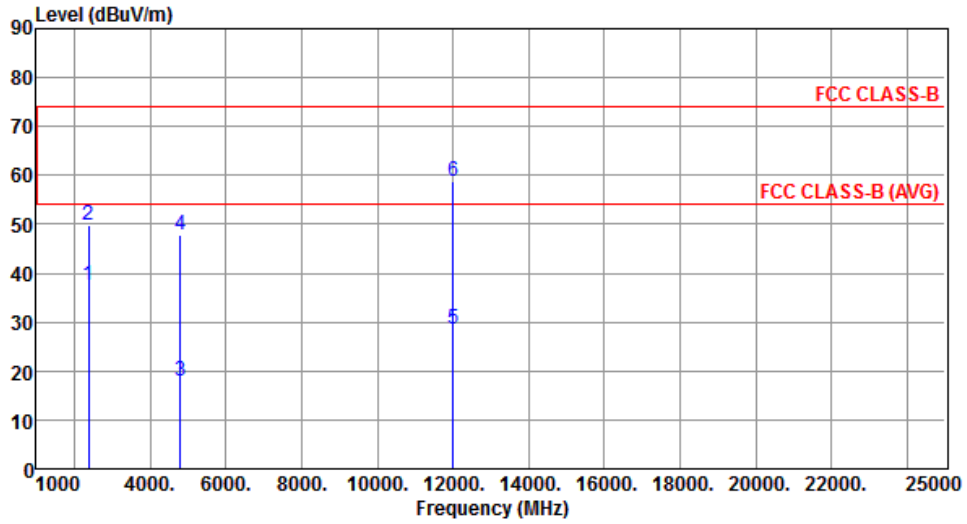


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.64	54.00	-16.36	38.74	-1.10	Average	166	75
2	2390.00	49.82	74.00	-24.18	50.92	-1.10	Peak	166	75
3	4804.00	17.86	54.00	-36.14	12.61	5.25	Average	155	163
4	4804.00	47.96	74.00	-26.04	42.71	5.25	Peak	155	163
5	12010.00	28.55	54.00	-25.45	13.48	15.07	Average	136	162
6	12010.00	58.65	74.00	-15.35	43.58	15.07	Peak	136	162

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal		

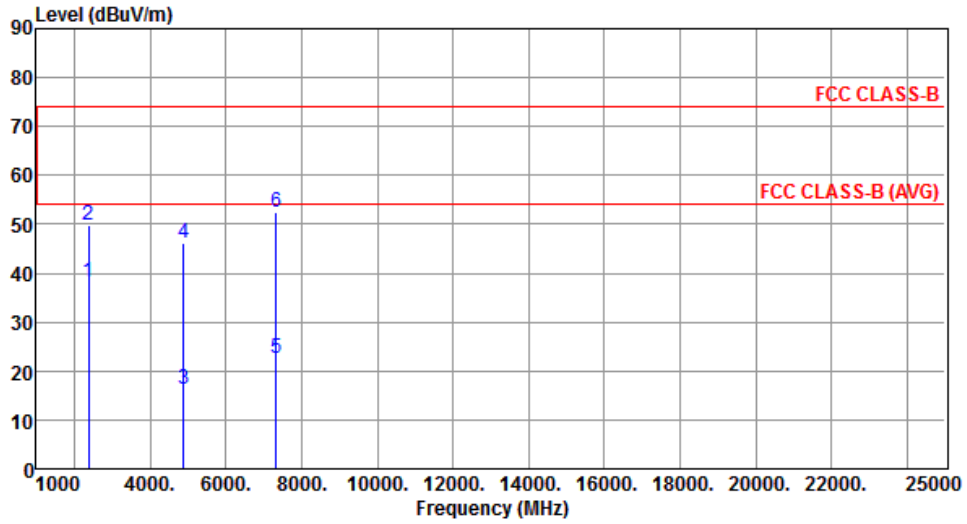


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.26	54.00	-15.74	39.36	-1.10	Average	161	185
2	2390.00	49.65	74.00	-24.35	50.75	-1.10	Peak	161	185
3	4882.00	16.14	54.00	-37.86	10.70	5.44	Average	125	104
4	4882.00	46.24	74.00	-27.76	40.80	5.44	Peak	125	104
5	7323.00	22.48	54.00	-31.52	12.20	10.28	Average	131	44
6	7323.00	52.58	74.00	-21.42	42.30	10.28	Peak	131	44

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical		

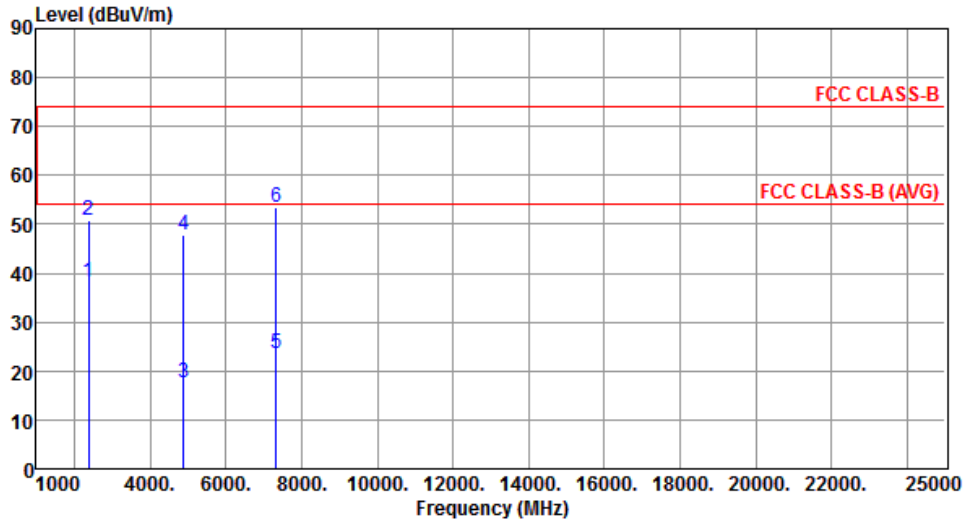


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.33	54.00	-15.67	39.43	-1.10	Average	155	93
2	2390.00	50.65	74.00	-23.35	51.75	-1.10	Peak	155	93
3	4882.00	17.72	54.00	-36.28	12.28	5.44	Average	145	96
4	4882.00	47.82	74.00	-26.18	42.38	5.44	Peak	145	96
5	7323.00	23.48	54.00	-30.52	13.20	10.28	Average	159	166
6	7323.00	53.58	74.00	-20.42	43.30	10.28	Peak	159	166

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal		

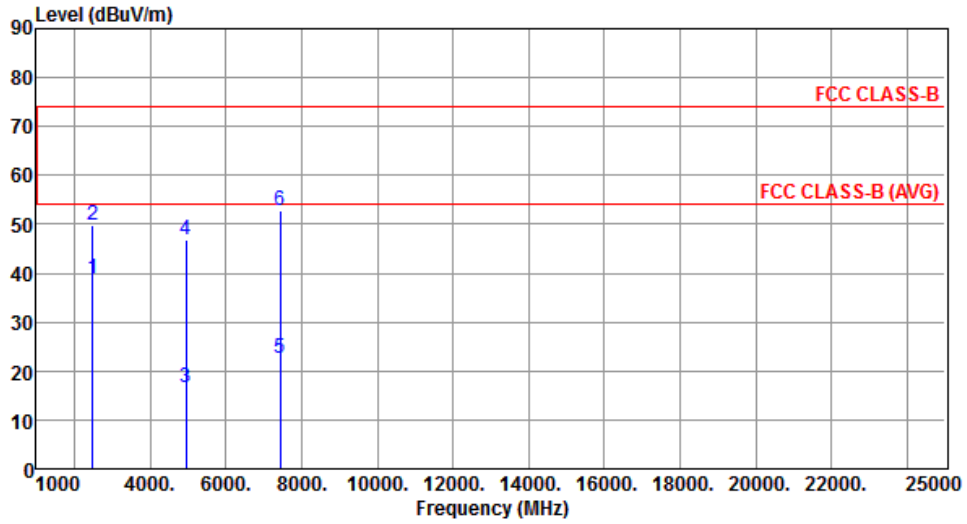


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	38.95	54.00	-15.05	39.56	-0.61	Average	148	165
2	2483.50	49.86	74.00	-24.14	50.47	-0.61	Peak	148	165
3	4960.00	16.76	54.00	-37.24	11.14	5.62	Average	123	94
4	4960.00	46.86	74.00	-27.14	41.24	5.62	Peak	123	94
5	7440.00	22.59	54.00	-31.41	12.03	10.56	Average	144	205
6	7440.00	52.69	74.00	-21.31	42.13	10.56	Peak	144	205

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical		

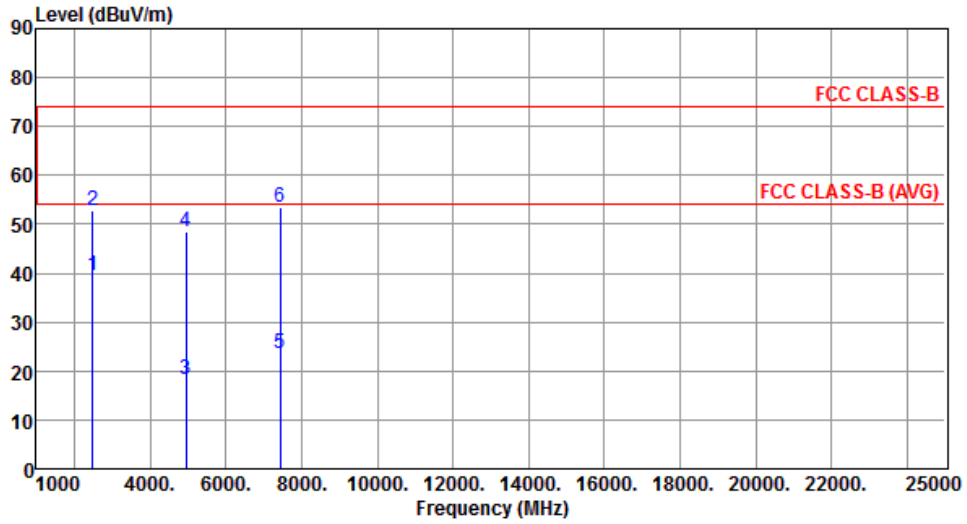

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.61	54.00	-14.39	40.22	-0.61	Average	164	78
2	2483.50	52.89	74.00	-21.11	53.50	-0.61	Peak	164	78
3	4960.00	18.26	54.00	-35.74	12.64	5.62	Average	145	152
4	4960.00	48.36	74.00	-25.64	42.74	5.62	Peak	145	152
5	7440.00	23.45	54.00	-30.55	12.89	10.56	Average	164	135
6	7440.00	53.55	74.00	-20.45	42.99	10.56	Peak	164	135

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement


1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


3.3.3 Test Setup




3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands


GFSK

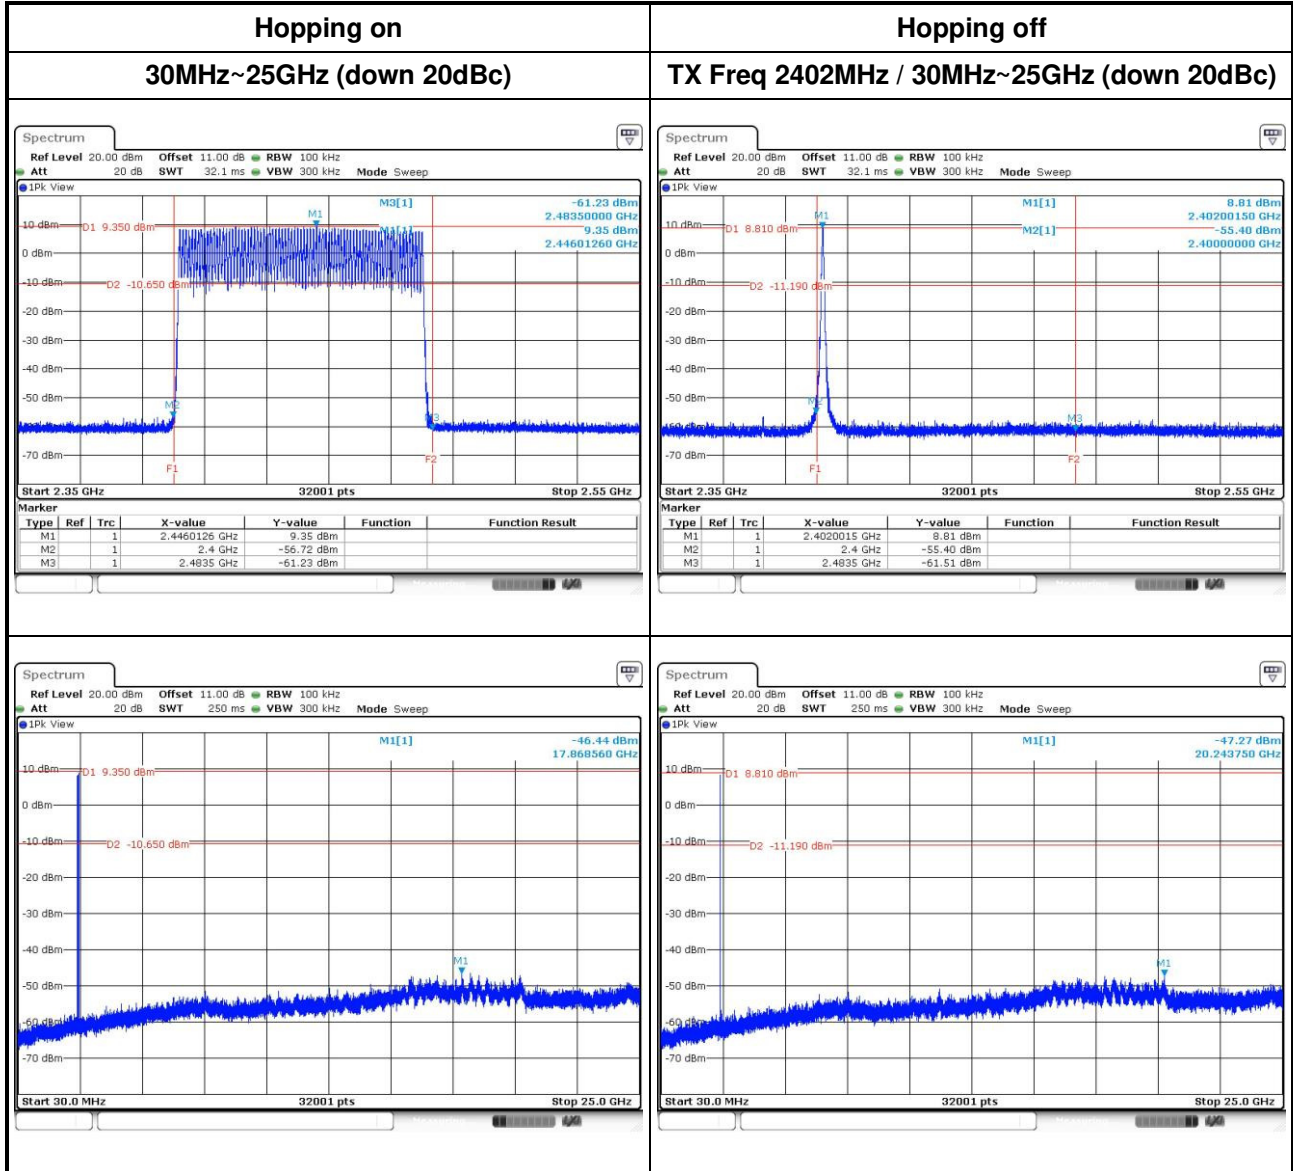

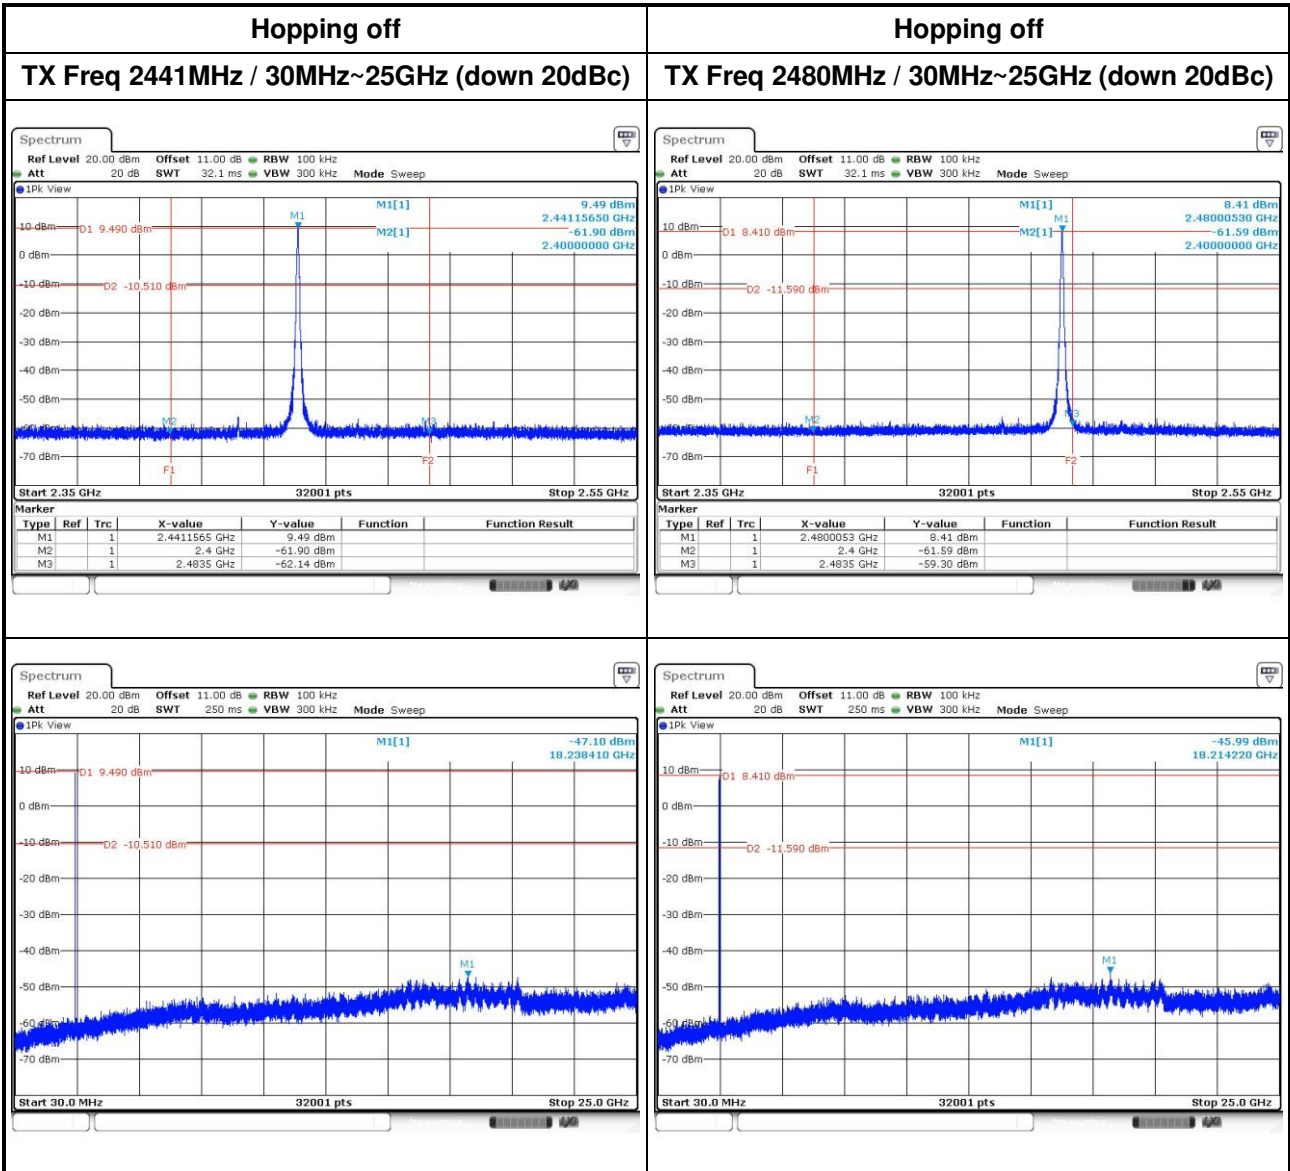

8DPSK

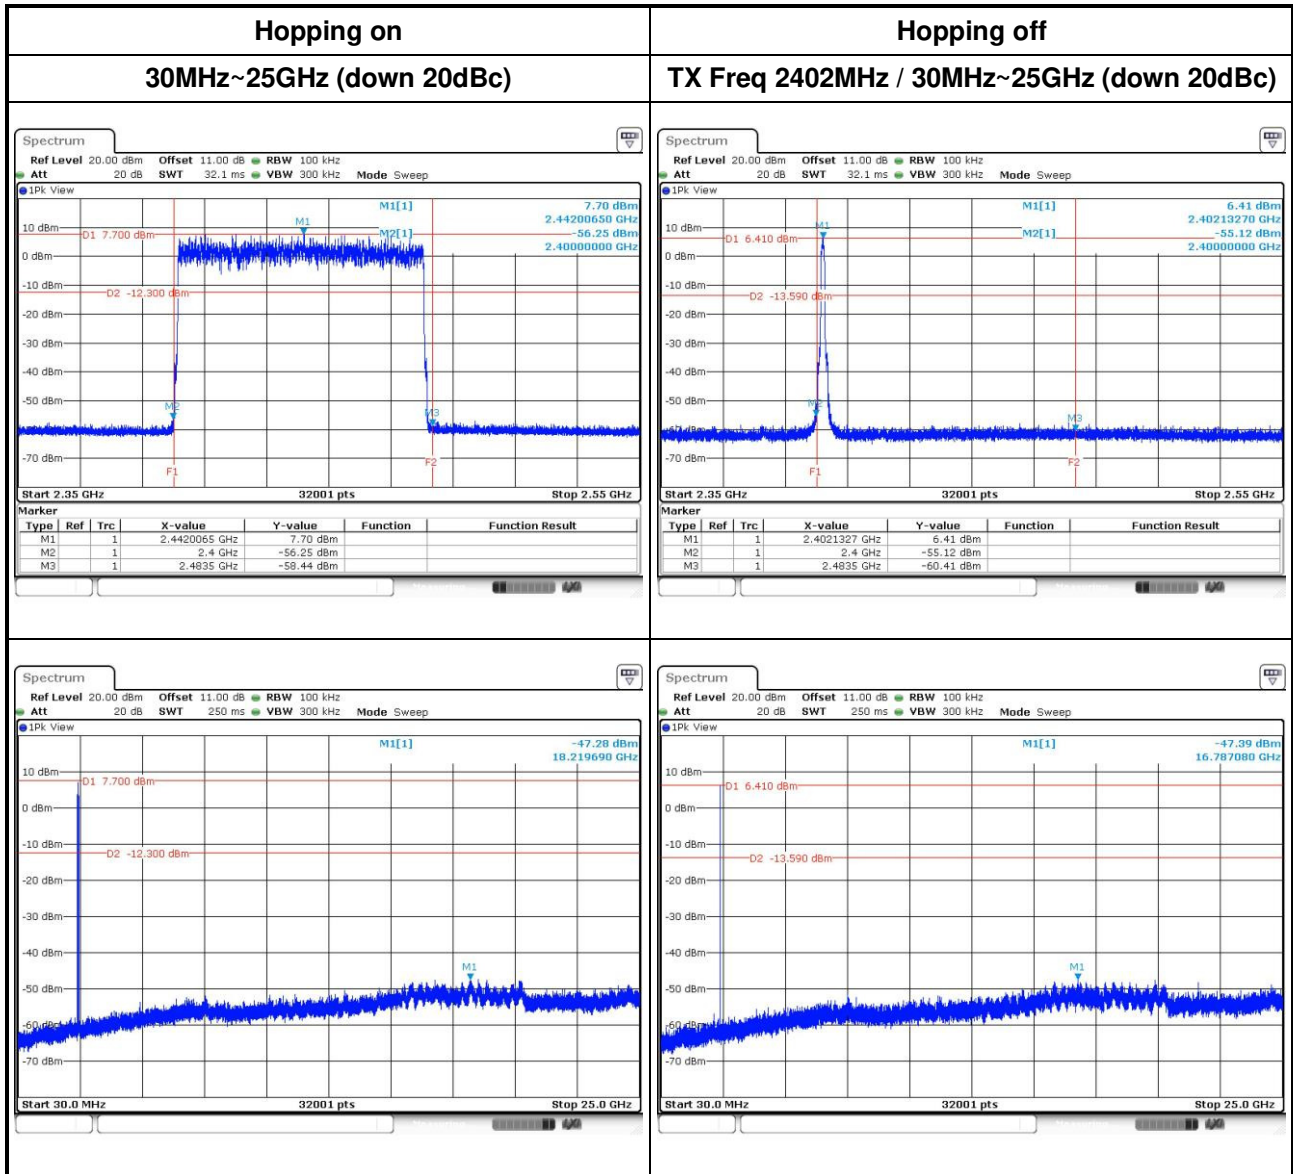

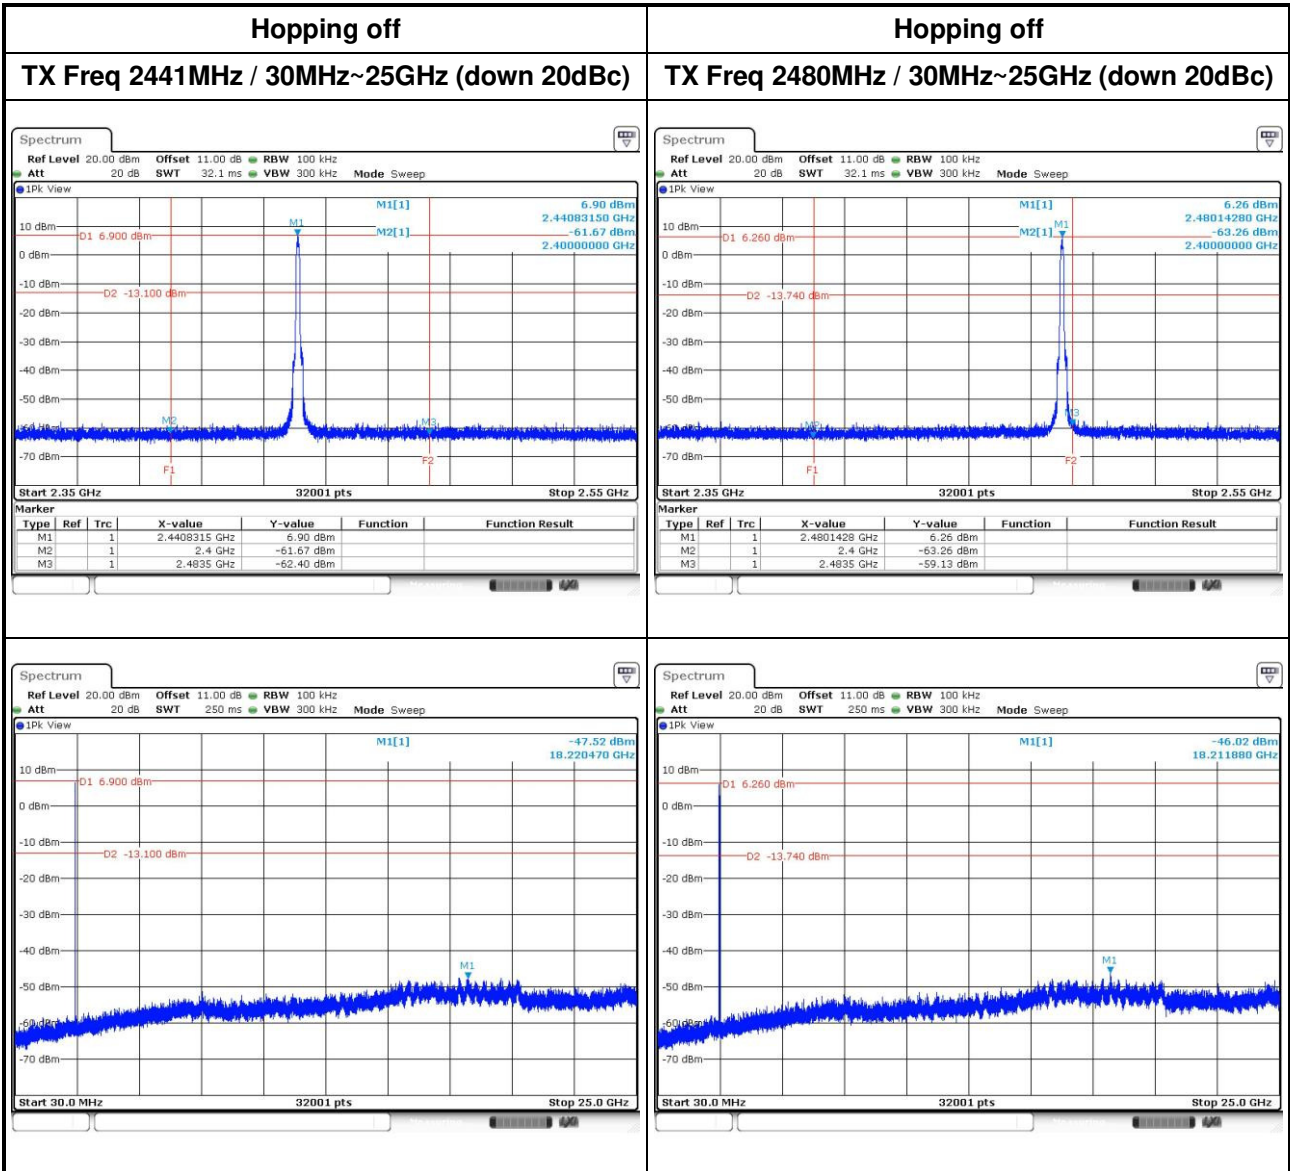

3.4 Conducted Output Power


3.4.1 Limit of Conducted Output Power

- 1 Watt
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
- 0.125 Watt
For all other frequency hopping systems in the 2400–2483.5 MHz band.
- 0.125 Watt
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup



3.4.4 Test Result of Conducted Output Power

Modulation Mode	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (mW)
GFSK	2402	8.59	9.34	125
GFSK	2441	10.12	10.05	125
GFSK	2480	7.78	8.91	125
π/4 DQPSK	2402	9.73	9.88	125
π/4 DQPSK	2441	11.02	10.42	125
π/4 DQPSK	2480	8.85	9.47	125
8DPSK	2402	10.72	10.3	125
8DPSK	2441	12.05	10.81	125
8DPSK	2480	9.46	9.76	125

Modulation Mode	Freq. (MHz)	AV Output Power (mW)	AV Output Power (dBm)
GFSK	2402	8.22	9.15
GFSK	2441	9.66	9.85
GFSK	2480	7.38	8.68
π/4 DQPSK	2402	5.51	7.41
π/4 DQPSK	2441	6.37	8.04
π/4 DQPSK	2480	4.98	6.97
8DPSK	2402	5.48	7.39
8DPSK	2441	6.32	8.01
8DPSK	2480	4.94	6.94

Note: Average power is for reference only.

3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.


3.5.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

3.5.3 Test Setup

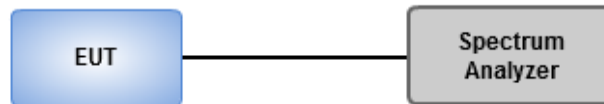

3.5.4 Test Result of Number of Hopping Frequency

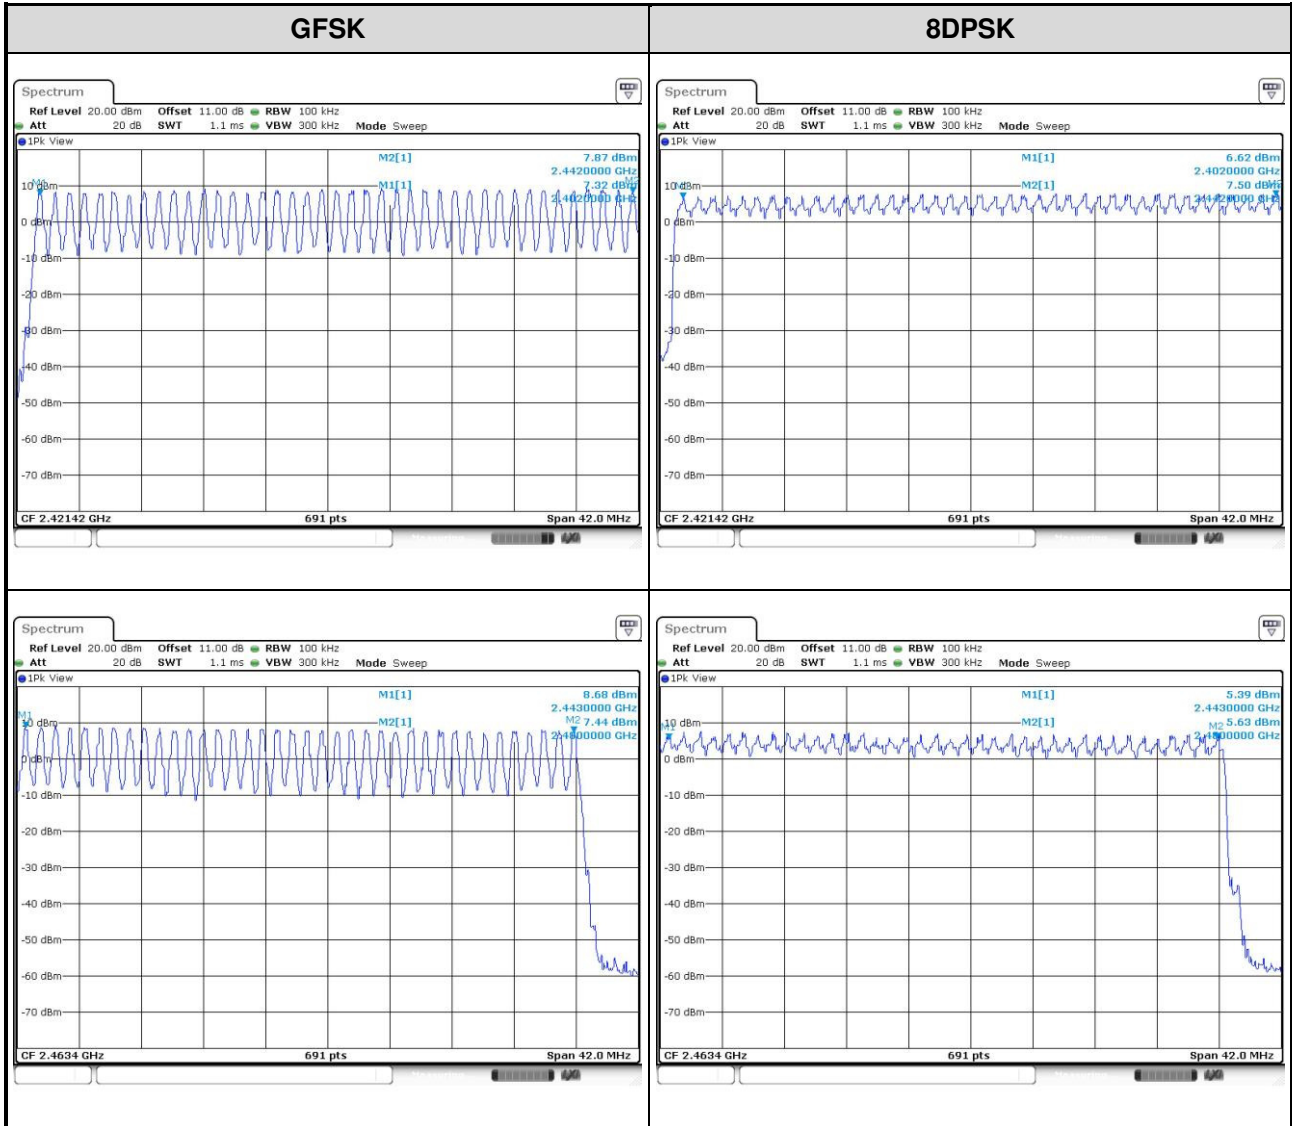

3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures


20dB Bandwidth

1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak, Trace max hold
2. Allow trace to stabilize
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth


1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Sample, Trace max hold
2. Allow trace to stabilize
3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup



3.6.3 Test result of 20dB and Occupied Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
GFSK	2402	0.987	0.912
GFSK	2441	0.957	0.907
GFSK	2480	0.974	0.907
8DPSK	2402	1.287	1.177
8DPSK	2441	1.287	1.177
8DPSK	2480	1.287	1.177

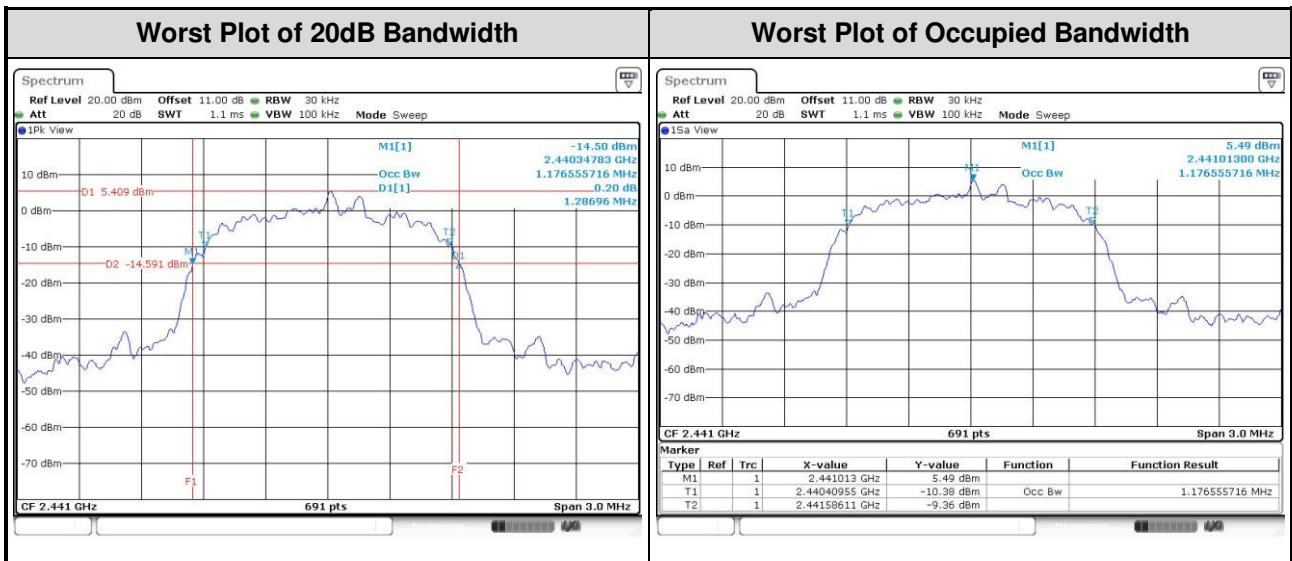

3.7 Channel Separation


3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures


1. Set RBW=100kHz, VBW=300kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup

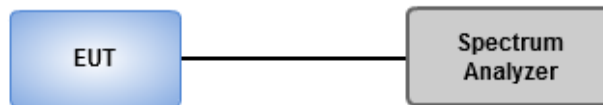

3.7.4 Test result of Channel Separation

Modulation Mode	Freq. (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)
GFSK	2402	1.003	0.987	0.658
GFSK	2441	1.003	0.957	0.638
GFSK	2480	1.003	0.974	0.649
8DPSK	2402	1.003	1.287	0.858
8DPSK	2441	1.003	1.287	0.858
8DPSK	2480	1.003	1.287	0.858

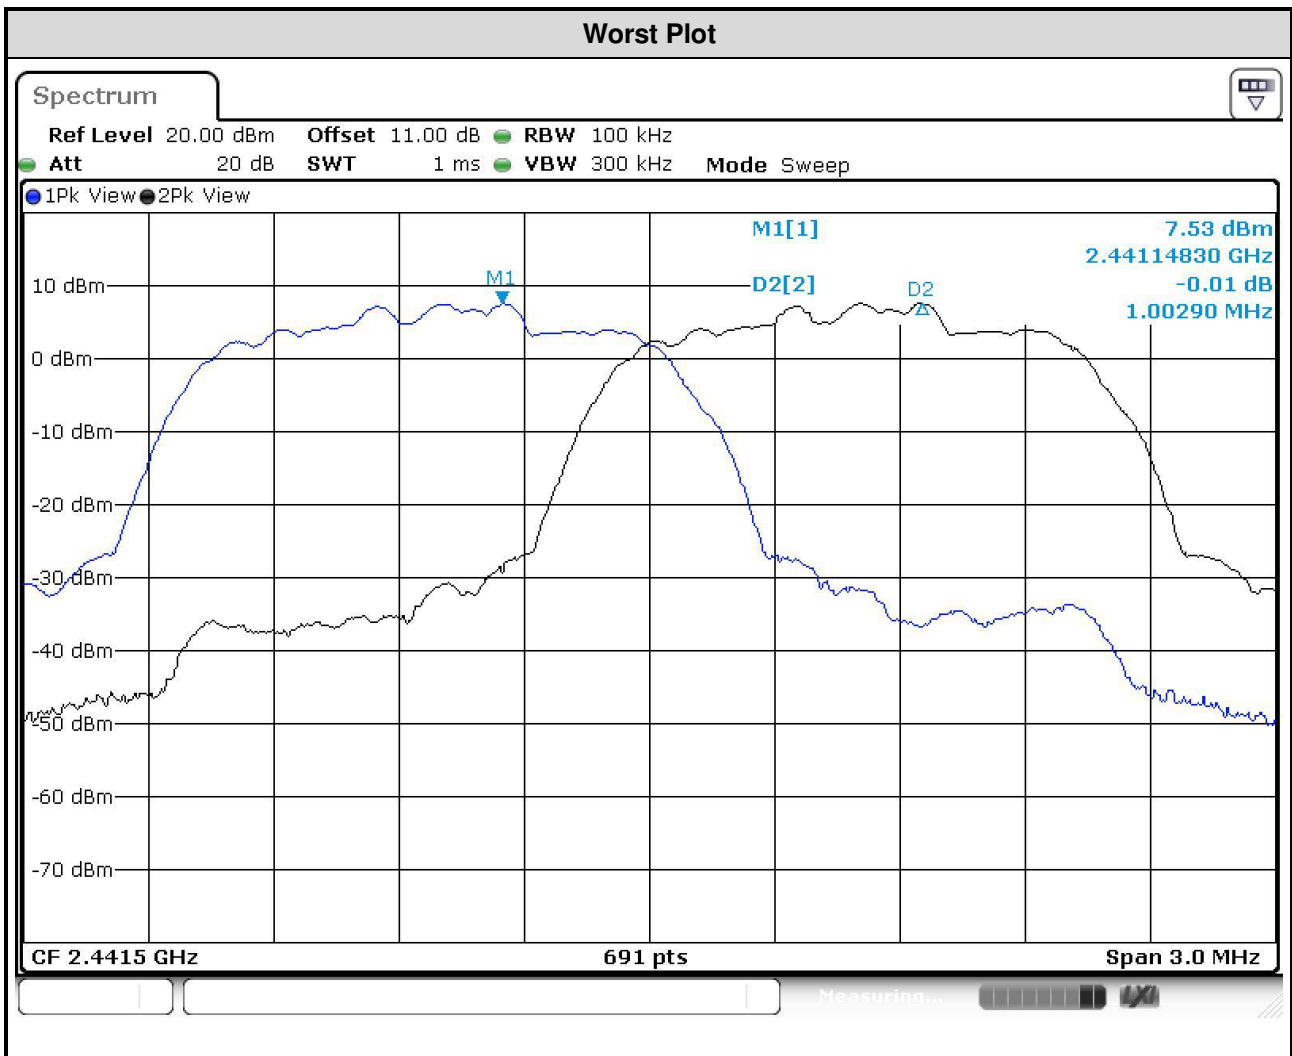

3.8 Number of Dwell Time


3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures


1. Set RBW=100kHz,VBW=300kHz,Sweep time = 500us(DH1),2ms(DH3),4ms(DH5), Detector=Peak, Span=0Hz,Trace max hold
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
5. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds


3.8.3 Test Setup



3.8.4 Test Result of Dwell Time

Modulation Mode	Freq. (MHz)	Length of Transmission Time (msec)	Number of Transmission in a 31.6 (79 Hopping*0.4)	Result (s)	Limit (s)
GFSK-DH1	2402	0.42899	320	0.137	0.4
GFSK-DH3	2402	1.68478	160	0.270	0.4
GFSK-DH5	2402	2.93623	106.6	0.313	0.4
8DPSK-DH1	2402	0.42609	320	0.136	0.4
8DPSK-DH3	2402	1.68333	160	0.269	0.4
8DPSK-DH5	2402	2.94130	106.6	0.314	0.4

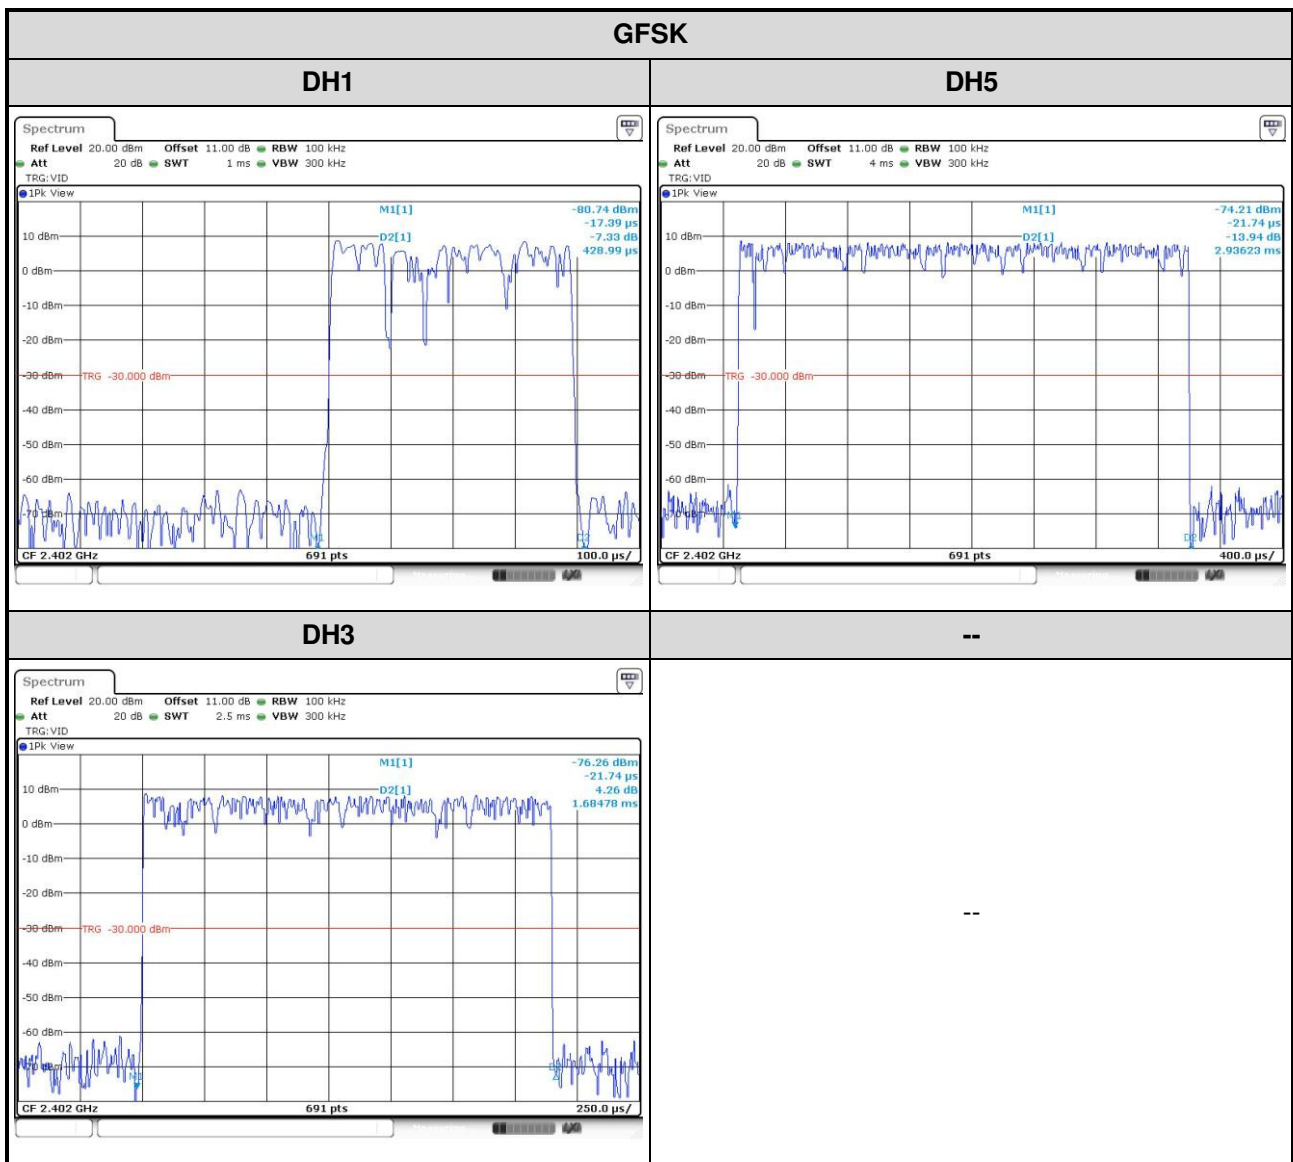

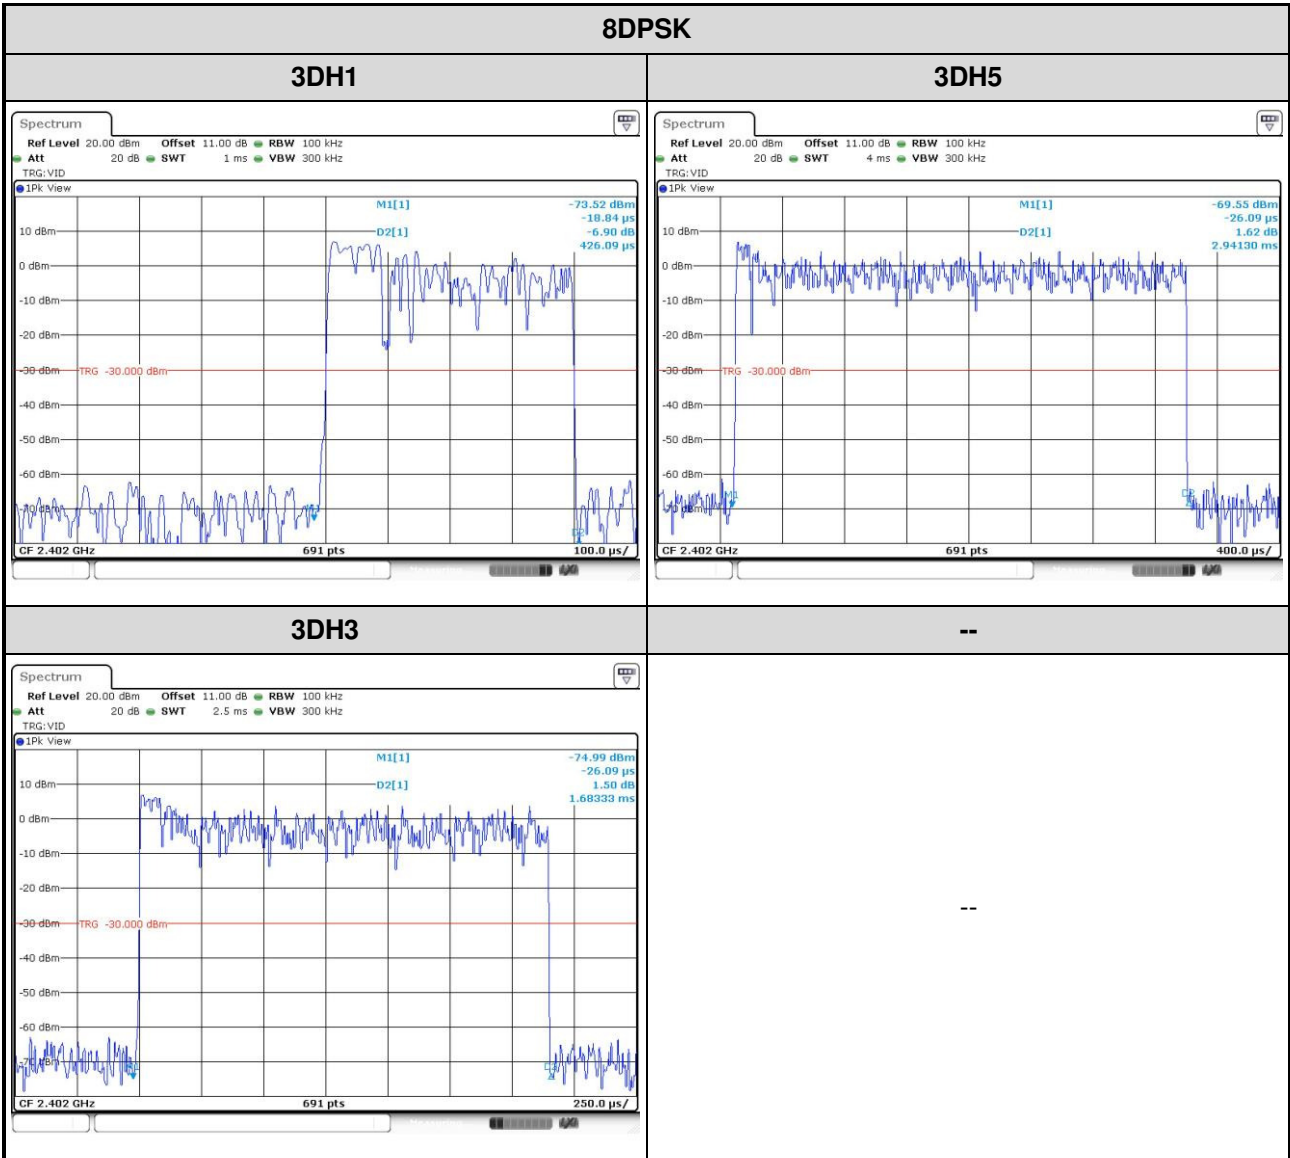

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C..

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==