

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF		
Product Name:	Mobile Phone		
Brand Name:	FUJITSU		
Model No.:	F-04J		
Model Different:	N/A		
FCC ID:	VQK-F04J		
Report No.:	ER/2016/B0023		
Issue Date:	Dec. 14, 2016		
FCC Rule Part:	§15.225		
Prepared for:	Fujitsu Limited 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki 211-8588, Japan		
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803		
Desting Laboratory 0913	Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



VERIFICATION OF COMPLIANCE

Applicant:	Fujitsu Limited 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki 211-8588,
	Japan
Product Name:	Mobile Phone
Brand Name:	FUJITSU
Model No.:	F-04J
Model Difference:	N/A
FCC ID:	VQK-F04J
File Number:	ER/2016/B0023
Date of test:	Nov. 07, 2016 ~ Dec. 01, 2016
Date of EUT Received:	Nov. 07, 2016

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2014 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.225.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Marcus Tseng	Date:	Dec. 14, 2016
Prepared By:	Marcus Tseng / Engineer Karen Huang	Date:	Dec. 14, 2016
Approved By	Karen Huang / Clerk Jim Chang Jim Chang / Asst. Manager	Date:	Dec. 14, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Revision History

Report Number	Revision	Description	Issue Date
ER/2016/B0023	Rev.00	Initial creation of document	Dec. 14, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction forme exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號



Contents

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	.11
4	DESCRIPTION OF TEST MODES	.11
5	MEASUREMENT UNCERTAINTY	12
6	CONDUCTED EMISSIONS TEST	12
7	RADIATED EMISSION TEST	16
8	FREQUENCY TOLERANCE	29
9	20 dB OCCUPIED BANDWIDTH MEASUREMENT	31
10	ANTENNA REQUIREMENT	32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路134號



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	Mobile Phone			
Brand Name:	FUJITSU			
Model No.:	F-04J			
Model Difference:	N/A			
Hardware Version:	V2.1.0	V2.1.0		
Software Version:	R026.3e			
Cradle:	Model No.: F46, Supplier: FUJITSU LIMITED			
	3.8Vdc from Rechargeable Li-ion Battery or 5Vdc from AC/DC Adapter / Cradle			
Power Supply:	Battery: Model No.: F35, Supplier: FUJITSU CONNECTED TECHNOLOGIES LIMITED			
Adaj		Model No.: FMV-AC346, Supplier: FUJITSU LIMITED		

NFC:

0.	
Operating Frequency	13.56MHz
Transmit Power	< 123dBuV/m at 3m.
Number of Channels	1
Antenna Type	Loop Antenna
Modulation Type	ASK

This report complies with FCC regulatory radio rule with respect to RFID that operates on 13.56MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



1.2 Product Feature of Equipment Under Test

The equipment under Test (Hereafter Called: EUT) is supporting below features

Product Feature			
GSM Operating Band(s)	GSM 850/1900MHz		
GPRS Multi Slot Class	GPRS Class 11		
WCDMA Operating Band(s)	FDD Band V		
WCDMA Rel. Version	Rel.9		
Bluetooth Version	V4.2 dual mode		
Wi-Fi Specification	802.11 a/b/g/n/ac		
NFC Specification	NFC		

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Test Methodology

FCC Part 15, Suppart C §15.225

ANSI C63.10:2013 Note: All test items have been performed and record as per the above standards...

1.4 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333 (TAF code 0513)

FCC Registration Numbers are: 735305

1.5 Special Accessories

There is no special accessory used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode, the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz., The CISPR Quasi-Peak and Average detector mode is employed according to §15.107. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m above the reference ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.4 Limitation

(1) Conducted Emission

According to section 15.207(a) Conducted Emission Limits is as following.

Frequency range	Limits dB (uV)		
MHz	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	
Note			

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

⁽²⁾ Radiated Emission

- a. The field strength of any emission within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- b. Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c. Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d. The field strength of any emissions appearing outside of the 13.110-14.010 MHz shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field strength μV/m	Distance (m)	Field strength at 3m dBµV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Remark 1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- Distance extrapolation factor = 40 log (required distance/ test distance) (dB);
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement. Ex.20*log(30)+40*log(30/3) = 69.54dBuV/m
- Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205 and RSS-Gen 7.2.5 Table 3.
- 6. The general radiated emission limits in ξ 15.209 and RSS-Gen 7.2.5 Table 5 and Table 6 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.

⁽³⁾ Frequency Tolerance

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

lte m	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	NFC Test software	Tera Term	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207	AC Power Line Conducted Emission	Compliant
§15.225 (a)-(d)	Radiated Emission	Compliant
§15.209	Radiated Emission Limits, general requirement	Compliant
§15.225 (e)	Frequency Stability	Compliant
§2.1049 §15.215 (c)	20 dB OCCUPIED BANDWIDTH	Compliant
§15.203	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES 4

The EUT stay in continuous transmitting mode. The frequency 13.56MHz is the default channel to test, where it is the only manipulative channel as this application supports.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth Transmitter for channel Low, Mid and High the worst case E1 position was reported.

The data rate as the lowest supported is selected while tests are conducted.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty		
AC Power Line Conducted Emission	+/- 2.586 dB		
Frequency Stability	+/- 123.36 Hz		
20 dB OCCUPIED BANDWIDTH	+/- 123.36 Hz		
Temperature	+/- 0.8 °C		
Humidity	+/- 4.7 %		
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%		

Radiated Spurious Emission: Measurement uncertainty

9kHz - 30MHz: +/- 2.3dB

	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty (Polarization : Vertical)	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB

Magguramantungartaintu	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty (Polarization : Horizontal)	167MHz -500MHz: +/- 3.44dB
(i bialization : honzonta)	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

CONDUCTED EMISSIONS TEST 6


6.1 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Sweep frequency starting from 150 kHz to 30 MHz for phase L1.
- 4. Repeating the measurement as lists above for phase neutral.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.2 Test SET-UP (Block Diagram of Configuration)

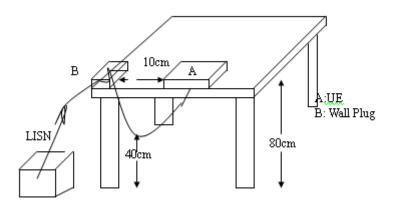

6.3 Measurement Equipment Used:

	Conducted Emission Test Site										
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.							
EMI Test Receiver	R&S	ESCI7	100760	05/10/2016	05/09/2017						
LISN	SCHWARZBE CK	NSLK 8127	8127-649	05/16/2016	05/15/2017						
LISN	MESS TEC	FCC-LISN-50/25 0-25-2-01	4034	05/16/2016	05/15/2017						
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2016	11/25/2017						


6.4 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



AC POWER LINE CONDUCTED EMISSION TEST DATA

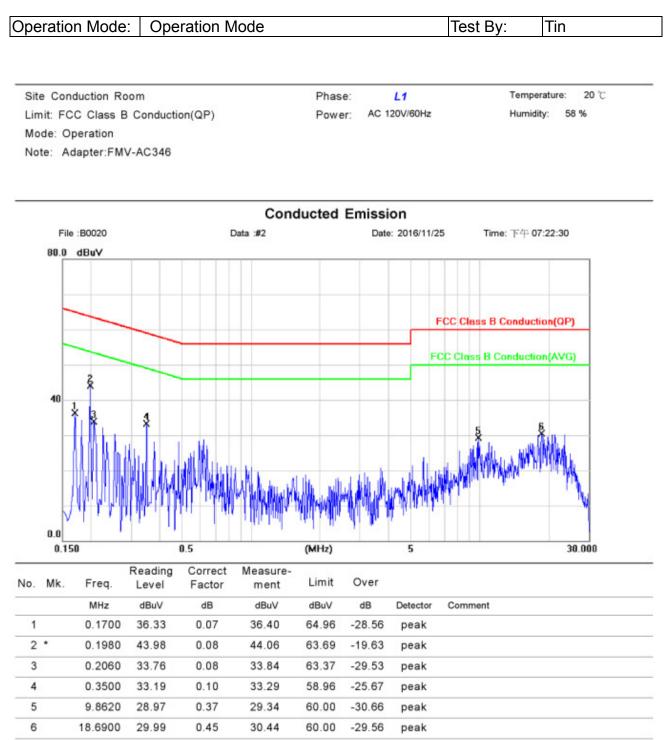


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Temperature: 20 °C Site Conduction Room Phase: Ν AC 120V/60Hz Humidity: 58 % Limit: FCC Class B Conduction(QP) Power: Mode: Operation Note: Adapter:FMV-AC346

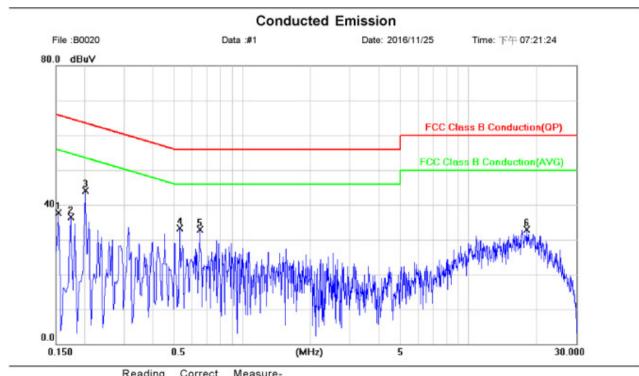

No.	Mk.	Freq.	Level	Factor	ment	Limit	Over			
0		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1		0.1540	37.70	0.07	37.77	65.78	-28.01	peak		
2		0.1740	36.35	0.07	36.42	64.77	-28.35	peak		
3	*	0.2020	44.04	0.08	44.12	63.53	-19.41	peak		
4		0.5300	33.21	0.10	33.31	56.00	-22.69	peak		
5		0.6500	32.74	0.11	32.85	56.00	-23.15	peak		
6		18.1380	32.44	0.44	32.88	60.00	-27.12	peak		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號




RADIATED EMISSION TEST 7

7.1 Measurement Procedure


- The EUT was placed on a turn table which is 0.8m above ground plane. 1.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

7.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

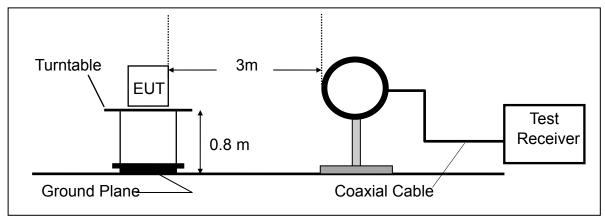

Radiated Emission Test Set-Up, Frequency Below 1000MHz (B)

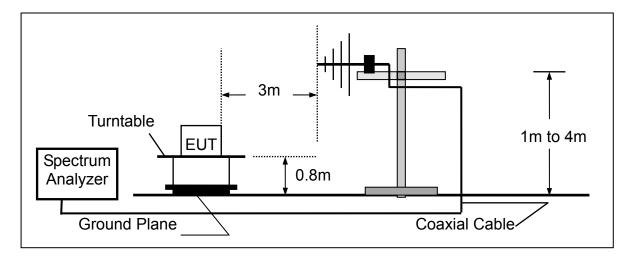

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.3 Measurement Equipment Used:

		SGS 966 Cham	ber No.C		
Name of Equipment	Manutacturer		Serial Number	Calibration Date	Calibration Due
EMI Test Receiver	R&S	ESCI7	100760	05/10/2016	05/09/2017
Spectrum Analyzer	Agilent	E4446A	MY51100003	01/29/2016	01/28/2017
Loop Antenna	ETS-Lindgren	6502	143303	12/23/2015	12/22/2016
Bilog Antenna	SCHWAZBECK	VULB9168	378	12/14/2015	12/13/2016
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/01/2016	07/31/2017
Pre-Amplifier	Agilent	8447D	2944A07676	01/02/2016	01/01/2017
Pre-Amplifier	EMC Instruments Corp.	EMC0126530	980038	01/02/2016	01/01/2017
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	ChamPro	AM-BS-4500-B	060776-ABS	N.C.R	N.C.R
Controller	ChamPro	EM1000	60776	N.C.R	N.C.R
Low Loss Cable	Huber Suhner	966_RX	9	01/02/2016	01/01/2017
3m Site NSA	SGS	966 chamber	N/A	07/01/2016	06/30/2017
Low Loss Cable	Huber Suhner	966 TX	1	01/02/2016	01/01/2017
Horn Antenna	Schwarzbeck	BBHA9170	184	12/12/2015	12/11/2016
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/02/2016	01/01/2017



7.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

7.5 Field Strength of Fundamental Emission

7.5.1 Limit

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The Limit is converted to 123.90dBuV/m by offsetting the distance extrapolation factor as measurement distance is taken place at 3 meters.

Distance extrapolation = $40 \times \log(30/3) = 40 \, dB$

Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 40 = 124.00dBuV/m


Note:

Actual FS(dB μ V/m) = Spectrum. Reading level(dB μ V) + Factor(dB) Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB) "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note : "E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.


The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



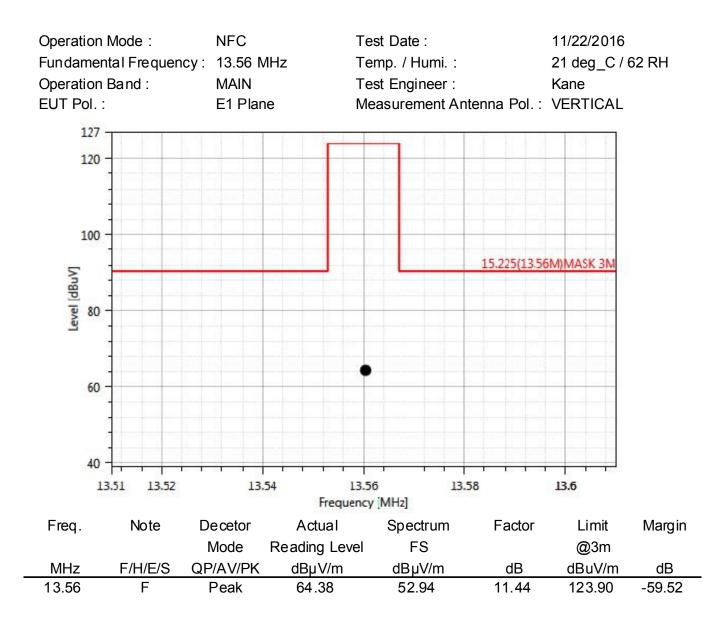



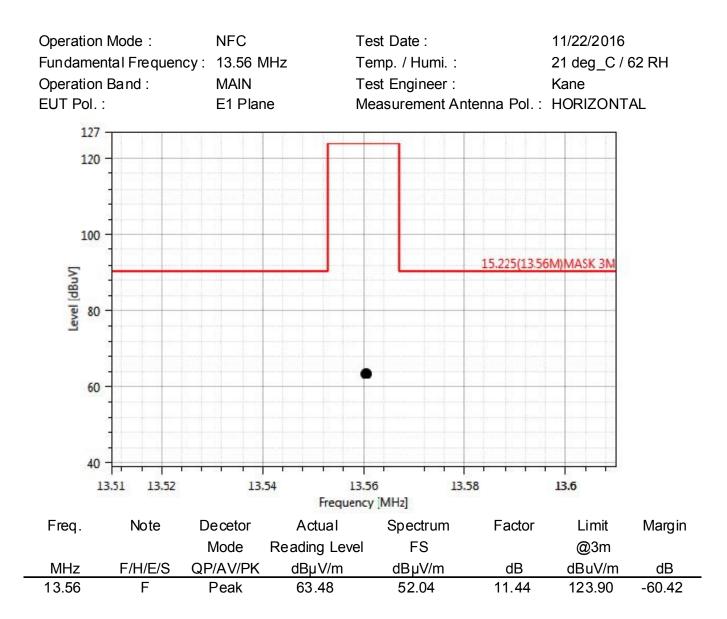

Report No: ER/2016/B0023 Page: 21 of 32



7.5.2 Radiated Mask

- (a) 15.848 millivolts/m (84 dBµV/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dBµV/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dBµV/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.

Distance extrapolation = $40 \times \log(30/3) = 40 \text{ dB}$

Limit is re-adjusted in terms of limit taken in 3m for the following frequency segment of the interest:

- a) 20 *log (15848uV/m) + 40dB = 124.00dBuV/m
- b) 20 *log(334uV/m) + 40dB = 90.47dBuV/m
- c) 20*log(106uV/m) + 40dB = 80.50dBuV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



NFC **Operation Mode :** Fundamental Frequency: 13.56 MHz **Operation Band :** MASK EUT Pol.: E1 Plane

Test Date : 11/22/2016 Temp. / Humi. : 21 deg_C / 62 RH Test Engineer : Kane Measurement Antenna Pol.: VERTICAL

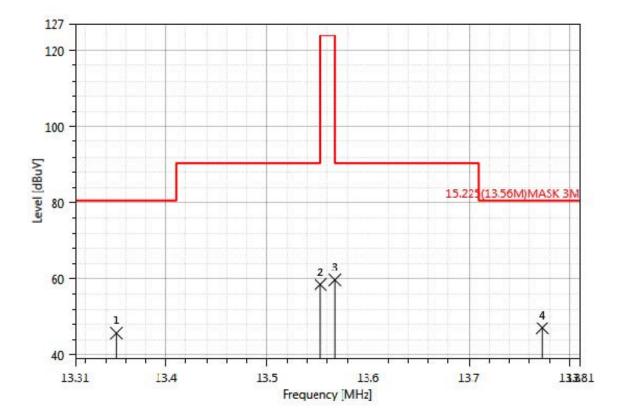


Fre	q. Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
		Mode	Reading Level	FS		@3m	
MH	z F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
13.3	5 S	Peak	45.70	34.27	11.43	80.50	-34.80
13.5	5 S	Peak	58.52	47.08	11.44	90.47	-31.95
13.5	7 S	Peak	59.68	48.24	11.44	90.47	-30.79
13.7	7 S	Peak	47.05	35.61	11.44	80.50	-33.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



NFC **Operation Mode :** Fundamental Frequency: 13.56 MHz **Operation Band :** MASK EUT Pol.: E1 Plane

Test Date : 11/22/2016 Temp. / Humi. : 21 deg_C / 62 RH Test Engineer : Kane Measurement Antenna Pol.: HORIZONTAL

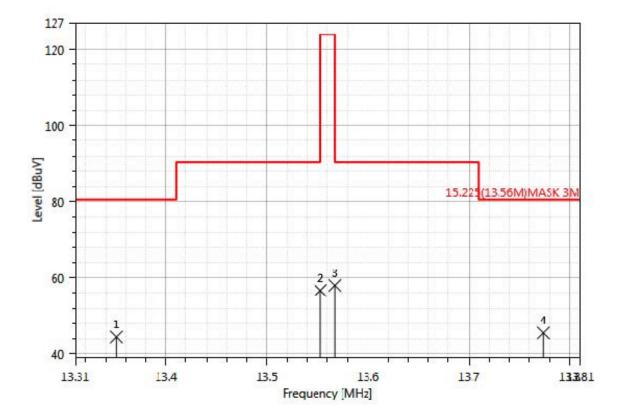

Fre	eq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin
			Mode	Reading Level	FS		@3m	
M	Hz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB
13.	35	S	Peak	44.49	33.06	11.43	80.50	-36.01
13.	55	S	Peak	56.69	45.26	11.44	90.47	-33.78
13.	57	S	Peak	58.00	46.57	11.44	90.47	-32.47
13.	77	S	Peak	45.53	34.09	11.44	80.50	-34.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.5.3 Radiated Emission –

Limit:

§15.225

(d) 30 microvolts/m (29.4 dBµV/m) at 30 m, outside the band 13.110-14.010 MHz.

Limit is converted by adding the distance extrapolation factor as the measurement

distance

was taken place at 3m. §RSS-210 A2.6

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

a) 20*log(30uV/m) + 40dB = 69.54 dBuV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



14.94

18.26

24.70

25.90

27.12

28.64

S

S

S

S

Н

S

NFC **Operation Mode :** Test Date : 11/22/2016 Fundamental Frequency : 13.56 MHz Temp. / Humi. : 21 deg_C / 62 RH **Operation Band :** ТΧ Test Engineer : Kane EUT Pol.: E1 Plane Measurement Antenna Pol.: VERTICAL 127 120 100 Level [dBuV] 80 15.225(13.56M)MASK 3N 60 40 4 7 3 ¥ ж 10 15 20 25 30 Frequency [MHz] Limit Freq. Decetor Actual Spectrum Margin Note Factor Mode Reading Level FS @3m MHz F/H/E/S QP/AV/PK dBµV/m dBµV/m dB dBuV/m dB 10.30 Peak 24.77 13.42 11.34 69.54 -44.77 S

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Peak

Peak

Peak

Peak

Peak

Peak

28.07

27.48

31.45

37.46

44.88

31.50

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

16.60

15.94

21.19

27.47

35.18

22.14

11.46

11.54

10.27

9.98

9.70

9.36

69.54

69.54

69.54

69.54

69.54

69.54

-41.47

-42.06


-38.09

-32.08

-24.66


-38.04



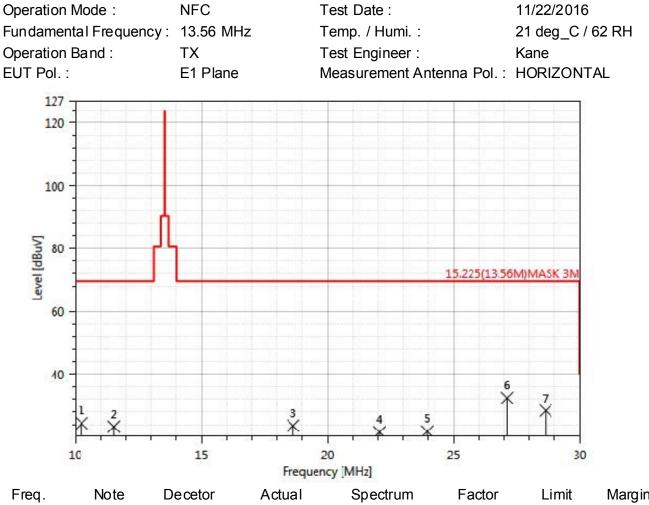


Freq.	Note	Decetor	Actual	Spectrum	Factor	Limit	Margin	
		Mode	Reading Level	FS		@3m		
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB	_
10.26	S	Peak	24.39	13.05	11.34	69.54	-45.15	
11.54	S	Peak	23.30	11.92	11.38	69.54	-46.24	
18.64	S	Peak	23.62	12.07	11.55	69.54	-45.92	
22.06	S	Peak	21.57	10.60	10.96	69.54	-47.97	
23.96	S	Peak	21.80	11.35	10.45	69.54	-47.74	
27.12	Н	Peak	32.48	22.78	9.70	69.54	-37.06	
28.64	S	Peak	28.38	19.02	9.36	69.54	-41.16	



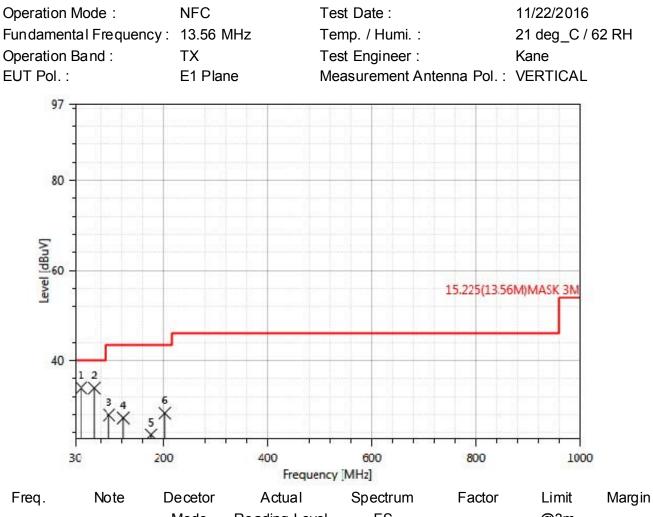

Fieq.	Note	Decetor	Actual	Spectrum	Factor		Margin	
		Mode	Reading Level	FS		@3m		
MHz	F/H/E/S	QP/AV/PK	dBµV/m	dBµV/m	dB	dBuV/m	dB	
41.64	S	Peak	33.89	42.27	-8.38	40.00	-6.11	
66.86	S	Peak	33.84	43.42	-9.58	40.00	-6.16	
94.99	S	Peak	27.89	41.03	-13.14	43.50	-15.61	
122.15	S	Peak	27.25	37.50	-10.25	43.50	-16.25	
175.50	S	Peak	23.46	31.67	-8.21	43.50	-20.04	
202.66	S	Peak	28.28	37.99	-9.71	43.50	-15.22	



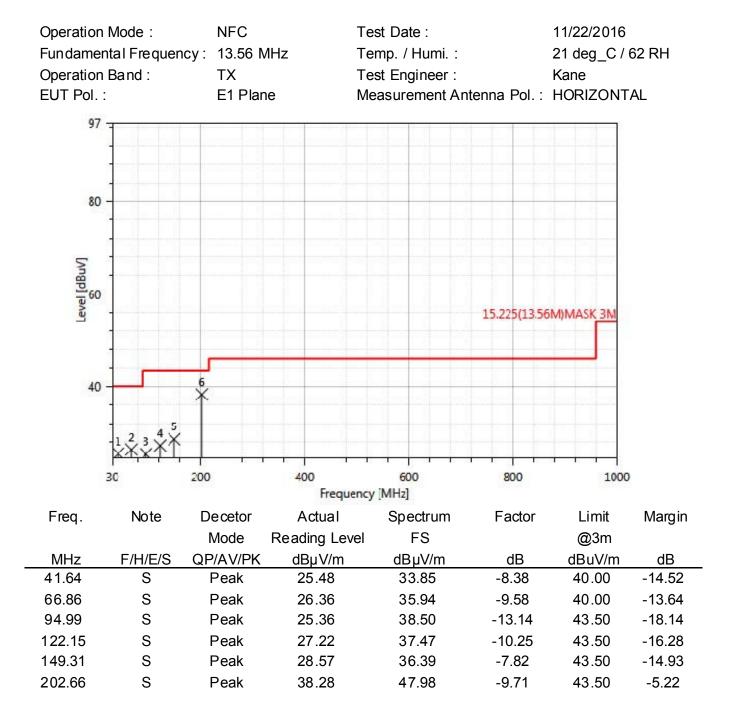



FREQUENCY TOLERANCE 8


8.1 **Measurement Procedure**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set EUT as normal operation
- 3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10kHz, Span =100kHz.

Temperature Chamber

4. Set SPA Max hold. Mark peak.

8.2 Test SET-UP (Block Diagram of Configuration)

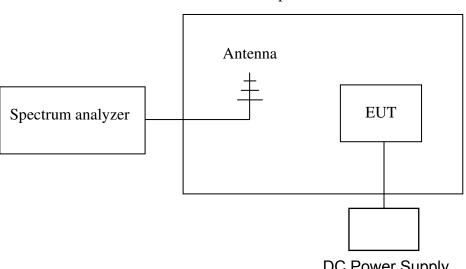

DC Power Supply

Measurement Equipment Used: 8.3

Conducted Emission Test Site									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
EXA Spectrum Analyzer	Agilent	N9030A	MY53120760	02/26/2016	02/25/2017				
Loop Antenna	ETS-Lindgren	6502	143303	12/23/2015	12/22/2016				
DC Power Supply	Agilent	E3640A	MY52410006	11/21/2016	11/20/2017				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



8.4 Measurement Results

A. Temperature Variation

Power Supply	Environment	Frequency		
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (KHz)
3.9	-20	13.55966334	336.66300	+/- 1.356
3.9	-10	13.56016642	-166.41700	+/- 1.356
3.9	0	13.56033354	-333.54300	+/- 1.356
3.9	10	13.55916614	833.86300	+/- 1.356
3.9	20	13.56	0.00000	+/- 1.356
3.9	30	13.56	0.00000	+/- 1.356
3.9	40	13.56033344	-333.44400	+/- 1.356
3.9	50	13.55983361	166.38700	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (KHz)
Vdc	Temperature (°C)	(MHz)		
4.29	20	13.56	0.00000	+/- 1.356
3.9	20	13.56	0.00000	+/- 1.356
3.51	20	13.56016667	-166.66700	+/- 1.356



20 dB OCCUPIED BANDWIDTH MEASUREMENT 9

9.1 Standard Applicable:

§2.1049 & §15.215 (c)

9.2 Limit:

None

9.3 Test Set-up

Refer to section 6.2 in this report

9.4 Measurement Procedure


20dB bandwidth

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 1 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.

9.5 Measurement Equipment Used:

Refer to section 6.3 in this report

-20dB Bandwidth

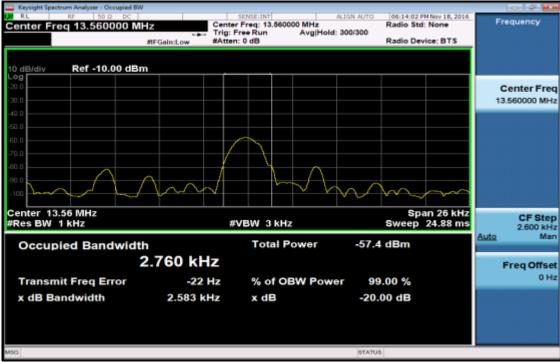

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10 ANTENNA REQUIREMENT

10.1 Standard Applicable:

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

10.2 Antenna Connected Construction:

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.