

## FCC Test Report

**Report No.:** RF171221C06-2

**FCC ID:** VQK-F04K

**Test Model:** F-04K

**Received Date:** Dec. 21, 2017

**Test Date:** Feb. 15, 2018 ~ Feb. 27, 2018

**Issued Date:** Mar. 05, 2018

**Applicant:** Fujitsu Limited

**Address:** 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki 211-8588, Japan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan  
( R.O.C )

**Test Location (1):** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan  
Hsien 333, Taiwan, R.O.C.

**FCC Registration /**  
**Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate of Conformity .....</b>	<b>5</b>
<b>2 Summary of Test Results.....</b>	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal .....	11
3.4 Description of Support Units .....	12
3.4.1 Configuration of System under Test .....	12
3.5 General Description of Applied Standards.....	12
<b>4 Test Types and Results .....</b>	<b>13</b>
4.1 Radiated Emission and Bandedge Measurement .....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	13
4.1.2 Test Instruments .....	14
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard .....	16
4.1.5 Test Set Up .....	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results .....	19
4.2 Conducted Emission Measurement.....	29
4.2.1 Limits of Conducted Emission Measurement .....	29
4.2.2 Test Instruments .....	29
4.2.3 Test Procedures.....	30
4.2.4 Deviation from Test Standard .....	30
4.2.5 Test Setup.....	30
4.2.6 EUT Operating Conditions.....	30
4.2.7 Test Results .....	31
4.3 6 dB Bandwidth Measurement.....	33
4.3.1 Limits of 6 dB Bandwidth Measurement.....	33
4.3.2 Test Setup.....	33
4.3.3 Test Instruments .....	33
4.3.4 Test Procedure .....	33
4.3.5 Deviation from Test Standard .....	33
4.3.6 EUT Operating Conditions.....	33
4.3.7 Test Result .....	34
4.4 Occupied Bandwidth Measurement.....	36
4.4.1 Test Setup.....	36
4.4.2 Test Instruments .....	36
4.4.3 Test Procedure .....	36
4.4.4 Deviation from Test Standard .....	36
4.4.5 EUT Operating Conditions.....	36
4.4.6 Test Results .....	37
4.5 Conducted Output Power Measurement .....	39
4.5.1 Limits of Conducted Output Power Measurement.....	39
4.5.2 Test Setup.....	39
4.5.3 Test Instruments .....	39
4.5.4 Test Procedures.....	39
4.5.5 Deviation from Test Standard .....	39
4.5.6 EUT Operating Conditions.....	39
4.5.7 Test Results .....	40

4.6 Power Spectral Density Measurement .....	41
4.6.1 Limits of Power Spectral Density Measurement.....	41
4.6.2 Test Setup.....	41
4.6.3 Test Instruments .....	41
4.6.4 Test Procedure .....	41
4.6.5 Deviation from Test Standard .....	41
4.6.6 EUT Operating Condition .....	41
4.6.7 Test Results .....	42
4.7 Conducted Out of Band Emission Measurement .....	44
4.7.1 Limits of Conducted Out of Band Emission Measurement.....	44
4.7.2 Test Setup.....	44
4.7.3 Test Instruments .....	44
4.7.4 Test Procedure .....	44
4.7.5 Deviation from Test Standard .....	44
4.7.6 EUT Operating Condition .....	44
4.7.7 Test Results .....	45
<b>5 Pictures of Test Arrangements.....</b>	<b>51</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>52</b>

### Release Control Record

Issue No.	Description	Date Issued
RF171221C06-2	Original Release	Mar. 05, 2018

## 1 Certificate of Conformity

**Product:** Smart Phone

**Brand:** FUJITSU

**Test Model:** F-04K

**Sample Status:** Identical Prototype

**Applicant:** Fujitsu Limited

**Test Date:** Feb. 15, 2018 ~ Feb. 27, 2018

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Mar. 05, 2018

Ivonne Wu / Supervisor

**Approved by :**  , **Date:** Mar. 05, 2018

Dylan Chiou / Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -4.76 dB at 0.62702 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.80 dB at 2483.60 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Smart Phone
<b>Brand</b>	FUJITSU
<b>Test Model</b>	F-04K
<b>Status of EUT</b>	Identical Prototype
<b>Power Supply Rating</b>	5.0 Vdc (adapter or host equipment) 3.75 Vdc (Li-ion battery)
<b>Normal Testing Voltage</b>	3.9 Vdc
<b>Modulation Type</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>Modulation Technology</b>	DSSS, OFDM
<b>Transfer Rate</b>	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 72.2
<b>Operating Frequency</b>	2412 ~ 2462 MHz
<b>Number of Channel</b>	11
<b>Output Power</b>	226.986 mW
<b>Antenna Type</b>	$\lambda/4$ Monopole antenna with -2.0 dBi gain
<b>Antenna Connector</b>	N/A
<b>Accessory Device</b>	Refer to Note as below
<b>Data Cable Supplied</b>	Refer to Note as below

Note:

1. The EUT provides one transmitter and receiver.

Modulation Mode	Tx Function
802.11b	1TX
802.11g	1TX
802.11n (HT20)	1TX

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Battery	FUJITSU CONNECTED TECHNOLOGIES Ltd.	CA54310-0067	3.75 Vdc, 2850 mAh

3. The EUT uses following adapter which provided by client as support unit.

Product	Brand	Model	Description
Adapter	NTT docomo	AC Adapter 01	I/P: 100-240Vac, 0.8A, O/P: 5.0Vdc, 3.0A

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where      **RE≥1G:** Radiated Emission above 1 GHz      **RE<1G:** Radiated Emission below 1 GHz  
**PLC:** Power Line Conducted Emission      **APCM:** Antenna Port Conducted Measurement

**NOTE:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

**NOTE:** “-”means no effect.

#### Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0

#### Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11n (HT20)	1 to 11	11	OFDM	BPSK	MCS0

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11n (HT20)	1 to 11	11	OFDM	BPSK	MCS0

### Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 11	OFDM	BPSK	MCS0

### Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0

### Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE≥1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
APCM	25 deg. C, 65 % RH	3.9 Vdc	Vincent Huang

### 3.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98 %

**802.11b:** Duty cycle =  $8.24/8.44 = 0.976$ , Duty factor =  $10 * \log(1/0.976) = 0.10$

**802.11g:** Duty cycle =  $1.353/1.574 = 0.860$ , Duty factor =  $10 * \log(1/0.860) = 0.66$

**802.11n (HT20):** Duty cycle =  $1.145/1.351 = 0.848$ , Duty factor =  $10 * \log(1/0.848) = 0.72$



### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Earphone	Apple	MD827FE	N/A	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).

#### 3.4.1 Configuration of System under Test

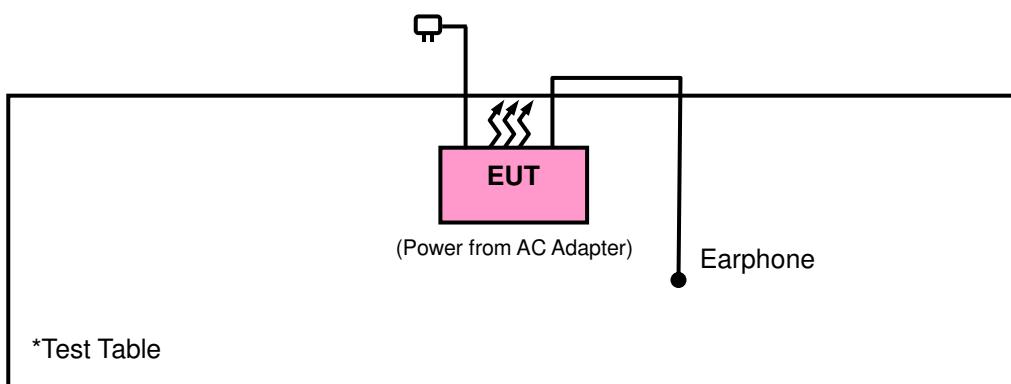

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**558074 D01 DTS Meas Guidance v04**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>u</sub>V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

#### 4.1.2 Test Instruments

<b>Description &amp; Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Date of Calibration</b>	<b>Due Date of Calibration</b>
Test Receiver Agilent	N9038A	MY52260177	Jul. 05, 2017	Jul. 04, 2018
Spectrum Analyzer Agilent	N9010A	MY52220314	Nov. 24, 2017	Nov. 23, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	100115	Nov. 23, 2017	Nov. 22, 2018
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 30, 2017	Nov. 29, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 06, 2017	Dec. 05, 2018
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(R FC-SMS-100-SM S-120+RFC-SMS -100-SMS-400)	Jun. 23, 2017	Jun. 22, 2018
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 24, 2017	Oct. 23, 2018
Loop Antenna	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier EMCI	EMC001340	980201	Nov. 01, 2017	Oct. 30, 2018
Bluetooth Tester	CBT	100946	Jul. 29, 2016	Jul. 28, 2018
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 184045	980116	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 13, 2017	Oct. 12, 2018
Power Meter Anritsu	ML2495A	1012010	Aug. 15, 2017	Aug. 14, 2018
Power Sensor Anritsu	MA2411B	1315050	Aug. 15, 2017	Aug. 14, 2018
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-8000&3000	140811+170717	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000(140807)	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 20, 2017	Oct. 19, 2018
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 10.
  3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
  4. The IC Site Registration No. is IC7450F-10.

#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 KHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for Average (Duty cycle < 98 %) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up


##### <Radiated emission below 30 MHz>

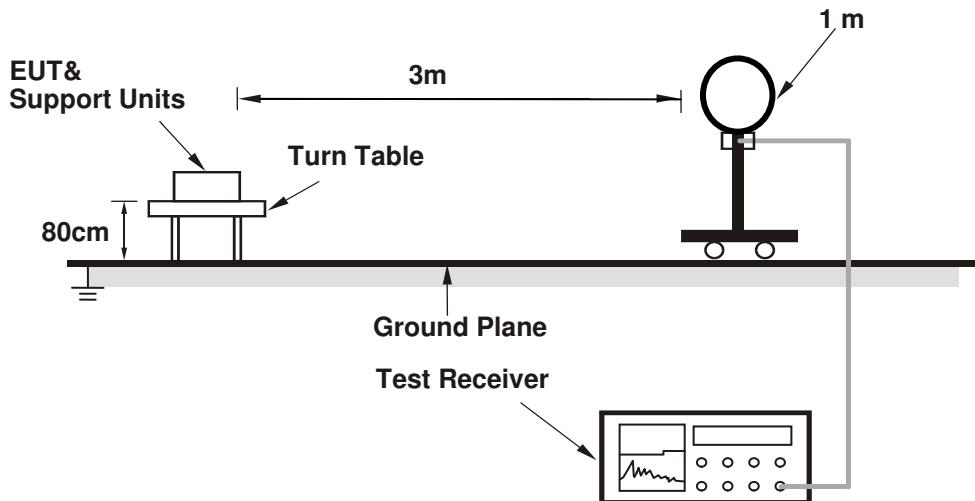

##### <Frequency Range below 1 GHz>

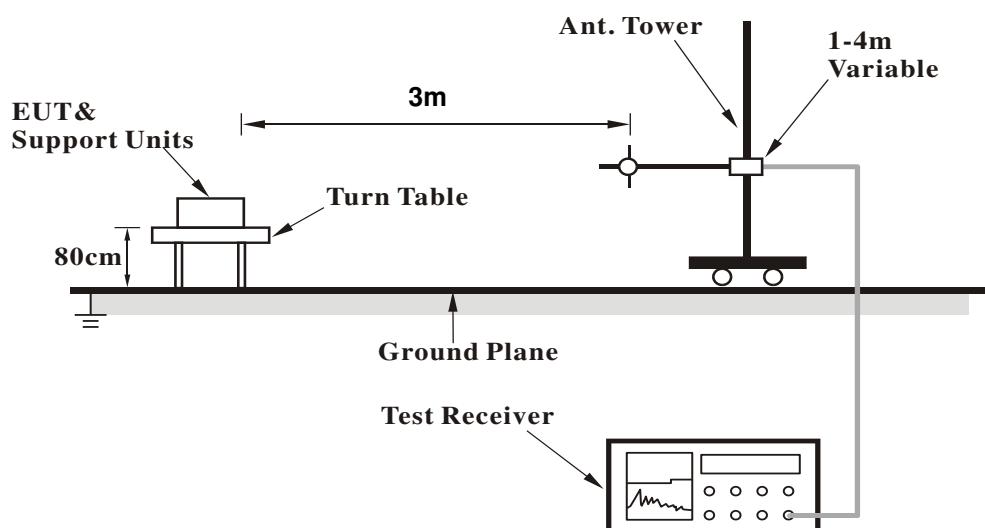

**<Frequency Range above 1 GHz>**

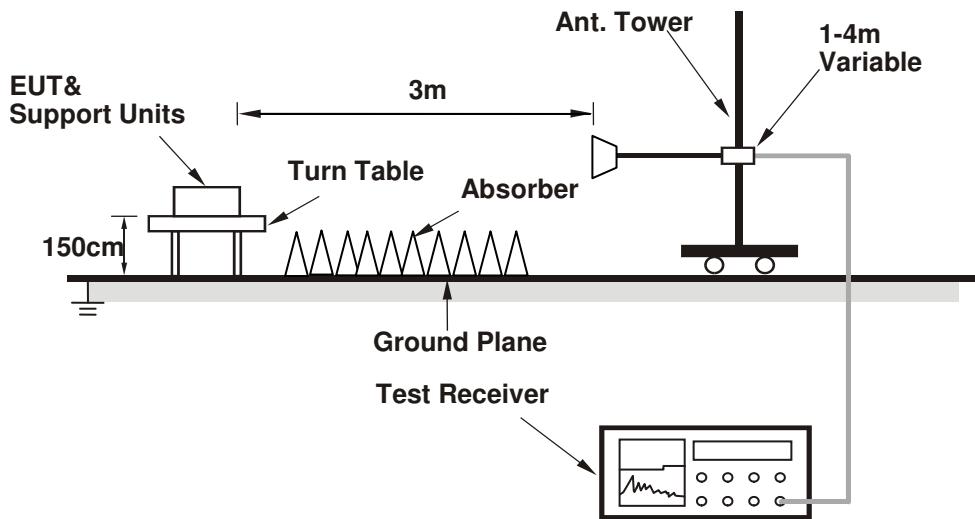

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

##### Above 1 GHz Data :

**802.11b**

<b>EUT Test Condition</b>		<b>Measurement Detail</b>					
<b>Channel</b>		Channel 1				<b>Frequency Range</b>	1 GHz ~ 25 GHz
<b>Input Power</b>		120 Vac, 60 Hz				<b>Detector Function</b>	Peak (PK) Average (AV)
<b>Environmental Conditions</b>		25 deg. C, 65 % RH				<b>Tested By</b>	Getaz Yang

##### Antennal Polarity & Test Distance: Horizontal at 3 m

<b>Frequency (MHz)</b>	<b>Emission Level (dBuV/m)</b>	<b>Read Level (dBuV)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Cable Loss (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Antenna Height (cm)</b>	<b>Table Angle (Degree)</b>	<b>Remark</b>
2389.8	35.85	42.1	54	-18.15	26.91	4.36	37.52	203	165	Average
2389.8	47.87	54.1	74	-26.13	26.91	4.36	37.5	203	165	Peak
2412	102.18	108.36			26.96	4.38	37.52	203	165	Average
2412	105.72	111.9			26.96	4.38	37.52	203	165	Peak
4824	33.33	48.42	54	-20.67	30.99	6.81	52.89	129	222	Average
4824	43.02	58.11	74	-30.98	30.99	6.81	52.89	129	222	Peak

##### Antennal Polarity & Test Distance: Vertical at 3 m

<b>Frequency (MHz)</b>	<b>Emission Level (dBuV/m)</b>	<b>Read Level (dBuV)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Cable Loss (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Antenna Height (cm)</b>	<b>Table Angle (Degree)</b>	<b>Remark</b>
2389.52	38.04	44.51	54	-15.96	26.72	4.28	37.47	124	10	Average
2389.52	50.67	56.9	74	-23.33	26.91	4.36	37.5	124	10	Peak
2412	95.03	101.21			26.96	4.38	37.52	124	10	Average
2412	98.81	104.99			26.96	4.38	37.52	124	10	Peak
4824	32.96	48.24	54	-21.04	30.99	6.81	53.08	114	30	Average
4824	42.43	57.71	74	-31.57	30.99	6.81	53.08	114	30	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value

2. 2412 MHz: Fundamental frequency.

<b>EUT Test Condition</b>		<b>Measurement Detail</b>		
<b>Channel</b>		Channel 6		<b>Frequency Range</b>
<b>Input Power</b>		120 Vac, 60 Hz		<b>Detector Function</b>
<b>Environmental Conditions</b>		25 deg. C, 65 % RH		<b>Tested By</b>

<b>Antennal Polarity &amp; Test Distance: Horizontal at 3 m</b>										
<b>Frequency (MHz)</b>	<b>Emission Level (dBuV/m)</b>	<b>Read Level (dBuV)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Cable Loss (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Antenna Height (cm)</b>	<b>Table Angle (Degree)</b>	<b>Remark</b>
2388.4	35.14	41.37	54	-18.86	26.91	4.36	37.5	199	170	Average
2388.4	47.31	53.67	74	-26.69	26.81	4.32	37.49	199	170	Peak
2437	102.7	108.7			27.06	4.4	37.46	199	170	Average
2437	106.46	112.46			27.06	4.4	37.46	199	170	Peak
2484.48	37	42.74	54	-17	27.15	4.43	37.32	199	170	Average
2484.48	48.77	54.46	74	-25.23	27.2	4.43	37.32	199	170	Peak
4874	33.79	48.73	54	-20.21	31.06	6.86	52.86	130	204	Average
4874	43.51	58.45	74	-30.49	31.06	6.86	52.86	130	204	Peak
<b>Antennal Polarity &amp; Test Distance: Vertical at 3 m</b>										
<b>Frequency (MHz)</b>	<b>Emission Level (dBuV/m)</b>	<b>Read Level (dBuV)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Cable Loss (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Antenna Height (cm)</b>	<b>Table Angle (Degree)</b>	<b>Remark</b>
2389.66	37.8	44.09	54	-16.2	26.86	4.35	37.5	120	12	Average
2389.66	50.91	57.14	74	-23.09	26.91	4.36	37.5	120	12	Peak
2437	95.47	101.47			27.06	4.4	37.46	120	12	Average
2437	99.2	105.2			27.06	4.4	37.46	120	12	Peak
2483.64	36.27	42.01	54	-17.73	27.15	4.43	37.32	120	12	Average
2483.64	48.73	54.47	74	-25.27	27.15	4.43	37.32	120	12	Peak
4874	33.1	48.23	54	-20.9	31.06	6.86	53.05	110	39	Average
4874	42.99	58.12	74	-31.01	31.06	6.86	53.05	110	39	Peak

**Remarks:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail		
<b>Channel</b>		Channel 11		<b>Frequency Range</b>	1 GHz ~ 25 GHz
<b>Input Power</b>		120 Vac, 60 Hz		<b>Detector Function</b>	Peak (PK) Average (AV)
<b>Environmental Conditions</b>		25 deg. C, 65 % RH		<b>Tested By</b>	Getaz Yang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	102.46	108.34			27.1	4.41	37.39	195	168	Average
2462	106.24	112.12			27.1	4.41	37.39	195	168	Peak
2486.56	38.33	44.07	54	-15.67	27.15	4.43	37.32	195	168	Average
2486.56	51.36	57.05	74	-22.64	27.2	4.43	37.32	195	168	Peak
4960	33.78	48.64	54	-20.22	31.16	6.9	52.92	125	199	Average
4960	43.38	58.24	74	-30.62	31.16	6.9	52.92	125	199	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	95.44	101.32			27.1	4.41	37.39	119	12	Average
2462	99.16	105.04			27.1	4.41	37.39	119	12	Peak
2484.04	36.96	42.7	54	-17.04	27.15	4.43	37.32	119	12	Average
2484.04	49.38	54.99	74	-24.62	27.2	4.44	37.25	119	12	Peak
4960	33.06	48.04	54	-20.94	31.16	6.9	53.04	110	28	Average
4960	43.11	58.09	74	-30.89	31.16	6.9	53.04	110	28	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2462 MHz: Fundamental frequency.

**802.11g**

EUT Test Condition			Measurement Detail						
<b>Channel</b>		Channel 1			<b>Frequency Range</b>		1 GHz ~ 25 GHz		
<b>Input Power</b>		120 Vac, 60 Hz			<b>Detector Function</b>		Peak (PK) Average (AV)		
<b>Environmental Conditions</b>		25 deg. C, 65 % RH			<b>Tested By</b>		Getaz Yang		

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	44.11	50.36	54	-9.89	26.91	4.36	37.52	204	168	Average
2389.94	66.42	72.67	74	-7.58	26.91	4.36	37.52	204	168	Peak
2412	97.95	104.13			26.96	4.38	37.52	204	168	Average
2412	107.32	113.5			26.96	4.38	37.52	204	168	Peak
4824	33.26	48.35	54	-20.74	30.99	6.81	52.89	127	215	Average
4824	42.19	57.28	74	-31.81	30.99	6.81	52.89	127	215	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	39.78	46.03	54	-14.22	26.91	4.36	37.52	124	11	Average
2389.94	58.46	64.71	74	-15.54	26.91	4.36	37.52	124	11	Peak
2412	91.54	97.72			26.96	4.38	37.52	124	11	Average
2412	100.92	107.1			26.96	4.38	37.52	124	11	Peak
4824	32.06	47.34	54	-21.94	30.99	6.81	53.08	117	38	Average
4824	42.47	57.75	74	-31.53	30.99	6.81	53.08	117	38	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2412 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail		
<b>Channel</b>		Channel 6		<b>Frequency Range</b>	1 GHz ~ 25 GHz
<b>Input Power</b>		120 Vac, 60 Hz		<b>Detector Function</b>	Peak (PK) Average (AV)
<b>Environmental Conditions</b>		25 deg. C, 65 % RH		<b>Tested By</b>	Getaz Yang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2384.9	38.13	44.42	54	-15.87	26.86	4.35	37.5	196	169	Average
2384.9	48.76	55.05	74	-25.24	26.86	4.35	37.5	196	169	Peak
2437	99.43	105.43			27.06	4.4	37.46	196	169	Average
2437	108.47	114.47			27.06	4.4	37.46	196	169	Peak
2484.72	40.67	46.36	54	-13.33	27.2	4.43	37.32	196	169	Average
2484.72	55.1	60.84	74	-18.9	27.15	4.43	37.32	196	169	Peak
4874	32.8	47.74	54	-21.2	31.06	6.86	52.86	133	215	Average
4874	44.31	59.25	74	-29.69	31.06	6.86	52.86	133	215	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2360.54	37.97	44.27	54	-16.03	26.86	4.34	37.5	120	12	Average
2360.54	49.99	56.34	74	-24.01	26.81	4.33	37.49	120	12	Peak
2437	92.3	98.3			27.06	4.4	37.46	120	12	Average
2437	101.62	107.62			27.06	4.4	37.46	120	12	Peak
2488.84	37.16	42.85	54	-16.84	27.2	4.43	37.32	120	12	Average
2488.84	48.54	54.23	74	-25.46	27.2	4.43	37.32	120	12	Peak
4874	32.4	47.53	54	-21.6	31.06	6.86	53.05	104	24	Average
4874	43.1	58.23	74	-30.9	31.06	6.86	53.05	104	24	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.

<b>EUT Test Condition</b>			<b>Measurement Detail</b>		
<b>Channel</b>		Channel 11		<b>Frequency Range</b>	1 GHz ~ 25 GHz
<b>Input Power</b>		120 Vac, 60 Hz		<b>Detector Function</b>	Peak (PK) Average (AV)
<b>Environmental Conditions</b>		25 deg. C, 65 % RH		<b>Tested By</b>	Getaz Yang

<b>Antennal Polarity &amp; Test Distance: Horizontal at 3 m</b>										
<b>Frequency (MHz)</b>	<b>Emission Level (dBuV/m)</b>	<b>Read Level (dBuV)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Cable Loss (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Antenna Height (cm)</b>	<b>Table Angle (Degree)</b>	<b>Remark</b>
2462	99.17	105.05			27.1	4.41	37.39	197	166	Average
2462	108.62	114.5			27.1	4.41	37.39	197	166	Peak
2483.72	47.3	53.04	54	-6.7	27.15	4.43	37.32	197	166	Average
2483.72	70.13	75.87	74	-3.87	27.15	4.43	37.32	197	166	Peak
4960	32.57	47.43	54	-21.43	31.16	6.9	52.92	133	205	Average
4960	42.69	57.55	74	-31.31	31.16	6.9	52.92	133	205	Peak
<b>Antennal Polarity &amp; Test Distance: Vertical at 3 m</b>										
<b>Frequency (MHz)</b>	<b>Emission Level (dBuV/m)</b>	<b>Read Level (dBuV)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Cable Loss (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Antenna Height (cm)</b>	<b>Table Angle (Degree)</b>	<b>Remark</b>
2462	92.6	98.48			27.1	4.41	37.39	120	10	Average
2462	101.98	107.86			27.1	4.41	37.39	120	10	Peak
2483.56	42.23	47.97	54	-11.77	27.15	4.43	37.32	120	10	Average
2483.56	63.83	69.57	74	-10.17	27.15	4.43	37.32	120	10	Peak
4960	32.16	47.14	54	-21.84	31.16	6.9	53.04	113	35	Average
4960	43.25	58.23	74	-30.75	31.16	6.9	53.04	113	35	Peak

**Remarks:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2462 MHz: Fundamental frequency.

**802.11n (HT20)**

<b>EUT Test Condition</b>		<b>Measurement Detail</b>					
<b>Channel</b>	Channel 1	<b>Frequency Range</b>			1 GHz ~ 25 GHz		
<b>Input Power</b>	120 Vac, 60 Hz	<b>Detector Function</b>			Peak (PK) Average (AV)		
<b>Environmental Conditions</b>	25 deg. C, 65 % RH	<b>Tested By</b>			Getaz Yang		

<b>Antennal Polarity &amp; Test Distance: Horizontal at 3 m</b>										
<b>Frequency (MHz)</b>	<b>Emission Level (dBuV/m)</b>	<b>Read Level (dBuV)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Cable Loss (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Antenna Height (cm)</b>	<b>Table Angle (Degree)</b>	<b>Remark</b>
2389.94	45.33	51.58	54	-8.67	26.91	4.36	37.52	202	166	Average
2389.94	69.64	75.87	74	-4.36	26.91	4.36	37.5	202	166	Peak
2412	97.89	104.07			26.96	4.38	37.52	202	166	Average
2412	107.24	113.42			26.96	4.38	37.52	202	166	Peak
4824	32.77	47.86	54	-21.23	30.99	6.81	52.89	131	211	Average
4824	42.59	57.68	74	-31.41	30.99	6.81	52.89	131	211	Peak
<b>Antennal Polarity &amp; Test Distance: Vertical at 3 m</b>										
<b>Frequency (MHz)</b>	<b>Emission Level (dBuV/m)</b>	<b>Read Level (dBuV)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Cable Loss (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Antenna Height (cm)</b>	<b>Table Angle (Degree)</b>	<b>Remark</b>
2389.94	39.86	46.11	54	-14.14	26.91	4.36	37.52	124	10	Average
2389.94	60.34	66.59	74	-13.66	26.91	4.36	37.52	124	10	Peak
2412	91.03	97.21			26.96	4.38	37.52	124	10	Average
2412	100.65	106.83			26.96	4.38	37.52	124	10	Peak
4824	32.29	47.57	54	-21.71	30.99	6.81	53.08	113	31	Average
4824	43.5	58.78	74	-30.5	30.99	6.81	53.08	113	31	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2412 MHz: Fundamental frequency.

EUT Test Condition			Measurement Detail		
<b>Channel</b>		Channel 6		<b>Frequency Range</b>	1 GHz ~ 25 GHz
<b>Input Power</b>		120 Vac, 60 Hz		<b>Detector Function</b>	Peak (PK) Average (AV)
<b>Environmental Conditions</b>		25 deg. C, 65 % RH		<b>Tested By</b>	Getaz Yang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2388.82	39.95	46.24	54	-14.05	26.86	4.35	37.5	200	171	Average
2388.82	50.38	56.61	74	-23.62	26.91	4.36	37.5	200	171	Peak
2437	98.53	104.53			27.06	4.4	37.46	200	171	Average
2437	108.13	114.13			27.06	4.4	37.46	200	171	Peak
2484.32	40.55	46.24	54	-13.45	27.2	4.43	37.32	200	171	Average
2484.32	55.13	60.87	74	-18.87	27.15	4.43	37.32	200	171	Peak
4874	32.69	47.63	54	-21.31	31.06	6.86	52.86	127	205	Average
4874	43.05	57.99	74	-30.95	31.06	6.86	52.86	127	205	Peak

Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.66	37.3	43.59	54	-16.7	26.86	4.35	37.5	106	12	Average
2389.66	49.94	56.17	74	-24.06	26.91	4.36	37.5	106	12	Peak
2437	92.05	98.05			27.06	4.4	37.46	106	12	Average
2437	101.3	107.3			27.06	4.4	37.46	106	12	Peak
2484.24	38.4	44.09	54	-15.6	27.2	4.43	37.32	106	12	Average
2484.24	53.65	59.39	74	-20.35	27.15	4.43	37.32	106	12	Peak
4874	32.17	47.3	54	-21.83	31.06	6.86	53.05	121	41	Average
4874	42.8	57.93	74	-31.2	31.06	6.86	53.05	121	41	Peak

Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2437 MHz: Fundamental frequency.

<b>EUT Test Condition</b>			<b>Measurement Detail</b>		
<b>Channel</b>		Channel 11		<b>Frequency Range</b>	1 GHz ~ 25 GHz
<b>Input Power</b>		120 Vac, 60 Hz		<b>Detector Function</b>	Peak (PK) Average (AV)
<b>Environmental Conditions</b>		25 deg. C, 65 % RH		<b>Tested By</b>	Getaz Yang

<b>Antennal Polarity &amp; Test Distance: Horizontal at 3 m</b>										
<b>Frequency (MHz)</b>	<b>Emission Level (dBuV/m)</b>	<b>Read Level (dBuV)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Cable Loss (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Antenna Height (cm)</b>	<b>Table Angle (Degree)</b>	<b>Remark</b>
2462	99.01	104.89			27.1	4.41	37.39	196	169	Average
2462	108.41	114.29			27.1	4.41	37.39	196	169	Peak
2483.6	49.33	55.07	54	-4.67	27.15	4.43	37.32	196	169	Average
2483.6	73.2	78.94	74	-0.8	27.15	4.43	37.32	196	169	Peak
4960	32.48	47.34	54	-21.52	31.16	6.9	52.92	132	210	Average
4960	42.7	57.56	74	-31.3	31.16	6.9	52.92	132	210	Peak
<b>Antennal Polarity &amp; Test Distance: Vertical at 3 m</b>										
<b>Frequency (MHz)</b>	<b>Emission Level (dBuV/m)</b>	<b>Read Level (dBuV)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Antenna Factor (dB/m)</b>	<b>Cable Loss (dB)</b>	<b>Preamp Factor (dB)</b>	<b>Antenna Height (cm)</b>	<b>Table Angle (Degree)</b>	<b>Remark</b>
2462	91.69	97.57			27.1	4.41	37.39	118	12	Average
2462	101.08	106.96			27.1	4.41	37.39	118	12	Peak
2483.64	42.89	48.63	54	-11.11	27.15	4.43	37.32	118	12	Average
2483.64	67.32	73.06	74	-6.68	27.15	4.43	37.32	118	12	Peak
4960	32.13	47.11	54	-21.87	31.16	6.9	53.04	112	33	Average
4960	42.85	57.83	74	-31.15	31.16	6.9	53.04	112	33	Peak

**Remarks:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2462 MHz: Fundamental frequency.

**9 kHz ~ 30 MHz Data:**

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**30 MHz ~ 1 GHz Worst-Case Data:**
**802.11n (HT20)**

EUT Test Condition		Measurement Detail							
Channel	Channel 11	<b>Frequency Range</b>				30 MHz ~ 1 GHz			
Input Power	120 Vac, 60 Hz	<b>Detector Function</b>				Peak (PK) Quasi-peak (QP)			
Environmental Conditions	25 deg. C, 65 % RH	<b>Tested By</b>				Getaz Yang			

**Antennal Polarity & Test Distance: Horizontal at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
43.58	19.99	37.01	40	-20.01	13.59	0.5	31.11	152	236	Peak
169.68	28.28	47.18	43.5	-15.22	11.76	1.07	31.73	111	145	Peak
201.69	22.74	43.8	43.5	-20.76	9.44	1.24	31.74	185	164	Peak
231.76	19.92	39.66	46	-26.08	10.71	1.39	31.84	111	102	Peak
266.68	19.39	37.88	46	-26.61	11.97	1.52	31.98	158	142	Peak
884.57	28.9	33.59	46	-17.1	23.31	3.98	31.98	111	123	Peak

**Antennal Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
44.55	20.57	37.6	40	-19.43	13.6	0.51	31.14	201	236	Peak
170.65	19.05	38.05	43.5	-24.45	11.67	1.07	31.74	111	165	Peak
201.69	15.34	36.4	43.5	-28.16	9.44	1.24	31.74	174	185	Peak
342.34	17.89	33.91	46	-28.11	13.96	1.84	31.82	196	152	Peak
722.58	26.32	33.42	46	-19.68	21.13	3.41	31.64	111	102	Peak
935.98	28.68	32.75	46	-17.32	23.71	4.17	31.95	185	163	Peak

**Remarks:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 23, 2017	Nov. 22, 2018
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Sep. 05, 2017	Sep. 04, 2018
LISN/AMN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 10, 2017	Mar. 09, 2018
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 15, 2017	Aug. 14, 2018
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Shielded Room 1.  
3. The VCCI Site Registration No. is C-2040.

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

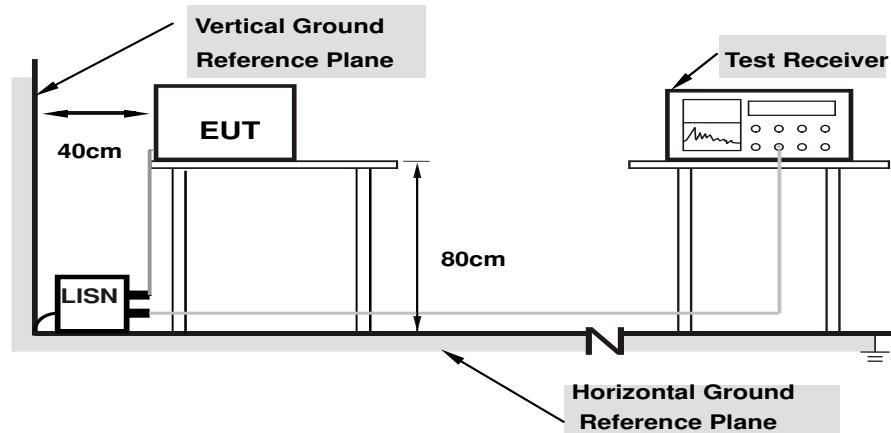

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.


#### 4.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Getaz Yang	Test Date	2018/2/27

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19305	10.10	42.27	23.99	52.37	34.09	63.90	53.90	-11.53	-19.81
2	0.23602	10.11	41.15	22.86	51.26	32.97	62.24	52.24	-10.98	-19.27
3	0.32204	10.11	36.94	20.61	47.05	30.72	59.65	49.65	-12.60	-18.93
4	0.63093	10.13	37.91	23.64	48.04	33.77	56.00	46.00	-7.96	-12.23
5	2.44908	10.21	23.33	13.30	33.54	23.51	56.00	46.00	-22.46	-22.49
6	6.57413	10.43	18.11	7.57	28.54	18.00	60.00	50.00	-31.46	-32.00

##### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

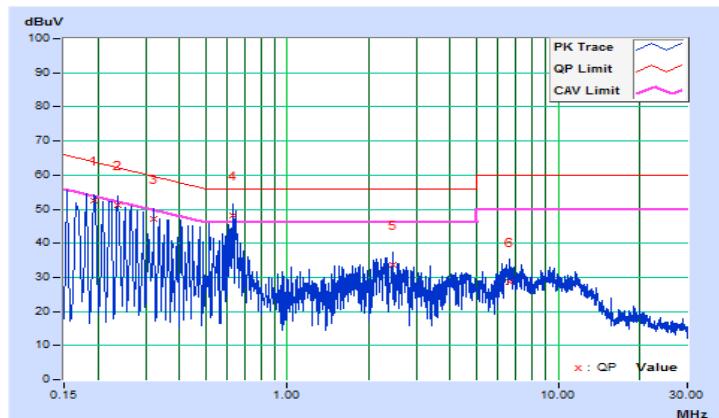


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Getaz Yang	Test Date	2018/2/27

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	10.10	43.09	26.17	53.19	36.27	64.61	54.61	-11.42	-18.34
2	0.20404	10.10	41.97	23.17	52.07	33.27	63.44	53.44	-11.37	-20.17
3	0.27120	10.11	40.13	22.35	50.24	32.46	61.08	51.08	-10.84	-18.62
4	0.62702	10.12	41.12	26.14	51.24	36.26	56.00	46.00	-4.76	-9.74
5	2.77752	10.21	18.16	10.21	28.37	20.42	56.00	46.00	-27.63	-25.58
6	6.91430	10.39	24.64	13.67	35.03	24.06	60.00	50.00	-24.97	-25.94

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

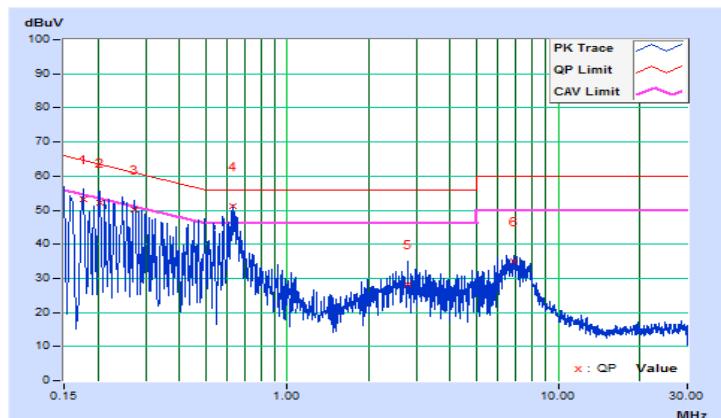


### 4.3 6 dB Bandwidth Measurement

#### 4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100 kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	8.59	0.5	Pass
6	2437	8.11	0.5	Pass
11	2462	8.59	0.5	Pass

##### 802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.37	0.5	Pass
6	2437	16.37	0.5	Pass
11	2462	16.41	0.5	Pass


##### 802.11n (HT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	17.59	0.5	Pass
6	2437	17.45	0.5	Pass
11	2462	17.36	0.5	Pass

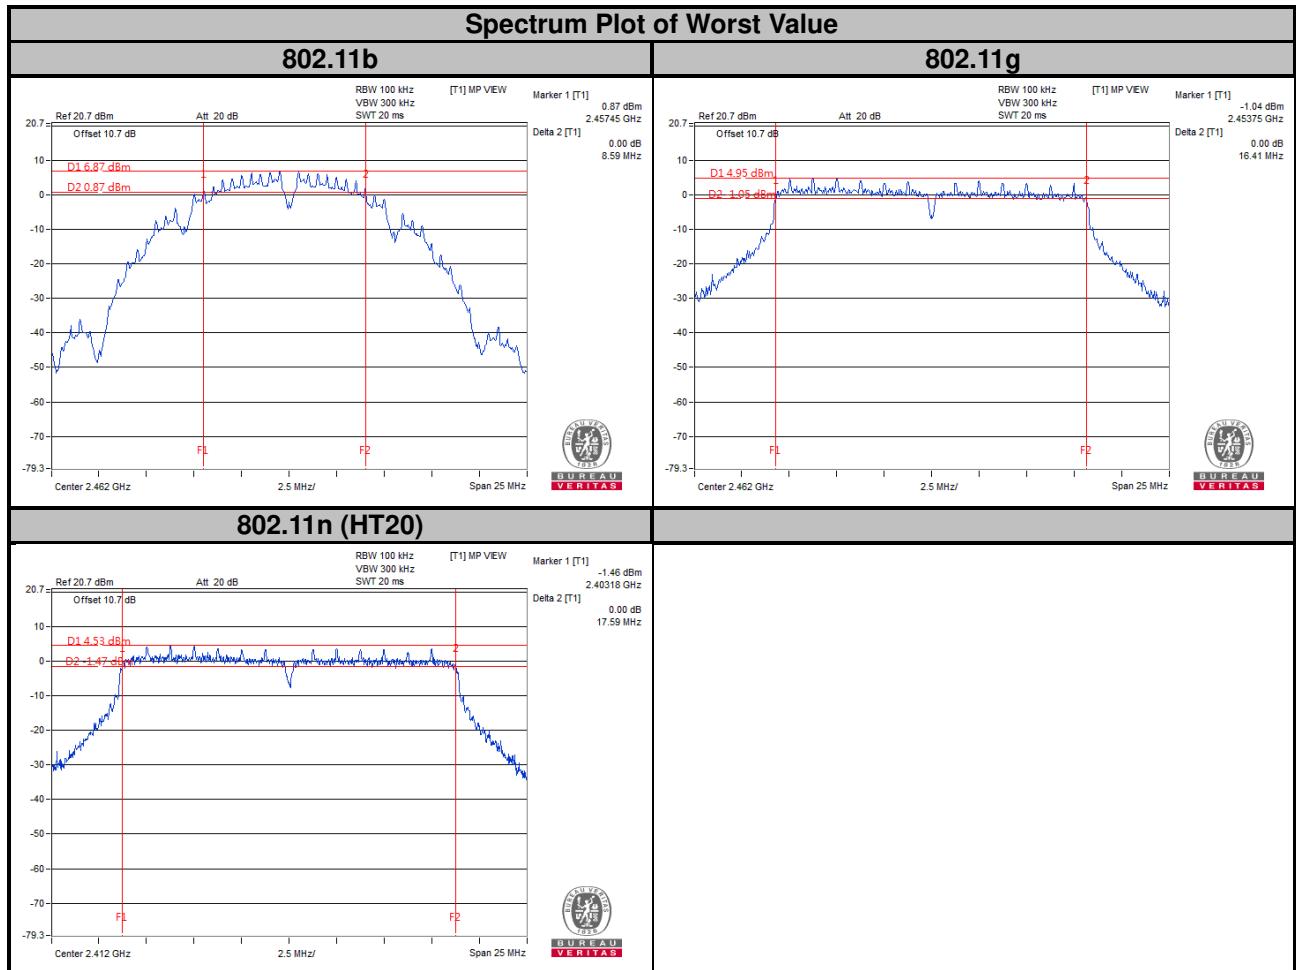

## 4.4 Occupied Bandwidth Measurement

### 4.4.1 Test Setup



### 4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

### 4.4.4 Deviation from Test Standard

No deviation.

### 4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.4.6 Test Results

##### **802.11b**


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	13.10	Pass
6	2437	13.10	Pass
11	2462	13.15	Pass

##### **802.11g**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	17.10	Pass
6	2437	17.20	Pass
11	2462	17.15	Pass

##### **802.11n (HT20)**

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
1	2412	18.12	Pass
6	2437	18.20	Pass
11	2462	18.15	Pass

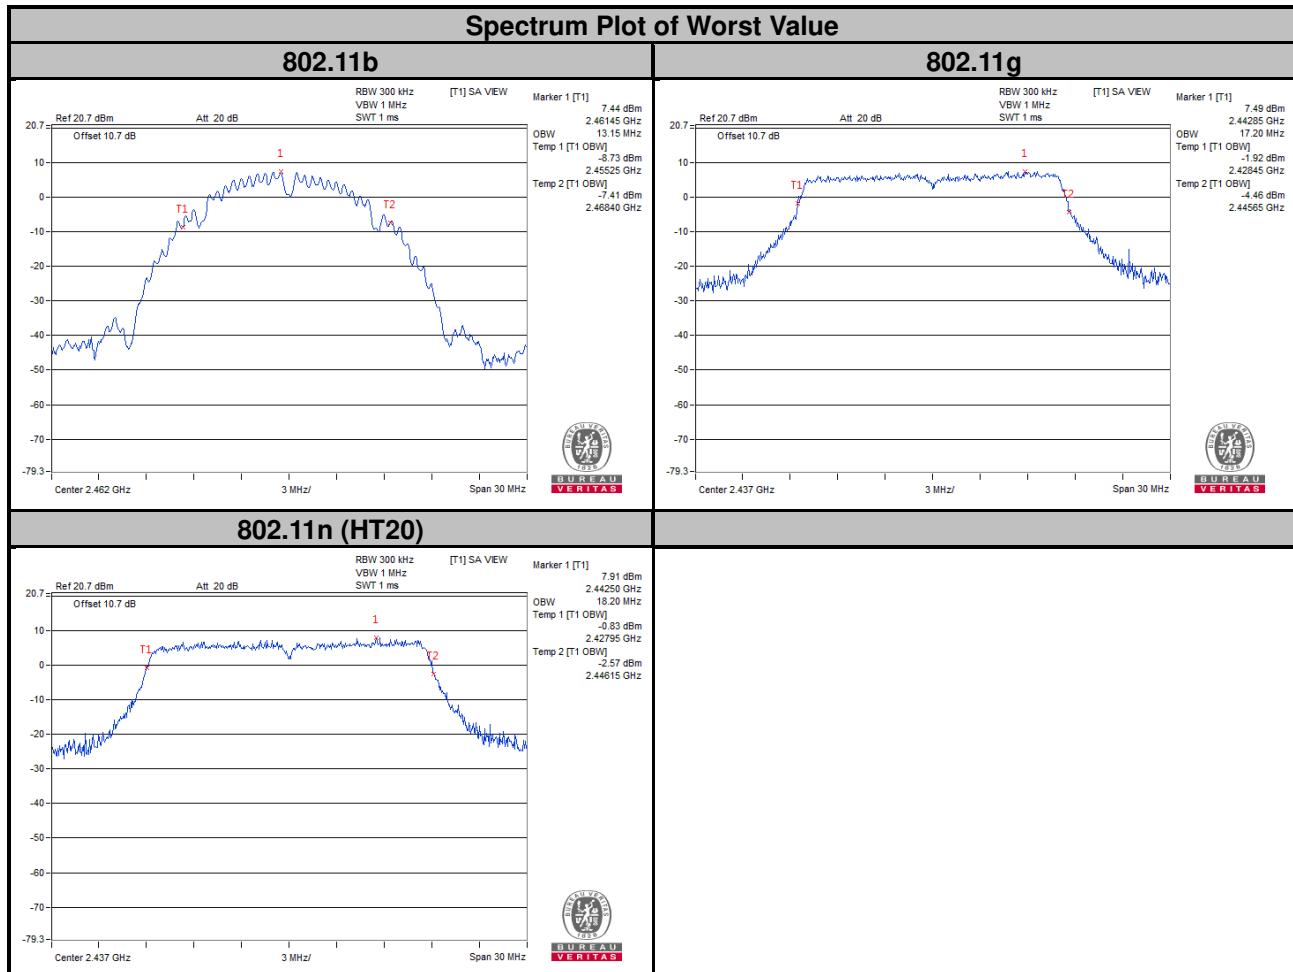


## 4.5 Conducted Output Power Measurement

### 4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.5.7 Test Results

##### 802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	53.088	17.25	30	Pass
6	2437	60.954	17.85	30	Pass
11	2462	53.211	17.26	30	Pass

##### 802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	226.986	23.56	30	Pass
6	2437	184.927	22.67	30	Pass
11	2462	221.82	23.46	30	Pass

##### 802.11n (HT20)


Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	226.464	23.55	30	Pass
6	2437	196.336	22.93	30	Pass
11	2462	214.783	23.32	30	Pass

## 4.6 Power Spectral Density Measurement

### 4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm.

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.6.7 Test Results

##### 802.11b


Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-7.76	8	Pass
6	2437	-6.74	8	Pass
11	2462	-7.01	8	Pass

##### 802.11g

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-10.31	8	Pass
6	2437	-9.64	8	Pass
11	2462	-9.72	8	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-10.63	8	Pass
6	2437	-10.18	8	Pass
11	2462	-10.47	8	Pass

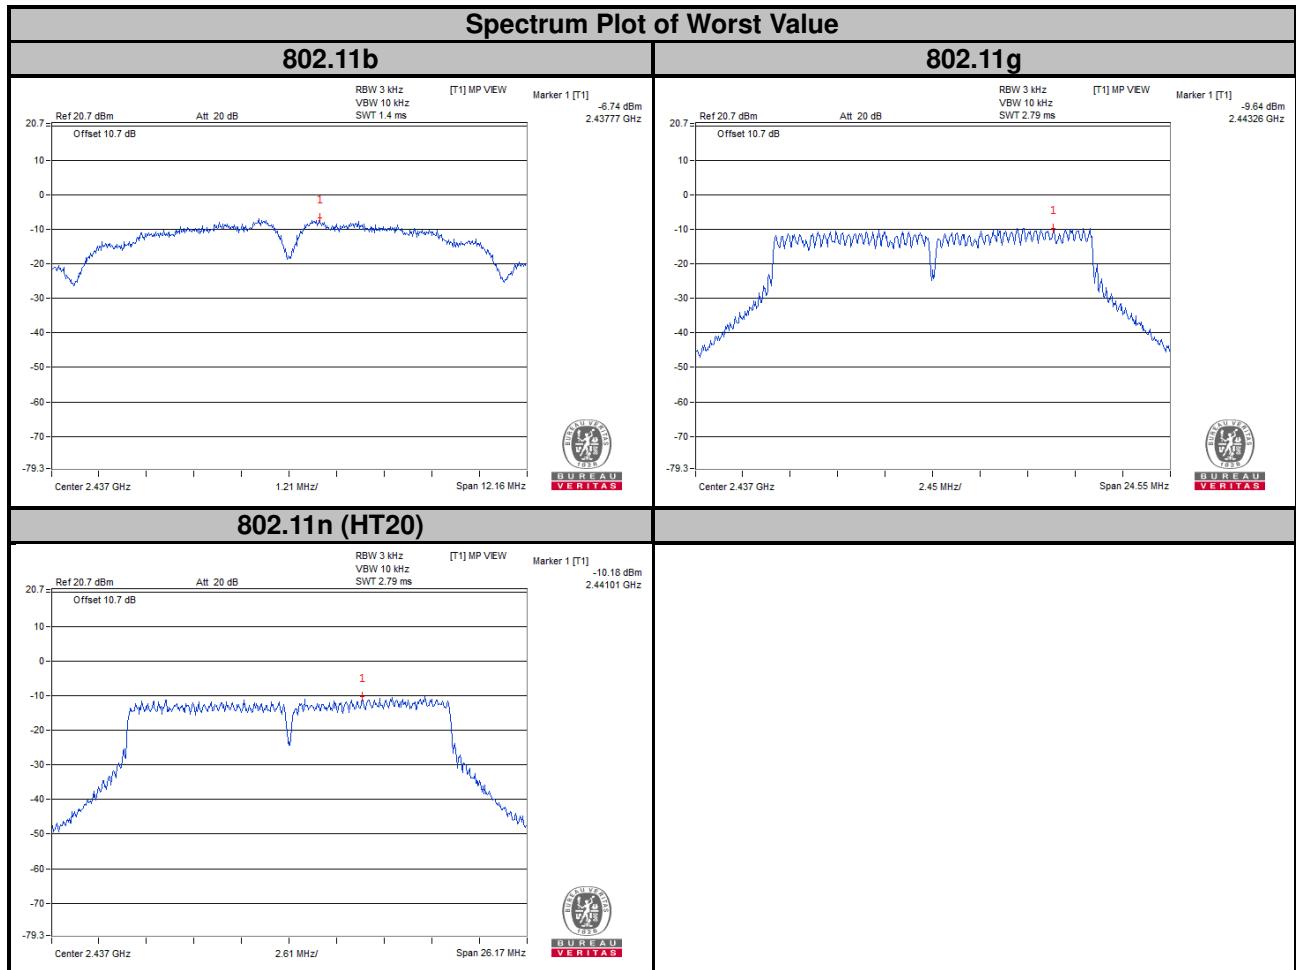


## 4.7 Conducted Out of Band Emission Measurement

### 4.7.1 Limits of Conducted Out of Band Emission Measurement

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 4.7.2 Test Setup



### 4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.7.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.7.5 Deviation from Test Standard

No deviation.


### 4.7.6 EUT Operating Condition


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.7.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.


#### 802.11b

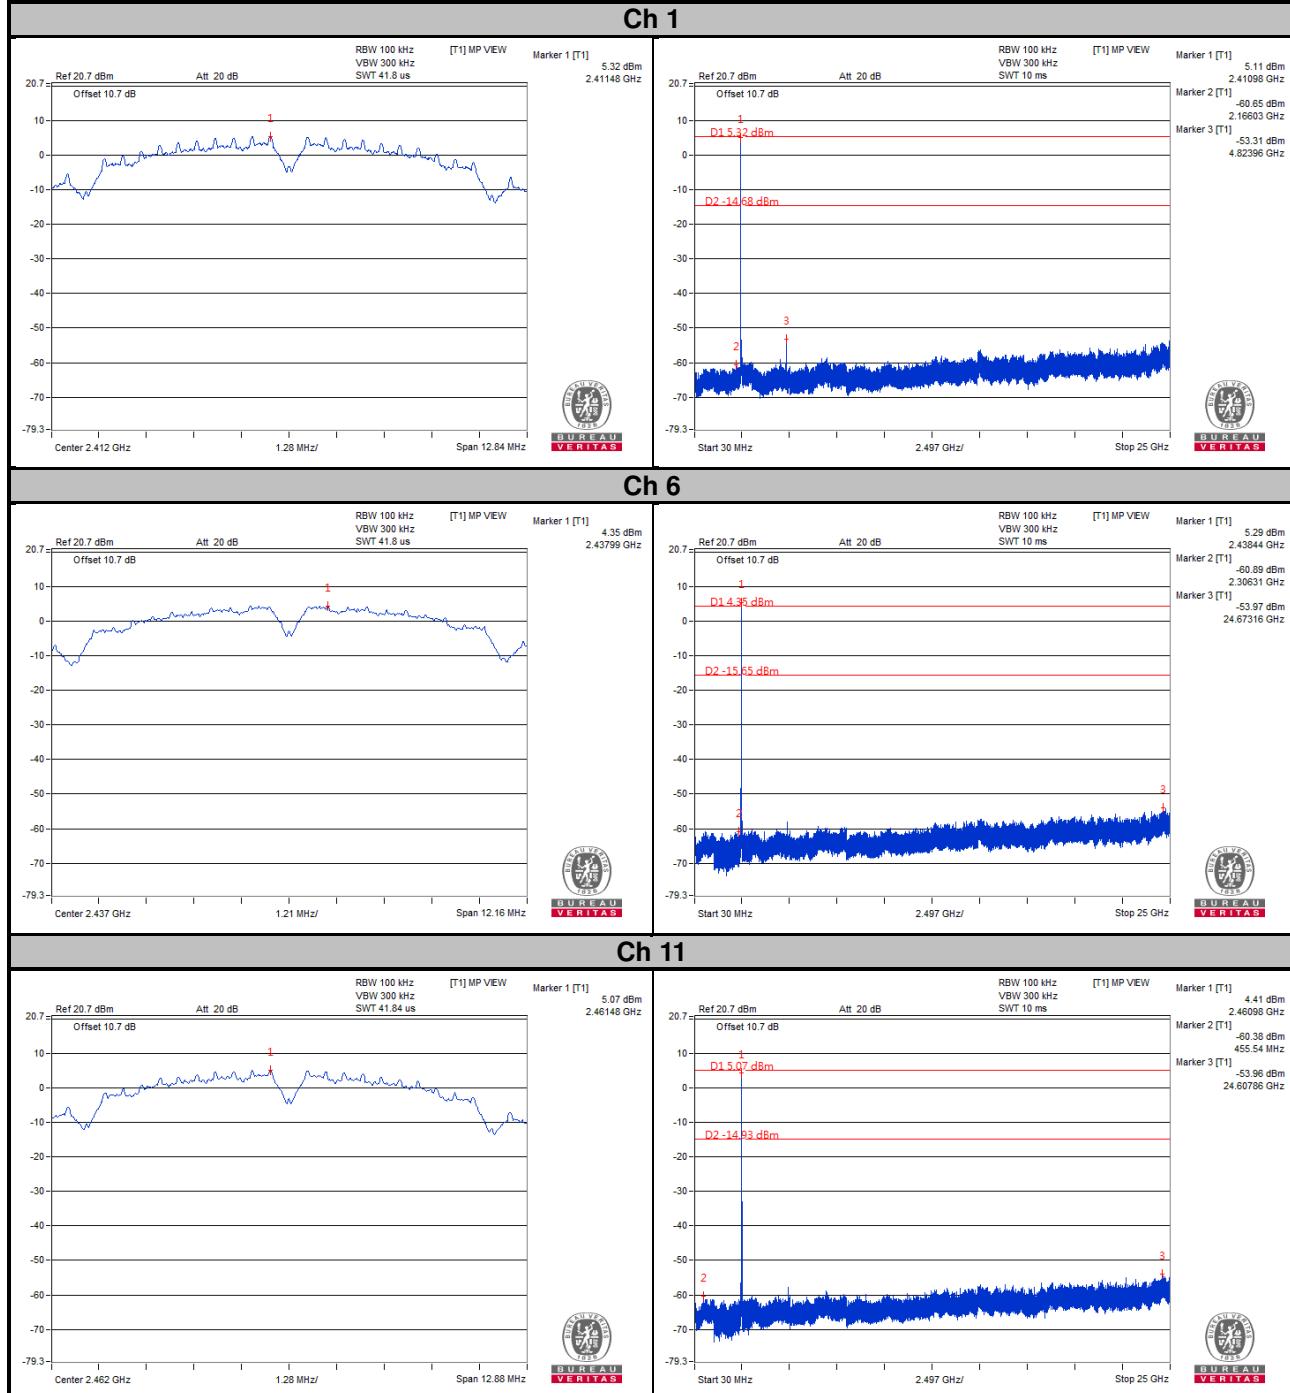

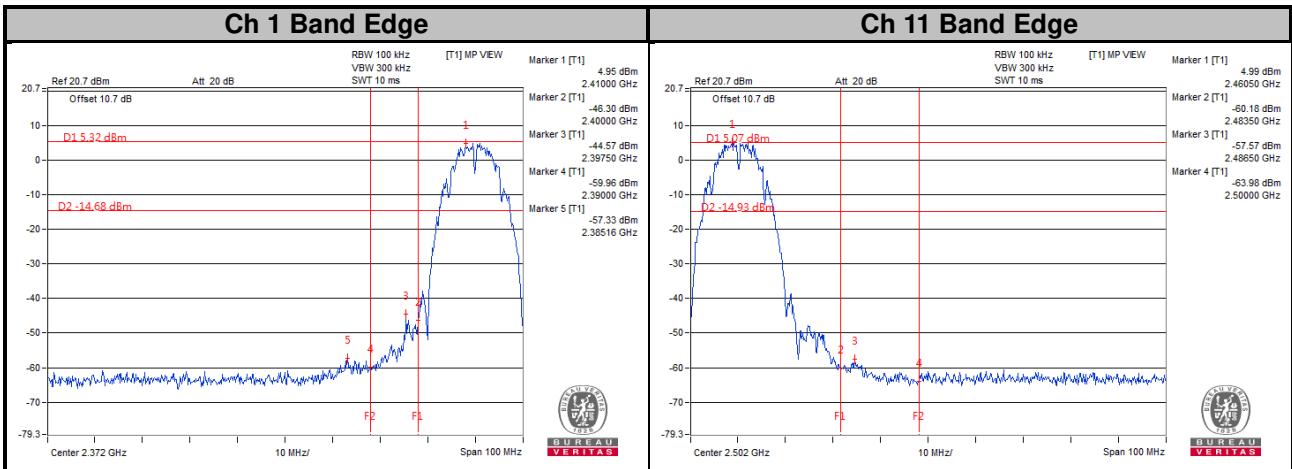


## 802.11g


### Ch 1

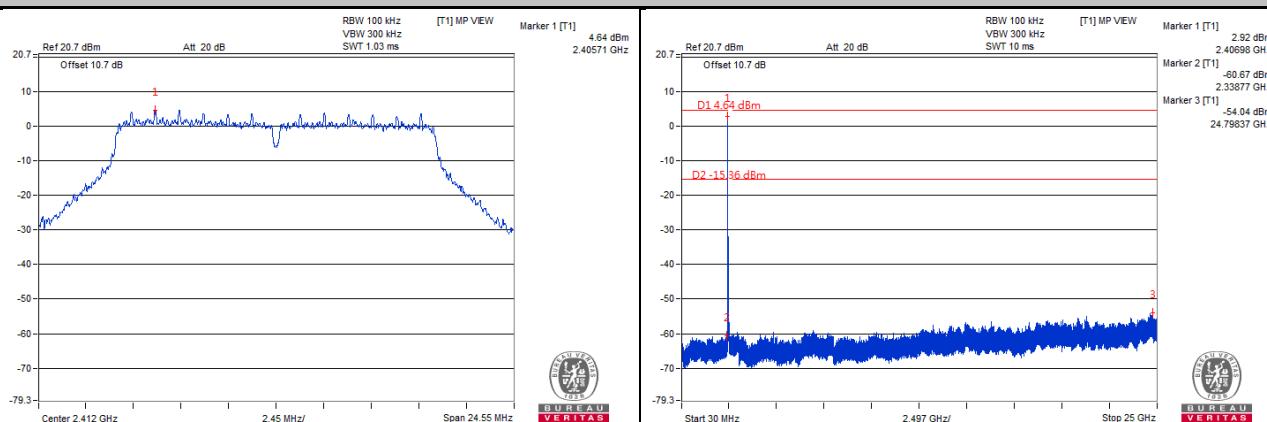


### Ch 6

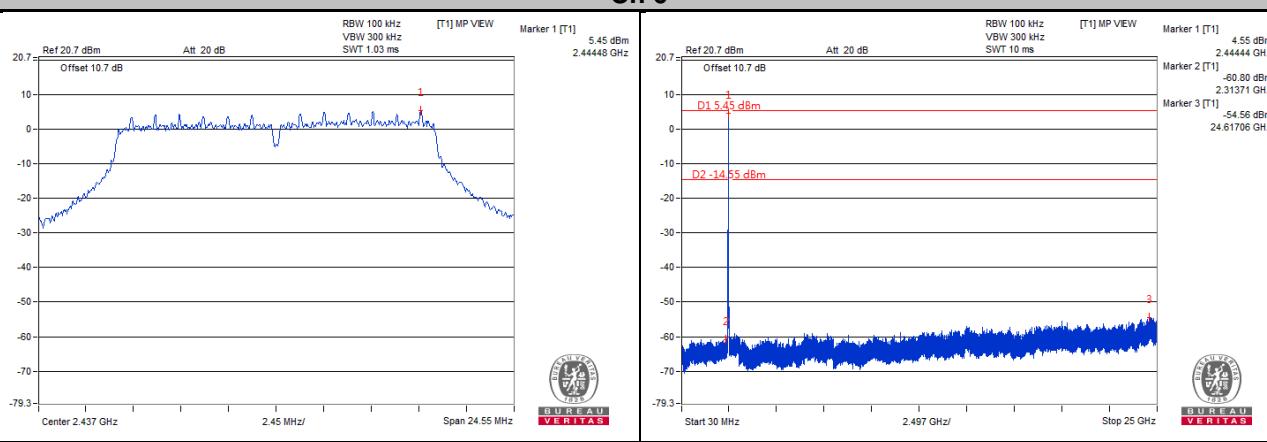


### Ch 11

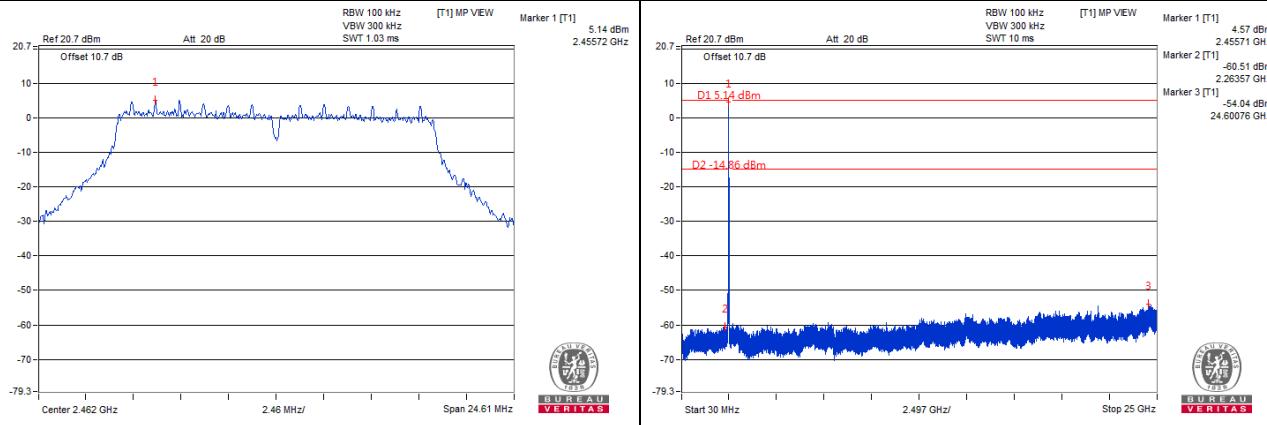

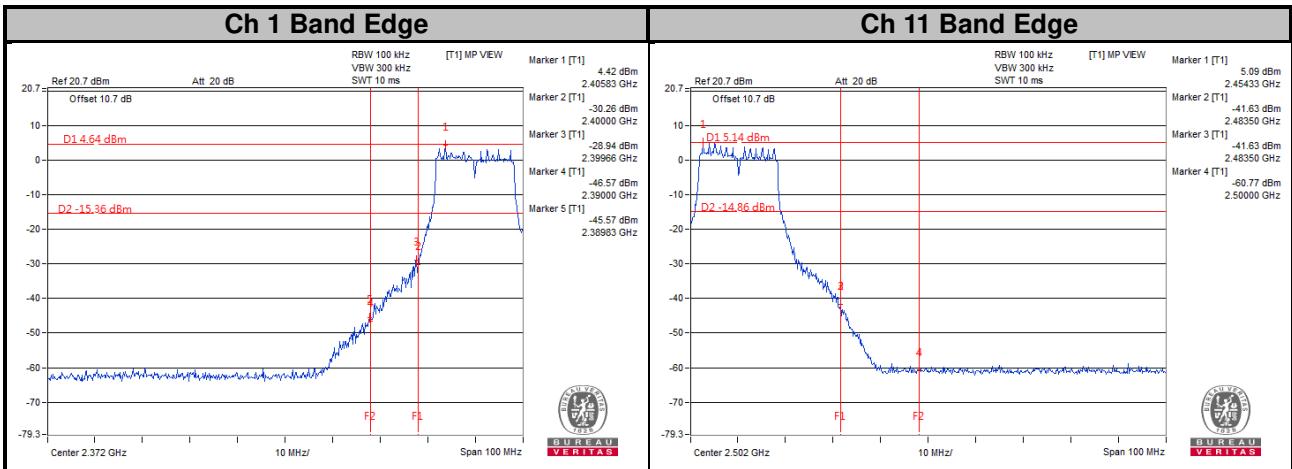


## 802.11n (HT20)


**Ch 1**

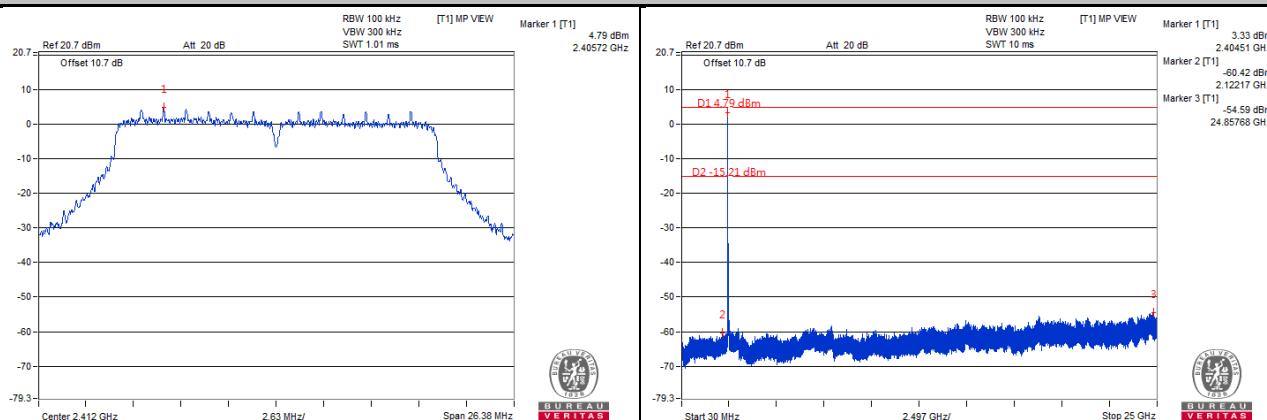


**Ch 6**

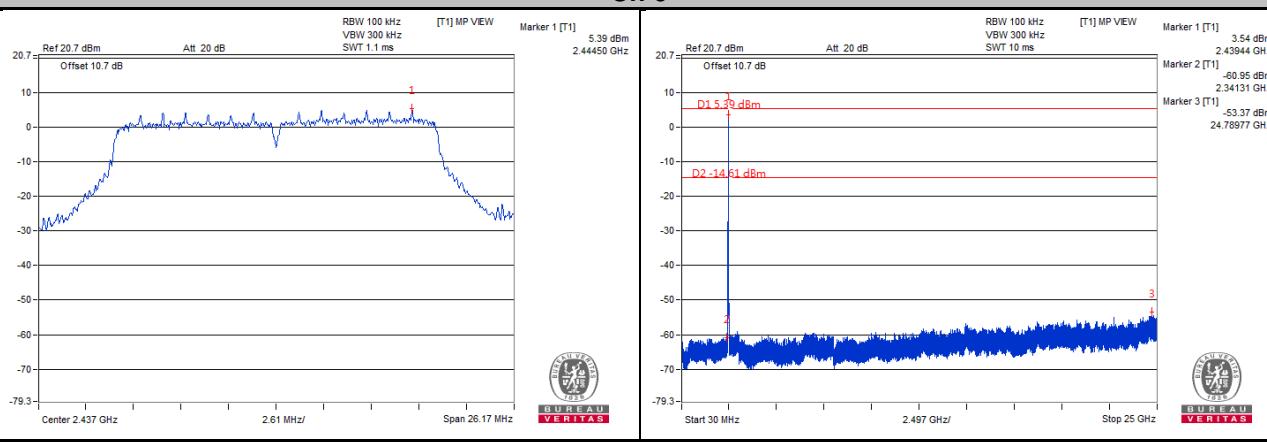

**Ch 11**

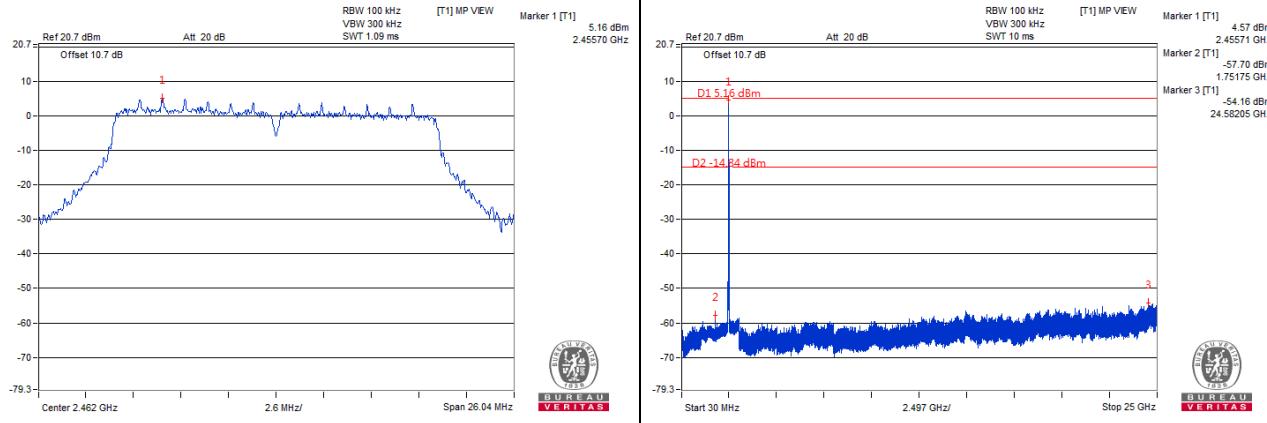

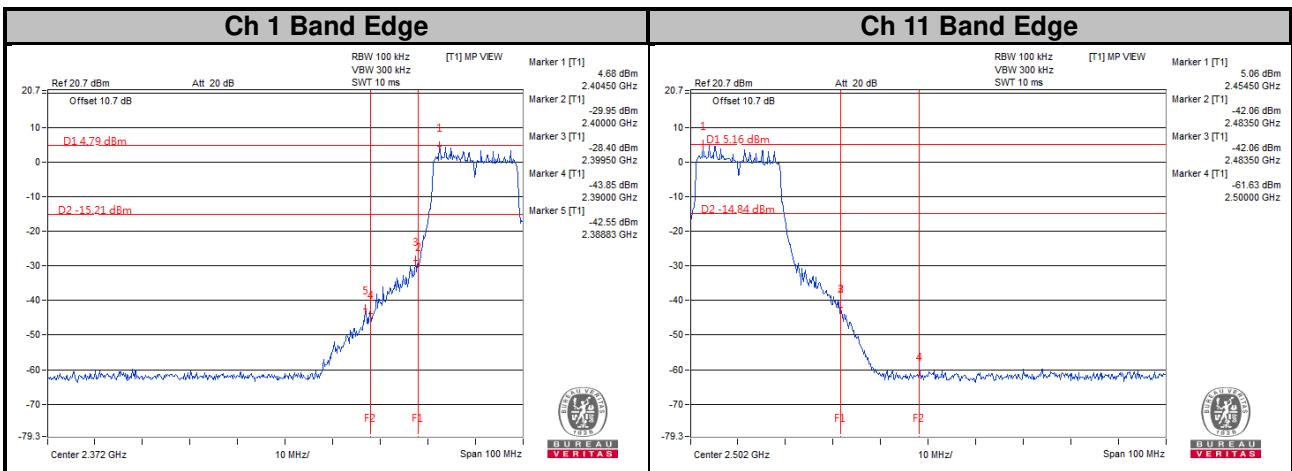

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565  
Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232  
Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---