



FCC Test Report

Equipment : Mobile Phone
Brand Name : Xi
Model No. : F-06E
FCC ID : VQK-F06E
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
Equipment Class : DTS
Applicant : FUJITSU LIMITED
Manufacturer : 1-1, Kamikodanaka 4-chome, Nakahara-ku,
Kawasaki 211-8588, Japan

The product sample received on Mar. 08, 2013 and completely tested on Mar. 29, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Wayne Hsu / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	8
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter	9
2.4	The Worst Case Measurement Configuration.....	10
2.5	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	6dB Bandwidth	15
3.3	RF Output Power.....	18
3.4	Power Spectral Density	22
3.5	Transmitter Radiated Bandedge Emissions	25
3.6	Transmitter Radiated Unwanted Emissions	30
4	TEST EQUIPMENT AND CALIBRATION DATA.....	53
APPENDIX A. TEST PHOTOS		A1
APPENDIX B. PHOTOGRAPHS OF EUT		B1



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 1.660MHz 29.05 (Margin 16.95dB) - AV 43.27 (Margin 12.73dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth Unit [MHz] 17.74	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]: 19.48	Power [dBm]: 30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/3kHz]: -13.17	PSD [dBm/3kHz]: 8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2400.00MHz: 33.89dB Restricted Bands [dBuV/m at 3m]: 2483.60MHz 56.20 (Margin 17.80dB) - PK 39.64 (Margin 14.36dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 30.17MHz 24.93 (Margin 15.07dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



Revision History



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
2400-2483.5	b	2412-2462	1-11 [11]	1	13.85	YES
2400-2483.5	g	2412-2462	1-11 [11]	1	18.59	YES
2400-2483.5	n (HT-20)	2412-2462	1-11 [11]	1	19.48	YES
2400-2483.5	n (HT-40)	2422-2452	-	-	-	-

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (EUT has simultaneously co-transmitting that operating Wi-Fi 2.4GHz and WWAN.)

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).
<input type="checkbox"/>	RF connector provided
	<input type="checkbox"/> Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
	<input type="checkbox"/> Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	$\lambda/4$ Monopole	-8.5



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
IMEI No.	355250050011164 / 355250050008145
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...	
<input type="checkbox"/> Other:	

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 98.28% - IEEE 802.11b	0.08
<input checked="" type="checkbox"/> 88.43% - IEEE 802.11g	0.53
<input checked="" type="checkbox"/> 87.26% - IEEE 802.11n (HT-20)	0.59
<input type="checkbox"/> 100% - IEEE 802.11n (HT-40)	-

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> Battery



1.2 Accessories and Support Equipment

Accessories				
No.	Equipment	Brand Name	Model Name	Spec.
1	Cradle	Fujitsu limited	CA50601-1791	5.0Vdc, 1.5A
2	Battery	Fujitsu limited	CA54310-0046	3.8V, 3,020mA Li-ion

Support Equipment AC Line Conducted Emission Radiated Below / Above 1GHz Test				
No.	Equipment	Brand Name	Model Name	Spec.
1	AC Adapter (provided by client)	NTT docomo	AC Adaptor 04	I/P:100-240Vac, 50~60Hz O/P:5Vdc, 1800mA Power cord: 1m non-shielded cable w/ 2 cores.
2	Earphone	Apple	MD827FE/A	-

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 558074
- ◆ FCC KDB 662911
- ◆ FCC KDB 412172



1.4 Testing Location Information

Testing Location				
	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test Condition		Test Site No.	Test Engineer	Test Environment
RF Conducted		TH01-HY	Ian Du	22°C / 64%
AC Conduction		CO04-HY	Bill Hsiao	23°C / 51%
Radiated Emission		03CH05-HY	Daniel Hsu	22°C / 55%

Test site registered number [643075] with FCC.
Test site registered number [4086B-1] with IC.

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing				
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS	RF Output Power (dBm)
11b,1-11Mbps	1	1-11 Mbps	1 Mbps	13.85
11g,6-54Mbps	1	6-54 Mbps	6 Mbps	18.59
HT-20	1	M0-7	MCS 0	19.48

Note 1: IEEE Std. 802.11n modulation consists of HT-20 and HT-40 (HT: High Throughput). Then EUT support HT-20 only.

Note 2: Modulation modes consist below configuration:
11b: IEEE 802.11b, 11g: IEEE 802.11g, HT-20: IEEE 802.11n

Note 3: RF output power specifies that Maximum Peak Conducted Output Power.

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std. 802.11	Test Channel Frequencies (MHz)
b, g, n (HT-20)	2412-(F1), 2437-(F2), 2462-(F3)

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (2400-2483.5MHz band)							
Test Software Version	QRCT V3.0.7.0						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		
		2412	2437	2462	2422	2437	2452
11b	1	3 / -2	4 / 0	7 / -7	-	-	-
11g	1	3 / -2	5 / -2	7 / -5	-	-	-
HT-20,M0-7	1	4 / 0	6 / -2	7 / 0	-	-	-



2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC power & Radio link (WLAN)
2	AC power with cradle & Radio link (WLAN)

For operating mode 1 is the worst case and it was record in this test report.

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11b, 11g, HT-20


The Worst Case Mode for Following Conformance Tests							
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions						
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.						
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. <input checked="" type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is X.						
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. AC power & Radio link (WLAN) <input checked="" type="checkbox"/> 2. AC power with cradle & Radio link (WLAN)						
Modulation Mode	11b, 11g, HT-20						
Orthogonal Planes of EUT	<table border="1"><thead><tr><th>X Plane</th><th>Y Plane</th><th>Z Plane</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr></tbody></table>	X Plane	Y Plane	Z Plane			
X Plane	Y Plane	Z Plane					

For operating mode 1 is the worst case and it was record in this test report.


2.5 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission**Operating Mode 1**


AC power & Radio link (WLAN)

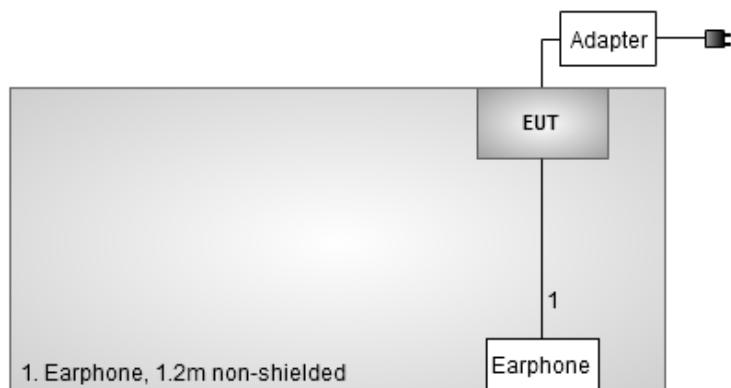**Test Setup Diagram - Radiated Below 1GHz Test****Operating Mode 1**

AC power & Radio link (WLAN)

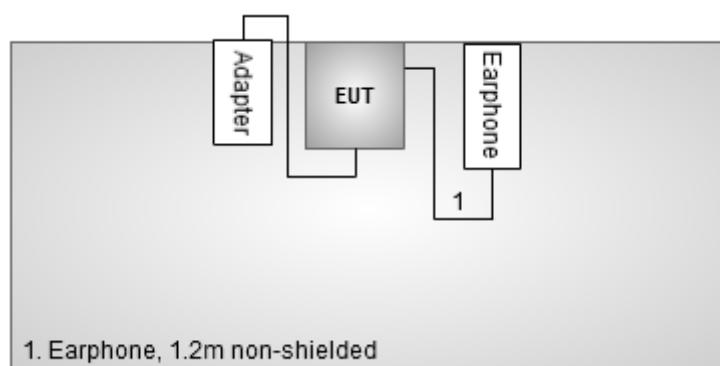**Test Setup Diagram - Radiated Above 1GHz Test****Operating Mode 1**

AC power & Radio link (WLAN)

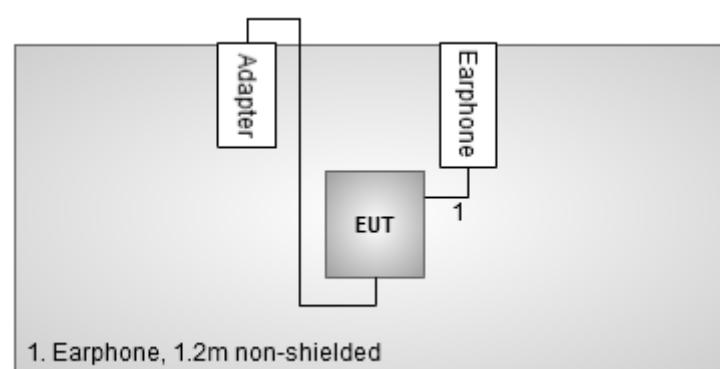

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.


3.1.4 Test Setup

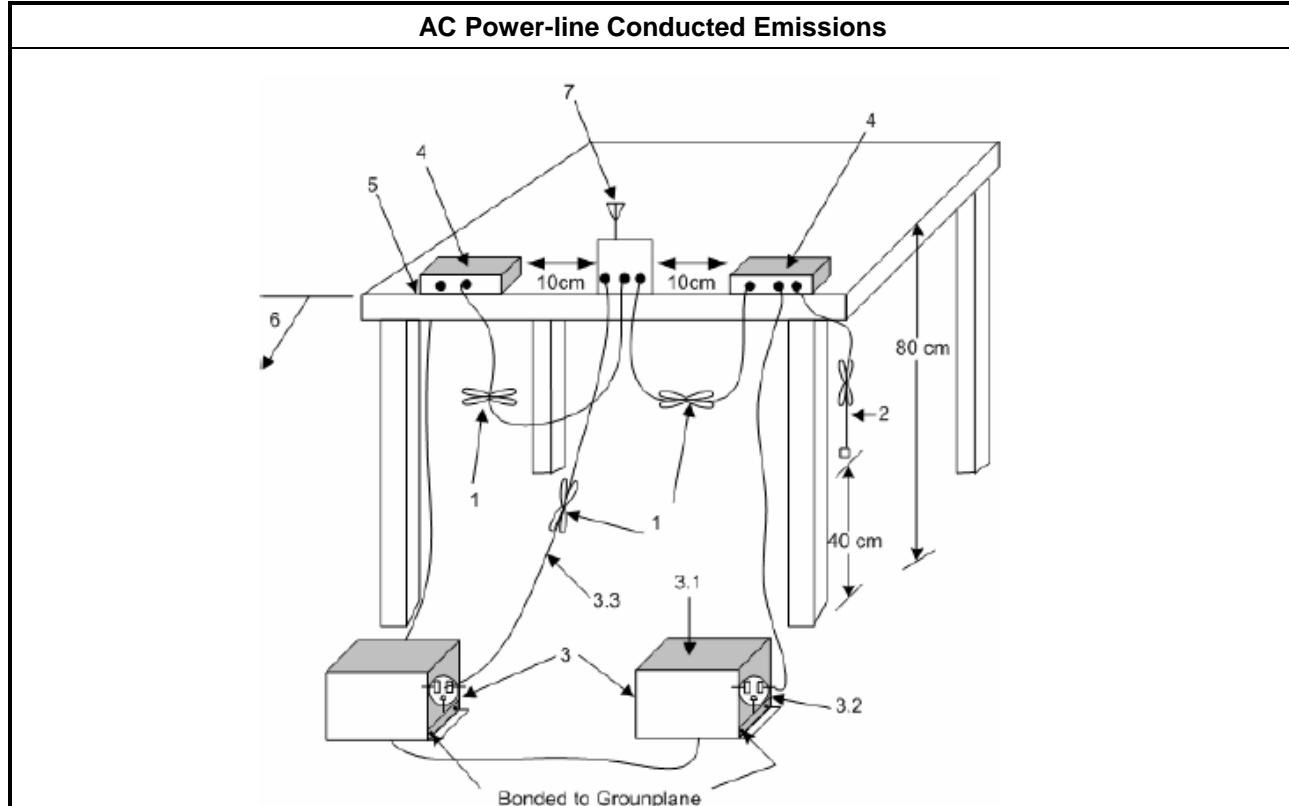



3.1.5 Test Result of AC Power-line Conducted Emissions

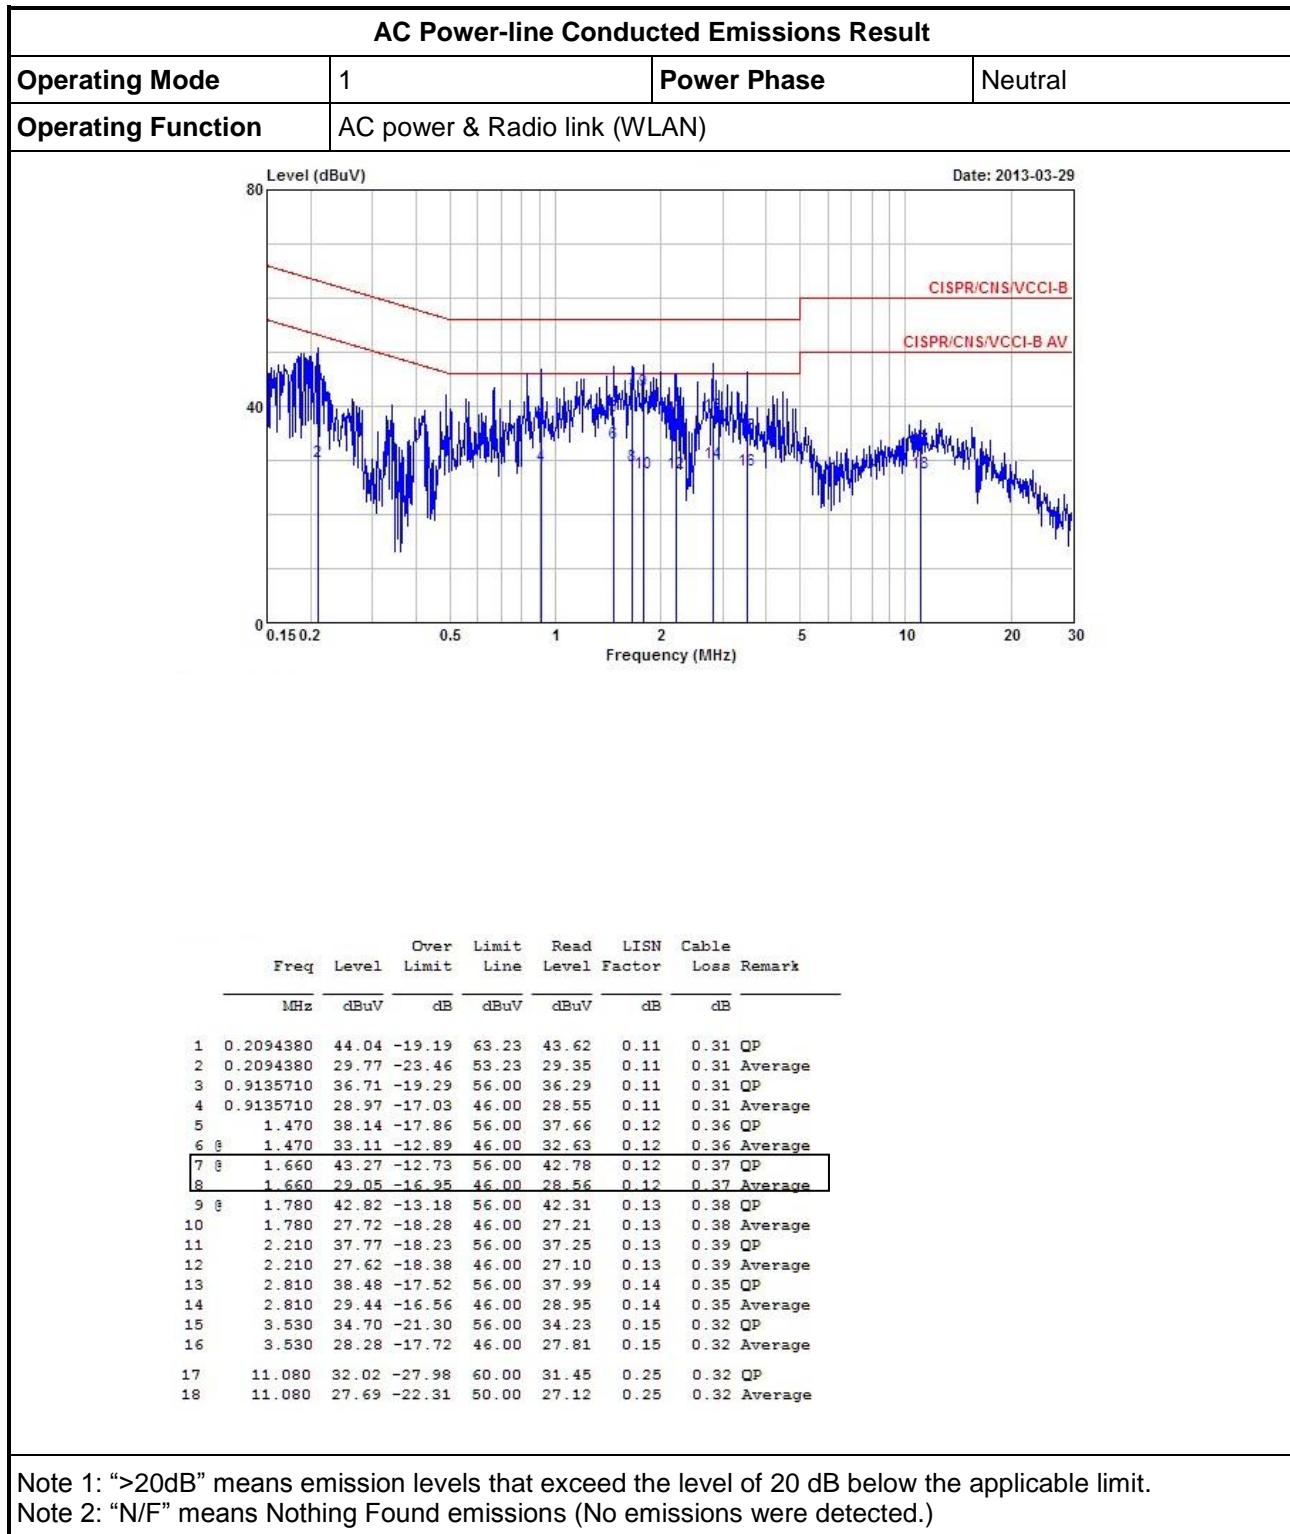

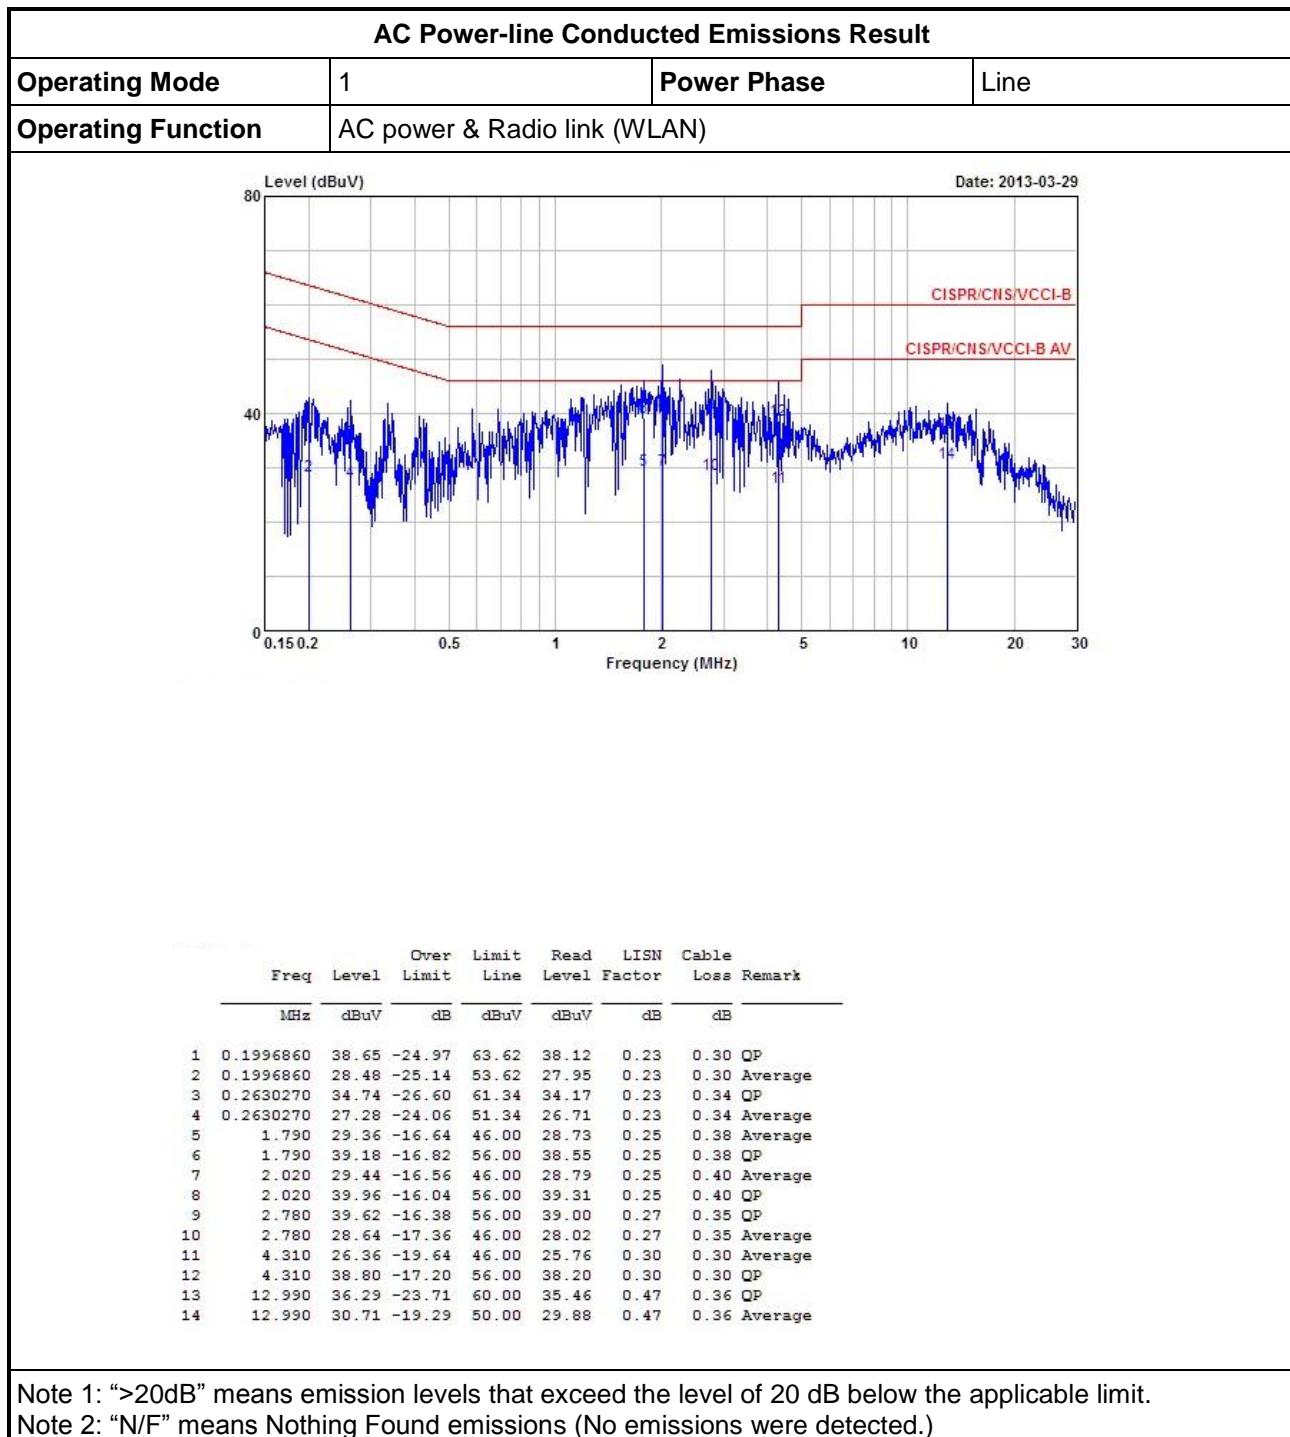

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<input checked="" type="checkbox"/> 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 7.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 7.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input type="checkbox"/> Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

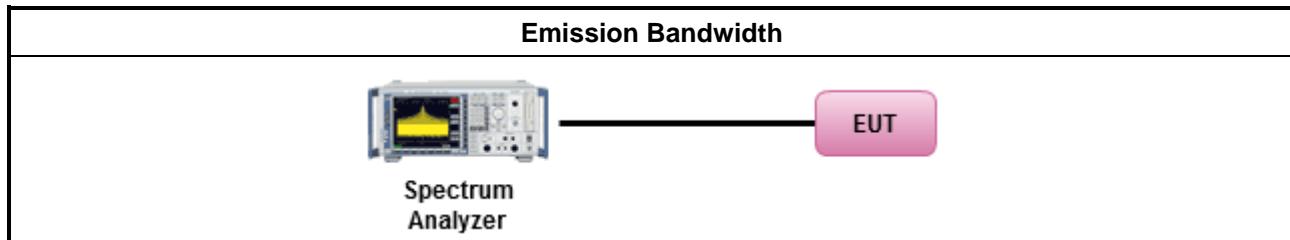




3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result									
Condition			Emission Bandwidth (MHz)						
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				6dB Bandwidth		
			Chain-Port 1	Chain-Port 2	Chain-Port 3	-	Chain-Port 1	Chain-Port 2	Chain-Port 3
11b	1	2412	12.97		-		8.23		-
11b	1	2437	12.97		-		8.23		-
11b	1	2462	12.97		-		8.23		-
11g	1	2412	17.19		-		16.58		-
11g	1	2437	17.19		-		16.52		-
11g	1	2462	17.25		-		16.46		-
HT-20	1	2412	18.23		-		17.68		-
HT-20	1	2437	18.12		-		17.68		-
HT-20	1	2462	18.23		-		17.74		-
Limit			N/A				≥500 kHz		
Result			Complied						

Note 1: N_{TX} = Number of Transmit Chains

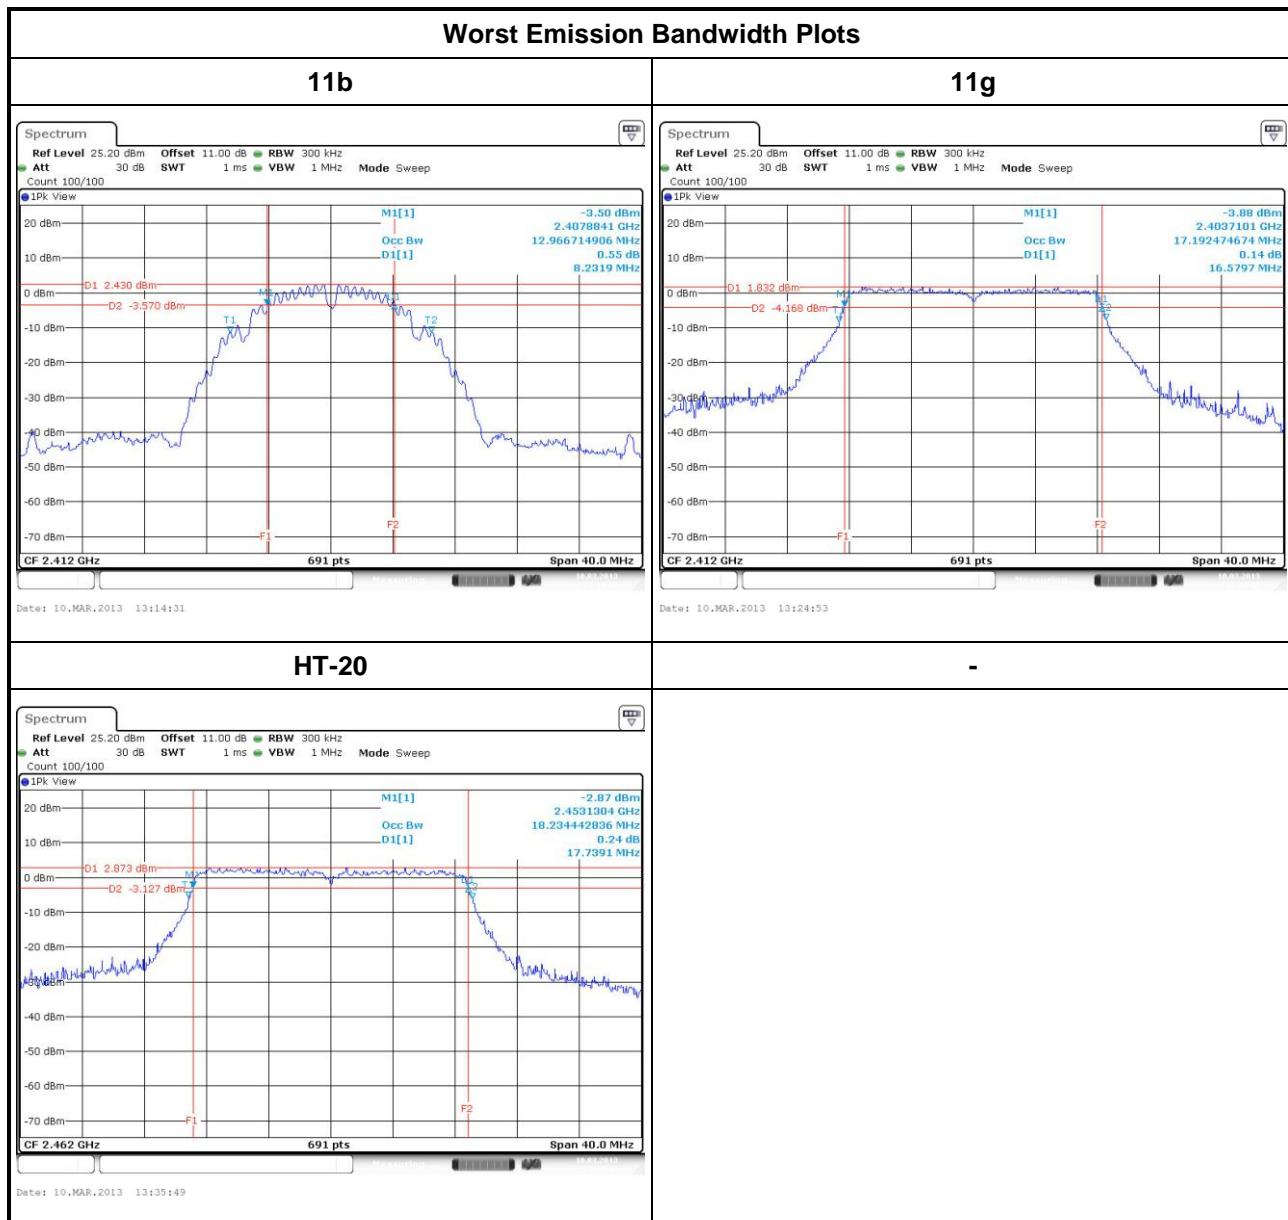



3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input checked="" type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)	
<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm	
<input type="checkbox"/> Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm	
<input type="checkbox"/> Smart antenna system (SAS):	
	<input type="checkbox"/> Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)	
<input type="checkbox"/> Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm	
<input type="checkbox"/> Smart antenna system (SAS)	
	<input type="checkbox"/> Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.1.1 Option 1 (RBW \geq EBW method). <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.1.2 Option 2 (integrated band power method). <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.1.3 Option 2 (peak power meter for VBW \geq DTS BW)
<input checked="" type="checkbox"/> Maximum Conducted (Average) Output Power	<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2.1 Option 1 (spectral trace averaging). <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2.2 Option 2 (slow sweep speed). <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.2.3 Option 3 (average power meter).
<input checked="" type="checkbox"/> For conducted measurement.	<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain. <input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case. <input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. <input checked="" type="checkbox"/> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

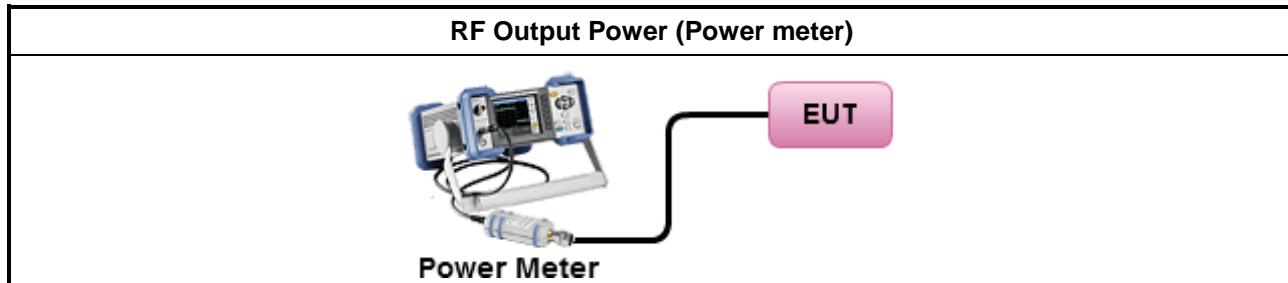



3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	-	-	-
Maximum G_{ANT} (dBi)		-8.5	-	-	-
Modulation Mode	DG (dBi)	N_{TX}	N_{SS}	STBC	Array Gain (dB)
11b,1-11Mbps	-8.50	1	1	-	-
11g,6-54Mbps	-8.50	1	1	-	-
HT-20,M0-M7	-8.50	1	1	-	-

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = $G_{ANT} + 10 \log(N_{TX})$
All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = $10 \log[(10^{G1/20} + \dots + 10^{GN/20})^2 / N_{TX}]$
All transmit signals are completely uncorrelated, Directional Gain = $10 \log[(10^{G1/10} + \dots + 10^{GN/10}) / N_{TX}]$

Note 3: For Spatial Multiplexing, Directional Gain (DG) = $G_{ANT} + 10 \log(N_{TX}/N_{SS})$,
where N_{SS} = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power measurements:
Directional Gain (DG) = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows:
Array Gain = 0 dB (i.e., no array gain) for $N_{TX} \leq 4$;
Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX} ;



3.3.6 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result												
Condition			RF Output Power (dBm)									
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit	
11b	1	2412	13.85				13.85	30	-8.5	5.35	36	
11b	1	2437	12.77				12.77	30	-8.5	4.27	36	
11b	1	2462	13.18				13.18	30	-8.5	4.68	36	
11g	1	2412	18.35				18.35	30	-8.5	9.85	36	
11g	1	2437	18.59				18.59	30	-8.5	10.09	36	
11g	1	2462	18.51				18.51	30	-8.5	10.01	36	
HT-20	1	2412	19.48				19.48	30	-8.5	10.98	36	
HT-20	1	2437	19.29				19.29	30	-8.5	10.79	36	
HT-20	1	2462	19.25				19.25	30	-8.5	10.75	36	
Result												

3.3.7 Test Result of Maximum Conducted Output Power

Maximum Conducted Output Power												
Condition			RF Output Power (dBm)									
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit	
11b	1	2412	10.64				10.64	30	-8.5	2.14	36	
11b	1	2437	9.83				9.83	30	-8.5	1.33	36	
11b	1	2462	10.43				10.43	30	-8.5	1.93	36	
11g	1	2412	10.59				10.59	30	-8.5	2.09	36	
11g	1	2437	10.47				10.47	30	-8.5	1.97	36	
11g	1	2462	10.31				10.31	30	-8.5	1.81	36	
HT-20	1	2412	11.88				11.88	30	-8.5	3.38	36	
HT-20	1	2437	11.64				11.64	30	-8.5	3.14	36	
HT-20	1	2462	11.65				11.65	30	-8.5	3.15	36	
Result			Complied									



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<input checked="" type="checkbox"/> Power Spectral Density (PSD) $\leq 8 \text{ dBm/3kHz}$

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the power spectral density. In addition, the use of a peak PSD procedure will always result in a "worst-case" measured level for comparison to the limit. Therefore, whenever the DTS bandwidth exceeds 500 kHz, it is acceptable to utilize the peak PSD procedure to demonstrate compliance to the PSD limit, regardless of how the fundamental output power was measured. For the power spectral density shall be measured using below options:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.1 Option 1 - (RBW $\geq 3\text{kHz}$; sweep=auto, detector=peak).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2 Option 2 - (RBW $\geq 3\text{kHz}$; sweep=auto, average=100).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.3 Option 3 - (RBW $\geq 3\text{kHz}$; slow sweep speed).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.4 Alternative 1 (average PSD; Add 10log (1/duty cycle)).
<input checked="" type="checkbox"/> RBW $>3\text{kHz}$, add the bandwidth correction factor (BWCF) adjusting in PSD per 3kHz.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N_{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.




3.4.4 Test Setup

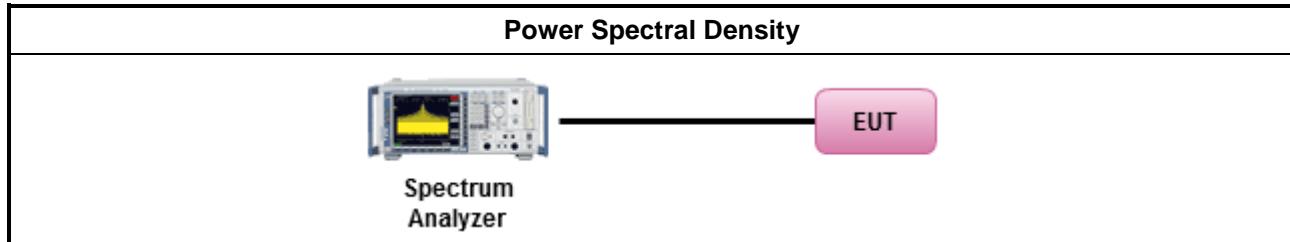

3.4.5 Test Result of Power Spectral Density


Condition			Power Spectral Density (dBm/3kHz)					
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	-	-	-	-	Power Limit
11b	1	2412	-13.17	-	-	-	-	8
11b	1	2437	-14.78	-	-	-	-	8
11b	1	2462	-14.19	-	-	-	-	8
11g	1	2412	-16.60	-	-	-	-	8
11g	1	2437	-16.43	-	-	-	-	8
11g	1	2462	-16.45	-	-	-	-	8
HT-20	1	2412	-15.74	-	-	-	-	8
HT-20	1	2437	-15.16	-	-	-	-	8
HT-20	1	2462	-15.28	-	-	-	-	8
Result			Complied					

Note 1: PSD [dBm/3kHz] = sum each transmit chains by bin-to-bin PSD [dBm/100kHz] + BWFC [-15.2 dB]

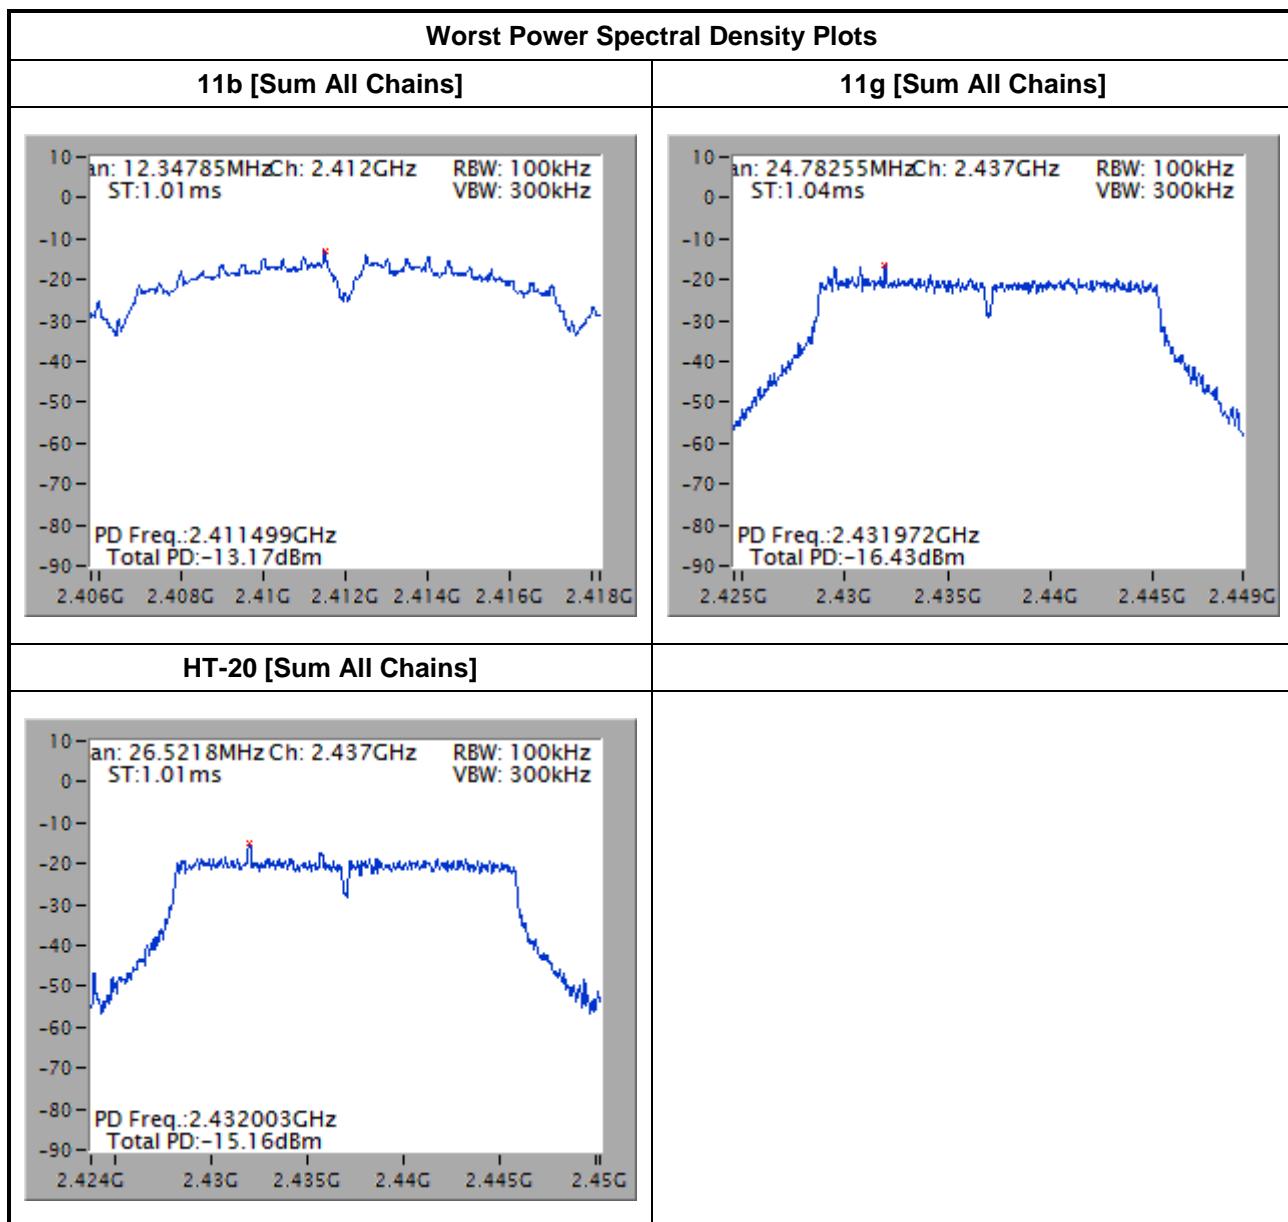

3.5 Transmitter Radiated Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

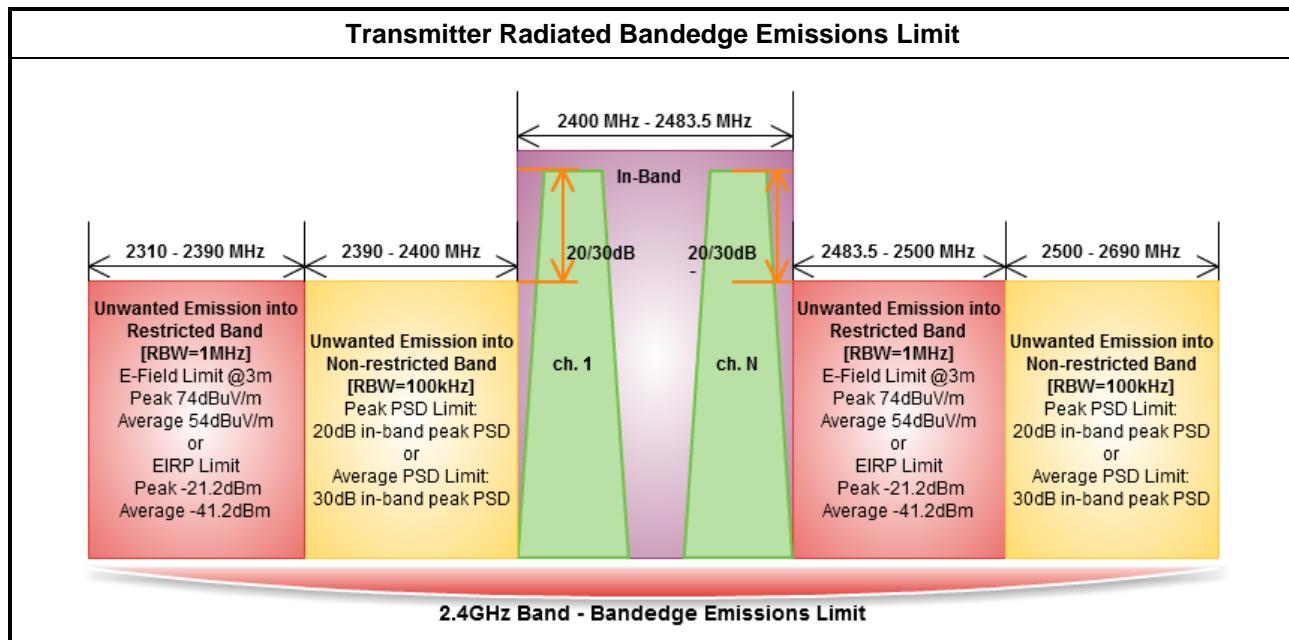


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/> For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.1 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 for unwanted emissions into restricted bands.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 1 (spectral trace averaging)
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 2 (slow sweep speed).
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW).
<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.2 and 8.1.1 measurement procedure peak limit.
<input checked="" type="checkbox"/> For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.5.2 for narrower resolution bandwidth using the band power and summing the spectral levels (i.e., 100 kHz or 1 MHz).
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/> For radiated measurement, refer as FCC KDB 558074, clause 10.2.1.
<input type="checkbox"/> For conducted measurement, refer as FCC KDB 558074, clause 10.2.2.

3.5.4 Test Setup

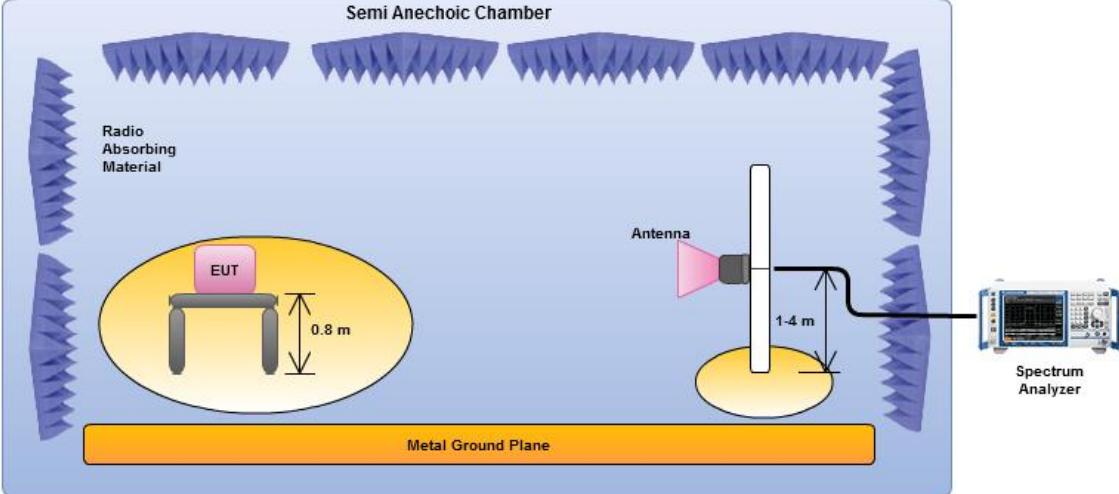Transmitter Radiated Bandedge Emissions

Electric field tests shall be performed in transmitter bandedge emissions using a calibrated horn antenna.



3.5.5 Test Result of Transmitter Radiated Bandedge Emissions



Transmitter Radiated Bandedge Emissions Result								
Modulation	11b			N _{TX}	1			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	89.98	2392.77	45.57	44.41	20	PK	H
2500~2690	2462	90.28	2522.00	31.81	58.47	20	PK	H
Low Bandedge				Up Bandedge				

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

Transmitter Radiated Bandedge Emissions Result								
Modulation	11b			N _{TX}	1			
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	91.89	2350.10	3	41.15	74	PK	H
2310-2390	2412	89.21	2351.89	3	30.95	54	AV	H
2483.5-2500	2462	90.93	2483.4	3	42.08	74	PK	H
2483.5-2500	2462	88.37	2496.90	3	28.44	54	AV	H

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).

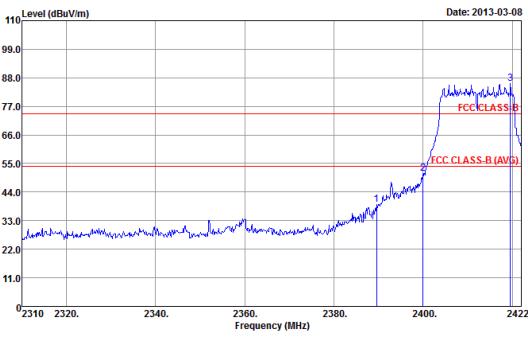
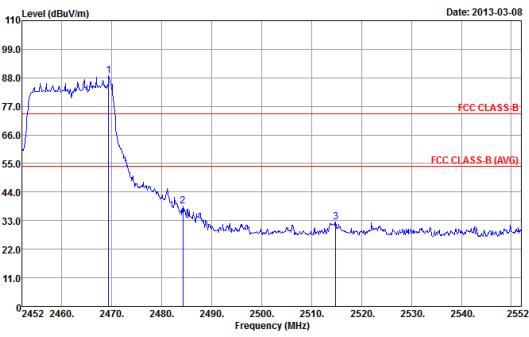


Transmitter Radiated Bandedge Emissions Result								
Modulation	11g			N _{TX}	1			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	85.77	2400.00	51.11	34.66	20	PK	H
2500~2690	2462	88.72	2514.80	32.43	56.29	20	PK	H
Low Bandedge				Up Bandedge				
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	11g			N _{TX}	1			
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	92.95	2389.97	3	52.87	74	PK	H
2310-2390	2412	82.76	2389.97	3	35.56	54	AV	H
2483.5-2500	2462	93.74	2483.6	3	52.94	74	PK	H
2483.5-2500	2462	82.96	2483.5	3	34.73	54	AV	H

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).

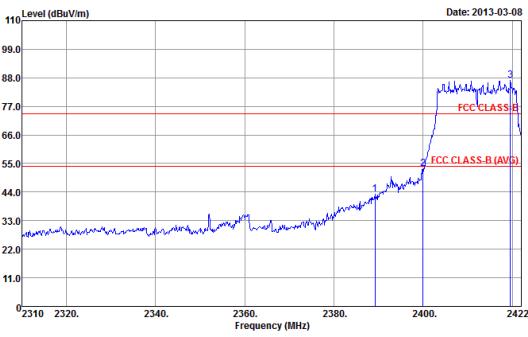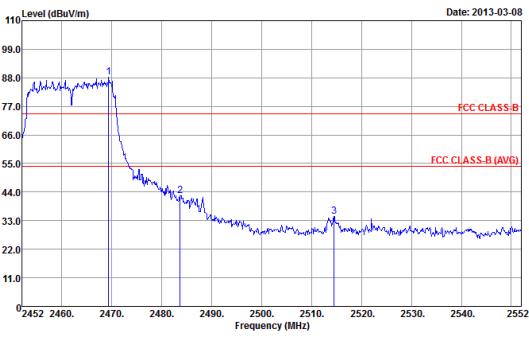

Transmitter Radiated Bandedge Emissions Result								
Modulation	HT-20			N _{TX}	1			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	87.05	2400.00	53.16	33.89	20	PK	H
2500~2690	2462	88.17	2514.50	34.71	53.46	20	PK	H
Low Bandedge				Up Bandedge				
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	HT-20			N _{TX}	1			
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	94.26	2385.26	3	56.20	74	PK	H
2310-2390	2412	83.58	2389.97	3	39.64	54	AV	H
2483.5-2500	2462	95.46	2483.90	3	56.89	74	PK	H
2483.5-2500	2462	84.21	2483.60	3	38.99	54	AV	H

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).



3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.1 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 10.2 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 1 (spectral trace averaging)
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.3 and 8.2.1 Option 2 (slow sweep speed).
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle \geq 98%.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.2 and 8.1.1 measurement procedure peak limit.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2.3.1 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 10.2.1.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 10.2.2.
	<input type="checkbox"/> For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
	<input type="checkbox"/> For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB

3.6.4 Test Setup

Transmitter Radiated Unwanted Emissions

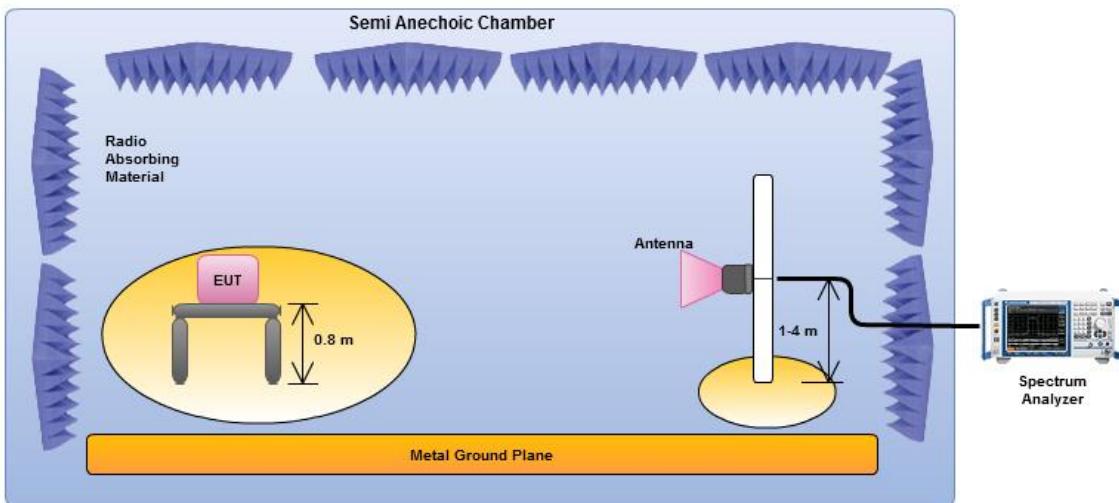


Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




3.6.6 Radiated Emissions (Below 1GHz)

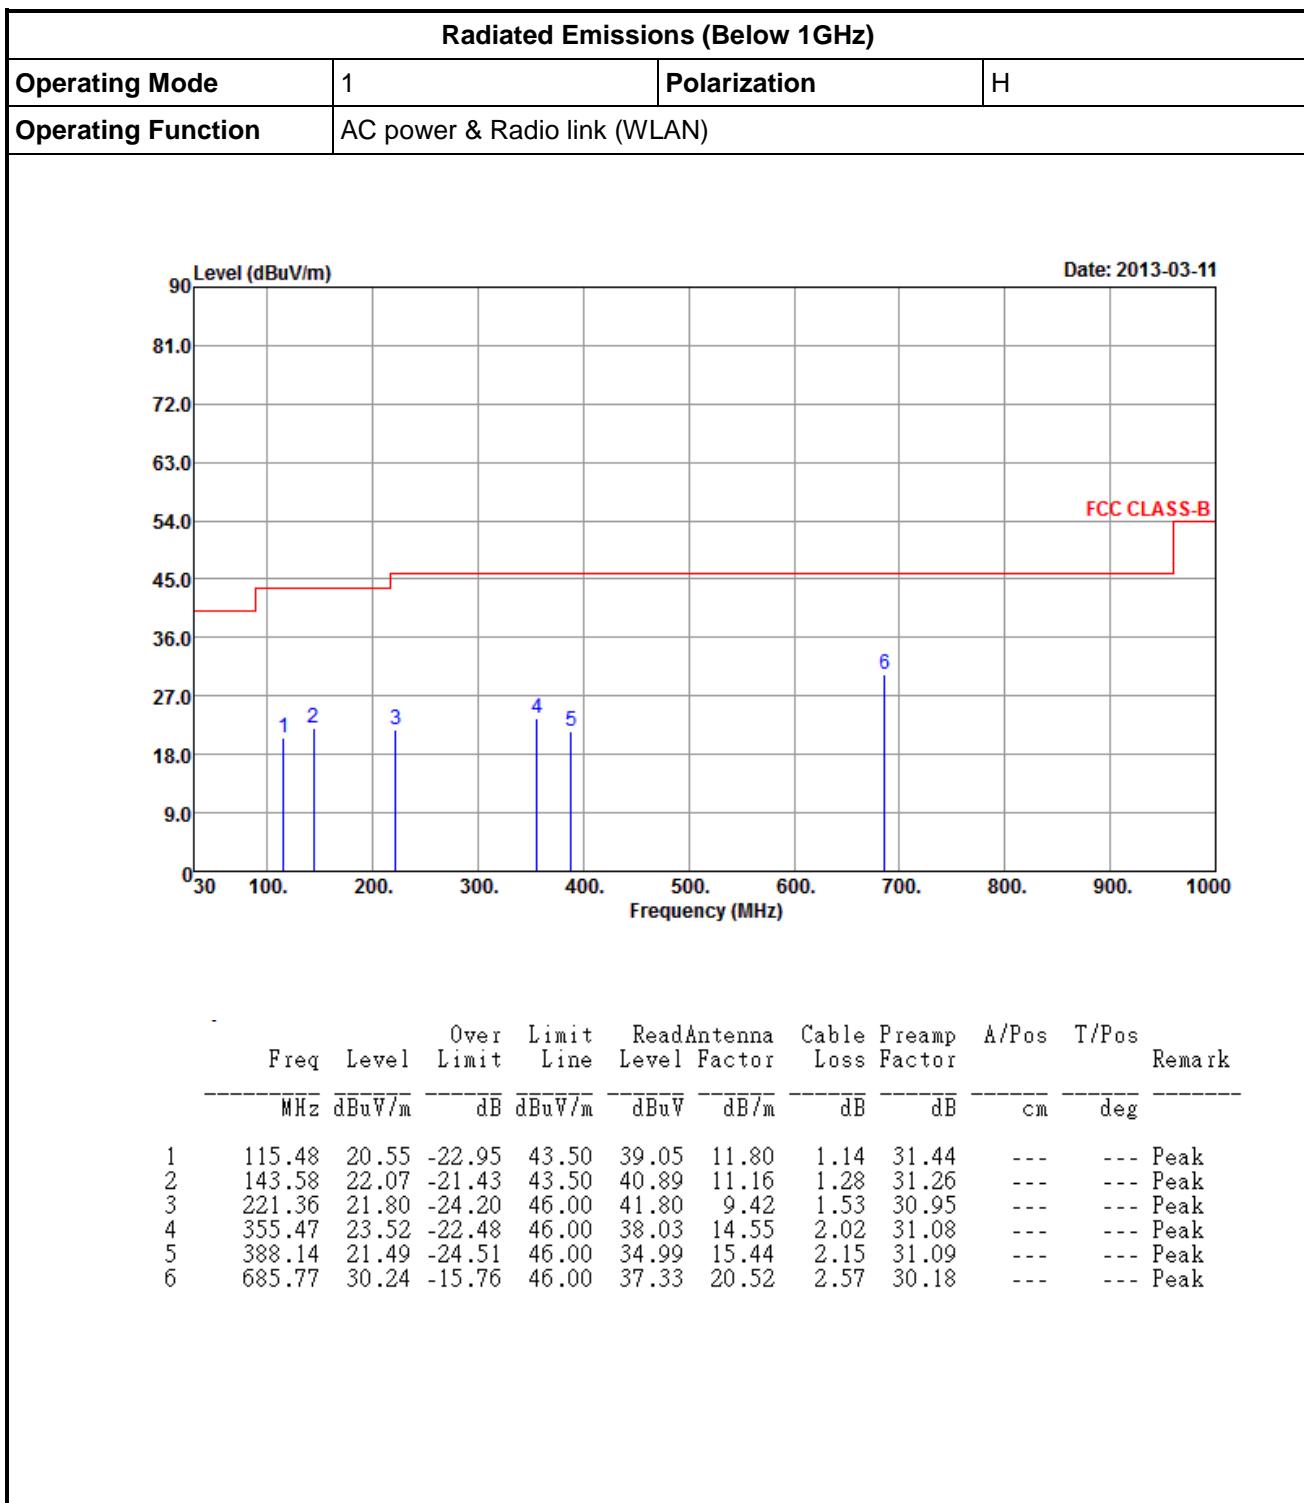

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

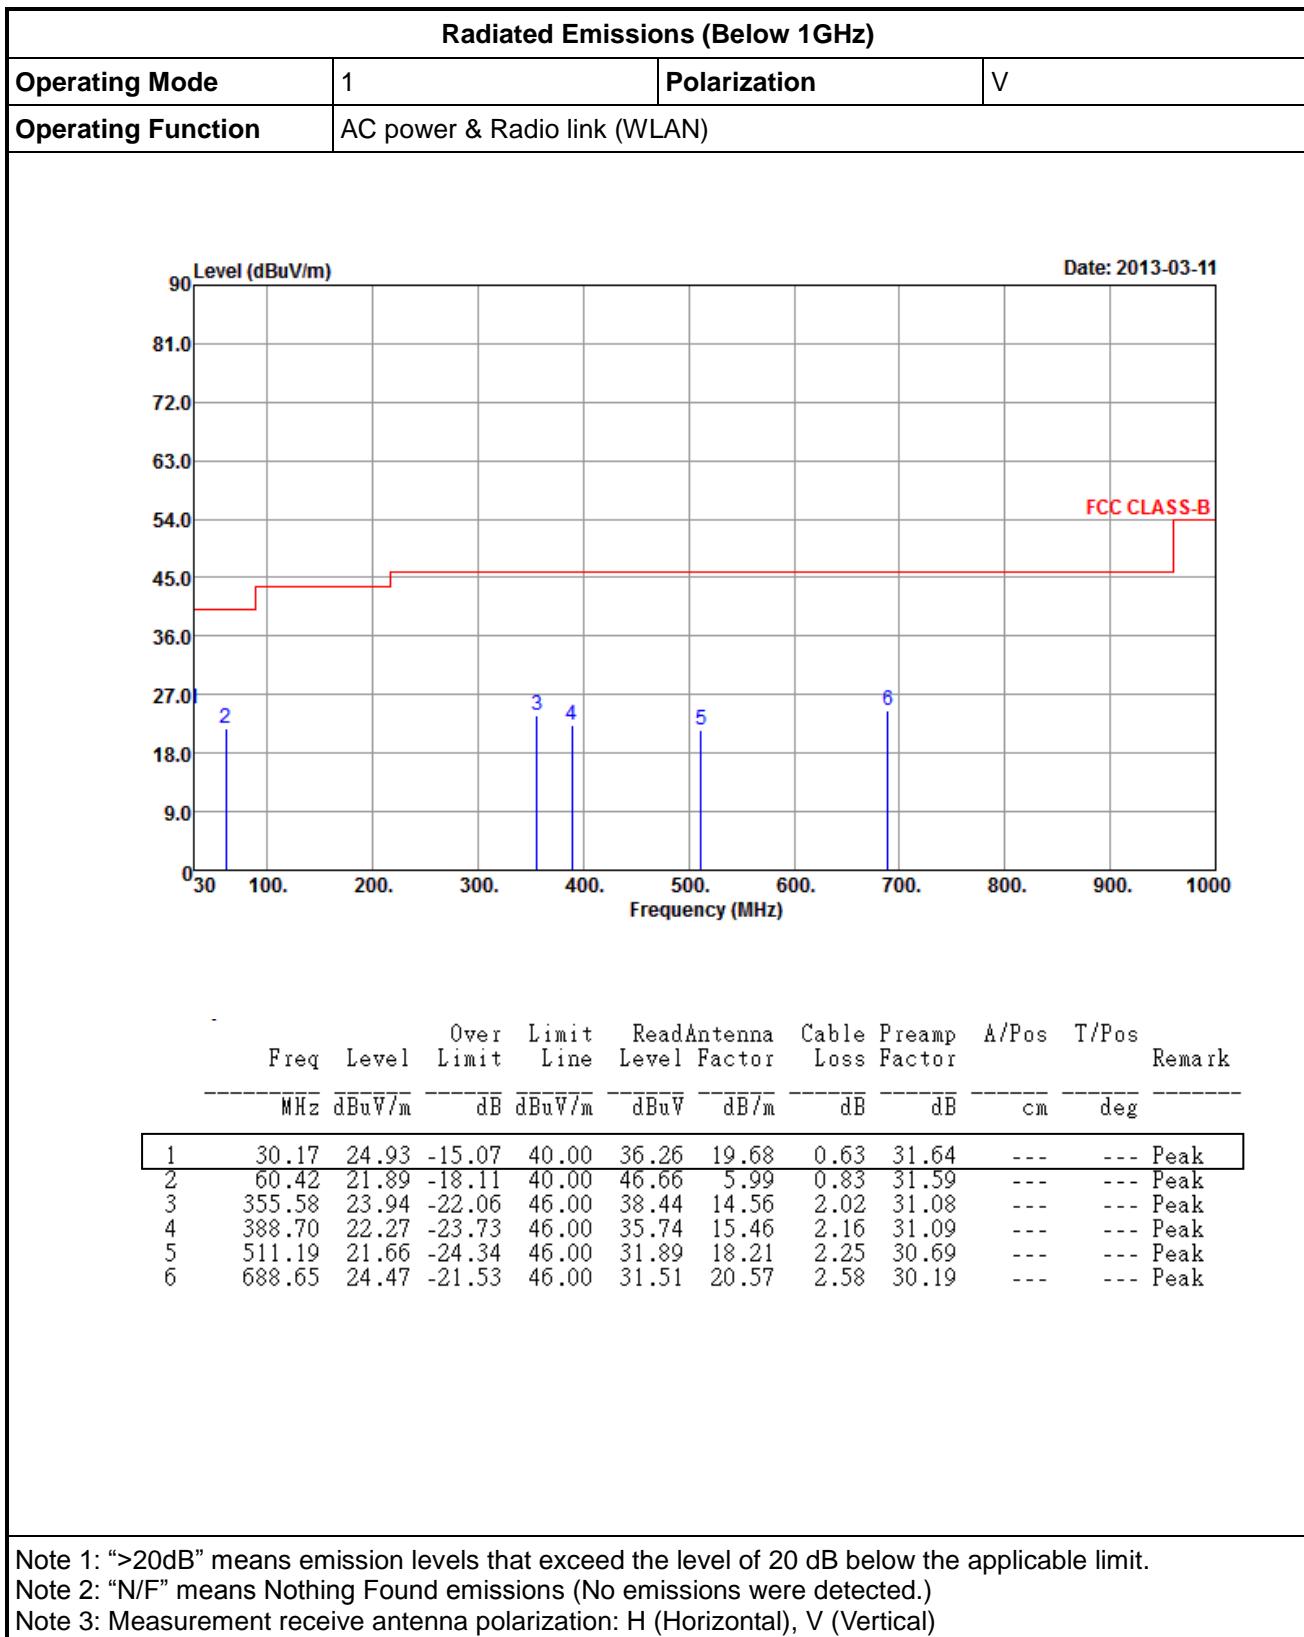



3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b


Transmitter Radiated Unwanted Emissions (Above 1GHz)																				
Modulation Mode	11b		Test Freq. (FX)		F1															
N _{TX}	1		Polarization		H															
Level (dB _{UV} /m)																				
Date: 2013-03-08																				
Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark										
MHz	dB _{UV} /m	dB	dB _{UV} /m	dB _{UV}	dB _{7m}	dB	dB	cm	deg											
1	1050.00	25.19	-28.81	54.00	32.39	27.91	2.95	38.06	---	Average										
2	1050.00	38.64	-35.36	74.00	45.84	27.91	2.95	38.06	---	Peak										
3	3848.00	28.76	-25.24	54.00	24.58	33.19	5.89	34.90	---	Average										
4	3848.00	41.87	-32.13	74.00	37.69	33.19	5.89	34.90	---	Peak										
5	4824.00	31.31	-22.69	54.00	25.50	34.26	6.51	34.96	---	Average										
6	4824.00	44.18	-29.82	74.00	38.37	34.26	6.51	34.96	---	Peak										

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 2 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (FX)	F1
N _{TX}	1	Polarization	V

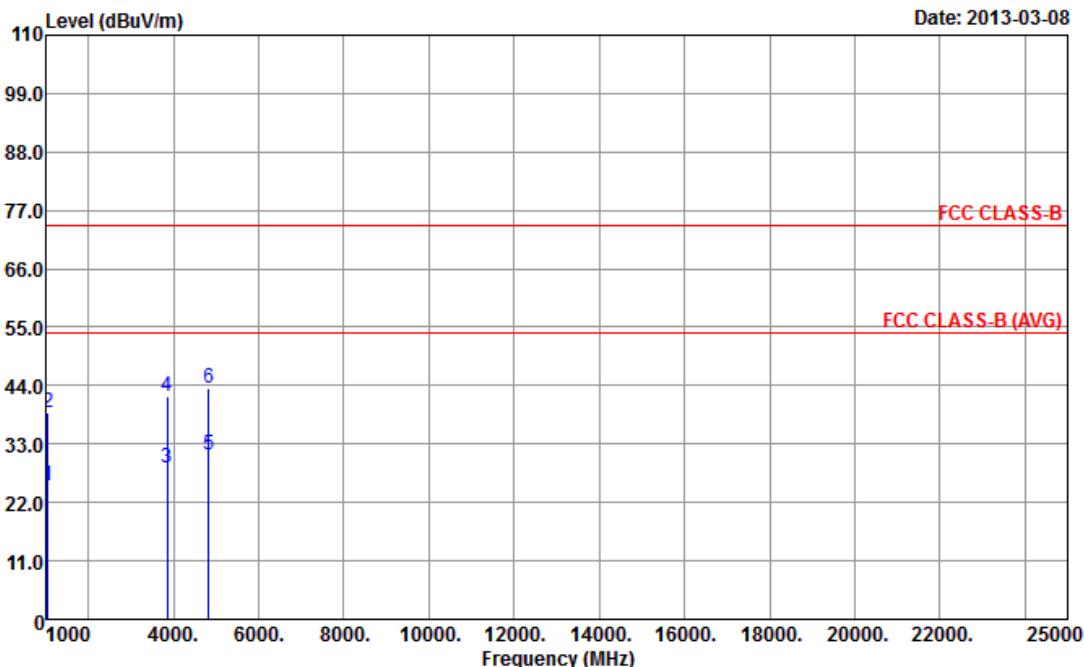

	Freq	Level	Over Limit	Line	Read Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1050.00	25.24	-28.76	54.00	32.44	27.91	2.95	38.06	---	Average
2	1050.00	38.99	-35.01	74.00	46.19	27.91	2.95	38.06	---	Peak
3	3848.00	28.64	-25.36	54.00	24.46	33.19	5.89	34.90	---	Average
4	3848.00	41.89	-32.11	74.00	37.71	33.19	5.89	34.90	---	Peak
5	4824.00	30.86	-23.14	54.00	25.05	34.26	6.51	34.96	---	Average
6	4824.00	43.65	-30.35	74.00	37.84	34.26	6.51	34.96	---	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 2 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

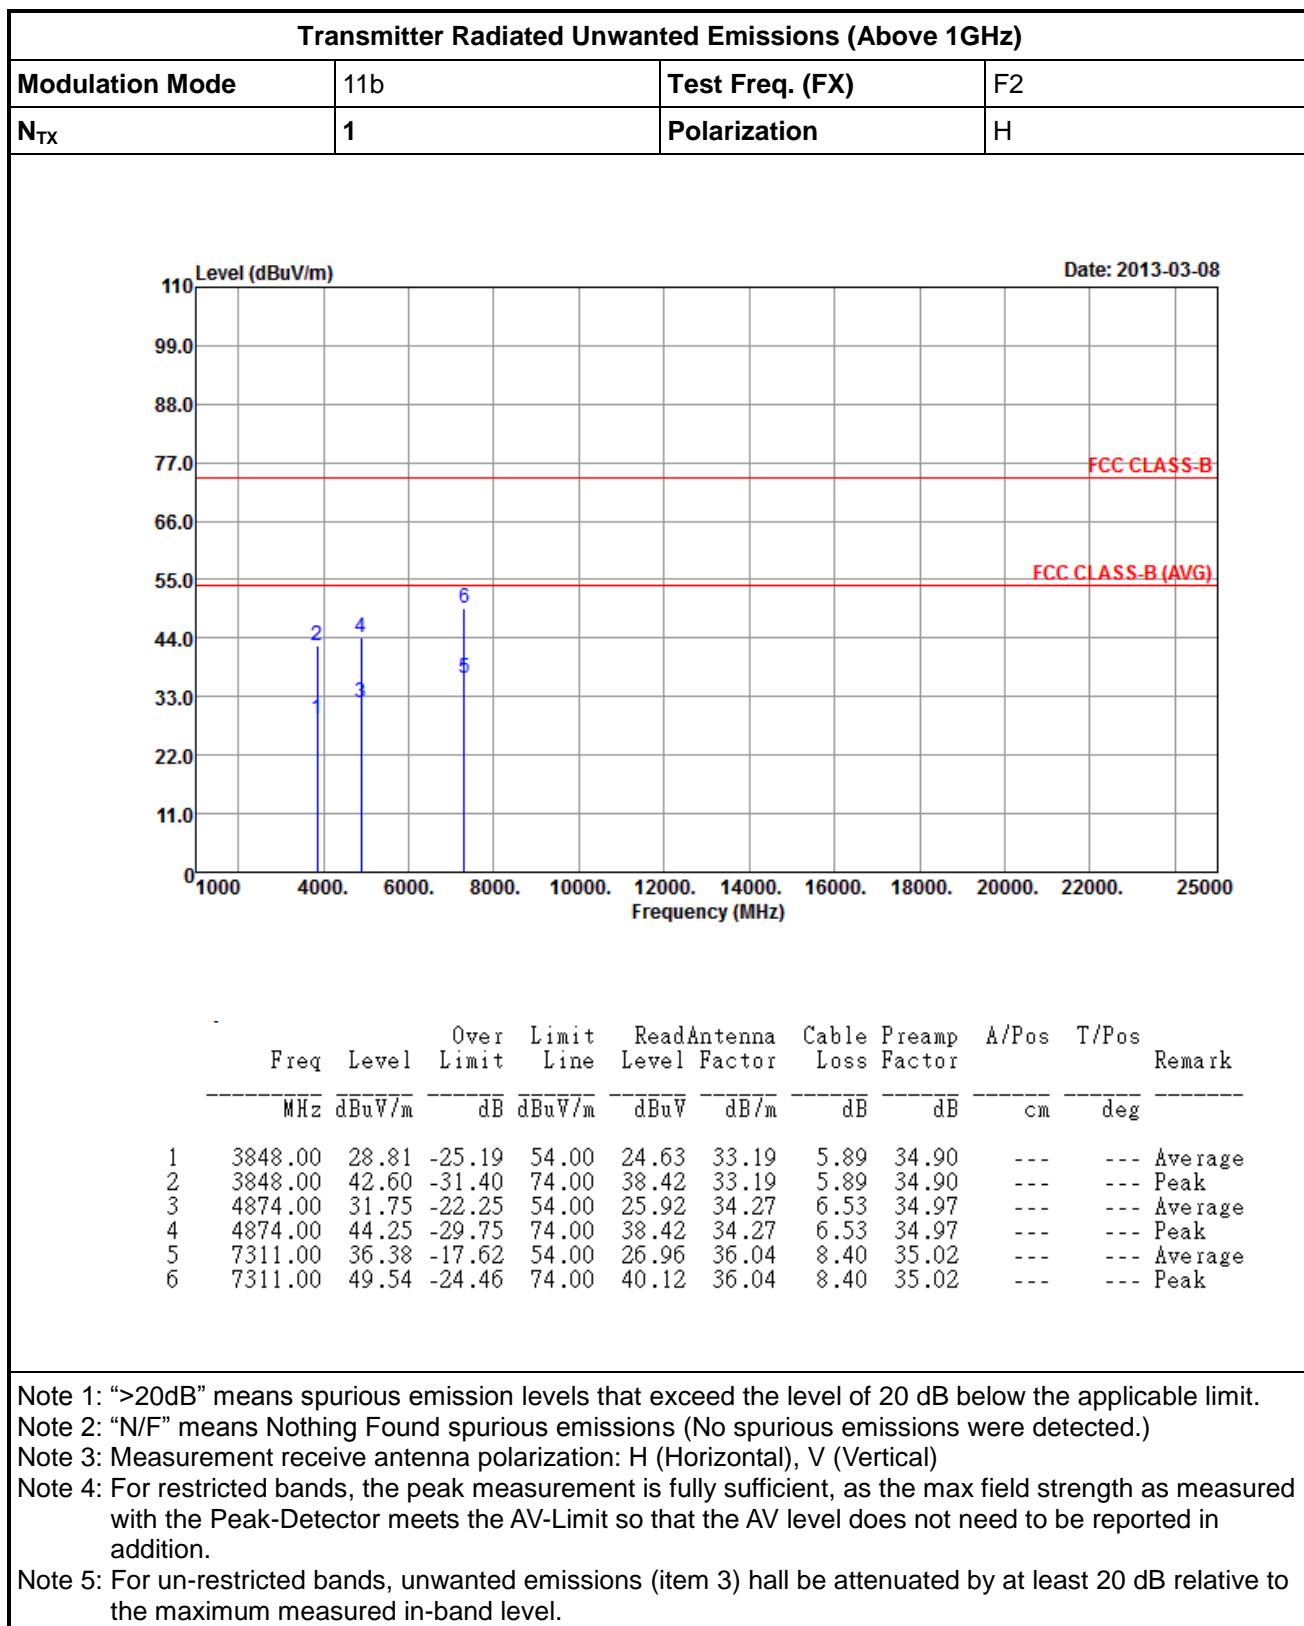

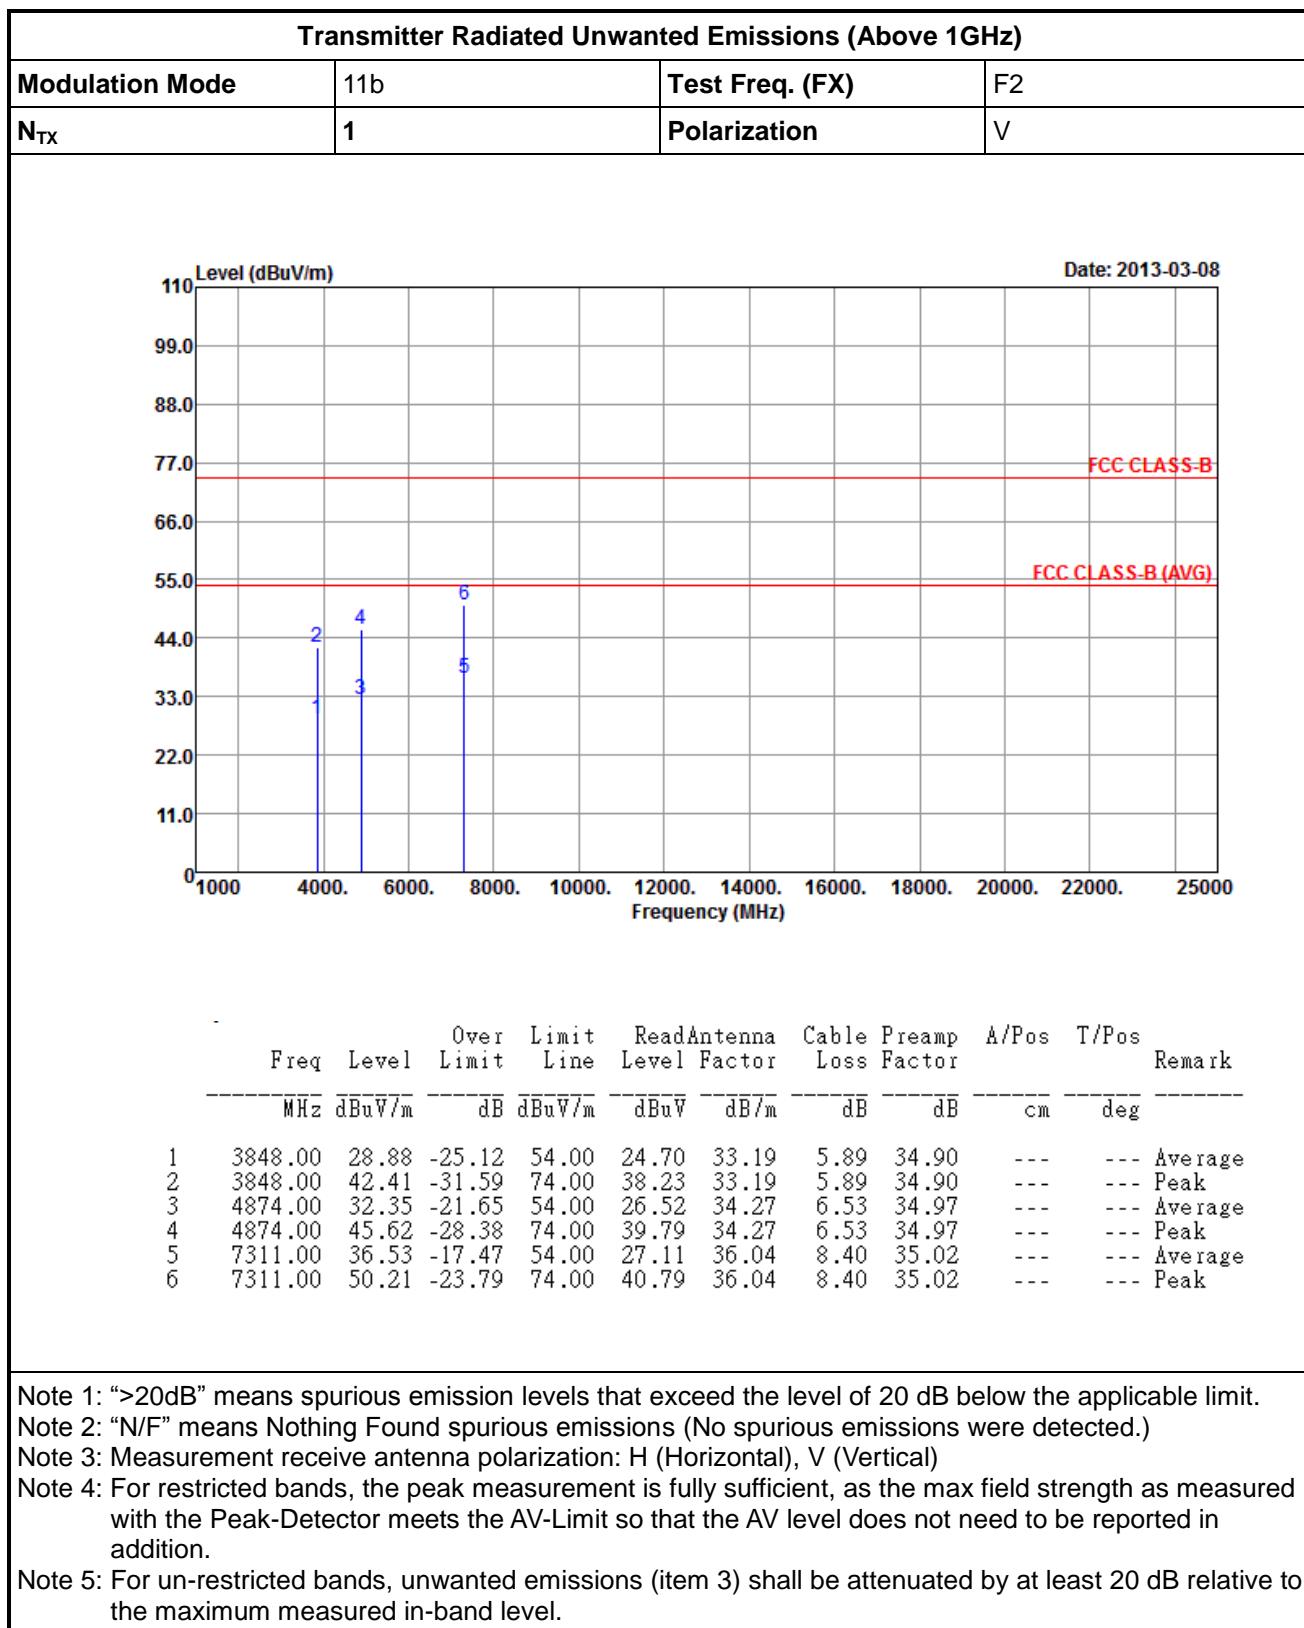



Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode		11b		Test Freq. (FX)		F3					
N _{TX}		1		Polarization		H					
Date: 2013-03-08											
1	3848.00	28.82	-25.18	54.00	24.64	33.19	5.89	34.90	---	---	Average
2	3848.00	41.91	-32.09	74.00	37.73	33.19	5.89	34.90	---	---	Peak
3	4924.00	31.91	-22.09	54.00	26.06	34.28	6.55	34.98	---	---	Average
4	4924.00	44.86	-29.14	74.00	39.01	34.28	6.55	34.98	---	---	Peak
5	7386.00	36.12	-17.88	54.00	26.59	36.02	8.56	35.05	---	---	Average
6	7386.00	50.53	-23.47	74.00	41.00	36.02	8.56	35.05	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode		11b		Test Freq. (FX)		F3					
N _{TX}		1		Polarization		V					
Date: 2013-03-08											
1	3848.00	28.82	-25.18	54.00	24.64	33.19	5.89	34.90	---	---	Average
2	3848.00	42.08	-31.92	74.00	37.90	33.19	5.89	34.90	---	---	Peak
3	4924.00	31.82	-22.18	54.00	25.97	34.28	6.55	34.98	---	---	Average
4	4924.00	44.70	-29.30	74.00	38.85	34.28	6.55	34.98	---	---	Peak
5	7386.00	36.27	-17.73	54.00	26.74	36.02	8.56	35.05	---	---	Average
6	7386.00	49.71	-24.29	74.00	40.18	36.02	8.56	35.05	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

Transmitter Radiated Unwanted Emissions (Above 1GHz)																			
Modulation Mode		11g		Test Freq. (FX)		F1													
N _{TX}		1		Polarization		H													
Freq	Over Limit	Line Level	Read Antenna Level	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark											
MHz	dB	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg										
1	25.30	-28.70	54.00	32.50	27.91	2.95	38.06	---	---	Average									
2	38.20	-35.80	74.00	45.40	27.91	2.95	38.06	---	---	Peak									
3	28.93	-25.07	54.00	24.75	33.19	5.89	34.90	---	---	Average									
4	41.81	-32.19	74.00	37.63	33.19	5.89	34.90	---	---	Peak									
5	31.31	-22.69	54.00	25.50	34.26	6.51	34.96	---	---	Average									
6	44.00	-30.00	74.00	38.19	34.26	6.51	34.96	---	---	Peak									

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 2 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (FX)	F1
N _{TX}	1	Polarization	V

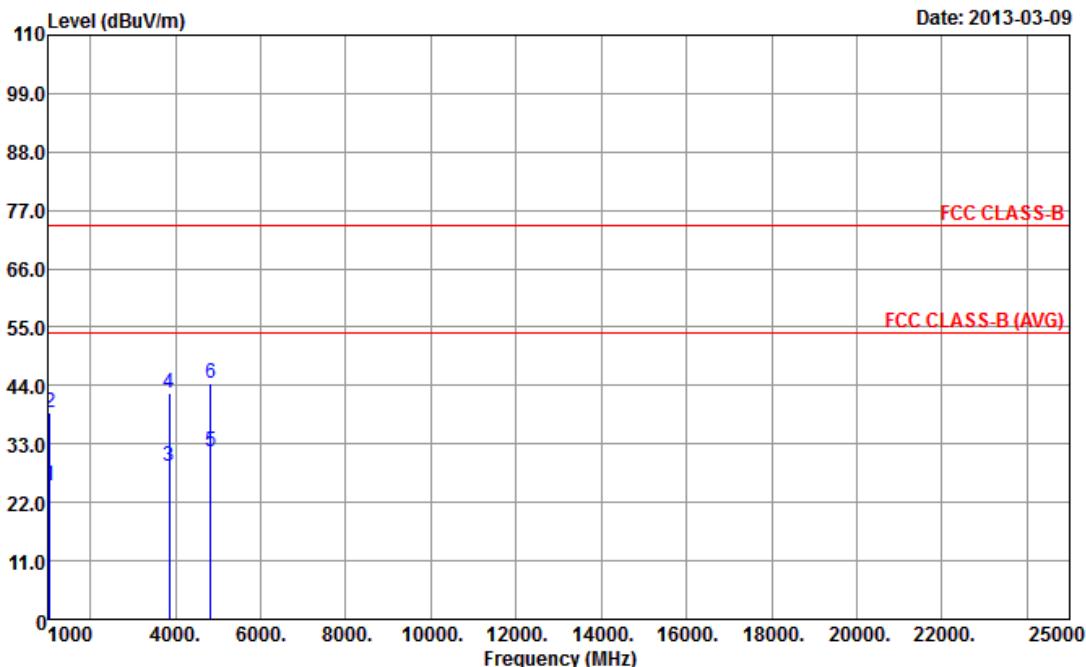

	Freq	Level	Over Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1050.00	25.26	-28.74	54.00	32.46	27.91	2.95	38.06	---	Average
2	1050.00	38.87	-35.13	74.00	46.07	27.91	2.95	38.06	---	Peak
3	3848.00	28.71	-25.29	54.00	24.53	33.19	5.89	34.90	---	Average
4	3848.00	42.57	-31.43	74.00	38.39	33.19	5.89	34.90	---	Peak
5	4824.00	31.51	-22.49	54.00	25.70	34.26	6.51	34.96	---	Average
6	4824.00	44.41	-29.59	74.00	38.60	34.26	6.51	34.96	---	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 2 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

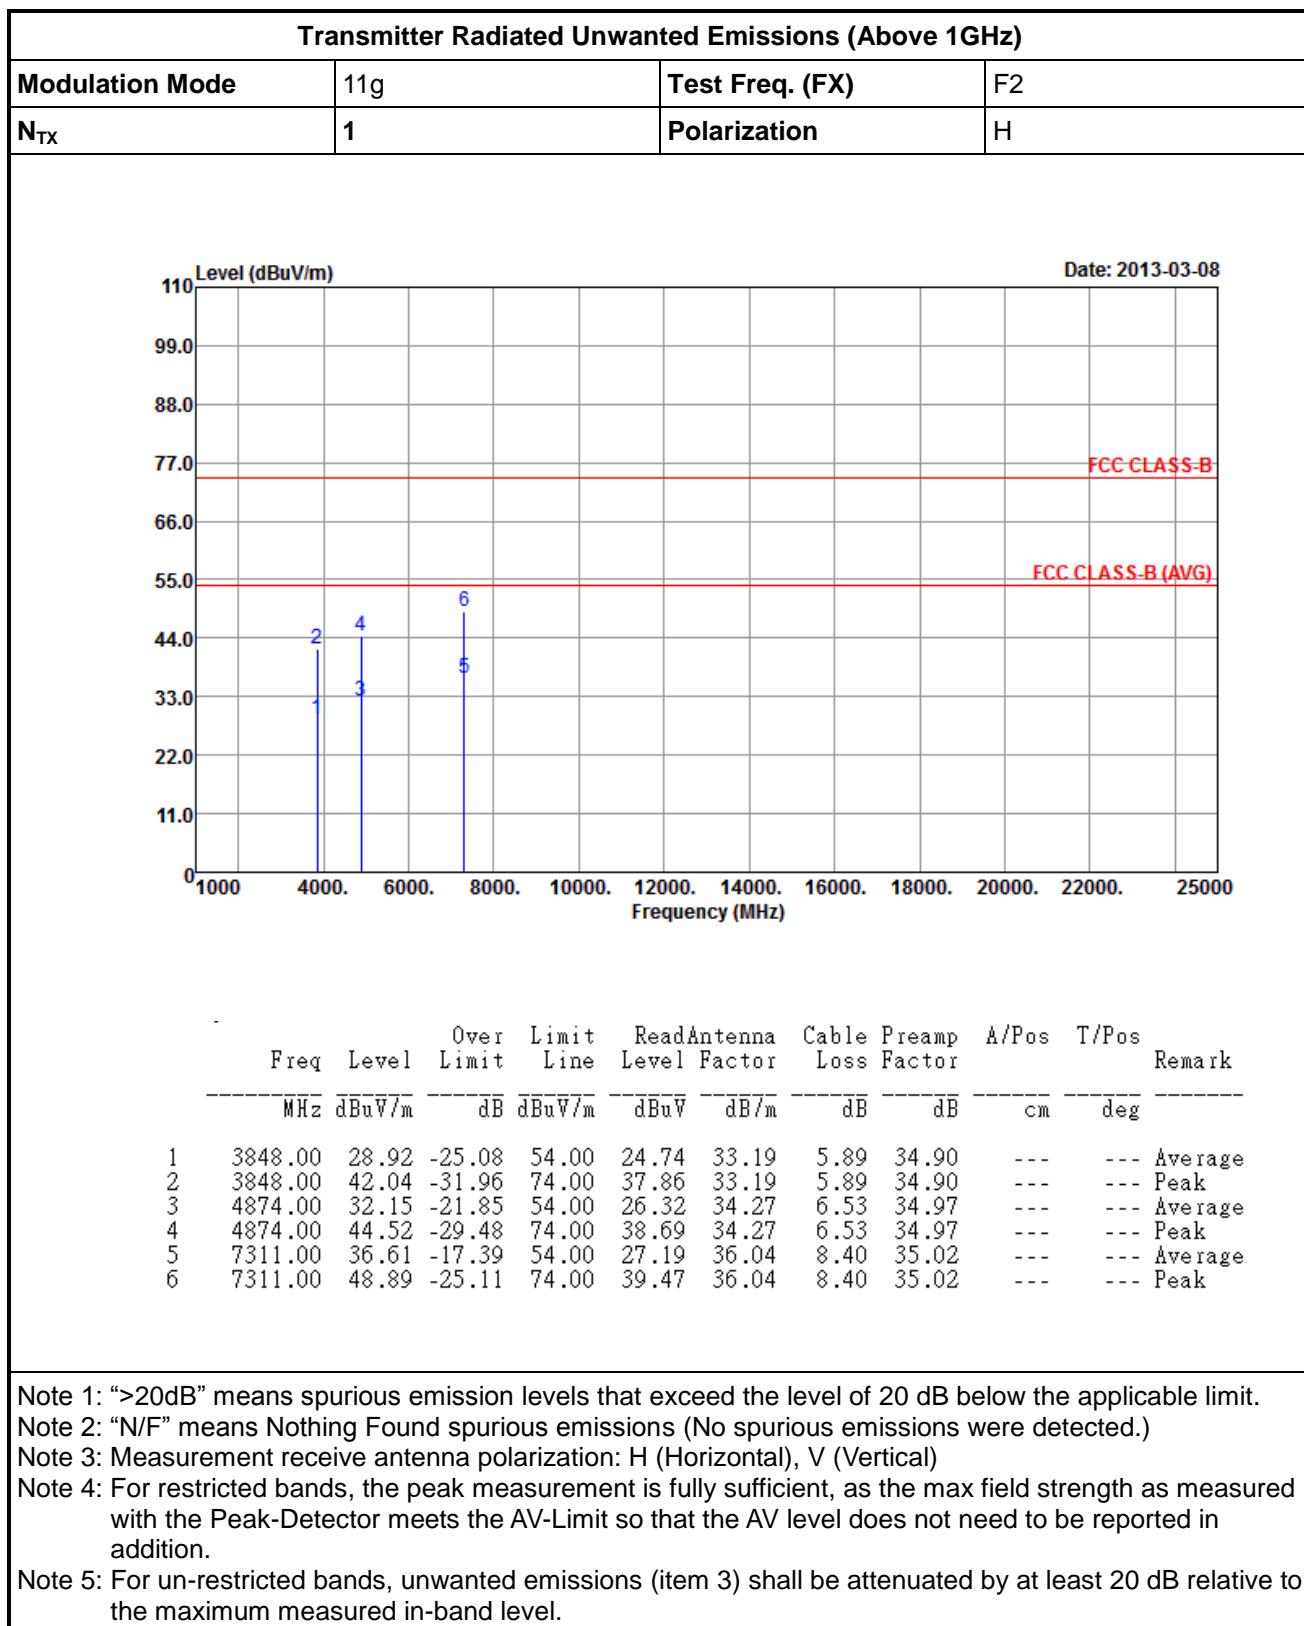

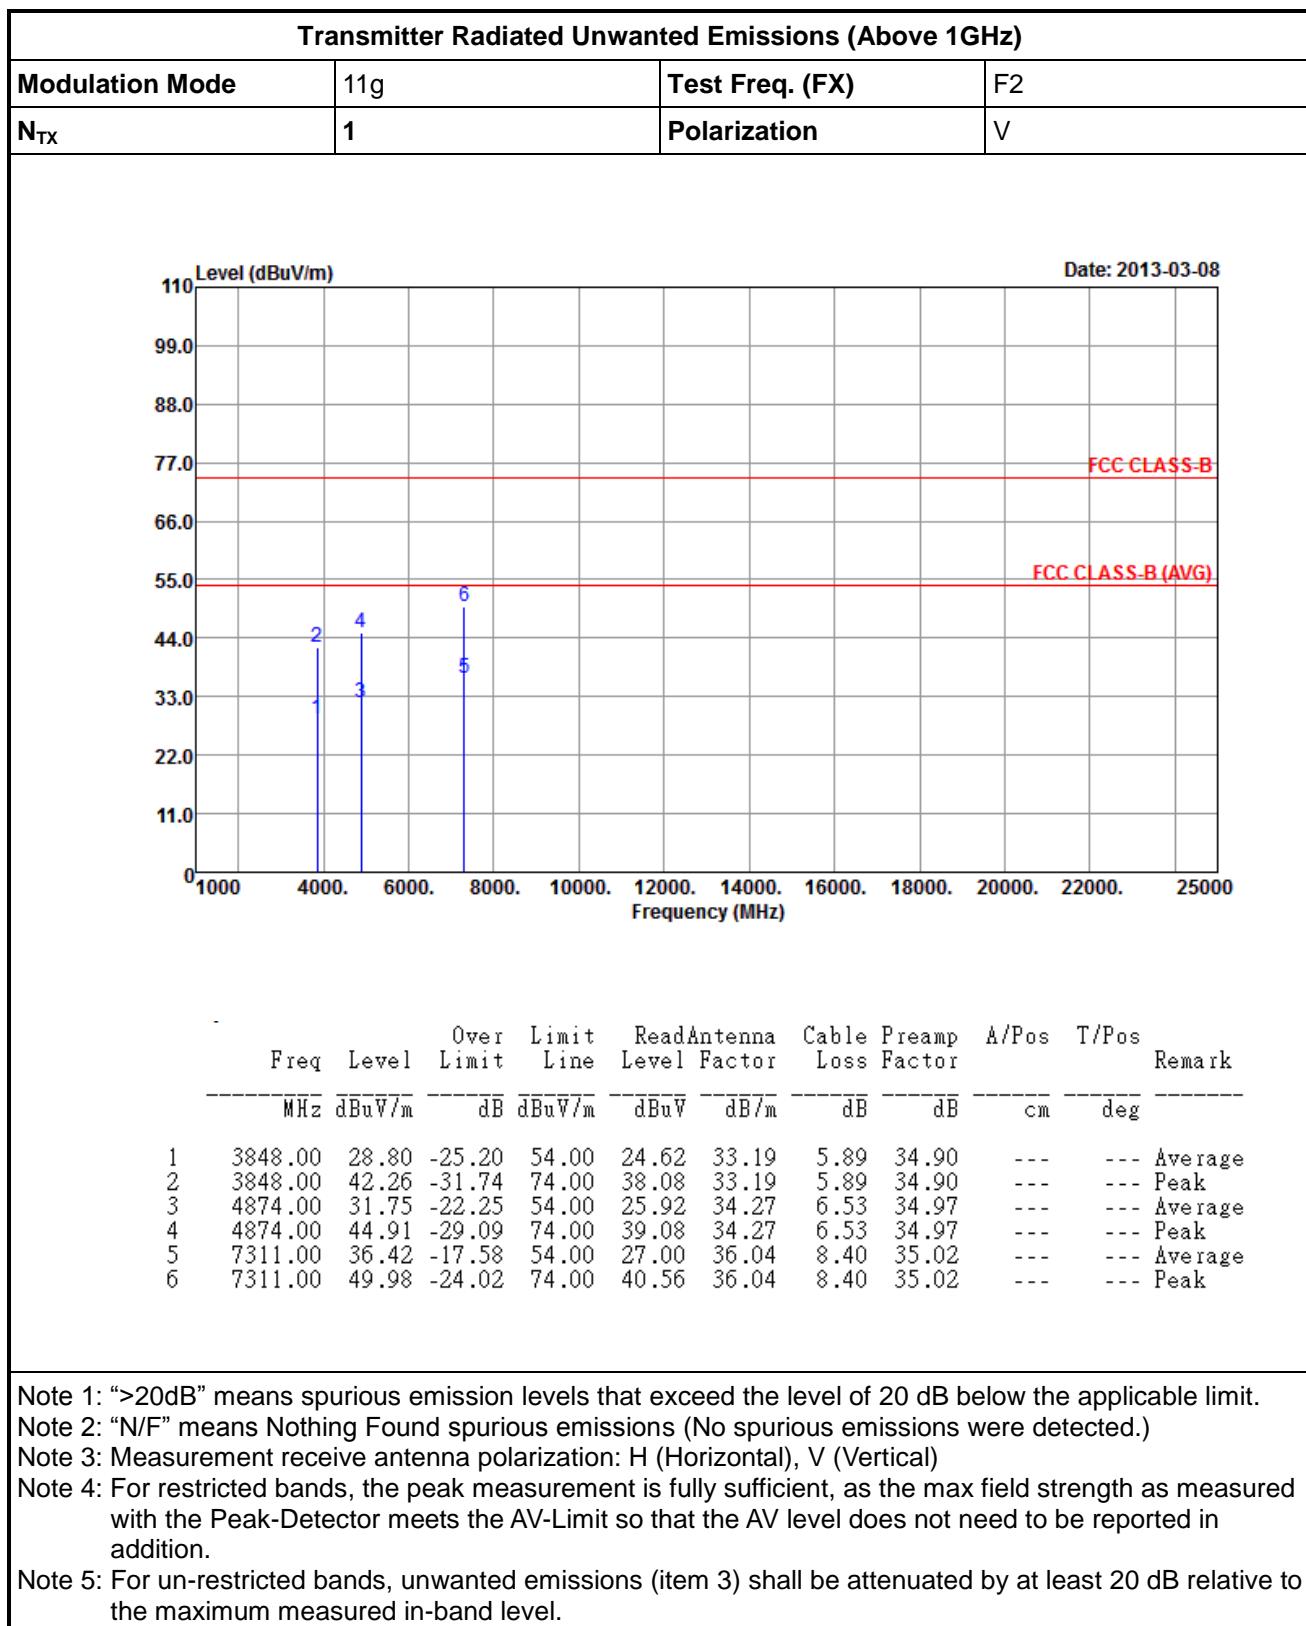

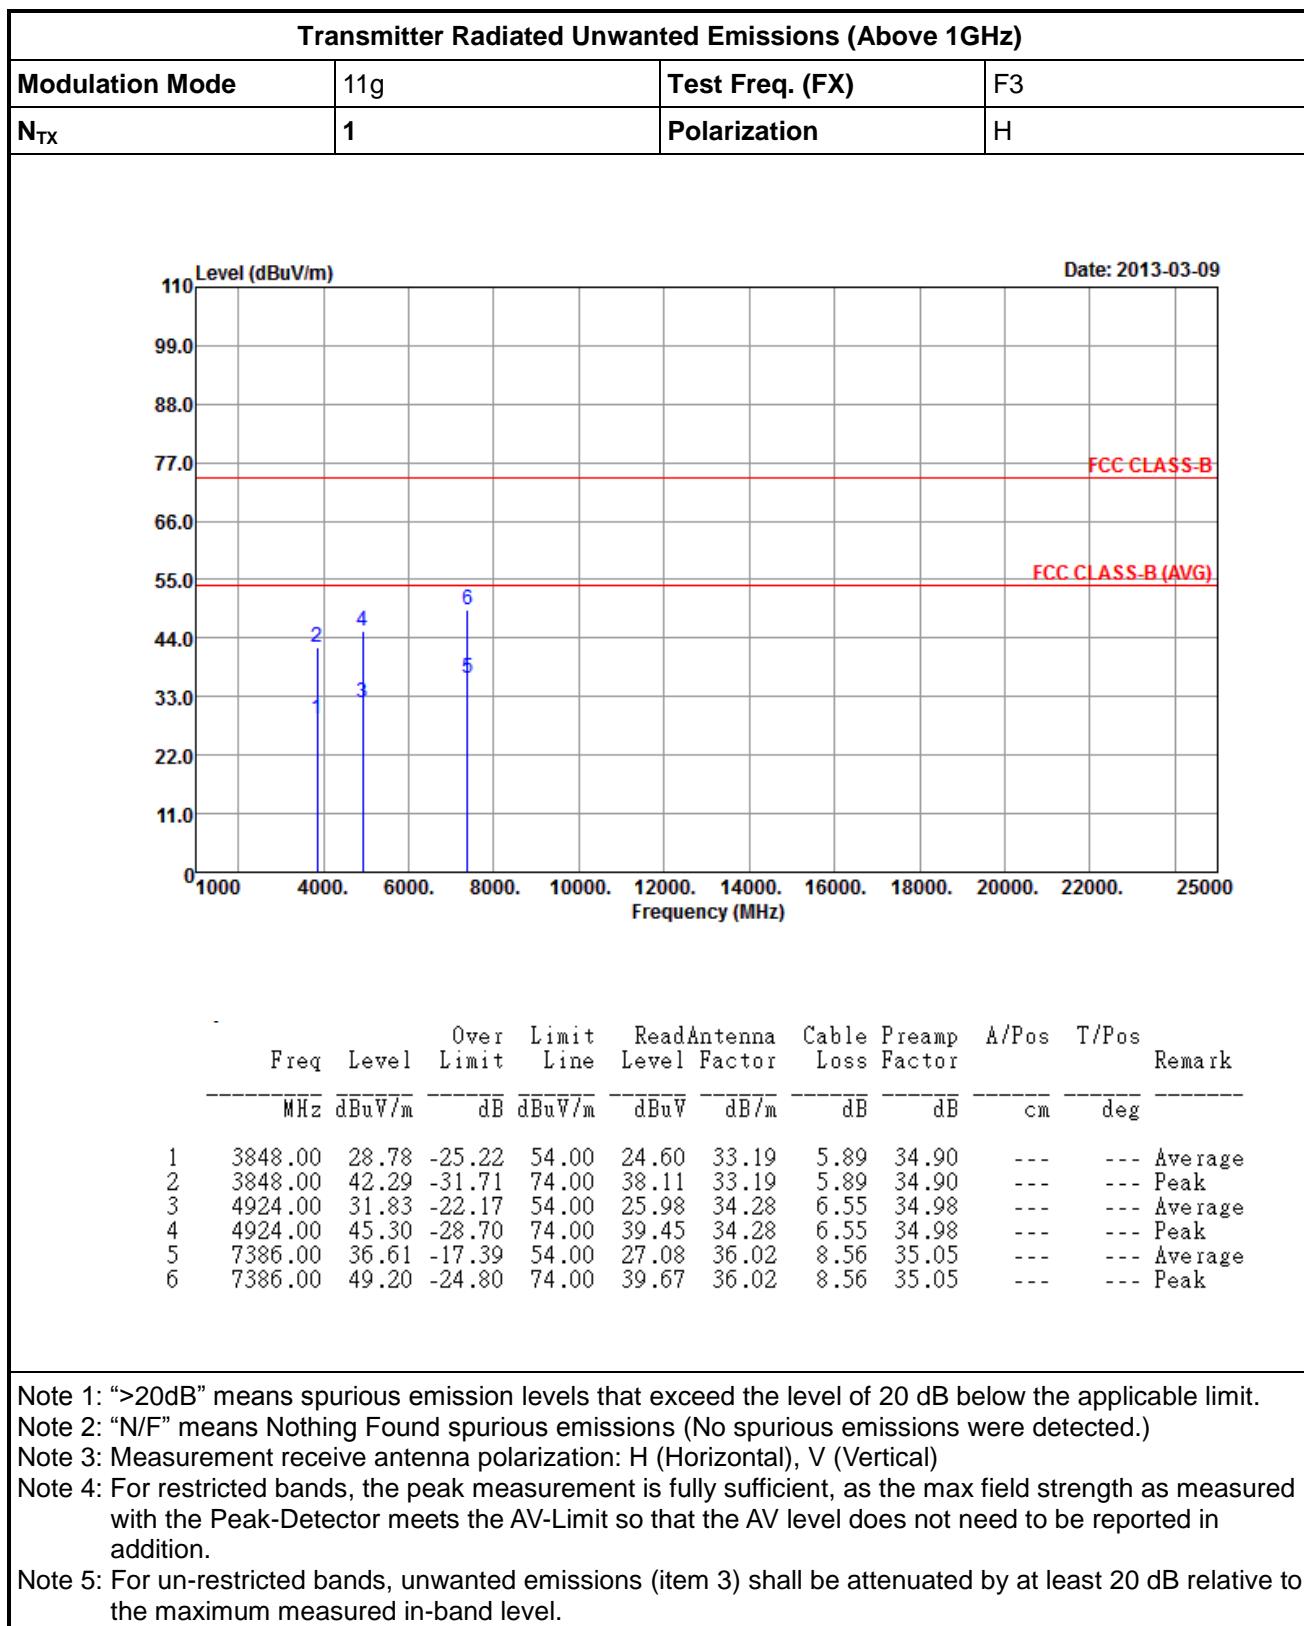



Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode		11g		Test Freq. (FX)		F3					
N _{TX}		1		Polarization		V					
Date: 2013-03-09											
1	3848.00	28.80	-25.20	54.00	24.62	33.19	5.89	34.90	---	---	Average
2	3848.00	42.74	-31.26	74.00	38.56	33.19	5.89	34.90	---	---	Peak
3	4924.00	31.62	-22.38	54.00	25.77	34.28	6.55	34.98	---	---	Average
4	4924.00	44.85	-29.15	74.00	39.00	34.28	6.55	34.98	---	---	Peak
5	7386.00	36.34	-17.66	54.00	26.81	36.02	8.56	35.05	---	---	Average
6	7386.00	49.59	-24.41	74.00	40.06	36.02	8.56	35.05	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT-20


Transmitter Radiated Unwanted Emissions (Above 1GHz)																			
Modulation Mode	HT-20			Test Freq. (FX)	F1														
N _{TX}	1			Polarization	H														
Level (dB _{UV} /m)																			
Date: 2013-03-09																			
1	1050.00	25.36	-28.64	54.00	32.56	27.91	2.95	38.06	---	--- Average									
2	1050.00	38.36	-35.64	74.00	45.56	27.91	2.95	38.06	---	--- Peak									
3	3848.00	28.55	-25.45	54.00	24.37	33.19	5.89	34.90	---	--- Average									
4	3848.00	41.56	-32.44	74.00	37.38	33.19	5.89	34.90	---	--- Peak									
5	4824.00	31.43	-22.57	54.00	25.62	34.26	6.51	34.96	---	--- Average									
6	4824.00	44.53	-29.47	74.00	38.72	34.26	6.51	34.96	---	--- Peak									

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 2 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT-20	Test Freq. (FX)	F1
N _{TX}	1	Polarization	V

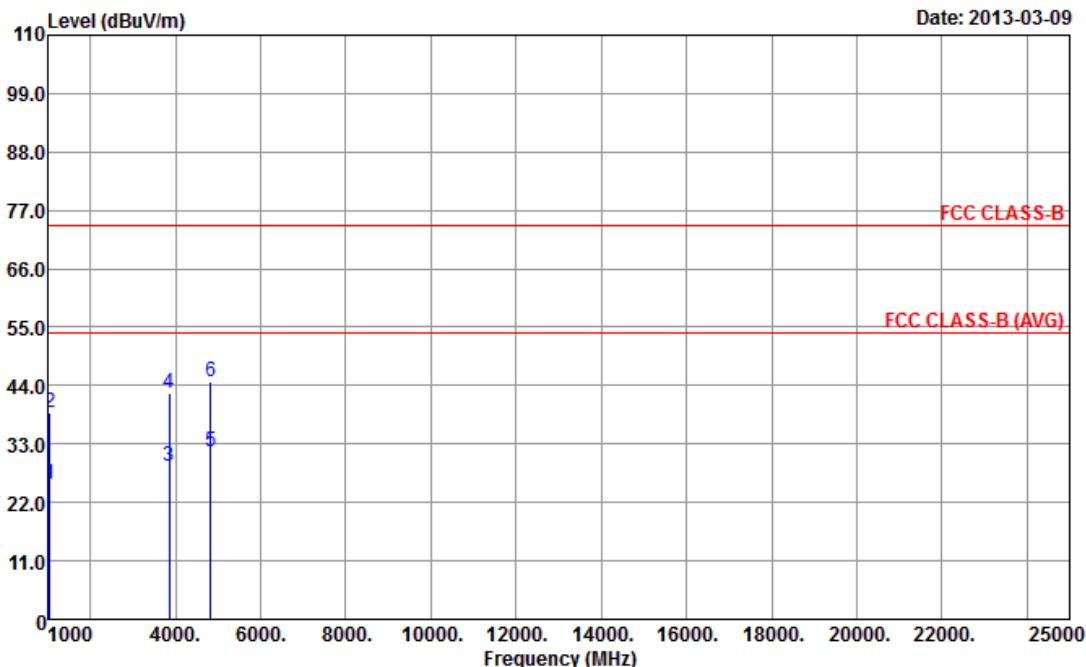

	Freq	Level	Over Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1050.00	25.36	-28.64	54.00	32.56	27.91	2.95	38.06	---	Average
2	1050.00	38.99	-35.01	74.00	46.19	27.91	2.95	38.06	---	Peak
3	3848.00	28.85	-25.15	54.00	24.67	33.19	5.89	34.90	---	Average
4	3848.00	42.63	-31.37	74.00	38.45	33.19	5.89	34.90	---	Peak
5	4824.00	31.58	-22.42	54.00	25.77	34.26	6.51	34.96	---	Average
6	4824.00	44.63	-29.37	74.00	38.82	34.26	6.51	34.96	---	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions (item 2 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

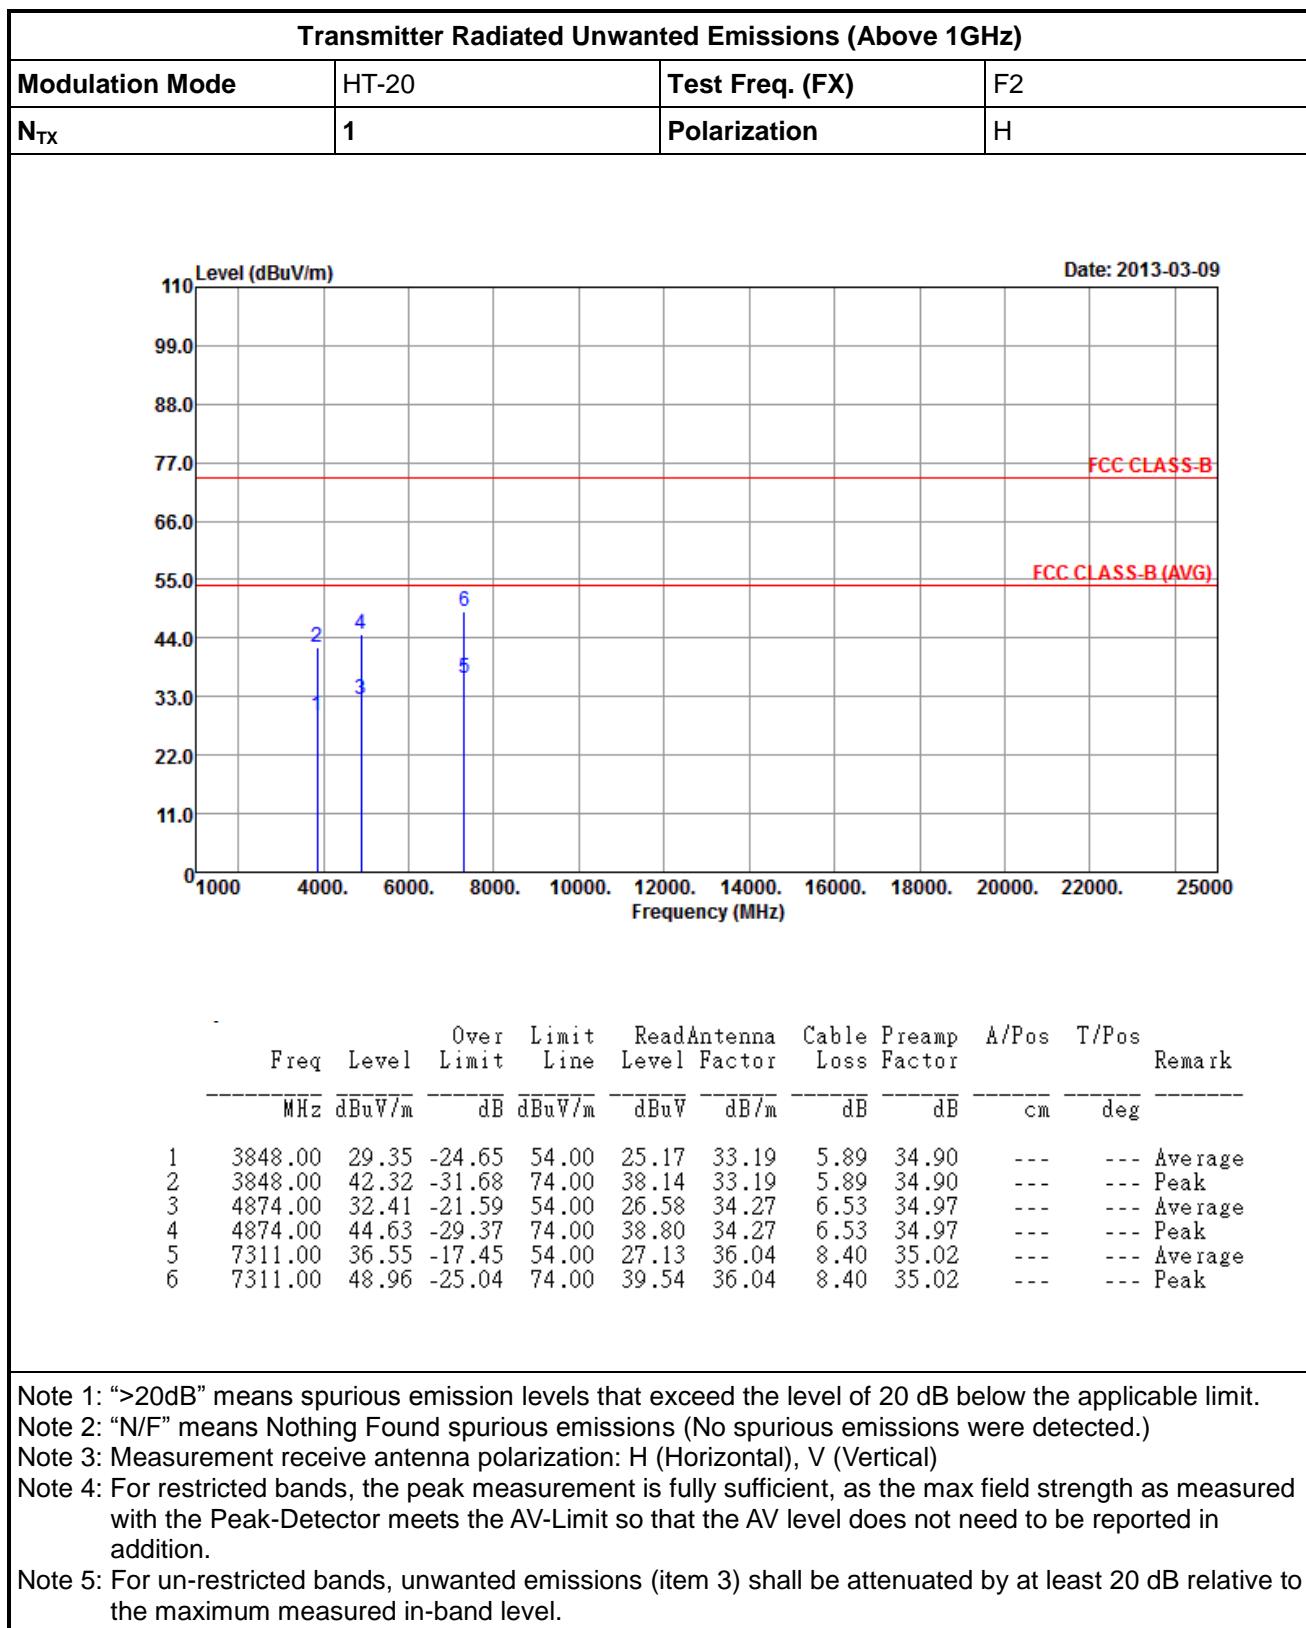



Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode		HT-20		Test Freq. (FX)		F2					
N _{TX}		1		Polarization		V					
Date: 2013-03-09											
1	3848.00	28.99	-25.01	54.00	24.81	33.19	5.89	34.90	---	---	Average
2	3848.00	42.77	-31.23	74.00	38.59	33.19	5.89	34.90	---	---	Peak
3	4874.00	31.96	-22.04	54.00	26.13	34.27	6.53	34.97	---	---	Average
4	4874.00	44.75	-29.25	74.00	38.92	34.27	6.53	34.97	---	---	Peak
5	7311.00	36.52	-17.48	54.00	27.10	36.04	8.40	35.02	---	---	Average
6	7311.00	49.77	-24.23	74.00	40.35	36.04	8.40	35.02	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

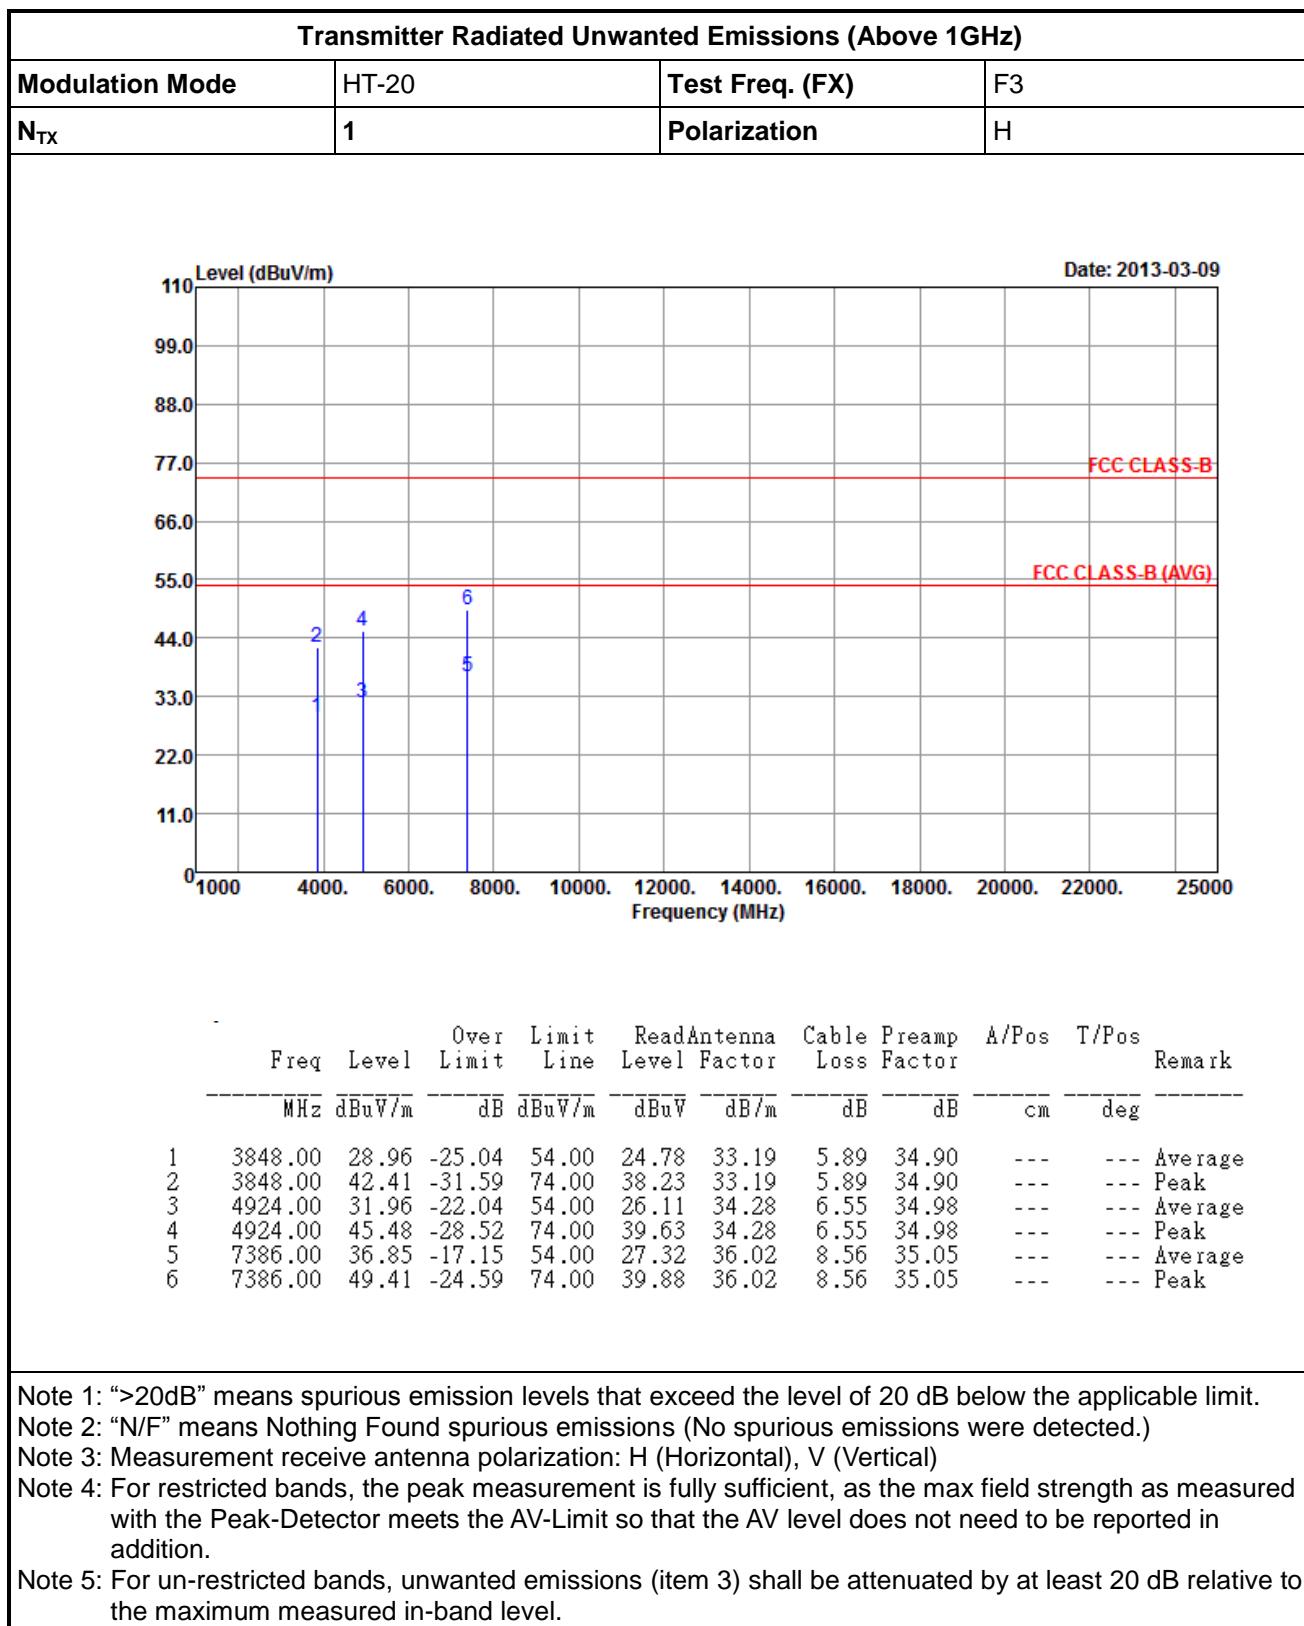



Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode		HT-20		Test Freq. (FX)		F3					
N _{TX}	1			Polarization		V					
Date: 2013-03-09											
1	3848.00	28.97	-25.03	54.00	24.79	33.19	5.89	34.90	---	---	Average
2	3848.00	42.85	-31.15	74.00	38.67	33.19	5.89	34.90	---	---	Peak
3	4924.00	31.44	-22.56	54.00	25.59	34.28	6.55	34.98	---	---	Average
4	4924.00	44.90	-29.10	74.00	39.05	34.28	6.55	34.98	---	---	Peak
5	7386.00	36.48	-17.52	54.00	26.95	36.02	8.56	35.05	---	---	Average
6	7386.00	49.65	-24.35	74.00	40.12	36.02	8.56	35.05	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9 kHz ~ 2.75 GHz	Nov. 22, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRO NIK	NSLK 8127	8127-477	9kHz – 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9 kHz ~ 30 MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Nov. 09, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 30	100023/030	9KHz ~ 30GHz	Apr. 27, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 26, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Sep. 08, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Sep. 08, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP	100055	9Kz – 40GHz	Jun. 06, 2012	Radiation (03CH05-HY)
Receiver	R&S	ESIB26	100337	20Hz – 26.5GHz	Jun.21, 2012	Radiation (03CH05-HY)
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH05-HY	30 MHz - 1 GHz 3m	N/A	Radiation (03CH05-HY)
Amplifier	COM-POWER	PA-103	161050	1 MHz ~ 1 GHz	Feb. 26, 2013	Radiation (03CH05-HY)
Amplifier	Agilent	8449B	3008A02665	1GHz – 26.5 GHz	Aug. 28, 2012	Radiation (03CH05-HY)
Horn Antenna	ETS-LINDGREN	3117	66584	1GHz~18GHz	Aug. 09, 2012	Radiation (03CH05-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170517	18G~40G	Jan. 14, 2013	Radiation (03CH05-HY)
RF Cable-R03m	Jye Bao	RG142	03CH05-HY	30 MHz - 1 GHz	Oct. 14, 2012	Radiation (03CH05-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX104	03CH05-HY	1GHz~40GHz	Oct. 14, 2012	Radiation (03CH05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2725	30 MHz - 1 GHz	Oct. 06, 2012	Radiation (03CH05-HY)
Turn Table	HD	HD100	420/611	0 - 360 degree	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	HD100	240/666	1 m - 4 m	N/A	Radiation (03CH05-HY)

Note: Calibration Interval of instruments listed above is one year.