



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

# FCC Test Report

**FCC ID** : VQK-F07E  
**Equipment** : Mobile Phone  
**Model No.** : F-07E  
**Brand Name** : Xi  
**Applicant** : FUJITSU LIMITED  
**Address** : 1-1, Kamikodanaka 4-chome, Nakahara-ku,  
Kawasaki 211-8588, Japan  
**Standard** : 47 CFR FCC Part 15.225  
**Received Date** : Apr. 09 , 2013  
**Tested Date** : Apr. 16, 2013

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

  
Gary Chang / Manager





## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Test Setup Chart .....	6
1.3	The Equipment List .....	7
1.4	Test Standards .....	8
1.5	Measurement Uncertainty .....	8
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>9</b>
2.1	Testing Condition .....	9
2.2	The Worst Test Modes and Channel Details .....	9
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>10</b>
3.1	20dB and Occupied Bandwidth .....	10
3.2	Field Strength of Fundamental Emissions and Spectrum Mask .....	12
3.3	Unwanted Emissions into Restricted Frequency Bands .....	15
3.4	Frequency Stability.....	25



International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

---

## Release Record

Report No.	Version	Description	Issued Date
FR331905	Rev. 01	Initial issue	May 30, 2013



## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	N/A	N/A
15.225(a)~(c)	Field strength of fundamental emissions and spectrum mask	[dBuV/m at 3m]: 13.56 58.04(Margin 65.96dB)	Pass
15.225(d)	Field strength of any emissions appearing outside of the 13.110-14.010 MHz band	Meet the requirement of limit	Pass
15.225(e)	Frequency tolerance	Meet the requirement of limit	Pass
15.215 (c)	20dB bandwidth	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass



# 1 General Description

## 1.1 Information

### 1.1.1 Product Details

Product Name	Mobile Phone
Brand Name	Xi
Model Name	F-07E
IMEI Code	355277050017537
H/W Version	V2.1.0
S/W Version	R13.1e

### 1.1.2 Specification of the Equipment under Test (EUT)

RF General Information			
Frequency Range (MHz)	Modulation	Ch. Frequency (MHz)	Channel Number
13.553 – 13.567	NFC-ASK	13.56	1
13.553 – 13.567	RFID-ASK	13.56	1

### 1.1.3 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	Loop antenna	-	---	---

### 1.1.4 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> Battery
Test Voltage	<input checked="" type="checkbox"/> Vnom (3.9 V)	<input checked="" type="checkbox"/> Vmax (4.29 V)	<input checked="" type="checkbox"/> Vmin (3.51 V)
Test Climatic	<input checked="" type="checkbox"/> Tnom (20°C)	<input checked="" type="checkbox"/> Tmax (55°C)	<input checked="" type="checkbox"/> Tmin (-20°C)




### 1.1.5 Accessories

Accessories		
No.	Equipment	Description
1	Cradle	Brand Name: Fujitsu limited Model Name: CA50601-1801 Power Rating: O/P: 5Vdc, 1.5A
2	Battery	Brand Name: Fujitsu limited Model Name: CA54310-0045 Power Rating: O/P: 3.8Vdc, 2600mA

### 1.1.6 Test Tool and Power Setting

Test tool	NFC Rw Test	
Modulation Mode	NFC	RFID
Setting	Default	Default

## 1.2 Test Setup Chart

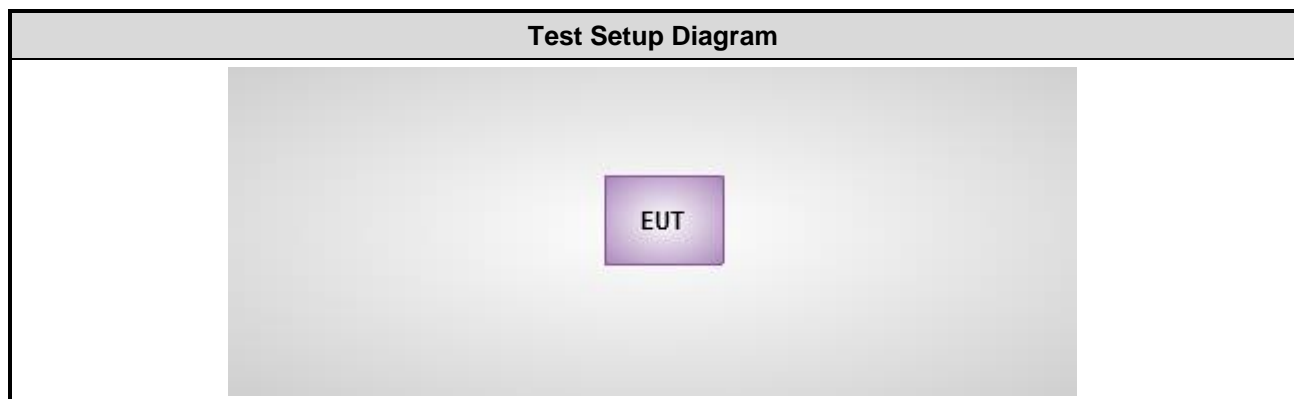



### 1.3 The Equipment List

EMI	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
3m semi-anechoic chamber	RIKEN	SAC-03	03CH01-WS	Jan. 04, 2013	Jan. 03, 2014
Amplifier	Burgeon	BPA-530	100219	Nov. 28, 2012	Nov. 27, 2013
Amplifier	Agilent	83017A	MY39501308	Dec. 18, 2012	Dec. 17, 2013
Bilog Antenna	Schwarzbeck	VULB9168	VULB9168-522	Jan. 11, 2013	Jan. 10, 2014
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 18, 2013	Feb. 17, 2014
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-001	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-002	Dec. 25, 2012	Dec. 24, 2013
Spectrum Analyzer	R&S	FSV40	101498	Jan. 24, 2013	Jan. 23, 2014
Receiver	ROHDE&SCHWARZ	ESR3	101658	Jan. 30, 2013	Jan. 29, 2014
control	EM Electronics	EM1000	60612	N/A	N/A
Note: Calibration Interval of instruments listed above is one year.					

RF	RF Conducted				
Test Site	RF Conducted (TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101486	Nov. 14, 2012	Nov. 13, 2013
Spectrum Analyzer	R&S	FSP 40	100593	Aug. 14, 2012	Aug. 13, 2013
DC Power Source	G.W.	GPC-6030D	C671845	Jun. 19, 2012	Jun. 18, 2013
AC Power Source	G.W.	APS-9102	EL920581	Jul. 02, 2012	Jul. 01, 2013
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	Nov. 21, 2012	Nov. 20, 2013
Signal Generator	R&S	SMR40	100116	Jun. 26, 2012	Jun. 25, 2013
Power Sensor	Anritsu	MA2411B	1027452	Sep. 08, 2012	Sep. 07, 2013
Power Meter	Anritsu	ML2495A	1124009	Sep. 08, 2012	Sep. 07, 2013
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	NA	NA
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	NA	NA



## 1.4 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.225

ANSI C63.10-2009

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 35.286$ Hz
Conducted power	$\pm 0.536$ dB
Frequency error	$\pm 35.286$ Hz
Temperature	$\pm 0.3$ °C
Conducted emission	$\pm 2.946$ dB
AC conducted emission	$\pm 2.43$ dB
Radiated emission	$\pm 2.49$ dB





## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	25°C / 65%	Aska Huang
RF Conducted	TH01-WS	26°C / 64%	Brad Wu

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-1

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)
Field strength of fundamental emissions and spectrum mask	NFC RFID	13.56
Field strength of any emissions appearing outside of the 13.110-14.010 MHz band	NFC RFID	13.56
Frequency tolerance	NFC RFID	13.56
20dB bandwidth	NFC RFID	13.56

**NOTE:**

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.



## 3 Transmitter Test Results

### 3.1 20dB and Occupied Bandwidth


#### 3.1.1 Limit of 20dB Bandwidth

The upper and lower frequency of the 20dB bandwidth shall within 13.553~13.567 MHz

#### 3.1.2 Test Procedures

1. Set resolution bandwidth (RBW) = 1 kHz, Video bandwidth = 3 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.


#### 3.1.3 Test Setup

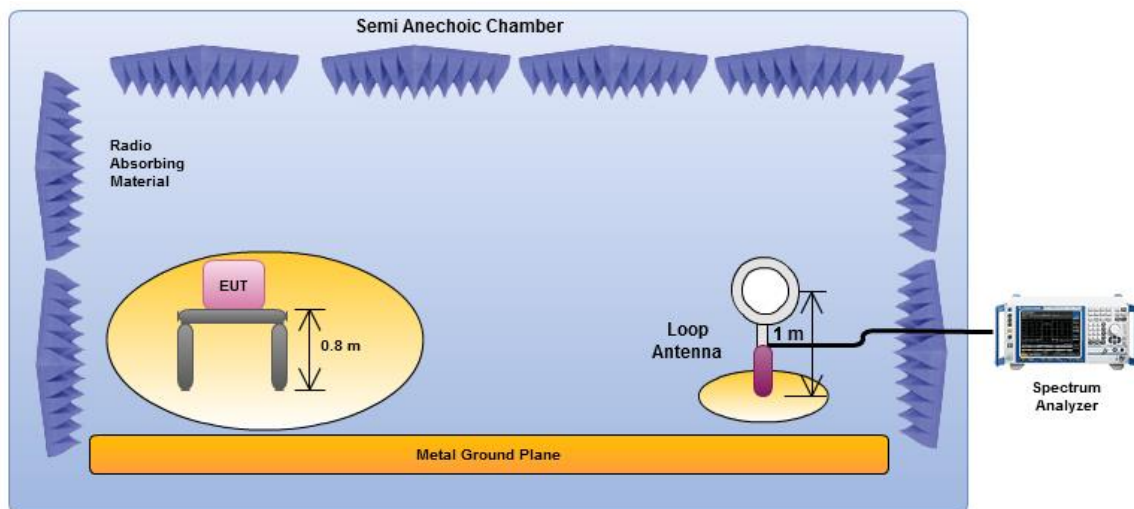



### 3.1.4 Test Result of 20dB Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (kHz)	F <sub>L</sub> at 20dB BW (MHz)	F <sub>H</sub> at 20dB BW (MHz)
NFC	13.56	4.834	13.557367	13.562200
RFID	13.56	2.562	13.558437	13.560998
Limit		-	13.553	13.567

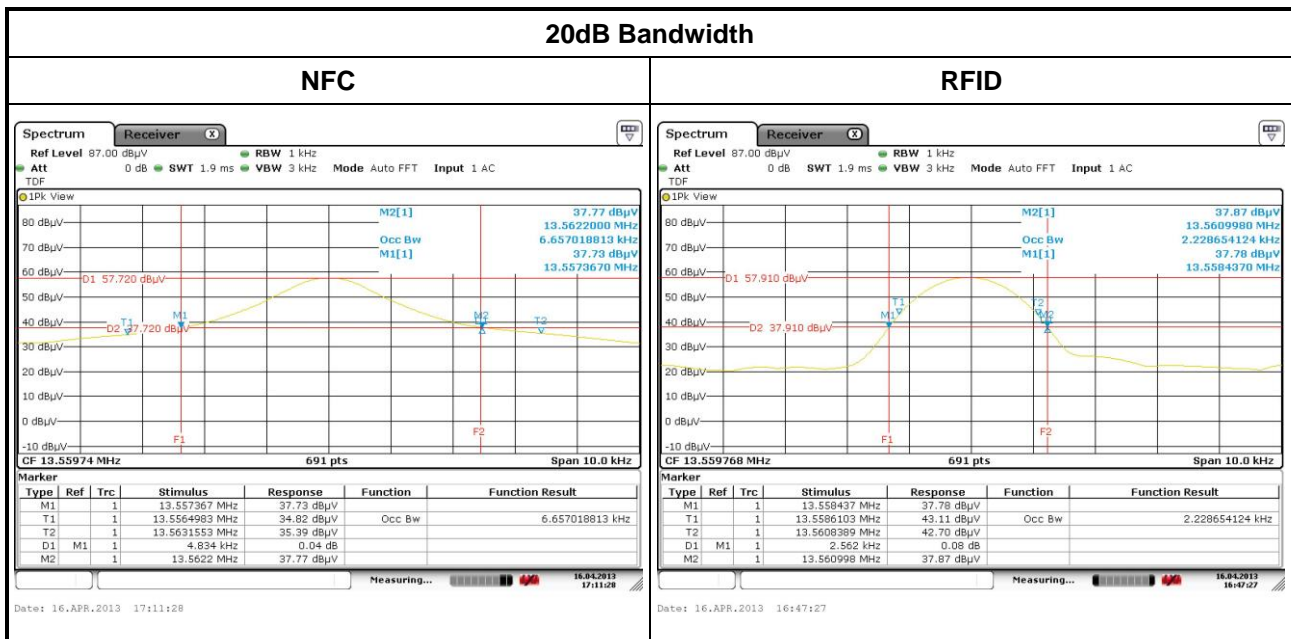



## 3.2 Field Strength of Fundamental Emissions and Spectrum Mask

### 3.2.1 Field Strength of Fundamental Emissions and Spectrum Mask Limit

Field Strength of Fundamental Emissions					
Emissions	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
Fundamental	15848	84.0	103.1	124.0	143.1
Quasi peak measurement of the fundamental.					


Spectrum Mask					
Freq. of Emission (MHz)	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
1.705~13.110	30	29.5	48.6	69.5	88.6
13.110~13.410	106	40.5	59.6	80.5	99.6
13.410~13.553	334	50.5	69.6	90.5	109.6
13.553~13.567	15848	84.0	103.1	124.0	143.1
13.567~13.710	334	50.5	69.6	90.5	109.6
13.710~14.010	106	40.5	59.6	80.5	99.6
14.010~30.000	30	29.5	48.6	69.5	88.6

### 3.2.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the open and close planes of polarization. . Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, and the antenna rotated to repeat the measurements for both the open and close antenna polarizations.



### 3.2.3 Test Setup

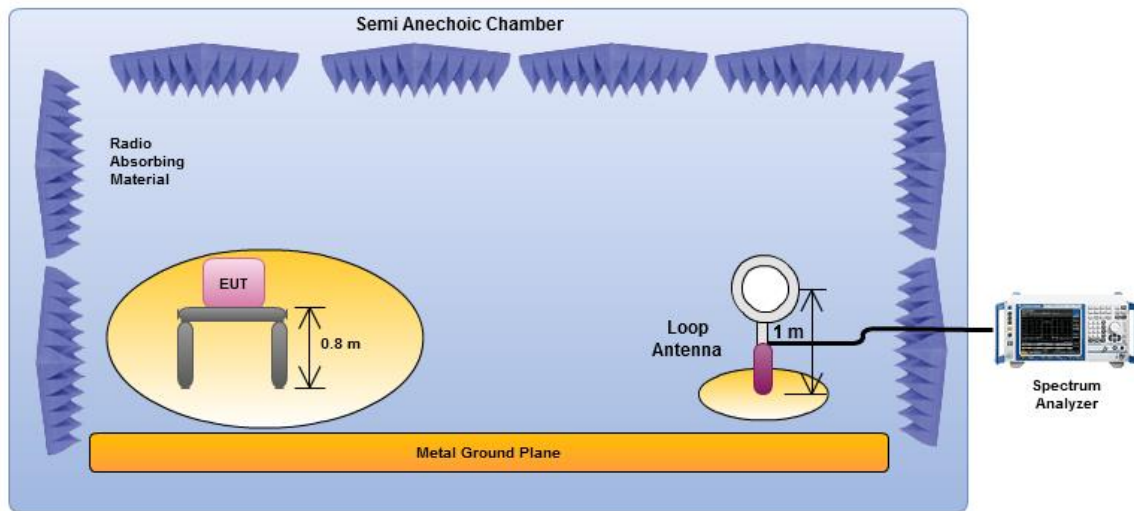





### 3.2.4 Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Polarization	Margin (dB)	Limit (dBuV/m)@3m
NFC	13.56	58.04	Open	-65.96	124.0
RFID	13.56	57.92	Open	-66.08	124.0

Spectrum Mask Plot (NFC)

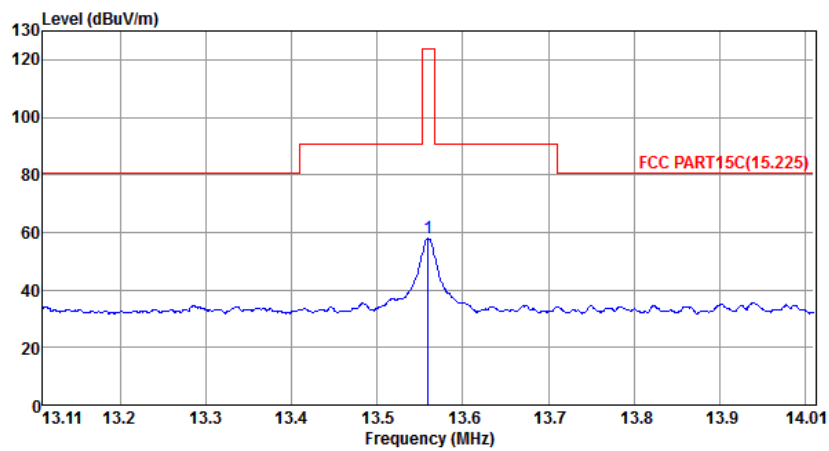

Spectrum Mask Plot (RFID)

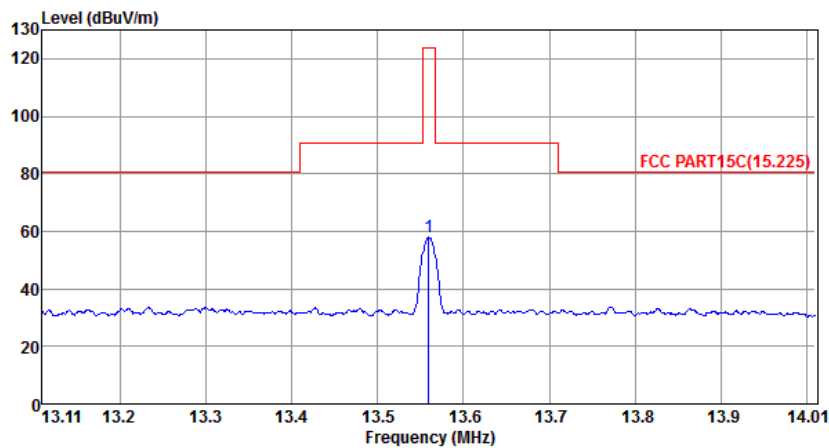



### 3.3 Unwanted Emissions into Restricted Frequency Bands

#### 3.3.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.3.2 Test Procedures


- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

- 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.




### 3.3.3 Test Setup

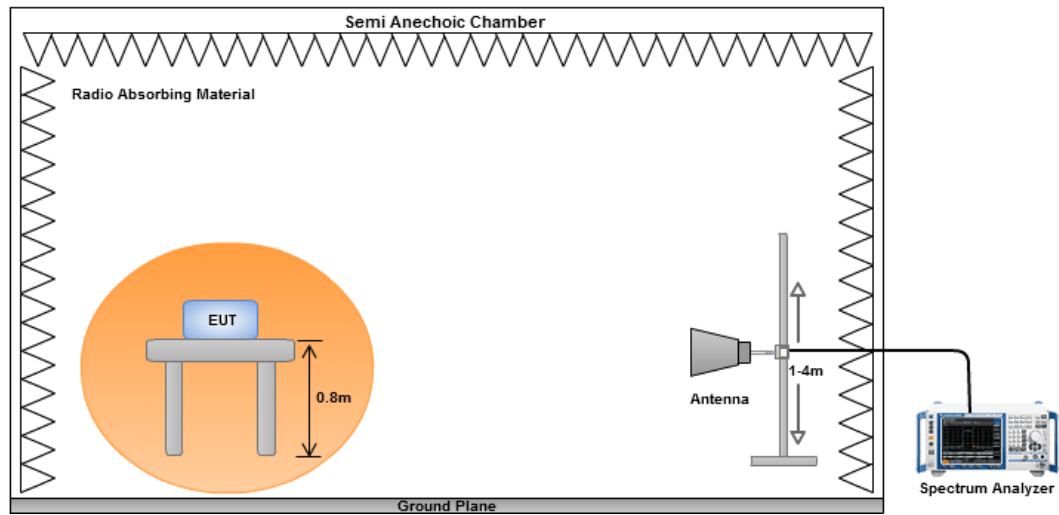





### 3.3.4 Transmitter Radiated Unwanted Emissions (Below 30GHz)

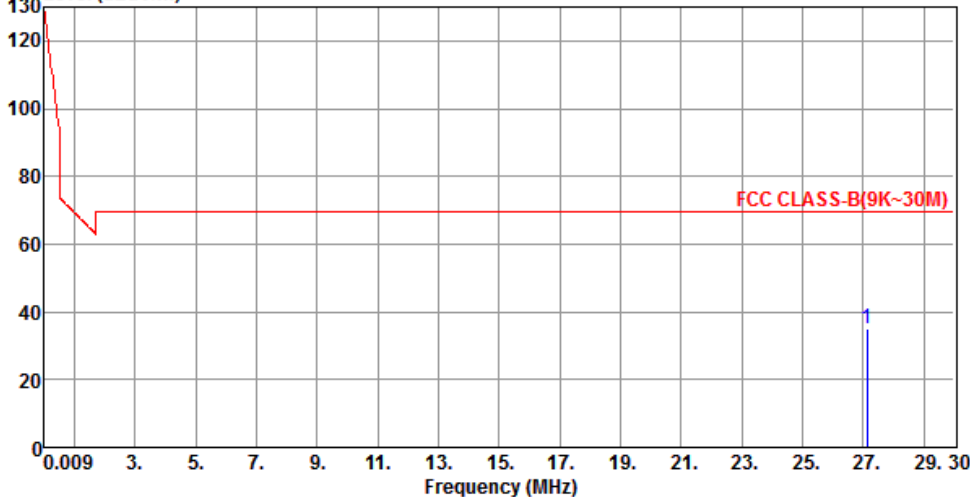Polarization	Horizontal			Test Freq. (MHz)	13.56																																												
Test Mode	NFC																																																
<div><div><div>Level (dBuV/m)</div><p>The graph displays the radiated unwanted emissions level in dBuV/m against frequency in MHz. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 0.009 to 30 MHz. A red line represents the FCC CLASS-B(9K~30M) limit, which starts at 130 dBuV/m at 0.009 MHz, drops to 75 dBuV/m at 0.03 MHz, and then remains constant at 75 dBuV/m up to 30 MHz. A blue vertical line indicates a measured peak at 27.12 MHz, reaching a level of 34.81 dBuV/m.</p></div><table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>27.12</td><td>34.81</td><td>69.54</td><td>-34.73</td><td>14.47</td><td>20.34</td><td>Peak</td><td>---</td><td>---</td></tr></table></div>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	27.12	34.81	69.54	-34.73	14.47	20.34	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																								
	MHz	level			reading			High	Table																																								
		dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																								
1	27.12	34.81	69.54	-34.73	14.47	20.34	Peak	---	---																																								
<div><div>Note 1: Level (dBuV/m) = Read Level (dBuV/m) + Antenna Factor (dB) + Cable Loss (dB) - Preamp Factor (dB).</div><div>Note 2: Over Limit (dBuV/m) = Limit Line (dBuV/m) – Level (dBuV/m).</div></div>																																																	




## International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

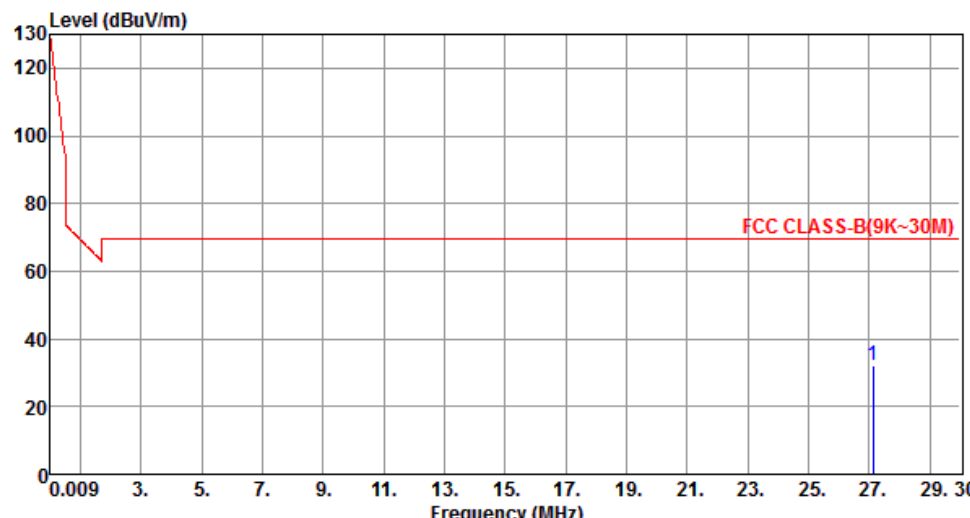Polarization	Vertical	Test Freq. (MHz)	13.56																																														
Test Mode	NFC																																																
<div><div><div>Level (dBuV/m)</div><div>FCC CLASS-B(9K~30M)</div><div>Frequency (MHz)</div></div><table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>27.12</td><td>32.28</td><td>69.54</td><td>-37.26</td><td>11.94</td><td>20.34</td><td>Peak</td><td>---</td><td>---</td></tr></table></div>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB		High	Table						dBuV			cm	deg	1	27.12	32.28	69.54	-37.26	11.94	20.34	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																								
	MHz	level	dBuV/m	dB	reading	dB		High	Table																																								
					dBuV			cm	deg																																								
1	27.12	32.28	69.54	-37.26	11.94	20.34	Peak	---	---																																								
<div>Note 1: Level (dBuV/m) = Read Level (dBuV/m) + Antenna Factor (dB) + Cable Loss (dB) - Preamp Factor (dB).</div> <div>Note 2: Over Limit (dBuV/m) = Limit Line (dBuV/m) – Level (dBuV/m).</div>																																																	



# International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.  
Tel: 886-3-271-8666 Fax: 886-3-318-0155

Polarization	Horizontal				Test Freq. (MHz)		13.56																																										
Test Mode	RFID																																																
<div><div><div>Level (dBuV/m)</div><div>FCC CLASS-B(9K~30M)</div><div>Frequency (MHz)</div></div><table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>27.12</td><td>34.22</td><td>69.54</td><td>-35.32</td><td>13.88</td><td>20.34</td><td>Peak</td><td>---</td><td>---</td></tr></table></div>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	27.12	34.22	69.54	-35.32	13.88	20.34	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																								
	MHz	level			reading			High	Table																																								
		dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																								
1	27.12	34.22	69.54	-35.32	13.88	20.34	Peak	---	---																																								
<div>Note 1: Level (dBuV/m) = Read Level (dBuV/m) + Antenna Factor (dB) + Cable Loss (dB) - Preamp Factor (dB).</div> <div>Note 2: Over Limit (dBuV/m) = Limit Line (dBuV/m) – Level (dBuV/m).</div>																																																	




# International Certification Corp.


No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.  
Tel: 886-3-271-8666 Fax: 886-3-318-0155

Polarization	Vertical	Test Freq. (MHz)	13.56																														
Test Mode	RFID																																
<div><p>Level (dBUV/m)</p><p>FCC CLASS-B(9K~30M)</p><p>Frequency (MHz)</p></div> <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>27.12</td><td>33.50</td><td>69.54</td><td>-36.04</td><td>13.16</td><td>20.34</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBUV	dB		cm	deg	1	27.12	33.50	69.54	-36.04	13.16	20.34	Peak	---	---
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB		cm	deg																								
1	27.12	33.50	69.54	-36.04	13.16	20.34	Peak	---	---																								
Note 1: Level (dBUV/m) = Read Level (dBUV/m) + Antenna Factor (dB) + Cable Loss (dB) - Preamp Factor (dB). 2: Over Limit (dBUV/m) = Limit Line (dBUV/m) – Level (dBUV/m).																																	



### 3.3.5 Transmitter Radiated Unwanted Emissions (Above 30MHz)

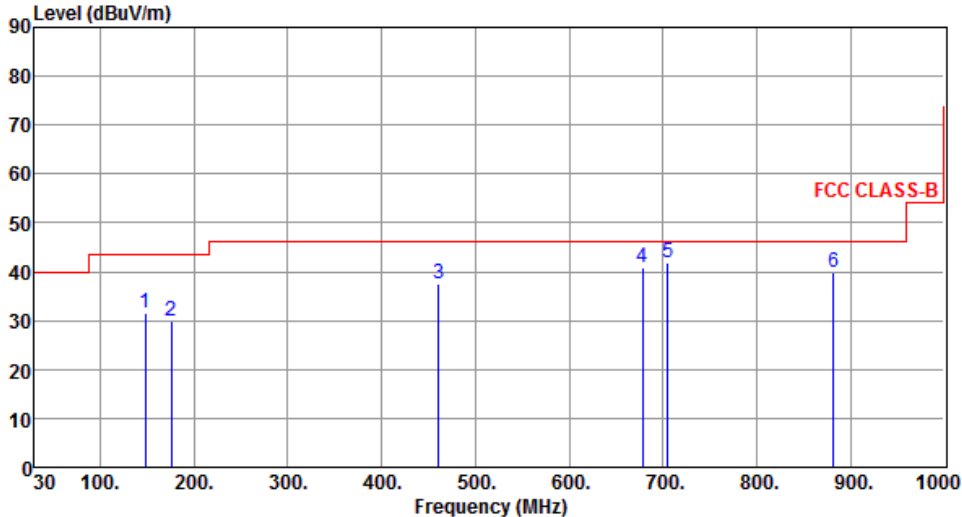Polarization	Horizontal		Test Freq. (MHz)		13.56				
Test Mode	NFC								
<div></div>									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	148.34	31.53	43.50	-11.97	48.52	-16.99	Peak	---	---
2	175.50	29.97	43.50	-13.53	47.79	-17.82	Peak	---	---
3	460.68	37.48	46.00	-8.52	49.76	-12.28	Peak	---	---
4	677.96	40.86	46.00	-5.14	49.45	-8.59	Peak	---	---
5	705.12	41.83	46.00	-4.17	49.98	-8.15	Peak	---	---
6	881.66	40.00	46.00	-6.00	45.74	-5.74	Peak	---	---
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.									
Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.									
Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.									

Page : 22 of 26



Polarization	Horizontal			Test Freq. (MHz)		13.56																																																																									
Test Mode	RFID																																																																														
<div><p>Level (dBuV/m)</p><p>Frequency (MHz)</p></div> <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>148.34</td><td>32.03</td><td>43.50</td><td>-11.47</td><td>49.02</td><td>-16.99</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>460.68</td><td>38.00</td><td>46.00</td><td>-8.00</td><td>50.28</td><td>-12.28</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>677.96</td><td>41.70</td><td>46.00</td><td>-4.30</td><td>50.29</td><td>-8.59</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>705.12</td><td>42.14</td><td>46.00</td><td>-3.86</td><td>50.29</td><td>-8.15</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>732.28</td><td>40.86</td><td>46.00</td><td>-5.14</td><td>48.43</td><td>-7.57</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>881.66</td><td>40.38</td><td>46.00</td><td>-5.62</td><td>46.12</td><td>-5.74</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	148.34	32.03	43.50	-11.47	49.02	-16.99	Peak	---	---	2	460.68	38.00	46.00	-8.00	50.28	-12.28	Peak	---	---	3	677.96	41.70	46.00	-4.30	50.29	-8.59	Peak	---	---	4	705.12	42.14	46.00	-3.86	50.29	-8.15	Peak	---	---	5	732.28	40.86	46.00	-5.14	48.43	-7.57	Peak	---	---	6	881.66	40.38	46.00	-5.62	46.12	-5.74	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																						
1	148.34	32.03	43.50	-11.47	49.02	-16.99	Peak	---	---																																																																						
2	460.68	38.00	46.00	-8.00	50.28	-12.28	Peak	---	---																																																																						
3	677.96	41.70	46.00	-4.30	50.29	-8.59	Peak	---	---																																																																						
4	705.12	42.14	46.00	-3.86	50.29	-8.15	Peak	---	---																																																																						
5	732.28	40.86	46.00	-5.14	48.43	-7.57	Peak	---	---																																																																						
6	881.66	40.38	46.00	-5.62	46.12	-5.74	Peak	---	---																																																																						
<p>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>																																																																															



# International Certification Corp.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Polarization	Vertical				Test Freq. (MHz)		13.56																																																																																												
Test Mode	RFID																																																																																																		
<div><p>Level (dBuV/m)</p><p>Frequency (MHz)</p></div> <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>59.10</td><td>32.89</td><td>40.00</td><td>-7.11</td><td>50.12</td><td>-17.23</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>854.27</td><td>42.74</td><td>46.00</td><td>-3.26</td><td>48.81</td><td>-6.07</td><td>QP</td><td>---</td><td>---</td></tr><tr><td>3</td><td>867.86</td><td>43.89</td><td>46.00</td><td>-2.11</td><td>49.80</td><td>-5.91</td><td>QP</td><td>---</td><td>---</td></tr><tr><td>4</td><td>881.38</td><td>44.70</td><td>46.00</td><td>-1.30</td><td>50.44</td><td>-5.74</td><td>QP</td><td>---</td><td>---</td></tr><tr><td>5</td><td>894.95</td><td>44.95</td><td>46.00</td><td>-1.05</td><td>50.52</td><td>-5.57</td><td>QP</td><td>---</td><td>---</td></tr><tr><td>6</td><td>908.51</td><td>44.99</td><td>46.00</td><td>-1.01</td><td>50.39</td><td>-5.40</td><td>QP</td><td>---</td><td>---</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB		High	Table			dBuV/m			dBuV			cm	deg	1	59.10	32.89	40.00	-7.11	50.12	-17.23	Peak	---	---	2	854.27	42.74	46.00	-3.26	48.81	-6.07	QP	---	---	3	867.86	43.89	46.00	-2.11	49.80	-5.91	QP	---	---	4	881.38	44.70	46.00	-1.30	50.44	-5.74	QP	---	---	5	894.95	44.95	46.00	-1.05	50.52	-5.57	QP	---	---	6	908.51	44.99	46.00	-1.01	50.39	-5.40	QP	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	59.10	32.89	40.00	-7.11	50.12	-17.23	Peak	---	---																																																																																										
2	854.27	42.74	46.00	-3.26	48.81	-6.07	QP	---	---																																																																																										
3	867.86	43.89	46.00	-2.11	49.80	-5.91	QP	---	---																																																																																										
4	881.38	44.70	46.00	-1.30	50.44	-5.74	QP	---	---																																																																																										
5	894.95	44.95	46.00	-1.05	50.52	-5.57	QP	---	---																																																																																										
6	908.51	44.99	46.00	-1.01	50.39	-5.40	QP	---	---																																																																																										
<p>Note 1: “&gt;20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 3: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</p>																																																																																																			





### 3.4 Frequency Stability


#### 3.4.1 Frequency Stability Limit

Carrier frequency stability shall be maintained to  $\pm 0.01\%$  ( $\pm 100$  ppm).

#### 3.4.2 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

#### 3.4.3 Test Setup

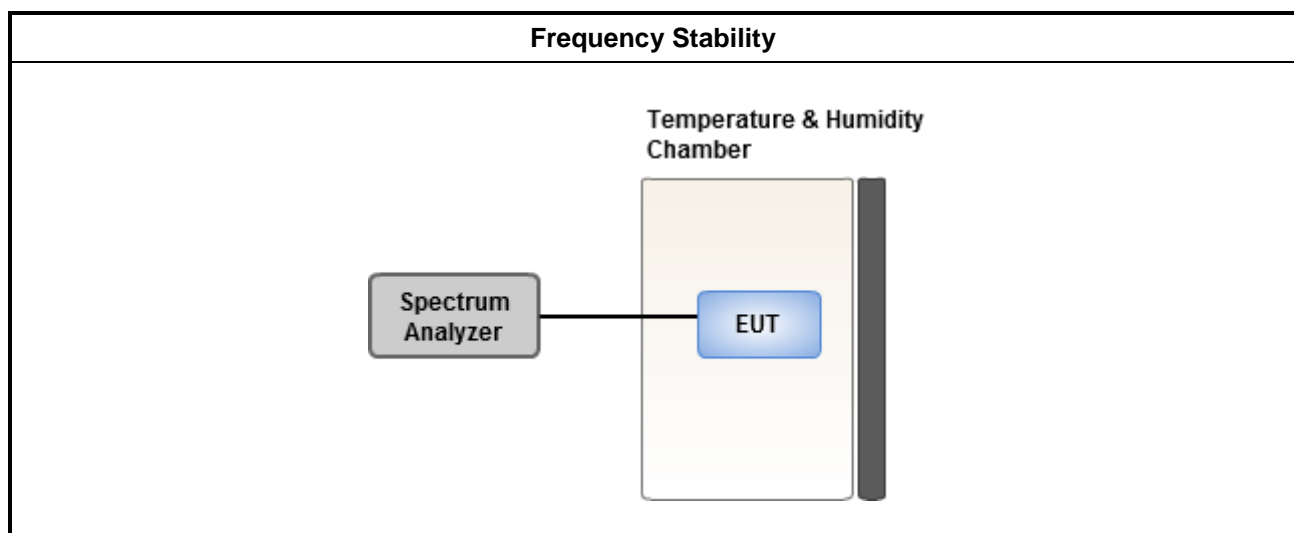



### 3.4.4 Test Result of Frequency Stability

Frequency Stability Result (NFC)			
Condition	Ch. Freq. (MHz)	Frequency Stability (ppm)	
		Test Frequency (MHz)	Frequency Stability (ppm)
T <sub>20°C</sub> Vmax	13.56	13.55973	-19.91
T <sub>20°C</sub> Vmin	13.56	13.55980	-14.75
T <sub>50°C</sub> Vnom	13.56	13.55986	-10.32
T <sub>40°C</sub> Vnom	13.56	13.55989	-8.11
T <sub>30°C</sub> Vnom	13.56	13.55965	-25.81
T <sub>20°C</sub> Vnom	13.56	13.55969	-22.86
T <sub>10°C</sub> Vnom	13.56	13.55969	-22.86
T <sub>0°C</sub> Vnom	13.56	13.55961	-28.76
T <sub>-10°C</sub> Vnom	13.56	13.55979	-15.49
T <sub>-20°C</sub> Vnom	13.56	13.55977	-16.96
Limit (ppm)		100	
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom]. The nominal voltage refer test report clause 1.3 for EUT operational condition.			
Note 2: Measure maximum deviation frequency at operating frequency at startup and two, five, and ten min.			

Frequency Stability Result (RFID)			
Condition	Ch. Freq. (MHz)	Frequency Stability (ppm)	
		Test Frequency (MHz)	Frequency Stability (ppm)
T <sub>20°C</sub> Vmax	13.56	13.55971	-21.39
T <sub>20°C</sub> Vmin	13.56	13.55983	-12.54
T <sub>50°C</sub> Vnom	13.56	13.55986	-10.32
T <sub>40°C</sub> Vnom	13.56	13.55987	-9.59
T <sub>30°C</sub> Vnom	13.56	13.55964	-26.55
T <sub>20°C</sub> Vnom	13.56	13.55971	-21.39
T <sub>10°C</sub> Vnom	13.56	13.55967	-24.34
T <sub>0°C</sub> Vnom	13.56	13.55964	-26.55
T <sub>-10°C</sub> Vnom	13.56	13.55976	-17.70
T <sub>-20°C</sub> Vnom	13.56	13.55978	-16.22
Limit (ppm)		100	
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom]. The nominal voltage refer test report clause 1.3 for EUT operational condition.			
Note 2: Measure maximum deviation frequency at operating frequency at startup and two, five, and ten min.			

==END==