

FCC TEST REPORT

(PART 22)

REPORT NO.: RF110509C01-2

MODEL NO.: F-12C

FCC ID: VQK-F12C

RECEIVED: May 12, 2011

TESTED: May 26 ~ Jun. 01, 2011

ISSUED: Jun. 08, 2011

APPLICANT: FUJITSU LIMITED

ADDRESS: 1-1, Kamikodanaka 4-chome, Nakahara-ku,
Kawasaki 211-8588, Japan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 85 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3 GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT.....	7
3.2 DESCRIPTION OF TEST MODES.....	9
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	10
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
3.4 DESCRIPTION OF SUPPORT UNITS	15
4 TEST TYPES AND RESULTS	16
4.1 OUTPUT POWER MEASUREMENT	16
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	16
4.1.2 TEST INSTRUMENTS	17
4.1.3 TEST PROCEDURES	18
4.1.4 TEST SETUP	19
4.1.5 EUT OPERATING CONDITIONS.....	19
4.1.6 TEST RESULTS	20
4.2 FREQUENCY STABILITY MEASUREMENT	25
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	25
4.2.2 TEST INSTRUMENTS	25
4.2.3 TEST PROCEDURE	26
4.2.4 TEST SETUP	26
4.2.5 TEST RESULTS	27
4.3 OCCUPIED BANDWIDTH MEASUREMENT.....	29
4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	29
4.3.2 TEST INSTRUMENTS	29
4.3.3 TEST SETUP	29
4.3.4 TEST PROCEDURES.....	30
4.3.5 EUT OPERATING CONDITION	30
4.3.6 TEST RESULTS	31
4.4 BAND EDGE MEASUREMENT	36
4.4.1 LIMITS OF BAND EDGE MEASUREMENT	36
4.4.2 TEST INSTRUMENTS	36
4.4.3 TEST SETUP	36
4.4.4 TEST PROCEDURES.....	37
4.4.5 EUT OPERATING CONDITION	37
4.4.6 TEST RESULTS	38
4.5 CONDUCTED SPURIOUS EMISSIONS.....	43
4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	43
4.5.2 TEST INSTRUMENTS	43
4.5.3 TEST PROCEDURE	44
4.5.4 TEST SETUP	44
4.5.5 EUT OPERATING CONDITIONS.....	44
4.5.6 TEST RESULTS	45
4.6 RADIATED EMISSION MEASUREMENT (BELOW 1GHz).....	57
4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	57
4.6.2 TEST INSTRUMENTS	57
4.6.3 TEST PROCEDURES	58



A D T

4.6.4	DEVIATION FROM TEST STANDARD	58
4.6.5	TEST SETUP	59
4.6.6	EUT OPERATING CONDITIONS	59
4.6.7	TEST RESULTS	60
4.7	RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)	72
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	72
4.7.2	TEST INSTRUMENTS	72
4.7.3	TEST PROCEDURES	73
4.7.4	DEVIATION FROM TEST STANDARD	73
4.7.5	TEST SETUP	74
4.7.6	EUT OPERATING CONDITIONS	74
4.7.7	TEST RESULTS	75
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	83
6	INFORMATION ON THE TESTING LABORATORIES	84
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	85



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	N/A	Jun. 08, 2011

1 CERTIFICATION

PRODUCT: Mobile Phone
MODEL NO.: F-12C
BRAND: FOMA
APPLICANT: FUJITSU LIMITED
TEST SAMPLE: ENGINEERING SAMPLE
TESTED : May 26 ~ Jun. 01, 2011
STANDARDS : FCC Part 22, Subpart H
ANSI C63.4-2003

The above equipment (model: F-12C) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , DATE : Jun. 08, 2011
Andrea Hsia / Specialist

APPROVED BY :  , DATE : Jun. 08, 2011
Gary Chang / Assistant Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 22.913 (a)	Maximum Peak Output Power Limit: max. 7 watts e.i.r.p peak power	PASS	Meet the requirement of limit. Max. e.i.r.p is 30.8dBm at 836.6MHz.
2.1055	Frequency Stability AFC Freq. Error vs. Voltage AFC Freq. Error vs. Temperature Limit: max. ± 2.5 ppm	PASS	Meet the requirement of limit.
2.1049 (h)	Occupied Bandwidth	PASS	Meet the requirement of limit.
22.917	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -21.9dB at 2509.8MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Mobile Phone	
MODEL NO.	F-12C	
FCC ID	VQK-F12C	
POWER SUPPLY	3.7Vdc (Li-ion battery) 5.4Vdc (Adapter)	
MODULATION TYPE	GSM, GPRS	GMSK
	WCDMA	BPSK
FREQUENCY RANGE	GSM, GPRS	824.2MHz ~ 848.8MHz
	WCDMA	826.4MHz ~ 846.6MHz
MAX. ERP POWER	GSM	1.1885Watts
	GPRS	1.0593Watts
	WCDMA	0.1496Watts
MULTI-SLOTS CLASS	12	
WCDMA RELEASE VERSION	6	
ANTENNA TYPE	λ/4 Monopole antenna with 0dBi gain	
DATA CABLE	NA	
I/O PORTS	Refer to user's manual	
ACCESSORY DEVICES	Battery	

NOTE:

- The EUT is a Mobile Phone. The test data are separated into following test reports:

	TEST STANDARD	REFERENCE REPORT
WLAN 802.11b/g/n	FCC Part 15, Subpart C (Section 15.247)	RF110509C01
BLUETOOTH		RF110509C01-1
GSM 850 / WCDMA 850	FCC Part 22	RF110509C01-2
GSM 1900	FCC Part 24	RF110509C01-3
RF ID	FCC Part 15, Subpart C (Section 15.225, 15.215)	RF110509C01-4

- The EUT use the following Li-ion battery:

BRAND	Fujitsu Limited
MODEL	F21
RATING	3.7Vdc, 1460mAh, 5.4Wh

- The following accessories are for support units only.

PRODUCT	BRAND	DESCRIPTION
Adapter	SMK	I/P: 100-240Vac, 50-60Hz, 0.12A O/P: 5.4Vdc, 700mA
USB cable	NA	0.8m non-shielded cable without core

4. The communicated functions of EUT listed as below:

		850MHz	1900MHz	With 802.11b/g/n + Bluetooth+RFID
2G	GSM	√	√	
	GPRS	√	√	
3G	WCDMA	√	-	
	HSDPA	√	-	
	HSUPA	√	-	

5. Hardware version: V2.1.0.

6. Software version: R10.1.

7. IMEI Code: 357140040002985.

8. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

FOR GSM, GPRS:

124 channels are provided to this EUT. Therefore, the low, middle and high channels are chosen for testing.

	CHANNEL	FREQUENCY	TX MODE
LOW	128	824.2 MHz	GSM, GPRS
MIDDLE	190	836.6 MHz	GSM, GPRS
HIGH	251	848.8 MHz	GSM, GPRS

NOTE:

1. Below 1 GHz, the channel 128, 190, and 251 were pre-tested in chamber. The channel 190 was chosen for final test.
2. Above 1 GHz, the channel 128, 190, and 251 were tested individually.
3. The worst case for final test is chosen when the power control level set 5.
4. The channel space is 0.2MHz.
5. The EUT is a GPRS class 12 device (Multislot class: 12, Mobile Terminal B), which provide 4 up-link. After pre-tested 4 functions, found up-link with 1 time slot is worse, therefore, test results of output power, frequency stability, occupied bandwidth and band edge tests came out from this.
6. The EUT has GSM & GPRS functions. After pre-testing, GSM function is the worst case for all the emission tests.

FOR WCDMA:


102 channels are provided to this EUT. Therefore, the low, middle and high channels are chosen for testing.

	CHANNEL	FREQUENCY	TX MODE
LOW	4132	826.4 MHz	WCDMA, HSDPA, HSUPA
MIDDLE	4182	836.4 MHz	WCDMA, HSDPA, HSUPA
HIGH	4233	846.6 MHz	WCDMA, HSDPA, HSUPA

NOTE:

1. Below 1 GHz, the channel 4132, 4182 and 4233 were pre-tested in chamber. The channel 4132 was chosen for final test.
2. Above 1 GHz, the channel 4132, 4182 and 4233 were tested individually.
3. The channel space is 0.2MHz.
4. After pretest of output power and spurious emission under WCDMA-RMC, HSDPA & HSUPA mode, find the worst mode is WCDMA-RMC. Therefore, select WCDMA-RMC mode to do final test

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

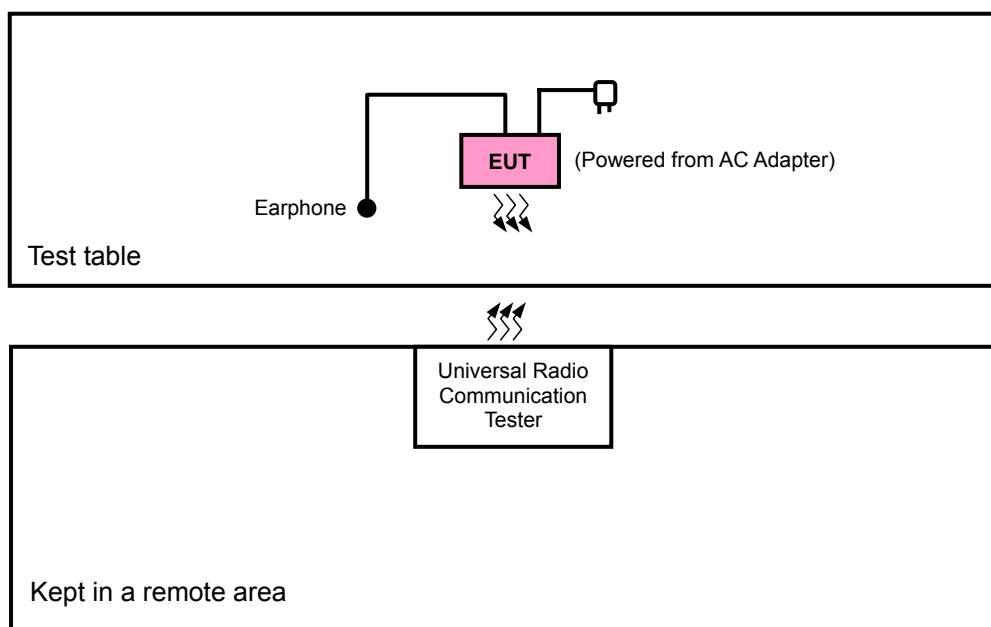

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR GSM, GPRS:

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	OP	FS	OB	BE	CE	RE<1G	RE≥1G	
-	√	√	√	√	√	√	√	-

Where

OP: Output power	FS: Frequency stability
OB: Occupied bandwidth	BE: Band edge
CE: Conducted spurious emissions	RE<1G: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz	

OUTPUT POWER MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	AXIS
128 to 251	128, 190, 251	GSM, GPRS	X, Y, Z

FREQUENCY STABILITY MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
128 to 251	190	GSM

OCCUPIED BANDWIDTH MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
128 to 251	128, 190, 251	GSM, GPRS

BAND EDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
128 to 251	128, 251	GSM, GPRS

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
128 to 251	128, 190, 251	GSM

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	AXIS
128 to 251	128	GSM	X, Y, Z

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	AXIS
128 to 251	128, 190, 251	GSM	X, Y, Z

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
OP	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
FS	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
OB	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
EM	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
BE	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
CE	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
RE < 1G	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
RE ≥ 1G	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang

FOR WCDMA:

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	OP	FS	OB	BE	CE	RE<1G	RE≥1G	
-	√	√	√	√	√	√	√	-

Where **OP**: Output power **FS**: Frequency stability
OB: Occupied bandwidth **BE**: Band edge
CE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz

OUTPUT POWER MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	AXIS
4132 to 4233	4132, 4182, 4233	WCDMA	X, Y, Z
4132 to 4233	4132	HSDPA, HSUPA	X, Y, Z

FREQUENCY STABILITY MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
4132 to 4233	4182	WCDMA

OCCUPIED BANDWIDTH MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
4132 to 4233	4132, 4182, 4233	WCDMA, HSDPA, HSUPA

BAND EDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
4132 to 4233	4132, 4233	WCDMA, HSDPA, HSUPA

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
4132 to 4233	4132, 4182, 4233	WCDMA

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	AXIS
4132 to 4233	4132	WCDMA, HSDPA, HSUPA	X, Y, Z

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	AXIS
4132 to 4233	4132, 4182, 4233	WCDMA	X, Y, Z
4132 to 4233	4132	HSDPA, HSUPA	X, Y, Z

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
OP	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
FS	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
OB	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
EM	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
BE	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
CE	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
RE < 1G	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang
RE ≥ 1G	22deg. C, 68%RH, 1008 hPa	120Vac, 60Hz	David Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

ANSI C63.4-2003

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	EARPHONE	APPLE	A1367	NA	NA
2	UNIVERSAL RADIO COMMUNICATION TESTER	R&S	CMU200	104484	NA
3	NJZ-2000 (GPRS+WCDMA SIMULATOR)	JRC	NJZ-2000	ET00054	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.15m non-shielded cable
2	NA
3	NA

NOTE 1: All power cords of the above support units are non shielded (1.8m).

NOTE 2: Item 2-3 acted as a communication partners to transfer data.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 22.913 (a) that "Mobile / Portable station are limited to 7 watts e.r.p".

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	Jul. 22, 2010	Jul. 21, 2011
Spectrum Analyzer Agilent	E4446A	MY48250266	Aug. 11, 2010	Aug. 10, 2011
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 13, 2011	Apr. 12, 2012
HORN Antenna SCHWARZBECK	9120D	9120D-405	Feb. 08, 2011	Feb. 07, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 27, 2010	Dec. 26, 2011
Preamplifier Agilent	8447D	2944A10633	Nov. 02, 2010	Nov. 01, 2011
Preamplifier Agilent	8449B	3008A01964	Nov. 02, 2010	Nov. 01, 2011
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295014/4	Sep 03, 2010	Sep 02, 2011
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	Sep 03, 2010	Sep 02, 2011
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 988962.
5. The IC Site Registration No. is IC 7450F-3.

4.1.3 TEST PROCEDURES

EIRP / ERP MEASUREMENT:


- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 128, 190 and 251 (GSM & GPRS) / 4132, 4182 and 4233 (WCDMA) (low, middle and high operational frequency range.) RWB and VBW is 1MHz for GSM & GPRS and 5MHz for WCDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The " Read Value " is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable . Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to " Read Value " of step c. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- e. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi}.$

CONDUCTED POWER MEASUREMENT:

- a. The EUT was set up for the maximum power with GSM & GPRS /WCDMA link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.4 TEST SETUP

EIRP / ERP MEASUREMENT:

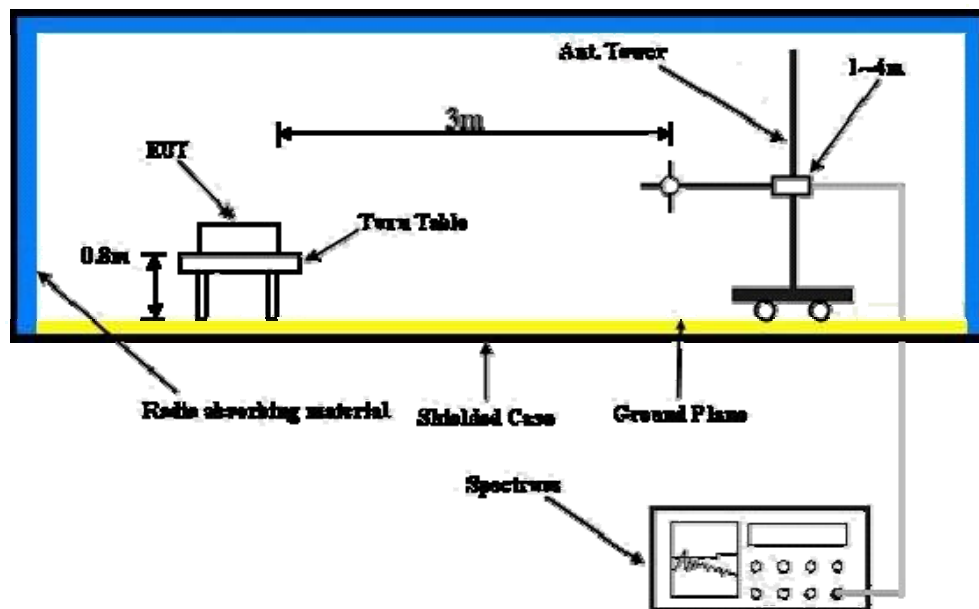

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:

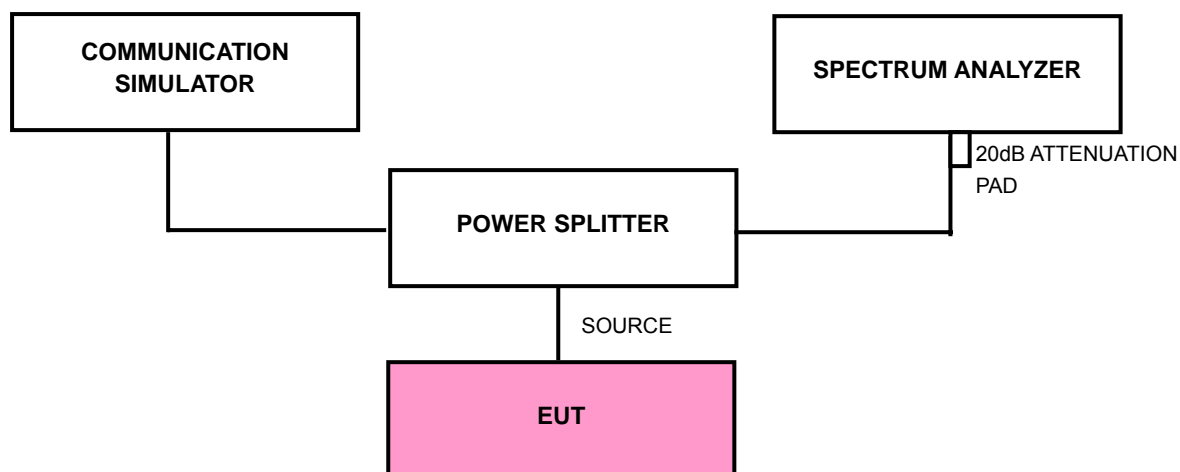

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.5 EUT OPERATING CONDITIONS

- The EUT makes a call to the communication simulator.
- The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

4.1.6 TEST RESULTS

FOR GSM, GPRS:

FOR GSM MODE

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
128	824.2	32.29	0.369	32.659	1.8446
190	836.6	32.54	0.373	32.913	1.9557
251	848.8	32.45	0.384	32.834	1.9204

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
128	824.2	32.12	0.369	32.489	1.7738
190	836.6	32.38	0.373	32.753	1.8850
251	848.8	32.29	0.384	32.674	1.8510

REMARKS: 1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).

FOR GSM MODE

X-AXIS

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
128	824.2	39.2	-8.6	30.6	1.1350
190	836.6	39.4	-8.6	30.8	1.1885
251	848.8	38.7	-8.7	30.0	0.9886

Y-AXIS

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
128	824.2	38.9	-8.6	30.3	1.0593
190	836.6	39.2	-8.6	30.6	1.1350
251	848.8	38.9	-8.7	30.2	1.0351

Z-AXIS

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
128	824.2	38.9	-8.6	30.3	1.0593
190	836.6	39.3	-8.6	30.7	1.1614
251	848.8	38.9	-8.7	30.2	1.0351

REMARKS: 1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

X-AXIS

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
128	824.2	38.7	-8.6	30.1	1.0116
190	836.6	38.9	-8.6	30.3	1.0593
251	848.8	38.4	-8.7	29.7	0.9226

Y-AXIS

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
128	824.2	38.5	-8.6	29.9	0.9661
190	836.6	38.7	-8.6	30.1	1.0116
251	848.8	38.5	-8.7	29.8	0.9441

Z-AXIS

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
128	824.2	38.5	-8.6	29.9	0.9661
190	836.6	38.9	-8.6	30.3	1.0593
251	848.8	38.6	-8.7	29.9	0.9661

REMARKS: 1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

FOR WCDMA:
WCDMA-RMC MODE

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
4132	826.4	23.71	0.371	24.081	0.2559
4182	836.4	23.38	0.373	23.753	0.2373
4233	846.6	23.38	0.379	23.759	0.2376

HSDPA MODE

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
4132	826.4	23.03	0.371	23.401	0.2188
4182	836.4	22.75	0.373	23.123	0.2053
4233	846.6	22.78	0.379	23.159	0.2070

HSUPA MODE

CONDUCTED OUTPUT POWER					
CHANNEL NO.	FREQUENCY (MHz)	RAW VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
4132	826.4	23.02	0.371	23.391	0.2183
4182	836.4	22.58	0.373	22.953	0.1974
4233	846.6	22.63	0.379	23.009	0.1999

REMARKS: 1. Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).

WCDMA-RMC MODE

X-AXIS

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
4132	826.4	30.4	-8.6	21.8	0.1496
4182	836.4	30.0	-8.6	21.4	0.1365
4233	846.6	30.3	-8.7	21.7	0.1462

Y-AXIS

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
4132	826.4	29.5	-8.6	20.9	0.1216

Z-AXIS

ERP POWER					
CHANNEL NO.	FREQUENCY (MHz)	S.G VALUE (dBm)	CORRECTION FACTOR (dB)	OUTPUT POWER	
				dBm	Watt
4132	826.4	29.1	-8.6	20.5	0.1109

REMARKS: 1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 22.863 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 2.5ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) -30°C $\sim 55^{\circ}\text{C}$.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250266	Aug. 11, 2010	Aug. 10, 2011
Hewlett Packard RF cable	8120-6192	01428251	NA	NA
RF cable	SUCOFLEX 104	257029	Sep. 11, 2010	Sep. 10, 2011
WIT Standard Temperature & Humidity Chamber	MHU-225AU	920842	Jun. 09, 2010	Jun. 08, 2011


NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

- Because of the measure the carrier frequency under the condition of the AFC lock, it shall be used the mobile station in the GSM / WCDMA link mode. This is accomplished with the use of the R&S CMU200 / JRC NJZ-2000 simulator station. The oven room could control the temperatures and humidity. The GSM link channel is the 190 and the WCDMA link channel is the 4182.
- Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.33Volts to 4.07Volts. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 during the measurement testing.
- The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.4 TEST SETUP

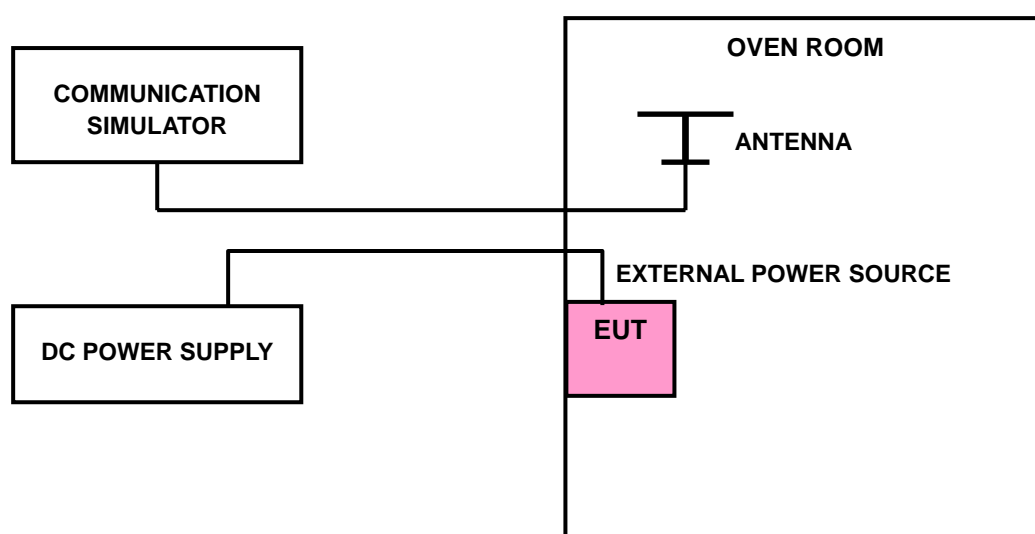

4.2.5 TEST RESULTS

FOR GSM:

AFC FREQUENCY ERROR vs. VOLTAGE			
VOLTAGE (Volts)	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
4.07	-26	-0.031	2.5
3.33	-27	-0.032	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.33Vdc to 4.07Vdc.

AFC FREQUENCY ERROR vs. TEMP.			
TEMP. ()	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
55	-34	-0.041	2.5
50	-32	-0.038	2.5
40	-30	-0.036	2.5
30	-28	-0.033	2.5
20	-22	-0.026	2.5
10	-16	-0.019	2.5
0	4	0.005	2.5
-10	-8	-0.010	2.5
-20	-12	-0.014	2.5
-30	21	0.025	2.5

FOR WCDMA:

AFC FREQUENCY ERROR vs. VOLTAGE			
VOLTAGE (Volts)	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
4.07	-9	-0.011	2.5
3.33	-11	-0.013	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.33Vdc to 4.07Vdc.

AFC FREQUENCY ERROR vs. TEMP.			
TEMP. ()	FREQUENCY ERROR (Hz)	FREQUENCY ERROR (ppm)	LIMIT (ppm)
55	-21	-0.025	2.5
50	-18	-0.022	2.5
40	-16	-0.019	2.5
30	-10	-0.012	2.5
20	-5	-0.006	2.5
10	3	0.004	2.5
0	-1	-0.001	2.5
-10	6	0.007	2.5
-20	8	0.010	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT


The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the totalmean power of a given emission.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100039	Jan. 11, 2011	Jan. 10, 2012
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Jun. 25, 2010	Jun. 24, 2011
RF cable	SUCOFLEX 104	274403/4	Aug. 20, 2010	Aug. 19, 2011
RF cable	SUCOFLEX 104	250729/4	Aug. 19, 2010	Aug. 18, 2011
RF cable	SUCOFLEX 104	214377/4	Aug. 19, 2010	Aug. 18, 2011
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SETUP

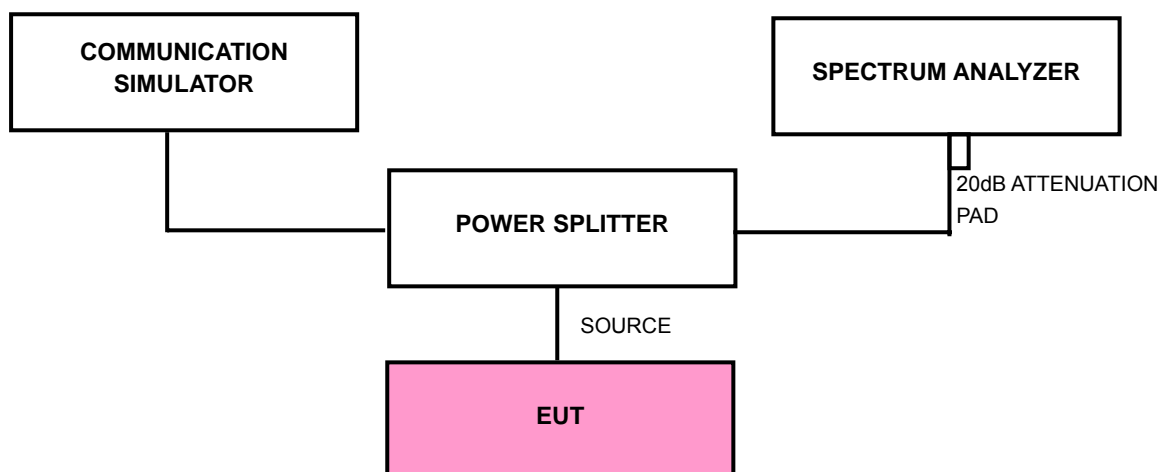

4.3.4 TEST PROCEDURES

- a. The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 128, 190 and 251 (GSM / GPRS) / 4132, 4182 and 4233 (WCDMA) (low, middle and high operational frequency range.)
- b. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss is the worst loss 24.6dB in the transmitted path track.
- c. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.5 EUT OPERATING CONDITION

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled a EUT to export maximum and minimum output power under transmission mode and specific channel frequency.


4.3.6 TEST RESULTS

FOR GSM, GPRS:

FOR GSM MODE

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)
128	824.2	242
190	836.6	242
251	848.8	244


CH 251

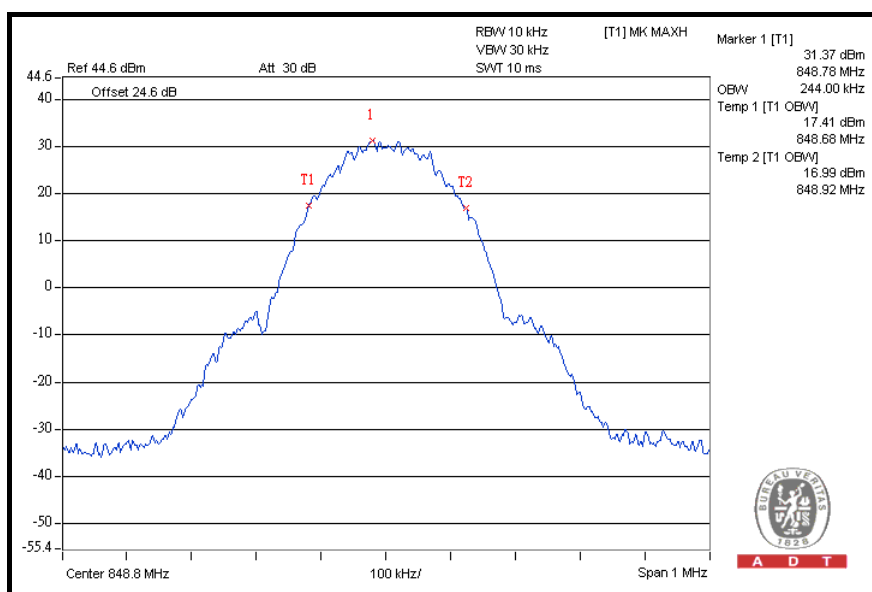

FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (kHz)
128	824.2	244
190	836.6	246
251	848.8	244

CH 190

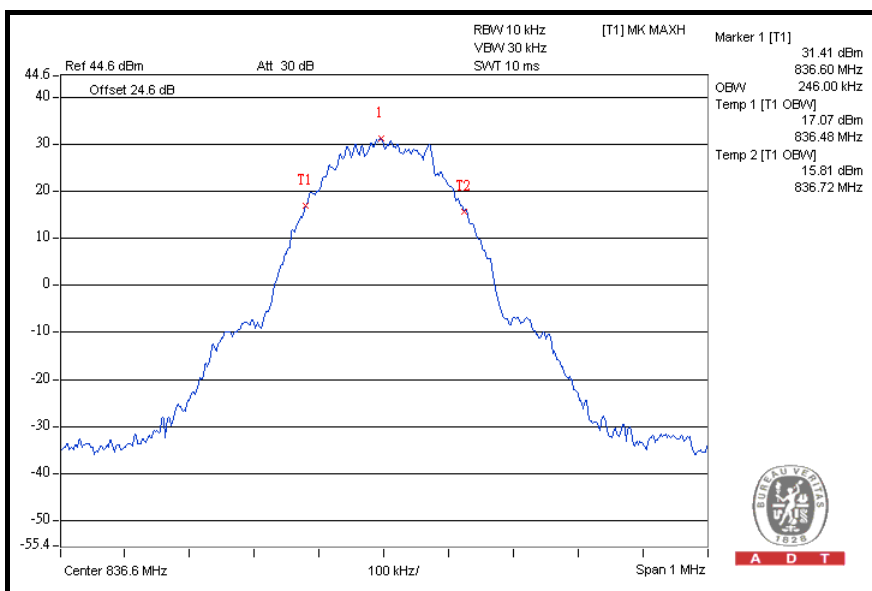


FOR WCDMA:

FOR WCDMA-RMC:

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
4132	826.4	4.14
4182	836.4	4.16
4233	846.6	4.14


CH 4182

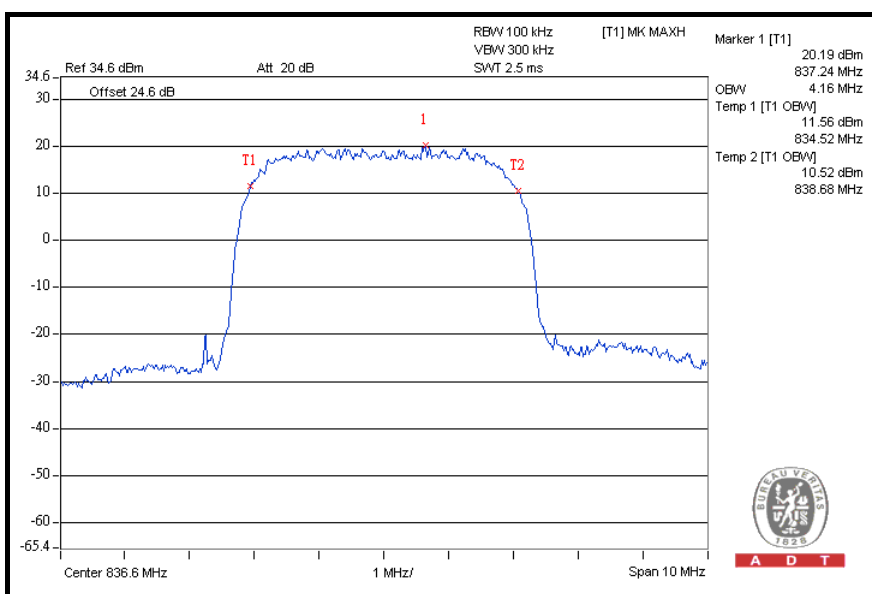

FOR HSDPA:

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
4132	826.4	4.14
4182	836.4	4.14
4233	846.6	4.14


CH 4132

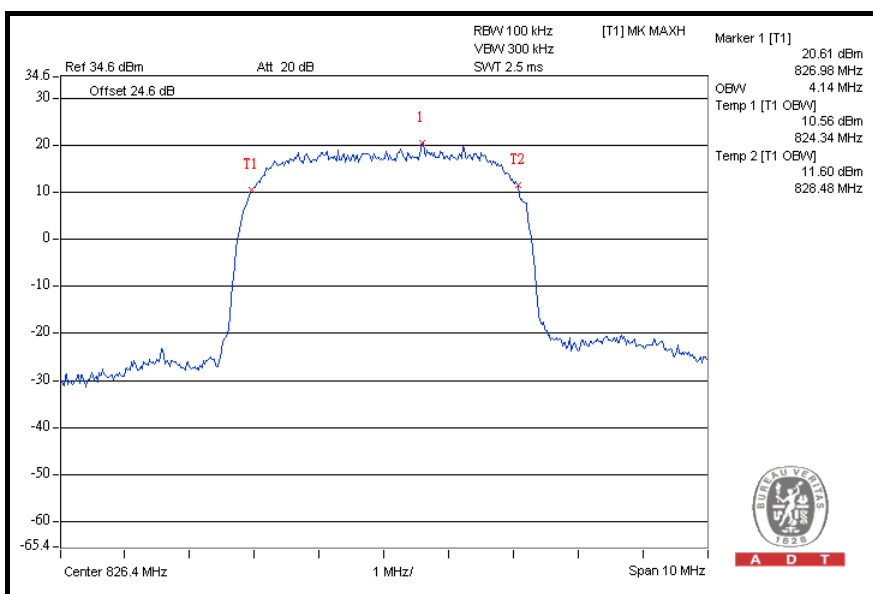

FOR HSUPA:

CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)
4132	826.4	4.14
4182	836.4	4.14
4233	846.6	4.14

CH 4132

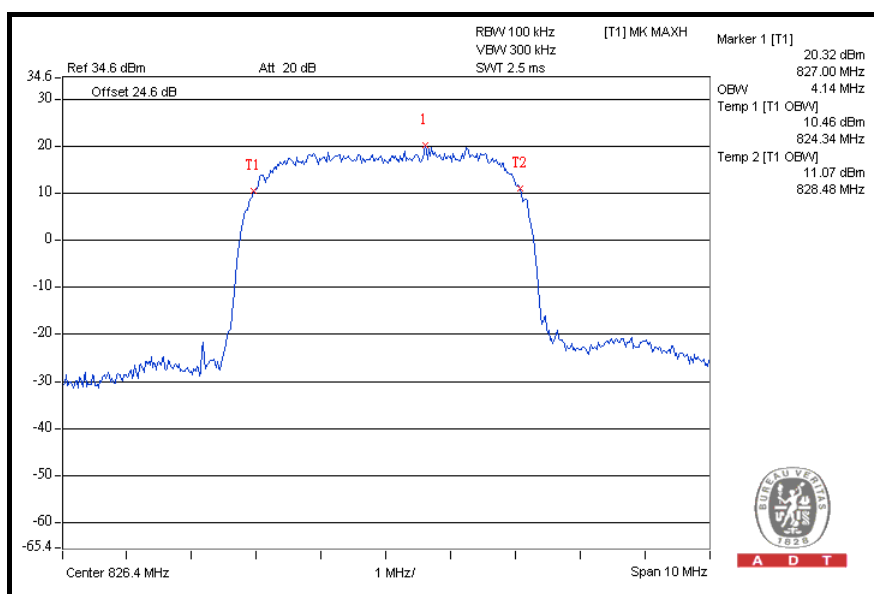

4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT


According to FCC 22.917 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100039	Jan. 11, 2011	Jan. 10, 2012
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Jun. 25, 2010	Jun. 24, 2011
RF cable	SUCOFLEX 104	274403/4	Aug. 20, 2010	Aug. 19, 2011
RF cable	SUCOFLEX 104	250729/4	Aug. 19, 2010	Aug. 18, 2011
RF cable	SUCOFLEX 104	214377/4	Aug. 19, 2010	Aug. 18, 2011
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST SETUP

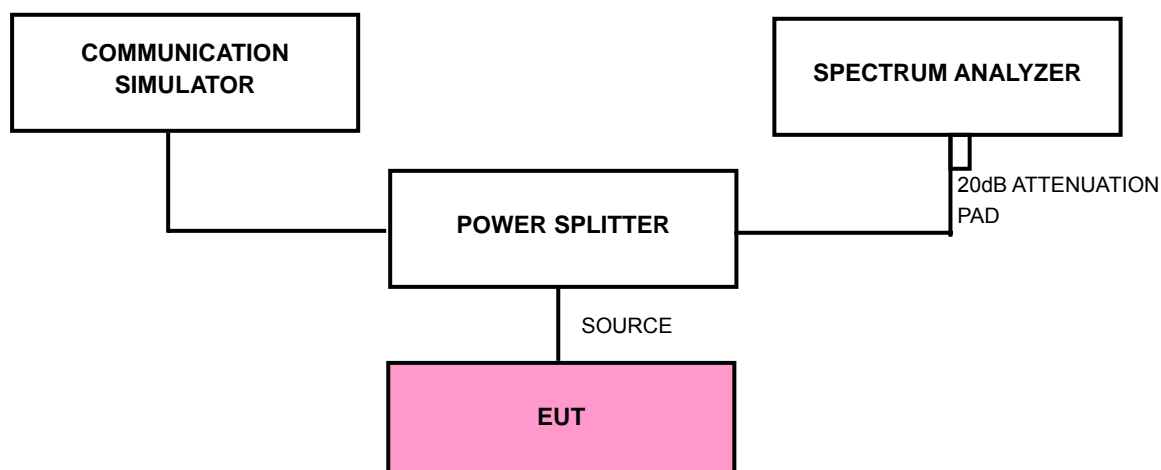

4.4.4 TEST PROCEDURES

- a. The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 128 and 251 (GSM/GPRS) / 4132 and 4233 (WCDMA) (low and high operational frequency range.)
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss is the worst loss 24.6dB in the transmitted path track.
- c. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS).
- d. The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- e. Record the max trace plot into the test report.

4.4.5 EUT OPERATING CONDITION


- a. The EUT makes a phone call to the communication simulator.
- b. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

4.4.6 TEST RESULTS


FOR GSM / GPRS:

FOR GSM

LOWER BAND EDGE

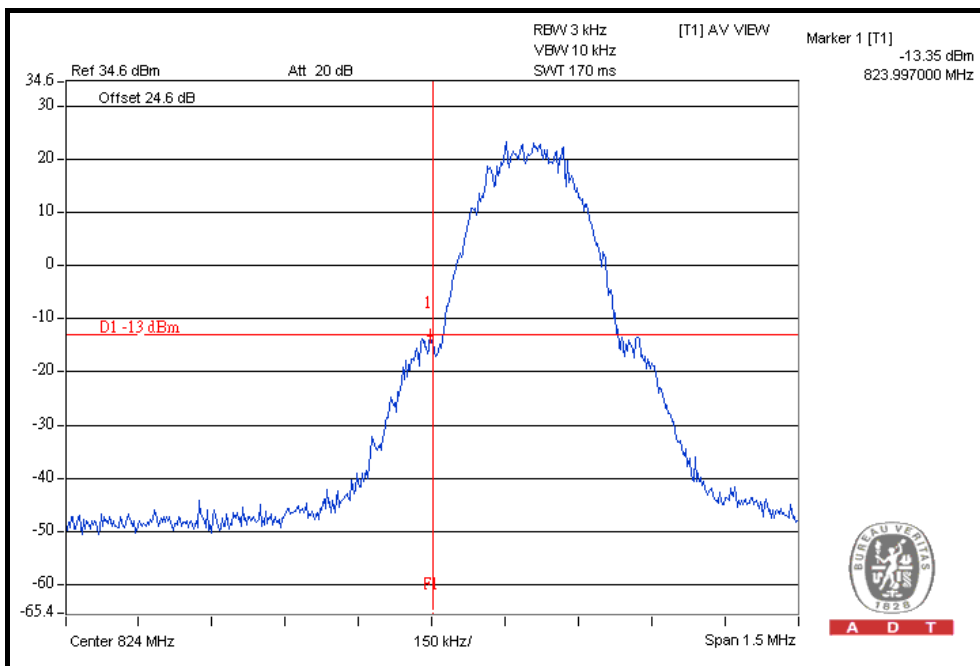


HIGHER BAND EDGE

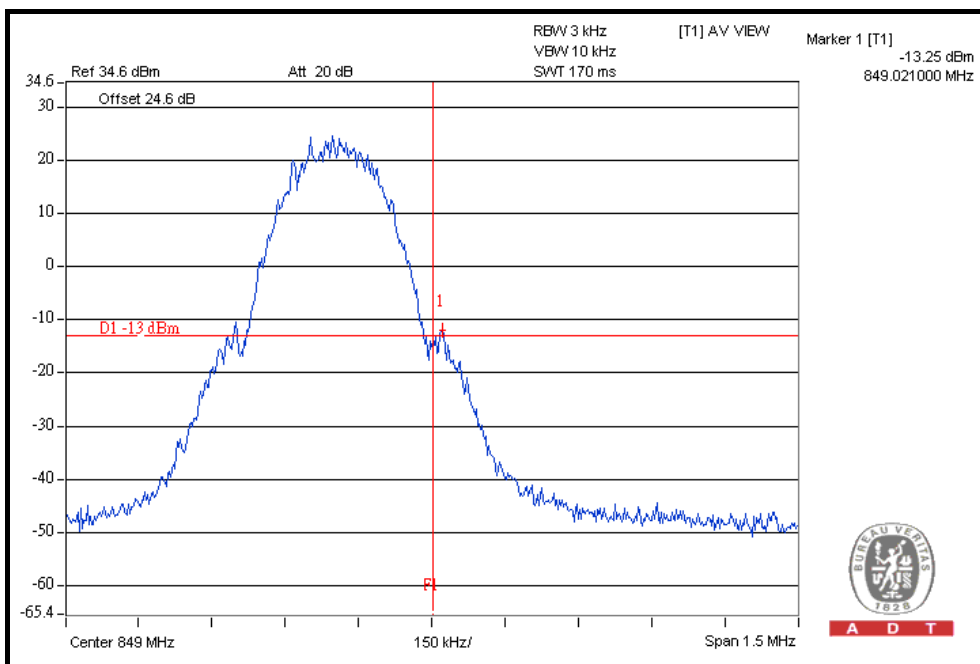


FOR GPRS MODE (UP-LINK WITH 1 TIME SLOT)

LOWER BAND EDGE

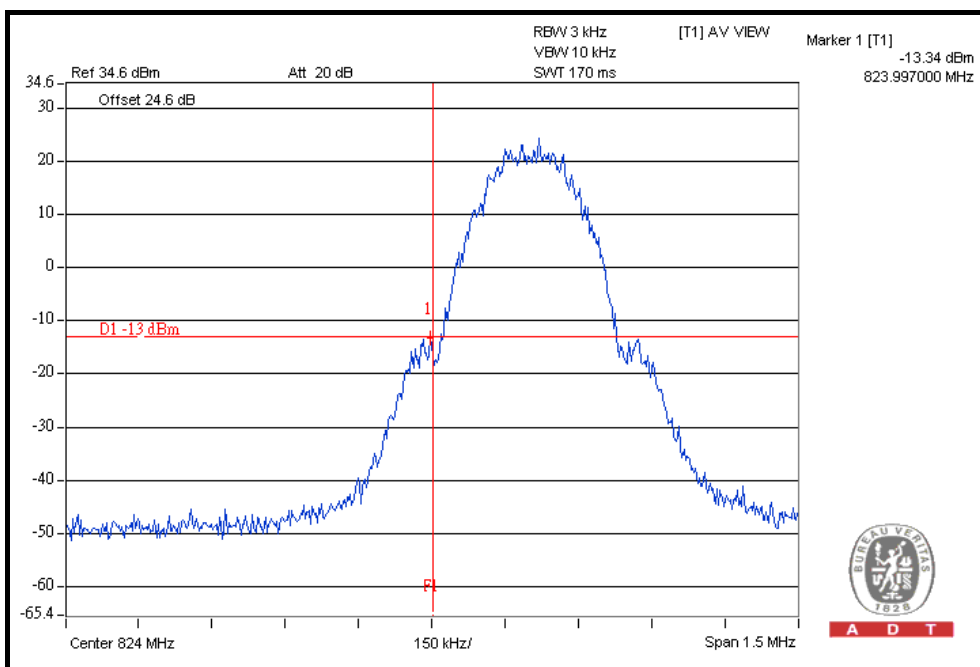


HIGHER BAND EDGE

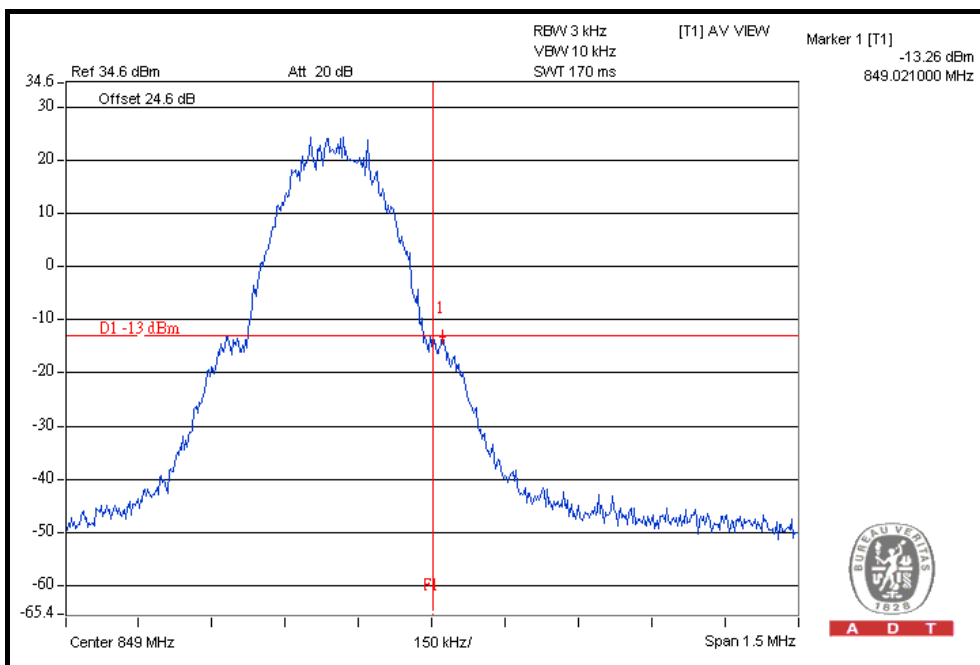


FOR WCDMA:

WCDMA-RMC MODE

LOWER BAND EDGE

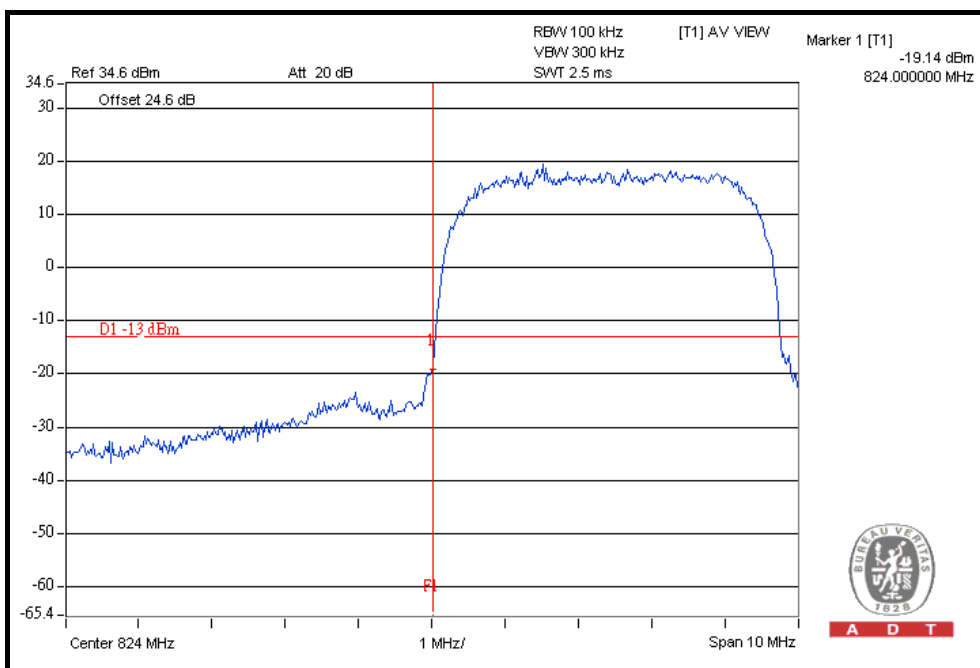


HIGHER BAND EDGE

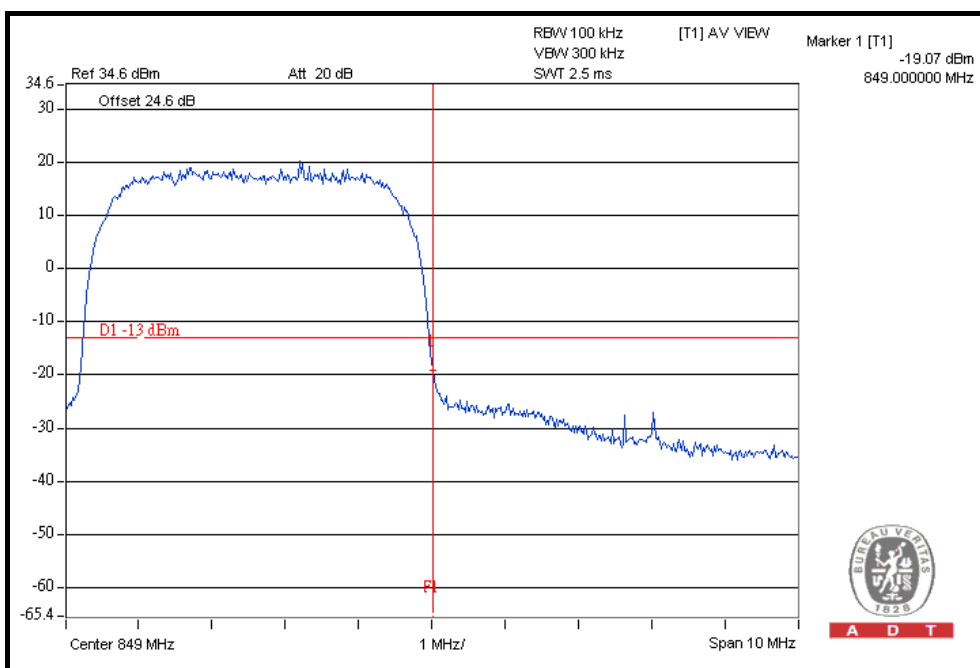


HSDPA MODE

LOWER BAND EDGE

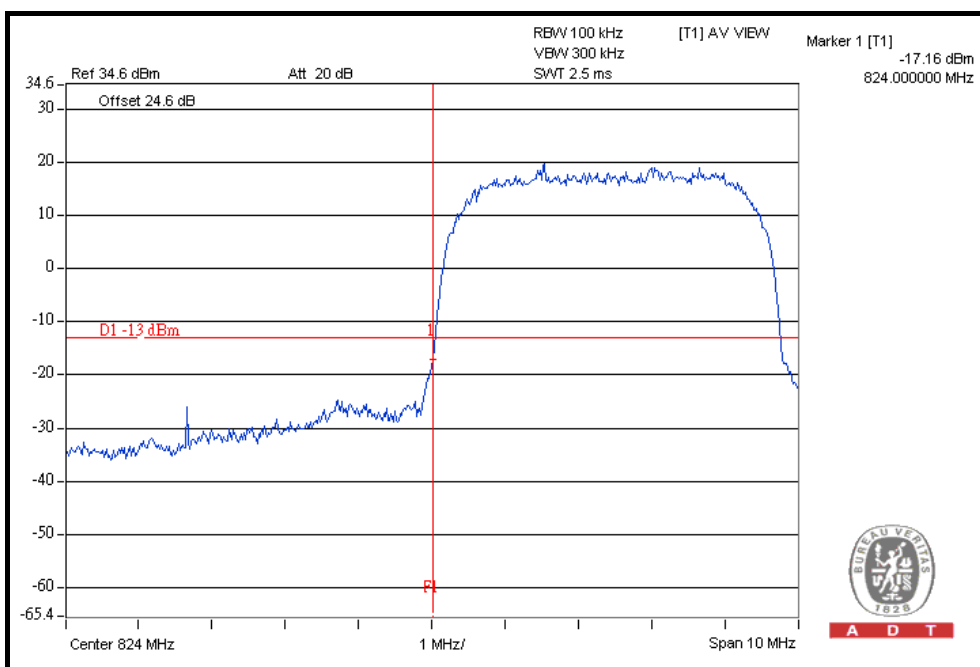


HIGHER BAND EDGE

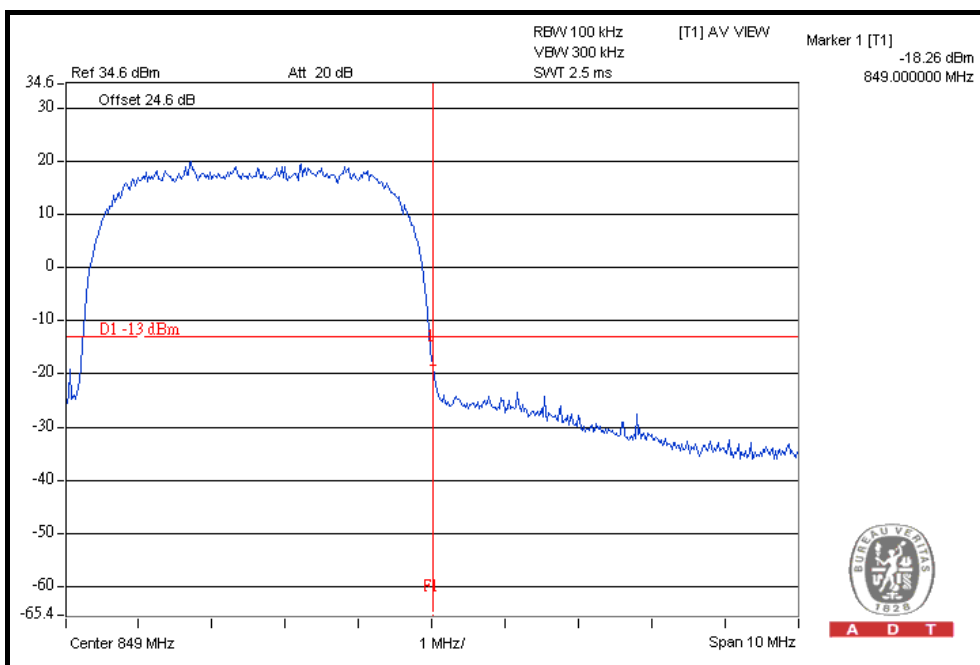


HSUPA MODE

LOWER BAND EDGE

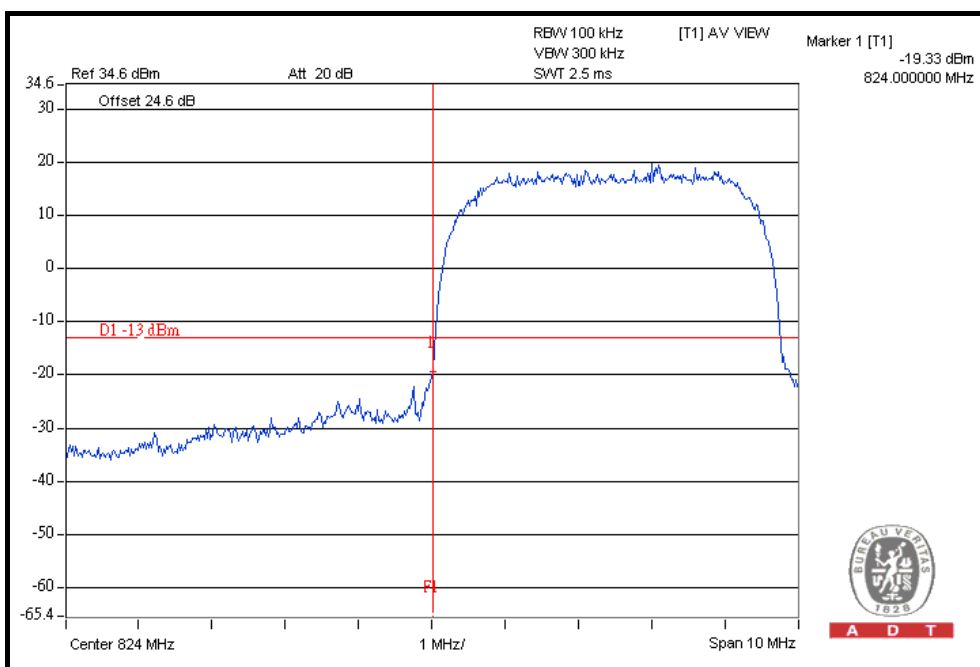

HIGHER BAND EDGE

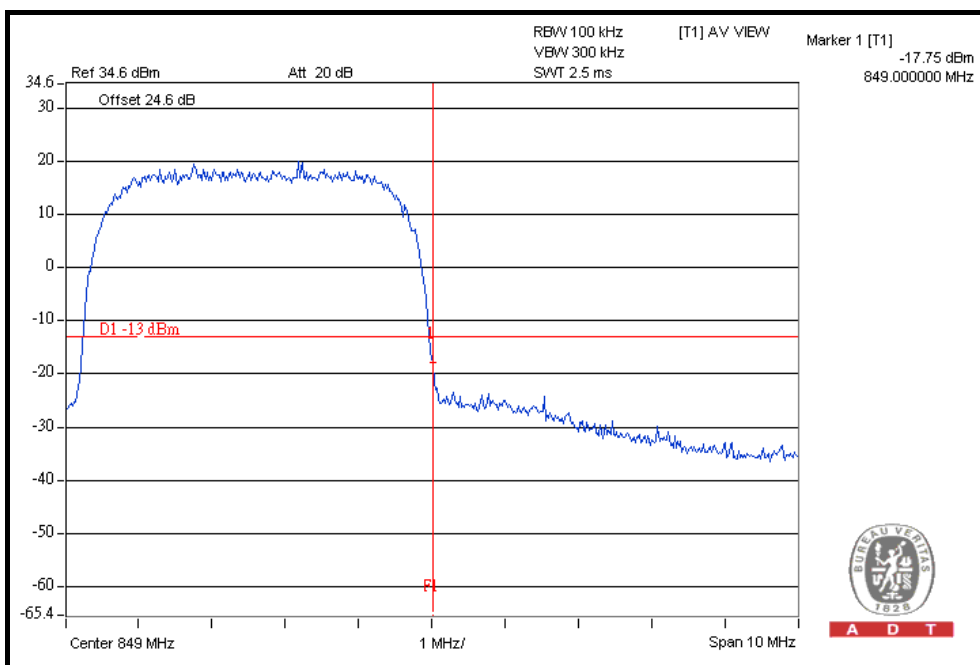

4.5 CONDUCTED SPURIOUS EMISSIONS

4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 22.917, On any frequency outside a licensee's frequency block within GPRS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission limit equal to -13dBm .

4.5.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER R&S	FSP40	100039	Jan. 11, 2011	Jan. 10, 2012
Wainwright Instruments Band Reject Filter	WRCG 824/849-810/ 863-60/9SS	SN1	Mar. 23, 2011	Mar. 22, 2012
WI Highpass filter	WHK1.5/15G-10ST	SN1	Mar. 23, 2011	Mar. 22, 2012
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Jun. 25, 2010	Jun. 24, 2011
RF cable	SUCOFLEX 104	274403/4	Aug. 20, 2010	Aug. 19, 2011
RF cable	SUCOFLEX 104	250729/4	Aug. 19, 2010	Aug. 18, 2011
RF cable	SUCOFLEX 104	214377/4	Aug. 19, 2010	Aug. 18, 2011
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 128, 190 and 251 (GSM) / 4132, 4182 and 4233 (WCDMA) (low, middle and high operational frequency range.)
- The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 24.6dB in the transmitted path track.
- When the spectrum scanned from 9kHz to 1GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB=1MHz, VB=3MHz.
- When the spectrum scanned from 1GHz to 9GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB=1MHz, VB=3MHz.

4.5.4 TEST SETUP

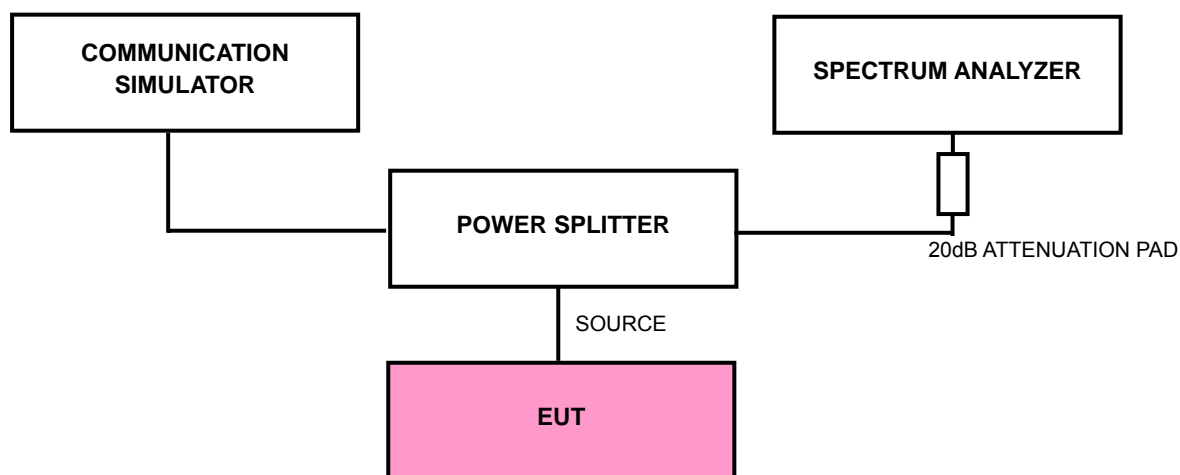


4.5.5 EUT OPERATING CONDITIONS

- The EUT makes a call to the communication simulator.
- The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.


4.5.6 TEST RESULTS

FOR GSM:


CH 128: 9kHz ~ 1GHz

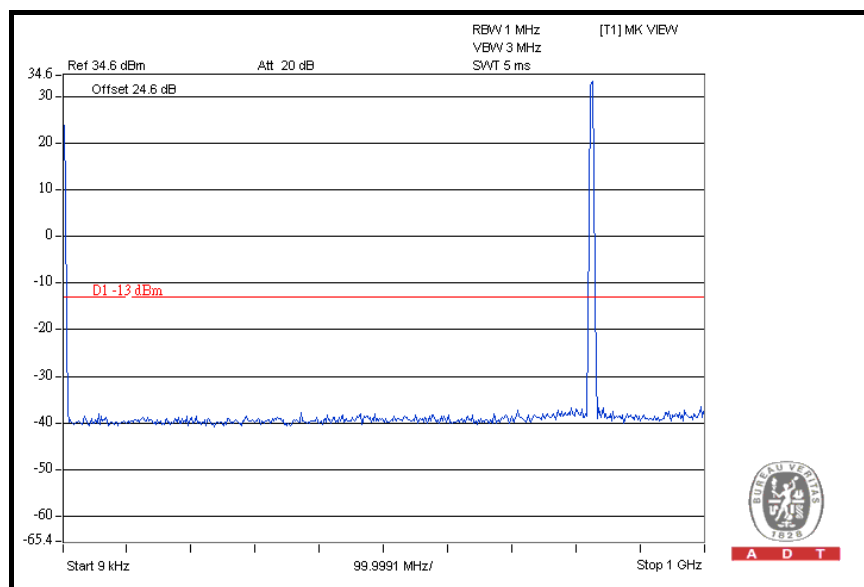


1GHz ~ 4GHz

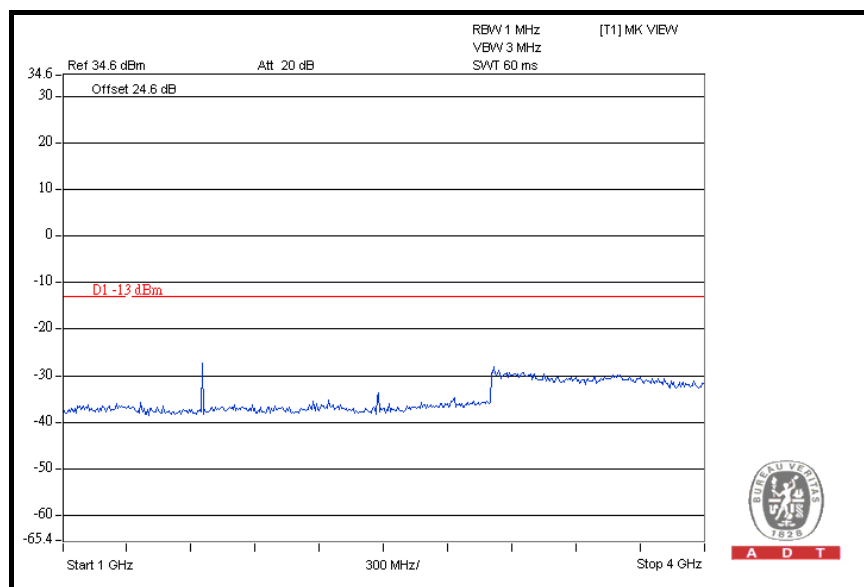


4GHz ~ 7GHz

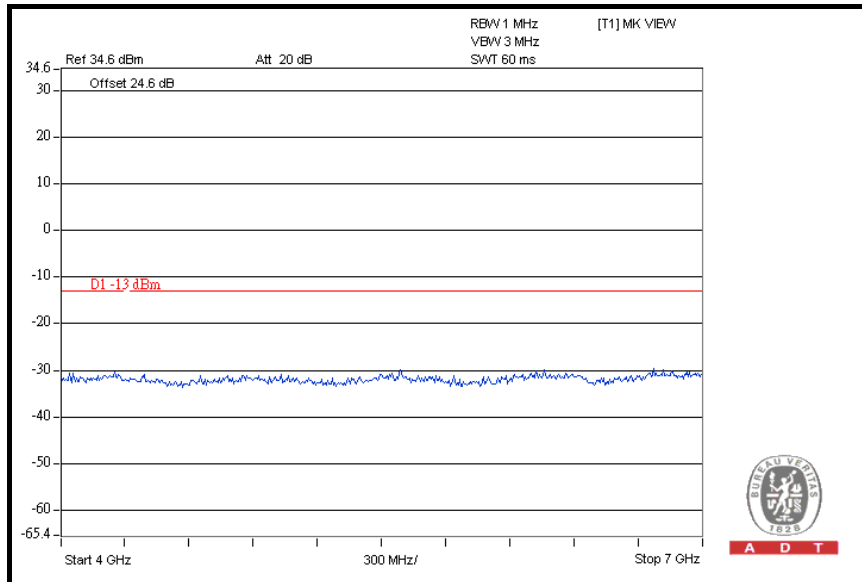


7GHz ~ 9GHz

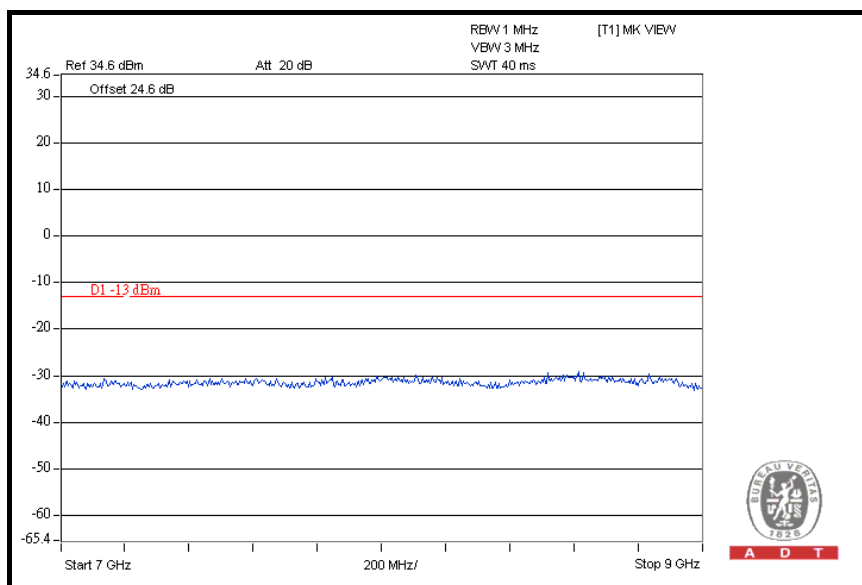


CH 190: 9kHz ~ 1GHz

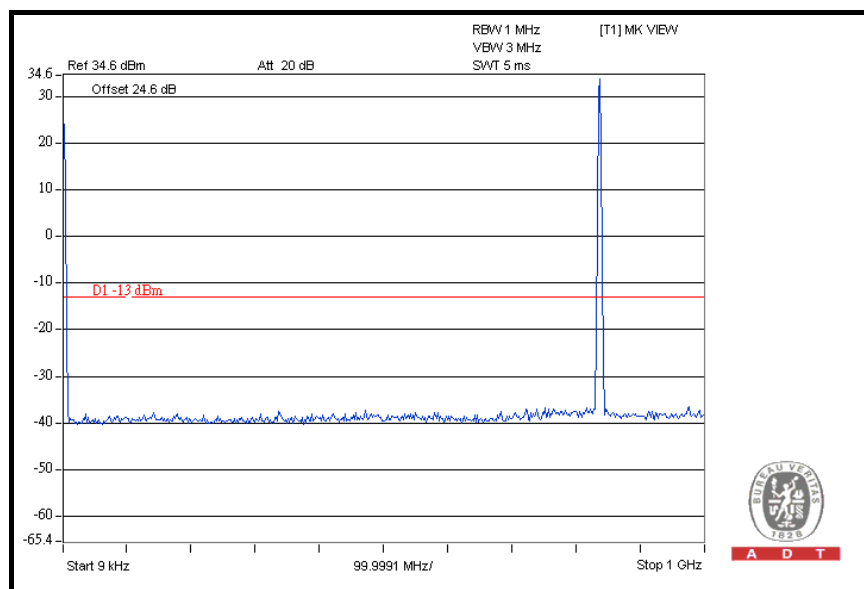


1GHz ~ 4GHz

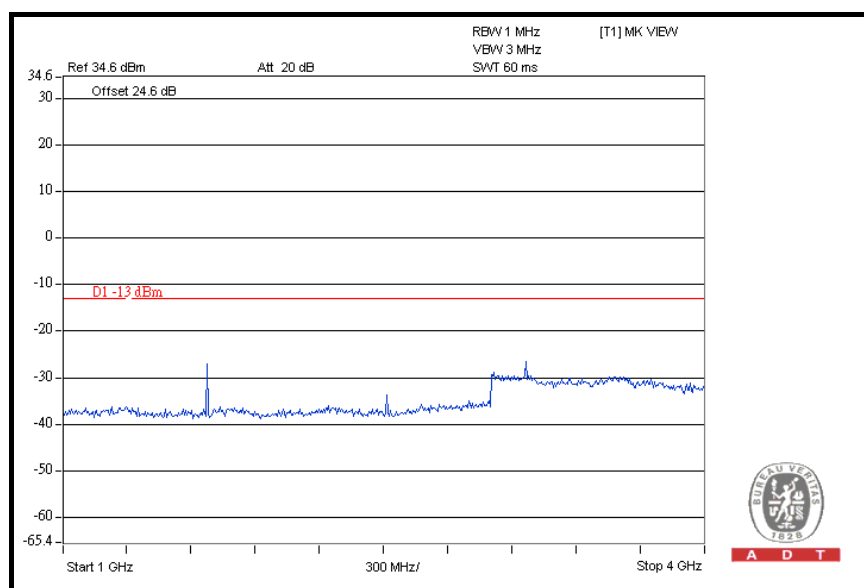


4GHz ~ 7GHz

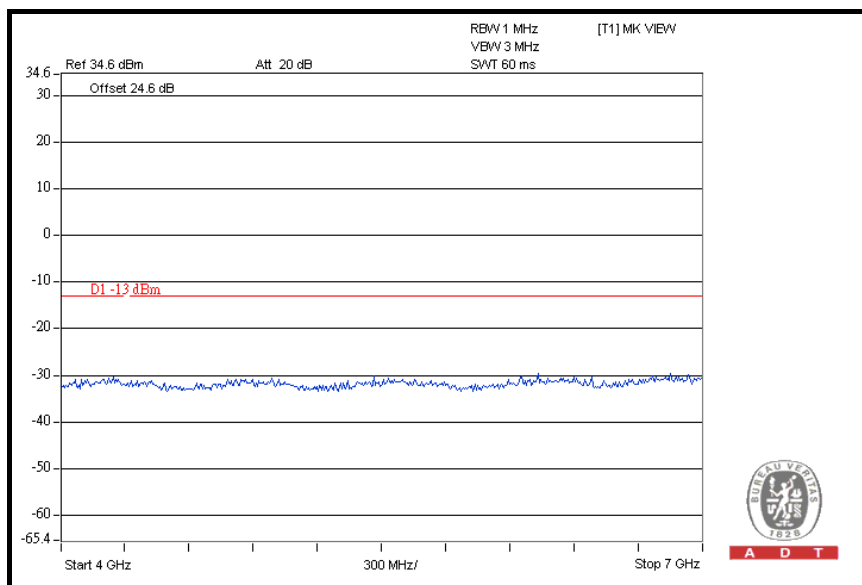


7GHz ~ 9GHz

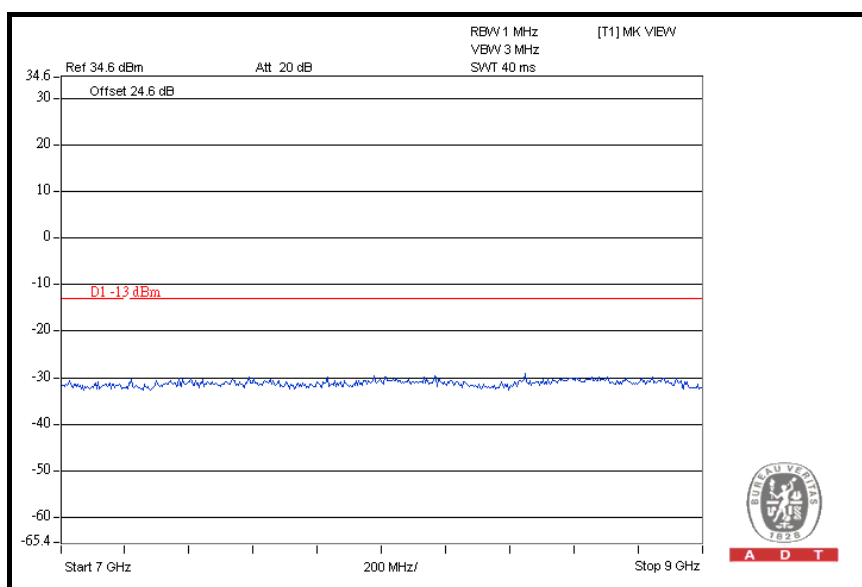


CH 251: 9kHz ~ 1GHz

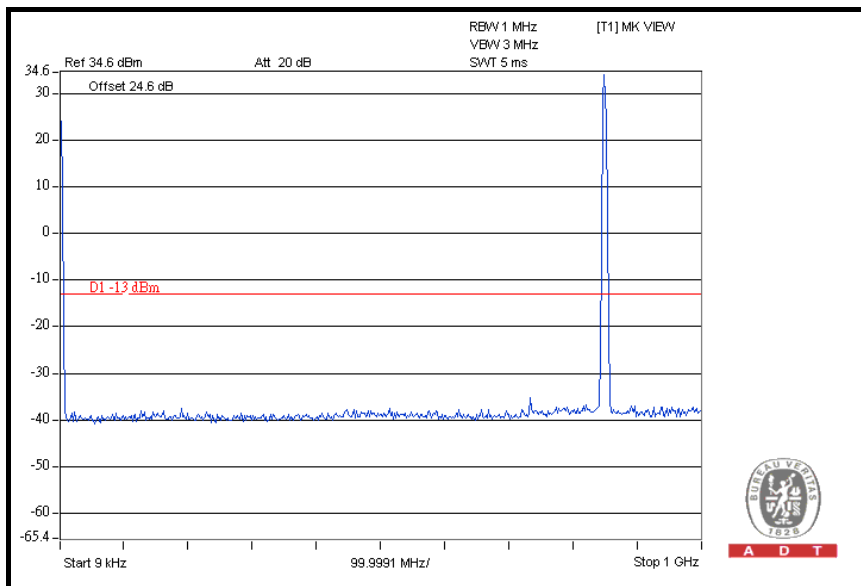


1GHz ~ 4GHz

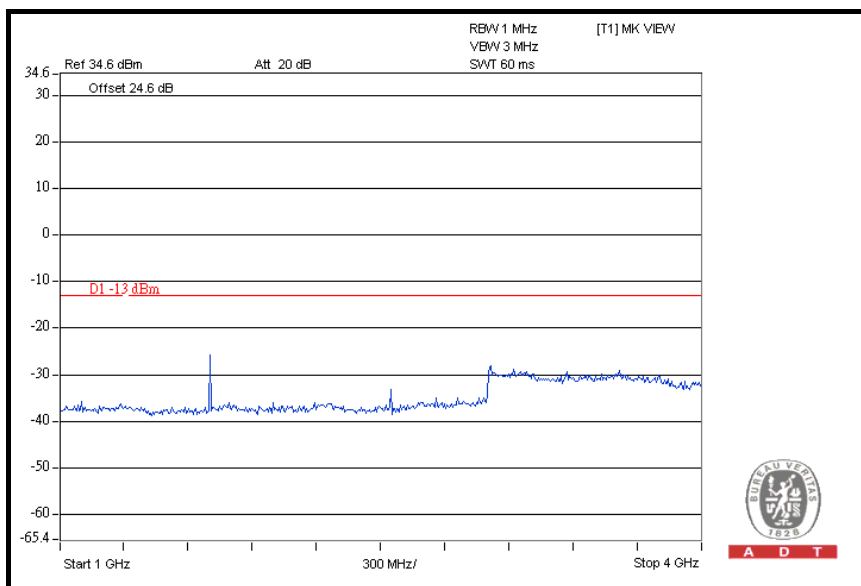

4GHz ~ 7GHz

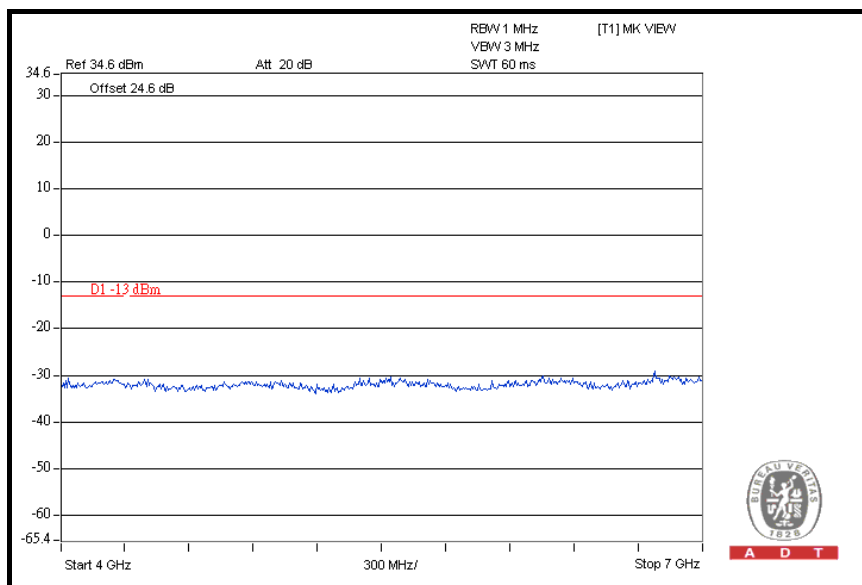


7GHz ~ 9GHz

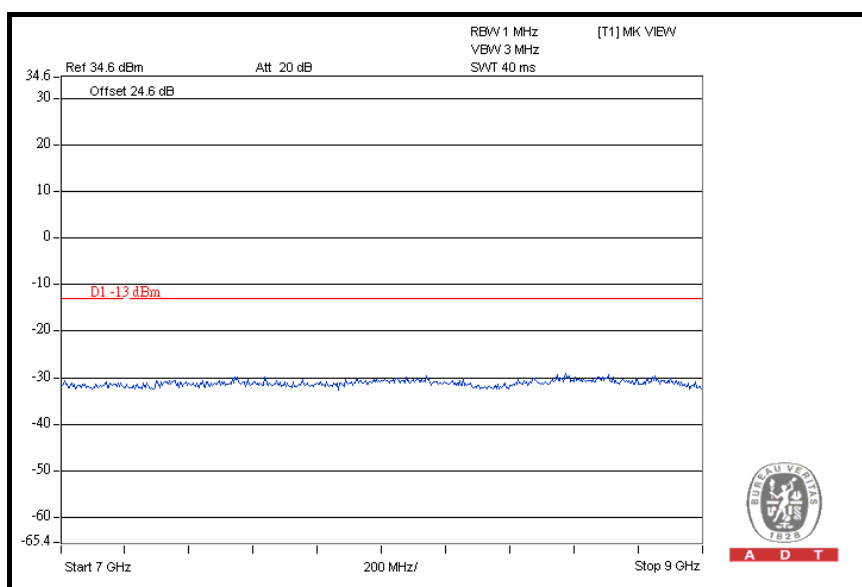


FOR WCDMA-RMC:


CH 4132: 9kHz ~ 1GHz

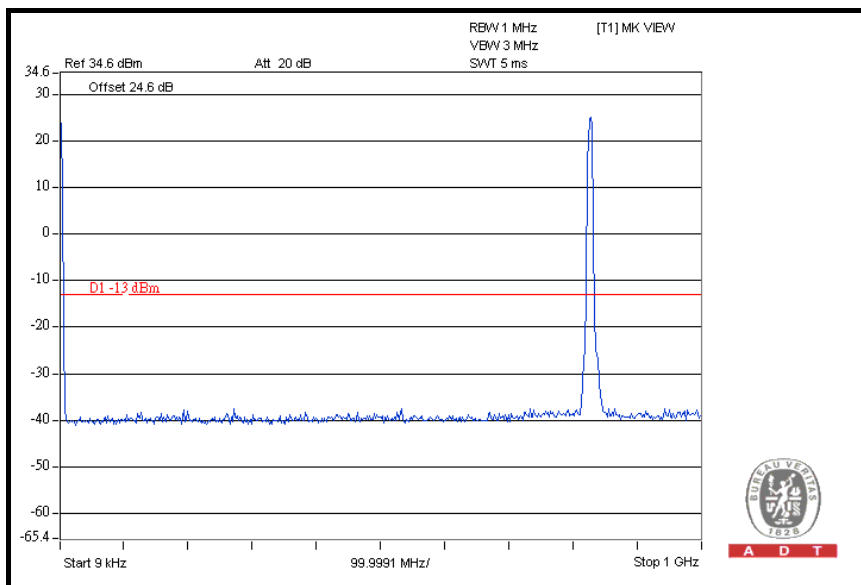


1GHz ~ 4GHz

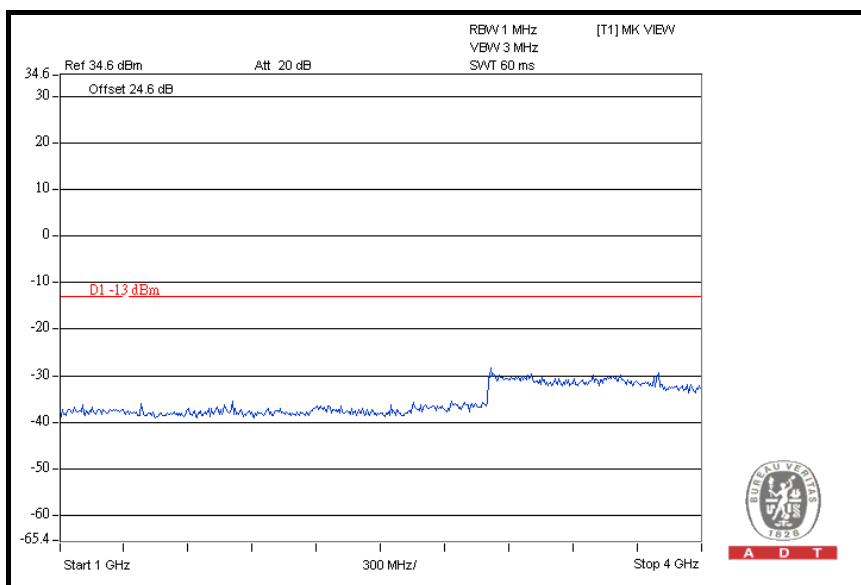


4GHz ~ 7GHz

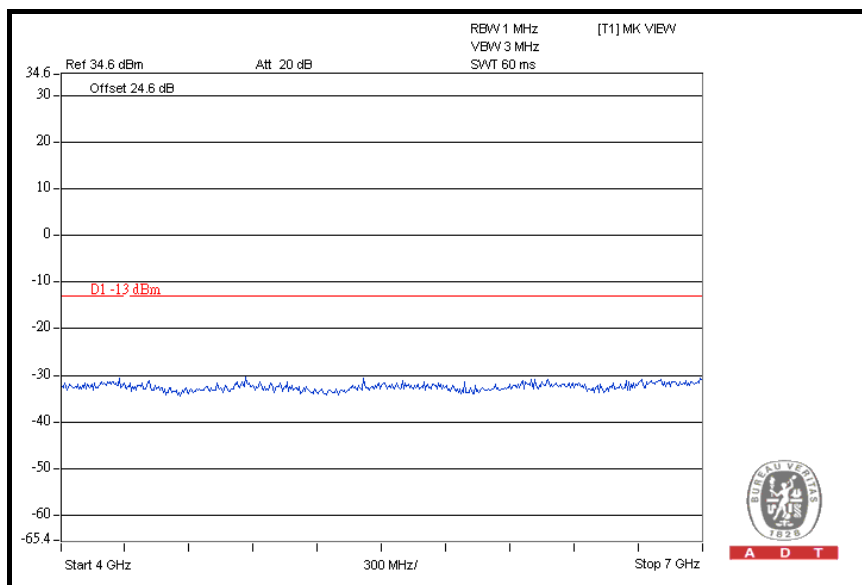


7GHz ~ 9GHz

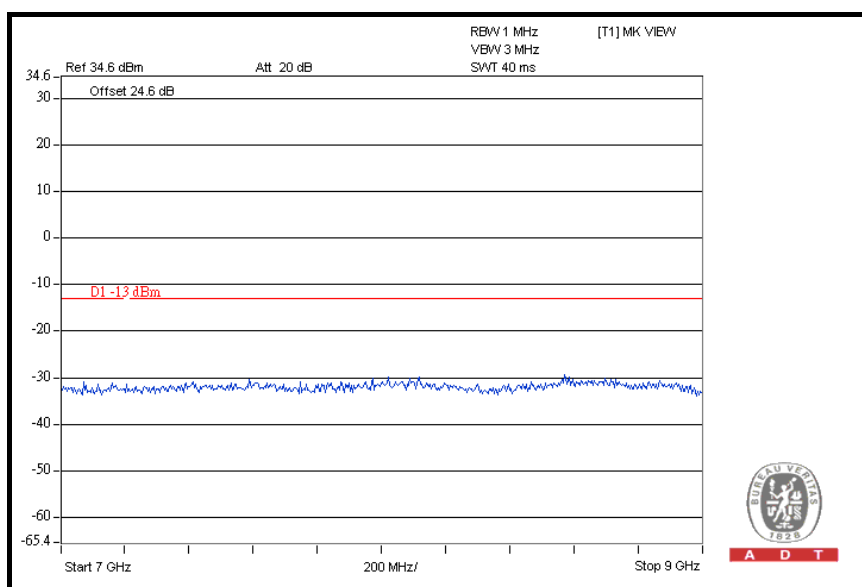


CH 4182: 9kHz ~ 1GHz

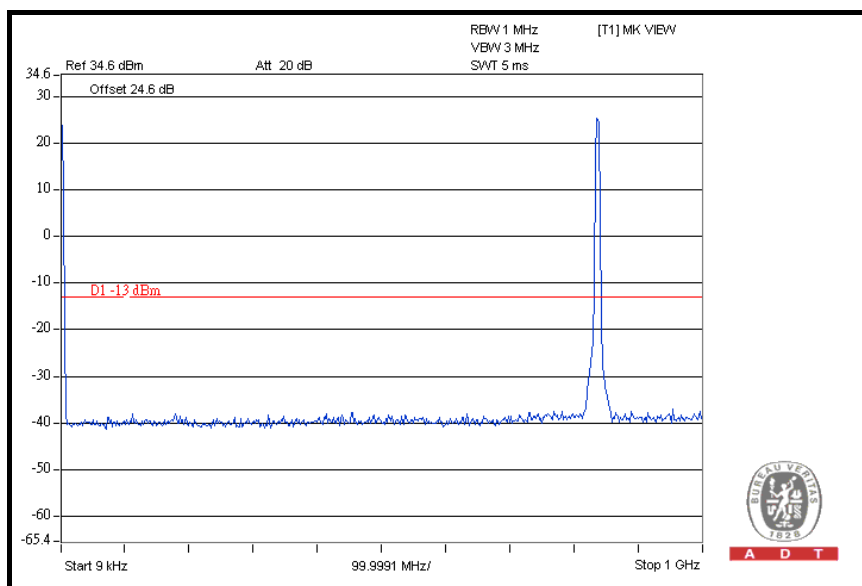


1GHz ~ 4GHz

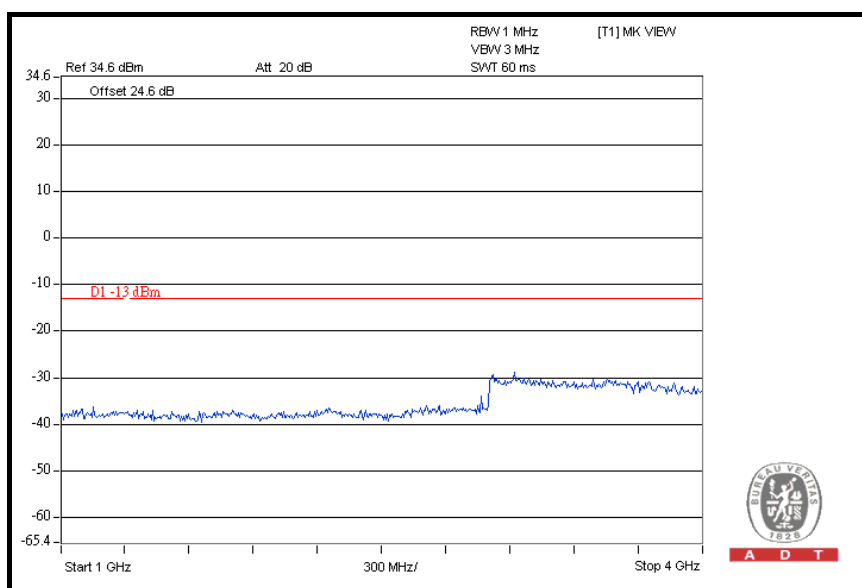


4GHz ~ 7GHz

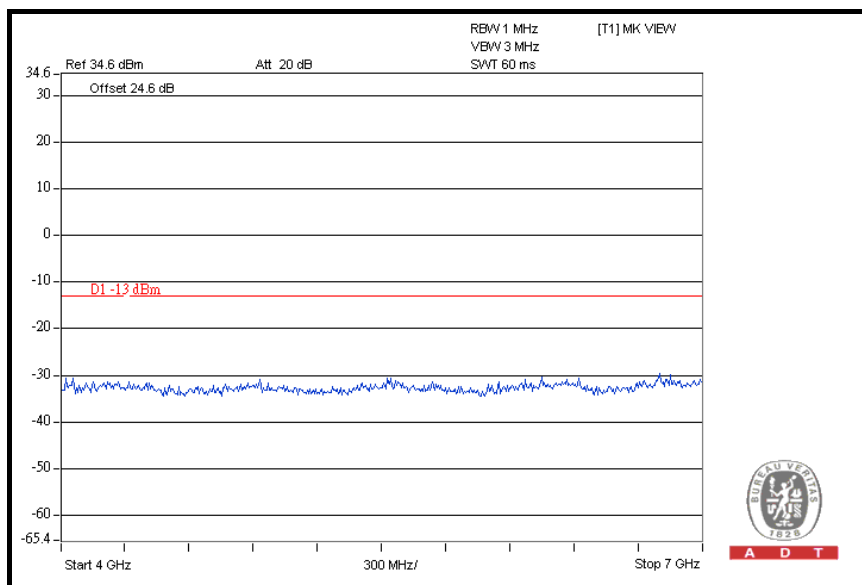


7GHz ~ 9GHz

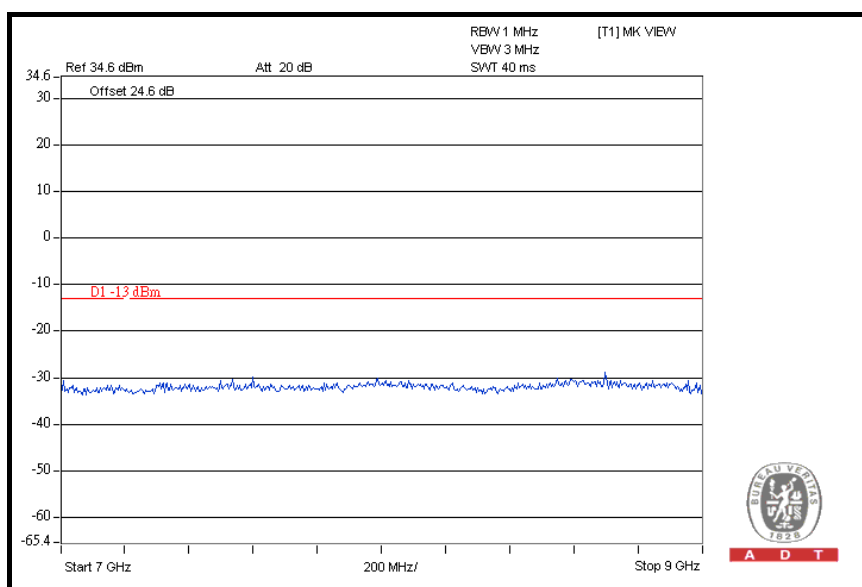


CH 4233: 9kHz ~ 1GHz

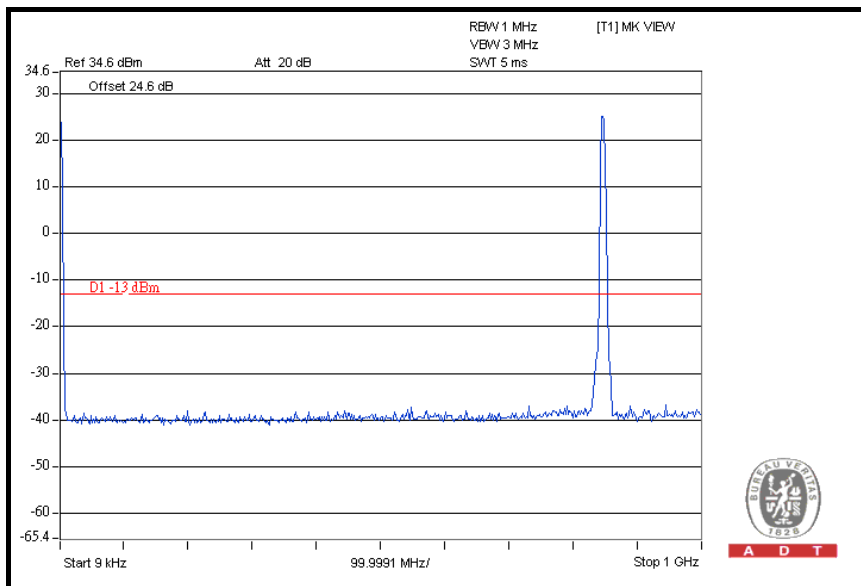


1GHz ~ 4GHz

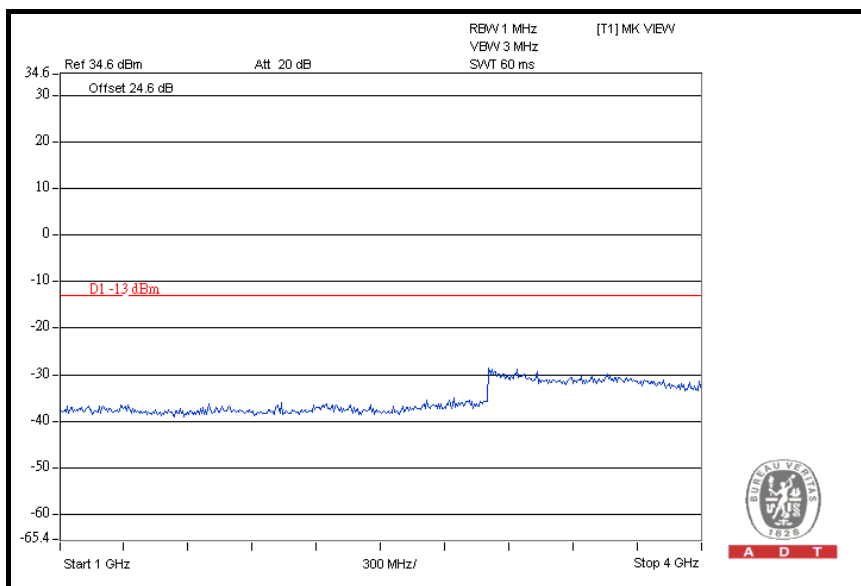

4GHz ~ 7GHz

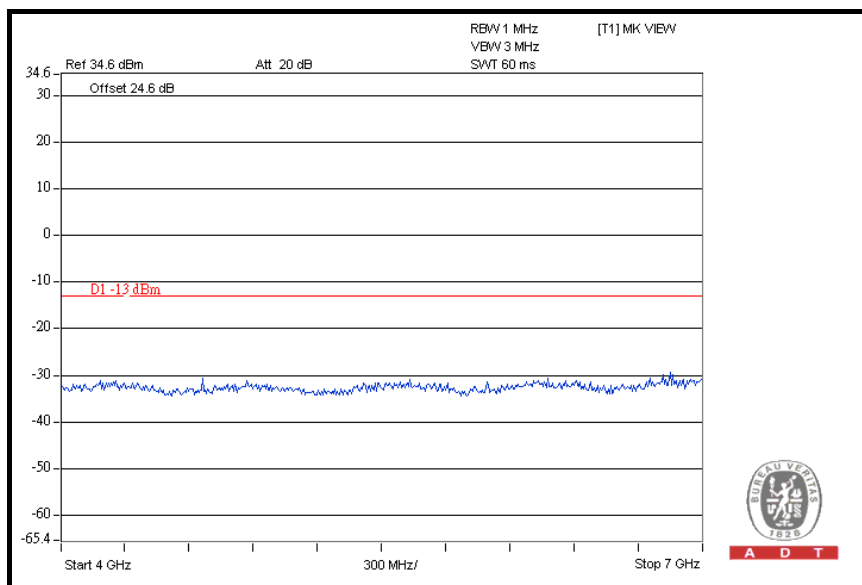

7GHz ~ 9GHz

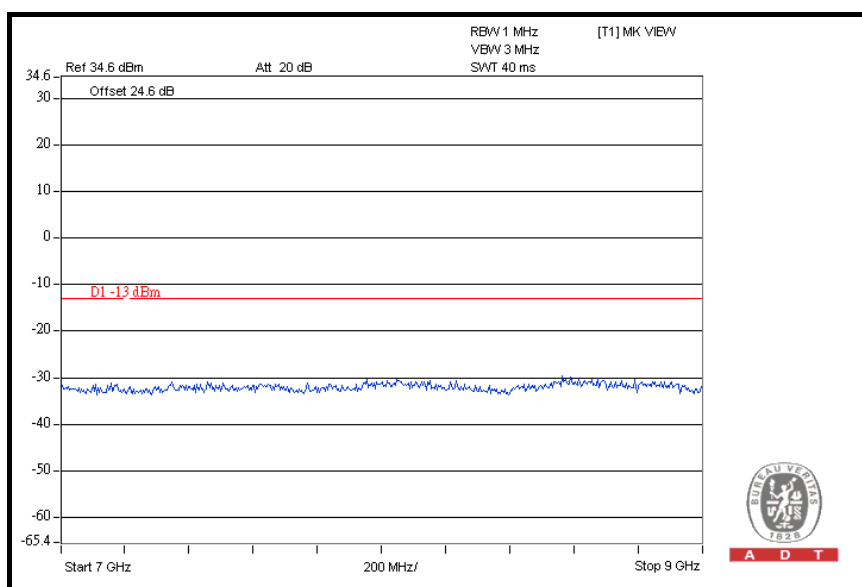

4.6 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission limit equal to -13dBm . So the limit of emission is the same absolute specified line.

LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBuV/m) (NOTE)
-13	82.2

NOTE: The following formula is used to convert the equipment radiated power to field strength.

$$E = [1000000\sqrt{(30P)}] / 3 \text{ uV/m, where P is Watts.}$$

4.6.2 TEST INSTRUMENTS

Same as 4.1.2.

4.6.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

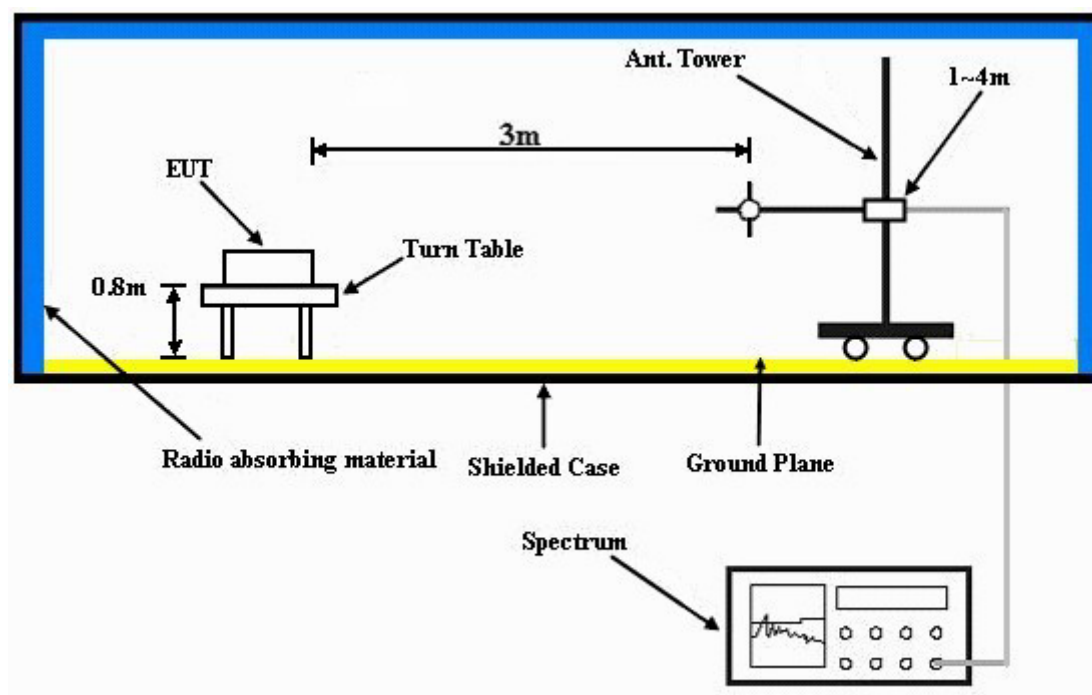

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.6 EUT OPERATING CONDITIONS

- The EUT makes a call to the communication simulator.
- The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

4.6.7 TEST RESULTS

FOR GSM:

X-AXIS

MODE		TX channel 190				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	82.48	41.5	-13.0	-44.9	-7.7	-52.6
2	142.75	36.8	-13.0	-50.6	-7.7	-58.3
3	177.74	30.7	-13.0	-56.4	-7.7	-64.1
4	259.38	42.6	-13.0	-44.1	-7.7	-51.8
5	397.39	47.2	-13.0	-39.6	-7.8	-47.4
6	539.30	37.1	-13.0	-49.3	-7.8	-57.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	47.49	43.4	-13.0	-43.8	-7.7	-51.5
2	82.48	37.6	-13.0	-49.1	-7.7	-56.8
3	125.25	31.2	-13.0	-55.7	-7.7	-63.4
4	185.51	35.1	-13.0	-52.0	-7.7	-59.7
5	259.38	34.6	-13.0	-52.3	-7.7	-60.0
6	383.79	47.3	-13.0	-39.6	-7.8	-47.4

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Y-AXIS

MODE		TX channel 190				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	82.48	41.2	-13.0	-45.6	-7.7	-53.3
2	204.95	32.9	-13.0	-53.9	-7.7	-61.6
3	263.27	42.6	-13.0	-43.8	-7.7	-51.5
4	389.62	47.3	-13.0	-39.5	-7.8	-47.3
5	523.75	37.0	-13.0	-49.6	-7.8	-57.4
6	673.43	37.9	-13.0	-48.5	-7.8	-56.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	37.78	43.8	-13.0	-42.9	-7.7	-50.6
2	47.49	43.3	-13.0	-43.2	-7.7	-50.9
3	82.48	36.8	-13.0	-50.1	-7.7	-57.8
4	255.49	34.2	-13.0	-52.2	-7.7	-59.9
5	391.56	48.7	-13.0	-38.2	-7.8	-46.0
6	543.19	37.5	-13.0	-49.5	-7.8	-57.3

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Z-AXIS

MODE		TX channel 190				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	39.72	35.8	-13.0	-50.6	-7.7	-58.3
2	86.37	41.0	-13.0	-45.8	-7.7	-53.5
3	148.58	35.9	-13.0	-50.6	-7.7	-58.3
4	261.32	42.5	-13.0	-44.4	-7.7	-52.1
5	393.51	47.5	-13.0	-39.5	-7.8	-47.3
6	541.24	37.1	-13.0	-49.2	-7.8	-57.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	37.78	45.5	-13.0	-41.5	-7.7	-49.2
2	68.88	40.1	-13.0	-46.4	-7.7	-54.1
3	84.43	36.4	-13.0	-50.0	-7.7	-57.7
4	255.49	34.2	-13.0	-53.0	-7.7	-60.7
5	389.62	47.8	-13.0	-39.0	-7.8	-46.8
6	545.13	37.8	-13.0	-48.7	-7.8	-56.5

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

FOR WCDMA-RMC:

X-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	82.48	37.6	-13.0	-49.3	-7.7	-57.0
2	179.68	30.4	-13.0	-56.3	-7.7	-64.0
3	204.95	36.2	-13.0	-50.3	-7.7	-58.0
4	265.21	41.5	-13.0	-45.2	-7.7	-52.9
5	389.62	47.6	-13.0	-38.8	-7.8	-46.6
6	533.47	34.1	-13.0	-52.5	-7.8	-60.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	47.49	43.6	-13.0	-43.1	-7.7	-50.8
2	82.48	34.9	-13.0	-51.8	-7.7	-59.5
3	123.31	28.7	-13.0	-57.6	-7.7	-65.3
4	261.32	33.4	-13.0	-53.8	-7.7	-61.5
5	393.51	48.1	-13.0	-38.0	-7.8	-45.8
6	531.52	37.6	-13.0	-48.7	-7.8	-56.5

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Y-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	82.48	37.7	-13.0	-49.2	-7.7	-56.9
2	175.79	31.9	-13.0	-55.6	-7.7	-63.3
3	263.27	41.6	-13.0	-45.7	-7.7	-53.4
4	395.45	47.8	-13.0	-38.9	-7.8	-46.7
5	537.35	34.7	-13.0	-52.0	-7.8	-59.8
6	681.20	37.0	-13.0	-49.3	-7.8	-57.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	49.44	43.4	-13.0	-43.2	-7.7	-50.9
2	82.48	35.2	-13.0	-51.6	-7.7	-59.3
3	152.46	29.3	-13.0	-57.6	-7.7	-65.3
4	265.21	32.8	-13.0	-53.5	-7.7	-61.2
5	395.45	47.9	-13.0	-38.6	-7.8	-46.4
6	535.41	37.4	-13.0	-48.9	-7.8	-56.7

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

Z-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	82.48	37.7	-13.0	-48.7	-7.7	-56.4
2	181.62	30.8	-13.0	-55.5	-7.7	-63.2
3	263.27	42.9	-13.0	-43.6	-7.7	-51.3
4	391.56	48.4	-13.0	-38.6	-7.8	-46.4
5	539.30	37.8	-13.0	-49.4	-7.8	-57.2
6	683.15	37.5	-13.0	-49.4	-7.8	-57.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	47.49	43.6	-13.0	-43.4	-7.7	-51.1
2	125.25	29.9	-13.0	-56.4	-7.7	-64.1
3	267.15	33.0	-13.0	-54.3	-7.7	-62.0
4	391.56	48.5	-13.0	-38.5	-7.8	-46.3
5	436.27	46.5	-13.0	-39.9	-7.8	-47.7
6	543.19	38.5	-13.0	-47.6	-7.8	-55.4

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

FOR HSDPA:

X-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	41.66	27.3	-13.0	-59.1	-7.7	-66.8
2	142.75	30.2	-13.0	-56.5	-7.7	-64.2
3	265.21	38.3	-13.0	-48.4	-7.7	-56.1
4	344.91	40.8	-13.0	-46.2	-7.8	-54.0
5	424.61	42.2	-13.0	-44.5	-7.8	-52.3
6	714.25	33.0	-13.0	-53.2	-7.9	-61.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	39.72	34.3	-13.0	-52.3	-7.7	-60.0
2	99.98	28.5	-13.0	-58.3	-7.7	-66.0
3	150.52	37.4	-13.0	-49.8	-7.7	-57.5
4	278.82	31.8	-13.0	-54.8	-7.7	-62.5
5	414.89	39.4	-13.0	-47.1	-7.8	-54.9
6	492.65	37.4	-13.0	-49.4	-7.8	-57.2

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Y-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	41.66	28.5	-13.0	-58.1	-7.7	-65.8
2	80.54	27.7	-13.0	-59.3	-7.7	-67.0
3	144.69	32.0	-13.0	-54.8	-7.7	-62.5
4	263.27	37.7	-13.0	-48.7	-7.7	-56.4
5	350.74	41.7	-13.0	-44.7	-7.8	-52.5
6	416.83	41.6	-13.0	-45.1	-7.8	-52.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	39.72	33.9	-13.0	-52.4	-7.7	-60.1
2	99.98	31.3	-13.0	-55.4	-7.7	-63.1
3	263.27	29.2	-13.0	-56.9	-7.7	-64.6
4	360.46	35.8	-13.0	-50.6	-7.8	-58.4
5	411.00	41.2	-13.0	-45.6	-7.8	-53.4
6	508.20	38.9	-13.0	-48.0	-7.8	-55.8

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

Z-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	80.54	27.3	-13.0	-59.7	-7.7	-67.4
2	144.69	31.5	-13.0	-55.4	-7.7	-63.1
3	263.27	37.7	-13.0	-48.6	-7.7	-56.3
4	352.69	40.7	-13.0	-45.3	-7.8	-53.1
5	411.00	42.5	-13.0	-44.3	-7.8	-52.1
6	611.22	31.1	-13.0	-55.3	-7.8	-63.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	41.66	33.8	-13.0	-53.0	-7.7	-60.7
2	70.82	31.7	-13.0	-55.3	-7.7	-63.0
3	265.21	28.8	-13.0	-57.9	-7.7	-65.6
4	352.69	34.4	-13.0	-52.3	-7.8	-60.1
5	411.00	40.7	-13.0	-45.9	-7.8	-53.7
6	479.04	38.1	-13.0	-48.5	-7.8	-56.3

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

FOR HSUPA:

X-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	80.54	29.9	-13.0	-56.8	-7.7	-64.5
2	171.90	29.2	-13.0	-57.7	-7.7	-65.4
3	269.10	36.7	-13.0	-49.8	-7.7	-57.5
4	354.63	42.5	-13.0	-44.5	-7.8	-52.3
5	426.55	42.1	-13.0	-44.1	-7.8	-51.9
6	638.44	32.5	-13.0	-54.2	-7.8	-62.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	43.61	35.5	-13.0	-51.3	-7.7	-59.0
2	113.59	27.8	-13.0	-59.1	-7.7	-66.8
3	269.10	29.2	-13.0	-57.7	-7.7	-65.4
4	354.63	38.3	-13.0	-48.5	-7.8	-56.3
5	411.00	42.0	-13.0	-44.5	-7.8	-52.3
6	492.65	41.7	-13.0	-44.8	-7.8	-52.6

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Y-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	39.72	29.1	-13.0	-57.0	-7.7	-64.7
2	84.43	27.7	-13.0	-59.4	-7.7	-67.1
3	152.46	35.5	-13.0	-51.4	-7.7	-59.1
4	269.10	36.9	-13.0	-49.5	-7.7	-57.2
5	350.74	41.8	-13.0	-45.0	-7.8	-52.8
6	412.95	42.8	-13.0	-43.9	-7.8	-51.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	39.72	37.9	-13.0	-48.8	-7.7	-56.5
2	113.59	29.5	-13.0	-57.2	-7.7	-64.9
3	263.27	28.0	-13.0	-58.8	-7.7	-66.5
4	350.74	39.4	-13.0	-47.3	-7.8	-55.1
5	411.00	41.1	-13.0	-45.1	-7.8	-52.9
6	494.59	39.7	-13.0	-46.4	-7.8	-54.2

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

Z-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	41.66	29.7	-13.0	-57.4	-7.7	-65.1
2	148.58	39.4	-13.0	-46.9	-7.7	-54.6
3	267.15	36.6	-13.0	-50.5	-7.7	-58.2
4	350.74	42.5	-13.0	-43.9	-7.8	-51.7
5	418.78	42.2	-13.0	-44.1	-7.8	-51.9
6	498.48	35.5	-13.0	-51.2	-7.8	-59.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	41.66	33.1	-13.0	-53.5	-7.7	-61.2
2	140.8	26.9	-13.0	-59.8	-7.7	-67.5
3	263.27	27.8	-13.0	-58.4	-7.7	-66.1
4	364.35	34.6	-13.0	-52.2	-7.8	-60.0
5	418.78	37.8	-13.0	-49.0	-7.8	-56.8
6	473.21	36.0	-13.0	-50.4	-7.8	-58.2

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

4.7 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 22.917 (a), On any frequency outside a licensee's frequency block within GPRS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The emission limit equal to -13dBm .

4.7.2 TEST INSTRUMENTS

Same as 4.1.2.

4.7.3 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The " Read Value " is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to " Read Value " of step a. Record the power level of S.G
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

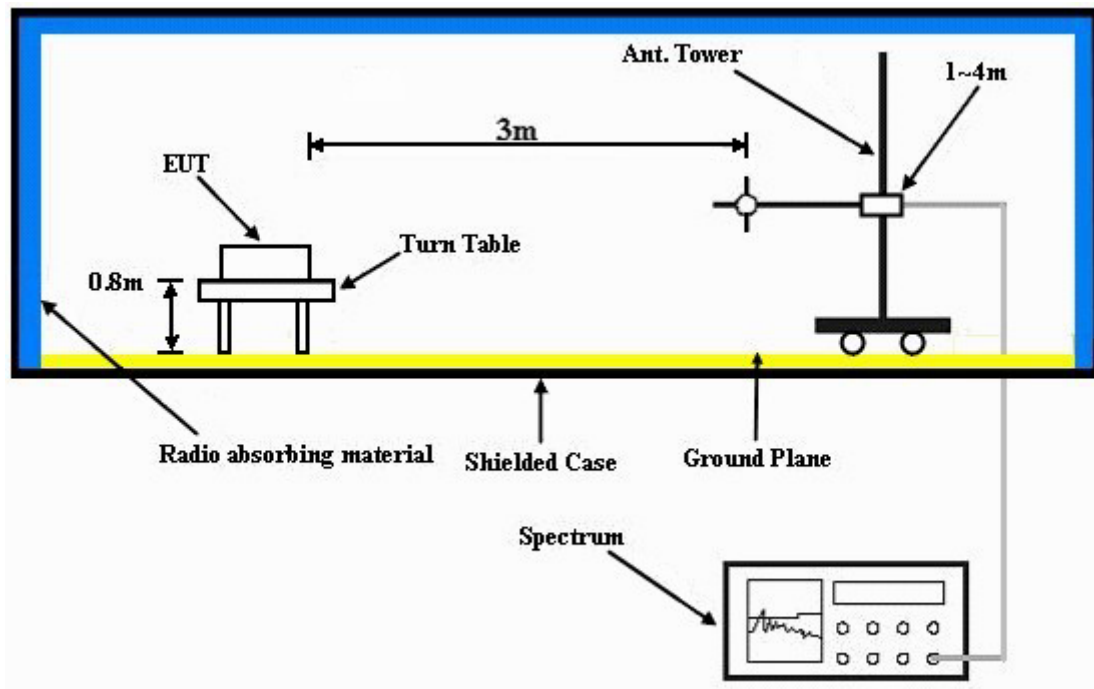

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.6 EUT OPERATING CONDITIONS

- The EUT makes a call to the communication simulator.
- The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

4.7.7 TEST RESULTS

FOR GSM BAND:

X-AXIS

MODE		TX channel 128				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1648.4	42.8	-13.0	-59.2	7.6	-51.6
2	2472.6	59.3	-13.0	-43.6	8.4	-35.2
3	3296.8	43.7	-13.0	-60.8	9.9	-50.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1648.4	43.2	-13.0	-58.8	7.6	-51.2
2	2472.6	48.0	-13.0	-54.9	8.4	-46.5
3	3296.8	43.1	-13.0	-61.4	9.9	-51.5
MODE		TX channel 190				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	41.0	-13.0	-61.2	7.7	-53.5
2	2509.8	59.5	-13.0	-43.3	8.4	-34.9
3	3346.4	43.8	-13.0	-60.7	9.9	-50.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	41.5	-13.0	-60.7	7.7	-53.0
2	2509.8	50.1	-13.0	-52.7	8.4	-44.3
3	3346.4	42.7	-13.0	-61.8	9.9	-51.9
MODE		TX channel 251				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1697.6	42.0	-13.0	-60.5	7.9	-52.6
2	2546.4	57.8	-13.0	-45.1	8.5	-36.6
3	3395.2	42.9	-13.0	-61.5	9.9	-51.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1697.6	41.2	-13.0	-61.3	7.9	-53.4
2	2546.4	49.6	-13.0	-53.3	8.5	-44.8
3	3395.2	43.2	-13.0	-61.2	9.9	-51.3

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Y-AXIS

MODE		TX channel 128				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1648.4	43.0	-13.0	-59.0	7.6	-51.4
2	2472.6	49.4	-13.0	-53.5	8.4	-45.1
3	3296.8	43.6	-13.0	-60.9	9.9	-51.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1648.4	45.3	-13.0	-56.7	7.6	-49.1
2	2472.6	57.2	-13.0	-45.7	8.4	-37.3
3	3296.8	43.2	-13.0	-61.3	9.9	-51.4
MODE		TX channel 190				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	41.3	-13.0	-60.9	7.7	-53.2
2	2509.8	51.0	-13.0	-51.8	8.4	-43.4
3	3346.4	43.9	-13.0	-60.6	9.9	-50.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	46.7	-13.0	-55.5	7.7	-47.8
2	2509.8	58.4	-13.0	-44.4	8.4	-36.0
3	3346.4	43.3	-13.0	-61.2	9.9	-51.3
MODE		TX channel 251				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1697.6	39.2	-13.0	-63.3	7.9	-55.4
2	2546.4	52.7	-13.0	-50.2	8.5	-41.7
3	3395.2	43.0	-13.0	-61.4	9.9	-51.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1697.6	43.7	-13.0	-58.8	7.9	-50.9
2	2546.4	57.6	-13.0	-45.3	8.5	-36.8
3	3395.2	45.0	-13.0	-59.4	9.9	-49.5

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Z-AXIS

MODE		TX channel 128				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1648.4	46.7	-13.0	-55.3	7.6	-47.7
2	2472.6	57.9	-13.0	-45.0	8.4	-36.6
3	3296.8	43.6	-13.0	-60.9	9.9	-51.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1648.4	52.2	-13.0	-49.8	7.6	-42.2
2	2472.6	53.2	-13.0	-49.7	8.4	-41.3
3	3296.8	45.6	-13.0	-58.9	9.9	-49.0
MODE		TX channel 190				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	45.4	-13.0	-56.8	7.7	-49.1
2	2509.8	56.8	-13.0	-46.0	8.4	-37.6
3	3346.4	42.8	-13.0	-61.7	9.9	-51.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	48.7	-13.0	-53.5	7.7	-45.8
2	2509.8	51.3	-13.0	-51.5	8.4	-43.1
3	3346.4	43.6	-13.0	-60.9	9.9	-51.0
MODE		TX channel 251				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1697.6	41.5	-13.0	-61.0	7.9	-53.1
2	2546.4	55.6	-13.0	-47.3	8.5	-38.8
3	3395.2	43.8	-13.0	-60.6	9.9	-50.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1697.6	46.8	-13.0	-55.7	7.9	-47.8
2	2546.4	47.6	-13.0	-55.3	8.5	-46.8
3	3395.2	43.4	-13.0	-61.0	9.9	-51.1

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

FOR WCDMA BAND:

X-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1652.8	40.4	-13.0	-61.6	7.6	-54.0
2	2479.2	41.2	-13.0	-61.7	8.4	-53.3
3	3305.6	44.4	-13.0	-60.1	9.9	-50.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1652.8	40.0	-13.0	-62.0	7.6	-54.4
2	2479.2	40.9	-13.0	-62.0	8.4	-53.6
3	3305.6	44.4	-13.0	-60.1	9.9	-50.2
MODE		TX channel 4182				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	39.5	-13.0	-62.7	7.7	-55.0
2	2509.8	43.5	-13.0	-59.3	8.4	-50.9
3	3346.4	44.1	-13.0	-60.4	9.9	-50.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	38.6	-13.0	-63.6	7.7	-55.9
2	2509.8	41.0	-13.0	-61.8	8.4	-53.4
3	3346.4	44.6	-13.0	-59.9	9.9	-50.0
MODE		TX channel 4233				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1693.2	39.5	-13.0	-63.0	7.9	-55.1
2	2539.8	44.7	-13.0	-58.2	8.5	-49.7
3	3386.4	43.4	-13.0	-61.0	9.9	-51.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1693.2	39.7	-13.0	-62.8	7.9	-54.9
2	2539.8	41.2	-13.0	-61.7	8.5	-53.2
3	3386.4	43.9	-13.0	-60.5	9.9	-50.6

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Y-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1652.8	39.7	-13.0	-62.3	7.6	-54.7
2	2479.2	41.5	-13.0	-61.4	8.4	-53.0
3	3305.6	44.2	-13.0	-60.3	9.9	-50.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1652.8	39.4	-13.0	-62.6	7.6	-55.0
2	2479.2	41.3	-13.0	-61.6	8.4	-53.2
3	3305.6	43.3	-13.0	-61.2	9.9	-51.3
MODE		TX channel 4182				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	40.3	-13.0	-61.9	7.7	-54.2
2	2509.8	41.2	-13.0	-61.6	8.4	-53.2
3	3346.4	44.0	-13.0	-60.5	9.9	-50.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	40.5	-13.0	-61.7	7.7	-54.0
2	2509.8	42.0	-13.0	-60.8	8.4	-52.4
3	3346.4	43.1	-13.0	-61.4	9.9	-51.5
MODE		TX channel 4233				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1693.2	39.6	-13.0	-62.9	7.9	-55.0
2	2539.8	45.4	-13.0	-57.5	8.5	-49.0
3	3386.4	44.1	-13.0	-60.3	9.9	-50.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1693.2	39.4	-13.0	-63.1	7.9	-55.2
2	2539.8	42.2	-13.0	-60.7	8.5	-52.2
3	3386.4	43.8	-13.0	-60.6	9.9	-50.7

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

Z-AXIS

MODE		TX channel 4132				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1652.8	38.2	-13.0	-63.8	7.6	-56.2
2	2479.2	42.4	-13.0	-60.5	8.4	-52.1
3	3305.6	44.5	-13.0	-60.0	9.9	-50.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1652.8	39.8	-13.0	-62.2	7.6	-54.6
2	2479.2	41.3	-13.0	-61.6	8.4	-53.2
3	3305.6	44.8	-13.0	-59.7	9.9	-49.8
MODE		TX channel 4182				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	40.0	-13.0	-62.2	7.7	-54.5
2	2509.8	42.4	-13.0	-60.4	8.4	-52.0
3	3346.4	44.0	-13.0	-60.5	9.9	-50.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1673.2	41.2	-13.0	-61.0	7.7	-53.3
2	2509.8	41.4	-13.0	-61.4	8.4	-53.0
3	3346.4	44.0	-13.0	-60.5	9.9	-50.6
MODE		TX channel 4233				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1693.2	39.6	-13.0	-62.9	7.9	-55.0
2	2539.8	44.1	-13.0	-58.8	8.5	-50.3
3	3386.4	44.3	-13.0	-60.1	9.9	-50.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	1693.2	39.4	-13.0	-63.1	7.9	-55.2
2	2539.8	40.9	-13.0	-62.0	8.5	-53.5
3	3386.4	44.8	-13.0	-59.6	9.9	-49.7

NOTE: Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---