



FCC TEST REPORT (BLUETOOTH LE 4.0)

REPORT NO.: RF120502C13-4

MODEL NO.: F-12D

FCC ID: VQK-F12D

RECEIVED: May 02, 2012

TESTED: May 28 ~ May 29, 2012

ISSUED: Jun. 01, 2012

APPLICANT: FUJITSU LIMITED

ADDRESS: 1-1, Kamikodanaka 4-chome, Nakahara-ku,
Kawasaki 211-8588, Japan

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New
Taipei City, Taiwan (R.O.C.)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES.....	8
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3 DESCRIPTION OF SUPPORT UNITS	11
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	11
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
4. TEST TYPES AND RESULTS	12
4.1 RADIATED EMISSION AND BANDEdge MEASUREMENT.....	12
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEdge MEASUREMENT	12
4.1.2 TEST INSTRUMENTS	13
4.1.3 TEST PROCEDURES	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	15
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 CONDUCTED EMISSION MEASUREMENT	24
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	24
4.2.2 TEST INSTRUMENTS	24
4.2.3 TEST PROCEDURES	25
4.2.4 DEVIATION FROM TEST STANDARD	25
4.2.5 TEST SETUP	26
4.2.6 EUT OPERATING CONDITIONS	26
4.2.7 TEST RESULTS	27
4.3 6dB BANDWIDTH MEASUREMENT	29
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	29
4.3.2 TEST SETUP	29
4.3.3 TEST INSTRUMENTS	29
4.3.4 TEST PROCEDURE	29
4.3.5 DEVIATION FROM TEST STANDARD	29
4.3.6 EUT OPERATING CONDITIONS	29
4.3.7 TEST RESULTS	30
4.4 CONDUCTED OUTPUT POWER	31
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	31
4.4.2 TEST SETUP	31
4.4.3 TEST INSTRUMENTS	31
4.4.4 TEST PROCEDURES	31
4.4.5 DEVIATION FROM TEST STANDARD	31
4.4.6 EUT OPERATING CONDITIONS	31
4.4.7 TEST RESULTS	31
4.5 POWER SPECTRAL DENSITY MEASUREMENT.....	32
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	32
4.5.2 TEST SETUP	32
4.5.3 TEST INSTRUMENTS	32
4.5.4 TEST PROCEDURE	32
4.5.5 DEVIATION FROM TEST STANDARD	32



A D T

4.5.6	EUT OPERATING CONDITION	32
4.5.7	TEST RESULTS	32
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	33
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	33
4.6.2	TEST SETUP	33
4.6.3	TEST INSTRUMENTS	33
4.6.4	TEST PROCEDURE	33
4.6.5	DEVIATION FROM TEST STANDARD	34
4.6.6	EUT OPERATING CONDITION	34
4.6.7	TEST RESULTS	34
4.6.8	TEST RESULTS	35
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	36
6.	INFORMATION ON THE TESTING LABORATORIES	37
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	38



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120502C13-4	Original release	Jun. 01, 2012



A D T

1. CERTIFICATION

PRODUCT: Mobile Phone

MODEL NO.: F-12D

BRAND: FOMA

APPLICANT: FUJITSU LIMITED

TESTED: May 28 ~ May 29, 2012

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10-2009

The above equipment (model: F-12D) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : , DATE : Jun. 01, 2012

Pettie Chen / Specialist

APPROVED BY : , DATE : Jun. 01, 2012

Gary Chang / Technical Manager



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -17.85dB at 1.92188MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -6.75dB at 2483.5MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Mobile Phone
MODEL NO.	F-12D
POWER SUPPLY	5.4Vdc (adapter) 3.7Vdc (Li-ion battery)
MODULATION TYPE	GFSK
TRANSFER RATE	1Mbps
OPERATING FREQUENCY	2402 ~ 2480MHz
NUMBER OF CHANNEL	40
CHANNEL SPACING	2MHz
OUTPUT POWER	0.002W
ANTENNA TYPE	$\lambda/4$ Monopole antenna with -6.72dBi gain
ANTENNA CONNECTOR	NA
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Battery

NOTE:

1. The EUT consumes power from the following internal Li-ion battery and wireless charger.

BATTERY	
BRAND	Fujitsu Limited
MODEL	F25
RATING	3.7Vdc, 1800mAh, 6.7Wh

2. The following accessory is for support units only.

PRODUCT	BRAND	MODEL	DESCRIPTION
Adapter	SMK	NA	I/P: 100-240Vac, 50-60Hz, 0.12A O/P: 5.4Vdc, 700mA

3. SW version is R09.4e.
4. HW version is V1.3.0.
5. IMEI Code: 352179050012828, 352179050012810
6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

40 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Y-plane.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1.0

BANDEdge MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 39	GFSK	1.0



A D T

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu
PLC	25deg. C, 65%RH	120Vac, 60Hz	David Huang
APCM	25deg. C, 65%RH	120Vac, 60Hz	Phoenix Chen

3.3 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	EARPHONE	HTC	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.2m audio cable.

NOTE: All power cords of the above support units are non shielded (1.8m).

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

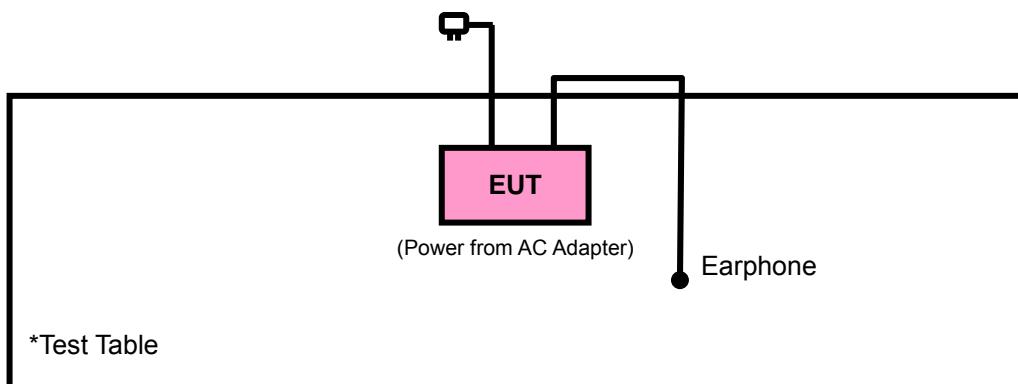

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver Agilent	N9038A	MY51210203	Dec. 22, 2011	Dec. 21, 2012
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 21, 2011	Dec. 20, 2012
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 20, 2011	Dec. 19, 2012
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier EMCI	EMC 012645	980115	Dec. 30, 2011	Dec. 29, 2012
Preamplifier EMCI	EMC 330H	980112	Dec. 30, 2011	Dec. 29, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 21, 2011	Oct. 20, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Jan. 02, 2012	Jan. 01, 2013
RF signal cable Worken	RG-213	NA	Jan. 02, 2012	Jan. 01, 2013
Software	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

NOTE:

1. The calibration interval of the above test instruments except loop antenna is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The calibration interval of loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in HwaYa Chamber 9.
4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
5. The FCC Site Registration No. is 460141.
6. The IC Site Registration No. is IC 7450F-4.



A D T

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

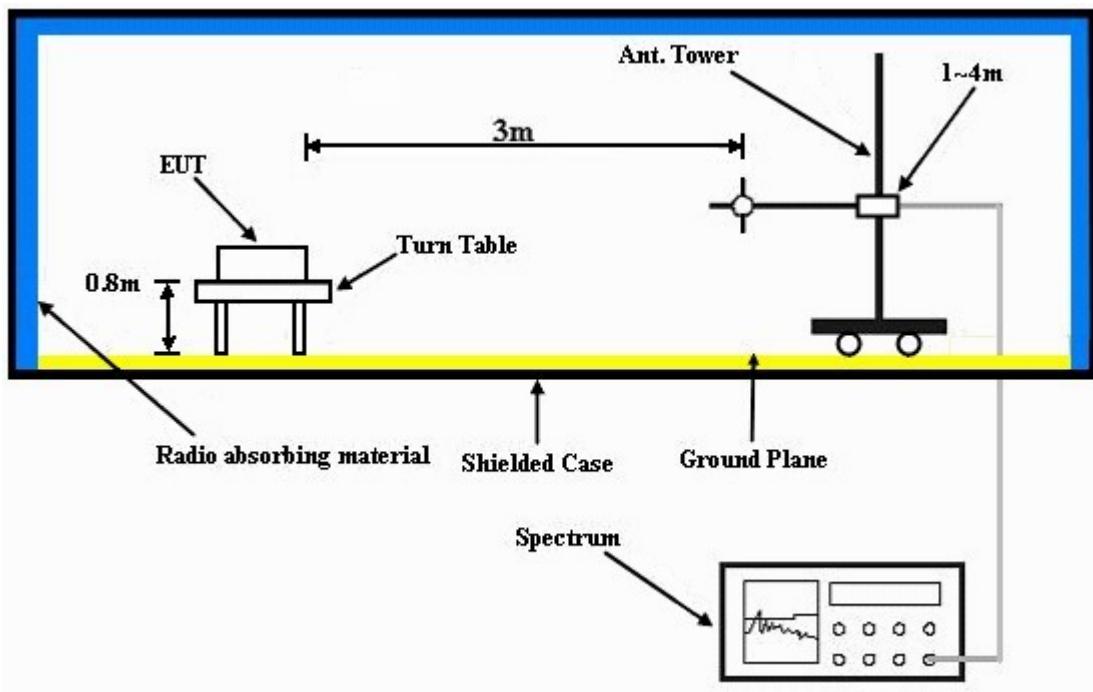

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.



A D T

4.1.7 TEST RESULTS


ABOVE 1GHz WORST-CASE DATA :



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

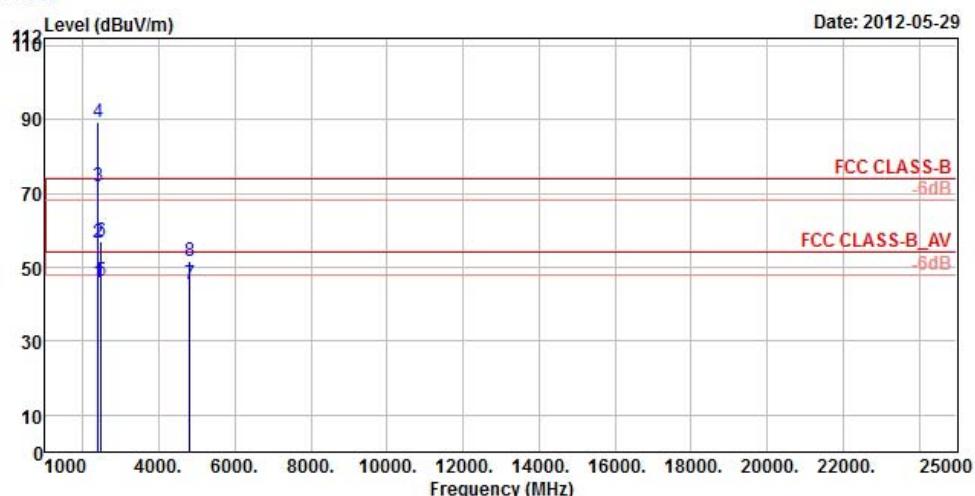

Site : 966 Chamber 5
Condition : FCC CLASS-B 3m ANT_18G~40G_HF HORIZONTAL
Brand/Model: F-12D
Remark : BT 4.0 TX CH00
Tested by : Kay Wu
Temprature : 25°C
Humidity : 65%
Plane : Y

Freq	Level	Read	Limit	Over	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		Level	Line	Limit	Factor	Loss	Factor	cm	deg	
MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	45.80	51.19	54.00	-8.20	27.26	4.87	37.52	136	140 Average
2	2390.00	56.55	61.94	74.00	-17.45	27.26	4.87	37.52	136	140 Peak
3 pp	2402.00	71.92	77.31			27.26	4.87	37.52	136	140 Average
4 pk	2402.00	89.29	94.68			27.26	4.87	37.52	136	140 Peak
5	2483.50	46.16	51.06	54.00	-7.84	27.50	4.92	37.32	136	140 Average
6	2483.50	57.10	62.00	74.00	-16.90	27.50	4.92	37.32	136	140 Peak
7	4804.00	45.45	59.48	54.00	-8.55	31.38	7.69	53.10	137	335 Average
8	4804.00	51.64	65.67	74.00	-22.36	31.38	7.69	53.10	137	335 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

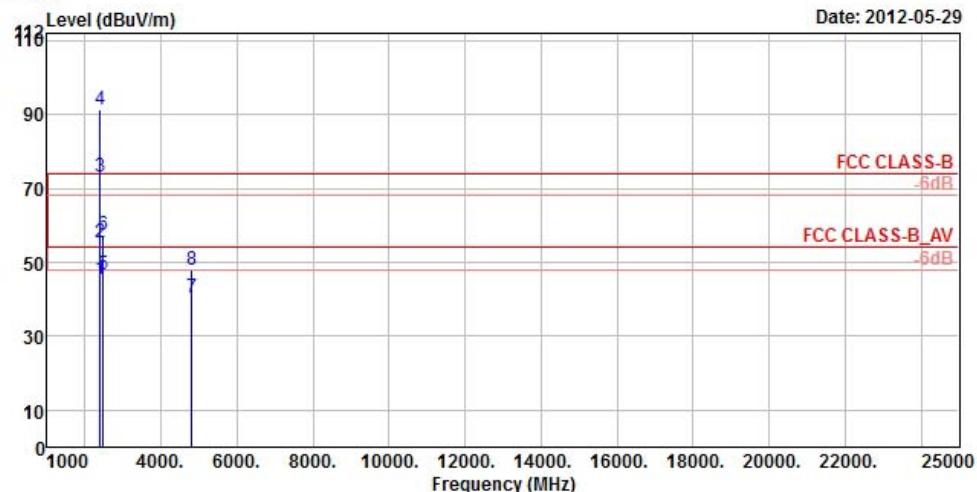

Site : 966 Chamber 5

Condition : FCC CLASS-B 3m ANT_18G~40G_HF VERTICAL

Brand/Model: F-12D

Remark : BT 4.0 TX CH00

Tested by : Kay Wu

Temprature : 25°C

Humidity : 65%

Plane : Y

Freq	Level	Read	Limit	Over	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		MHz	dBuV/m	dBuV	Line	Limit Factor	dB/m	dB	cm	
1	2390.00	45.44	50.83	54.00	-8.56	27.26	4.87	37.52	130	160 Average
2	2390.00	55.35	60.74	74.00	-18.65	27.26	4.87	37.52	130	160 Peak
3 pp	2402.00	73.31	78.70			27.26	4.87	37.52	130	160 Average
4 pk	2402.00	91.43	96.82			27.26	4.87	37.52	130	160 Peak
5	2483.50	46.58	51.48	54.00	-7.42	27.50	4.92	37.32	130	160 Average
6	2483.50	57.50	62.40	74.00	-16.50	27.50	4.92	37.32	130	160 Peak
7	4804.00	40.53	54.56	54.00	-13.47	31.38	7.69	53.10	100	154 Average
8	4804.00	47.94	61.97	74.00	-26.06	31.38	7.69	53.10	100	154 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

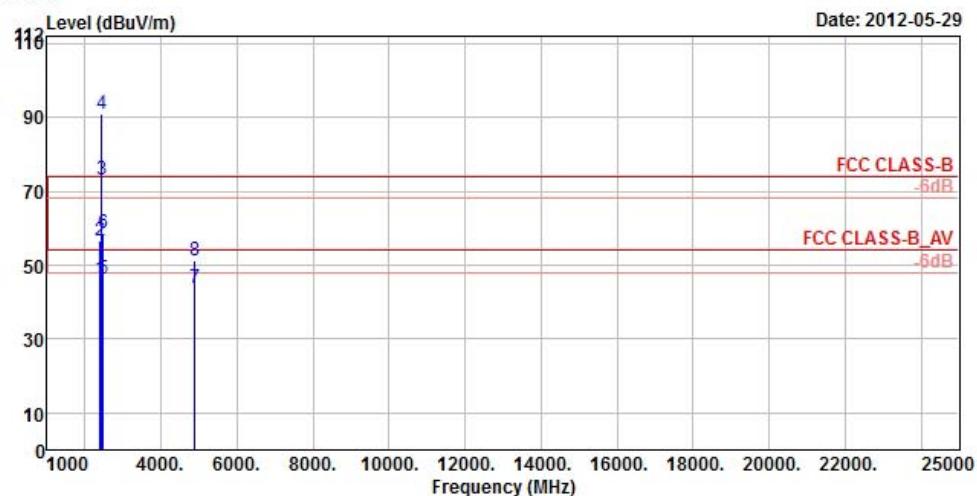

Site : 966 Chamber 5
Condition : FCC CLASS-B 3m ANT_18G~40G_HF HORIZONTAL
Brand/Model: F-12D
Remark : BT 4.0 TX CH19
Tested by : Kay Wu
Temprature : 25°C
Humidity : 65%
Plane : Y

Freq	Level	Read	Limit	Over	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		Level	Line	Limit	Factor	Loss	Factor	cm	deg	
MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	46.34	51.73	54.00	-7.66	27.26	4.87	37.52	100	225 Average
2	2390.00	56.69	62.08	74.00	-17.31	27.26	4.87	37.52	100	225 Peak
3 pp	2440.00	73.06	78.14			27.40	4.91	37.39	100	225 Average
4 pk	2440.00	90.72	95.80			27.40	4.91	37.39	100	225 Peak
5	2483.50	46.10	51.00	54.00	-7.90	27.50	4.92	37.32	100	225 Average
6	2483.50	58.66	63.56	74.00	-15.34	27.50	4.92	37.32	100	225 Peak
7	4880.00	43.77	57.57	54.00	-10.23	31.53	7.72	53.05	100	360 Average
8	4880.00	51.12	64.92	74.00	-22.88	31.53	7.72	53.05	100	360 Peak




A D T



A D T

Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

Data: 20

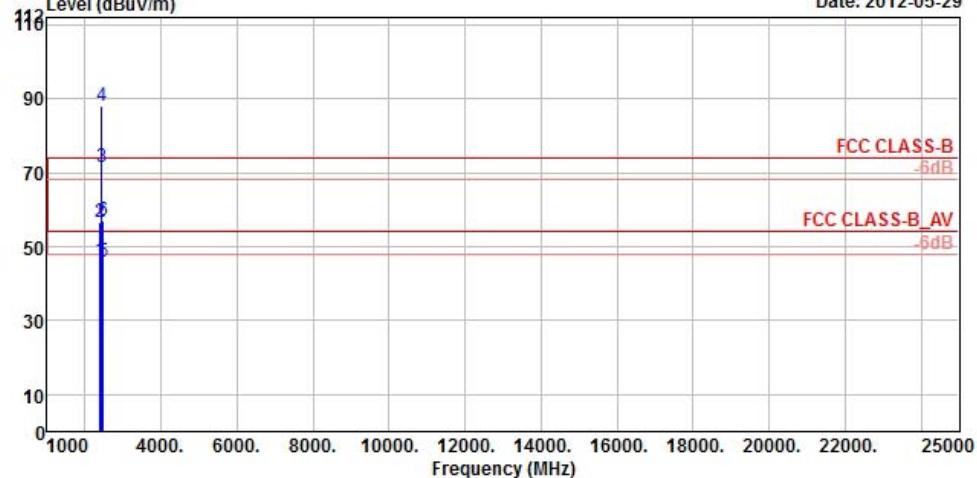

Site : 966 Chamber 5

Condition : FCC CLASS-B 3m ANT_18G~40G_HF VERTICAL

Brand/Model: F-12D

Remark : BT 4.0 TX CH19

Tested by : Kay Wu

Temprature : 25°C

Humidity : 65%

Plane : Y

Freq	Level	Read	Limit	Over	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		MHz	dBuV/m	dBuV	Line	Limit Factor	dB/m	dB	cm	
1	2390.00	46.33	51.72	54.00	-7.67	27.26	4.87	37.52	116	4 Average
2	2390.00	56.49	61.88	74.00	-17.51	27.26	4.87	37.52	116	4 Peak
3 pp	2440.00	71.51	76.68			27.40	4.89	37.46	116	4 Average
4 pk	2440.00	88.18	93.35			27.40	4.89	37.46	116	4 Peak
5	2483.50	45.68	50.58	54.00	-8.32	27.50	4.92	37.32	116	4 Average
6	2483.50	57.11	62.01	74.00	-16.89	27.50	4.92	37.32	116	4 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 19

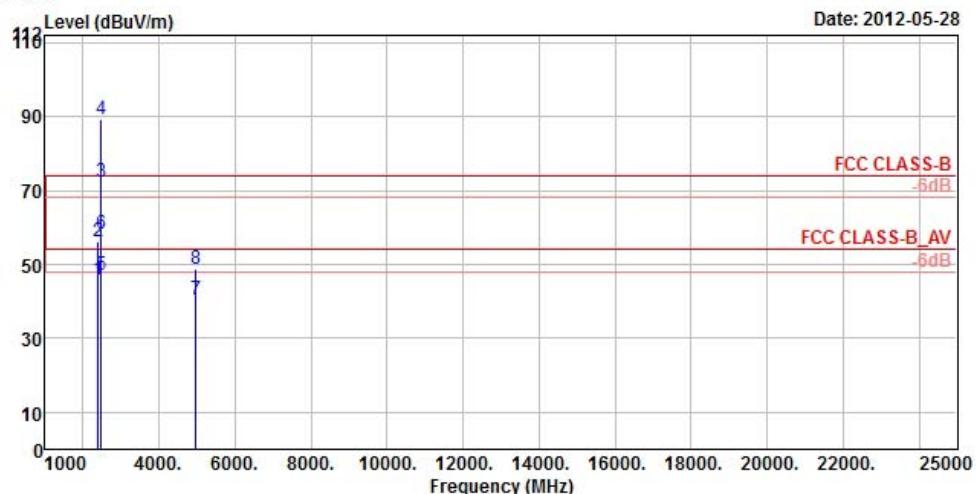

Site : 966 Chamber 5
Condition : FCC CLASS-B 3m ANT_18G~40G_HF HORIZONTAL
Brand/Model: F-12D
Remark : BT 4.0 TX CH19
Tested by : Kay Wu
Temprature : 25°C
Humidity : 65%
Plane : Y

Freq	Level	Read	Limit	Over	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		MHz	dBuV/m	dBuV	Line	Limit Factor	dB/m	dB	cm	
1	2390.00	45.78	51.17	54.00	-8.22	27.26	4.87	37.52	100	227 Average
2	2390.00	56.21	61.60	74.00	-17.79	27.26	4.87	37.52	100	227 Peak
3 pp	2480.00	72.39	77.29			27.50	4.92	37.32	100	227 Average
4 pk	2480.00	89.12	94.02			27.50	4.92	37.32	100	227 Peak
5	2483.50	47.06	51.96	54.00	-6.94	27.50	4.92	37.32	100	227 Average
6	2483.50	58.27	63.17	74.00	-15.73	27.50	4.92	37.32	100	227 Peak
7	4960.00	40.47	54.07	54.00	-13.53	31.72	7.72	53.04	100	360 Average
8	4960.00	48.95	62.55	74.00	-25.05	31.72	7.72	53.04	100	360 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 20

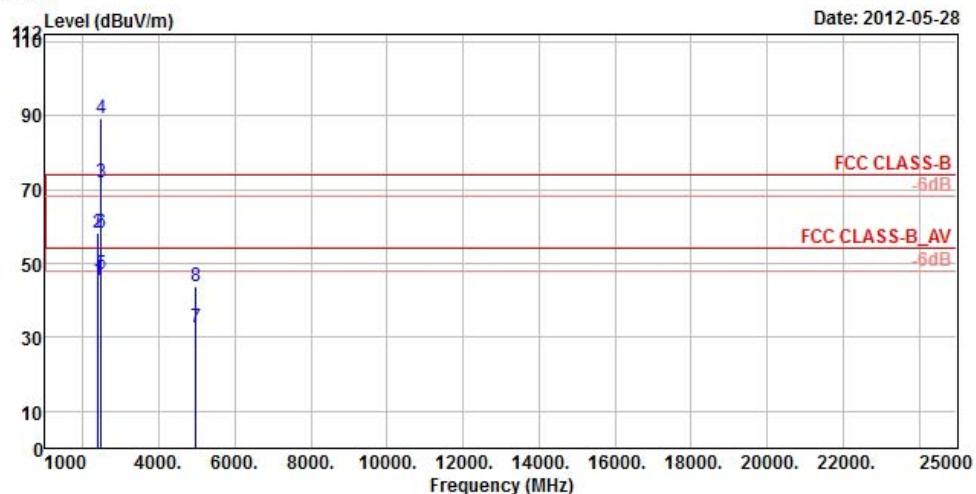

Site : 966 Chamber 5

Condition : FCC CLASS-B 3m ANT_18G~40G_HF VERTICAL

Brand/Model: F-12D

Remark : BT 4.0 TX CH19

Tested by : Kay Wu

Temprature : 25°C

Humidity : 65%

Plane : Y

Freq	Level	Read	Limit	OverAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
		Level	Line						
MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg
1	2390.00	45.67	51.06	54.00	-8.33	27.26	4.87	37.52	130
2	2390.00	58.44	63.83	74.00	-15.56	27.26	4.87	37.52	130
3 pp	2480.00	72.04	76.94			27.50	4.92	37.32	130
4 pk	2480.00	89.22	94.12			27.50	4.92	37.32	130
5	2483.50	47.25	52.15	54.00	-6.75	27.50	4.92	37.32	130
6	2483.50	58.23	63.13	74.00	-15.77	27.50	4.92	37.32	130
7	4960.00	32.72	46.32	54.00	-21.28	31.72	7.72	53.04	100
8	4960.00	44.00	57.60	74.00	-30.00	31.72	7.72	53.04	100



A D T


BELOW 1GHz WORST-CASE DATA



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

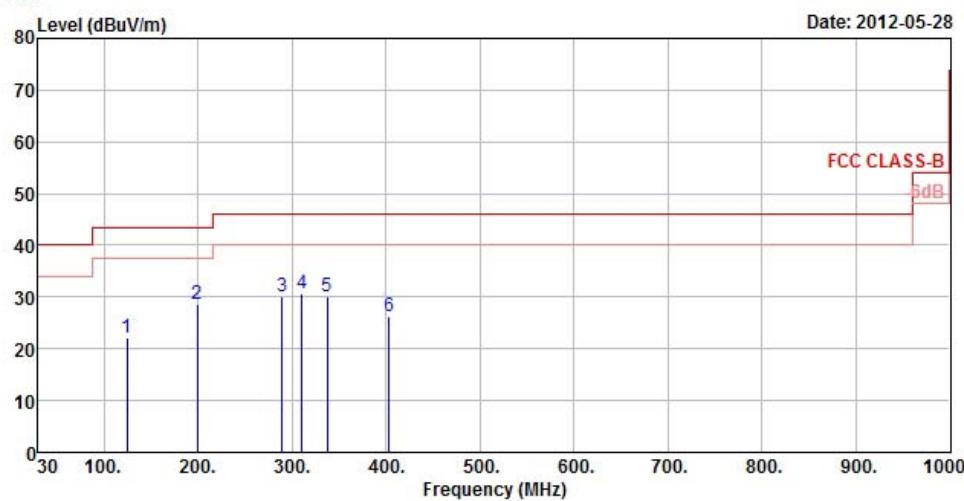

Site : 966 Chamber 5
Condition : FCC CLASS-B 3m ANT_30M~1G_LF HORIZONTAL
Brand/Model: F-12D
Remark : BT4.0 TX LF
Tested by : Kay Wu
Temprature : 25°C
Humidity : 65%
Plane : Y

Freq	Level	Read	Limit	Over	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		Freq	Level	Line	Limit Factor	dB/m	dB	dB	cm	
MHz	dBuV/m	dBuV	dBuV/m		dB	dB/m	dB	cm	deg	
1	124.50	22.03	41.43	43.50	-21.47	11.28	1.21	31.89	210	224 Peak
2 pp	199.29	28.58	49.40	43.50	-14.92	9.36	1.59	31.77	104	224 Peak
3	289.20	30.03	47.08	46.00	-15.97	12.63	2.00	31.68	100	122 Peak
4	310.50	30.73	47.39	46.00	-15.27	13.20	2.09	31.95	132	285 Peak
5	337.80	30.14	45.94	46.00	-15.86	13.84	2.18	31.82	107	47 Peak
6	403.60	26.19	40.42	46.00	-19.81	15.41	2.44	32.08	144	133 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

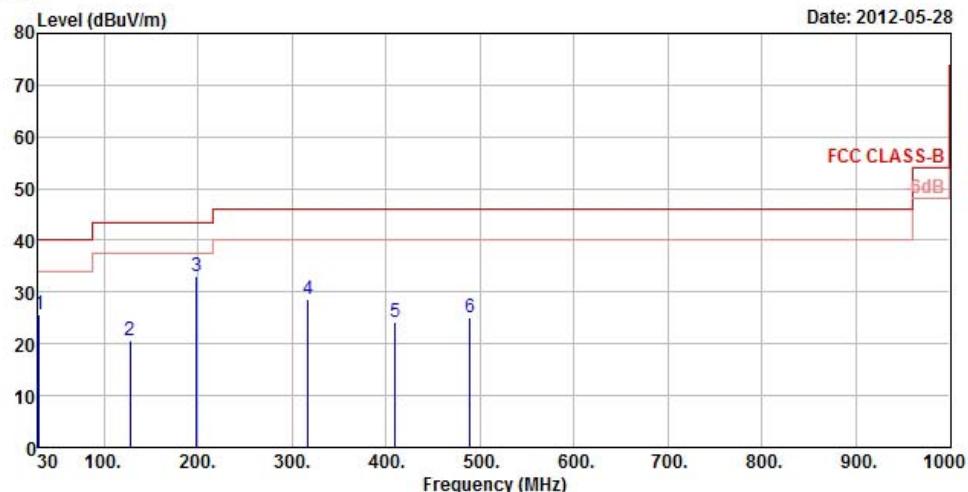

Site : 966 Chamber 5

Condition : FCC CLASS-B 3m ANT_30M~1G_LF VERTICAL

Brand/Model: F-12D

Remark : BT4.0 TX LF

Tested by : Kay Wu

Temprature : 25°C

Humidity : 65%

Plane : Y

Freq	Level	Read	Limit	Over	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark
		Level	Line	Limit	Factor	Loss	Factor	dB	cm	
MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	31.35	25.74	44.15	40.00	-14.26	12.14	0.57	31.12	322	101 Peak
2	127.47	20.69	39.88	43.50	-22.81	11.48	1.22	31.89	274	141 Peak
3 pp	198.48	33.06	53.80	43.50	-10.44	9.43	1.59	31.76	105	252 Peak
4	317.50	28.56	45.00	46.00	-17.44	13.36	2.11	31.91	203	320 Peak
5	409.90	24.22	38.21	46.00	-21.78	15.54	2.46	31.99	185	54 Peak
6	489.00	25.18	37.12	46.00	-20.82	17.10	2.74	31.78	100	117 Peak



A D T

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 19, 2011	Nov. 18, 2012
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 22, 2011	Dec. 21, 2012
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 30, 2011	Dec. 29, 2012
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 07, 2011	Jul. 06, 2012
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.



A D T

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

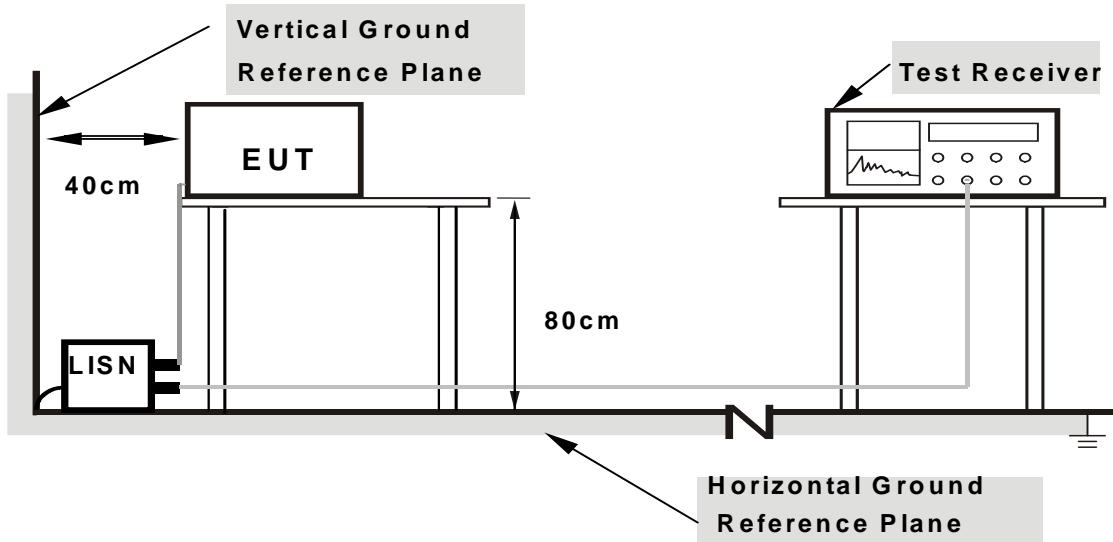

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST CASE DATA:

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16951	0.15	37.33	20.42	37.48	20.57	64.98	54.98	-27.50	-34.41
2	0.18906	0.15	32.22	8.19	32.37	8.34	64.08	54.08	-31.71	-45.74
3	0.31406	0.16	29.66	12.08	29.82	12.24	59.86	49.86	-30.04	-37.62
4	0.47813	0.17	31.92	12.64	32.09	12.81	56.37	46.37	-24.28	-33.56
5	1.92969	0.26	37.50	21.70	37.76	21.96	56.00	46.00	-18.24	-24.04
6	22.71875	0.60	32.17	19.01	32.77	19.61	60.00	50.00	-27.23	-30.39

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

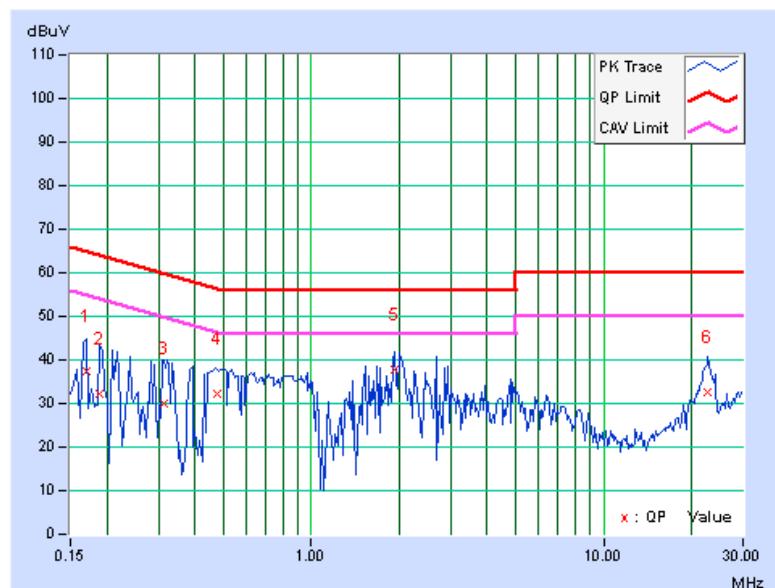


PHASE	Line 2	6dB BANDWIDTH		9kHz	
-------	--------	---------------	--	------	--

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	0.13	38.54	23.92	38.67	24.05	65.18	55.18	-26.50	-31.12
2	0.19687	0.14	35.67	12.75	35.81	12.89	63.74	53.74	-27.93	-40.85
3	0.29453	0.15	30.35	10.18	30.50	10.33	60.40	50.40	-29.90	-40.07
4	0.38828	0.16	26.61	3.64	26.77	3.80	58.10	48.10	-31.33	-44.30
5	1.92188	0.25	37.90	21.82	38.15	22.07	56.00	46.00	-17.85	-23.93
6	22.55469	0.68	32.00	19.02	32.68	19.70	60.00	50.00	-27.32	-30.30

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

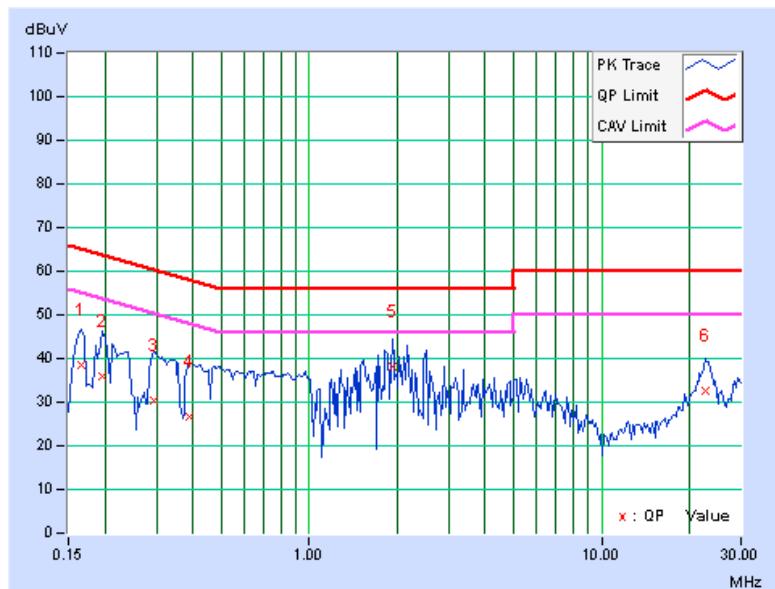


4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP

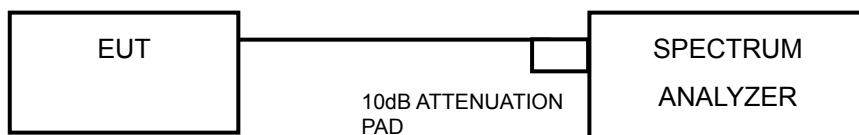

4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.728	0.5	PASS
19	2440	0.728	0.5	PASS
39	2480	0.726	0.5	PASS

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz: 1 Watt (30dBm)

4.4.2 TEST SETUP

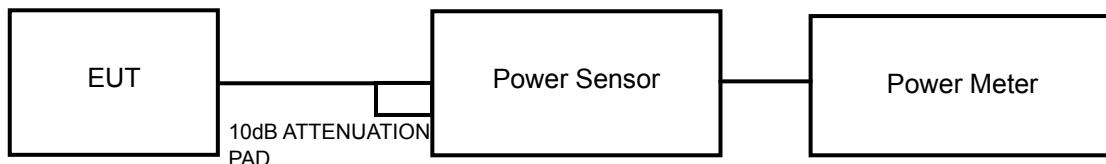

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS


CHANNEL	FREQUENCY (MHz)	PEAK POWER (W)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
0	2402	0.002	2.84	30	PASS
19	2440	0.002	3.43	30	PASS
39	2480	0.002	3.44	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP

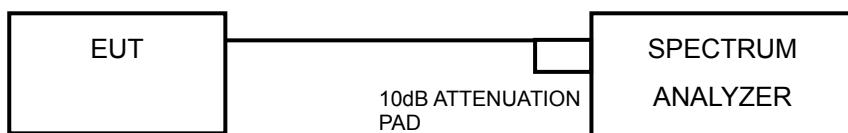

4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- Set the RBW = 100 kHz, VBW =300 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.5.7 TEST RESULTS

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	0.04	-15.16	8	PASS
19	2440	0.69	-14.51	8	PASS
39	2480	0.67	-14.53	8	PASS




4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

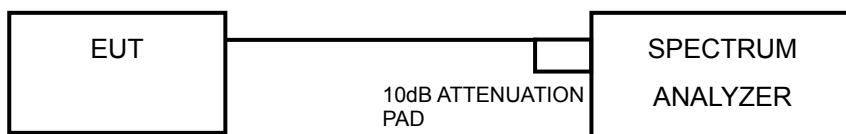

4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



A D T

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.


4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

4.6.8 TEST RESULTS

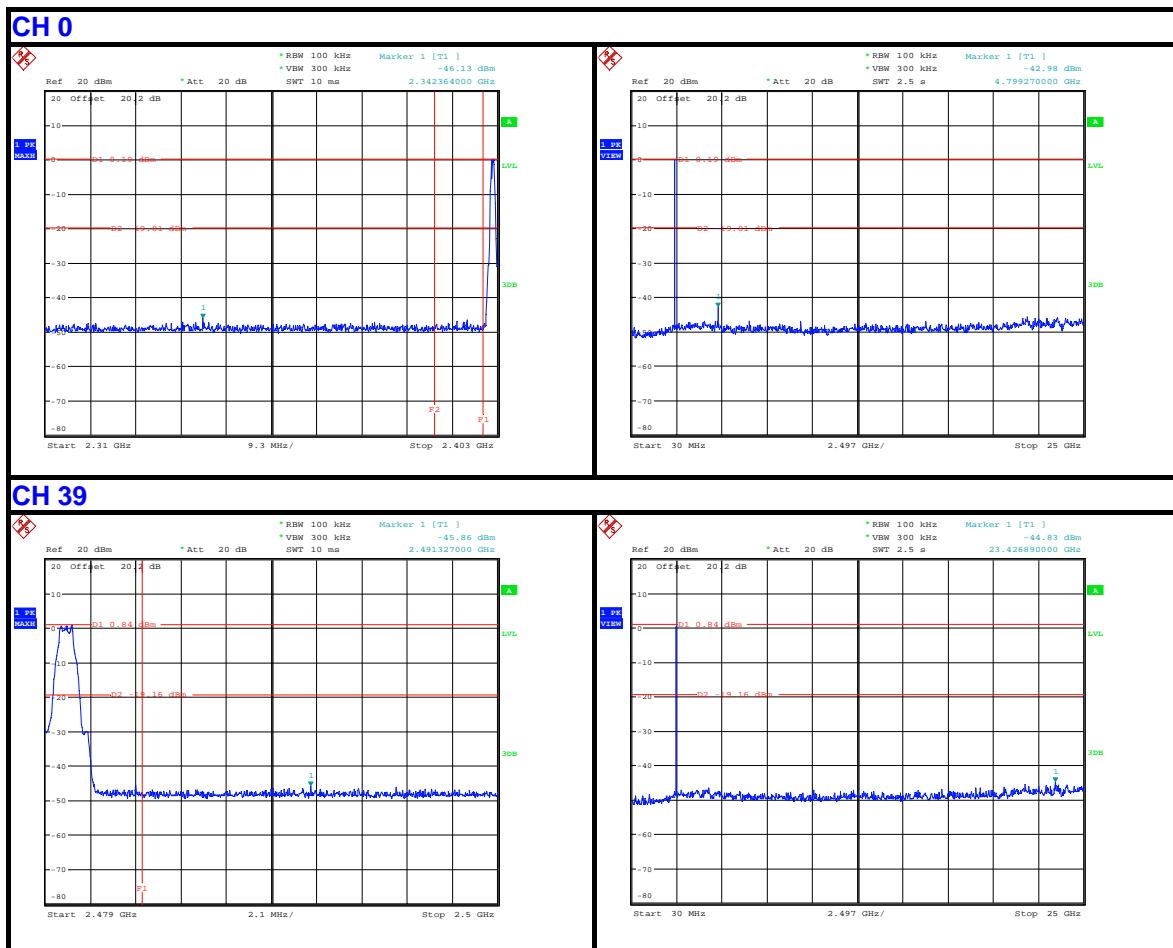



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---