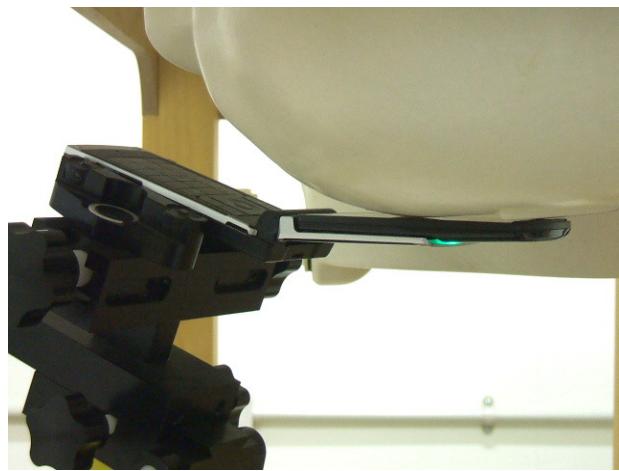
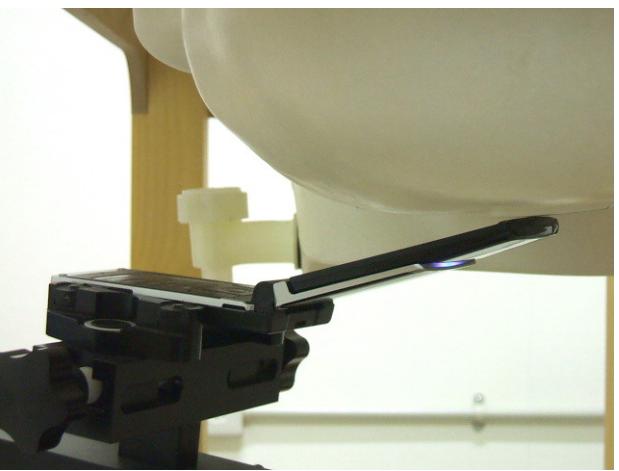
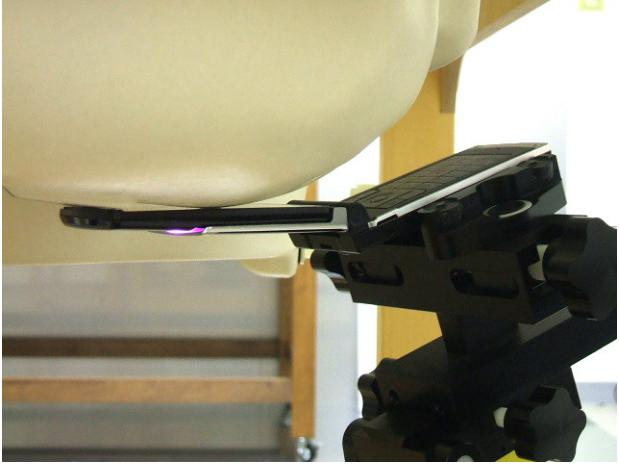
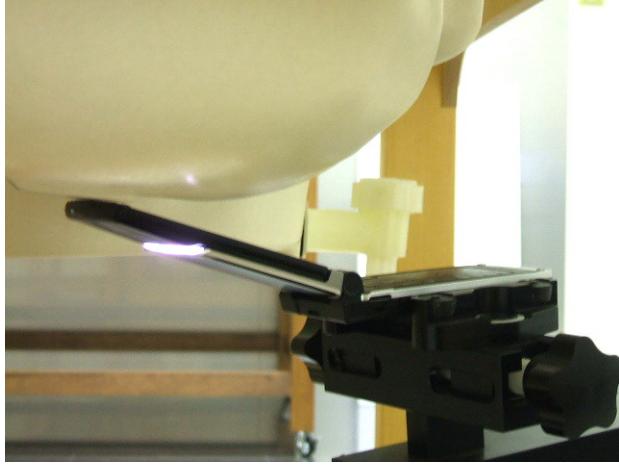
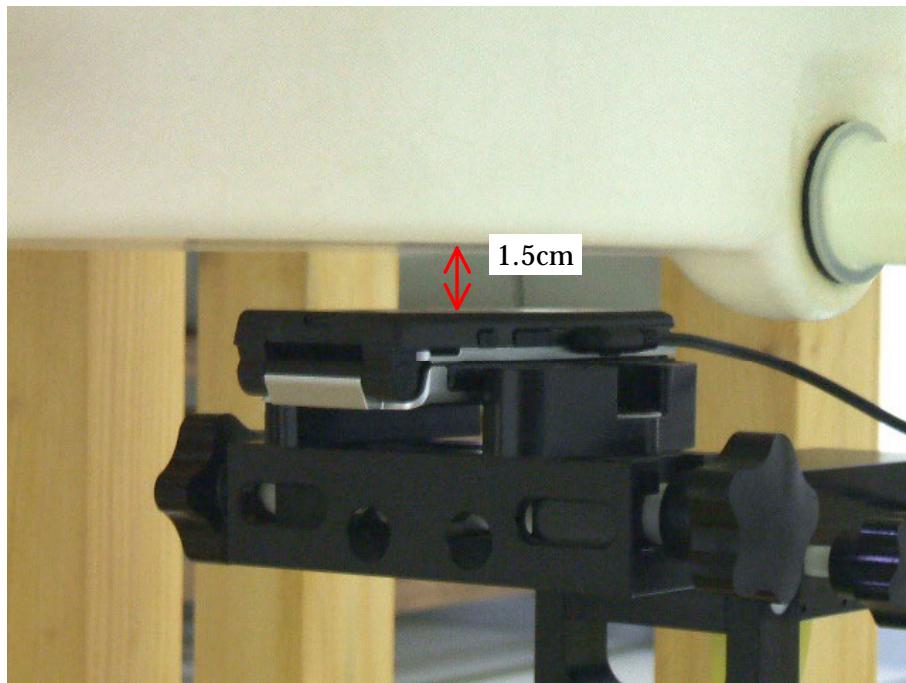


A.3 SAR Measurement Data**A.3.1 Left Head**

								
Cheek/Touch Position		Ear/Tilt Position						
GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)								
Test Position	Frequency		Power Drift [dB]					
	Channel	MHz						
Cheek/Touch	0512	1850.20	30.17	-0.010	1.6	0.265	21.0	
	0661	1880.00	29.93	-0.004		0.246	21.0	
	0810	1909.80	29.91	-0.043		0.278	21.0	
Ear/Tilt	0512	1850.20	--	--	1.6	**	--	
	0661	1880.00	29.93	0.005		0.0381	21.0	
	0810	1909.80	--	--		**	--	
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.								
4. Please refer to attachment for the result presentation in plot format.								

A.3.2 Right Head

						
Cheek/Touch Position		Ear/Tilt Position				
GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)		Date : December 4, 2007				
Test Position	Frequency		Power Drift [dB]			
	Channel	MHz				
Cheek/Touch	0512	1850.20	--			
	0661	1880.00	29.93			
	0810	1909.80	--			
Ear/Tilt	0512	1850.20	--			
	0661	1880.00	29.93			
	0810	1909.80	--			
NOTES :						
1. Depth of Liquid : 15.0 cm 2. Transmitter power was measured at the antenna-conducted terminal. 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit. 4. Please refer to attachment for the result presentation in plot format.						

A.3.3 Body-worn Position

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)

Date : December 5, 2007

Separation Distance	Frequency		Peak Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.93	-0.070		0.318	21.0
	0810	1909.80	--	--		**	--

GSM 1900 GSM+GPRS (Duty Cycle: 12.5 %, Crest Factor: 8)

1.5 cm	0512	1850.20	30.19	0.013	1.6	0.373	21.0
	0661	1880.00	29.95	0.018		0.328	21.0
	0810	1909.80	29.95	0.005		0.346	21.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.