

# SAR TEST REPORT

**REPORT NO.:** SA110823C01

**MODEL NO.:** T-01D

**FCC ID:** VQK-T01D

**RECEIVED:** Aug. 23, 2011

**TESTED:** Aug. 25 ~ Sep. 06, 2011

**ISSUED:** Sep. 14, 2011

**APPLICANT:** FUJITSU LIMITED

**ADDRESS:** 1-1, Kamikodanaka 4-chome, Nakahara-ku,  
Kawasaki 211-8588, Japan

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.)  
Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,  
Taipei Hsien 244, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 30 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.



## TABLE OF CONTENTS

|                                                                  |    |
|------------------------------------------------------------------|----|
| RELEASE CONTROL RECORD .....                                     | 3  |
| 1. CERTIFICATION .....                                           | 4  |
| 2. GENERAL INFORMATION .....                                     | 5  |
| 2.1 GENERAL DESCRIPTION OF EUT.....                              | 5  |
| 2.2 SUMMARY OF PEAK SAR RESULTS.....                             | 5  |
| 2.3 TEST CONFIGURATION .....                                     | 6  |
| 2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS.....                | 6  |
| 2.5 GENERAL INFORMATION OF THE SAR SYSTEM .....                  | 7  |
| 2.6 TEST EQUIPMENT .....                                         | 10 |
| 2.7 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION ..... | 11 |
| 2.8 DESCRIPTION OF SUPPORT UNITS.....                            | 14 |
| 3. DESCRIPTION OF TEST POSITION.....                             | 15 |
| 3.1 DESCRIPTION OF TEST POSITION.....                            | 15 |
| 3.1.1 TOUCH/CHEEK TEST POSITION.....                             | 16 |
| 3.1.2 TILT TEST POSITION.....                                    | 17 |
| 3.1.3 BODY-WORN CONFIGURATION.....                               | 17 |
| 4. RECIPES FOR TISSUE SIMULATING LIQUIDS .....                   | 18 |
| 5. SYSTEM VALIDATION.....                                        | 21 |
| 5.1 TEST PROCEDURE .....                                         | 21 |
| 5.2 VALIDATION RESULTS .....                                     | 22 |
| 5.3 SYSTEM VALIDATION UNCERTAINTIES .....                        | 23 |
| 6. TEST RESULTS .....                                            | 24 |
| 6.1 TEST PROCEDURES.....                                         | 24 |
| 6.2 MEASURED CONDUCTED POWER OF DUT .....                        | 26 |
| 6.3 MEASURED SAR RESULTS .....                                   | 27 |
| 6.4 SIMULTANEOUS TRANSMISSION EVALUATION .....                   | 28 |
| 6.5 SAR LIMITS .....                                             | 29 |
| 7. INFORMATION ON THE TESTING LABORATORIES.....                  | 30 |
| APPENDIX A: TEST DATA                                            |    |
| APPENDIX B: ADT SAR MEASUREMENT SYSTEM                           |    |
| APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION                     |    |
| APPENDIX D: SYSTEM CERTIFICATE & CALIBRATION                     |    |



## RELEASE CONTROL RECORD

| ISSUE NO.        | REASON FOR CHANGE | DATE ISSUED   |
|------------------|-------------------|---------------|
| Original release | NA                | Sep. 14, 2011 |

## 1. CERTIFICATION

**PRODUCT:** Mobile Phone  
**MODEL NO.:** T-01D  
**FCC ID:** VQK-T01D  
**BRAND:** FOMA  
**APPLICANT:** FUJITSU LIMITED  
**TESTED:** Aug. 25 ~ Sep. 06, 2011  
**STANDARDS:** **FCC Part 2 (Section 2.1093)**  
**FCC OET Bulletin 65, Supplement C (01-01)**  
**IEEE 1528:2003**

The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report.

**PREPARED BY** : Ivonne Wu , **DATE:** Sep. 14, 2011  
Ivonne Wu / Senior Specialist

**APPROVED BY** : Gary Chang , **DATE:** Sep. 14, 2011  
Gary Chang / Technical Manager

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                               |                                                                         |
|-------------------------------|-------------------------------------------------------------------------|
| <b>EUT</b>                    | Mobile Phone                                                            |
| <b>MODEL NO.</b>              | T-01D                                                                   |
| <b>FCC ID</b>                 | VQK-T01D                                                                |
| <b>CLASSIFICATION</b>         | Engineering Sample                                                      |
| <b>IMEI CODE</b>              | 355079040012241                                                         |
| <b>UPLINK MODULATION TYPE</b> | GSM: GMSK<br>WCDMA: QPSK                                                |
| <b>TX FREQUENCY RANGE</b>     | GSM1900: 1850.2 MHz ~ 1909.8 MHz<br>WCDMA Band V: 826.4 MHz ~ 846.6 MHz |
| <b>ANTENNA TYPE</b>           | Fixed Internal antenna                                                  |
| <b>ACCESSORY DEVICES</b>      | Battery                                                                 |

#### NOTE:

1. The EUT use the following internal Li-ion battery:

|               |                        |
|---------------|------------------------|
| <b>BRAND</b>  | Fujitsu Limited        |
| <b>MODEL</b>  | F24                    |
| <b>RATING</b> | 3.7Vdc, 1400mAh, 5.2Wh |

2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or User's Manual.

### 2.2 SUMMARY OF PEAK SAR RESULTS

| Band         | Position         | SAR <sub>1g</sub><br>(W/kg) |
|--------------|------------------|-----------------------------|
| WCDMA Band V | Head             | 0.357                       |
|              | Body (Body Worn) | 0.506                       |
|              | Body (Hotspot)   | 0.506                       |
| GSM1900      | Head             | 0.549                       |
|              | Body (Body Worn) | 0.513                       |
|              | Body (Hotspot)   | 0.513                       |

## 2.3 TEST CONFIGURATION

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the DUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of DUT. The DUT was set from the emulator to radiate maximum output power during all tests.

In general, the crest factor is 8.3 for GSM and GPRS multi-slot class 8, and 1 for WCDMA.

This device supports WiFi hotspot function, so body SAR was tested under 1 cm for the surfaces/slide edges where a transmitting antenna is within 2.5 cm from the edge.

The WWAN antenna is located on bottom edge of the phone. Top edge is not tested since the distance between antenna and top edge is > 2.5 cm.

## 2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to the specifications of the manufacturer, this product must comply with the requirements of the following standards:

**FCC 47 CFR Part 2 (2.1093)**

**FCC OET Bulletin 65, Supplement C (01- 01)**

**IEEE 1528-2003**

All test items have been performed and recorded as per the above standards.

## 2.5 GENERAL INFORMATION OF THE SAR SYSTEM

DASY4/5 consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4/5 software defined. The DASY4/5 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

### EX3DV4 ISOTROPIC E-FIELD PROBE

|                      |                                                                                                                                                                                                            |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CONSTRUCTION</b>  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE)                                                |
| <b>FREQUENCY</b>     | 10 MHz to > 6 GHz<br>Linearity: $\pm 0.2$ Db (30 MHz to 6 GHz)                                                                                                                                             |
| <b>DIRECTIVITY</b>   | $\pm 0.3$ Db in HSL (rotation around probe axis)<br>$\pm 0.5$ Db in tissue material (rotation normal to probe axis)                                                                                        |
| <b>DYNAMIC RANGE</b> | 10 Mw/g to > 100 Mw/g<br>Linearity: $\pm 0.2$ Db (noise: typically < 1 Mw/g)                                                                                                                               |
| <b>DIMENSIONS</b>    | Overall length: 330 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                                                                       |
| <b>APPLICATION</b>   | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |

#### NOTE

1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX D" for the Calibration Certification Report.

## TWIN SAM V4.0

**CONSTRUCTION** The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

**SHELL THICKNESS**  $2 \pm 0.2$  mm

**FILLING VOLUME** Approx. 25 liters

**DIMENSIONS** Height: 810 mm; Length: 1000 mm; Width: 500 mm

## SYSTEM VALIDATION KITS:

**CONSTRUCTION** Symmetrical dipole with 1/4 balun  
Enables measurement of feedpoint impedance with NWA  
Matched for use near flat phantoms filled with brain simulating solutions  
Includes distance holder and tripod adaptor

**CALIBRATION** Calibrated SAR value for specified position and input power at the flat phantom in brain simulating solutions

**FREQUENCY** 835, 1900

**RETURN LOSS** > 20 Db at specified validation position

**POWER CAPABILITY** > 100 W ( $f < 1\text{GHz}$ ); > 40 W ( $f > 1\text{GHz}$ )

**OPTIONS** Dipoles for other frequencies or solutions and other calibration conditions upon request

## DEVICE HOLDER FOR SAM TWIN PHANTOM

**CONSTRUCTION** The device holder for the GSM900/DCS1800/PCS1900 GSM/GPRS/CDMA Mobile Phone device is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered. The device holder for the portable device makes up of the polyethylene foam. The dielectric parameters of material close to the dielectric parameters of the air.

## DATA ACQUISITION ELECTRONICS

**CONSTRUCTION** The data acquisition electronics (DAE3) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplex, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe is mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 box is 200Mohm; the inputs are symmetrical and floating. Common mode rejection is above 80 Db.

## 2.6 TEST EQUIPMENT

### FOR SAR MEASUREMENT

| ITEM | NAME              | BRAND                | TYPE         | SERIES NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|------|-------------------|----------------------|--------------|------------|---------------------|-------------------------|
| 1    | SAM Phantom       | S & P                | QD000 P40 CA | TP-1485    | NA                  | NA                      |
| 2    | SAM Phantom       | S & P                | QD000 P40 CA | TP-1202    | NA                  | NA                      |
| 3    | Signal Generator  | Agilent              | E8257C       | MY43320668 | Dec. 27, 2010       | Dec. 26, 2011           |
| 4    | E-Field Probe     | S & P                | EX3DV4       | 3650       | Jan. 24, 2011       | Jan. 23, 2012           |
| 5    | E-Field Probe     | S & P                | EX3DV4       | 3800       | Aug. 05, 2011       | Aug. 04, 2012           |
| 6    | DAE               | S & P                | DAE3         | 510        | Oct. 04, 2010       | Oct. 03, 2011           |
| 7    | DAE               | S & P                | DAE3         | 579        | Sep. 20, 2010       | Sep. 19, 2011           |
| 8    | Robot Positioner  | Staubli<br>Unimation | NA           | NA         | NA                  | NA                      |
| 9    | Validation Dipole | S & P                | D835V2       | 4d021      | Mar. 23, 2011       | Mar. 22, 2012           |
|      |                   |                      | D1900V2      | 5d022      | Jan. 26, 2011       | Jan. 25, 2012           |

**NOTE:** Before starting the measurement, all test equipment shall be warmed up for 30min.

### FOR TISSUE PROPERTY

| ITEM | NAME             | BRAND   | TYPE   | SERIES NO. | DATE OF CALIBRATION | DUE DATE OF CALIBRATION |
|------|------------------|---------|--------|------------|---------------------|-------------------------|
| 1    | Network Analyzer | Agilent | E8358A | US41480538 | Dec. 30, 2010       | Dec. 29, 2011           |
| 2    | Dielectric Probe | Agilent | 85070D | US01440176 | NA                  | NA                      |

**NOTE:**

- Before starting, all test equipment shall be warmed up for 30min.
- The tolerance ( $k=1$ ) specified by Agilent for general dielectric measurements, deriving from inaccuracies in the calibration data, analyzer drift, and random errors, are usually  $\pm 2.5\%$  and  $\pm 5\%$  for measured permittivity and conductivity, respectively. However, the tolerances for the conductivity is smaller for material with large loss tangents, i.e., less than  $\pm 2.5\%$  ( $k=1$ ). It can be substantially smaller if more accurate methods are applied.

## 2.7 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION

The DASY4/DASY5 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the micro-volt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

|                    |                           |                                                                         |
|--------------------|---------------------------|-------------------------------------------------------------------------|
| Probe parameters:  | - Sensitivity             | Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub> |
|                    | - Conversion factor       | ConvF <sub>i</sub>                                                      |
|                    | - Diode compression point | dcp <sub>i</sub>                                                        |
| Device parameters: | - Frequency               | F                                                                       |
|                    | - Crest factor            | Cf                                                                      |
| Media parameters:  | - Conductivity            | σ                                                                       |
|                    | - Density                 | ρ                                                                       |

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

|                  |                                  |                  |
|------------------|----------------------------------|------------------|
| V <sub>i</sub>   | =compensated signal of channel i | (i = x, y, z)    |
| U <sub>i</sub>   | =input signal of channel i       | (i = x, y, z)    |
| Cf               | =crest factor of exciting field  | (DASY parameter) |
| dcp <sub>i</sub> | =diode compression point         | (DASY parameter) |

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

|                 |                                                                                 |                |
|-----------------|---------------------------------------------------------------------------------|----------------|
| $V_i$           | =compensated signal of channel i                                                | (i = x, y, z)  |
| $\text{Norm}_i$ | =sensor sensitivity of channel i $\mu\text{V}/(\text{V/m})^2$ for (i = x, y, z) | E-field Probes |
| $\text{ConvF}$  | = sensitivity enhancement in solution                                           |                |
| $a_{ij}$        | = sensor sensitivity factors for H-field probes                                 |                |
| $f$             | = carrier frequency [GHz]                                                       |                |
| $E_i$           | = electric field strength of channel i in V/m                                   |                |
| $H_i$           | = magnetic field strength of channel i in A/m                                   |                |

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

|                  |                                                  |
|------------------|--------------------------------------------------|
| SAR              | = local specific absorption rate in mW/g         |
| $E_{\text{tot}}$ | = total field strength in V/m                    |
| $\sigma$         | = conductivity in [mho/m] or [Siemens/m]         |
| $\rho$           | = equivalent tissue density in g/cm <sup>3</sup> |

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid. The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1 g and 10 g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 5 x 5 x 7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 32 x 32 x 30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (42875 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

## 2.8 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT                              | BRAND | MODEL NO. | SERIAL NO. |
|-----|--------------------------------------|-------|-----------|------------|
| 1   | Universal Radio Communication Tester | R&S   | CMU200    | 101372     |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|-----------------------------------------------------|
| 1   | NA                                                  |

**NOTE:** All power cords of the above support units are non shielded (1.8m).

### 3. DESCRIPTION OF TEST POSITION

#### 3.1 DESCRIPTION OF TEST POSITION

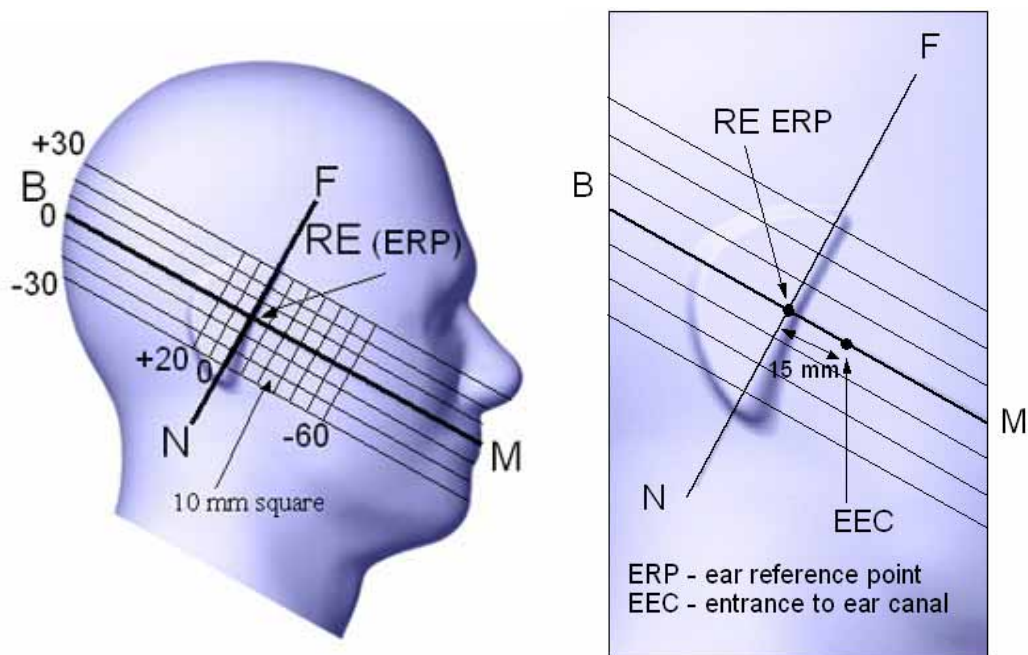


FIGURE 3.1

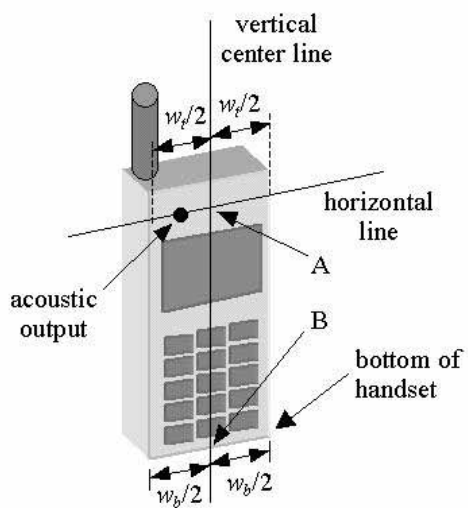


FIGURE 3.1a


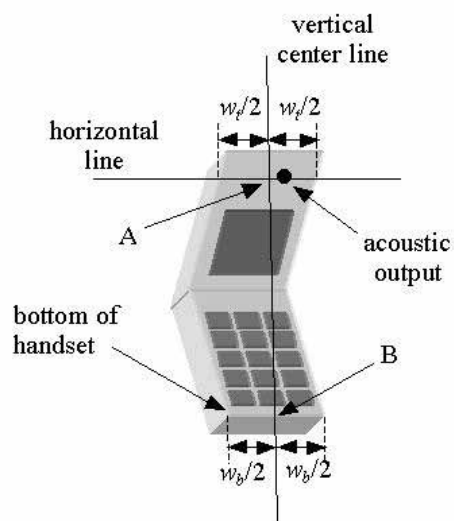


FIGURE 3.1b

### 3.1.1 TOUCH/CHEEK TEST POSITION


The head position in Figure 3.1, the ear reference points ERP are 15mm above entrance to ear canal along the B-M line. The line N-F (Neck-Front) is perpendicular to the B-M (Back Mouth) line. The handset device in Figure 3.1a and 3.1b, The vertical centerline pass through two points on the front side of handset: the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A) and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The vertical centerline is perpendicular to the horizontal line and pass through the center of the acoustic output. The point A touches the ERP and the vertical centerline of the handset is parallel to the B-M line. While maintaining the point A contact with the ear(ERP), rotate the handset about the line NF until any point on handset is in contact with the cheek of the phantom

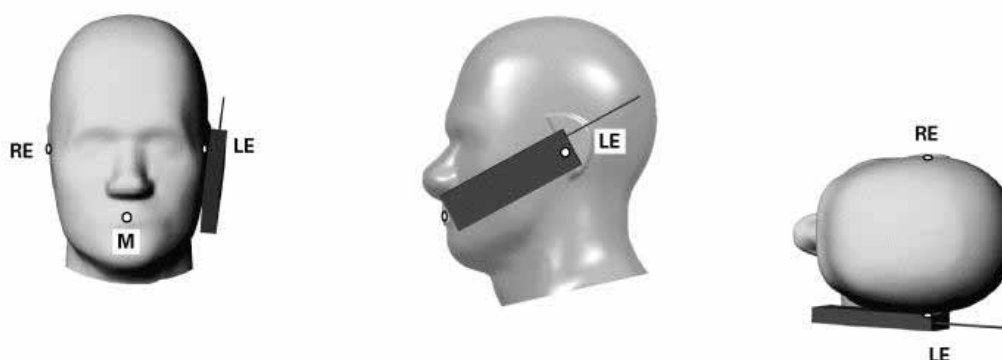

**TOUCH/CHEEK POSITION FIGURE**

### 3.1.2 TILT TEST POSITION

Adjust the device in the cheek position. While maintaining a point of the handset contact in the ear, move the bottom of the handset away from the mouth by an angle of 15 degrees.

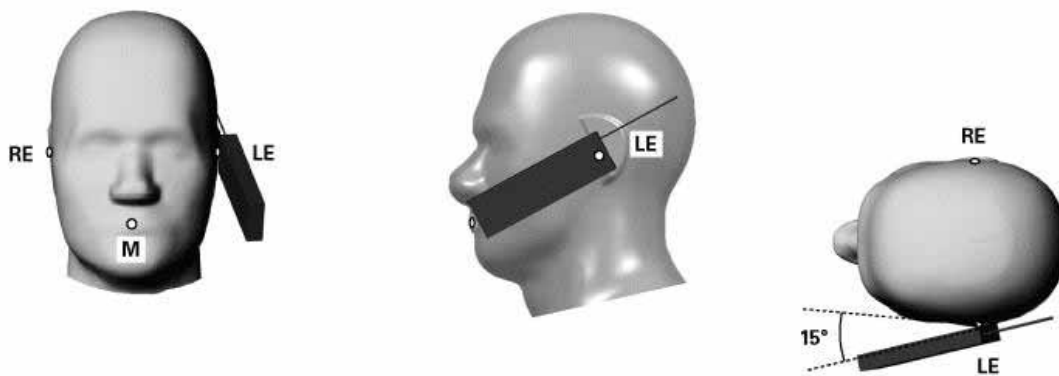

**TILT POSITION FIGURE**

### 3.1.3 BODY-WORN CONFIGURATION

The handset device attached the belt clip or the holster. The keypad face of the handset is against with the bottom of the flat phantom face and the bottom of the keypad face contact to the bottom of the flat phantom.

When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only accessory that dictates the closest spacing to the body must be tested.

If the device supports WiFi hotspot function, the body SAR will test under 1 cm for the surfaces/slide edges where a transmitting antenna is within 2.5 cm from the edge.

#### 4. RECIPES FOR TISSUE SIMULATING LIQUIDS

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with 25 liters of tissue simulation liquid.

The following ingredients are used :

- **WATER-** Deionized water (pure H<sub>2</sub>O), resistivity  $\geq 16 \text{ M}$  - as basis for the liquid
- **SUGAR-** Refined sugar in crystals, as available in food shops - to reduce relative permittivity
- **SALT-** Pure NaCl - to increase conductivity
- **CELLULOSE-** Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20°C),  
CAS # 54290 - to increase viscosity and to keep sugar in solution
- **PRESERVATIVE-** Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 - to prevent the spread of bacteria and molds
- **DGMBE-** Diethylenglycol-monobuthyl ether (DGMBE), Fluka Chemie GmbH, CAS # 112-34-5 - to reduce relative permittivity

**THE RECIPES FOR 835MHz SIMULATING LIQUID TABLE**

| INGREDIENT                        | HEAD SIMULATING LIQUID<br>835MHz (HSL-835)                                    | MUSCLE SIMULATING LIQUID<br>835MHz (MSL-835)                                   |
|-----------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Water                             | 40.28%                                                                        | 50.07%                                                                         |
| Cellulose                         | 2.41%                                                                         | NA                                                                             |
| Salt                              | 1.38%                                                                         | 0.94%                                                                          |
| Preventol D-7                     | 0.18%                                                                         | 0.09%                                                                          |
| Sugar                             | 57.97%                                                                        | 48.2%                                                                          |
| Dielectric<br>Parameters at<br>22 | f = 835MHz<br>$\epsilon = 41.5 \pm 5\%$<br>$\sigma = 0.9 \pm 5\% \text{ S/m}$ | f = 835MHz<br>$\epsilon = 55.2 \pm 5\%$<br>$\sigma = 0.97 \pm 5\% \text{ S/m}$ |

### THE RECIPES FOR 1900MHz SIMULATING LIQUID TABLE

| INGREDIENT                        | HEAD SIMULATING LIQUID<br>1900MHz (HSL-1900)                                   | MUSCLE SIMULATING<br>LIQUID 1900MHz (MSL-1900)                                 |
|-----------------------------------|--------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Water                             | 55.24%                                                                         | 70.16%                                                                         |
| DGMBE                             | 44.45%                                                                         | 29.44%                                                                         |
| Salt                              | 0.306%                                                                         | 00.39%                                                                         |
| Dielectric<br>Parameters at<br>22 | f= 1900MHz<br>$\epsilon = 40.0 \pm 5\%$<br>$\sigma = 1.40 \pm 5\% \text{ S/m}$ | f= 1900MHz<br>$\epsilon = 53.3 \pm 5\%$<br>$\sigma = 1.52 \pm 5\% \text{ S/m}$ |

Testing the liquids using the Agilent Network Analyzer E8358A and Agilent Dielectric Probe Kit 85070D. The testing procedure is following as

1. Turn Network Analyzer on and allow at least 30 min. warm up.
2. Mount dielectric probe kit so that interconnecting cable to Network Analyzer will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ( $\pm 1^\circ$ ).
4. Set water temperature in Agilent-Software (Calibration Setup).
5. Perform calibration.
6. Validate calibration with dielectric material of known properties (e.g. polished ceramic slab with >8mm thickness  $\epsilon' = 10.0$ ,  $\epsilon'' = 0.0$ ). If measured parameters do not fit within tolerance, repeat calibration ( $\pm 0.2$  for  $\epsilon'$ :  $\pm 0.1$  for  $\epsilon''$ ).
7. Conductivity can be calculated from  $\epsilon''$  by  $\sigma = \omega \epsilon_0 \epsilon'' = \epsilon'' f [\text{GHz}] / 18$ .
8. Measure liquid shortly after calibration. Repeat calibration every hour.
9. Stir the liquid to be measured. Take a sample (~50ml) with a syringe from the center of the liquid container.
10. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
11. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
12. Perform measurements.
13. Adjust medium parameters in DASY4/5 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Brain 900 MHz) and press 'Option'-button.

Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 900 MHz).

### FOR SIMULATING LIQUID

| Frequency<br>(MHz) | Liquid<br>Type | Liquid Temp.<br>( ) | Conductivity<br>( $\sigma$ ) | Permittivity<br>( $\epsilon_r$ ) | Date          |
|--------------------|----------------|---------------------|------------------------------|----------------------------------|---------------|
| 835                | Head           | 22.1                | 0.798                        | 40.3                             | Aug. 25, 2011 |
| 835                | Body           | 21.2                | 0.968                        | 54.571                           | Sep. 01, 2011 |
| 1900               | Head           | 22.2                | 1.39                         | 40.2                             | Aug. 25, 2011 |
| 1900               | Body           | 21.0                | 1.531                        | 53.856                           | Sep. 01, 2011 |
| 1900               | Body           | 21.3                | 1.53                         | 52.5                             | Sep. 06, 2011 |

## 5. SYSTEM VALIDATION

The system validation was performed in the flat phantom with equipment listed in the following table. Since the SAR value is calculated from the measured electric field, dielectric constant and conductivity of the body tissue and the SAR is proportional to the square of the electric field. So, the SAR value will be also proportional to the RF power input to the system validation dipole under the same test environment. In our system validation test, 250mW RF input power was used.

### 5.1 TEST PROCEDURE

Before you start the system performance check, need only to tell the system with which components (probe, medium, and device) are performing the system performance check; the system will take care of all parameters. The dipole must be placed beneath the flat phantom section of the SAM Twin Phantom with the correct distance holder in place. The distance holder should touch the phantom surface with a light pressure at the reference marking (little cross) and be oriented parallel to the long side of the phantom. Accurate positioning is not necessary, since the system will search for the peak SAR location, except that the dipole arms should be parallel to the surface. The device holder for the EUT can be left in place but should be rotated away from the dipole.

1.The "Power Reference Measurement" and "Power Drift Measurement" jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above  $\pm 0.1$  dB), the system performance check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY system below  $\pm 0.02$  dB.

2.The "Surface Check" job tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1$  mm). In that case it is better to abort the system performance check and stir the liquid.

3. The "Area Scan" job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.

4. The "Zoom Scan" job measures the field in a volume around the peak SAR value assessed in the previous "Area Scan" job (for more information see the application note on SAR evaluation).

About the validation dipole positioning uncertainty, the constant and low loss dielectric spacer is used to establish the correct distance between the top surface of the dipole and the bottom surface of the phantom, the error component introduced by the uncertainty of the distance between the liquid (i.e., phantom shell) and the validation dipole in the DASY4/DASY5 system is less than  $\pm 0.1\text{mm}$ .

$$SAR_{\text{tolerance}} [\%] = 100 \times \left( \frac{(a + d)^2}{a^2} - 1 \right)$$

As the closest distance is 10mm, the resulting tolerance  $SAR_{\text{tolerance}} [\%]$  is  $< 2\%$ .

## 5.2 VALIDATION RESULTS

| Date          | Frequency (MHz) | Targeted SAR (W/kg) | Measured SAR (W/kg) | Normalized SAR (W/kg) | Deviation (%) |
|---------------|-----------------|---------------------|---------------------|-----------------------|---------------|
| Aug. 25, 2011 | 835             | 9.650               | 2.580               | 10.32                 | 6.94          |
| Sep. 01, 2011 | 835             | 10.100              | 2.400               | 9.60                  | -4.95         |
| Aug. 25, 2011 | 1900            | 40.900              | 10.800              | 43.20                 | 5.62          |
| Sep. 01, 2011 | 1900            | 40.900              | 10.000              | 40.00                 | -2.20         |
| Sep. 06, 2011 | 1900            | 40.900              | 11.200              | 44.80                 | 9.54          |

### NOTE:

1. Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Above table shows the target SAR and measured SAR after normalized to 1W input power.

2. Please see Appendix for the photo of system validation test.

### 5.3 SYSTEM VALIDATION UNCERTAINTIES

In the table below, the system validation uncertainty with respect to the analytically assessed SAR value of a dipole source as given in the IEEE 1528 standard is given. This uncertainty is smaller than the expected uncertainty for mobile phone measurements due to the simplified setup and the symmetric field distribution.

| Error Description                            | Tolerance (±%) | Probability Distribution | Divisor | (C <sub>i</sub> ) |       | Standard Uncertainty (±%) |       | (v <sub>i</sub> ) |
|----------------------------------------------|----------------|--------------------------|---------|-------------------|-------|---------------------------|-------|-------------------|
|                                              |                |                          |         | (1g)              | (10g) | (1g)                      | (10g) |                   |
| Measurement System                           |                |                          |         |                   |       |                           |       |                   |
| Probe Calibration                            | 5.50           | Normal                   | 1       | 1                 | 1     | 5.50                      | 5.50  | ∞                 |
| Axial Isotropy                               | 0.25           | Rectangular              | √ 3     | 0.7               | 0.7   | 0.10                      | 0.10  | ∞                 |
| Hemispherical Isotropy                       | 1.30           | Rectangular              | √ 3     | 0.7               | 0.7   | 0.53                      | 0.53  | ∞                 |
| Boundary effects                             | 1.00           | Rectangular              | √ 3     | 1                 | 1     | 0.58                      | 0.58  | ∞                 |
| Linearity                                    | 0.30           | Rectangular              | √ 3     | 1                 | 1     | 0.17                      | 0.17  | ∞                 |
| System Detection Limits                      | 1.00           | Rectangular              | √ 3     | 1                 | 1     | 0.58                      | 0.58  | ∞                 |
| Readout Electronics                          | 0.30           | Normal                   | 1       | 1                 | 1     | 0.30                      | 0.30  | ∞                 |
| Response Time                                | 0.80           | Rectangular              | √ 3     | 1                 | 1     | 0.46                      | 0.46  | ∞                 |
| Integration Time                             | 2.60           | Rectangular              | √ 3     | 1                 | 1     | 1.50                      | 1.50  | ∞                 |
| RF Ambient Noise                             | 3.00           | Rectangular              | √ 3     | 1                 | 1     | 1.73                      | 1.73  | 9                 |
| RF Ambient Reflections                       | 3.00           | Rectangular              | √ 3     | 1                 | 1     | 1.73                      | 1.73  | 9                 |
| Probe Positioner                             | 0.40           | Rectangular              | √ 3     | 1                 | 1     | 0.23                      | 0.23  | ∞                 |
| Probe Positioning                            | 2.90           | Rectangular              | √ 3     | 1                 | 1     | 1.67                      | 1.67  | ∞                 |
| Max. SAR Eval.                               | 1.00           | Rectangular              | √ 3     | 1                 | 1     | 0.58                      | 0.58  | ∞                 |
| Test sample related                          |                |                          |         |                   |       |                           |       |                   |
| Sample positioning                           | 1.90           | Normal                   | 1       | 1                 | 1     | 1.90                      | 1.90  | 4                 |
| Device holder uncertainty                    | 2.80           | Normal                   | 1       | 1                 | 1     | 2.80                      | 2.80  | 4                 |
| Output power variation-SAR drift measurement | 4.50           | Rectangular              | √ 3     | 1                 | 1     | 2.60                      | 2.60  | 1                 |
| Dipole Related                               |                |                          |         |                   |       |                           |       |                   |
| Dipole Axis to Liquid Distance               | 1.60           | Rectangular              | √ 3     | 1                 | 1     | 0.92                      | 0.92  | 4                 |
| Input Power Drift                            | 4.30           | Rectangular              | √ 3     | 1                 | 1     | 2.48                      | 2.48  | 1                 |
| Phantom and Tissue parameters                |                |                          |         |                   |       |                           |       |                   |
| Phantom Uncertainty                          | 4.00           | Rectangular              | √ 3     | 1                 | 1     | 2.31                      | 2.31  | ∞                 |
| Liquid Conductivity (target)                 | 5.00           | Rectangular              | √ 3     | 0.64              | 0.43  | 1.85                      | 1.24  | ∞                 |
| Liquid Conductivity (measurement)            | 4.12           | Normal                   | 1       | 0.64              | 0.43  | 2.64                      | 1.77  | 9                 |
| Liquid Permittivity (target)                 | 5.00           | Rectangular              | √ 3     | 0.6               | 0.49  | 1.73                      | 1.41  | ∞                 |
| Liquid Permittivity (measurement)            | 4.32           | Normal                   | 1       | 0.6               | 0.49  | 2.59                      | 2.12  | 9                 |
| Combined Standard Uncertainty                |                |                          |         |                   |       | 9.68                      | 9.20  |                   |
| Coverage Factor for 95%                      |                |                          |         |                   |       | Kp=2                      |       |                   |
| Expanded Uncertainty (K=2)                   |                |                          |         |                   |       | 19.35                     | 18.41 |                   |

## **6. TEST RESULTS**

### **6.1 TEST PROCEDURES**

The EUT makes a phone call to the communication simulator station. Establish the simulation communication configuration rather the actual communication. Then the EUT could continuous the transmission mode. Adjust the PCL of the base station could controlled the EUT to transmitted the maximum output power. The base station also could control the transmission channel. The SAR value was calculated via the 3D spline interpolation algorithm that has been implemented in the software of DASY4/5 SAR measurement system manufactured and calibrated by SPEAG. According to the IEEE 1528, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Verification of the power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

In the zoom scan, the distance between the measurement point at the probe sensor location (geometric center behind the probe tip) and the phantom surface is 2.0 mm and maintained at a constant distance of  $\pm 1.0$  mm during a zoom scan to determine peak SAR locations. The distance is 2mm between the first measurement point and the bottom surface of the phantom.

The measurement time is 0.5 s at each point of the zoom scan. The probe boundary effect compensation shall be applied during the SAR test. Because of the tip of the probe to the Phantom surface separated distances are longer than half a tip probe diameter.

In the area scan, the separation distance is 2mm between the each measurement point and the phantom surface. The scan size shall be included the transmission portion of the EUT. The measurement time is the same as the zoom scan. At last the reference power drift shall be less than  $\pm 5\%$ .

## 6.2 MEASURED CONDUCTED POWER OF DUT

| Band            | GSM1900 |       |        |
|-----------------|---------|-------|--------|
| Channel         | 512     | 661   | 810    |
| Frequency (MHz) | 1850.2  | 1880  | 1909.8 |
| GSM             | 29.13   | 28.97 | 29.16  |
| GPRS 8          | 28.89   | 28.66 | 28.98  |

| Band            | WCDMA Band V |       |       |
|-----------------|--------------|-------|-------|
| Channel         | 4132         | 4182  | 4233  |
| Frequency (MHz) | 826.4        | 836.4 | 846.6 |
| RMC 12.2K       | 23.76        | 23.82 | 23.20 |

| Band                | 802.11b |       |       | 802.11g |       |       |
|---------------------|---------|-------|-------|---------|-------|-------|
| Channel             | 1       | 6     | 11    | 1       | 6     | 11    |
| Frequency (MHz)     | 2412    | 2437  | 2462  | 2412    | 2437  | 2462  |
| Peak Power (dBm)    | 15.70   | 15.70 | 15.70 | 19.80   | 19.90 | 20.10 |
| Average Power (dBm) | 13.50   | 13.40 | 13.60 | 13.50   | 13.00 | 13.20 |

| Band                | 802.11n (BW 20MHz) |       |       | - |   |   |
|---------------------|--------------------|-------|-------|---|---|---|
| Channel             | 1                  | 6     | 11    | - | - | - |
| Frequency (MHz)     | 2412               | 2437  | 2462  | - | - | - |
| Peak Power (dBm)    | 19.60              | 19.80 | 19.90 | - | - | - |
| Average Power (dBm) | 12.80              | 12.90 | 12.20 | - | - | - |

## 6.3 MEASURED SAR RESULTS

### <Head SAR>

| Plot No. | Band    | Mode | Test Position | Channel | SAR <sub>1g</sub> (W/kg) |
|----------|---------|------|---------------|---------|--------------------------|
| 1        | WCDMA V | RMC  | Right Cheek   | 4182    | 0.295                    |
| 2        | WCDMA V | RMC  | Right Tilted  | 4182    | 0.2                      |
| 3        | WCDMA V | RMC  | Left Cheek    | 4182    | <b>0.357</b>             |
| 4        | WCDMA V | RMC  | Left Tilted   | 4182    | 0.227                    |
| 12       | GSM1900 | GSM  | Right Cheek   | 810     | <b>0.549</b>             |
| 13       | GSM1900 | GSM  | Right Tilted  | 810     | 0.228                    |
| 14       | GSM1900 | GSM  | Left Cheek    | 810     | 0.299                    |
| 15       | GSM1900 | GSM  | Left Tilted   | 810     | 0.174                    |

### <Body SAR: Body Worn Mode>

| Plot No. | Band    | Mode  | Test Position | Separation Distance (cm) | Ch.  | Earphone | SAR <sub>1g</sub> (W/kg) |
|----------|---------|-------|---------------|--------------------------|------|----------|--------------------------|
| 5        | WCDMA V | RMC   | Front Face    | 1                        | 4182 | w/o      | 0.393                    |
| 6        | WCDMA V | RMC   | Rear Face     | 1                        | 4182 | w/o      | <b>0.506</b>             |
| 11       | WCDMA V | RMC   | Rear Face     | 1                        | 4182 | 1        | 0.429                    |
| 16       | GSM1900 | GPRS8 | Front Face    | 1                        | 810  | w/o      | 0.305                    |
| 17       | GSM1900 | GPRS8 | Rear Face     | 1                        | 810  | w/o      | 0.408                    |
| 22       | GSM1900 | GPRS8 | Rear Face     | 1                        | 810  | 1        | <b>0.513</b>             |

### <Body SAR: Hotspot Mode>

| Plot No. | Band    | Mode  | Test Position | Separation Distance (cm) | Ch.  | Earphone | SAR <sub>1g</sub> (W/kg) |
|----------|---------|-------|---------------|--------------------------|------|----------|--------------------------|
| 5        | WCDMA V | RMC   | Front Face    | 1                        | 4182 | w/o      | 0.393                    |
| 6        | WCDMA V | RMC   | Rear Face     | 1                        | 4182 | w/o      | <b>0.506</b>             |
| 7        | WCDMA V | RMC   | Left Side     | 1                        | 4182 | w/o      | 0.479                    |
| 8        | WCDMA V | RMC   | Right Side    | 1                        | 4182 | w/o      | 0.342                    |
| 9        | WCDMA V | RMC   | Top Side      | 1                        | 4182 | w/o      | 0.011                    |
| 10       | WCDMA V | RMC   | Down Side     | 1                        | 4182 | w/o      | 0.206                    |
| 11       | WCDMA V | RMC   | Rear Face     | 1                        | 4182 | 1        | 0.429                    |
| 16       | GSM1900 | GPRS8 | Front Face    | 1                        | 810  | w/o      | 0.305                    |
| 17       | GSM1900 | GPRS8 | Rear Face     | 1                        | 810  | w/o      | 0.408                    |
| 18       | GSM1900 | GPRS8 | Left Side     | 1                        | 810  | w/o      | 0.157                    |
| 19       | GSM1900 | GPRS8 | Right Side    | 1                        | 810  | w/o      | 0.322                    |
| 20       | GSM1900 | GPRS8 | Top Side      | 1                        | 810  | w/o      | 0.076                    |
| 21       | GSM1900 | GPRS8 | Down Side     | 1                        | 810  | w/o      | 0.287                    |
| 22       | GSM1900 | GPRS8 | Rear Face     | 1                        | 810  | 1        | <b>0.513</b>             |

## 6.4 SIMULTANEOUS TRANSMISSION EVALUATION

According to KDB 648474, the WLAN/BT standalone SAR and simultaneous transmission SAR for WWAN and WLAN/BT were not required, because the closest separation distance (5.7 cm) between WWAN and WLAN/BT antennas are larger than 5 cm and WLAN/BT power is less than  $2P_{Ref}$ . The WLAN and BT cannot transmit simultaneously, so there is no co-location test requirement for WLAN and BT. The RFID standalone SAR and simultaneous transmission SAR for WWAN and RFID were not required, because the closest separation distance between WWAN and RFID antennas are larger than 5 cm and RFID power is less than  $2P_{Ref}$ . Simultaneous transmission SAR for WLAN/BT and RFID was not required, because their power are less than 60/f.

## 6.5 SAR LIMITS

| HUMAN EXPOSURE                                                   | SAR (W/kg)                                                     |                                                     |
|------------------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------|
|                                                                  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational / controlled<br>Exposure Environment) |
| Spatial Average<br>(whole body)                                  | 0.08                                                           | 0.4                                                 |
| Spatial Peak<br>(averaged over 1 g)                              | 1.6                                                            | 8.0                                                 |
| Spatial Peak<br>(hands/wrists/feet/ankles<br>averaged over 10 g) | 4.0                                                            | 20.0                                                |

**NOTE:** This limits accord to 47 CFR 2.1093 – Safety Limit.

## 7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5.phtml](http://www.adt.com.tw/index.5.phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

**SystemCheck\_HSL835\_20110825****DUT: Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL835\_0825 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.798$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.1 °C

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3800; ConvF(8.7, 8.7, 8.7); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=15mm, Pin=250mW/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 3.31 mW/g


**d=15mm, Pin=250mW/Zoom Scan(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 66.2 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 3.90 W/kg

**SAR(1 g) = 2.58 mW/g; SAR(10 g) = 1.68 mW/g**

Maximum value of SAR (measured) = 3.29 mW/g

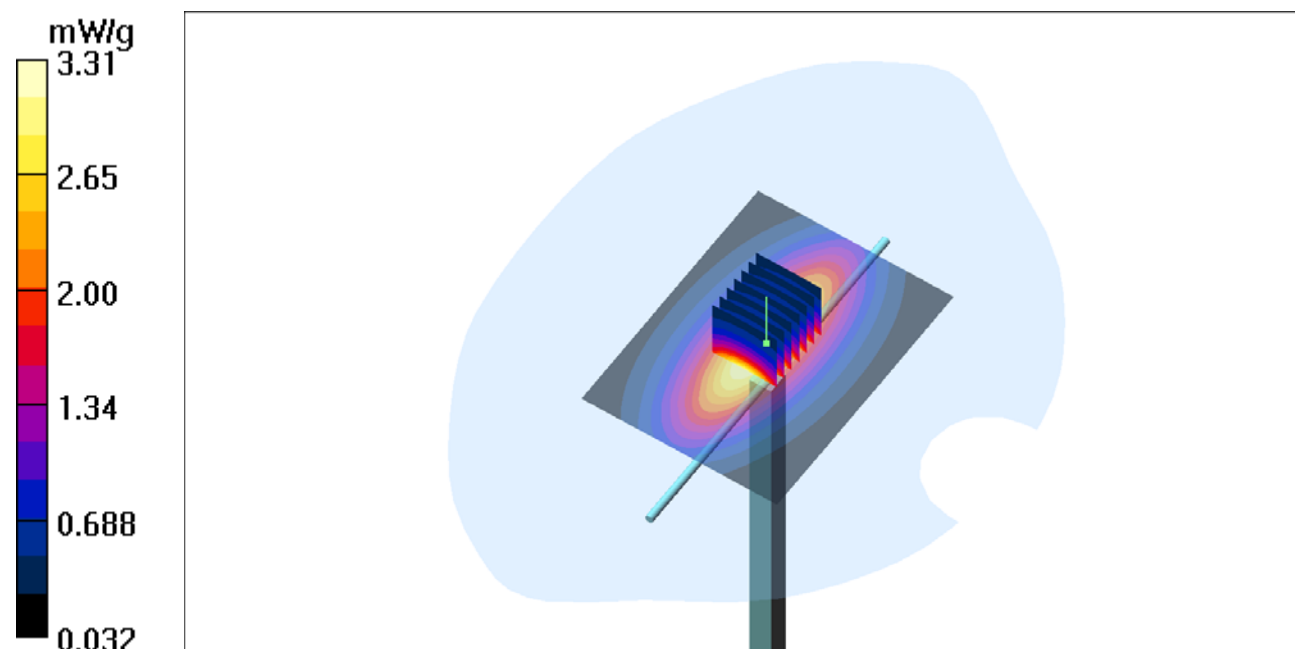

## System Check\_MSL835\_110901

### DUT: Dipole 835 MHz D835V2

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL850\_0901 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.968 \text{ mho/m}$ ;  $\epsilon_r = 54.571$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $22.3^\circ\text{C}$ ; Liquid Temperature :  $21.2^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.12, 9.12, 9.12); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Front; Type: SAM; Serial: TP-1485
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250 mW, dist=2.0mm /Area Scan (61x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (interpolated) =  $3.169 \text{ mW/g}$


**Pin=250 mW, dist=2.0mm /Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $58.119 \text{ V/m}$ ; Power Drift =  $-0.07 \text{ dB}$

Peak SAR (extrapolated) =  $3.610 \text{ W/kg}$

**SAR(1 g) =  $2.4 \text{ mW/g}$ ; SAR(10 g) =  $1.57 \text{ mW/g}$**

Maximum value of SAR (measured) =  $2.596 \text{ mW/g}$

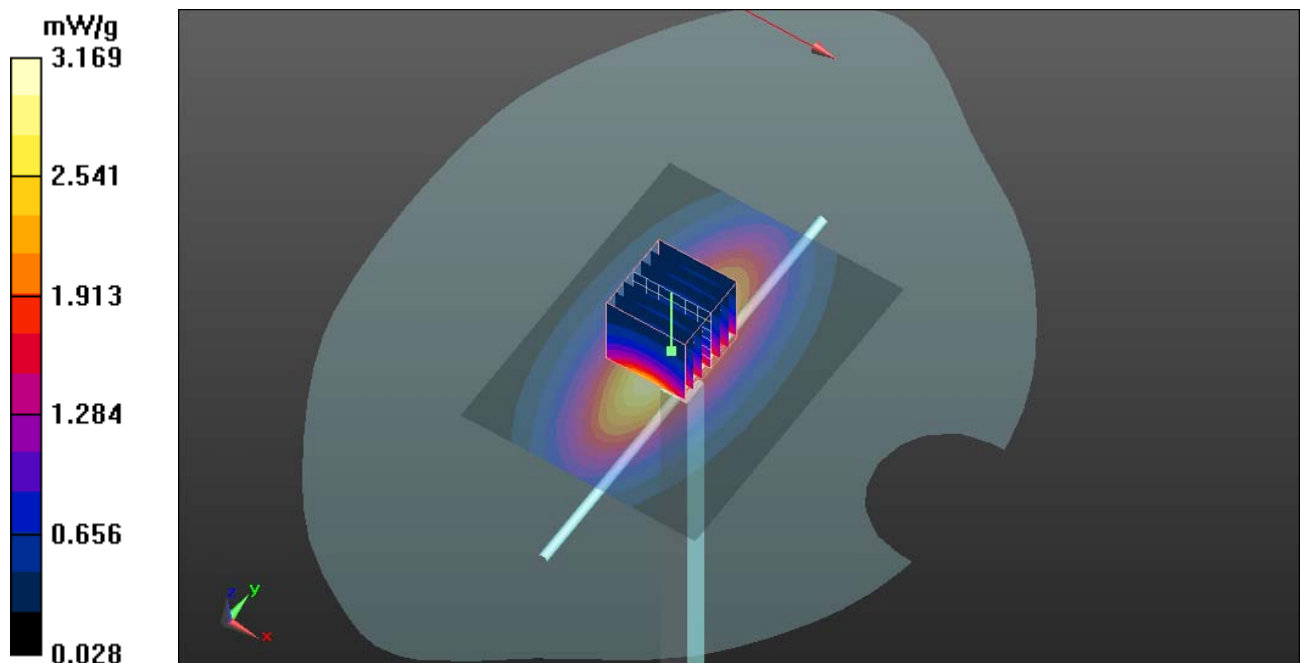

**System Check\_HSL1900\_20110825****DUT: Dipole 1900 MHz**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900\_0825 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.39$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.2 °C

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3800; ConvF(7.46, 7.46, 7.46); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=10mm, Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 16.4 mW/g


**d=10mm, Pin=250mW/Zoom Scan(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.7 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 20.5 W/kg

**SAR(1 g) = 10.8 mW/g; SAR(10 g) = 5.49 mW/g**

Maximum value of SAR (measured) = 15.8 mW/g

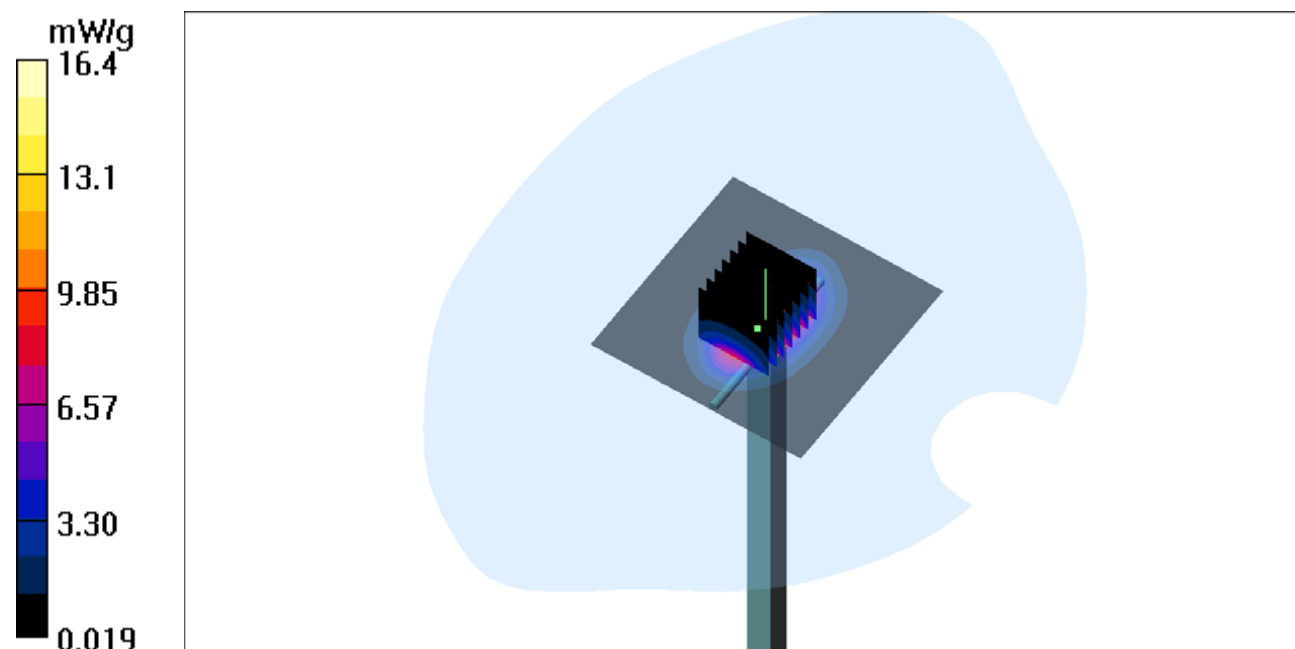

**System Check\_MSL1900\_110901****DUT: Dipole 1900 MHz D1900V2**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL1900\_0901 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.531$  mho/m;  $\epsilon_r = 53.856$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.0 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.2, 7.2, 7.2); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250 mW, dist=2.0mm /Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 14.631 mW/g


**Pin=250 mW, dist=2.0mm /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.951 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 18.829 W/kg

**SAR(1 g) = 10 mW/g; SAR(10 g) = 5.16 mW/g**

Maximum value of SAR (measured) = 11.286 mW/g

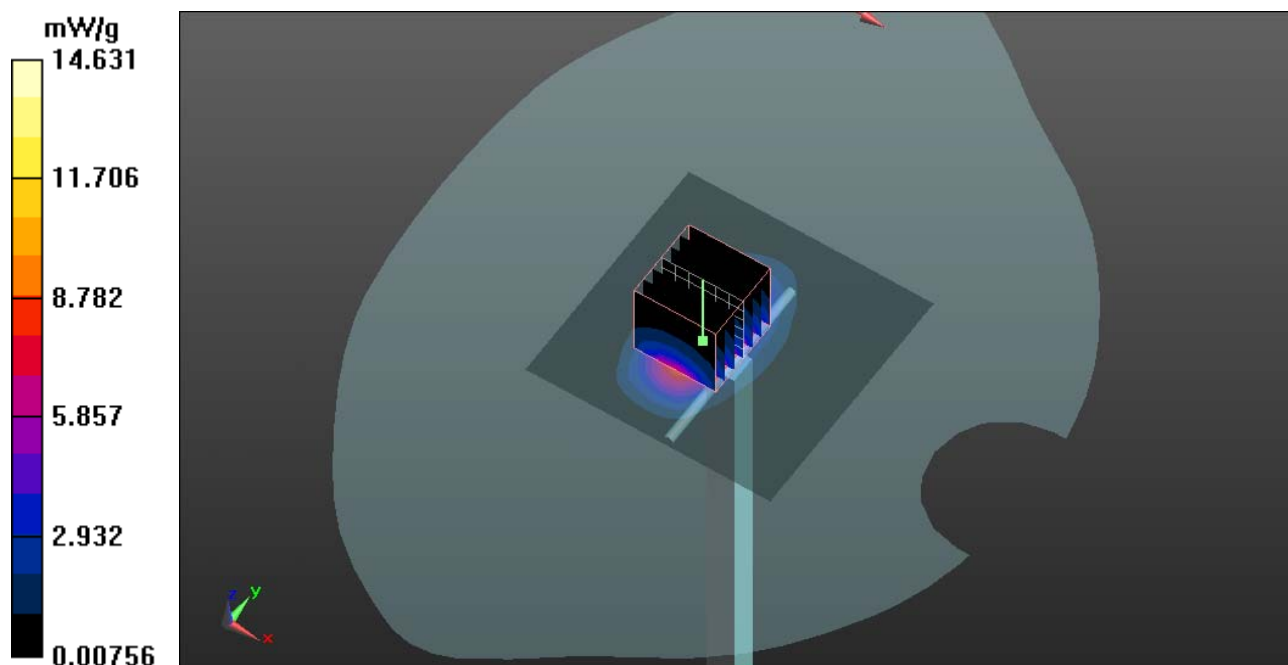

## SystemCheck\_MSL1900\_110906

### DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL1900\_0906 Medium parameters used:  $f = 900$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.3 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN3800; ConvF(6.97, 6.97, 6.97); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=10mm, Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 16.6 mW/g


**d=10mm, Pin=250mW/Zoom Scan(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.4 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 21.0 W/kg

**SAR(1 g) = 11.2 mW/g; SAR(10 g) = 5.65 mW/g**

Maximum value of SAR (measured) = 16.4 mW/g

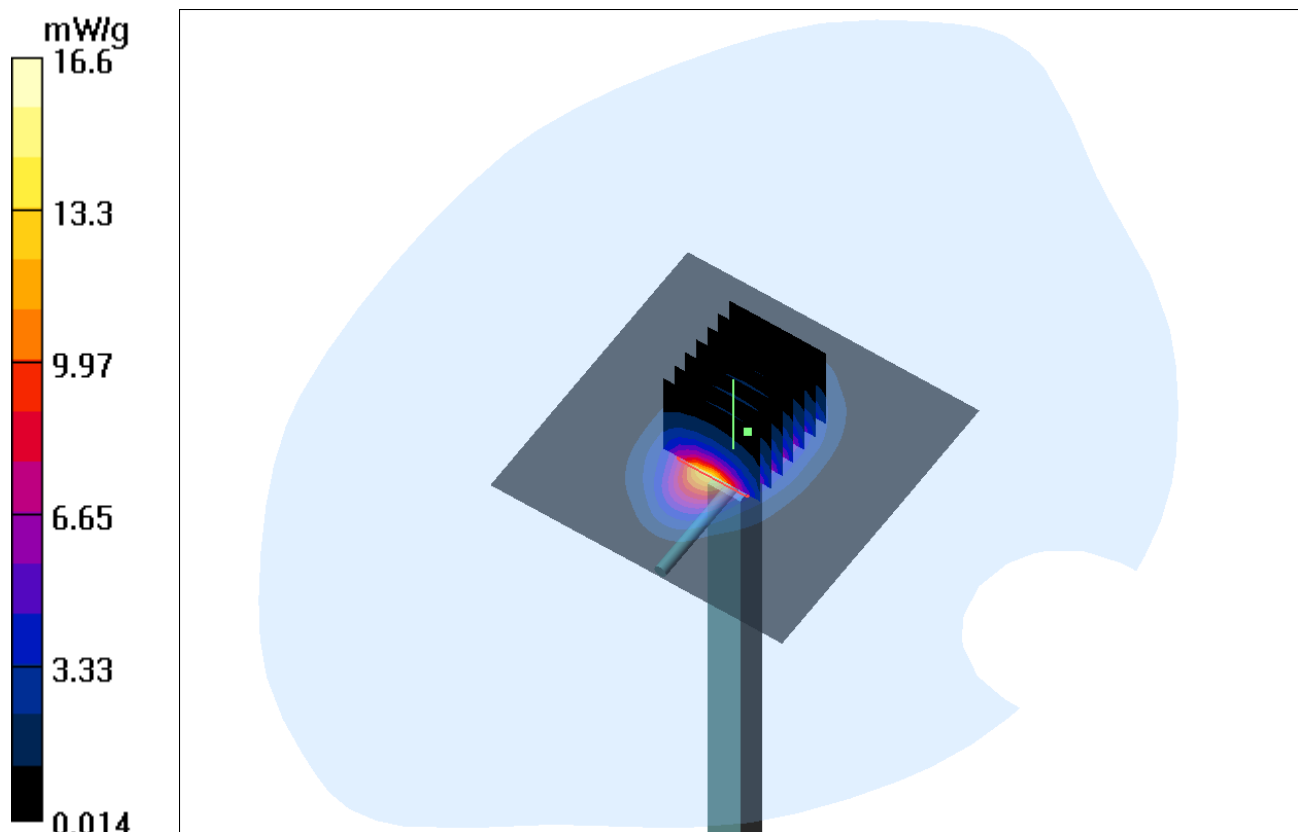

**P12 GSM1900\_Right Cheek\_Ch810\_Sample1\_Battery1****DUT: 110823C01**

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900\_0825 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.2 °C

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3800; ConvF(7.46, 7.46, 7.46); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.724 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.43 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.901 W/kg

**SAR(1 g) = 0.549 mW/g; SAR(10 g) = 0.327 mW/g**

Maximum value of SAR (measured) = 0.697 mW/g

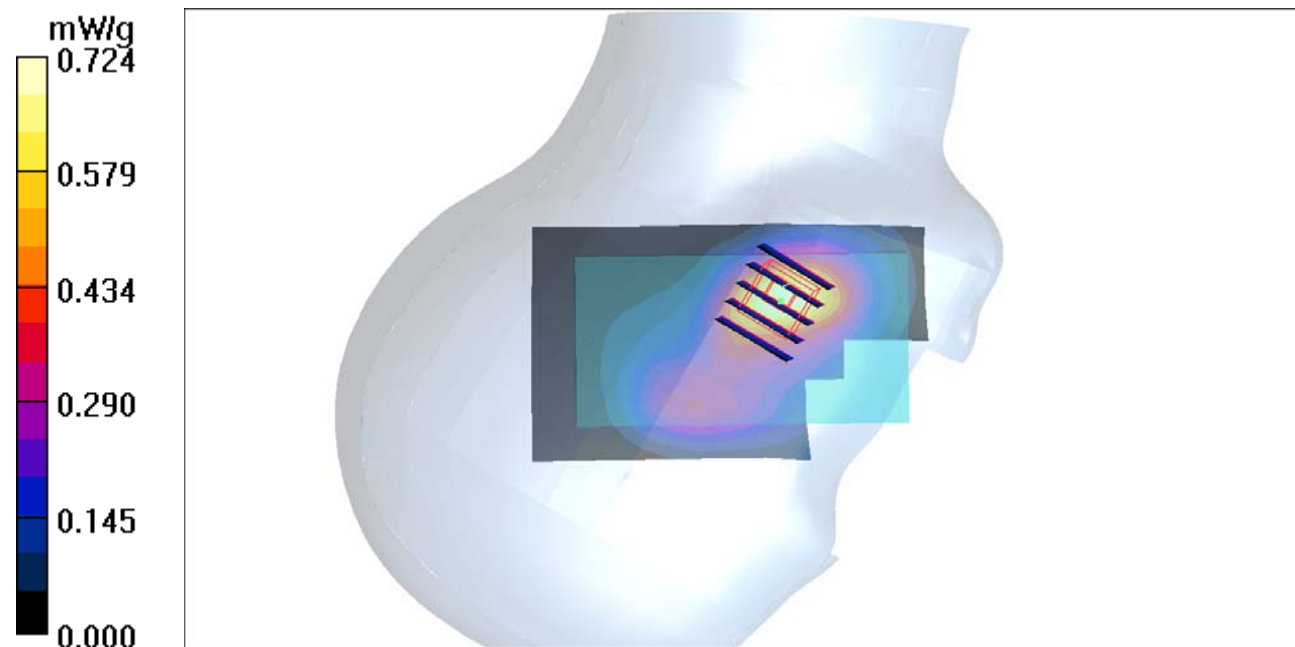

## P12 GSM1900\_Right Cheek\_Ch810\_Sample1\_Battery1\_2D

**DUT: 110823C01**

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900\_0825 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3800; ConvF(7.46, 7.46, 7.46); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.724 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.43 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.901 W/kg

**SAR(1 g) = 0.549 mW/g; SAR(10 g) = 0.327 mW/g**

Maximum value of SAR (measured) = 0.697 mW/g

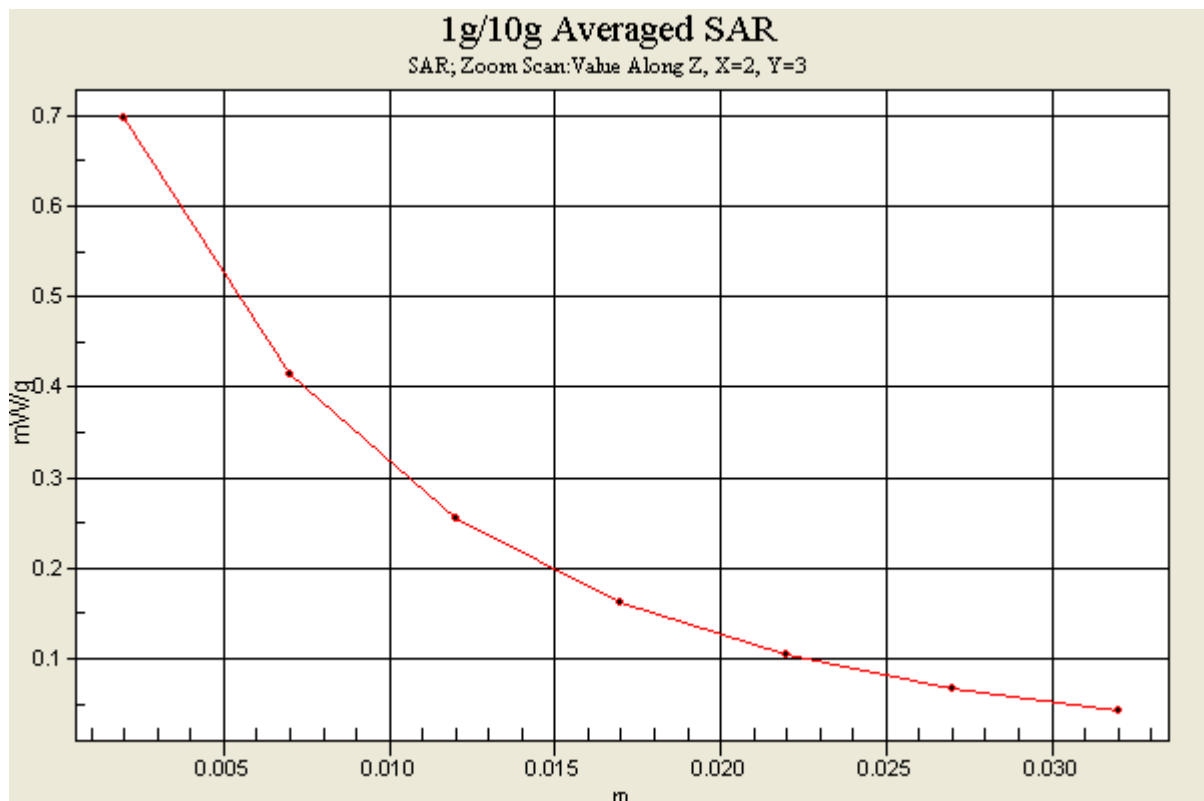

**P13 GSM1900\_Right Tilted\_Ch810\_Sample1\_Battery1****DUT: 110823C01**

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900\_0825 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.2 °C

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3800; ConvF(7.46, 7.46, 7.46); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.312 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.344 W/kg

**SAR(1 g) = 0.228 mW/g; SAR(10 g) = 0.141 mW/g**

Maximum value of SAR (measured) = 0.289 mW/g

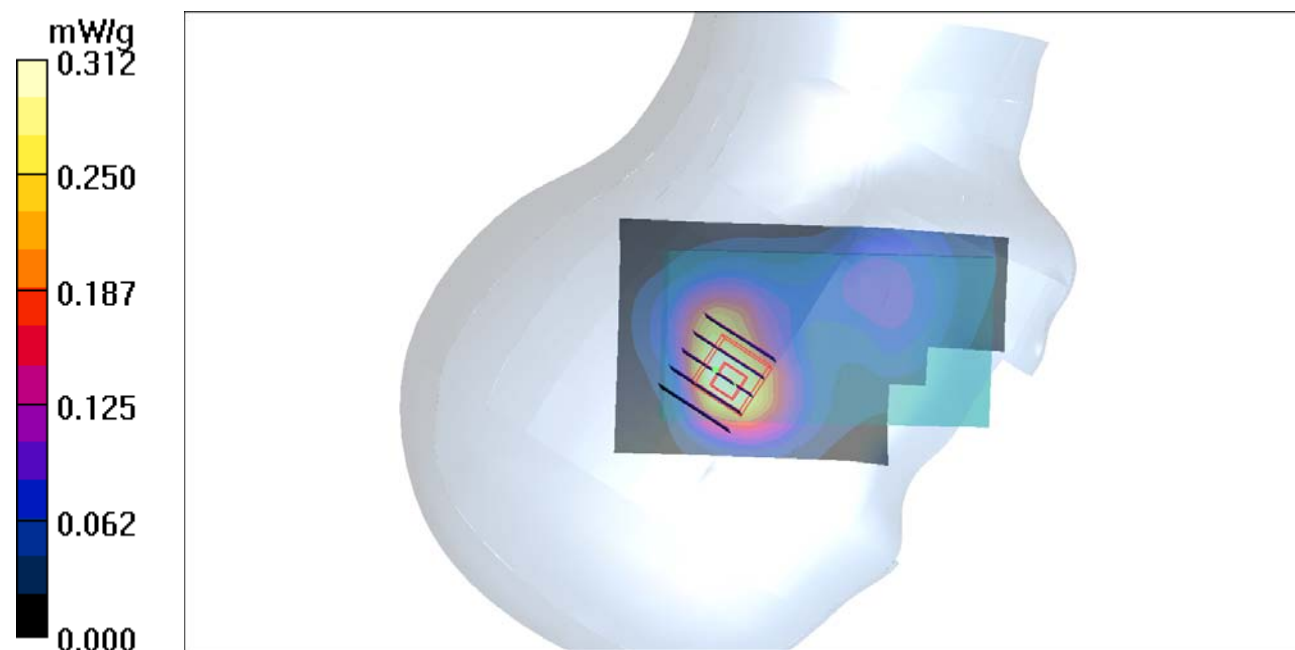

**P14 GSM1900\_Left Cheek\_Ch810\_Sample1\_Battery1****DUT: 110823C01**

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900\_0825 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.2 °C

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3800; ConvF(7.46, 7.46, 7.46); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.388 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.05 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.469 W/kg

**SAR(1 g) = 0.299 mW/g; SAR(10 g) = 0.185 mW/g**

Maximum value of SAR (measured) = 0.376 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.05 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.398 W/kg

**SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.171 mW/g**

Maximum value of SAR (measured) = 0.331 mW/g

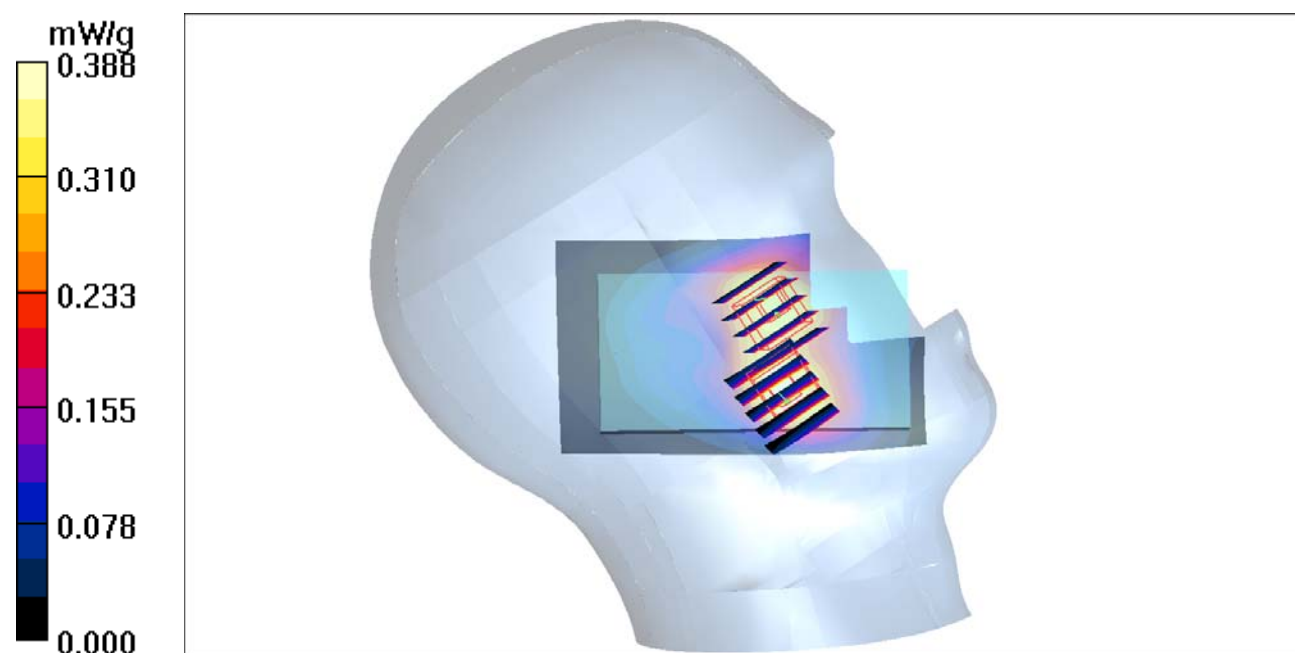

**P15 GSM1900\_Left Tilted\_Ch810\_Sample1\_Battery1****DUT: 110823C01**

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900\_0825 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.2 °C

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3800; ConvF(7.46, 7.46, 7.46); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Front; Type: SAM V4.0; Serial: TP 1654
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch190/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.248 mW/g


**Ch190/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.279 W/kg

**SAR(1 g) = 0.174 mW/g; SAR(10 g) = 0.106 mW/g**

Maximum value of SAR (measured) = 0.230 mW/g

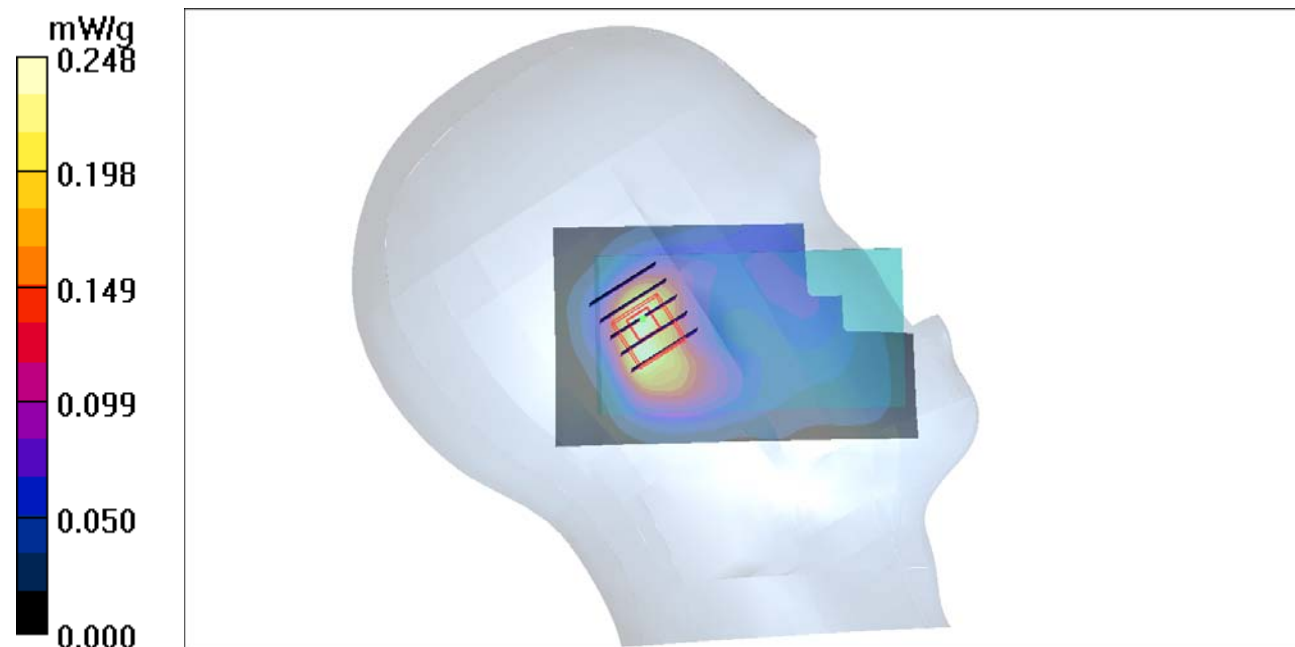

**P01 WCDMA V\_Right Cheek\_Ch4182\_Sample1\_Battery1****DUT: 110823C01**

Communication System: WCDMA850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL850\_0825 Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.901$  mho/m;

$\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.1 °C

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3800; ConvF(8.7, 8.7, 8.7); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch4182/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.345 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.92 V/m; Power Drift = -0.160 dB

Peak SAR (extrapolated) = 0.373 W/kg

**SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.225 mW/g**

Maximum value of SAR (measured) = 0.339 mW/g

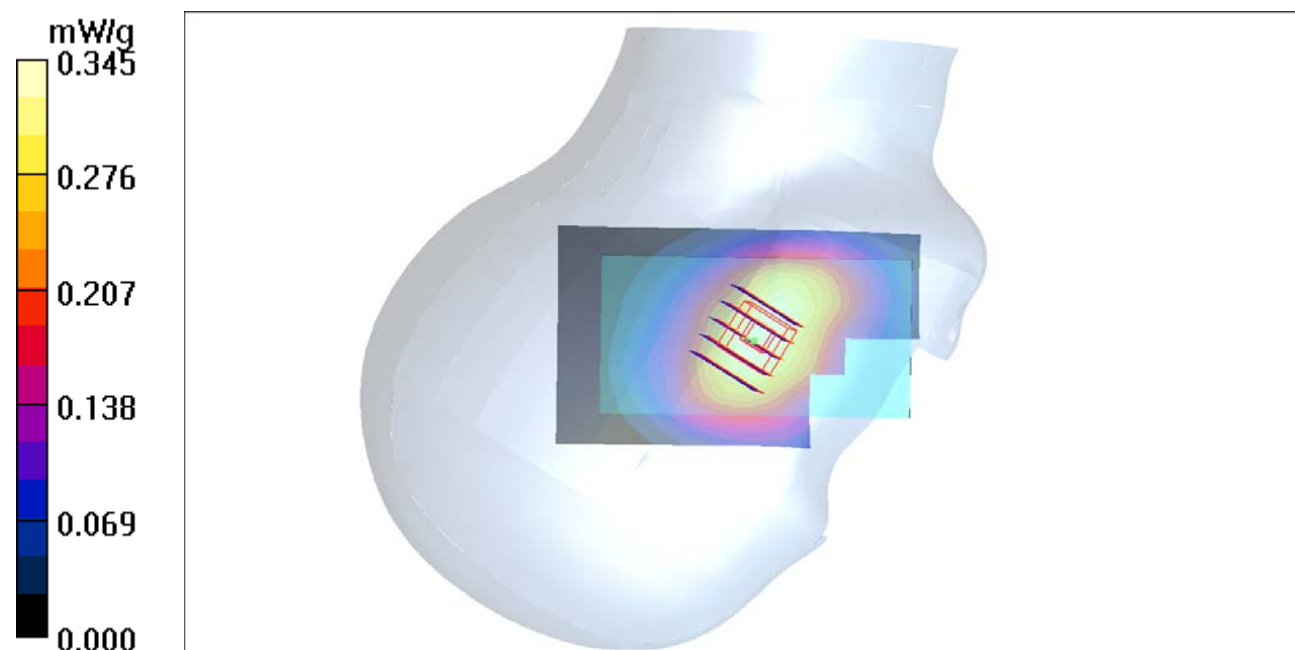

**P02 WCDMA V\_Right Tilted\_Ch4182\_Sample1\_Battery1****DUT: 110823C01**

Communication System: WCDMA850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL850\_0825 Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.901$  mho/m;

$\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.1 °C

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3800; ConvF(8.7, 8.7, 8.7); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch4182/Area Scan (61x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.229 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.252 W/kg

**SAR(1 g) = 0.200 mW/g; SAR(10 g) = 0.153 mW/g**

Maximum value of SAR (measured) = 0.227 mW/g

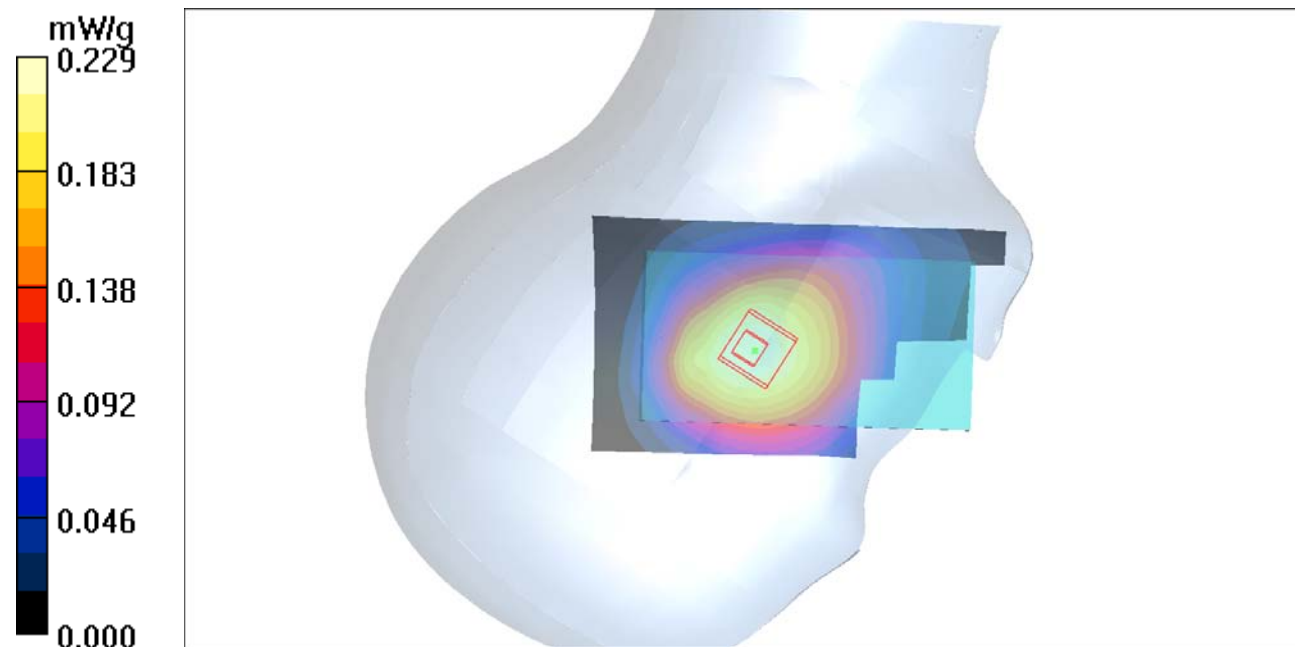

**P03 WCDMA V\_Left Cheek\_Ch4182\_Sample1\_Battery1****DUT: 110823C01**

Communication System: WCDMA850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL850\_0825 Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.901$  mho/m;

$\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.1 °C

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3800; ConvF(8.7, 8.7, 8.7); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch4182/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.409 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.85 V/m; Power Drift = 0.101 dB

Peak SAR (extrapolated) = 0.446 W/kg

**SAR(1 g) = 0.357 mW/g; SAR(10 g) = 0.272 mW/g**

Maximum value of SAR (measured) = 0.407 mW/g

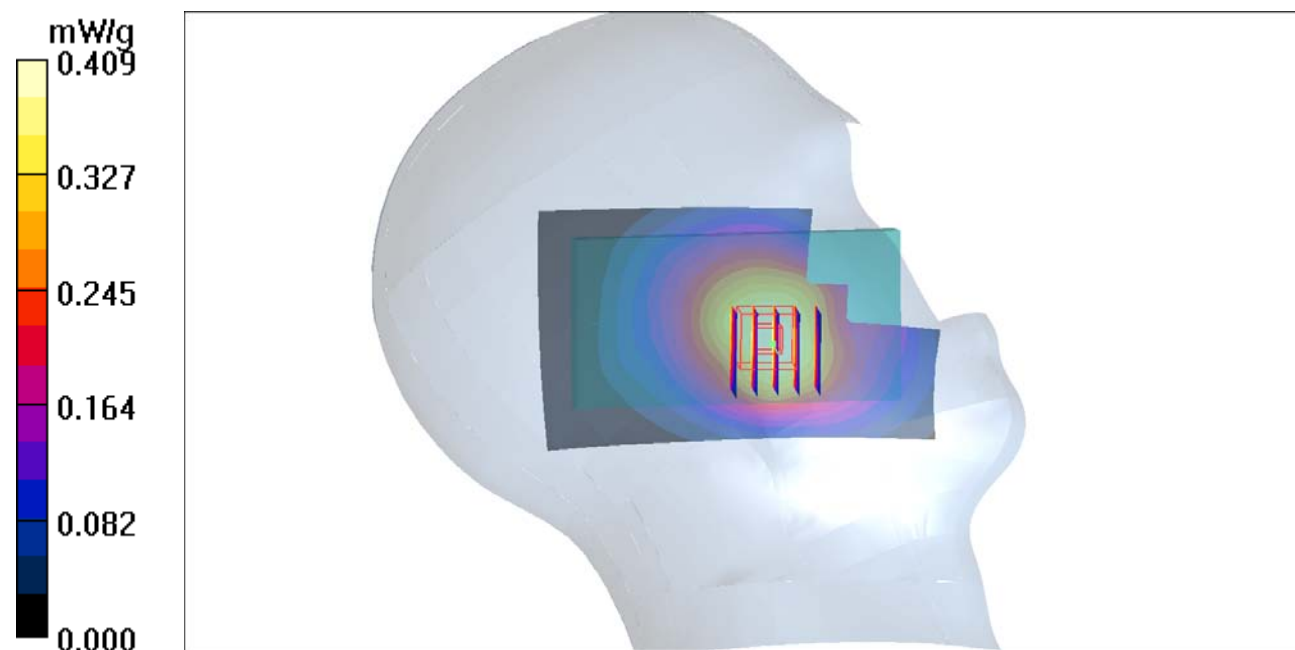

## P03 WCDMA V\_Left Cheek\_Ch4182\_Sample1\_Battery1\_2D

**DUT: 110823C01**

Communication System: WCDMA850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL850\_0825 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.901$  mho/m;  $\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3800; ConvF(8.7, 8.7, 8.7); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch4182/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.409 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.85 V/m; Power Drift = 0.101 dB

Peak SAR (extrapolated) = 0.446 W/kg

**SAR(1 g) = 0.357 mW/g; SAR(10 g) = 0.272 mW/g**

Maximum value of SAR (measured) = 0.407 mW/g

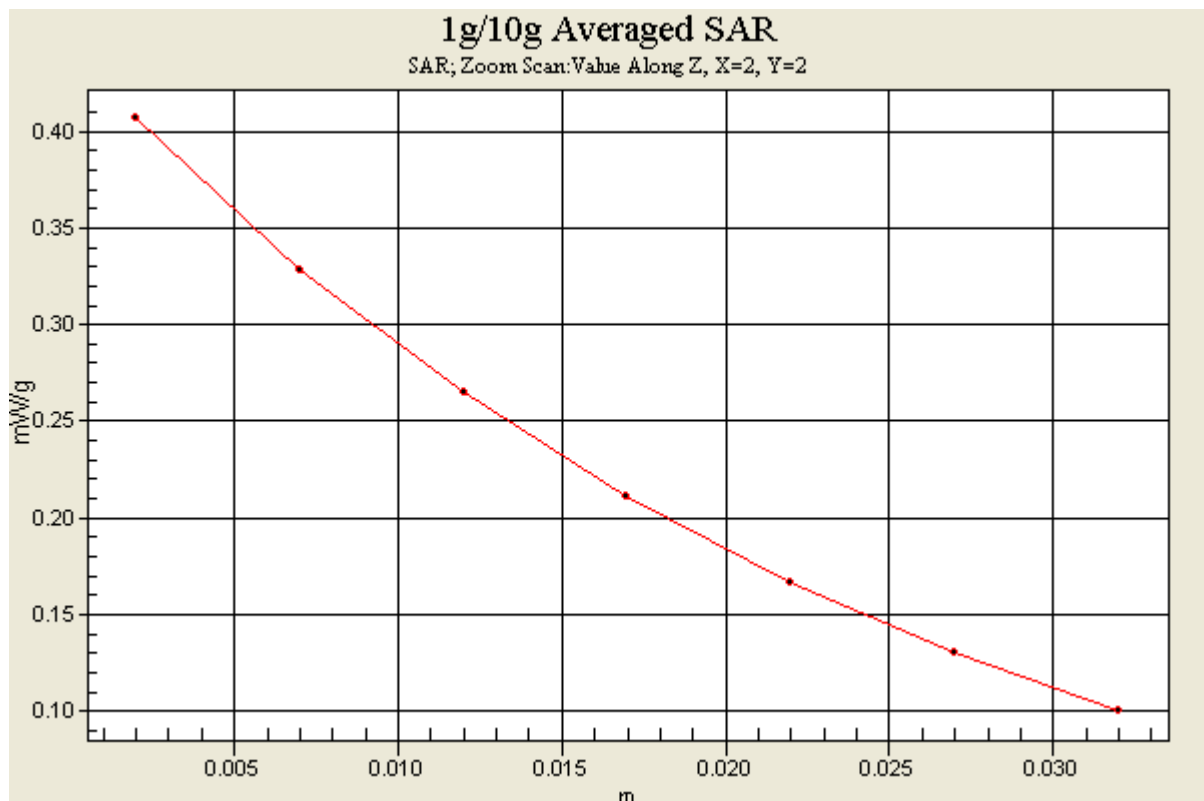

**P04 WCDMA V\_Left Tilted\_Ch4182\_Sample1\_Battery1****DUT: 110823C01**

Communication System: WCDMA850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL850\_0825 Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.901$  mho/m;

$\epsilon_r = 40.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.9 °C; Liquid Temperature : 22.1 °C

**DASY4 Configuration:**

- Probe: EX3DV4 - SN3800; ConvF(8.7, 8.7, 8.7); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch4182/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.263 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.288 W/kg

**SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.174 mW/g**

Maximum value of SAR (measured) = 0.262 mW/g

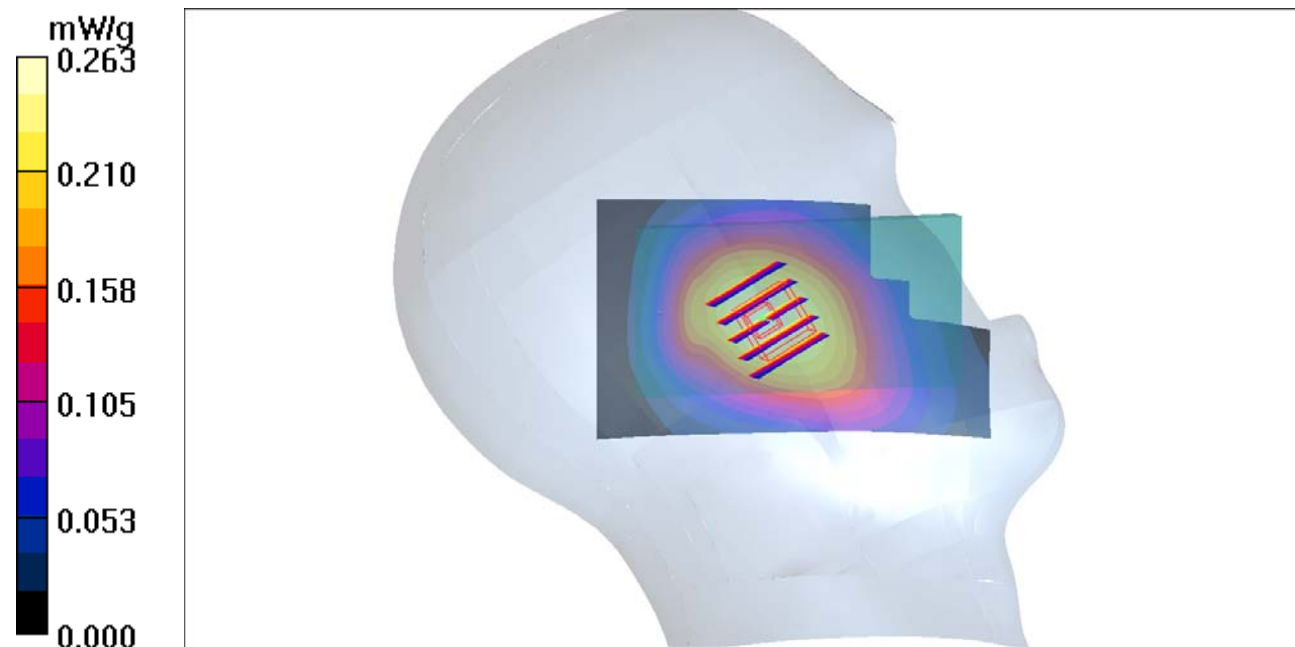

**P12 GSM1900\_GPRS 8\_Front Face\_1cm\_Ch810\_sample1\_battery1****DUT: 110823C01**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: MSL1900\_0901 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.542$  mho/m;  $\epsilon_r = 53.834$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.0 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.2, 7.2, 7.2); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.408 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.336 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.504 W/kg

**SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.189 mW/g**

Maximum value of SAR (measured) = 0.398 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.336 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.343 W/kg

**SAR(1 g) = 0.220 mW/g; SAR(10 g) = 0.135 mW/g**

Maximum value of SAR (measured) = 0.279 mW/g

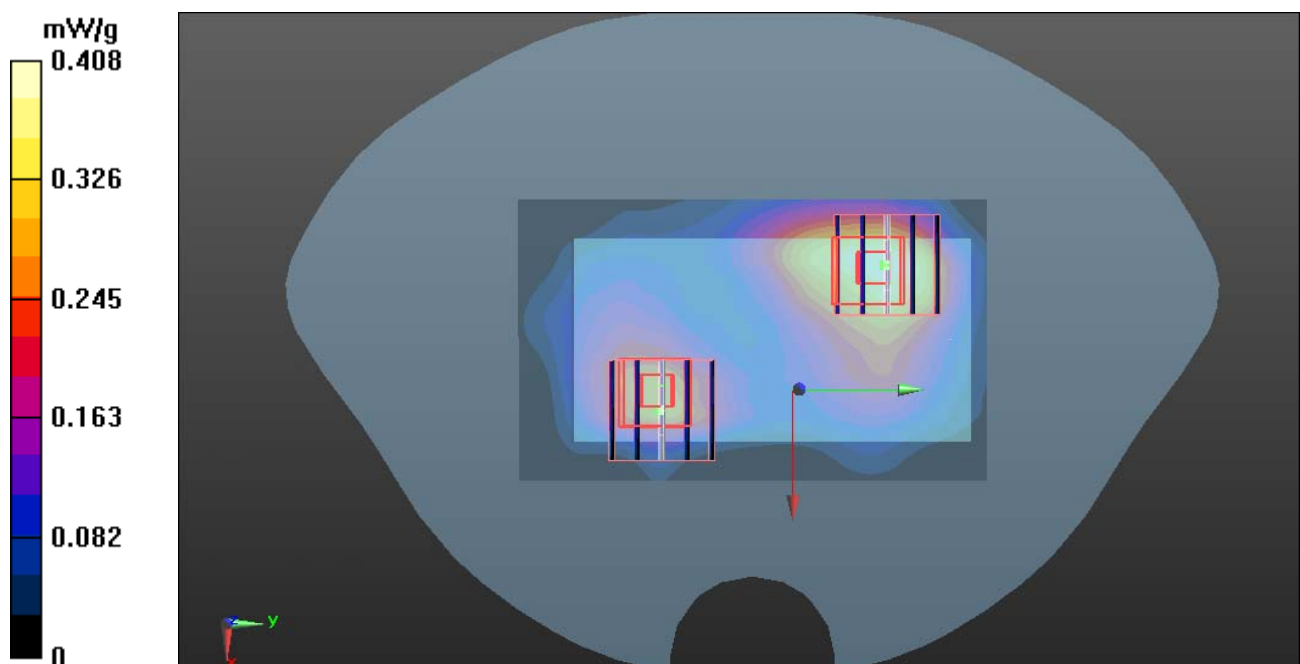

**P13 GSM1900\_GPRS 8\_Rear Face\_1cm\_Ch810\_sample1\_battery1****DUT: 110823C01**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: MSL1900\_0901 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.542$  mho/m;  $\epsilon_r = 53.834$ ;  $\rho$

$= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.0 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3650; ConvF(7.2, 7.2, 7.2); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.554 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.992 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.647 W/kg

**SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.255 mW/g**

Maximum value of SAR (measured) = 0.522 mW/g

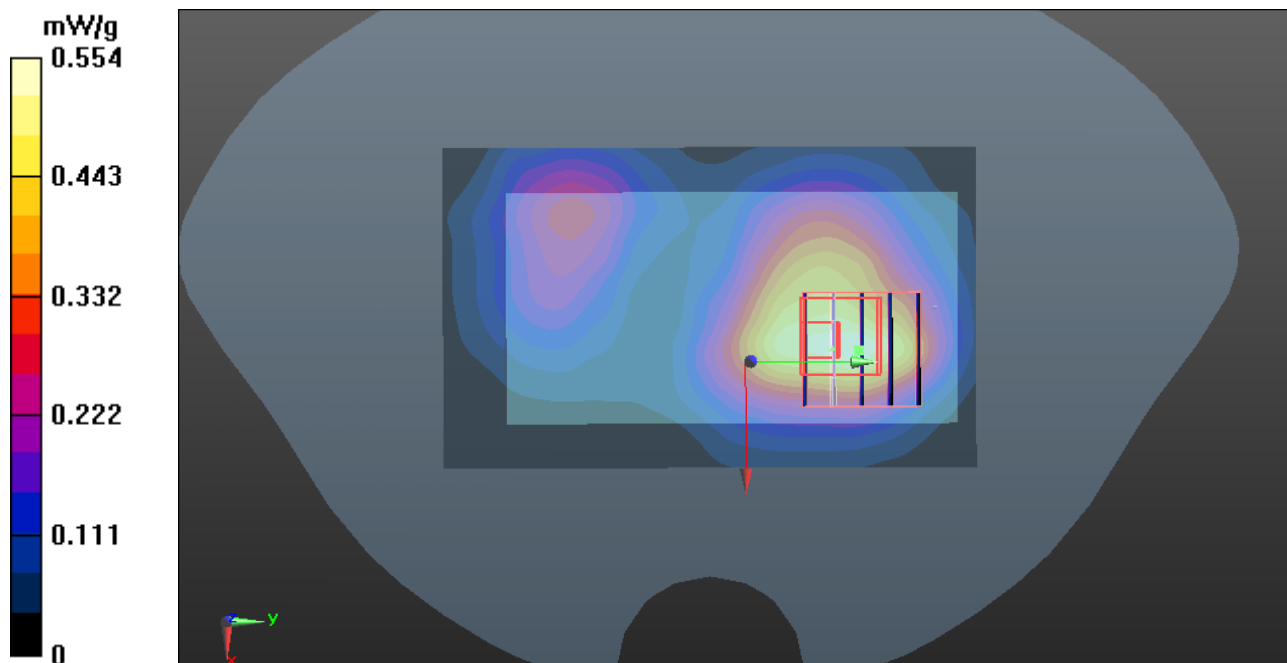

**P14 GSM1900\_GPRS 8\_Left Side\_1cm\_Ch810\_sample1\_battery1****DUT: 110823C01**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: MSL1900\_0901 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.542$  mho/m;  $\epsilon_r = 53.834$ ;  $\rho$  $= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.0 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(7.2, 7.2, 7.2); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Left; Type: SAM; Serial: 1202
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (41x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.211 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.339 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.256 W/kg

**SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.094 mW/g**

Maximum value of SAR (measured) = 0.210 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.339 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.228 W/kg

**SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.086 mW/g**

Maximum value of SAR (measured) = 0.186 mW/g

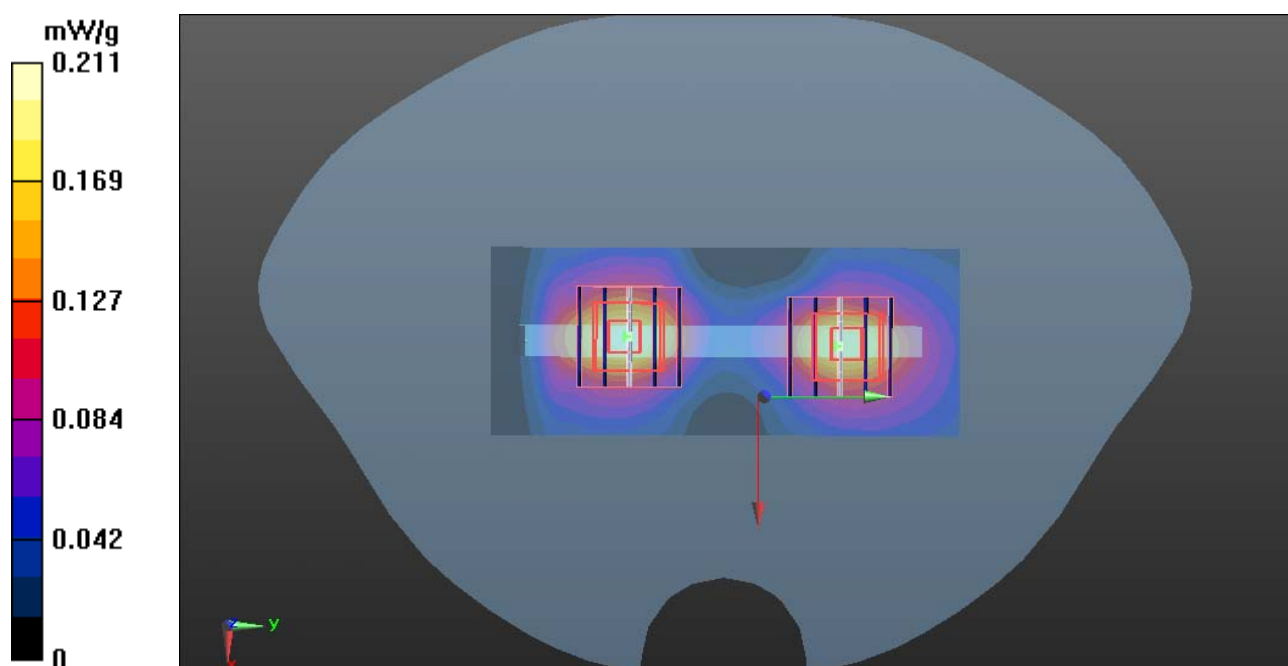

## P19 GSM1900\_GPRS 8\_Right Side\_1cm\_Ch810\_Sample1\_Battery1

### DUT: 110823C01

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL1900\_0906 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 52.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.3 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN3800; ConvF(6.97, 6.97, 6.97); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (41x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.444 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.531 W/kg

**SAR(1 g) = 0.322 mW/g; SAR(10 g) = 0.186 mW/g**

Maximum value of SAR (measured) = 0.427 mW/g

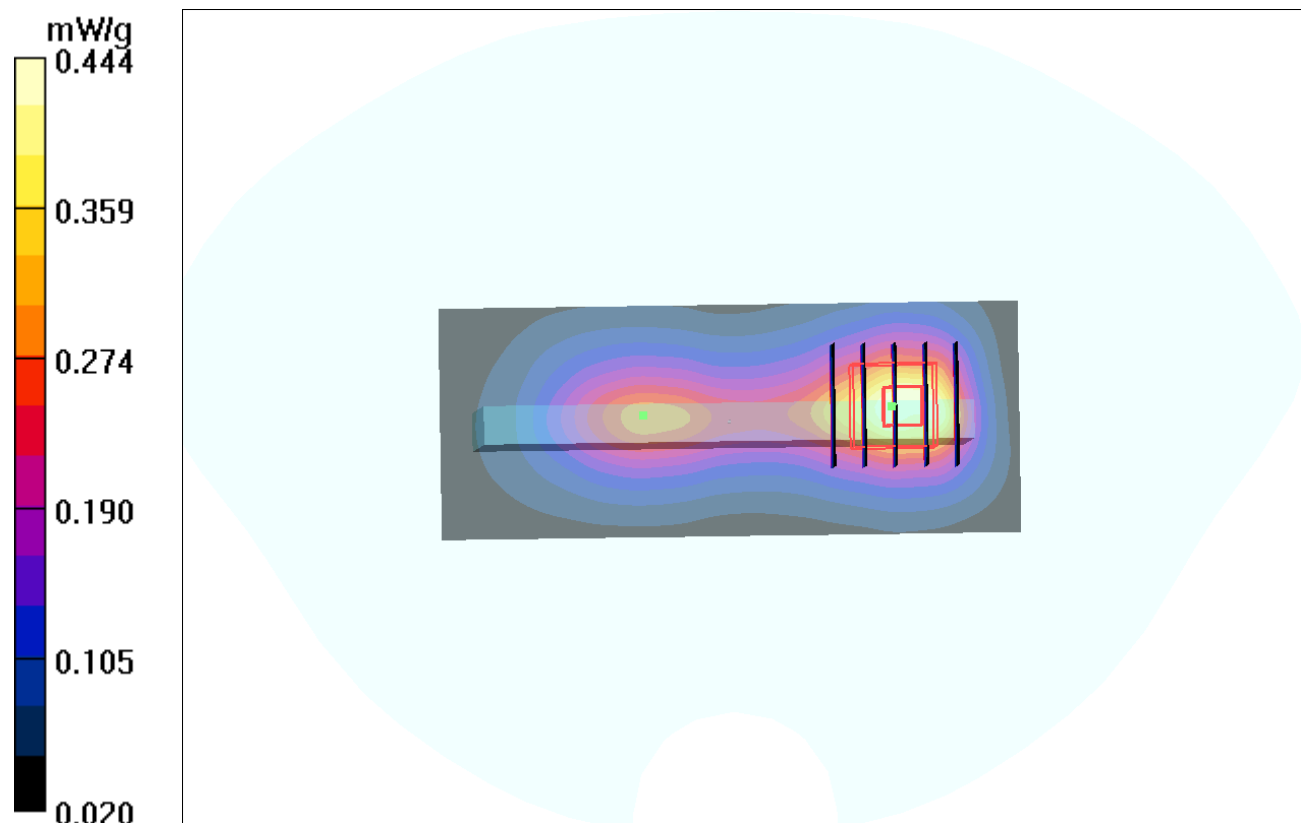

## P20 GSM1900\_GPRS 8\_Top Side\_1cm\_Ch810\_Sample1\_Battery1

### DUT: 110823C01

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL1900\_0906 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 52.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.3 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN3800; ConvF(6.97, 6.97, 6.97); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.103 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.70 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.121 W/kg

**SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.046 mW/g**

Maximum value of SAR (measured) = 0.100 mW/g

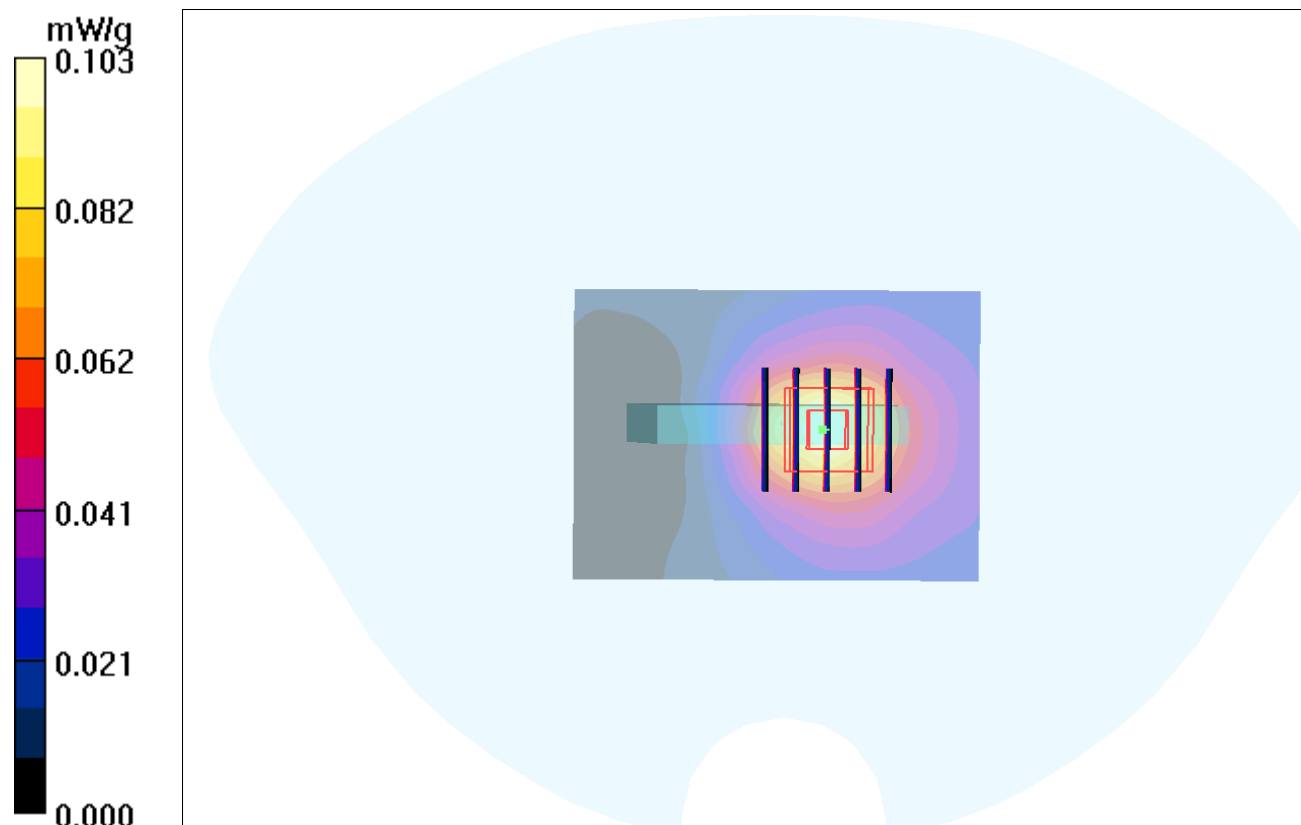

## P21 GSM1900\_GPRS 8\_Down Side\_1cm\_Ch810\_Sample1\_Battery1

### DUT: 110823C01

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL1900\_0906 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 52.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.3 °C

#### DASY4 Configuration:

- Probe: EX3DV4 - SN3800; ConvF(6.97, 6.97, 6.97); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.435 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.500 W/kg

**SAR(1 g) = 0.287 mW/g; SAR(10 g) = 0.160 mW/g**

Maximum value of SAR (measured) = 0.396 mW/g

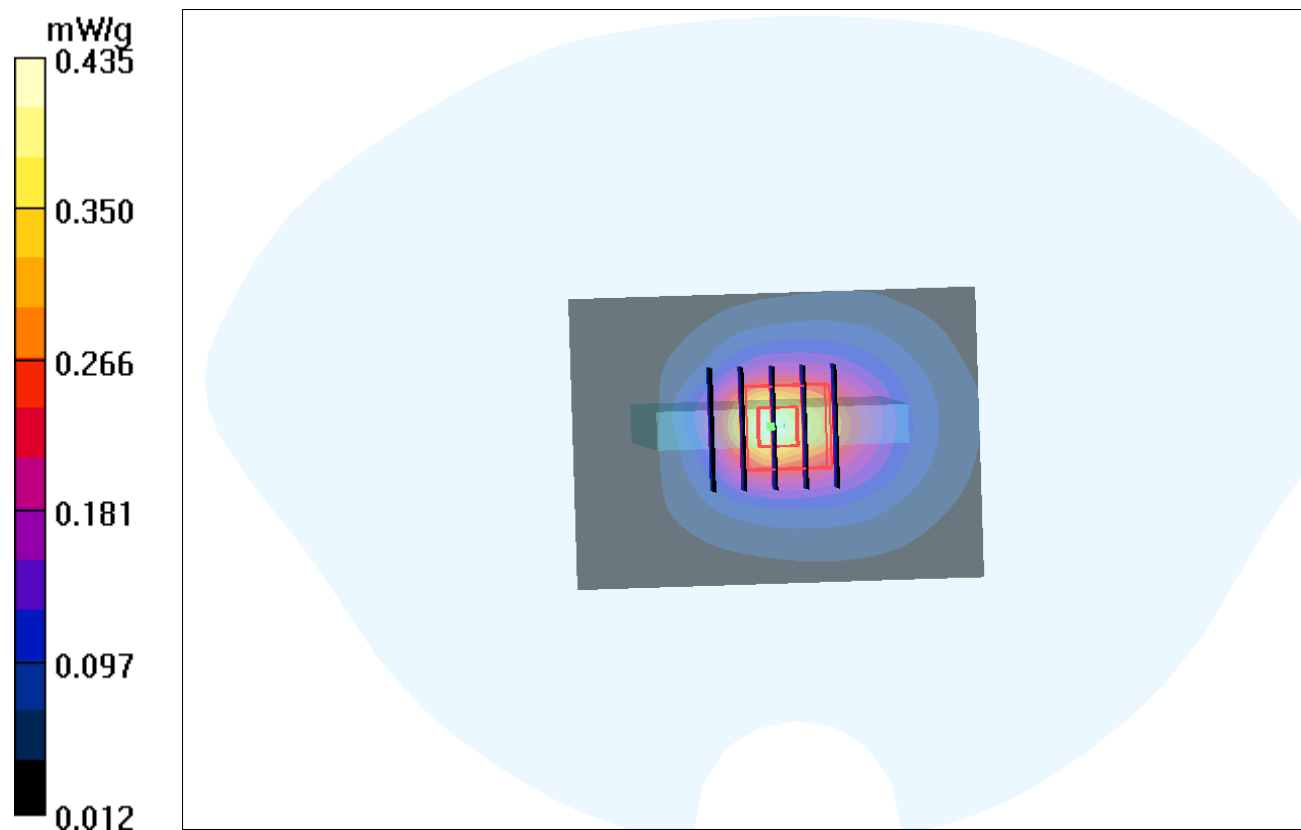

## P22 GSM1900\_GPRS 8\_Rear Face\_1cm\_Ch810\_Sample1\_Battery1

**DUT: 110823C01**

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL1900\_0906 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 52.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C ; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3800; ConvF(6.97, 6.97, 6.97); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.740 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.864 W/kg

**SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.313 mW/g**

Maximum value of SAR (measured) = 0.676 mW/g

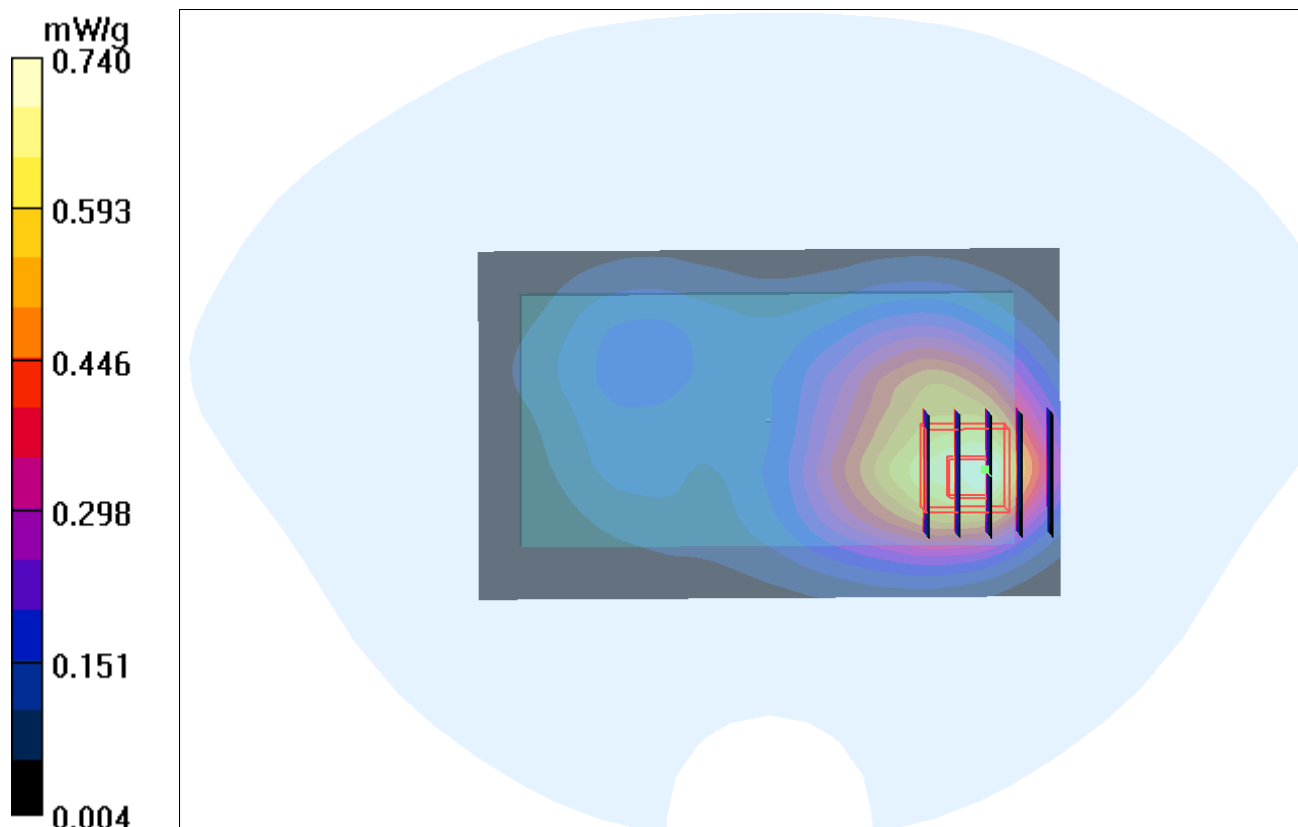

## P22 GSM1900\_GPRS 8\_Rear Face\_1cm\_Ch810\_Sample1\_Battery1\_2D

**DUT: 110823C01**

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL1900\_0906 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 52.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.2 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3800; ConvF(6.97, 6.97, 6.97); Calibrated: 2011/8/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2010/10/4
- Phantom: SAM Phantom\_Left; Type: SAM V4.0; Serial: TP 1652
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch810/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.740 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.864 W/kg

**SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.313 mW/g**

Maximum value of SAR (measured) = 0.676 mW/g

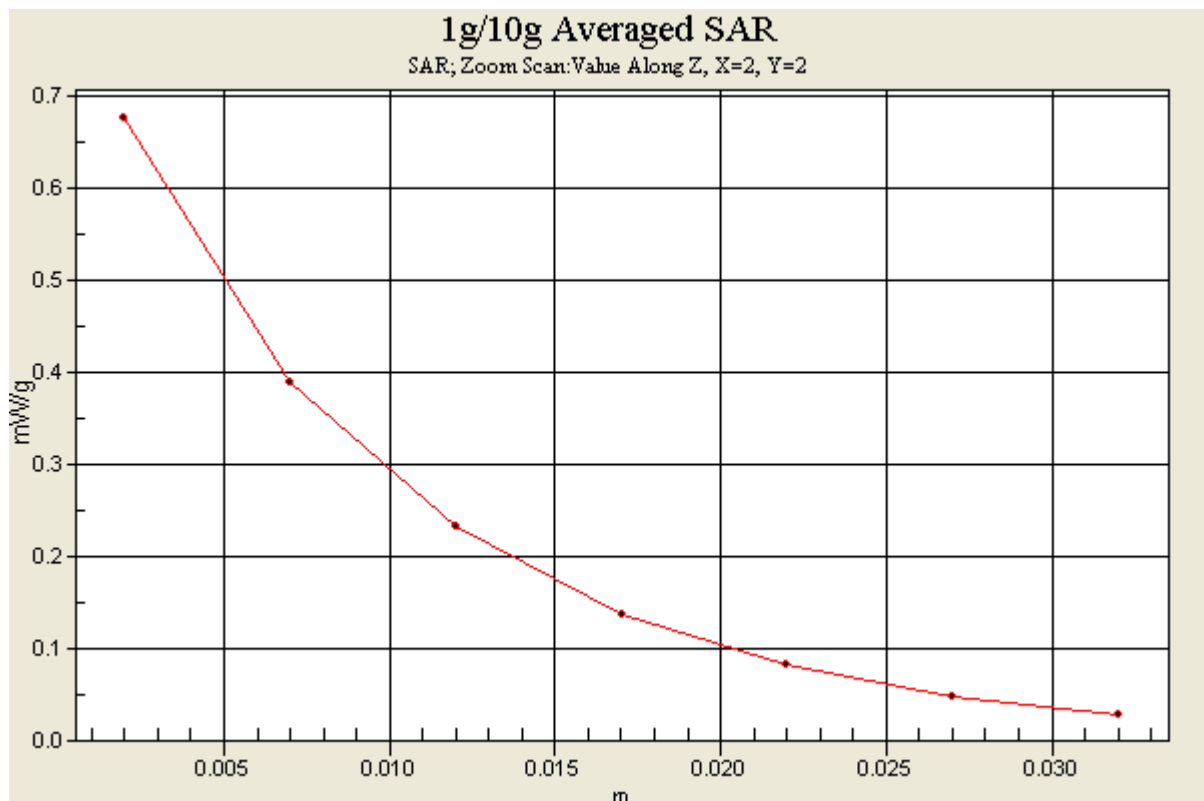

**P05 WCDMA V\_Front Face\_1cm\_Ch4182\_sample1\_battery1****DUT: 110823C01**

Communication System: WCDMA V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL850\_0901 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 54.549$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3650; ConvF(9.12, 9.12, 9.12); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Front; Type: SAM; Serial: TP-1485
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.450 mW/g

**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.193 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.493 W/kg

**SAR(1 g) = 0.393 mW/g; SAR(10 g) = 0.304 mW/g**

Maximum value of SAR (measured) = 0.448 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.193 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.475 W/kg

**SAR(1 g) = 0.317 mW/g; SAR(10 g) = 0.199 mW/g**

Maximum value of SAR (measured) = 0.409 mW/g

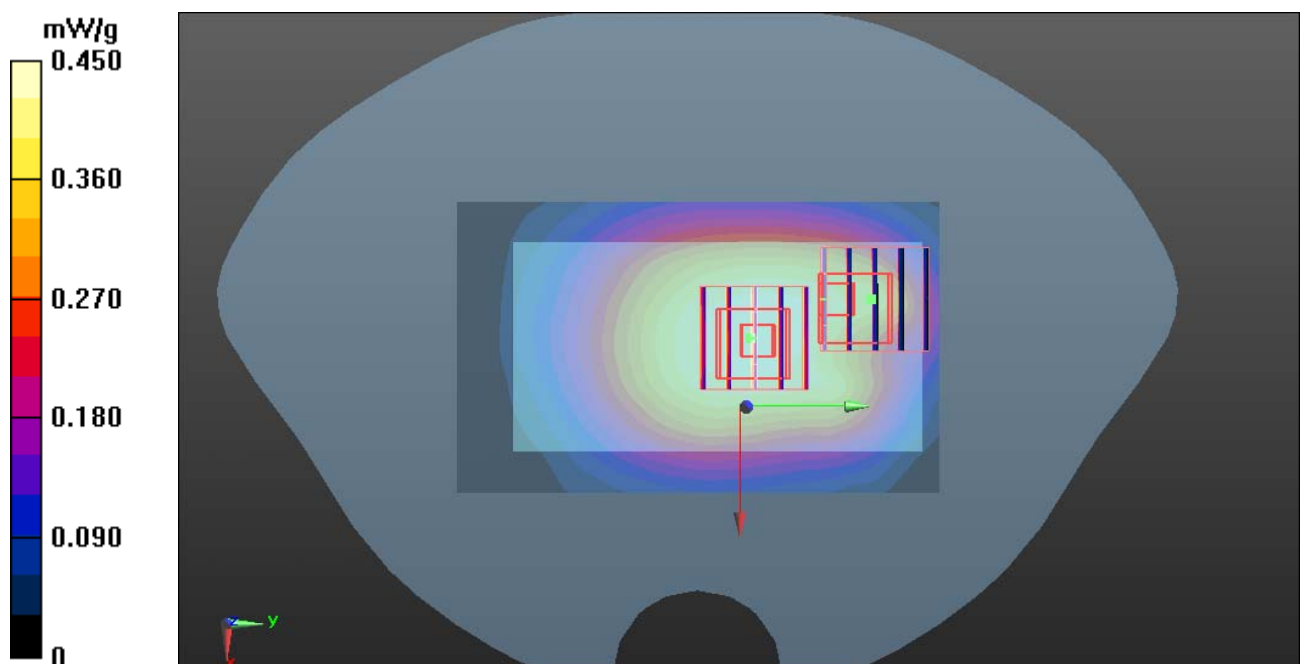

**P06 WCDMA V\_Rear Face\_1cm\_Ch4182\_sample1\_battery1****DUT: 110823C01**

Communication System: WCDMA V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL850\_0901 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 54.549$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3650; ConvF(9.12, 9.12, 9.12); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Front; Type: SAM; Serial: TP-1485
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.579 mW/g

**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.545 V/m; Power Drift = -0.0073 dB

Peak SAR (extrapolated) = 0.641 W/kg

**SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.383 mW/g**

Maximum value of SAR (measured) = 0.581 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.545 V/m; Power Drift = -0.0073 dB

Peak SAR (extrapolated) = 0.583 W/kg

**SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.208 mW/g**

Maximum value of SAR (measured) = 0.478 mW/g

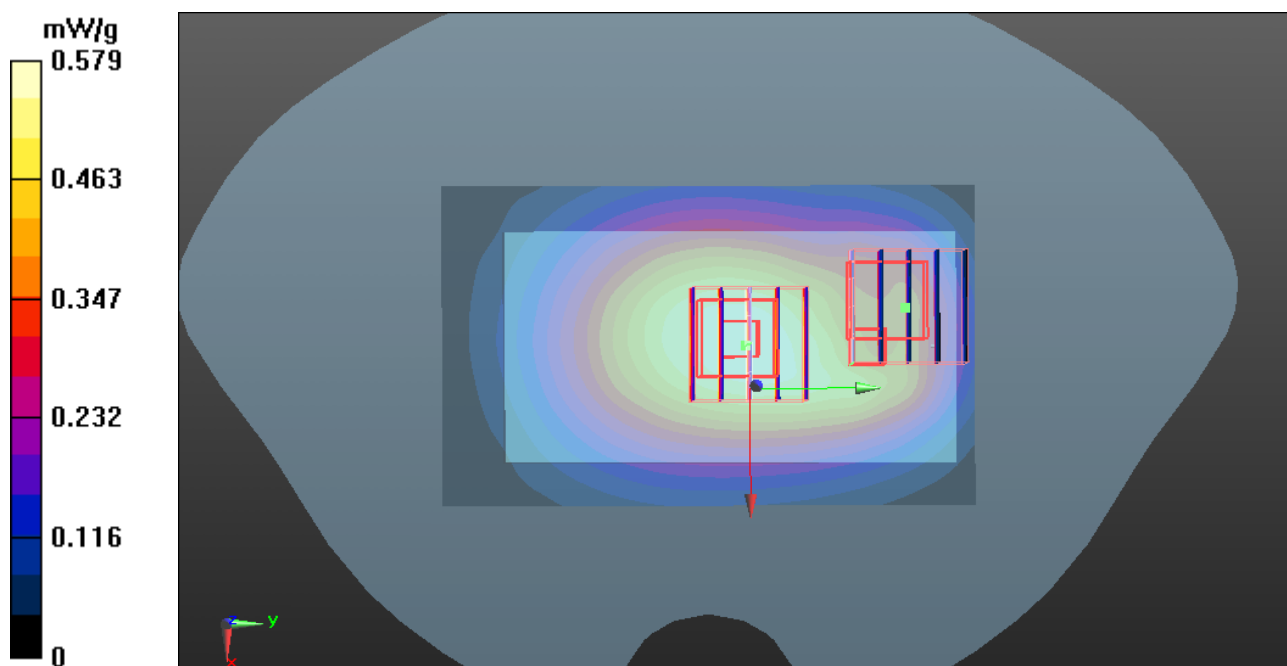

**P06 WCDMA V\_Rear Face\_1cm\_Ch4182\_sample1\_battery1\_2D****DUT: 110823C01**

Communication System: WCDMA V; Frequency: 836.4 MHz; Duty Cycle: 1:1  
Medium: MSL850\_0901 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.969$  mho/m;

$\epsilon_r = 54.549$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.12, 9.12, 9.12); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Front; Type: SAM; Serial: TP-1485
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.579 mW/g

**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.545 V/m; Power Drift = -0.0073 dB

Peak SAR (extrapolated) = 0.641 W/kg

**SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.383 mW/g**

Maximum value of SAR (measured) = 0.581 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.545 V/m; Power Drift = -0.0073 dB

Peak SAR (extrapolated) = 0.583 W/kg

**SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.208 mW/g**

Maximum value of SAR (measured) = 0.478 mW/g

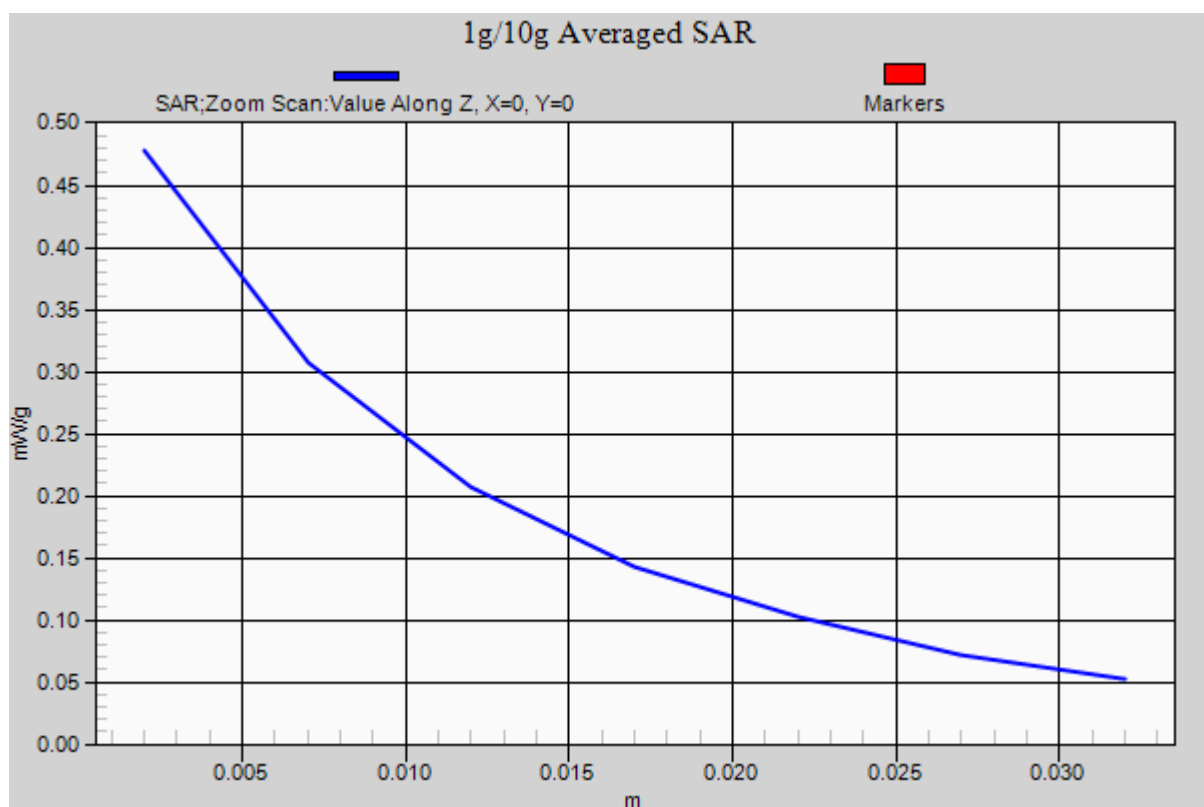

**P07 WCDMA V\_Left Side\_1cm\_Ch4182\_sample1\_battery1****DUT: 110823C01**

Communication System: WCDMA V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL850\_0901 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 54.549$ ;  $\rho$

$= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.12, 9.12, 9.12); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Front; Type: SAM; Serial: TP-1485
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (41x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.594 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.686 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.672 W/kg

**SAR(1 g) = 0.479 mW/g; SAR(10 g) = 0.333 mW/g**

Maximum value of SAR (measured) = 0.514 mW/g

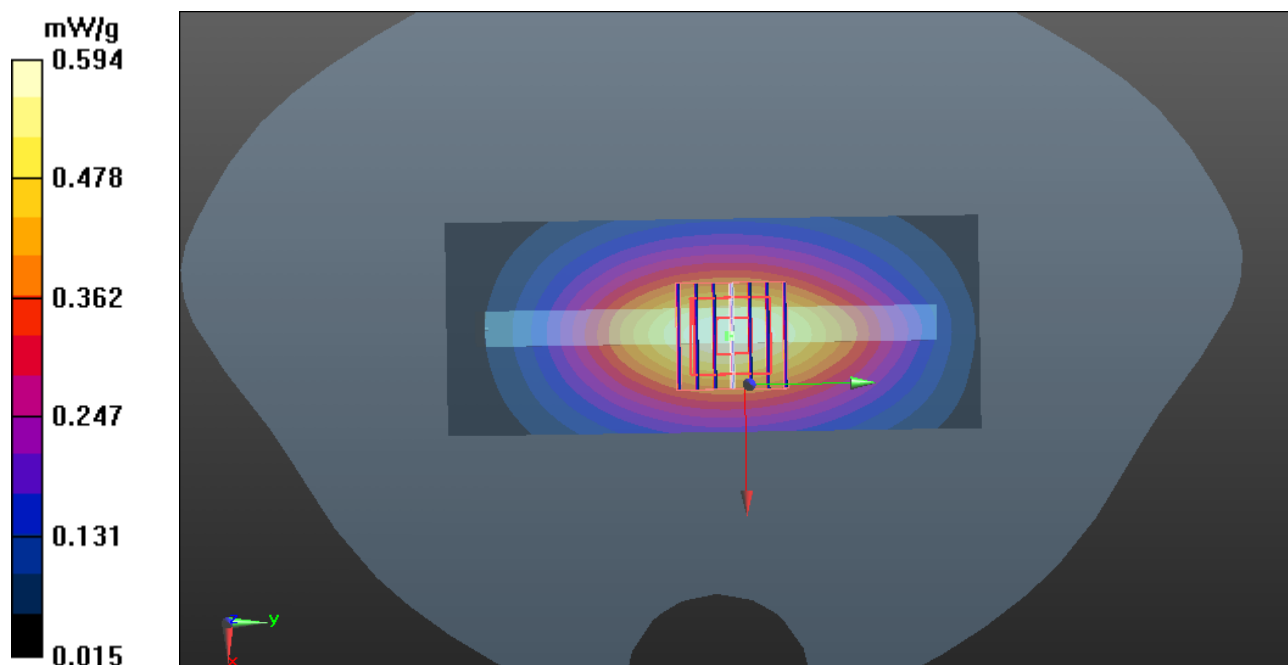

**P08 WCDMA V\_Right Side\_1cm\_Ch4182\_sample1\_battery1****DUT: 110823C01**

Communication System: WCDMA V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL850\_0901 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 54.549$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.12, 9.12, 9.12); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Front; Type: SAM; Serial: TP-1485
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (41x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.425 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.251 V/m; Power Drift = -0.0044 dB

Peak SAR (extrapolated) = 0.486 W/kg

**SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.236 mW/g**

Maximum value of SAR (measured) = 0.420 mW/g

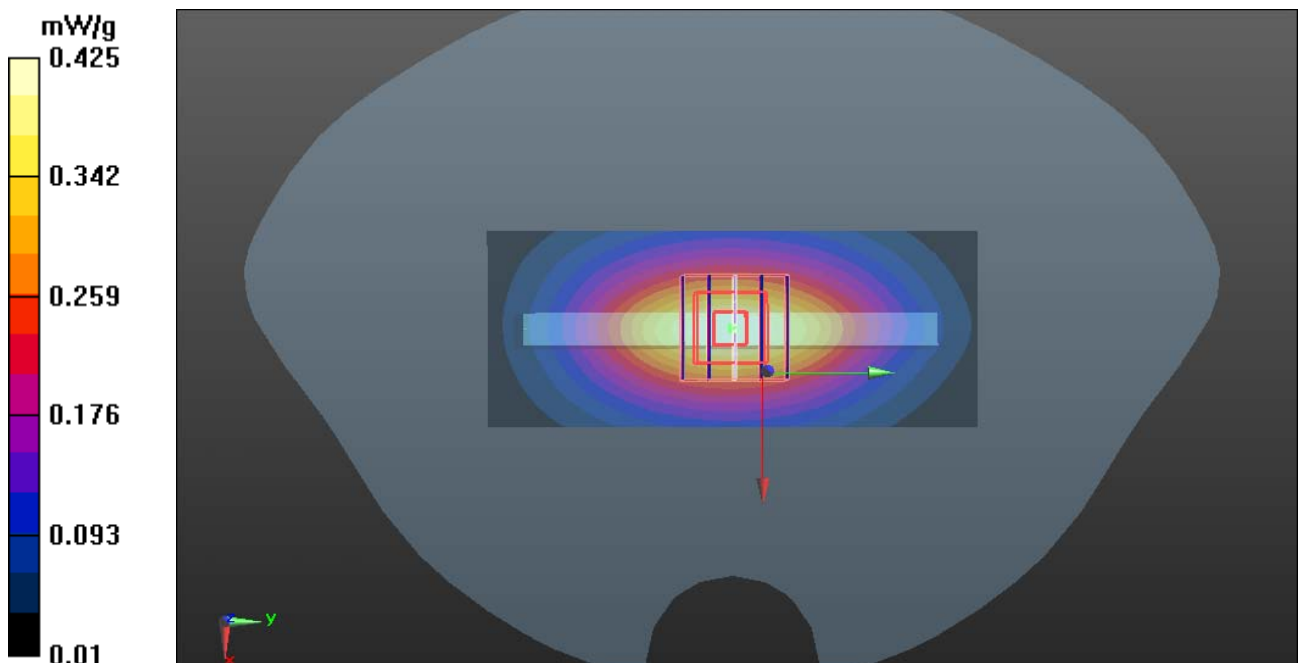

**P09 WCDMA V\_Top Side\_1cm\_Ch4182\_sample1\_battery1 #03****DUT: 110823C01**

Communication System: WCDMA V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL850\_0901 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 54.549$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.0 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.12, 9.12, 9.12); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Front; Type: SAM; Serial: TP-1485
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.027 mW/g

**Ch4182/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.131 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.024 W/kg


**SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00456 mW/g**

Maximum value of SAR (measured) = 0.013 mW/g

**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.131 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.032 W/kg

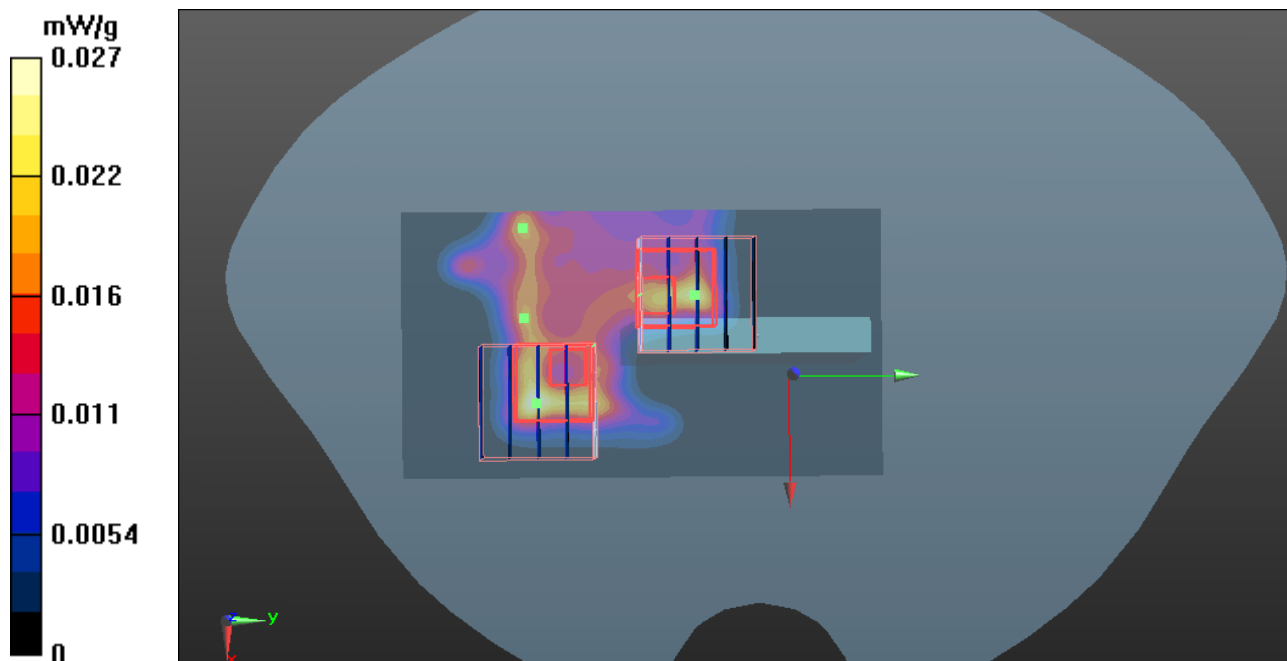**SAR(1 g) = 0.0069 mW/g; SAR(10 g) = 0.00253 mW/g**

**P10 WCDMA V\_Down Side\_1cm\_Ch4182\_sample1\_battery1****DUT: 110823C01**

Communication System: WCDMA V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL850\_0901 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 54.549$ ;  $\rho$

$= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.12, 9.12, 9.12); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Front; Type: SAM; Serial: TP-1485
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (41x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.295 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.822 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.366 W/kg

**SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.111 mW/g**

Maximum value of SAR (measured) = 0.288 mW/g

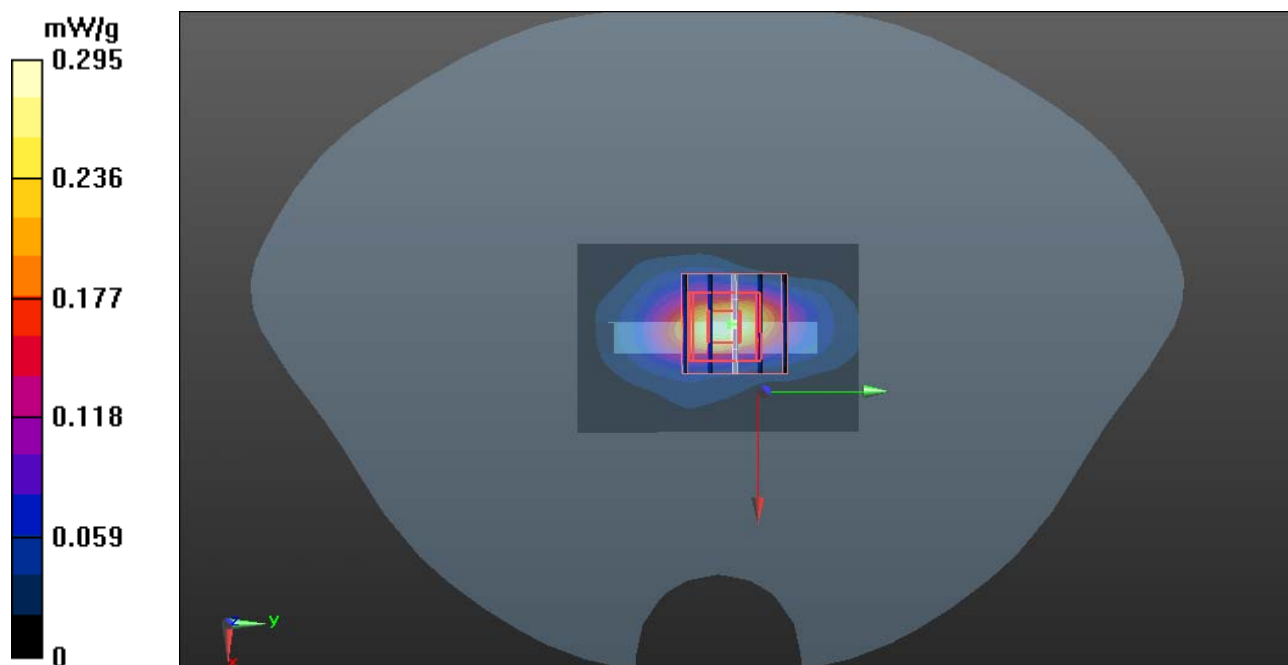

**P11 WCDMA V\_Rear Face\_1cm\_Ch4182\_sample1\_battery1\_earphone1****DUT: 110823C01**

Communication System: WCDMA V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL850\_0901 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 54.549$ ;  $\rho$

$= 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3650; ConvF(9.12, 9.12, 9.12); Calibrated: 2011/1/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Phantom\_Front; Type: SAM; Serial: TP-1485
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (61x101x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.578 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.263 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.708 W/kg

**SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.277 mW/g**

Maximum value of SAR (measured) = 0.465 mW/g

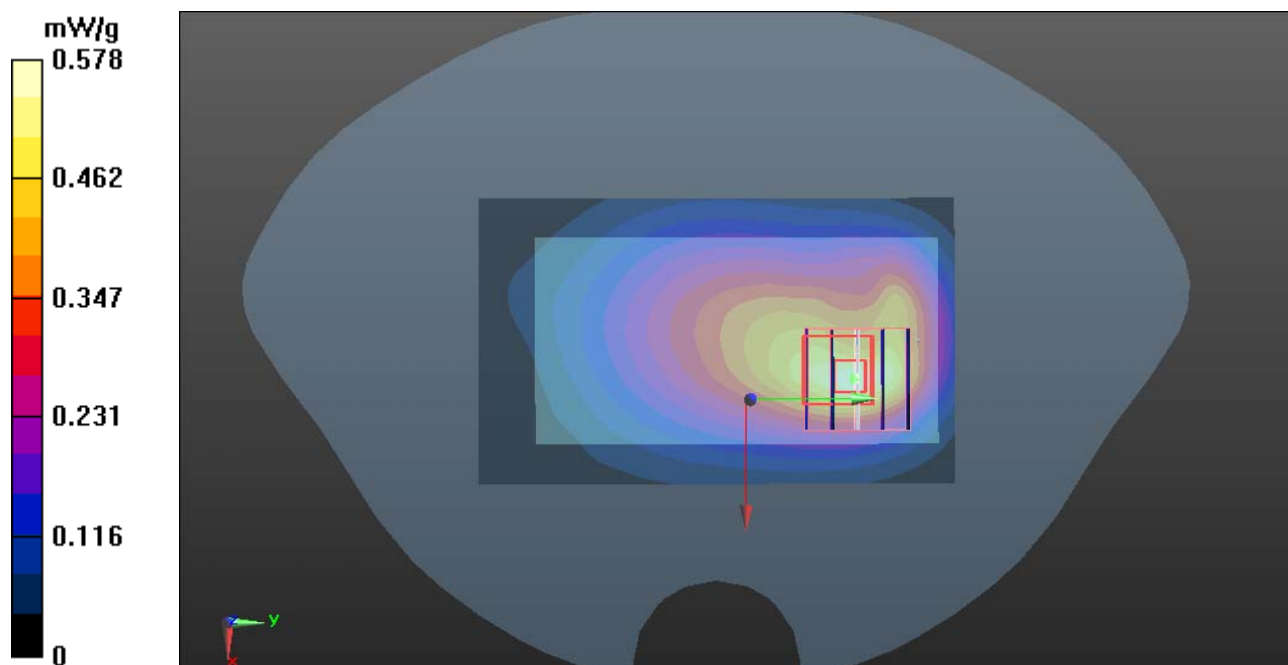

## APPENDIX B: BV ADT SAR MEASUREMENT SYSTEM

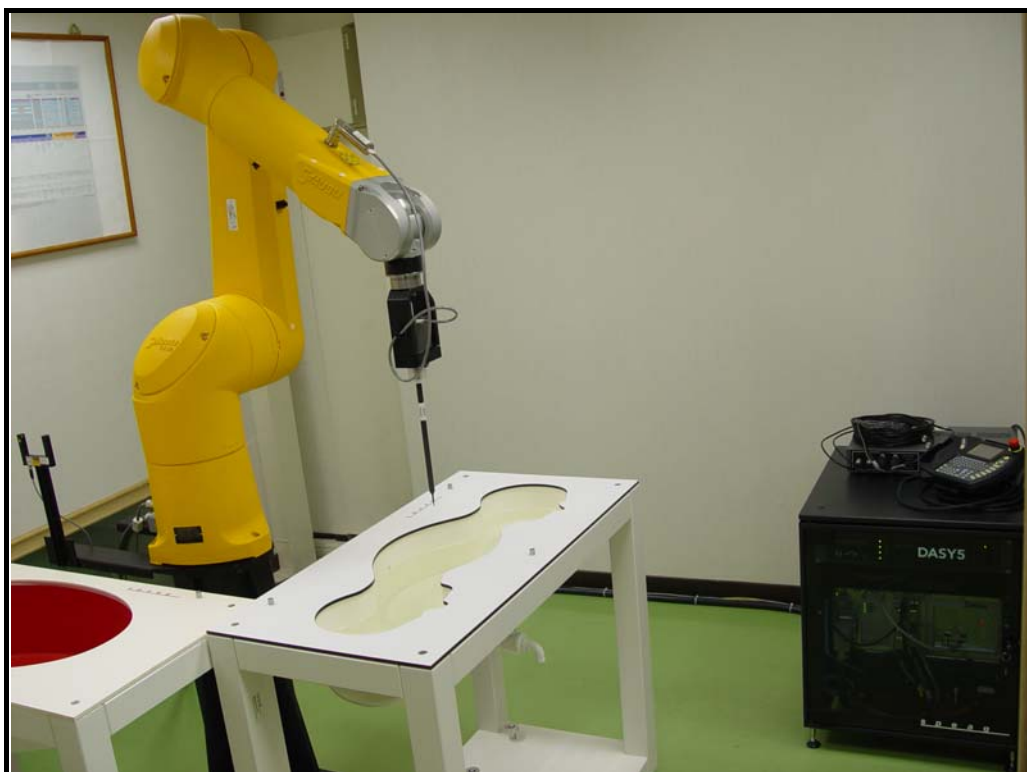

## APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION





## **APPENDIX D: SYSTEM CERTIFICATE & CALIBRATION**

### **D1: DOSIMETRIC E-FIELD PROBE**



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **B.V. ADT (Auden)**

Certificate No: **EX3-3800\_Aug11**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3800**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-23.v4, QA CAL-25.v4**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **August 5, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 31-Mar-11 (No. 217-01372)         | Apr-12                 |
| Power sensor E4412A        | MY41498087      | 31-Mar-11 (No. 217-01372)         | Apr-12                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 29-Mar-11 (No. 217-01369)         | Apr-12                 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 29-Mar-11 (No. 217-01367)         | Apr-12                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 29-Mar-11 (No. 217-01370)         | Apr-12                 |
| Reference Probe ES3DV2     | SN: 3013        | 29-Dec-10 (No. ES3-3013_Dec10)    | Dec-11                 |
| DAE4                       | SN: 654         | 3-May-11 (No. DAE4-654_May11)     | May-12                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Oct-09)  | In house check: Oct-11 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-10) | In house check: Oct-11 |

|                                                                                                                 | Name          | Function          | Signature |
|-----------------------------------------------------------------------------------------------------------------|---------------|-------------------|-----------|
| Calibrated by:                                                                                                  | Katja Pokovic | Technical Manager |           |
| Approved by:                                                                                                    | Fin Bornholt  | R&D Director      |           |
| Issued: August 8, 2011                                                                                          |               |                   |           |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |               |                   |           |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

## Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C                  | modulation dependent linearization parameters                                                                                                           |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe EX3DV4

## SN:3800

Manufactured: April 5, 2011  
Calibrated: August 5, 2011

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3800

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.42     | 0.58     | 0.55     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 100.6    | 96.7     | 98.8     |               |

### Modulation Calibration Parameters

| UID   | Communication System Name | PAR  |   | A<br>dB | B<br>dB | C<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-------|---------------------------|------|---|---------|---------|---------|----------|---------------------------|
| 10000 | CW                        | 0.00 | X | 0.00    | 0.00    | 1.00    | 102.6    | $\pm 3.0 \%$              |
|       |                           |      | Y | 0.00    | 0.00    | 1.00    | 124.9    |                           |
|       |                           |      | Z | 0.00    | 0.00    | 1.00    | 120.1    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3800

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>c</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750                  | 41.9                               | 0.89                            | 9.02    | 9.02    | 9.02    | 0.15  | 1.41       | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 8.70    | 8.70    | 8.70    | 0.24  | 1.03       | ± 12.0 %    |
| 900                  | 41.5                               | 0.97                            | 8.51    | 8.51    | 8.51    | 0.13  | 1.52       | ± 12.0 %    |
| 1640                 | 40.3                               | 1.29                            | 7.95    | 7.95    | 7.95    | 0.15  | 1.37       | ± 12.0 %    |
| 1750                 | 40.1                               | 1.37                            | 7.79    | 7.79    | 7.79    | 0.13  | 1.56       | ± 12.0 %    |
| 1900                 | 40.0                               | 1.40                            | 7.46    | 7.46    | 7.46    | 0.45  | 0.76       | ± 12.0 %    |
| 2450                 | 39.2                               | 1.80                            | 6.71    | 6.71    | 6.71    | 0.32  | 0.89       | ± 12.0 %    |

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## DASY/EASY - Parameters of Probe: EX3DV4- SN:3800

### Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 750                  | 55.5                               | 0.96                            | 9.34    | 9.34    | 9.34    | 0.10  | 2.61       | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 8.94    | 8.94    | 8.94    | 0.11  | 2.46       | ± 12.0 %    |
| 900                  | 55.0                               | 1.05                            | 8.67    | 8.67    | 8.67    | 0.13  | 2.08       | ± 12.0 %    |
| 1640                 | 53.8                               | 1.40                            | 8.07    | 8.07    | 8.07    | 0.16  | 1.57       | ± 12.0 %    |
| 1750                 | 53.4                               | 1.49                            | 7.43    | 7.43    | 7.43    | 0.15  | 1.76       | ± 12.0 %    |
| 1900                 | 53.3                               | 1.52                            | 6.97    | 6.97    | 6.97    | 0.13  | 1.56       | ± 12.0 %    |
| 2450                 | 52.7                               | 1.95                            | 6.75    | 6.75    | 6.75    | 0.80  | 0.53       | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## Frequency Response of E-Field


(TEM-Cell:ifi1110 EXX, Waveguide: R22)

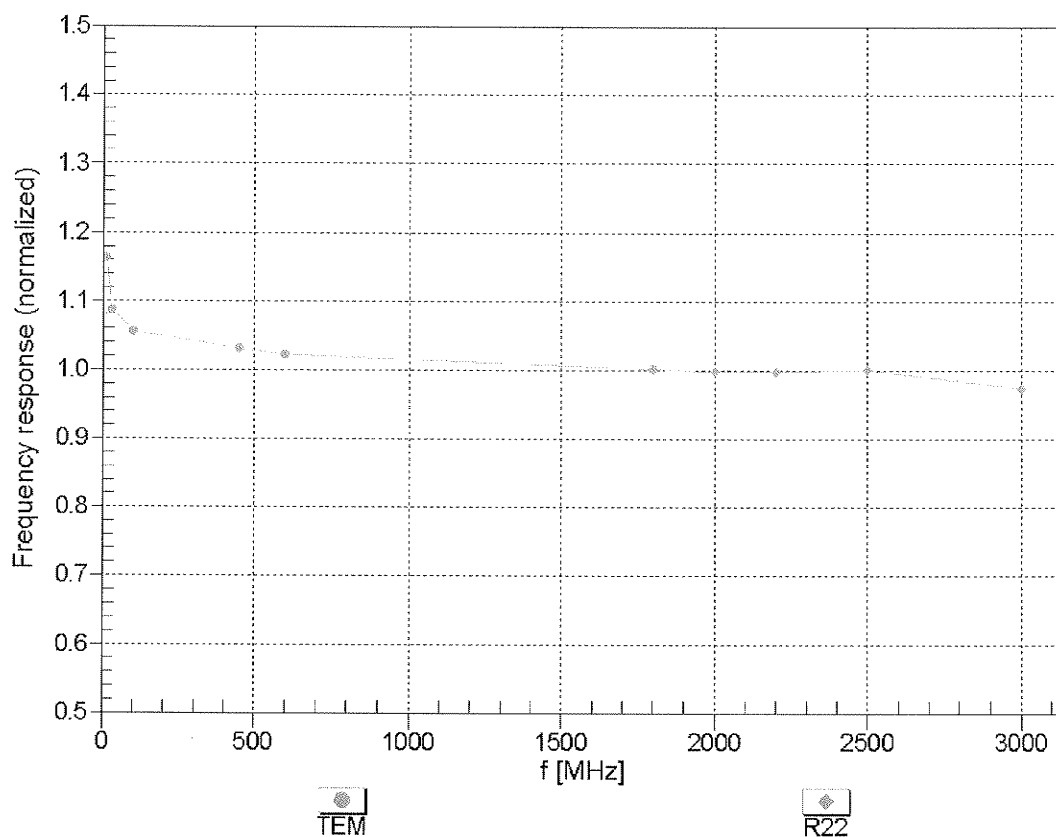



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$



f=600 MHz,TEM

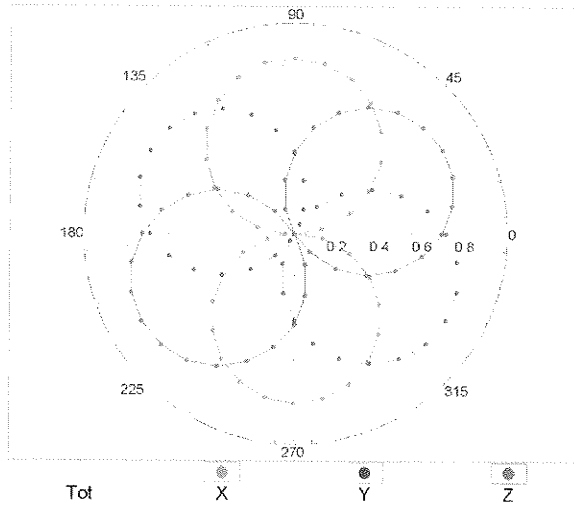

f=1800 MHz,R22

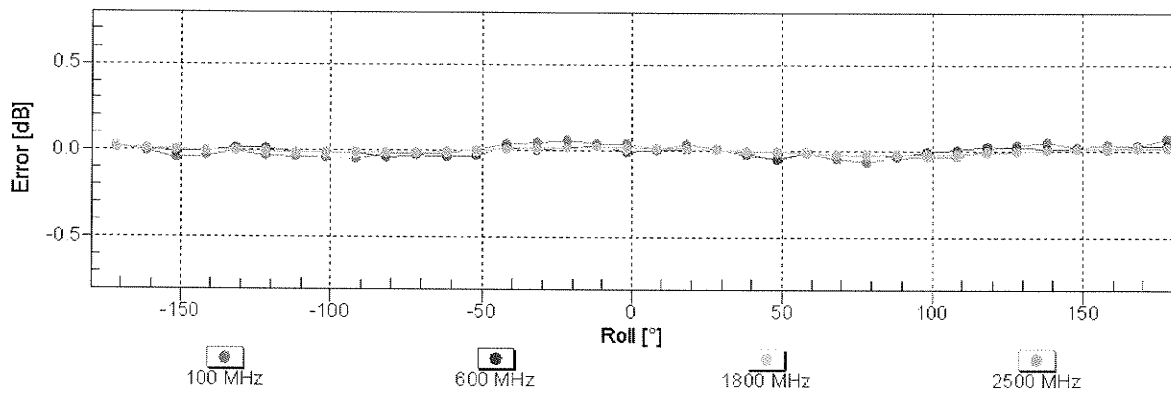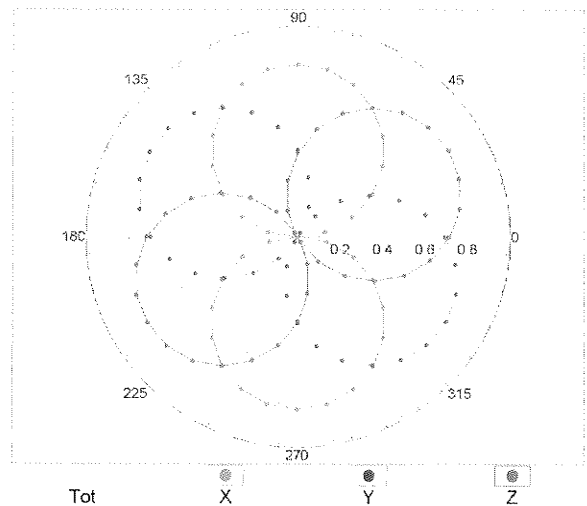
**Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )**

# Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

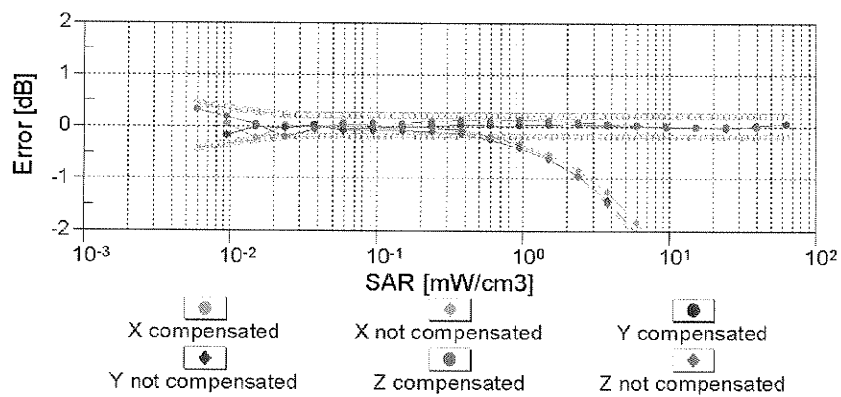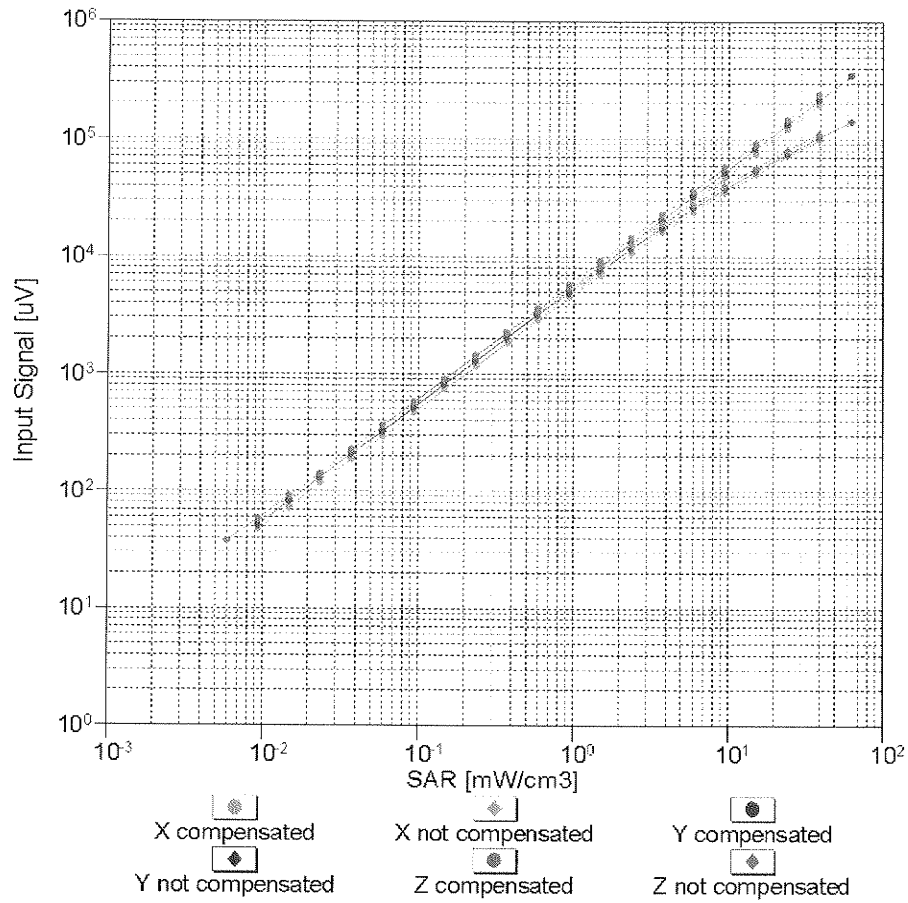



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

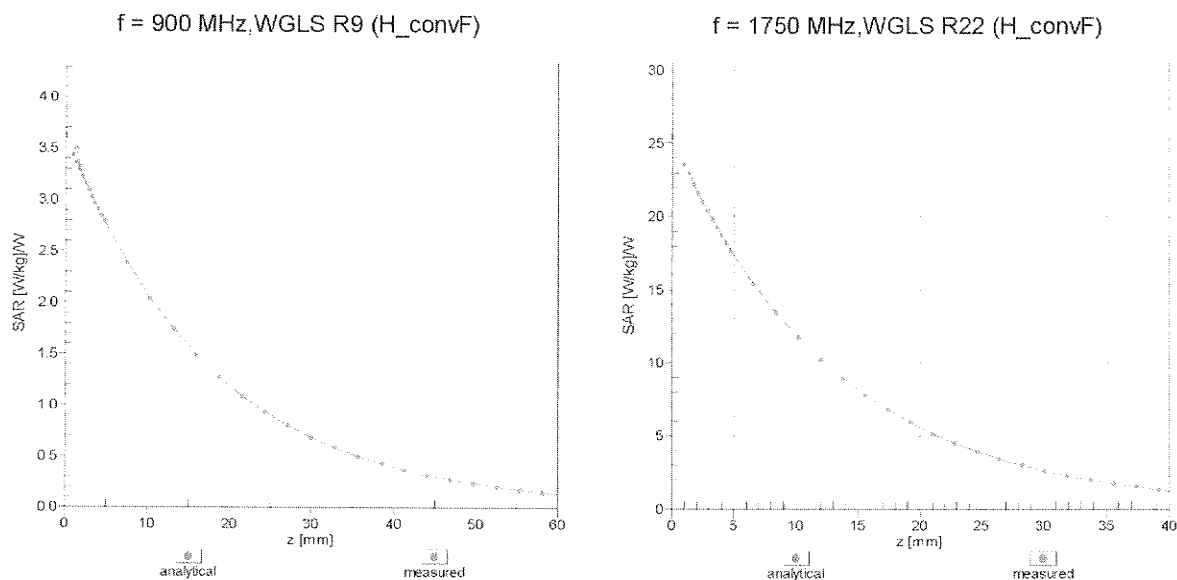

## Deviation from Isotropy in Liquid

Error ( $\phi$ ,  $\vartheta$ ),  $f = 900 \text{ MHz}$

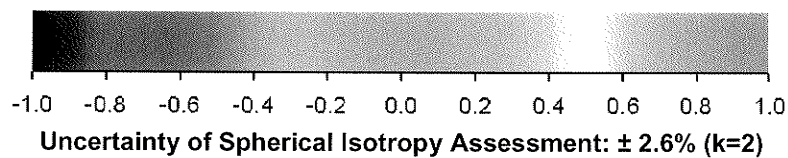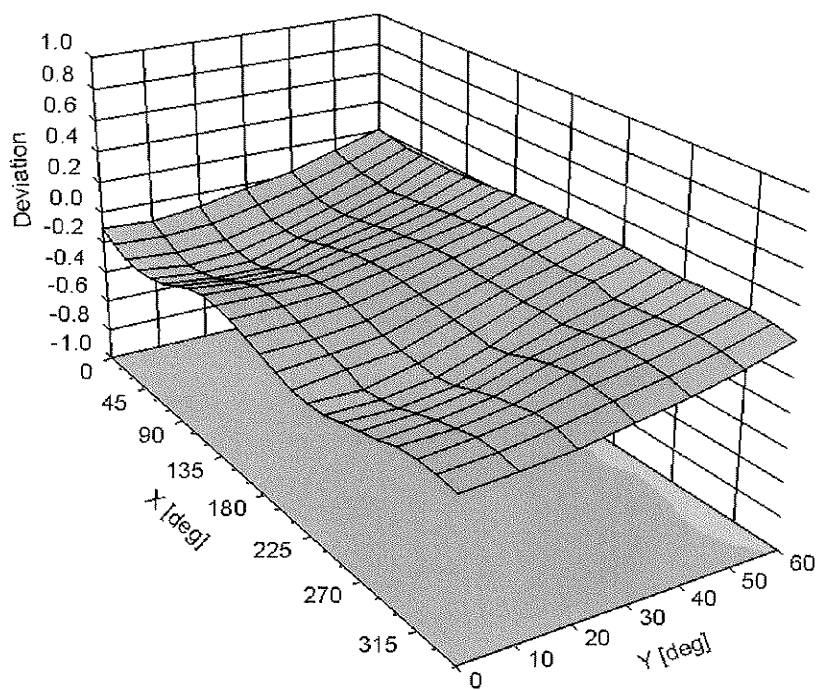

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3800

### Other Probe Parameters

|                                               |                |
|-----------------------------------------------|----------------|
| Sensor Arrangement                            | Triangular     |
| Connector Angle (°)                           | Not applicable |
| Mechanical Surface Detection Mode             | enabled        |
| Optical Surface Detection Mode                | disabled       |
| Probe Overall Length                          | 337 mm         |
| Probe Body Diameter                           | 10 mm          |
| Tip Length                                    | 9 mm           |
| Tip Diameter                                  | 2.5 mm         |
| Probe Tip to Sensor X Calibration Point       | 1 mm           |
| Probe Tip to Sensor Y Calibration Point       | 1 mm           |
| Probe Tip to Sensor Z Calibration Point       | 1 mm           |
| Recommended Measurement Distance from Surface | 2 mm           |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **EX3-3650\_Jan11**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3650**

Calibration procedure(s) **QA CAL-01.v7, QA CAL-14.v3, QA CAL-23.v4 and QA CAL-25.v3**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **January 24, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID #            | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 1-Apr-10 (No. 217-01136)          | Apr-11                 |
| Power sensor E4412A        | MY41495277      | 1-Apr-10 (No. 217-01136)          | Apr-11                 |
| Power sensor E4412A        | MY41498087      | 1-Apr-10 (No. 217-01136)          | Apr-11                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 30-Mar-10 (No. 217-01159)         | Mar-11                 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 30-Mar-10 (No. 217-01161)         | Mar-11                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 30-Mar-10 (No. 217-01160)         | Mar-11                 |
| Reference Probe ES3DV2     | SN: 3013        | 29-Dec-10 (No. ES3-3013_Dec10)    | Dec-11                 |
| DAE4                       | SN: 660         | 20-Apr-10 (No. DAE4-660_Apr10)    | Apr-11                 |
| Secondary Standards        | ID #            | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Oct-09)  | In house check: Oct-11 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-10) | In house check: Oct-11 |

Calibrated by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**

Approved by: **Fin Bomholt**      Name: **Fin Bomholt**      R&D Director

Signature

Issued: January 25, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

## Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C                  | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe EX3DV4

## SN:3650

|                  |                  |
|------------------|------------------|
| Manufactured:    | March 18, 2008   |
| Last calibrated: | July 5, 2008     |
| Recalibrated:    | January 24, 2011 |

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 SN:3650

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)    |
|-----------------------------------------------------------|----------|----------|----------|--------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.45     | 0.40     | 0.49     | $\pm 10.1\%$ |
| DCP (mV) <sup>B</sup>                                     | 93.4     | 96.5     | 95.5     |              |

### Modulation Calibration Parameters

| UID   | Communication System Name | PAR  |   | A<br>dB | B<br>dBuV | C    | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-------|---------------------------|------|---|---------|-----------|------|----------|---------------------------|
| 10000 | CW                        | 0.00 | X | 0.00    | 0.00      | 1.00 | 137.0    | $\pm 3.4\%$               |
|       |                           |      | Y | 0.00    | 0.00      | 1.00 | 141.2    |                           |
|       |                           |      | Z | 0.00    | 0.00      | 1.00 | 144.7    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the maximum deviation from linear response applying recatangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 SN:3650

### Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] | Validity [MHz] <sup>c</sup> | Permittivity | Conductivity | ConvF X | ConvF Y | ConvF Z | Alpha | Depth Unc (k=2) |
|---------|-----------------------------|--------------|--------------|---------|---------|---------|-------|-----------------|
| 750     | ± 50 / ± 100                | 41.9 ± 5%    | 0.89 ± 5%    | 9.46    | 9.46    | 9.46    | 0.43  | 0.72 ± 11.0%    |
| 835     | ± 50 / ± 100                | 41.5 ± 5%    | 0.90 ± 5%    | 8.95    | 8.95    | 8.95    | 0.55  | 0.67 ± 11.0%    |
| 1450    | ± 50 / ± 100                | 40.5 ± 5%    | 1.20 ± 5%    | 8.86    | 8.86    | 8.86    | 0.78  | 0.64 ± 11.0%    |
| 1750    | ± 50 / ± 100                | 40.1 ± 5%    | 1.37 ± 5%    | 8.17    | 8.17    | 8.17    | 0.75  | 0.60 ± 11.0%    |
| 1950    | ± 50 / ± 100                | 40.0 ± 5%    | 1.40 ± 5%    | 7.57    | 7.57    | 7.57    | 0.57  | 0.66 ± 11.0%    |
| 2450    | ± 50 / ± 100                | 39.2 ± 5%    | 1.80 ± 5%    | 7.10    | 7.10    | 7.10    | 0.36  | 0.88 ± 11.0%    |
| 2600    | ± 50 / ± 100                | 39.0 ± 5%    | 1.96 ± 5%    | 6.93    | 6.93    | 6.93    | 0.38  | 0.88 ± 11.0%    |
| 5200    | ± 50 / ± 100                | 36.0 ± 5%    | 4.66 ± 5%    | 4.69    | 4.69    | 4.69    | 0.40  | 1.80 ± 13.1%    |
| 5300    | ± 50 / ± 100                | 35.9 ± 5%    | 4.76 ± 5%    | 4.33    | 4.33    | 4.33    | 0.45  | 1.80 ± 13.1%    |
| 5500    | ± 50 / ± 100                | 35.6 ± 5%    | 4.96 ± 5%    | 4.42    | 4.42    | 4.42    | 0.45  | 1.80 ± 13.1%    |
| 5600    | ± 50 / ± 100                | 35.5 ± 5%    | 5.07 ± 5%    | 3.96    | 3.96    | 3.96    | 0.60  | 1.80 ± 13.1%    |
| 5800    | ± 50 / ± 100                | 35.3 ± 5%    | 5.27 ± 5%    | 4.27    | 4.27    | 4.27    | 0.45  | 1.80 ± 13.1%    |

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

## DASY/EASY - Parameters of Probe: EX3DV4 SN:3650


### Calibration Parameter Determined in Body Tissue Simulating Media

| f [MHz] | Validity [MHz] <sup>c</sup> | Permittivity | Conductivity | ConvF X | ConvF Y | ConvF Z | Alpha | Depth Unc (k=2) |
|---------|-----------------------------|--------------|--------------|---------|---------|---------|-------|-----------------|
| 750     | ± 50 / ± 100                | 55.5 ± 5%    | 0.96 ± 5%    | 9.25    | 9.25    | 9.25    | 0.53  | 0.71 ± 11.0%    |
| 835     | ± 50 / ± 100                | 55.2 ± 5%    | 0.97 ± 5%    | 9.12    | 9.12    | 9.12    | 0.36  | 0.88 ± 11.0%    |
| 1450    | ± 50 / ± 100                | 54.0 ± 5%    | 1.30 ± 5%    | 7.97    | 7.97    | 7.97    | 0.71  | 0.63 ± 11.0%    |
| 1750    | ± 50 / ± 100                | 53.4 ± 5%    | 1.49 ± 5%    | 7.46    | 7.46    | 7.46    | 0.78  | 0.61 ± 11.0%    |
| 1950    | ± 50 / ± 100                | 53.3 ± 5%    | 1.52 ± 5%    | 7.52    | 7.52    | 7.52    | 0.79  | 0.59 ± 11.0%    |
| 2450    | ± 50 / ± 100                | 52.7 ± 5%    | 1.95 ± 5%    | 7.05    | 7.05    | 7.05    | 0.54  | 0.74 ± 11.0%    |
| 2600    | ± 50 / ± 100                | 52.5 ± 5%    | 2.16 ± 5%    | 6.92    | 6.92    | 6.92    | 0.45  | 0.80 ± 11.0%    |
| 5200    | ± 50 / ± 100                | 49.0 ± 5%    | 5.30 ± 5%    | 4.25    | 4.25    | 4.25    | 0.50  | 1.90 ± 13.1%    |
| 5300    | ± 50 / ± 100                | 48.9 ± 5%    | 5.42 ± 5%    | 3.96    | 3.96    | 3.96    | 0.50  | 1.90 ± 13.1%    |
| 5500    | ± 50 / ± 100                | 48.6 ± 5%    | 5.65 ± 5%    | 3.76    | 3.76    | 3.76    | 0.55  | 1.90 ± 13.1%    |
| 5600    | ± 50 / ± 100                | 48.5 ± 5%    | 5.77 ± 5%    | 3.55    | 3.55    | 3.55    | 0.58  | 1.90 ± 13.1%    |
| 5800    | ± 50 / ± 100                | 48.2 ± 5%    | 6.00 ± 5%    | 3.86    | 3.86    | 3.86    | 0.60  | 1.90 ± 13.1%    |

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.


## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

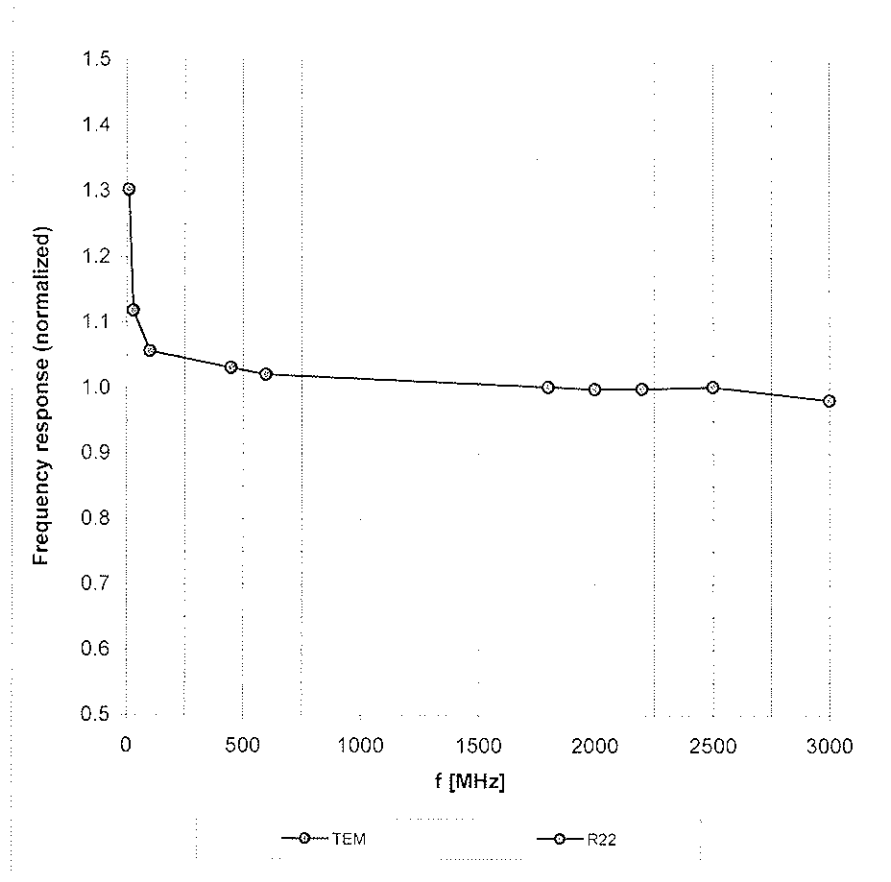

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )



## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

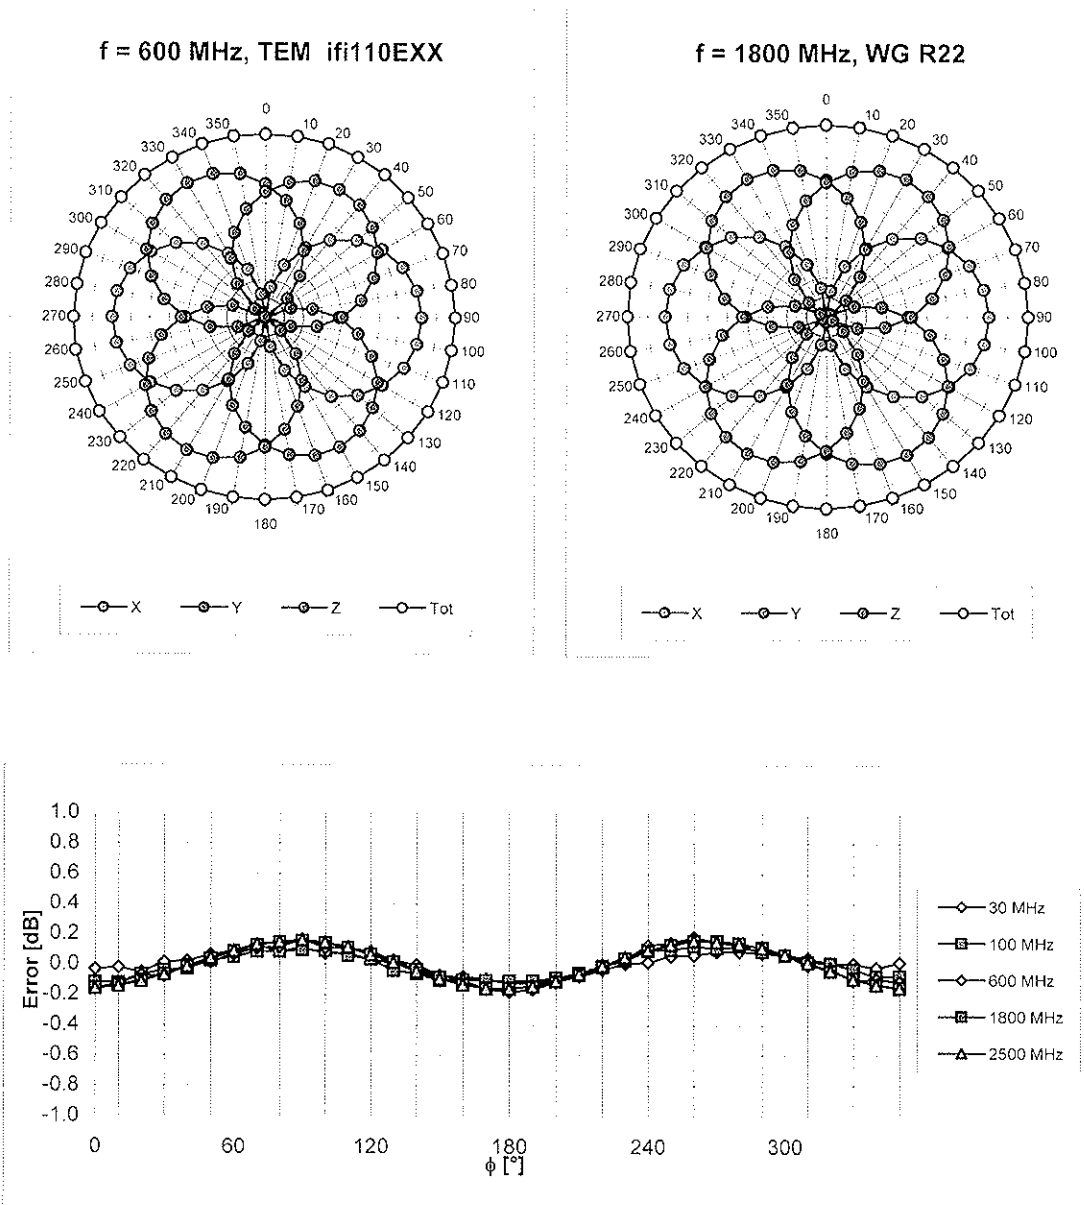

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )



# Dynamic Range f(SAR<sub>head</sub>)

(TEM cell, f = 900 MHz)

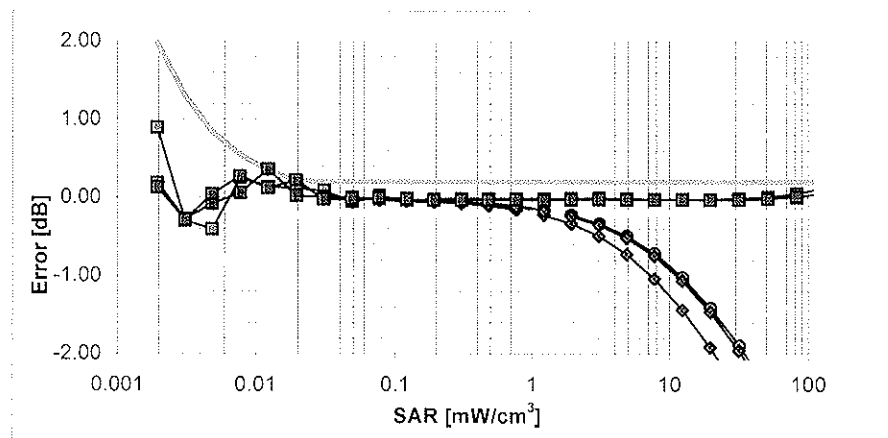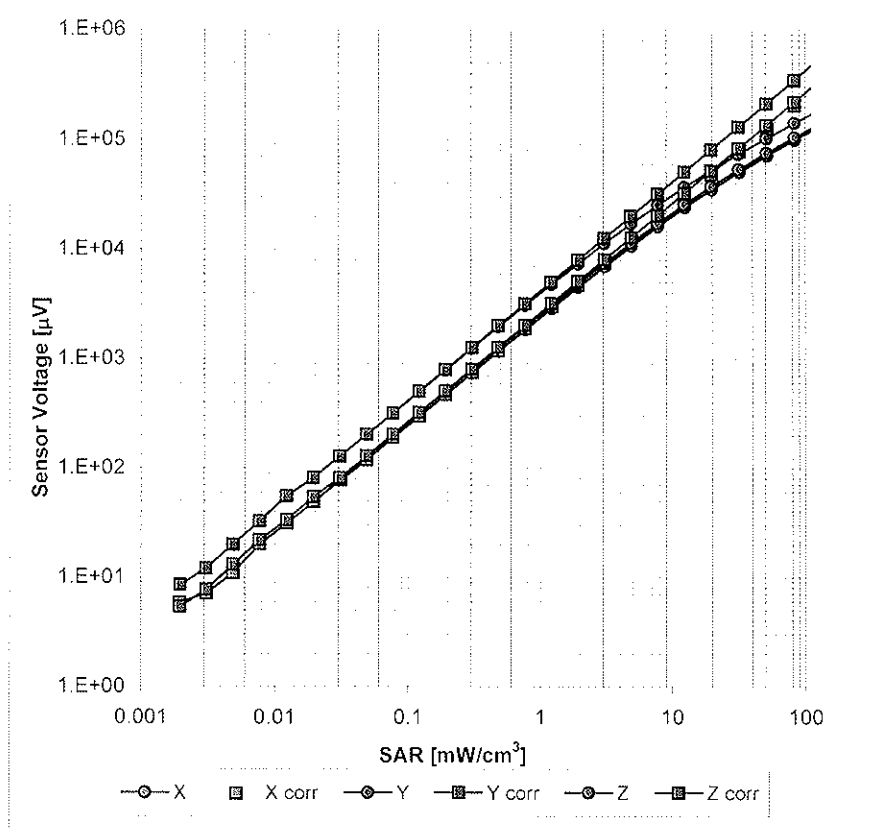


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

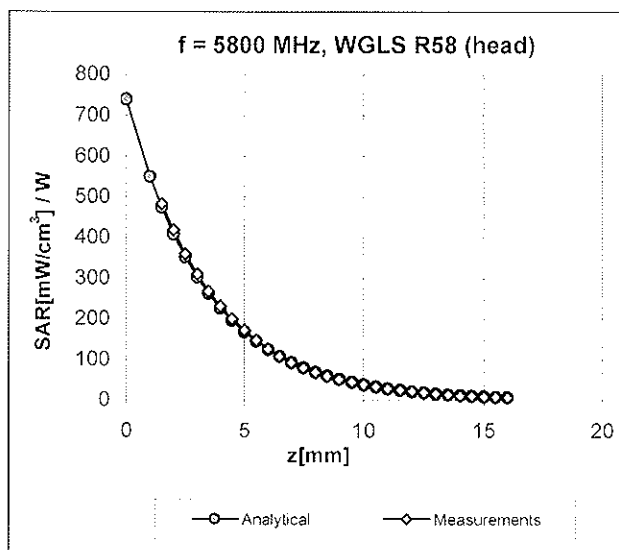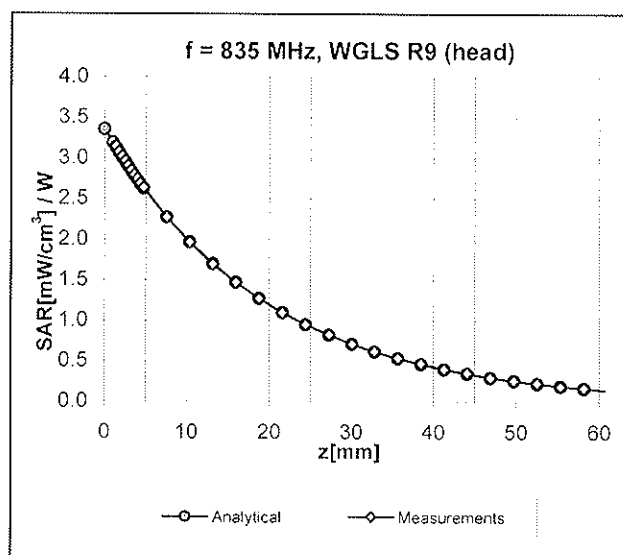

## Deviation from Isotropy in HSL

Error ( $\phi$ ,  $\theta$ ), f = 900 MHz

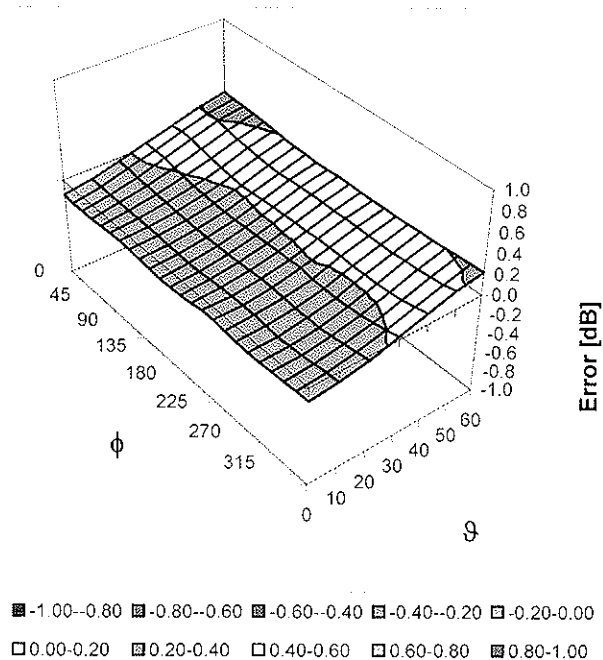

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  (k=2)

## Other Probe Parameters

|                                               |                |
|-----------------------------------------------|----------------|
| Sensor Arrangement                            | Triangular     |
| Connector Angle (°)                           | Not applicable |
| Mechanical Surface Detection Mode             | enabled        |
| Optical Surface Detection Mode                | disabled       |
| Probe Overall Length                          | 337 mm         |
| Probe Body Diameter                           | 10 mm          |
| Tip Length                                    | 9 mm           |
| Tip Diameter                                  | 2.5 mm         |
| Probe Tip to Sensor X Calibration Point       | 1 mm           |
| Probe Tip to Sensor Y Calibration Point       | 1 mm           |
| Probe Tip to Sensor Z Calibration Point       | 1 mm           |
| Recommended Measurement Distance from Surface | 2 mm           |

**D2: DAE**



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ADT (Auden)**

Certificate No: **DAE3-510\_Oct10**

## CALIBRATION CERTIFICATE

Object **DAE3 - SD 000 D03 AA - SN: 510**

Calibration procedure(s) **QA CAL-06.v22**  
**Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **October 4, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards             | ID #               | Cal Date (Certificate No.) | Scheduled Calibration  |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0810278        | 28-Sep-10 (No:10376)       | Sep-11                 |
| Secondary Standards           | ID #               | Check Date (in house)      | Scheduled Check        |
| Calibrator Box V1.1           | SE UMS 006 AB 1004 | 07-Jun-10 (in house check) | In house check: Jun-11 |

Calibrated by: **Name**  
**Dominique Steffen**

Function  
**Technician**

Signature

Approved by: **Fin Bomholt**

R&D Director

Issued: October 4, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary

**DAE** data acquisition electronics  
**Connector angle** information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.

## DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1  $\mu$ V , full range = -100...+300 mV

Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                        | Y                        | Z                        |
|---------------------|--------------------------|--------------------------|--------------------------|
| High Range          | 404.204 $\pm$ 0.1% (k=2) | 404.261 $\pm$ 0.1% (k=2) | 404.619 $\pm$ 0.1% (k=2) |
| Low Range           | 3.97841 $\pm$ 0.7% (k=2) | 3.96431 $\pm$ 0.7% (k=2) | 3.98318 $\pm$ 0.7% (k=2) |

## Connector Angle

|                                           |                                     |
|-------------------------------------------|-------------------------------------|
| Connector Angle to be used in DASY system | 280.0 $^{\circ}$ $\pm$ 1 $^{\circ}$ |
|-------------------------------------------|-------------------------------------|

## Appendix

### 1. DC Voltage Linearity

| High Range |         | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|------------|---------|---------------------------|------------------------------|-----------|
| Channel X  | + Input | 200002.6                  | 1.33                         | 0.00      |
| Channel X  | + Input | 20001.52                  | 1.72                         | 0.01      |
| Channel X  | - Input | -19997.99                 | 1.81                         | -0.01     |
| Channel Y  | + Input | 200010.4                  | 0.89                         | 0.00      |
| Channel Y  | + Input | 20000.89                  | 1.39                         | 0.01      |
| Channel Y  | - Input | -19998.10                 | 1.60                         | -0.01     |
| Channel Z  | + Input | 200007.2                  | -1.37                        | -0.00     |
| Channel Z  | + Input | 19998.21                  | -1.29                        | -0.01     |
| Channel Z  | - Input | -20001.73                 | -2.13                        | 0.01      |

| Low Range |         | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-----------|---------|---------------------------|------------------------------|-----------|
| Channel X | + Input | 2000.1                    | 0.23                         | 0.01      |
| Channel X | + Input | 200.27                    | 0.27                         | 0.13      |
| Channel X | - Input | -199.76                   | 0.04                         | -0.02     |
| Channel Y | + Input | 2000.8                    | 0.66                         | 0.03      |
| Channel Y | + Input | 199.56                    | -0.44                        | -0.22     |
| Channel Y | - Input | -200.06                   | -0.16                        | 0.08      |
| Channel Z | + Input | 1999.4                    | -0.75                        | -0.04     |
| Channel Z | + Input | 199.53                    | -0.57                        | -0.28     |
| Channel Z | - Input | -201.06                   | -1.16                        | 0.58      |

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Common mode Input Voltage (mV) | High Range Average Reading ( $\mu\text{V}$ ) | Low Range Average Reading ( $\mu\text{V}$ ) |
|-----------|--------------------------------|----------------------------------------------|---------------------------------------------|
| Channel X | 200                            | 17.87                                        | 16.44                                       |
|           | - 200                          | -15.36                                       | -17.11                                      |
| Channel Y | 200                            | 14.99                                        | 14.97                                       |
|           | - 200                          | -16.63                                       | -16.47                                      |
| Channel Z | 200                            | -8.65                                        | -8.74                                       |
|           | - 200                          | 7.23                                         | 7.63                                        |

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Input Voltage (mV) | Channel X ( $\mu\text{V}$ ) | Channel Y ( $\mu\text{V}$ ) | Channel Z ( $\mu\text{V}$ ) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200                | -                           | 4.37                        | -3.14                       |
| Channel Y | 200                | 6.07                        | -                           | 3.36                        |
| Channel Z | 200                | 3.03                        | -0.24                       | -                           |

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15917            | 15639           |
| Channel Y | 16112            | 16210           |
| Channel Z | 16121            | 16322           |

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

|           | Average ( $\mu$ V) | min. Offset ( $\mu$ V) | max. Offset ( $\mu$ V) | Std. Deviation ( $\mu$ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | 0.61               | 0.06                   | 2.59                   | 0.30                      |
| Channel Y | 1.72               | -0.56                  | 3.01                   | 0.39                      |
| Channel Z | -1.94              | -2.73                  | -0.59                  | 0.30                      |

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

|           | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200            | 200              |
| Channel Y | 200            | 200              |
| Channel Z | 200            | 200              |

#### 8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9              |
| Supply (- Vcc) | -7.6              |

#### 9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01             | +6            | +14               |
| Supply (- Vcc) | -0.01             | -8            | -9                |



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **BV-ADT (Auden)**

Certificate No: **DAE3-579\_Sep10**

## CALIBRATION CERTIFICATE

Object **DAE3 - SD 000 D03 AA - SN: 579**

Calibration procedure(s) **QA CAL-06.v22  
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **September 20, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards             | ID #               | Cal Date (Certificate No.) | Scheduled Calibration  |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0810278        | 1-Oct-09 (No: 9055)        | Oct-10                 |
| Secondary Standards           | ID #               | Check Date (in house)      | Scheduled Check        |
| Calibrator Box V1.1           | SE UMS 006 AB 1004 | 07-Jun-10 (in house check) | In house check: Jun-11 |

|                | Name              | Function     | Signature |
|----------------|-------------------|--------------|-----------|
| Calibrated by: | Dominique Steffen | Technician   |           |
| Approved by:   | Fin Bomholt       | R&D Director |           |

Issued: September 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

## Glossary

|                 |                                                                                         |
|-----------------|-----------------------------------------------------------------------------------------|
| DAE             | data acquisition electronics                                                            |
| Connector angle | information used in DASY system to align probe sensor X to the robot coordinate system. |

## Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.

## DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1  $\mu$ V , full range = -100...+300 mV

Low Range: 1LSB = 61 nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                        | Y                        | Z                        |
|---------------------|--------------------------|--------------------------|--------------------------|
| High Range          | 404.327 $\pm$ 0.1% (k=2) | 404.379 $\pm$ 0.1% (k=2) | 404.160 $\pm$ 0.1% (k=2) |
| Low Range           | 3.98675 $\pm$ 0.7% (k=2) | 3.99301 $\pm$ 0.7% (k=2) | 3.94834 $\pm$ 0.7% (k=2) |

## Connector Angle

|                                           |                   |
|-------------------------------------------|-------------------|
| Connector Angle to be used in DASY system | 358.0 ° $\pm$ 1 ° |
|-------------------------------------------|-------------------|

## Appendix

### 1. DC Voltage Linearity

| High Range |         | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|------------|---------|---------------------------|------------------------------|-----------|
| Channel X  | + Input | 200003.9                  | 0.96                         | 0.00      |
| Channel X  | + Input | 20003.19                  | 3.09                         | 0.02      |
| Channel X  | - Input | -19994.55                 | 4.75                         | -0.02     |
| Channel Y  | + Input | 199992.4                  | -0.09                        | -0.00     |
| Channel Y  | + Input | 19999.51                  | 0.41                         | 0.00      |
| Channel Y  | - Input | -19997.22                 | 3.18                         | -0.02     |
| Channel Z  | + Input | 200002.0                  | 0.91                         | 0.00      |
| Channel Z  | + Input | 20001.93                  | 2.03                         | 0.01      |
| Channel Z  | - Input | -19997.58                 | 2.82                         | -0.01     |

| Low Range |         | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
|-----------|---------|---------------------------|------------------------------|-----------|
| Channel X | + Input | 2000.0                    | 0.02                         | 0.00      |
| Channel X | + Input | 199.82                    | 0.12                         | 0.06      |
| Channel X | - Input | -200.46                   | -0.56                        | 0.28      |
| Channel Y | + Input | 2000.3                    | 0.47                         | 0.02      |
| Channel Y | + Input | 199.12                    | -0.78                        | -0.39     |
| Channel Y | - Input | -201.36                   | -1.16                        | 0.58      |
| Channel Z | + Input | 1999.9                    | -0.07                        | -0.00     |
| Channel Z | + Input | 199.18                    | -0.72                        | -0.36     |
| Channel Z | - Input | -201.47                   | -1.47                        | 0.73      |

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Common mode<br>Input Voltage (mV) | High Range<br>Average Reading ( $\mu\text{V}$ ) | Low Range<br>Average Reading ( $\mu\text{V}$ ) |
|-----------|-----------------------------------|-------------------------------------------------|------------------------------------------------|
| Channel X | 200                               | 7.07                                            | 5.75                                           |
|           | - 200                             | -4.60                                           | -6.25                                          |
| Channel Y | 200                               | 9.48                                            | 9.62                                           |
|           | - 200                             | -10.39                                          | -10.96                                         |
| Channel Z | 200                               | 8.79                                            | 8.42                                           |
|           | - 200                             | -9.64                                           | -9.80                                          |

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Input Voltage (mV) | Channel X ( $\mu\text{V}$ ) | Channel Y ( $\mu\text{V}$ ) | Channel Z ( $\mu\text{V}$ ) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200                | -                           | 0.03                        | 0.35                        |
| Channel Y | 200                | 1.14                        | -                           | 2.31                        |
| Channel Z | 200                | 2.01                        | 0.80                        | -                           |

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 16343            | 16314           |
| Channel Y | 16194            | 16427           |
| Channel Z | 15816            | 16265           |

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

|           | Average ( $\mu$ V) | min. Offset ( $\mu$ V) | max. Offset ( $\mu$ V) | Std. Deviation ( $\mu$ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | -0.70              | -1.94                  | 0.80                   | 0.49                      |
| Channel Y | -1.55              | -2.12                  | -0.66                  | 0.27                      |
| Channel Z | 0.57               | -0.11                  | 5.61                   | 0.62                      |

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

|           | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200            | 200              |
| Channel Y | 200            | 200              |
| Channel Z | 200            | 200              |

#### 8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9              |
| Supply (- Vcc) | -7.6              |

#### 9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01             | +6            | +14               |
| Supply (- Vcc) | -0.01             | -8            | -9                |

### **D3: SYSTEM VALIDATION DIPOLE**



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **D835V2-4d021\_Mar11**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d021**

Calibration procedure(s) **QA CAL-05.v8**  
**Calibration procedure for dipole validation kits**

Calibration date: **March 23, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 06-Oct-10 (No. 217-01266)         | Oct-11                 |
| Power sensor HP 8481A       | US37292783         | 06-Oct-10 (No. 217-01266)         | Oct-11                 |
| Reference 20 dB Attenuator  | SN: 5086 (20g)     | 30-Mar-10 (No. 217-01158)         | Mar-11                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 30-Mar-10 (No. 217-01162)         | Mar-11                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Apr-10 (No. ES3-3205_Apr10)    | Apr-11                 |
| DAE4                        | SN: 601            | 10-Jun-10 (No. DAE4-601_Jun10)    | Jun-11                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-09) | In house check: Oct-11 |
| RF generator R&S SMT-06     | 100005             | 4-Aug-99 (in house check Oct-09)  | In house check: Oct-11 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-10) | In house check: Oct-11 |

Calibrated by: **Dimce Iliev** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: March 23, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                           |             |
|-------------------------------------|---------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                     | V52.6.2     |
| <b>Extrapolation</b>                | Advanced Extrapolation    |             |
| <b>Phantom</b>                      | Modular Flat Phantom V4.9 |             |
| <b>Distance Dipole Center - TSL</b> | 15 mm                     | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm         |             |
| <b>Frequency</b>                    | 835 MHz $\pm$ 1 MHz       |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>      | 22.0 °C             | 41.5           | 0.90 mho/m           |
| <b>Measured Head TSL parameters</b>     | (22.0 $\pm$ 0.2) °C | 41.0 $\pm$ 6 % | 0.89 mho/m $\pm$ 6 % |
| <b>Head TSL temperature during test</b> | (21.8 $\pm$ 0.2) °C | ----           | ----                 |

## SAR result with Head TSL

|                                                             |                    |                                                  |
|-------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                  |
| SAR measured                                                | 250 mW input power | 2.40 mW / g                                      |
| SAR normalized                                              | normalized to 1W   | 9.60 mW / g                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>9.65 mW / g <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 1.57 mW / g                                      |
| SAR normalized                                                | normalized to 1W   | 6.28 mW / g                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>6.31 mW / g <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|                                  | Temperature     | Permittivity | Conductivity     |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters      | 22.0 °C         | 55.2         | 0.97 mho/m       |
| Measured Body TSL parameters     | (22.0 ± 0.2) °C | 54.3 ± 6 %   | 0.99 mho/m ± 6 % |
| Body TSL temperature during test | (21.7 ± 0.2) °C | ----         | ----             |

## SAR result with Body TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                   |
|-------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                          | 250 mW input power | 2.56 mW / g                       |
| SAR normalized                                        | normalized to 1W   | 10.2 mW / g                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>10.1 mW / g ± 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                   |
|---------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                            | 250 mW input power | 1.68 mW / g                       |
| SAR normalized                                          | normalized to 1W   | 6.72 mW / g                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>6.63 mW / g ± 16.5 % (k=2)</b> |

## Appendix

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 52.0 $\Omega$ - 2.0 j $\Omega$ |
| Return Loss                          | - 31.0 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.9 $\Omega$ - 4.2 j $\Omega$ |
| Return Loss                          | - 26.4 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.393 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Design Modification by End User

The dipole has been modified with Teflon Rings (TR) placed within identified markings close to the end of each dipole arm. Calibration has been performed with TR attached to the dipole.

### Additional EUT Data

|                 |                |
|-----------------|----------------|
| Manufactured by | SPEAG          |
| Manufactured on | April 22, 2004 |

## DASY5 Validation Report for Head TSL

Date/Time: 18.03.2011 11:51:13

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d021**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.89 \text{ mho/m}$ ;  $\epsilon_r = 40.9$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.03, 6.03, 6.03); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.2 Build (424)
- Postprocessing SW: SEMCAD X, V14.4.4 Build (2829)


**Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement**  
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.571 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.583 W/kg

**SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.57 mW/g**

Maximum value of SAR (measured) = 2.792 mW/g

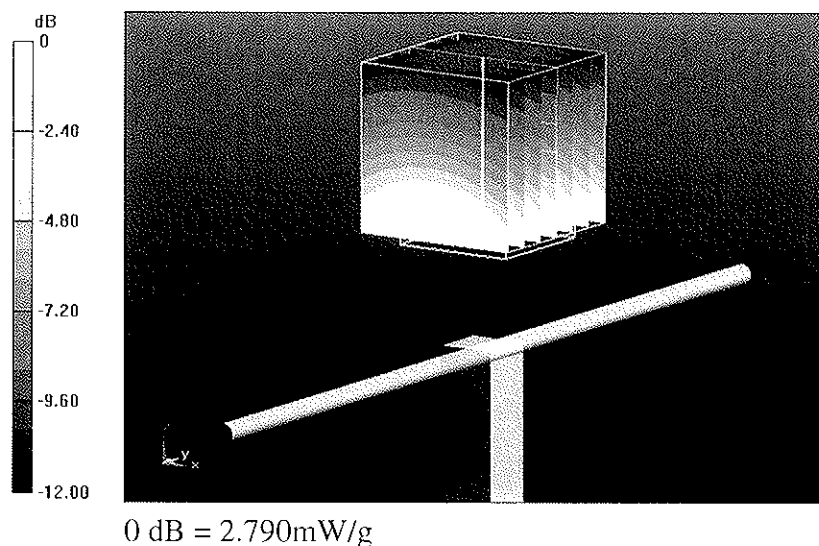

# Impedance Measurement Plot for Head TSL

18 Mar 2011 10:32:43  
 CH1 S11 1 U FS 1: 51.996  $\Omega$  -2.0463  $\Omega$  93.120 pF 835.000 000 MHz


%  
 Del  
 Cor



Avg  
 16  
 ↑

CH2 S11 LOG 5 dB/REF -20 dB 1: -31.025 dB 835.000 000 MHz

Cor

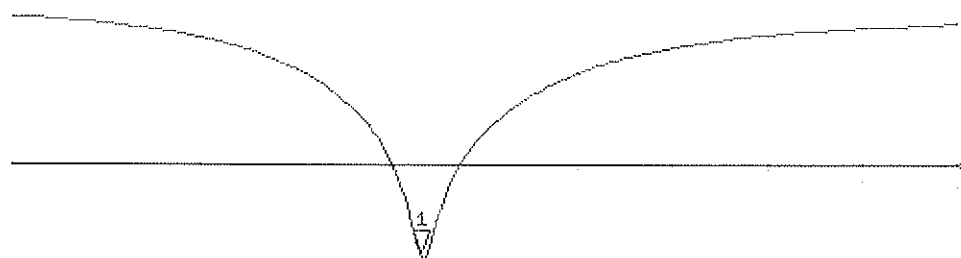

Avg  
 16  
 ↑

START 835.000 000 MHz

STOP 1.100.000 000 MHz

## DASY5 Validation Report for Body TSL

Date/Time: 23.03.2011 10:45:49

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d021**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.99 \text{ mho/m}$ ;  $\epsilon_r = 54.3$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.86, 5.86, 5.86); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.2 Build (424)
- Postprocessing SW: SEMCAD X, V14.4.4 Build (2829)


**Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.615 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.794 W/kg

**SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.68 mW/g**

Maximum value of SAR (measured) = 2.981 mW/g

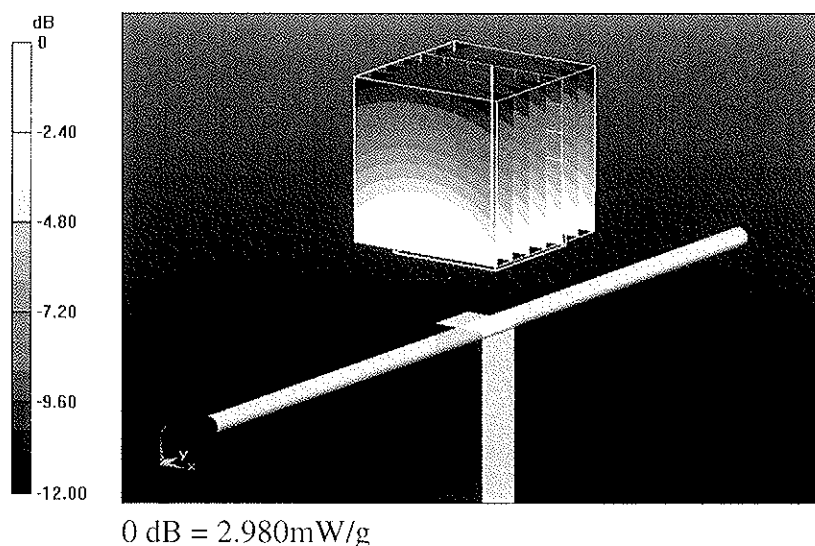

# Impedance Measurement Plot for Body TSL

23 Mar 2011 10:18:11  
 [CH1] S11 1 U FS 1: 47.865  $\Omega$  -4.1953  $\Omega$  45.433 pF 835.000 000 MHz

\*  
 De1  
 Cor

avg  
 16

↑

CH2 S11 LOG 5 dB/REF -20 dB 1: -25.372 dB 835.000 000 MHz

Cor

avg  
 16

↑

START 635.000 000 MHz

STOP 1 100.000 000 MHz



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **B.V. ADT (Auden)**

Certificate No: **D1900V2-5d022\_Jan11**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d022**

Calibration procedure(s) **QA CAL-05.v8  
 Calibration procedure for dipole validation kits**

Calibration date: **January 26, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704         | 06-Oct-10 (No. 217-01266)         | Oct-11                 |
| Power sensor HP 8481A       | US37292783         | 06-Oct-10 (No. 217-01266)         | Oct-11                 |
| Reference 20 dB Attenuator  | SN: 5086 (20g)     | 30-Mar-10 (No. 217-01158)         | Mar-11                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 30-Mar-10 (No. 217-01162)         | Mar-11                 |
| Reference Probe ES3DV3      | SN: 3205           | 30-Apr-10 (No. ES3-3205_Apr10)    | Apr-11                 |
| DAE4                        | SN: 601            | 10-Jun-10 (No. DAE4-601_Jun10)    | Jun-11                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317         | 18-Oct-02 (in house check Oct-09) | In house check: Oct-11 |
| RF generator R&S SMT-06     | 100005             | 4-Aug-99 (in house check Oct-09)  | In house check: Oct-11 |
| Network Analyzer HP 8753E   | US37390585 S4206   | 18-Oct-01 (in house check Oct-10) | In house check: Oct-11 |

Calibrated by: **Dimce Iliev** **Laboratory Technician** **D. Iliev**

Approved by: **Katja Pokovic** **Technical Manager** **Katja Pokovic**

Issued: January 27, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                           |             |
|------------------------------|---------------------------|-------------|
| DASY Version                 | DASY5                     | V52.6       |
| Extrapolation                | Advanced Extrapolation    |             |
| Phantom                      | Modular Flat Phantom V5.0 |             |
| Distance Dipole Center - TSL | 10 mm                     | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm         |             |
| Frequency                    | 1900 MHz $\pm$ 1 MHz      |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                  | Temperature         | Permittivity   | Conductivity         |
|----------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters      | 22.0 °C             | 40.0           | 1.40 mho/m           |
| Measured Head TSL parameters     | (22.0 $\pm$ 0.2) °C | 38.5 $\pm$ 6 % | 1.43 mho/m $\pm$ 6 % |
| Head TSL temperature during test | (20.5 $\pm$ 0.2) °C | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                                                 |
|-------------------------------------------------------|--------------------|-------------------------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                                                 |
| SAR measured                                          | 250 mW input power | 10.4 mW / g                                     |
| SAR normalized                                        | normalized to 1W   | 41.6 mW / g                                     |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>40.9 mW /g <math>\pm</math> 17.0 % (k=2)</b> |

|                                                         |                    |                                                 |
|---------------------------------------------------------|--------------------|-------------------------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                                                 |
| SAR measured                                            | 250 mW input power | 5.37 mW / g                                     |
| SAR normalized                                          | normalized to 1W   | 21.5 mW / g                                     |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>21.3 mW /g <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|                                  | Temperature     | Permittivity | Conductivity     |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters      | 22.0 °C         | 53.3         | 1.52 mho/m       |
| Measured Body TSL parameters     | (22.0 ± 0.2) °C | 52.9 ± 6 %   | 1.56 mho/m ± 6 % |
| Body TSL temperature during test | (20.8 ± 0.2) °C | ----         | ----             |

## SAR result with Body TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                   |
|-------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                          | 250 mW input power | 10.4 mW / g                       |
| SAR normalized                                        | normalized to 1W   | 41.6 mW / g                       |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>40.9 mW / g ± 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                   |
|---------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                            | 250 mW input power | 5.48 mW / g                       |
| SAR normalized                                          | normalized to 1W   | 21.9 mW / g                       |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>21.7 mW / g ± 16.5 % (k=2)</b> |

## Appendix

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $51.5 \Omega + 4.0 j\Omega$ |
| Return Loss                          | - 27.6 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $46.2 \Omega + 4.0 j\Omega$ |
| Return Loss                          | - 24.9 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.193 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                 |
|-----------------|-----------------|
| Manufactured by | SPEAG           |
| Manufactured on | August 29, 2002 |

## DASY5 Validation Report for Head TSL

Date/Time: 24.01.2011 11:20:43

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d022**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.002 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 19.131 W/kg


**SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.37 mW/g**

Maximum value of SAR (measured) = 12.963 mW/g

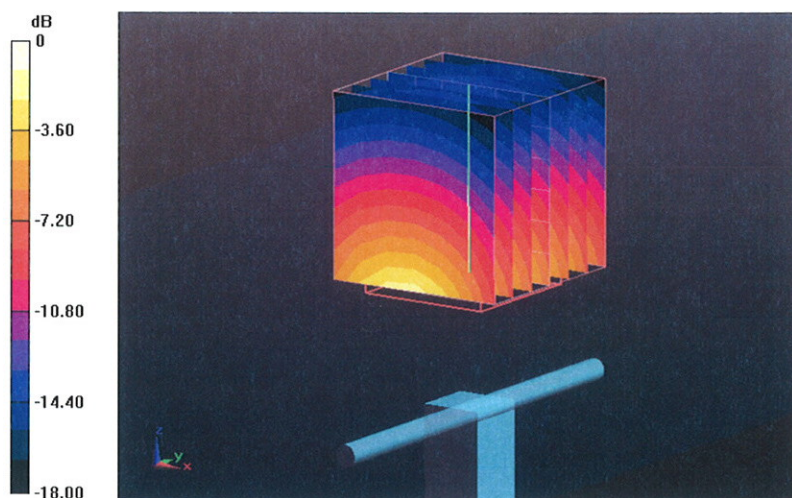

0 dB = 12.960mW/g

## Impedance Measurement Plot for Head TSL

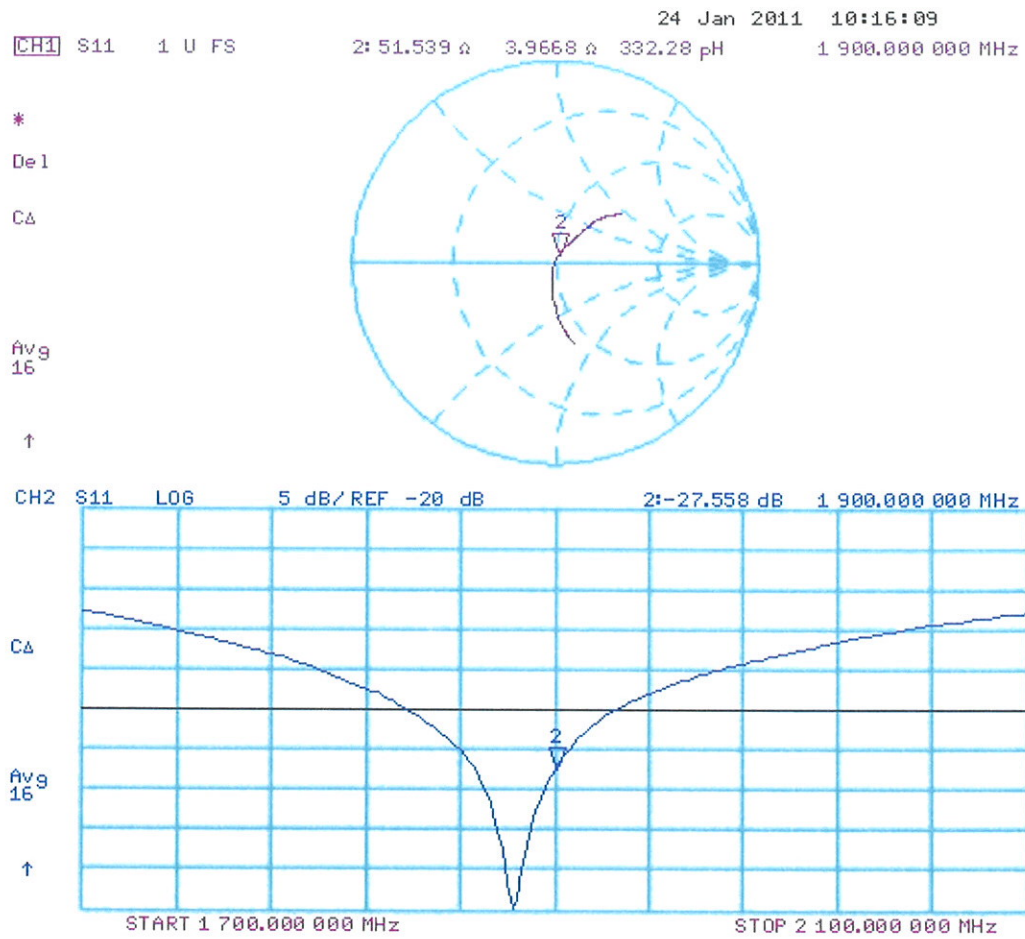

## DASY5 Validation Report for Body TSL

Date/Time: 26.01.2011 12:06:07

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d022**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.56 \text{ mho/m}$ ;  $\epsilon_r = 53.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement**  
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.936 V/m; Power Drift = -0.0021 dB

Peak SAR (extrapolated) = 17.774 W/kg

**SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.48 mW/g**

Maximum value of SAR (measured) = 13.186 mW/g

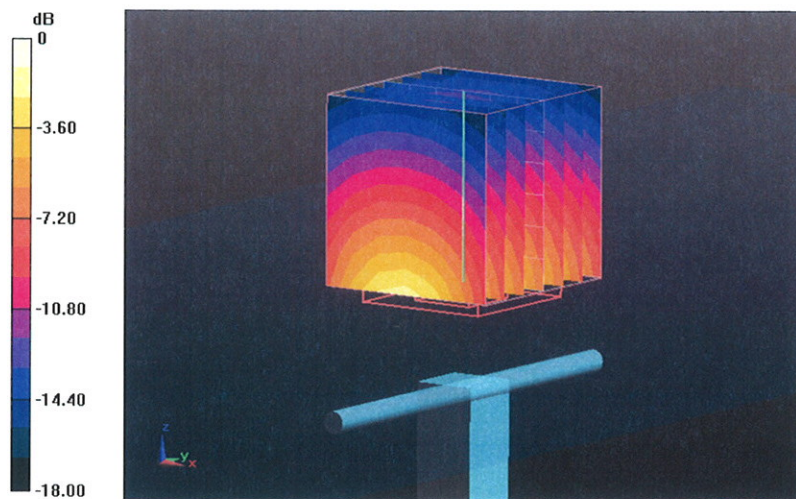

0 dB = 13.190mW/g

Impedance Measurement Plot for Body TSL

