

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : E07OR-022

AGR No : A079A-045

Applicant : RITS-N Co., Ltd.
Address : B-305, Changmi Building, Sung-Su 2ga-3dong, Sungdong-gu, Seoul, Korea

Manufacturer : RITS-N Co., Ltd.
Address : B-305, Changmi Building, Sung-Su 2ga-3dong, Sungdong-gu, Seoul, Korea

Type of Equipment : Garage door remote control (RF Transmitter)

FCC ID. : VQP-RT321A

Model Name : RT-321A

Serial number : None

Total page of Report : 15 pages (including this page)

Date of Incoming : September 28, 2007


Date of issue : October 15, 2007


SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.231.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

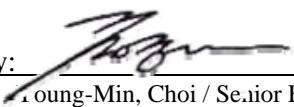Prepared by: 
Young-Min, Choi / Senior Engineer
EMC Div.
ONETECH Corp.

Reviewed by: 
Y. K. Kwon / Director
EMC Div.
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	3
2. GENERAL INFORMATION	4
2.1 PRODUCT DESCRIPTION.....	4
2.2 MODEL DIFFERENCES.....	4
2.3 RELATED SUBMITTAL(S) / GRANT(S)	4
2.4 PURPOSE OF THE TEST	4
2.5 TEST METHODOLOGY	4
2.6 TEST FACILITY	4
3. SYSTEM TEST CONFIGURATION	5
3.1 JUSTIFICATION	5
3.2 PERIPHERAL EQUIPMENT.....	5
3.3 MODE OF OPERATION DURING THE TEST.....	5
3.4. EUT MODIFICATIONS	5
3.5 CONFIGURATION OF TEST SYSTEM	5
3.6 ANTENNA REQUIREMENT	6
4. PRELIMINARY TEST	6
4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	6
4.2 GENERAL RADIATED EMISSIONS TESTS.....	6
5. FINAL RESULT OF MEASUREMENT	7
5.1 FIELD STRENGTH OF THE CARRIER TEST	7
5.2 MAXIMUM MODULATION PERCENTAGE (MMP).....	7
5.3 TRANSMITTER TRANSMISSION DURATION.....	10
5.4 SPURIOUS EMISSION TEST	11
5.5 BANDWIDTH OF THE OPERATING FREQUENCY	12
6. FIELD STRENGTH CALCULATION	14
7. LIST OF TEST EQUIPMENT	15

1. VERIFICATION OF COMPLIANCE

APPLICANT : RITS-N Co., Ltd.
ADDRESS : B-305, Changmi Building, Sung-Su 2ga-3dong, Sungdong-gu, Seoul, Korea
CONTACT PERSON : Mr. Jun-Seok, Kim / General Manager
TELEPHONE NO : +82-2-495-0871
FCC ID : VQP-RT321A
MODEL NAME : RT-321A
BRAND NAME : RITS-N
SERIAL NUMBER : N/A
DATE : October 15, 2007

EQUIPMENT CLASS	DSC - Part 15, Security/Remote Control Transmitter
KIND OF EQUIPMENT	Garage door remote control (RF Transmitter)
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.231
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER(S) OPEN AREA TEST SITE

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. GENERAL INFORMATION

2.1 Product Description

The RITS-N Co., Ltd., Model: RT-321A (referred to as the EUT in this report) is a Garage door remote control (RF Transmitter) that used for Gate Door, Overhead Door, Slide Door Garage Door, Barrier Gate etc. Available in each case requiring the functions of UP(opening) and DOWN(closing). Product specification information described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	Portable Device
OPERATING FREQUENCY	311.06 MHz
ANTENNA	Inserted into the main board (Pattern Antenna)
CHANNEL	1 Channel
MODULATION	AM
TRANSMISSION TIME	Not longer than 1 sec
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	None
NUMBER OF LAYER	2 Layers
POWER REQUIREMENT	DC 12V from a battery
EXTERNAL CONNECTOR	None

* Remark: This equipment has manual switch and automatically deactivates RF signal within not more than 1 second of being released.

2.2 Model Differences

-. None

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003 at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The Electromagnetic compatibility measurement facilities are located on at 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-080, Korea. Description details of test facilities were submitted to the Federal Communications Commission on August 30, 2005 (Registration Number: 92819 and 340658), accredited by KOLAS (Korea Laboratory Accreditation Scheme, No: 85) and approved by TUV, DNV and MIC (Ministry of Information and Communications in Korea) according to the requirement of ISO17025.

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	RITS-N Co., Ltd.	RT-321A	N/A

3.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested: None

3.3 Mode of operation during the test

To get a maximum radiated emission from the EUT, the button on the EUT was continuously pressed to transmit the signal.

To activate continuous transmission, place a small plastic block between rubber band and the push button on the EUT.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

3.4. EUT MODIFICATIONS

- None

3.5 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC battery.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 60kHz/division frequency span, 10 kHz resolution bandwidth and 10dB/division logarithmic display from an 8568B spectrum analyzer.

3.6 Antenna Requirement

According to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is a pattern antenna on the main board in the EUT, so no consideration of replacement by the user.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied from a DC battery.	

4.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX Mode	X

5. FINAL RESULT OF MEASUREMENT

5.1 Field Strength of the Carrier Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 47 % Temperature: 25 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)
 Type of Test : INTENTIONAL RADIATOR
 Result : PASSED BY -11.60 dB with Peak detector

EUT : Garage door remote control (RF Transmitter) Date: October 08, 2007
 Operating Condition : TX mode
 Distance : 3 Meter

Radiated Emissions			Ant	Correction Factors			Total	FCC	
Carrier Freq. (MHz)	Amplitude (dBuV)	Detector Mode	Pol.	Antenna (dB/m)	Cable (dB)	Average Level Factor	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
311.06	55.20	Peak	H	14.46	3.37	-9.25	63.78	75.38	-11.60
	53.40	Peak	V			-9.25	61.98	75.38	-13.40

*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

“Q.P.”: Quasi-Peak, “AVE”: Average, “H”: Horizontal Polarization, “V”: Vertical Polarization

5.2 Maximum Modulation Percentage (MMP)

In order to determine possible Maximum Modulation Percentage from the EUT, we measured the duty cycle according to the clause H4.(j) in ANSI C63.4: 2003.

The pulse train from the EUT was consisting of long and short pulse. The measured values are as follows.

Long Pulse (LP)	Short Pulse (SP)	Total sum of LP	Total sum of SP	Pulse Width
1.417ms	0.433ms	11	14	62.83
Duty Cycle		$(11 \times 1.417 + 14 \times 0.433) / 62.83 = 0.3446$		
Maximum Modulation Percentage(MMP)		Duty Cycle X 100 % = 34.46%		
Average Level Factor		-9.25 dB		

Remark: Please refer to Photo Data for MMP.


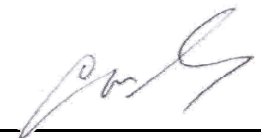

Tested by: In-Sub, Youn / Test Engineer

Photo Data for MMP

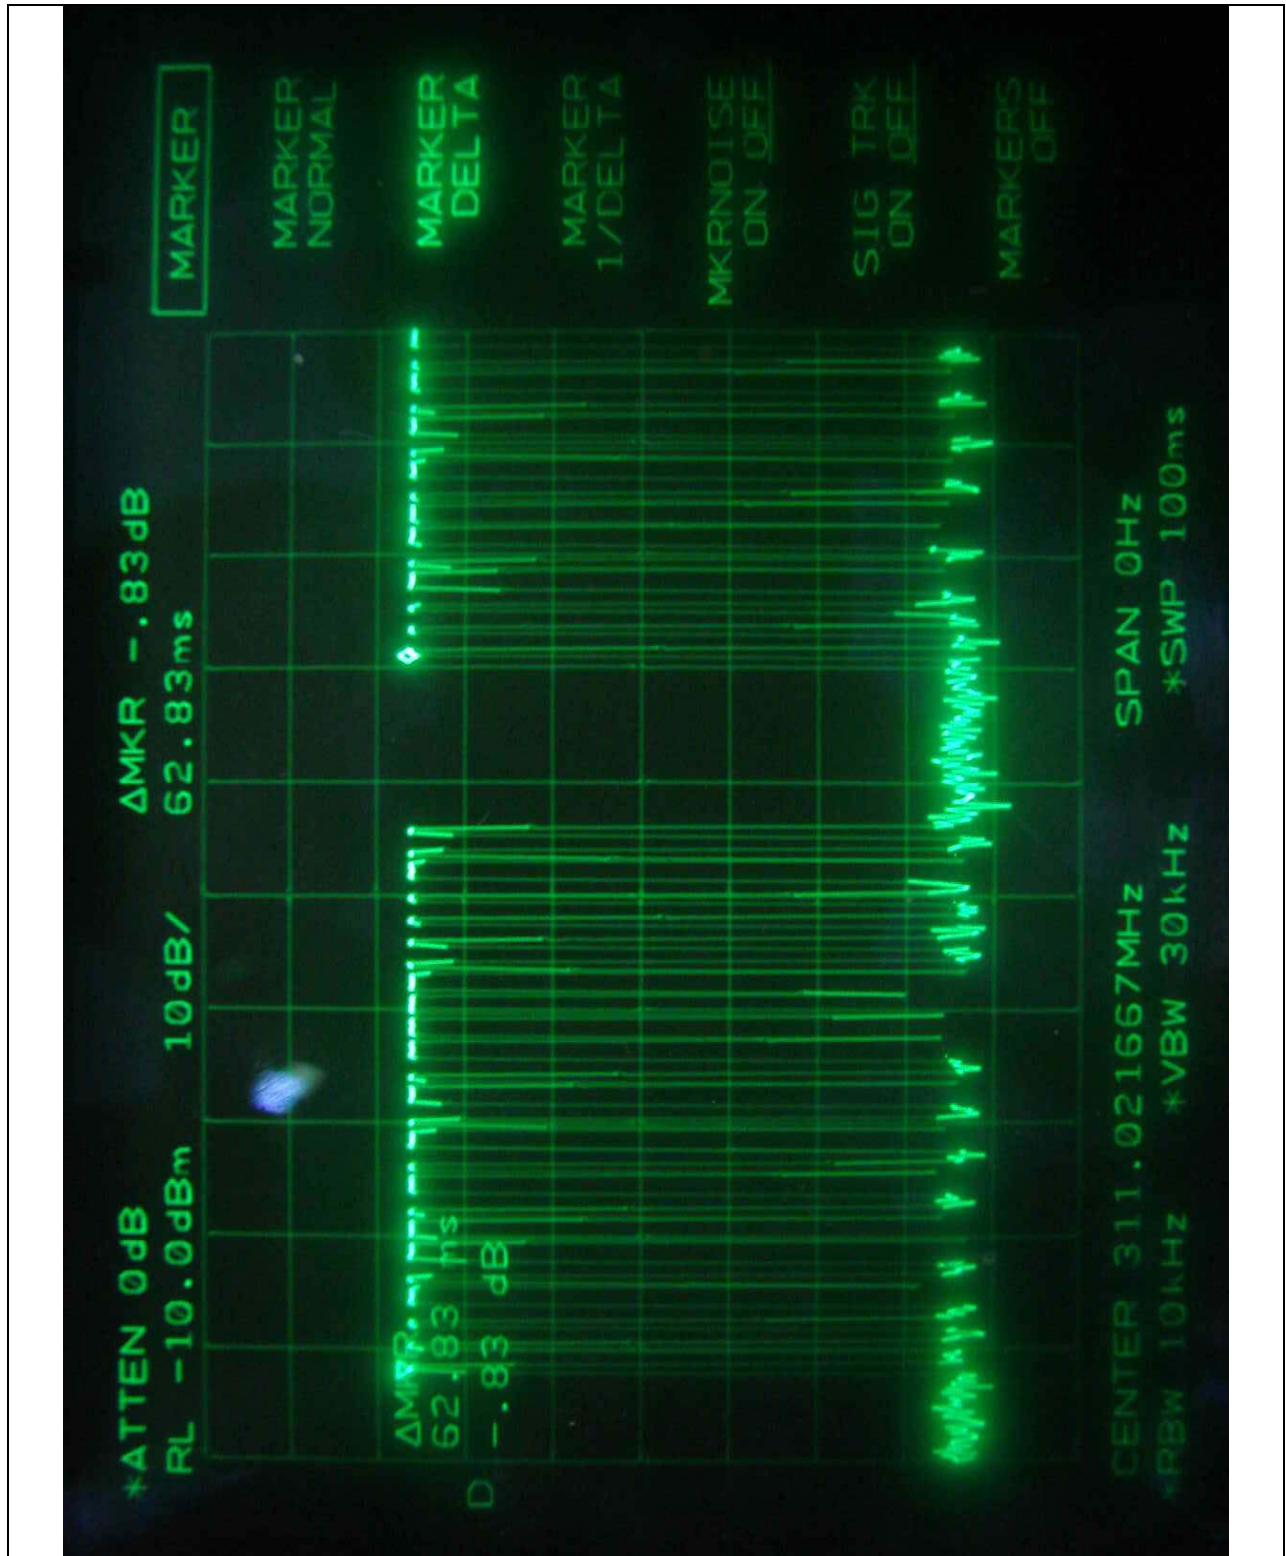


It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

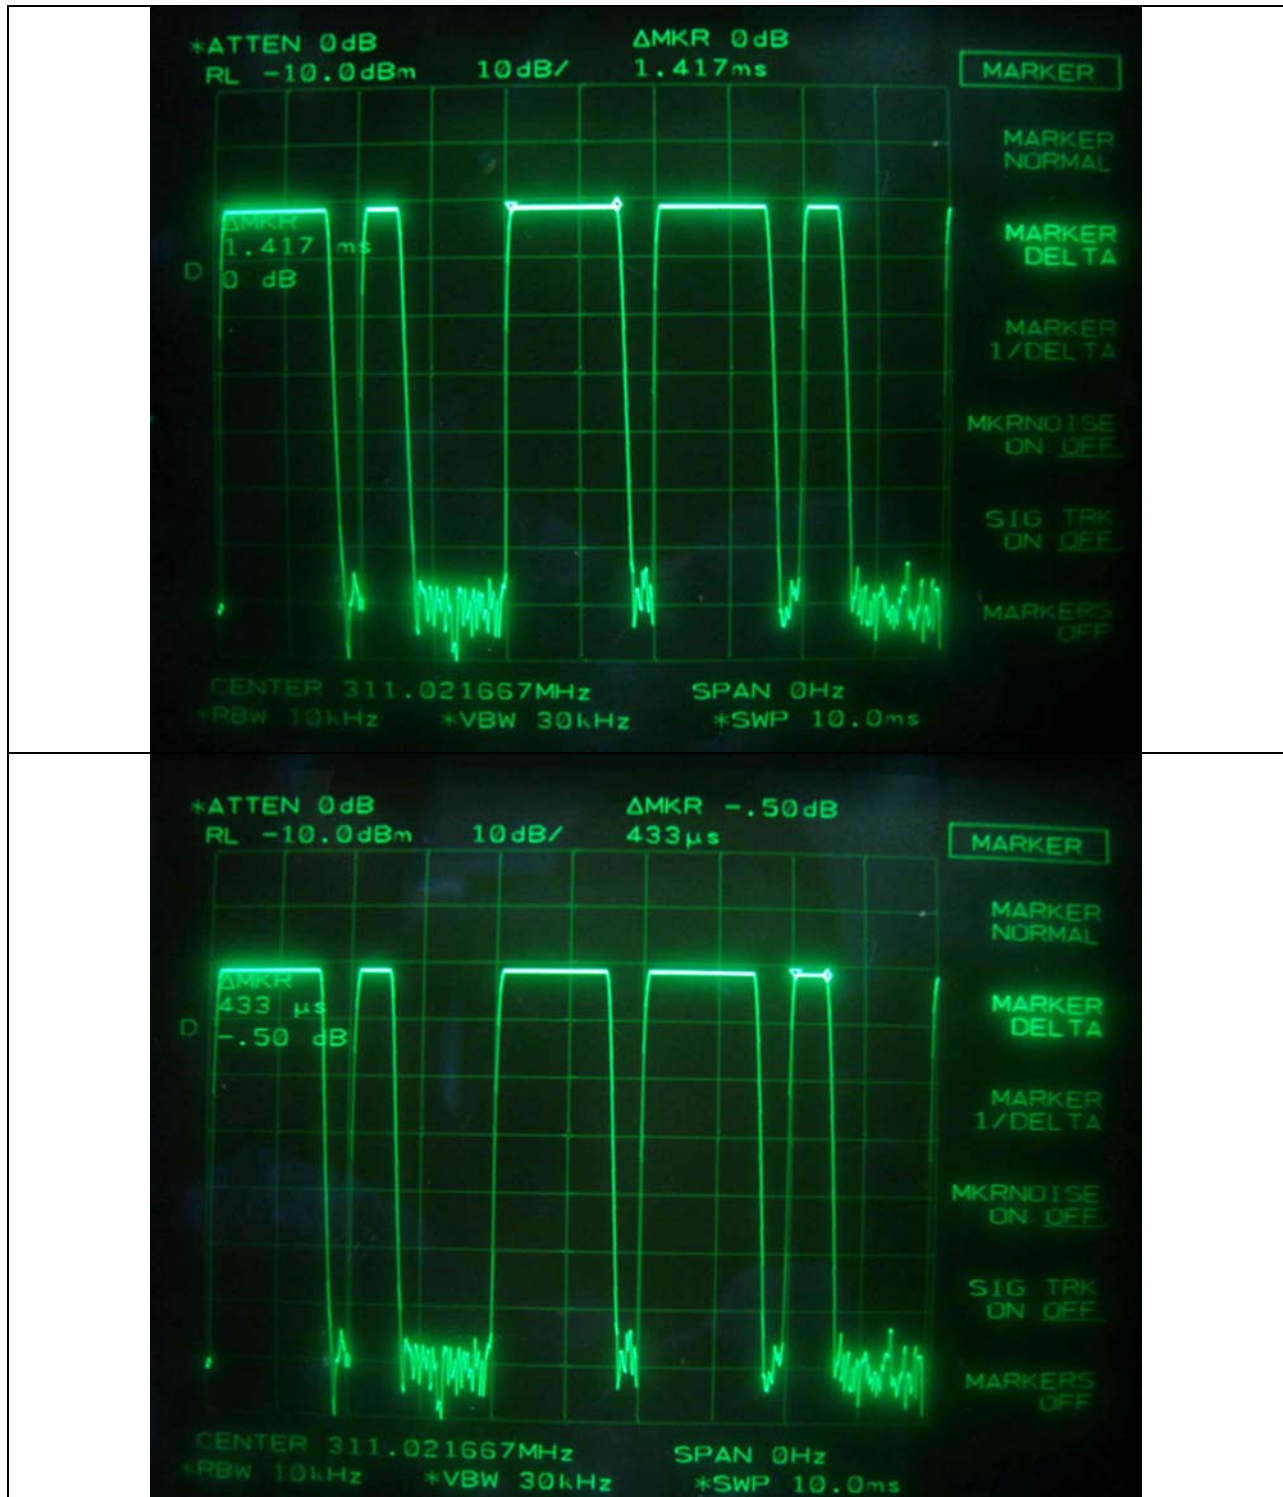

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 dong, Jungwon-gu, Seongnam-si, Gyeonggi-do, 462-121, Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 307-51 Daessangryung-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)

5.3 Transmitter Transmission Duration

Humidity Level : 47 % Temperature: 25 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231 (a)
 Type of Test : INTENTIONAL RADIATOR

EUT : Remote Keyless Entry System Date: October 09, 2007
 Operating Condition : Switch on the EUT was continuously pushed

Manually Activated Duration (Sec)	Limit (sec)	Margin (Sec)	Result
4.583	5.0	0.427	Pass



[Handwritten Signature]
 Tested by: In-Sub, Youn / Test Engineer

5.4 Spurious Emission Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.


Humidity Level : 47 % Temperature: 25 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)
 Type of Test : INTENTIONAL RADIATOR
 Result : PASSED BY -6.98dB at 933.19 MHz

EUT : Garage door remote control (RF Transmitter) Date: October 09, 2007
 Operating Condition : TX mode
 Distance : 3 Meter

Radiated Emissions			Ant	Correction Factors			Total	FCC	
Carrier Freq. (MHz)	Amplitude (dBuV)	Detector Mode	Pol.	Antenna (dB/m)	Cable (dB)	Average Level Factor	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
622.15	26.89	Peak	H	20.30	5.32	-9.25	43.26	55.38	-12.12
	24.90	Peak	V				41.27	55.38	-14.11
933.19	27.96	Peak	H	22.59	7.10	-9.25	48.40	55.38	-6.98
	24.68	Peak	V				45.12	55.38	-10.26
1244.25	18.40	Peak	H	31.49	9.50	-9.25	50.14	55.38	-5.24
	16.29	Peak	V				48.03	55.38	-7.35
Other spurious frequencies were not found up to 5 GHz.									

*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

“Q.P.” : Quasi-Peak, “AVE”: Average, “H”: Horizontal Polarization, “V”: Vertical Polarization



Tested by: In-Sub, Youn / Test Engineer


5.5 Bandwidth of the operating frequency

Humidity Level : 47 % Temperature: 25 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231 (c)
 Type of Test : INTENTIONAL RADIATOR
 Result : PASSED

EUT : Garage door remote control (RF Transmitter) Date: October 09, 2007
 Operating Condition : TX mode
 Minimum Resolution
 Bandwidth : 10 kHz

Carrier Freq. (MHz)	Bandwidth of the emission. (kHz)	Limit (kHz)	Remark
311.007	60.0	777.5	<u>The point 20dB down from the modulated carrier</u>

Remark: Please refer to Photo Data for bandwidth for test data.

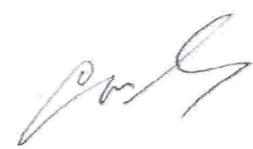

Tested by: In-Sub, Youn / Test Engineer

Plotted Data for bandwidth



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS10	827864/005	DEC/06	12MONTH	
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/07	12MONTH	■
3.	Spectrum analyzer	HP	8566B	2516A01677	JUN/07	12MONTH	■
4.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 202	AUG/06	24MONTH	
5.	Biconical antenna	EMCO	3110	9003-1121	JUN/07	12MONTH	
		Schwarzbeck	VHA9103	91031852	FEB/07		■
6.	Log Periodic antenna	Schwarzbeck	9108-A(494)	62281001	FEB/07	12MONTH	
7.	LISN	EMCO	3825/2	9109-1867	JUN/07	12MONTH	
				9109-1869	JUN/07		
		Schwarzbeck	NSLK 8126	8126-404	JUL/07		■
8.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
9.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
10.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■
11.	RF Amplifier	HP	8447D	2727A04987	JUN/07	12MONTH	■
12.	Horn Antenna	Schwarzbeck	BBHA9120D	BBHA9120D294	JUL/06	24MONTH	■
13.	Spectrum Analyzer	HP	8564E	3650A00756	JUN/07	12MONTH	■
14.	Position Controller	HD	HD100	100/788	N/A	N/A	■
15.	Turn Table	HD	DS420S	N/A	N/A	N/A	■
16.	Antenna Master	HD	HD240	N/A	N/A	N/A	■
17.	Isolation Transformer	Digitex Power	DPT	DPF-22027	N/A	N/A	■
18.	Isolation Transformer	Digitex Power	DPT	DPF-22028	N/A	N/A	■
19.	Frequency Converter	Digitex Power	VFS/DEFC	N/A	N/A	N/A	■