



TEST REPORT

Report No.: SRTC2014-H024-E0070

Product Name: GSM/GPRS/EDGE/UMTS

Digital Mobile Phone with Bluetooth and WiFi

Product Model: Philips S308

Applicant: Shenzhen Sang Fei Consumer Communications Co.,Ltd.

Manufacturer: Shenzhen Sang Fei Consumer Communications Co.,Ltd.

Specification: FCC Part 15, Subpart C (October 1, 2013 edition)

FCC ID: VQRCTS308

The State Radio_monitoring_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

CONTENTS

1. General information	3
1.1 Notes of the test report.....	3
1.2 Information about the testing laboratory	3
1.3 Applicant's details	3
1.4 Manufacturer's details	3
1.5 Application details.....	4
1.6 Reference specification	4
1.7 Information of EUT	4
1.7.1 General information.....	4
1.7.2 EUT details.....	5
1.7.3 Auxiliary equipment details	5
2. Test information.....	6
2.1 Summary of the test results.....	6
2.2 Test result	7
2.2.1 Peak Power Output.....	7
2.2.2 Occupied Bandwidth	10
2.2.3 Transmitter Power Spectral Density.....	19
2.2.4 Conducted Out of band emission measurement	28
2.2.5 Spurious Radiated Emissions	33
2.2.6 AC Power line Conducted Emission	53
2.3. Measurement Uncertainty	56
2.4. List of test equipment	57
Appendix.....	58

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio_monitoring_center Testing Center (SRTC)
Address: No.80 Beilishi Road, Xicheng District, Beijing China
City: Beijing
Country or Region: China
Contacted person: Wang Junfeng
Tel: +86 10 68009181 +86 10 68009202
Fax: +86 10 68009195 +86 10 68009205
Email: wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

1.3 Applicant's details

Company: Shenzhen Sang Fei Consumer Communications Co.,Ltd.
Address: 11 Science & Technology Rd., Shenzhen Hi-tech Industrial Park, Nanshan District, Shenzhen
City: Shenzhen
Country or Region: P.R.China
Grantee Code: VQRCT
Contacted person: Helen.Lin
Tel: 86-755-33308888
Fax: 86-755-26614979
Email: Helen.Lin@sangfei.com

1.4 Manufacturer's details

Company: Shenzhen Sang Fei Consumer Communications Co.,Ltd.
Address: 11 Science & Technology Rd., Shenzhen Hi-tech Industrial Park, Nanshan District, Shenzhen
City: Shenzhen
Country or Region: P.R.China
Contacted person: Helen.Lin
Tel: 86-755-33308888
Fax: 86-755-26614979
Email: Helen.Lin@sangfei.com

1.5 Application details

Date of reception of test sample: 26th August 2014

Date of test: 1st September 2014 to 12nd September 2014

1.6 Reference specification

FCC Part 15, Subpart C (October 1, 2013 edition)

1.7 Information of EUT

1.7.1 General information

Name of EUT	GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi
FCC ID	VQRCTS308
Frequency Range	2.4GHz~2.4835GHz
Number of Channel	11
Modulation Type	DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM
Duplex Mode	TDD
Channel Spacing	5MHz
Data Rate	1Mbps/2Mbps/5.5Mbps/11Mbps/6Mbps/9Mbps/12Mbps /18Mbps/24Mbps/36Mbps/48Mbps/54Mbps/6.5Mbps /13.0Mbps/13.5Mbps/19.5Mbps/26.0Mbps/27.0Mbps /39.0Mbps/40.5Mbps/52.0Mbps/58.5Mbps/65Mbps /81.0Mbps/108.0Mbps/121.5Mbps/135.0Mbps
Transmit Mode	Continuously
Duty Cycles	98%
Antenna Type	Fixed Internal
Power Supply	Battery or Charger
Rated Power Supply Voltage	3.7V
HW Version	TMB1a
SW Version	S308_M6572M_1432_V01A_AM_FCC

1.7.2 EUT details

Product Name	Product Model	IMEI
GSM/GPRS/EDGE/UMTS Digital Mobile Phone with Bluetooth and WiFi	Philips S308	862391023896194

1.7.3 Auxiliary equipment details




Equipment	Charger
Manufacturer	ShenZhen AoHai Technology Co., Ltd
Model Number	A31-500650
Input Voltage	100V-240V a.c.
Output Voltage	5.0V d.c.
Frequency	50/60Hz

Equipment	Battery
Manufacturer	Shenzhen cyclelong power-tech Co., ltd
Model Number	ABI400BWML
Capacity	1400 mAh
Rated Voltage	3.7V d.c.

2. Test information

2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	Peak Power Output	15.247(b)(3)	Pass
2	Occupied Bandwidth	15.247(a)(2)	Pass
3	Transmitter Power Spectral Density	15.247(e)	Pass
4	Conducted Out of band emission measurement	15.247(d)	Pass
5	Spurious Radiated Emissions	15.247(d)/15.35(b)/15.209	Pass
6	AC Power line Conducted Emission	15.207	Pass

This Test Report Is Issued by: Director of the test lab 	Checked by: Deputy director of the test lab 
Tested by: Mr. Jiang Shuo Test engineer 	Issued date: 2014.09.16

2.2 Test result

2.2.1 Peak Power Output

2.2.1.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.1.2 Test Description

A transmitter antenna terminal of EUT is connected to the power meter. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies.

2.2.1.3 Test limit

Fcc Part15.247(b)(3)

The maximum permissible conducted output power is 1 Watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30 dBm

2.2.1.4 Test Procedure Used


KDB 558074 D01 v03r01 - Section 9.1.3

2.2.1.5 Test Settings

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

2.2.1.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

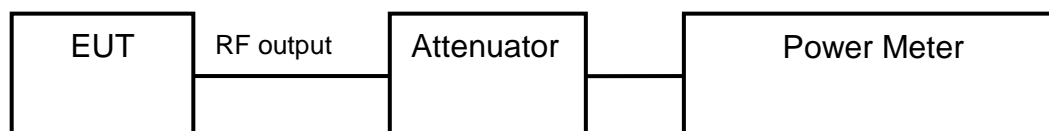

2.2.1.7 Test result

Modulation type		Average power output (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
11b	1 Mbps	14.37	14.45	14.77
	2 Mbps	14.21	14.37	14.54
	5.5 Mbps	14.08	14.22	14.21
	11 Mbps	13.93	14.03	14.17
11g	6 Mbps	10.02	14.20	10.28
	9 Mbps	9.89	14.01	9.87
	12 Mbps	9.23	13.89	9.45
	18 Mbps	8.99	13.54	9.01
	24 Mbps	8.71	12.90	8.91
	36 Mbps	8.15	12.40	8.48
	48 Mbps	7.84	12.02	8.03
	54 Mbps	7.50	11.82	7.88
11n HT20	6.5 Mbps	9.99	14.33	10.37
	13 Mbps	9.38	13.98	9.97
	19.5 Mbps	8.94	13.67	9.45
	26 Mbps	8.47	13.02	9.21
	39 Mbps	7.98	12.89	8.97
	52 Mbps	7.87	12.62	8.58
	58.5 Mbps	7.36	12.01	8.01
	65 Mbps	7.21	11.63	7.67

Modulation type		Average power output (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2462MHz (Ch11)
11n HT40	13.5 Mbps	8.14	13.40	13.52
	27 Mbps	7.94	12.99	13.01
	40.5 Mbps	7.49	12.56	12.41
	54 Mbps	7.03	11.91	12.21
	81 Mbps	6.77	11.27	11.95
	108 Mbps	6.02	10.87	11.33
	121.5 Mbps	5.71	10.28	10.87
	135 Mbps	5.08	9.94	10.13

Modulation type		Peak power output (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
11b	1 Mbps	16.82	17.11	17.29
	2 Mbps	16.45	16.89	17.14
	5.5 Mbps	16.53	17.01	17.21
	11 Mbps	16.71	16.91	17.23
11g	6 Mbps	20.30	21.59	20.25
	9 Mbps	20.13	21.51	19.97
	12 Mbps	20.22	21.43	20.02
	18 Mbps	19.98	21.37	20.21
	24 Mbps	20.01	21.21	19.91
	36 Mbps	19.37	21.31	20.00
	48 Mbps	19.89	21.29	20.14
	54 Mbps	19.63	21.45	20.21
11n HT20	6.5 Mbps	19.77	21.43	20.62
	13 Mbps	19.45	21.31	19.89
	19.5 Mbps	19.31	21.14	20.21
	26 Mbps	19.66	21.19	20.39
	39 Mbps	19.54	21.32	20.54
	52 Mbps	19.39	21.41	20.12
	58.5 Mbps	19.21	21.26	20.33
	65 Mbps	19.30	21.30	19.90

Modulation type		Peak power output (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2462MHz (Ch11)
11n HT40	13.5 Mbps	17.34	20.65	20.53
	27 Mbps	16.98	20.11	20.36
	40.5 Mbps	17.11	20.46	20.24
	54 Mbps	17.23	20.19	20.51
	81 Mbps	16.89	20.44	20.31
	108 Mbps	17.01	20.31	20.17
	121.5 Mbps	17.28	20.12	20.09
	135 Mbps	16.73	20.02	20.29

* The data rate 1Mbps, 6Mbps, 6.5Mbps, 13.5Mbps are selected as worse condition, and the following cases are performed with this condition.

2.2.2 Occupied Bandwidth

2.2.2.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.2.2 Test Description

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer and Bluetooth test set via a power splitter with a known loss. Which connected to the transmitter antenna terminal of the EUT while the EUT is operating at maximum power and at the appropriate frequencies. All modes of operation were investigated and the worst case configuration results are reported in this section.

2.2.2.3 Test limit

FCC Part15.247(a)(2)

The minimum permissible 6dB bandwidth is 500 kHz

2.2.2.4 Test Procedure Used


KDB 558074 D01 v03r01 - Section 8.1 Option 1

2.2.2.5 Test Settings

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2.2.2.6 Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.

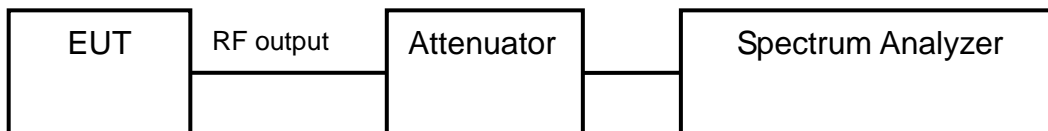

2.2.2.7 Test result


Test Mode: 802.11b

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	10.13
2437	6	10.13
2462	11	10.13

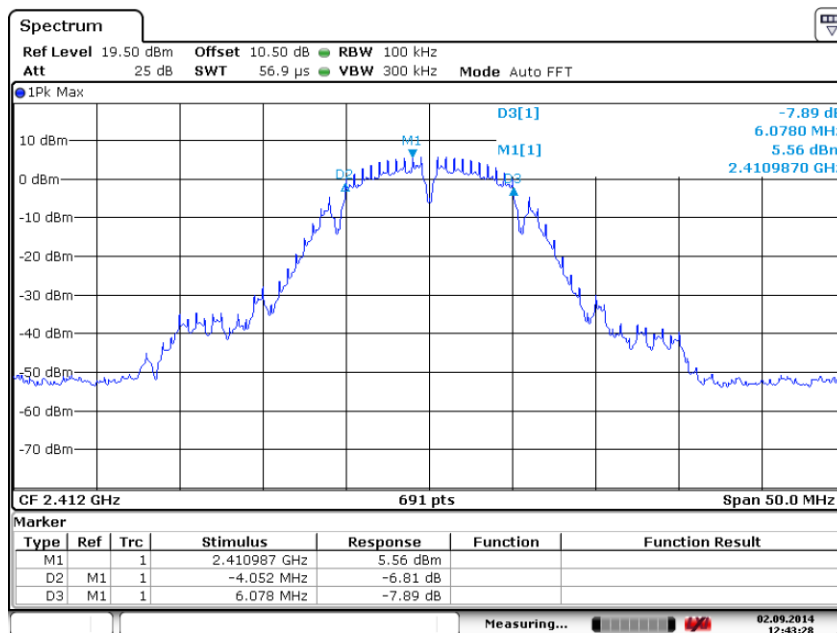


Date: 2.SEP.2014 12:43:27

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11b

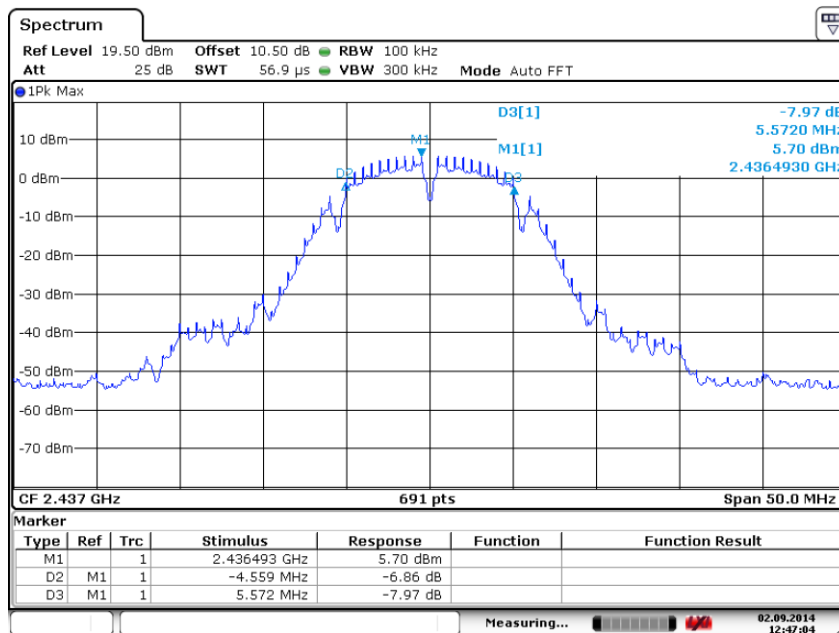

Date: 2.SEP.2014 12:47:04

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11b

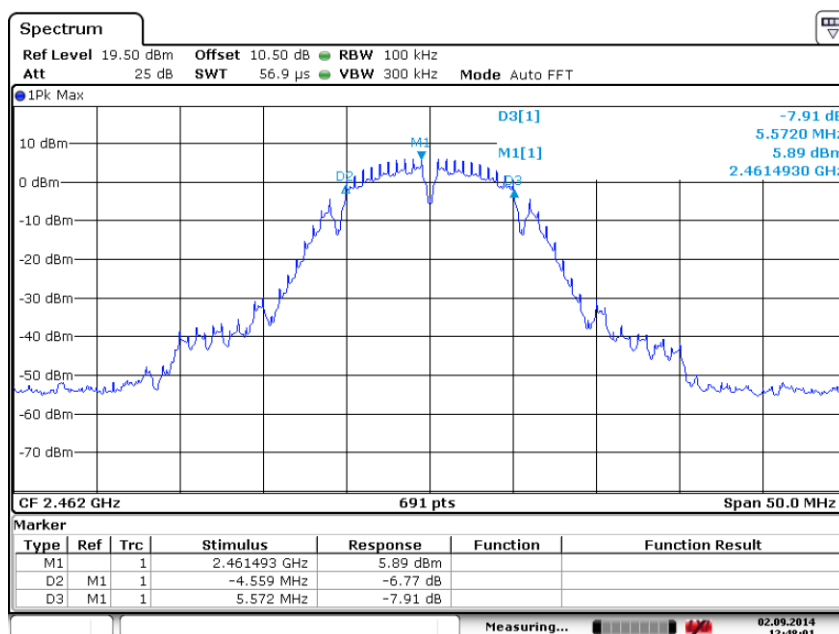


Date: 2.SEP.2014 12:48:01

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b


Test Mode: 802.11g

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	15.20
2437	6	15.27
2462	11	15.77

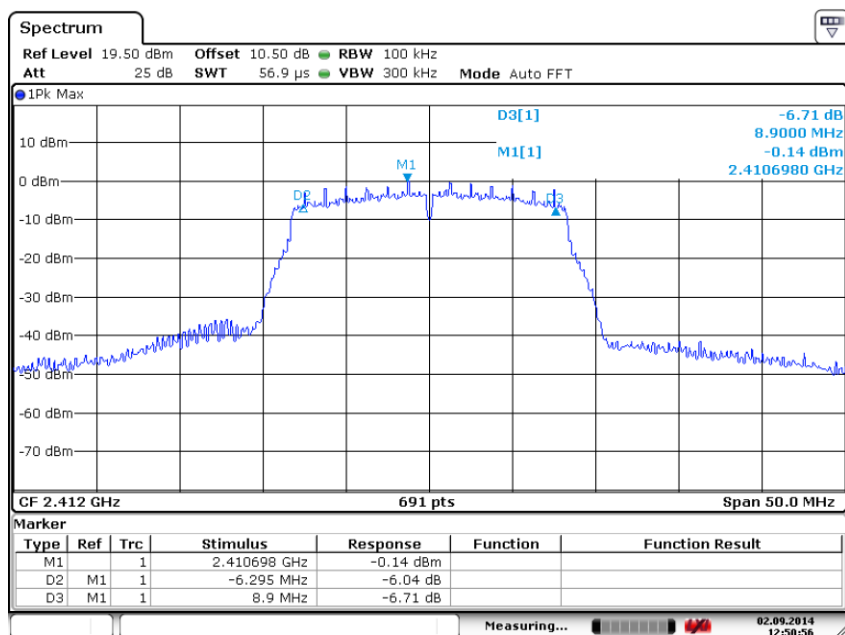


Date: 2.SEP.2014 12:50:56

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g

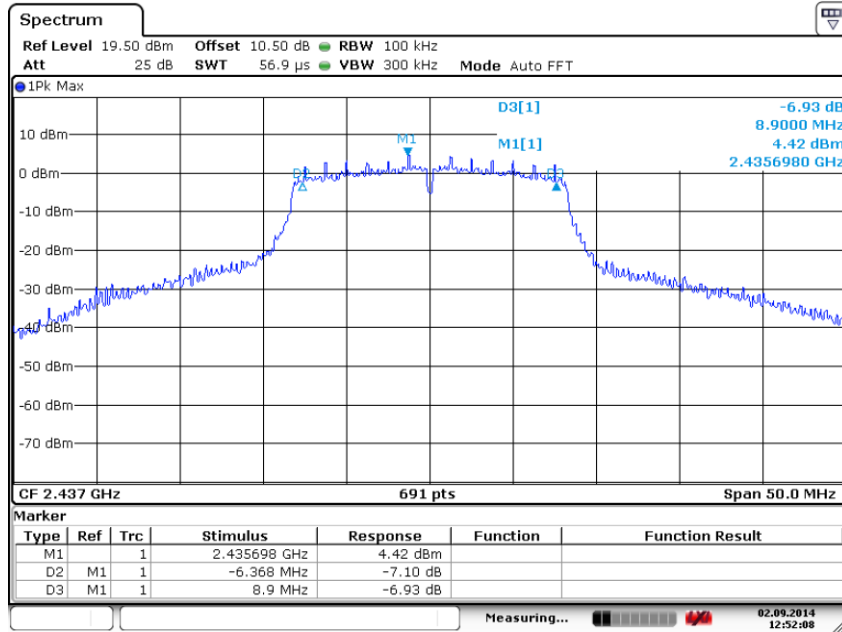

Date: 2.SEP.2014 12:52:08

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11g

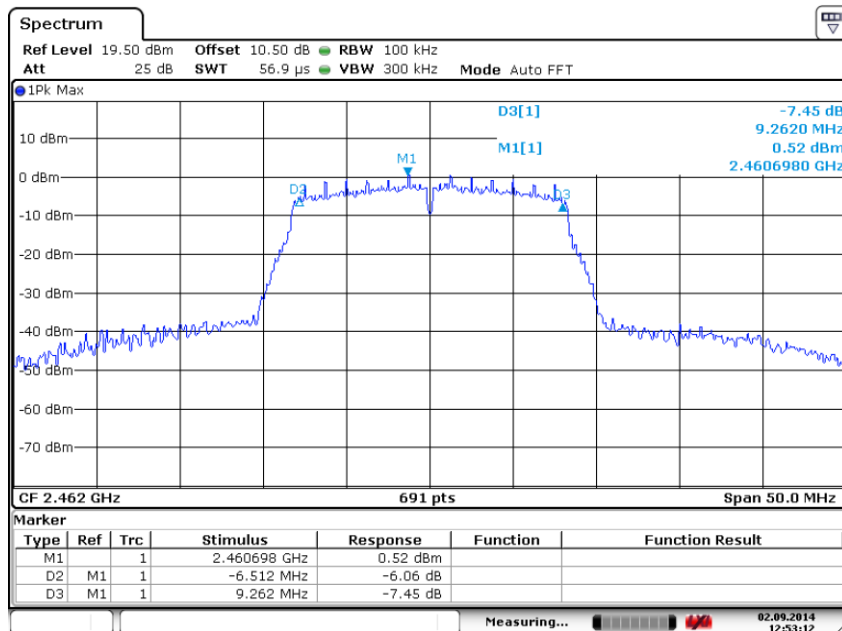


Date: 2.SEP.2014 12:53:12

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g


Test Mode: 802.11n(HT20)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	16.14
2437	6	15.49
2462	11	15.27

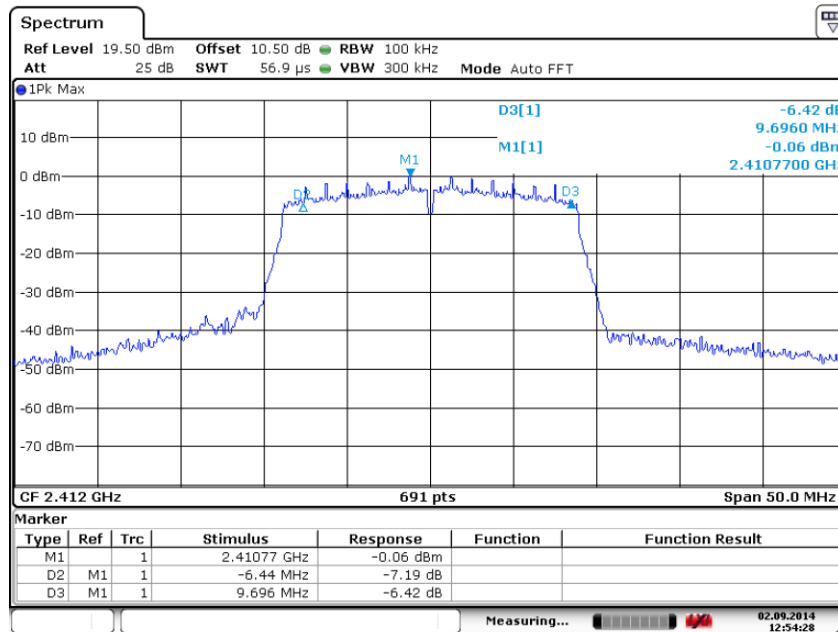


Date: 2.SEP.2014 12:54:28

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)

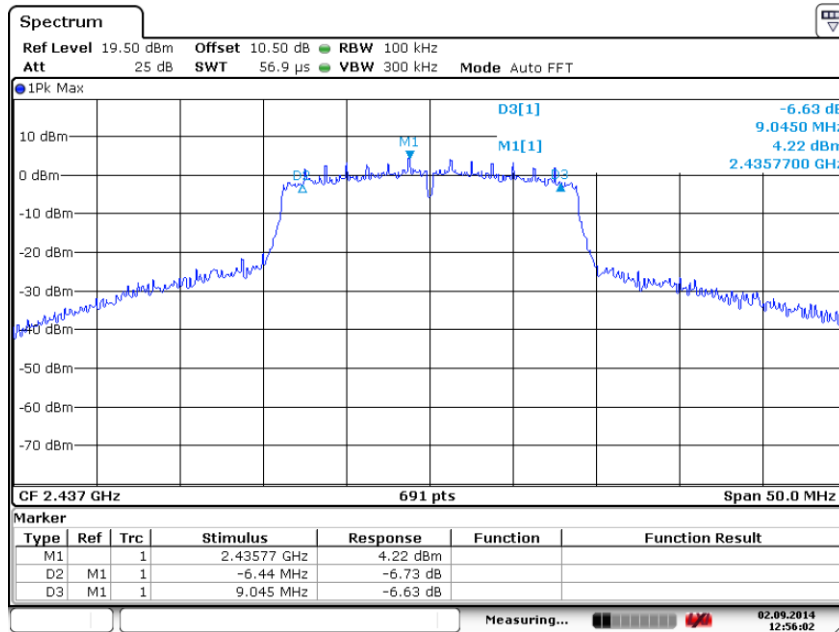

Date: 2.SEP.2014 12:56:02

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11n(HT20)

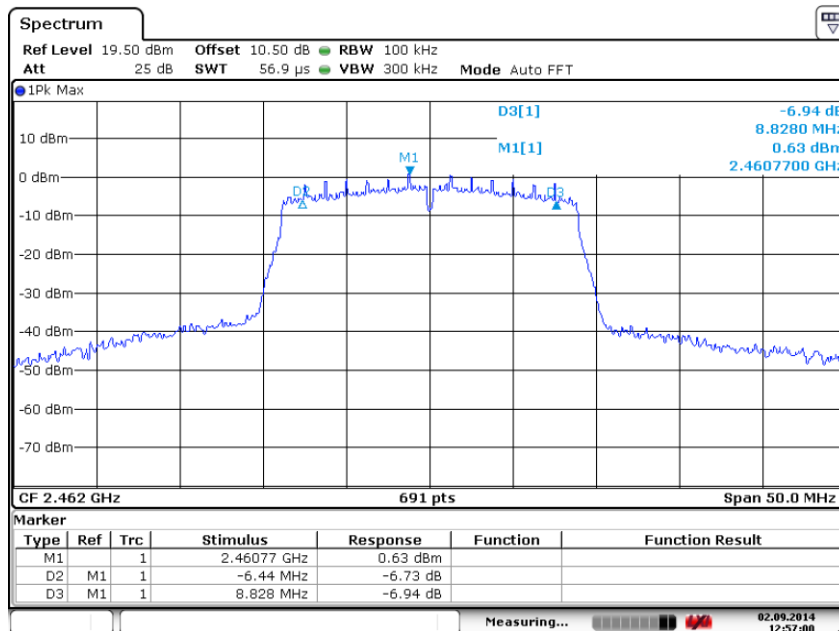


Date: 2.SEP.2014 12:57:00

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)


Test Mode: 802.11n(HT40)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2422	3	35.32
2437	6	35.32
2462	11	34.88

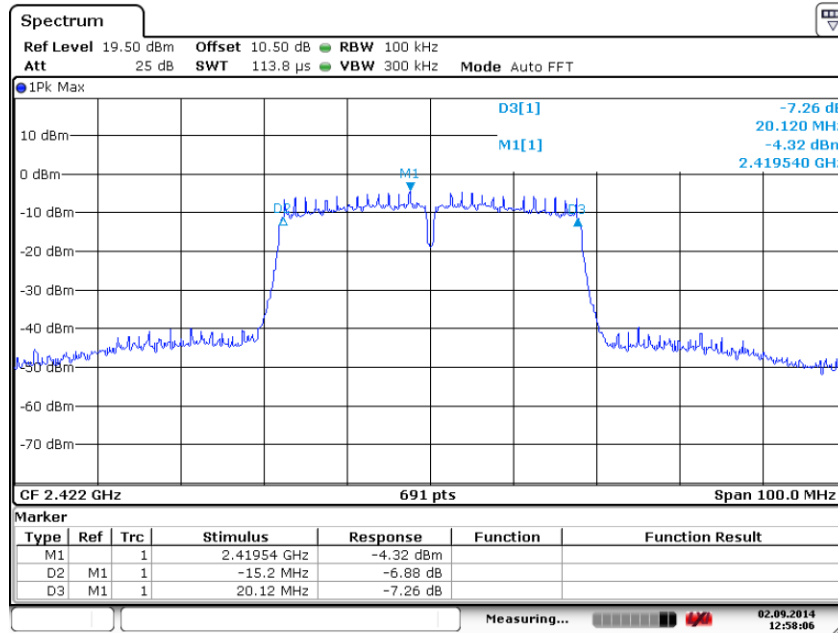


Date: 2.SEP.2014 12:58:07

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40)

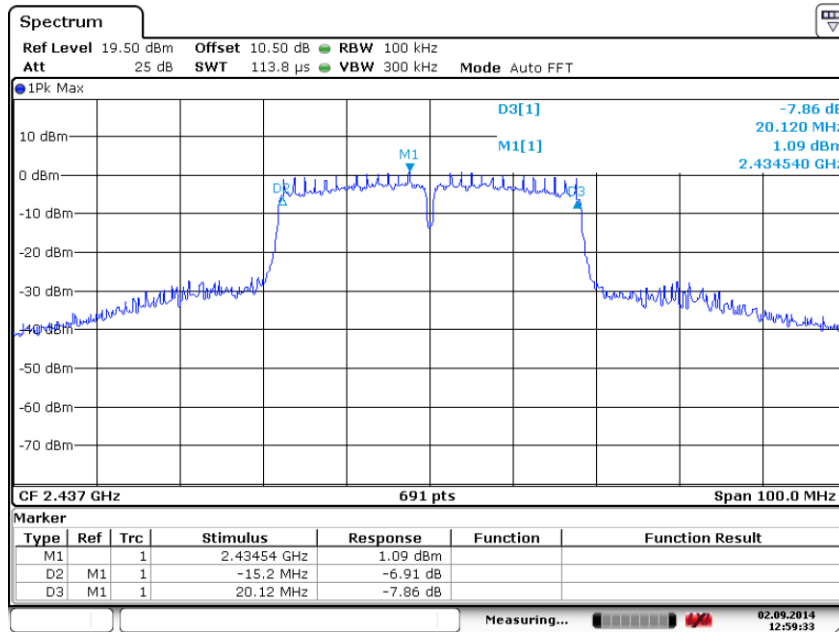

Date: 2.SEP.2014 12:59:33

Carrier frequency (MHz): 2437
Channel No.:6
Test Mode: 802.11n(HT40)

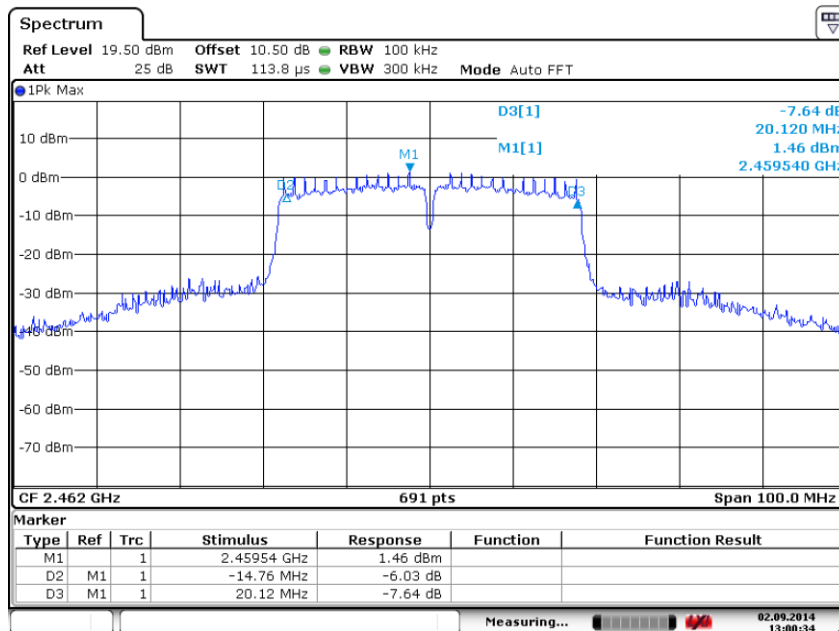

Date: 2.SEP.2014 13:00:35

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT40)

2.2.3 Transmitter Power Spectral Density

2.2.3.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.3.2 Test Description

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

2.2.3.3 Test limit

Fcc Part15.247(e)

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

2.2.3.4 Test Procedure Used


KDB 558074 D01 v03r01 Section 10.2.

2.2.3.5 Test Settings

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

2.2.3.6 Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.

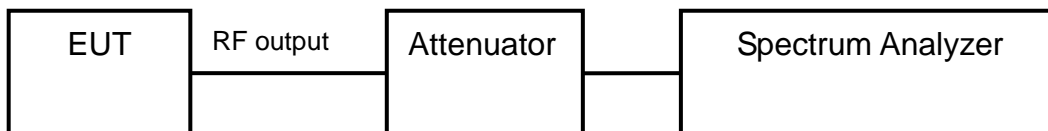

2.2.3.7 Test result


Test Mode: 802.11b

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-7.42
2437	6	-6.87
2462	11	-8.09

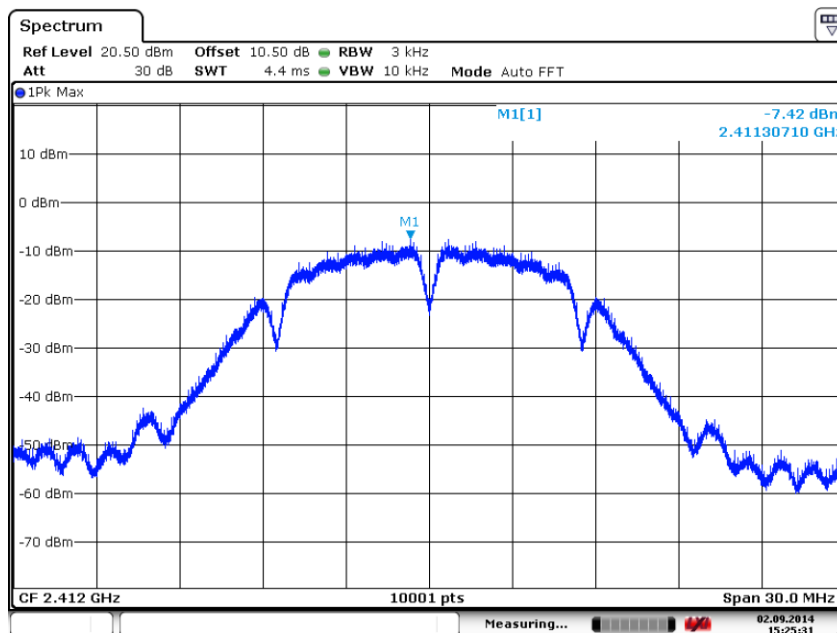


Date: 2.SEP.2014 15:25:31

Carrier frequency (MHz): 2412
Channel No.1
Test Mode: 802.11b

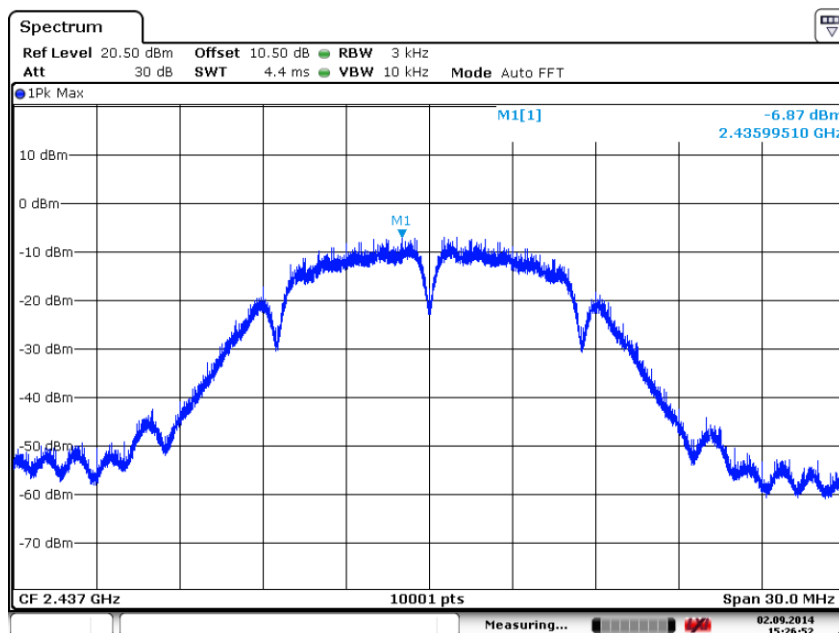

Date: 2.SEP.2014 15:26:53

Carrier frequency (MHz): 2437
Channel No.6
Test Mode: 802.11b

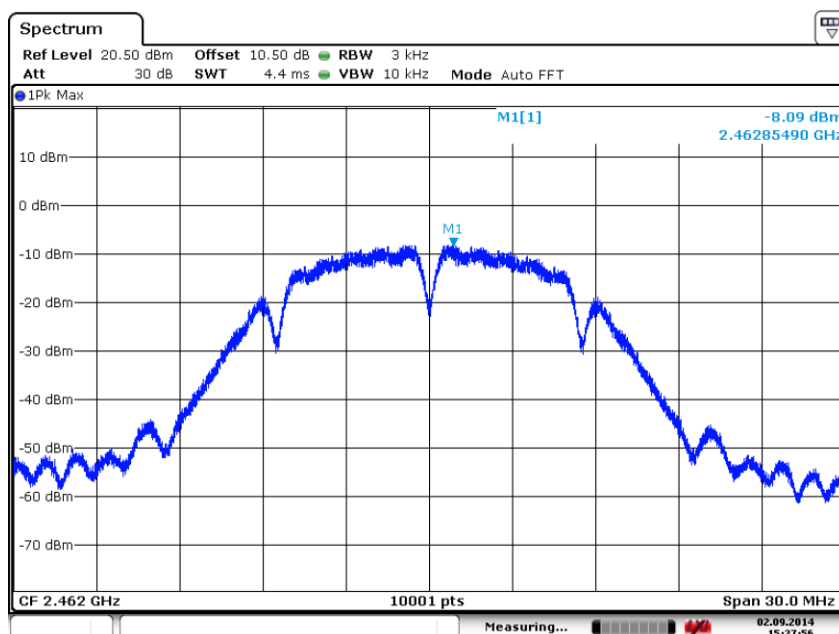


Date: 2.SEP.2014 15:27:56

Carrier frequency (MHz): 2462
Channel No.11
Test Mode: 802.11b


Test Mode: 802.11g

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-11.61
2442	6	-7.55
2472	11	-12.75

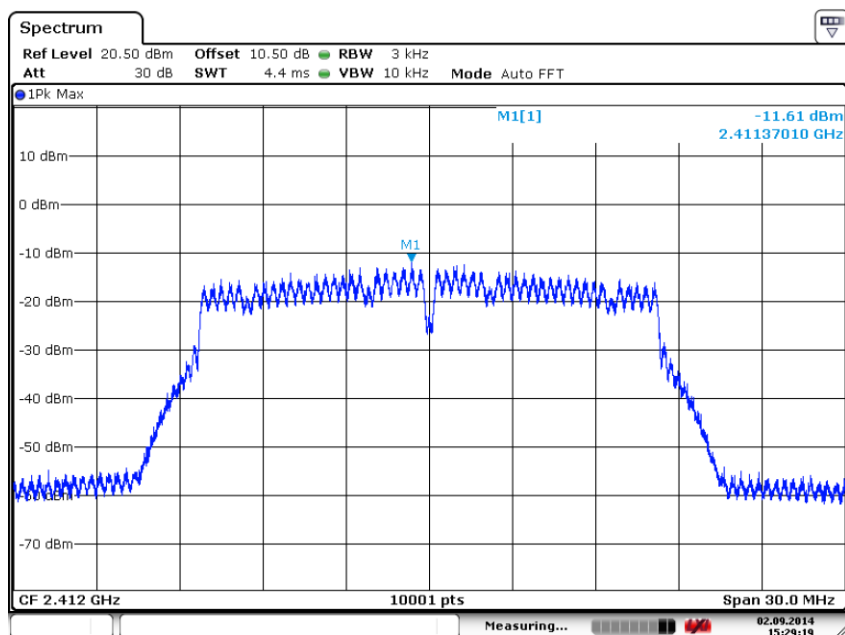


Date: 2.SEP.2014 15:29:19

Carrier frequency (MHz): 2412
Channel No.1
Test Mode: 802.11g

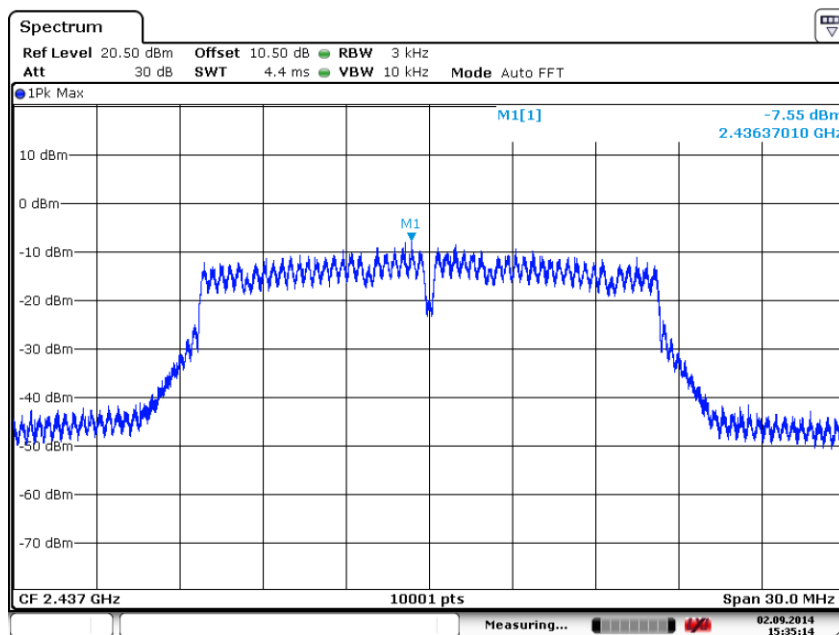

Date: 2.SEP.2014 15:35:15

Carrier frequency (MHz): 2437
Channel No.6
Test Mode: 802.11g

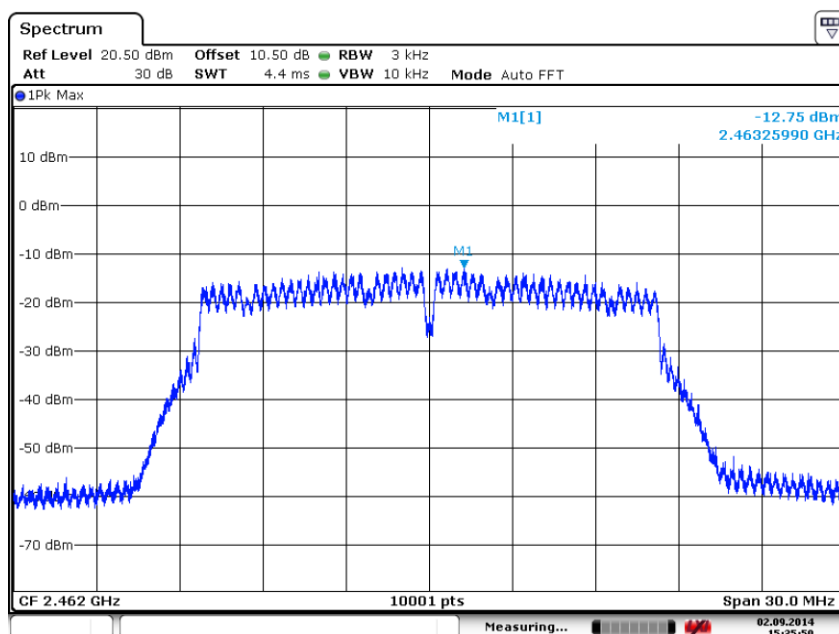


Date: 2.SEP.2014 15:35:50

Carrier frequency (MHz): 2462
Channel No.11
Test Mode: 802.11g


Test Mode: 802.11n(HT20)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-12.77
2437	6	-8.76
2462	11	-12.45

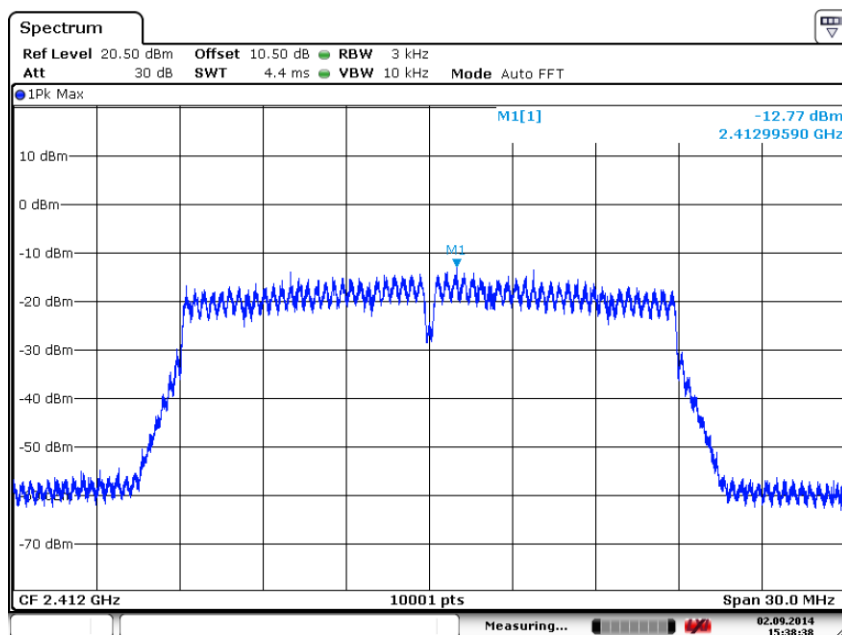


Date: 2.SEP.2014 15:38:38

Carrier frequency (MHz): 2412
Channel No.1
Test Mode: 802.11n(HT20)

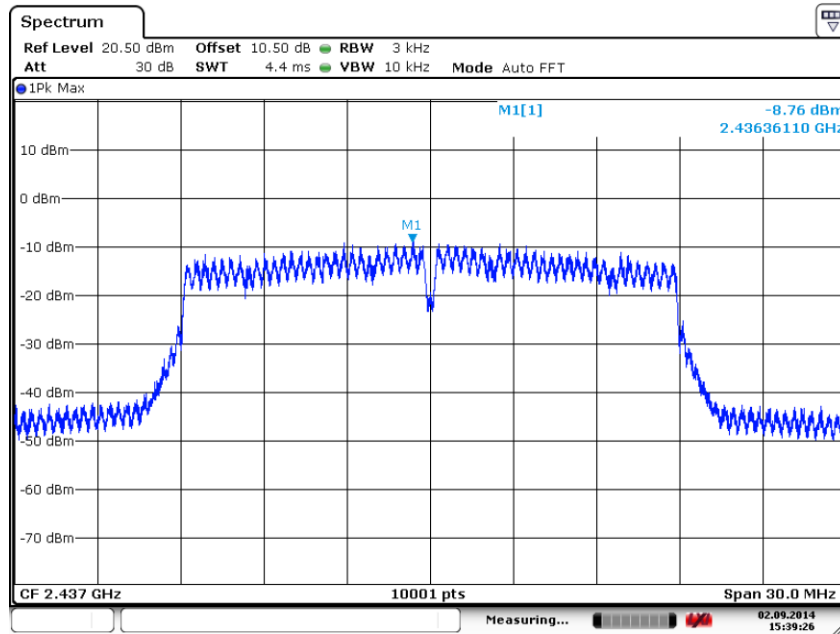

Date: 2.SEP.2014 15:39:27

Carrier frequency (MHz): 2437
Channel No.6
Test Mode: 802.11n(HT20)

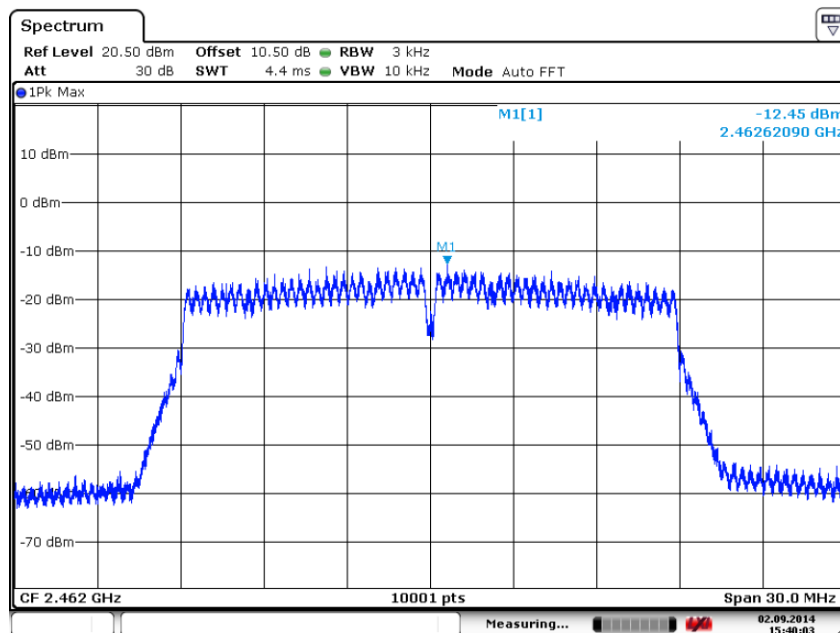


Date: 2.SEP.2014 15:40:04

Carrier frequency (MHz): 2462
Channel No.11
Test Mode: 802.11n(HT20)


Test Mode: 802.11n(HT40)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2422	3	-16.28
2437	6	-11.43
2462	11	-12.82

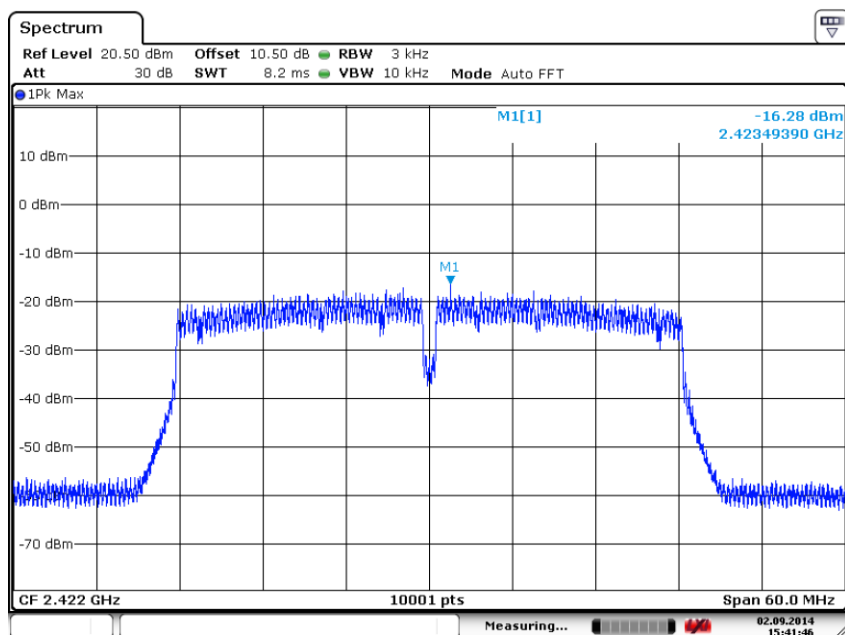


Date: 2.SEP.2014 15:41:46

Carrier frequency (MHz): 2422
Channel No.3
Test Mode: 802.11n(HT40)

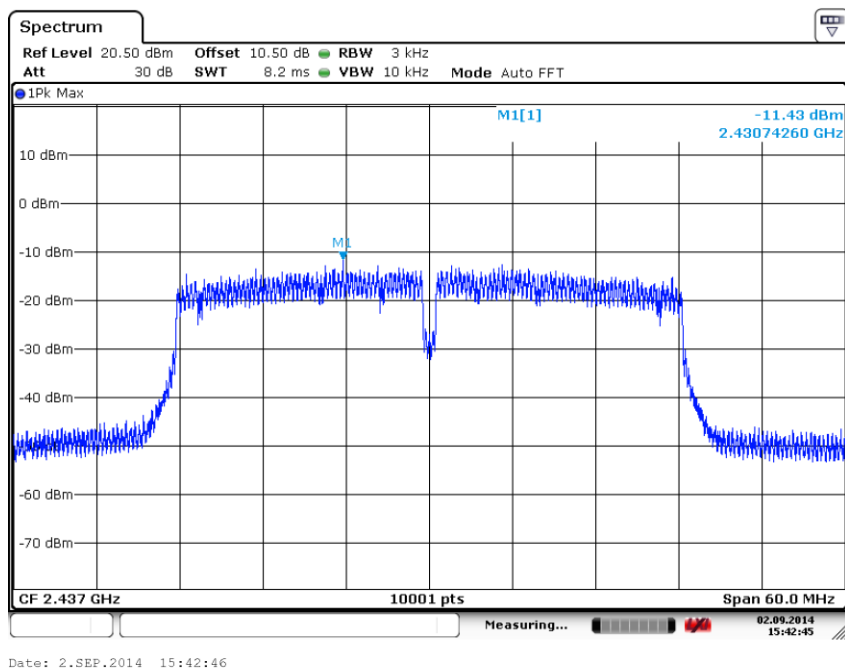

Carrier frequency (MHz): 2437
Channel No.6
Test Mode: 802.11n(HT40)

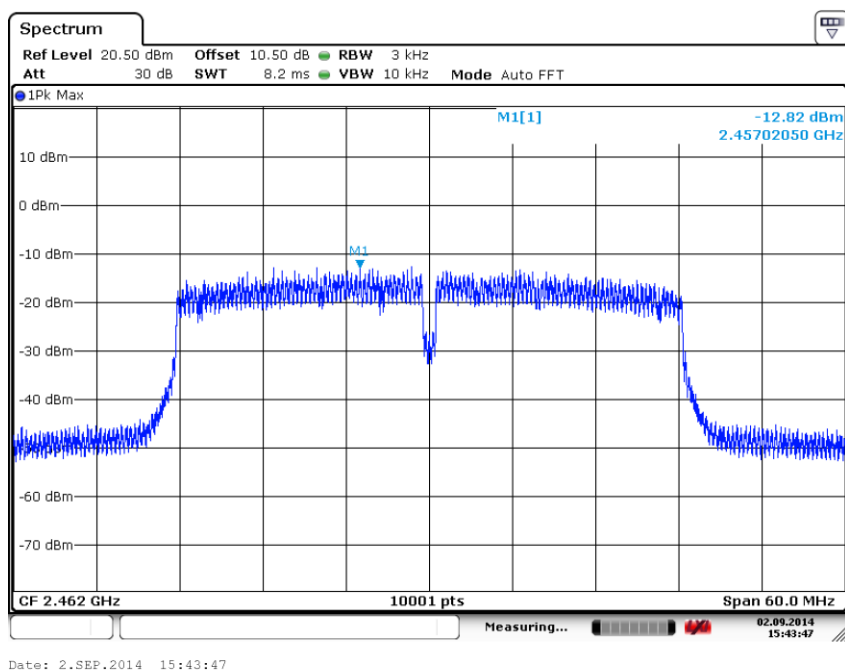

Carrier frequency (MHz): 2462
Channel No.11
Test Mode: 802.11n(HT40)

2.2.4 Conducted Out of band emission measurement

2.2.4.1 Ambient condition

Temperature	Relative humidity	Pressure
22°C	40%	101.1kPa

2.2.4.2 Test Description

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration.

2.2.4.3 Test limit

FCC Part 15.247(d)

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth.


2.2.4.4 Test Procedure Used

KDB 558074 D01 v03r01 Section 11.3

2.2.4.5 Test Settings

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100KHz.
- c) Set the VBW \geq 300KHz.
- d) Detector = peak.
- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.


2.2.4.6 Test Setup

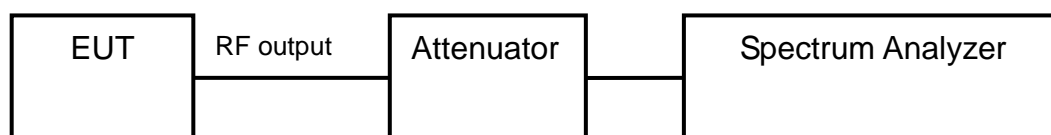

2.2.4.7 Test result


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b

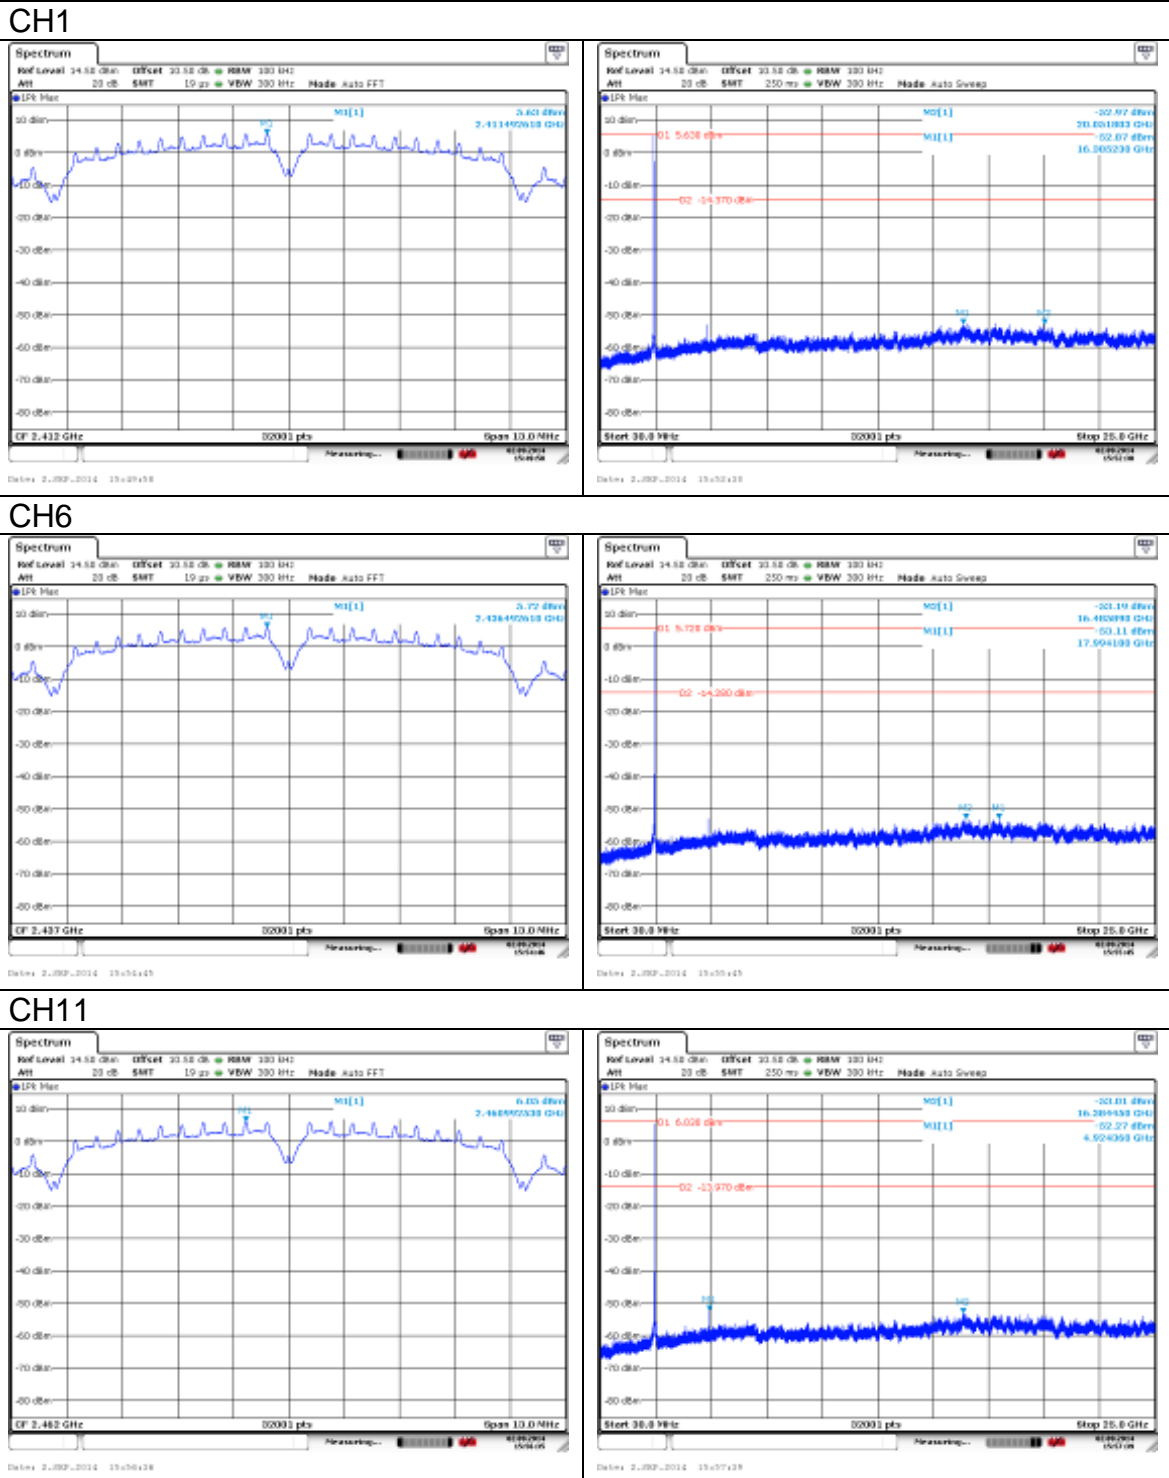


802.11g


CH1

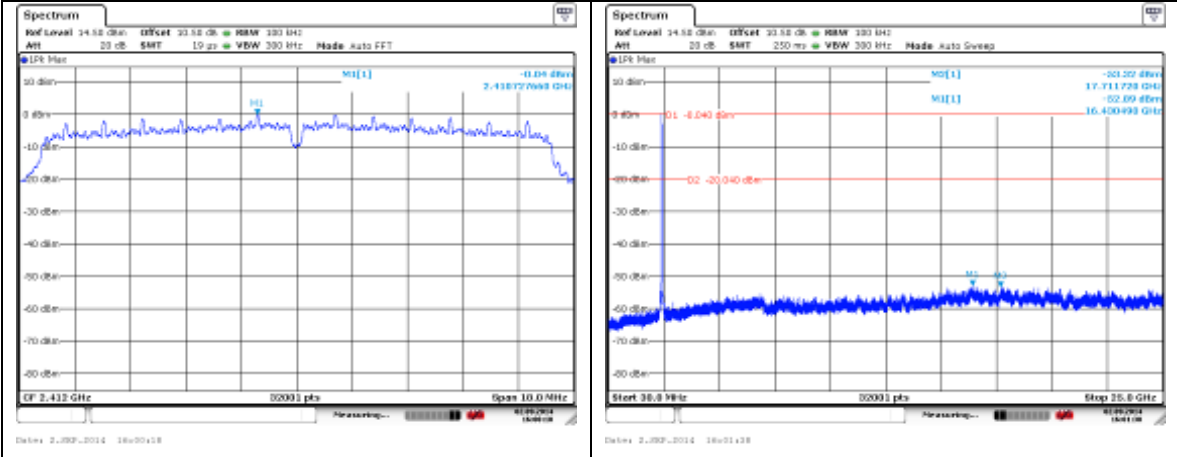




CH6

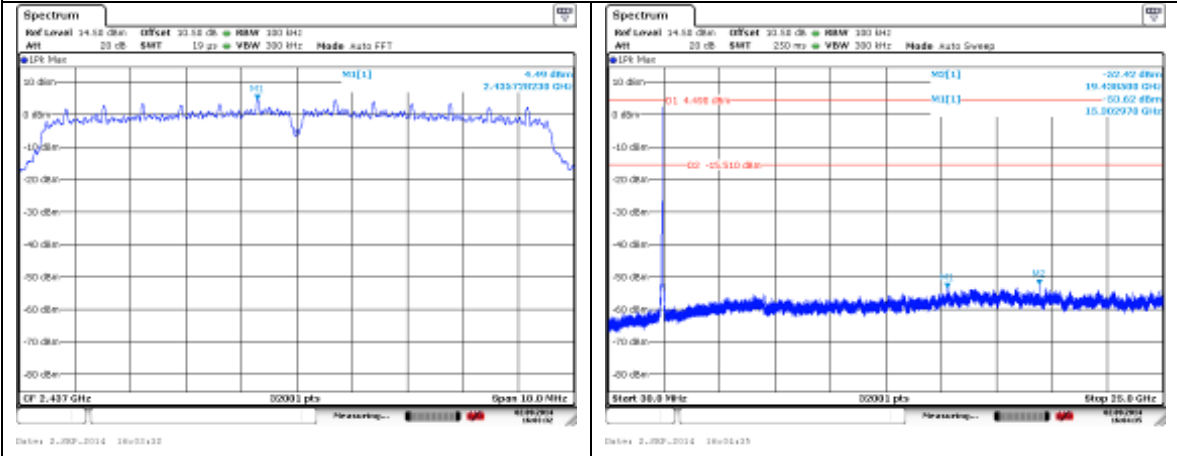

CH11


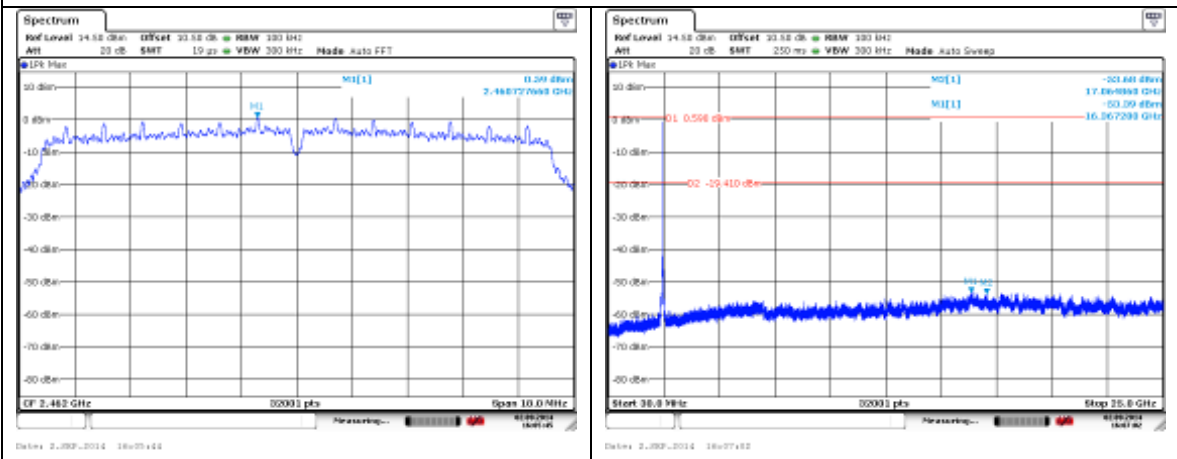


802.11n(20MHz)

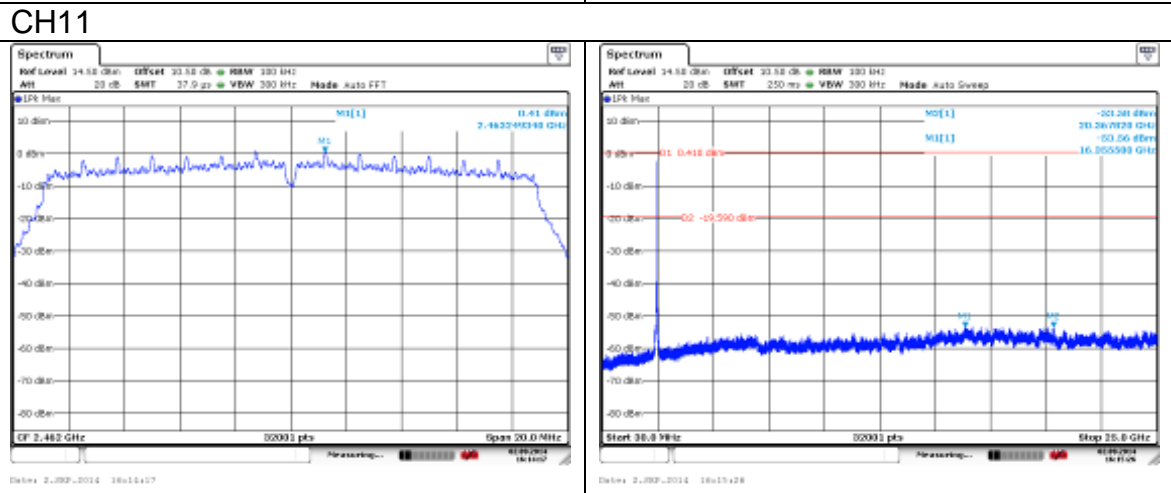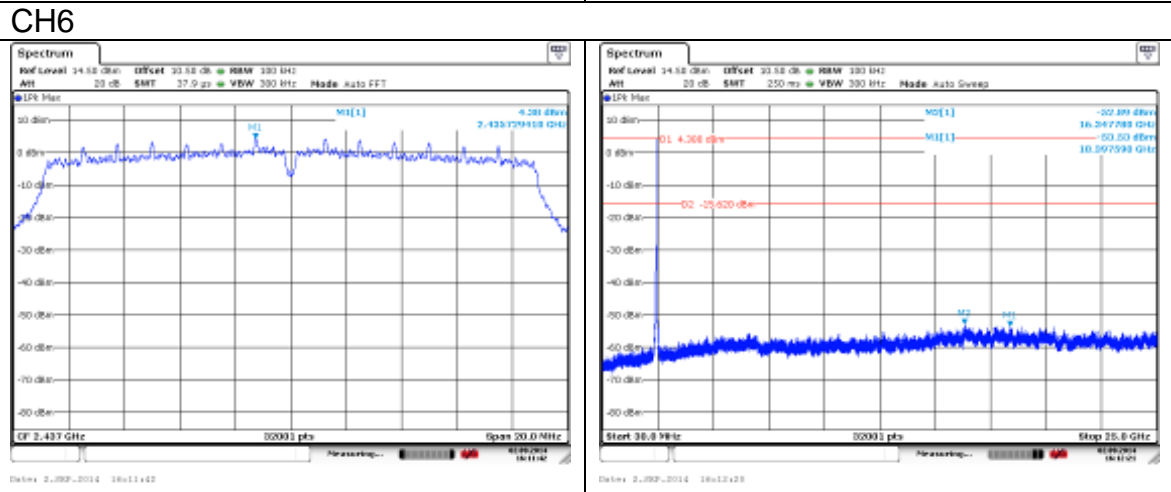
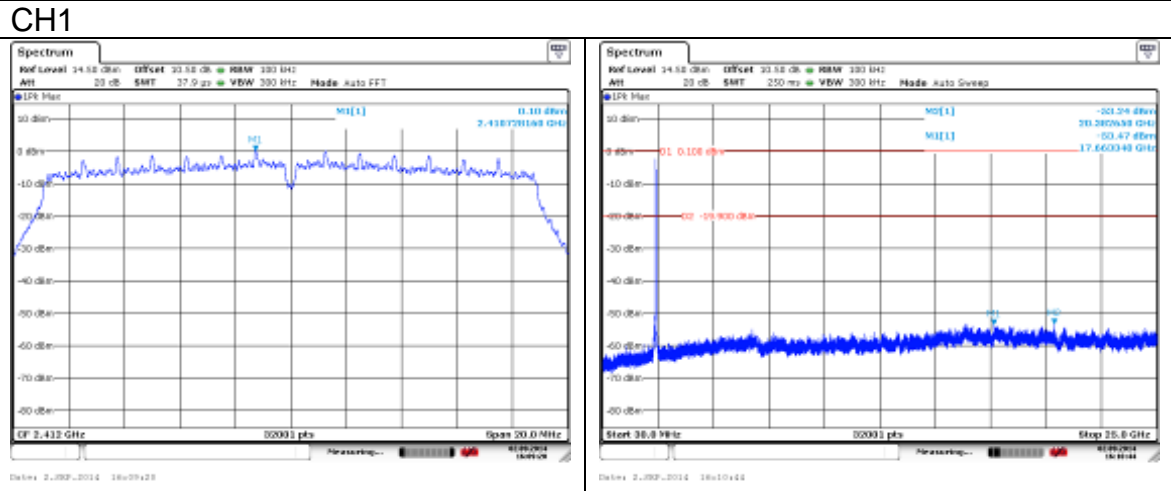


802.11n (40MHz)



CH1

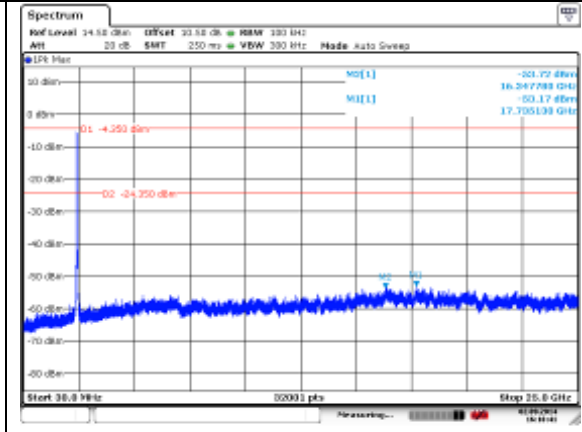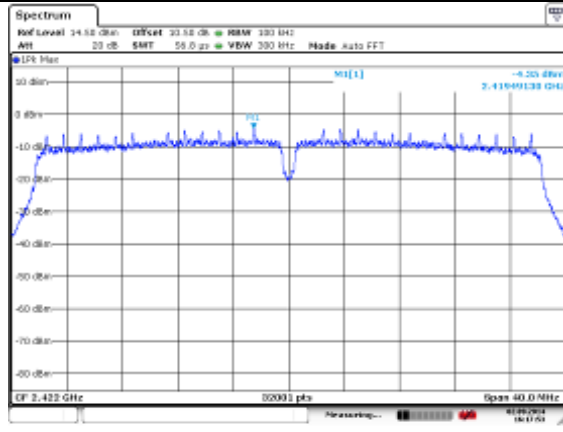

CH6

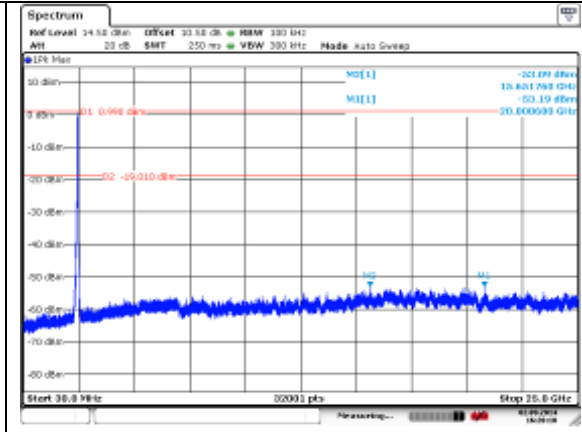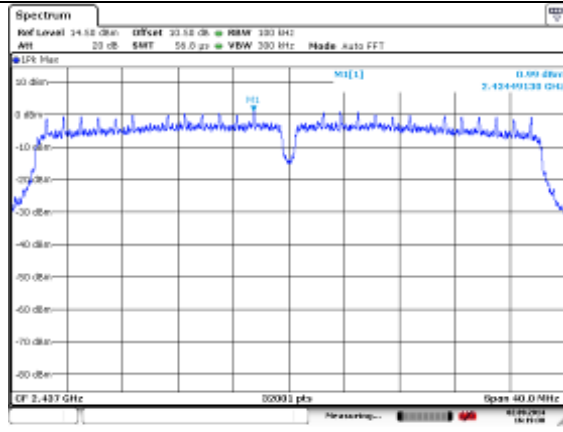

CH11

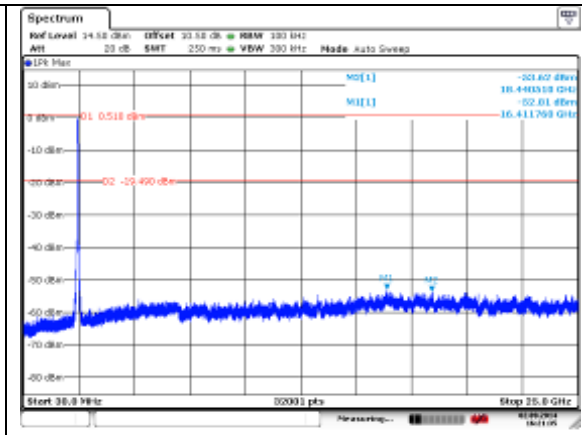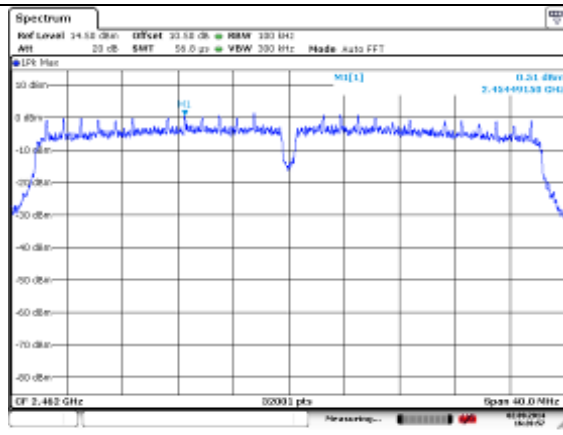

2.2.5 Spurious Radiated Emissions

2.2.5.1 Ambient condition

Temperature	Relative humidity	Pressure
20°C	35%	101.4kPa

2.2.5.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

2.2.5.3 Test limit

FCC Part15.205, 15.209, 15.247(d);

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). ***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209.***

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

FCC Part15.35(b):

there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

2.2.5.4 Test Procedure Used

KDB 558074 D01 v03r01 - Section 12.2.5 (average power measurements)

KDB 558074 D01 v03r01 - Section 12.2.4 (peak power measurements)

2.2.5.5 Test Settings

Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 v03r01


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $> 2 \times \text{span/RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces

Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 v03r01

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

2.2.5.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below

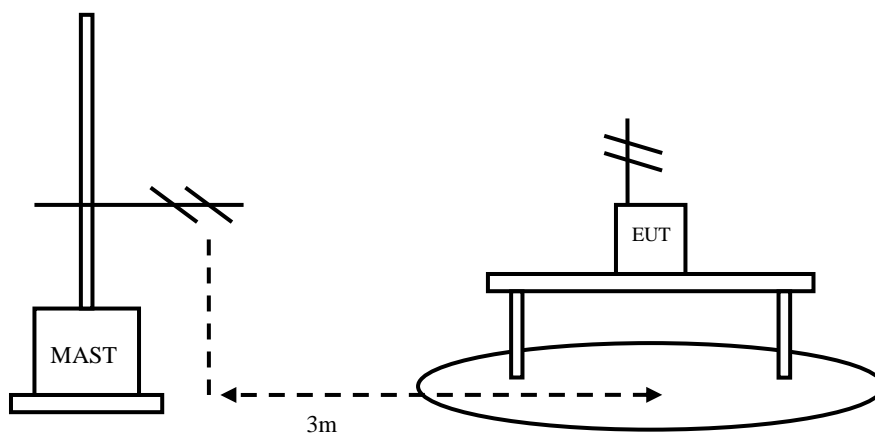

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz or above, using receive log period antenna HL562 or Ridge horn antenna HF906. During the test, the antenna height and EUT azimuth were varied in order to identify the maximum level of emission from the EUT. The height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees. The measurements shall be repeated with orthogonal polarization of the test antenna. The results shall be showed the worst case of the three orthogonal axes. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

2.2.5.7 Test result

The worst case attitude: The mobile lay down.

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11b
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	97.12	63.12	N/A	N/A	8.90	25.10
2	2390	51.48	17.48	-22.52	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11b
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	101.69	67.69	N/A	N/A	8.90	25.10
2	2390	51.71	17.71	-22.29	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	93.43	59.43	N/A	N/A	8.90	25.10
2	2390	41.97	7.97	-12.03	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	96.71	62.71	N/A	N/A	8.90	25.10
2	2390	41.88	7.88	-12.12	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	101.26	67.26	N/A	N/A	8.90	25.10
2	2483.5	52.48	18.48	-21.52	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.25	62.25	N/A	N/A	8.90	25.10
2	2483.5	52.41	18.41	-21.59	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.33	62.33	N/A	N/A	8.90	25.10
2	2483.5	41.05	7.05	-12.95	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	90.26	56.26	N/A	N/A	8.90	25.10
2	2483.5	40.95	6.95	-13.05	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	99.53	65.53	N/A	N/A	8.90	25.10
2	2390	50.25	16.25	-23.75	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	98.50	64.5	N/A	N/A	8.90	25.10
2	2390	50.38	16.38	-23.62	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	91.50	57.5	N/A	N/A	8.90	25.10
2	2390	41.38	7.38	-12.62	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	89.84	55.84	N/A	N/A	8.90	25.10
2	2390	41.26	7.26	-12.74	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	99.99	65.99	N/A	N/A	8.90	25.10
2	2483.5	50.60	16.6	-23.4	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	97.26	63.26	N/A	N/A	8.90	25.10
2	2483.5	50.50	16.5	-23.5	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	91.74	57.74	N/A	N/A	8.90	25.10
2	2483.5	40.75	6.75	-13.25	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	88.23	54.23	N/A	N/A	8.90	25.10
2	2483.5	40.41	6.41	-13.59	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	101.90	67.9	N/A	N/A	8.90	25.10
2	2390	51.34	17.34	-22.66	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	98.71	64.71	N/A	N/A	8.90	25.10
2	2390	52.85	18.85	-21.15	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	95.59	61.59	N/A	N/A	8.90	25.10
2	2390	41.38	7.38	-12.62	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	93.24	59.24	N/A	N/A	8.90	25.10
2	2390	41.08	7.08	-12.92	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	101.38	67.38	N/A	N/A	8.90	25.10
2	2483.5	52.10	18.1	-21.9	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	97.96	63.96	N/A	N/A	8.90	25.10
2	2483.5	54.83	20.83	-19.17	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	93.47	59.47	N/A	N/A	8.90	25.10
2	2483.5	41.09	7.09	-12.91	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	90.10	56.1	N/A	N/A	8.90	25.10
2	2483.5	41.95	7.95	-12.05	54.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	101.60	67.6	N/A	N/A	8.90	25.10
2	2390	52.13	18.13	-21.87	74.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	99.23	65.23	N/A	N/A	8.90	25.10
2	2390	51.97	17.97	-22.03	74.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	96.21	62.21	N/A	N/A	8.90	25.10
2	2390	42.37	8.37	-11.63	54.00	8.90	25.10

Carrier frequency (MHz): 2422

Channel No.:3

Test Mode: 802.11n(HT40)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	93.85	59.85	N/A	N/A	8.90	25.10
2	2390	42.32	8.32	-11.68	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT40)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	100.28	66.28	N/A	N/A	8.90	25.10
2	2483.5	52.07	18.07	-21.93	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT40)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	97.00	63	N/A	N/A	8.90	25.10
2	2483.5	51.99	17.99	-22.01	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT40)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	96.73	62.73	N/A	N/A	8.90	25.10
2	2483.5	42.33	8.33	-11.67	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.11

Test Mode: 802.11n(HT40)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	92.20	58.2	N/A	N/A	8.90	25.10
2	2483.5	41.44	7.44	-12.56	54.00	8.90	25.10

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

The worst case attitude: The mobile lay down.

For 802.11b

Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
37.995992	31.80	15.9	15.9	Vertical	40.0
40.240481	33.70	15.8	17.9	Vertical	40.0
53.987976	14.70	7.5	7.2	Vertical	40.0
479.158317	16.80	18.1	-1.3	Horizontal	46.0
551.102204	18.10	19.2	-1.1	Vertical	46.0
894.789579	24.40	24.8	-0.4	Horizontal	46.0

For 802.11g

Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
39.679359	36.40	16.0	20.4	Vertical	40.0
54.128257	14.60	7.5	7.1	Vertical	40.0
104.809619	8.50	9.3	-0.8	Vertical	43.5
484.769539	16.70	18.1	-1.4	Vertical	46.0
510.020040	17.60	18.6	-1	Vertical	46.0
907.815631	24.80	25.0	-0.2	Vertical	46.0

For 802.11n(HT20)


Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
40.380762	34.40	15.7	18.7	Vertical	40.0
53.847695	15.00	7.6	7.4	Vertical	40.0
304.408818	12.50	12.3	0.2	Horizontal	46.0
455.911824	15.80	17.2	-1.4	Vertical	46.0
529.058116	17.50	18.7	-1.2	Horizontal	46.0
942.885772	25.30	25.4	-0.1	Vertical	46.0

For 802.11n(HT40)

Frequency (MHz)	Result (dBuV/m)	A _{Rpl} (dB)	P _{mea} (dBuV/m)	Polarity	Limit (dBuV/m)
40.100200	34.00	15.9	18.1	Vertical	40.0
53.847695	15.30	7.6	7.7	Vertical	40.0
285.971944	11.70	11.8	-0.1	Horizontal	46.0
495.190381	16.80	18.2	-1.4	Vertical	46.0
557.114228	18.20	19.3	-1.1	Vertical	46.0
895.791583	24.50	24.8	-0.3	Vertical	46.0

Carrier frequency (MHz): 2437


Channel No.:6

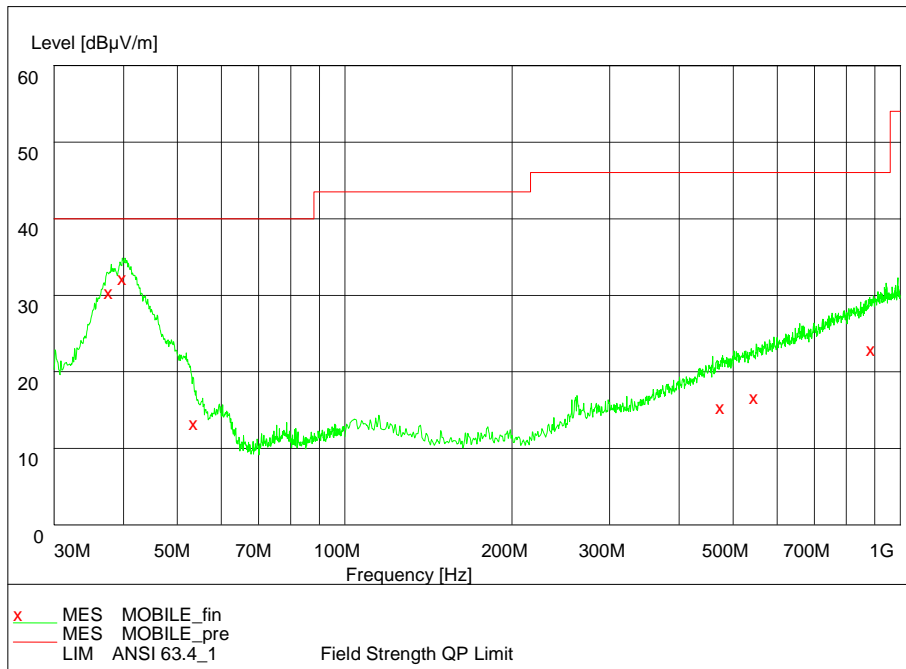

Frequency Range: 30MHz -1GHz

Detector: QP mode


Test Mode: 802.11b

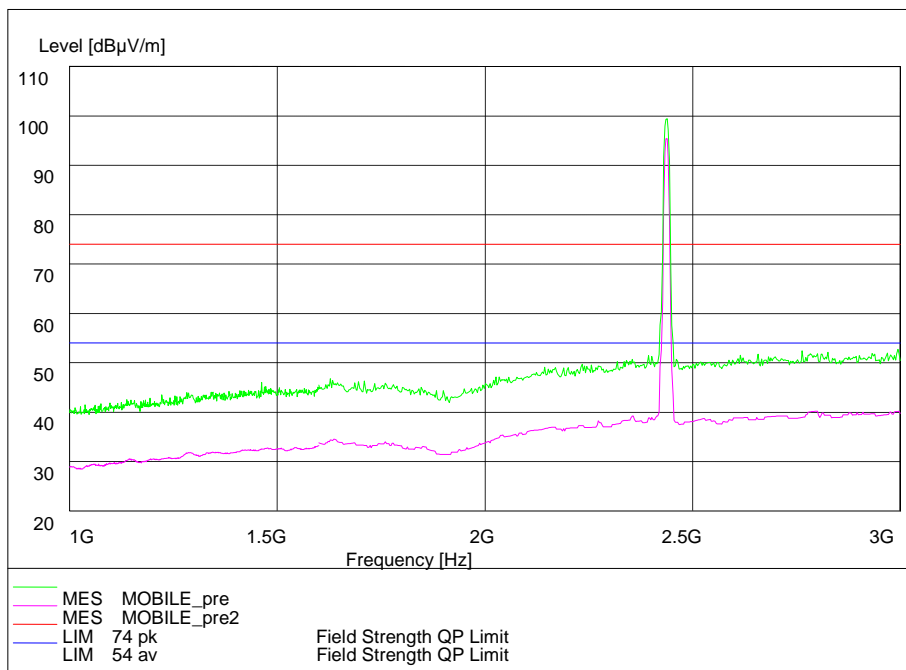


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode


Modulation type: 802.11b

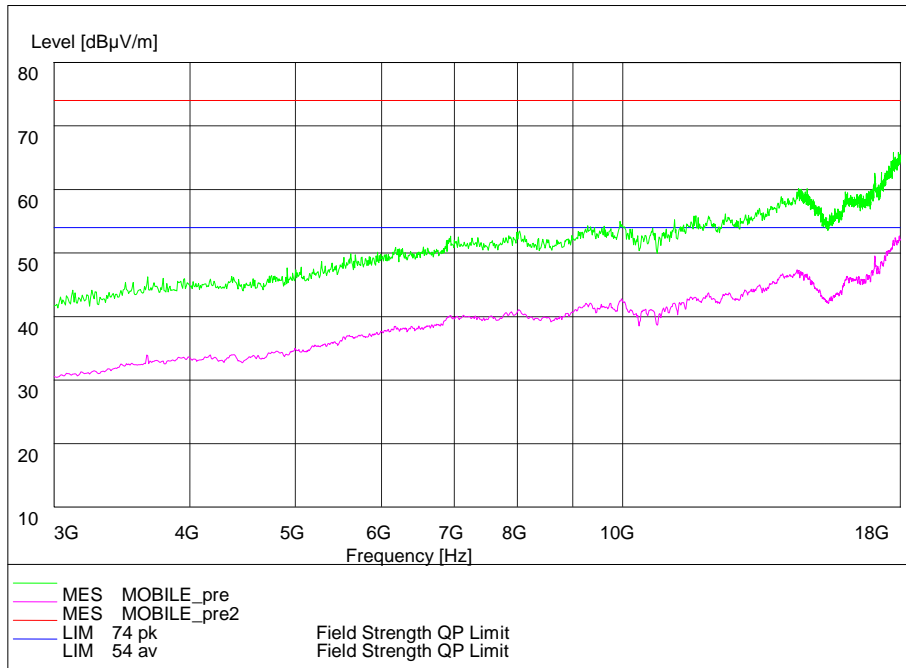


Frequency Range: 3GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

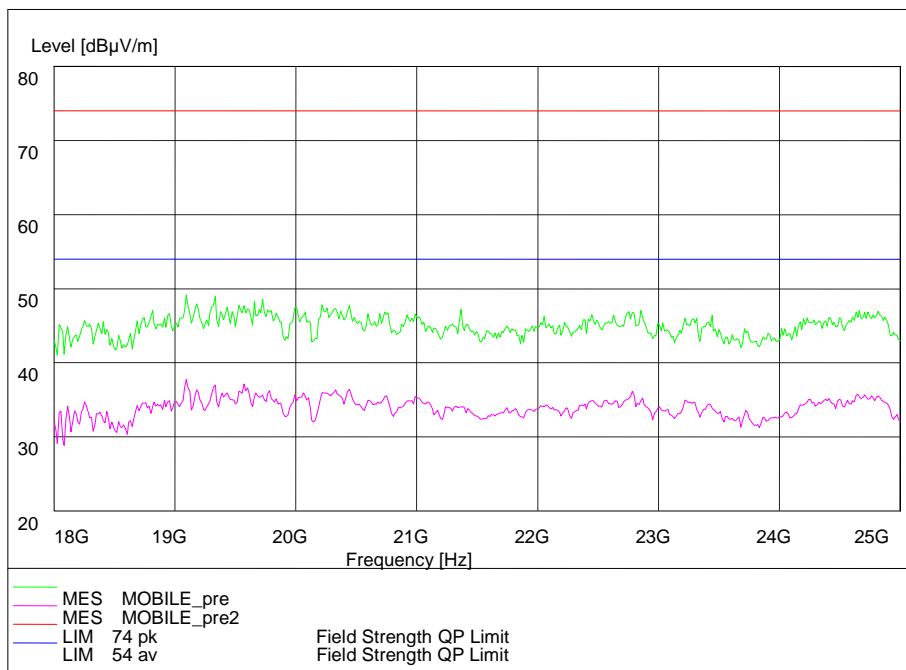


Frequency Range: 18GHz -25GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b

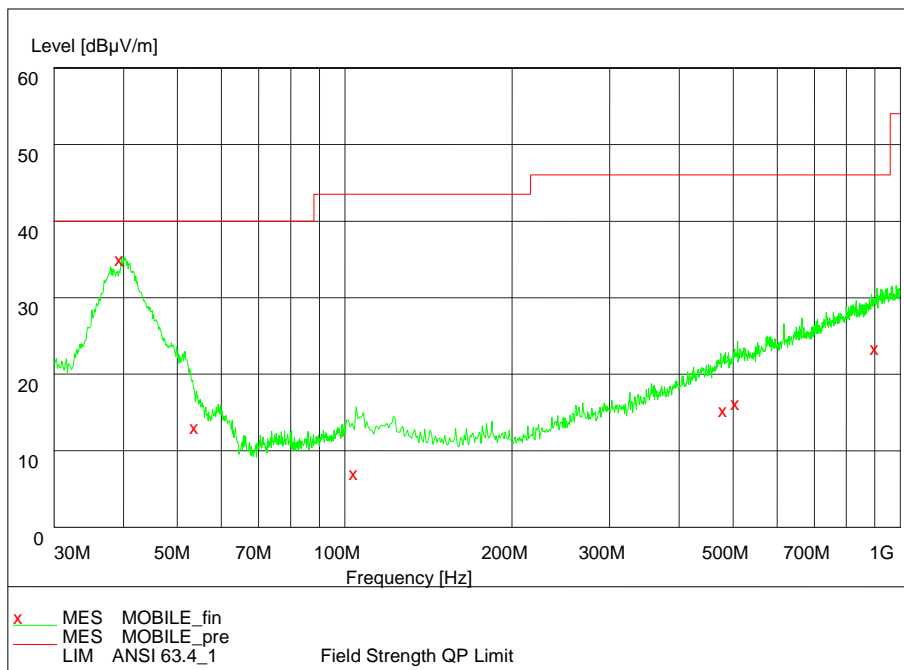


Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Modulation type: 802.11g

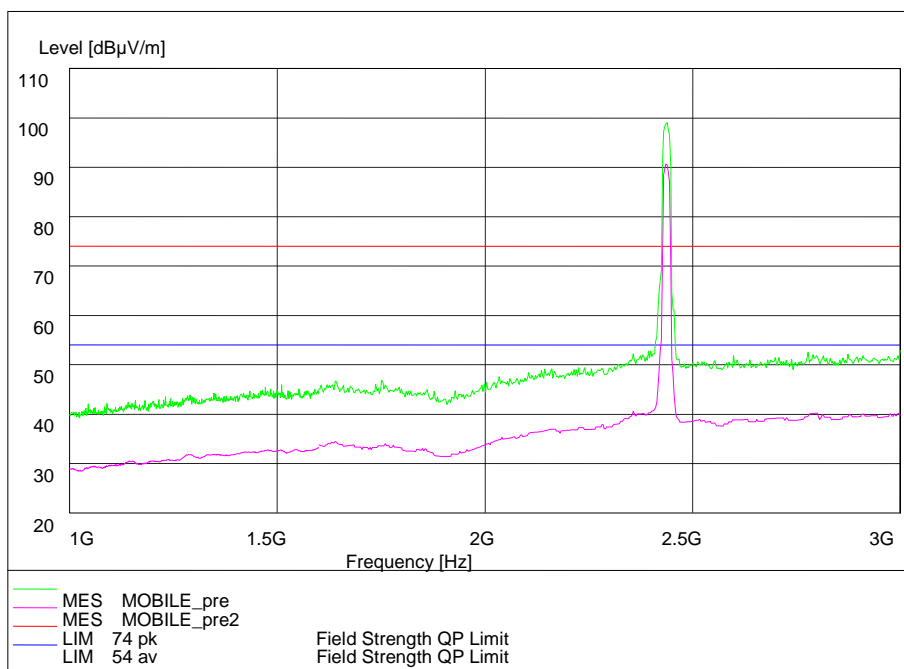


Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

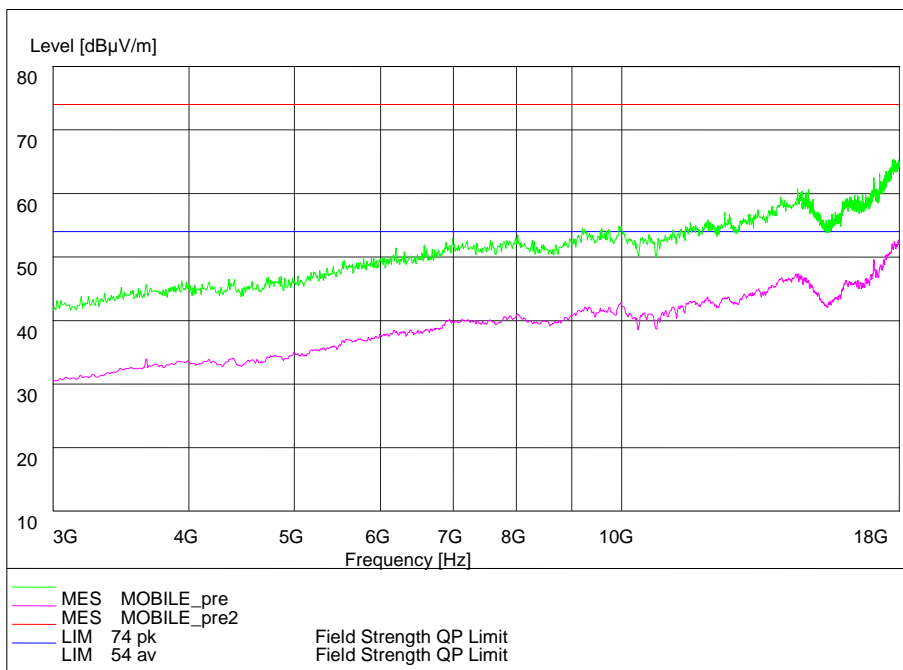

Frequency Range: 3GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

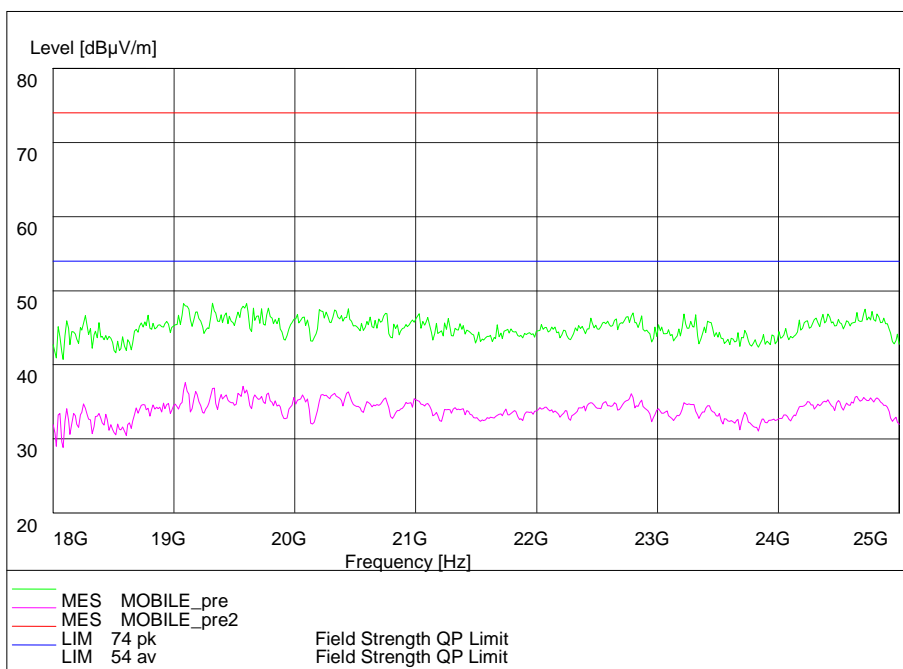


Frequency Range: 18GHz -25GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g

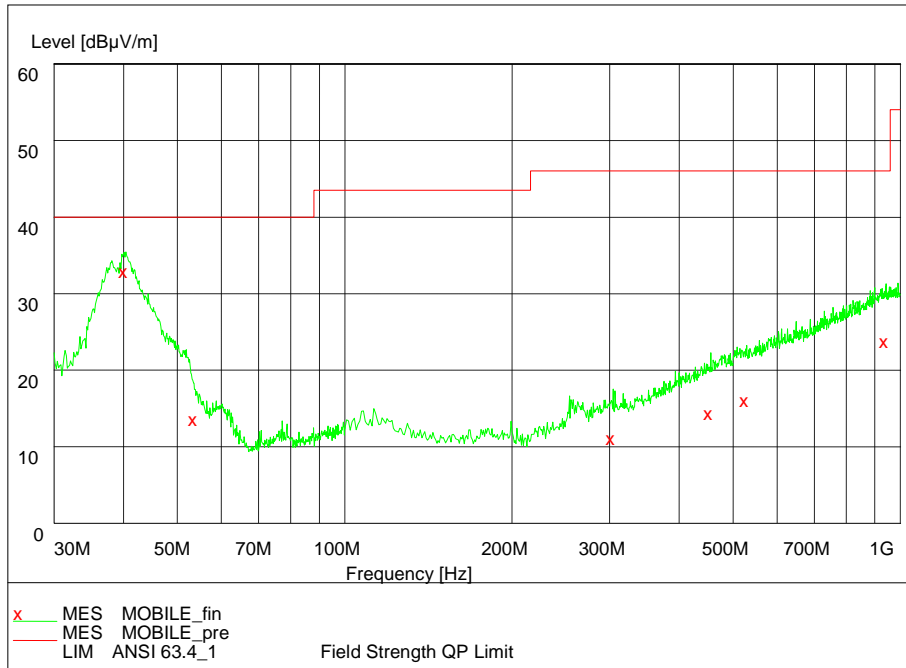

Frequency Range: 30MHz -1GHz

Detector: QP mode


Test Mode: 802.11n(HT20)

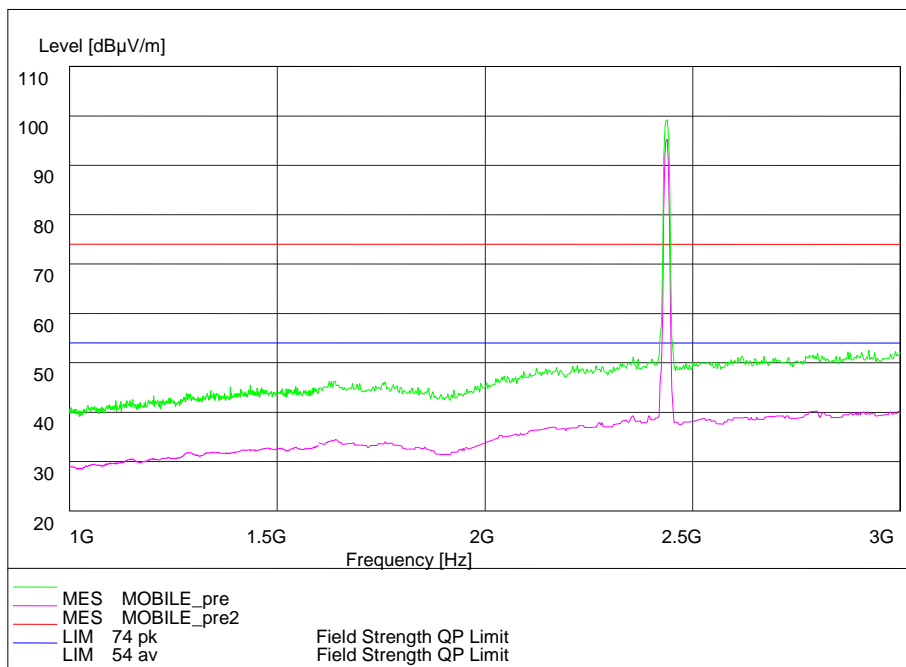


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT20)

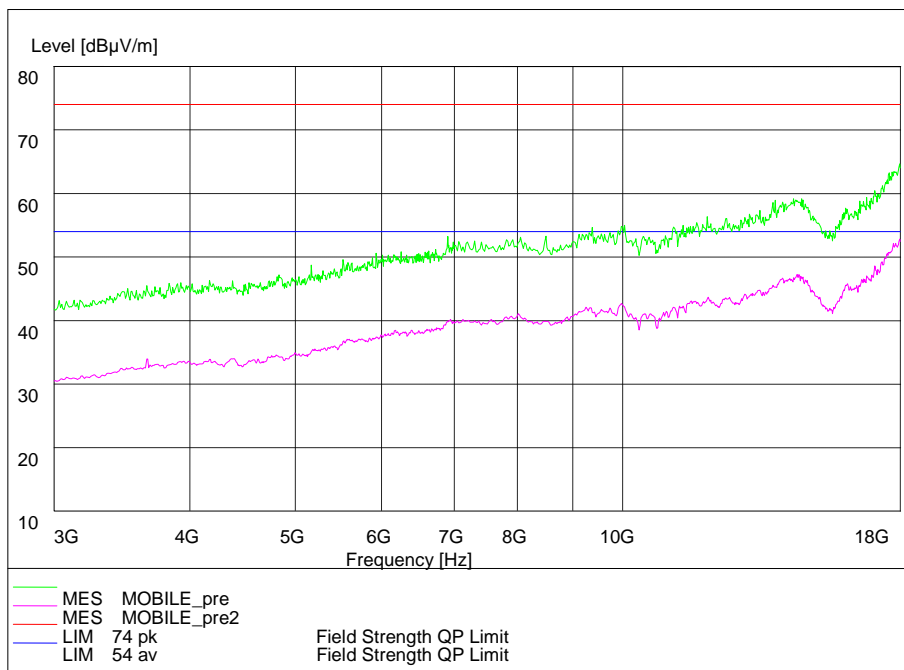


Frequency Range: 3GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)

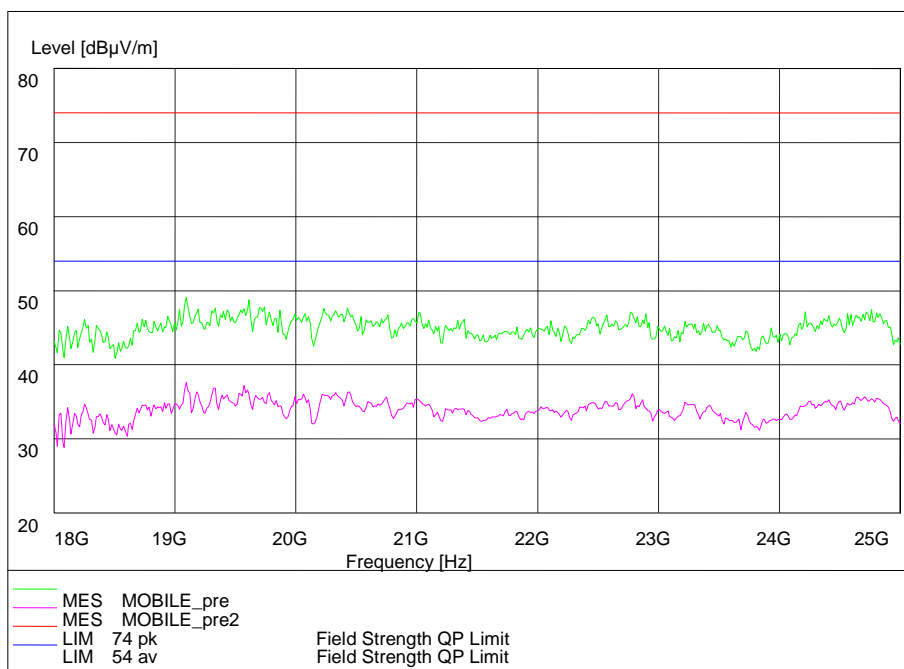


Frequency Range: 18GHz -25GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20)

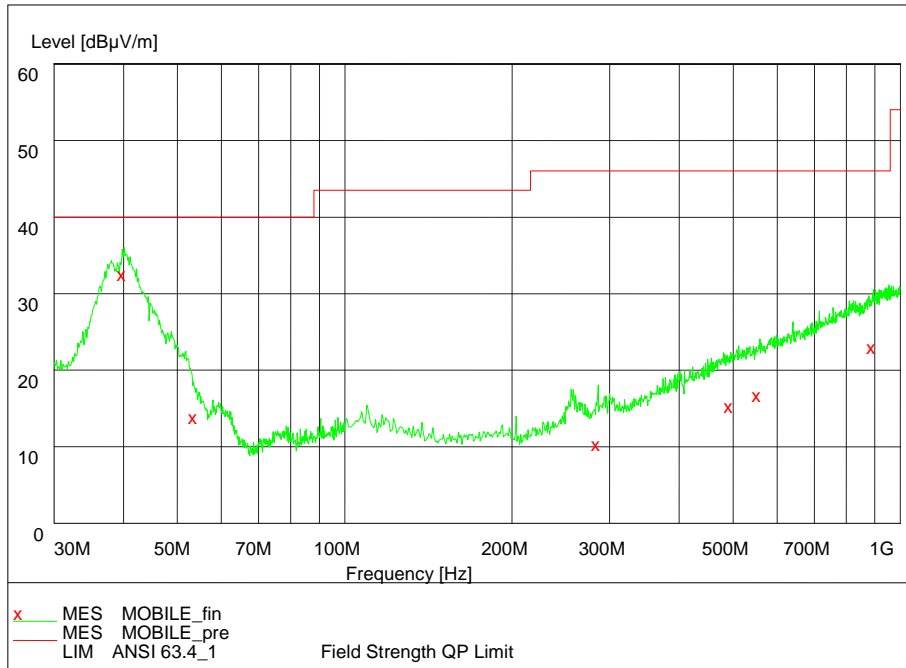


Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Modulation type: 802.11n(HT40)

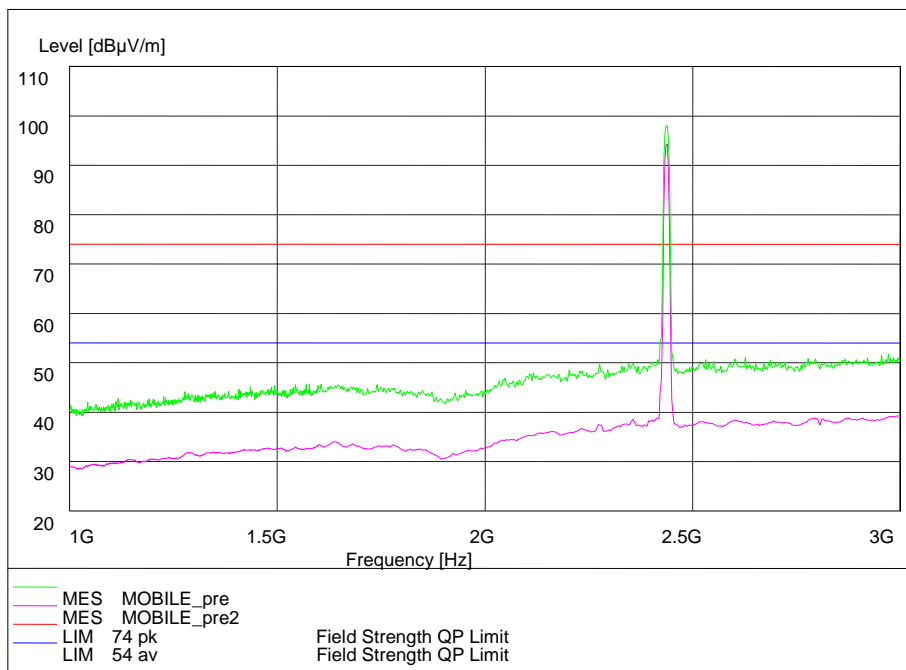

Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40)

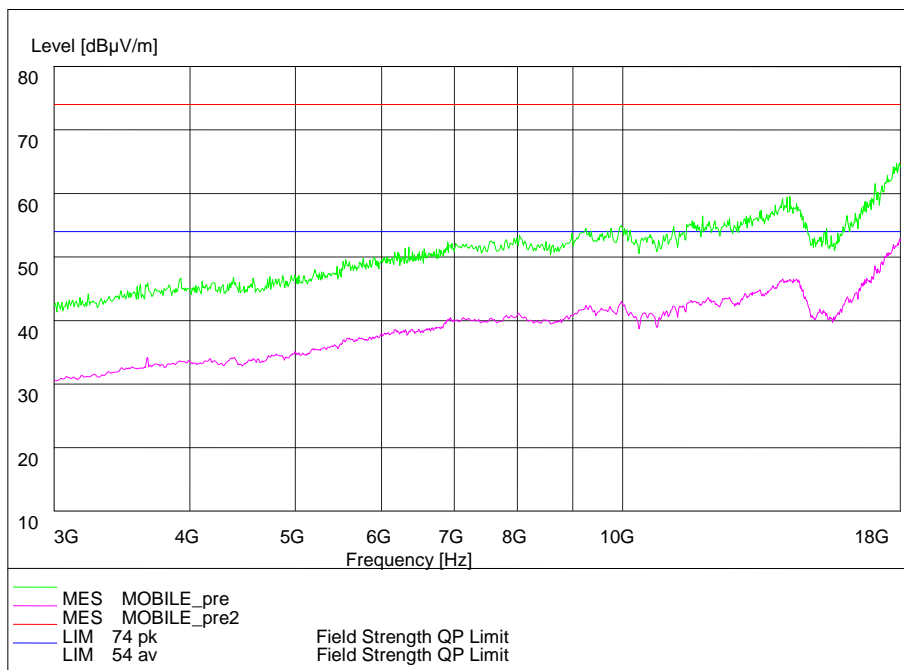

Frequency Range: 3GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40)

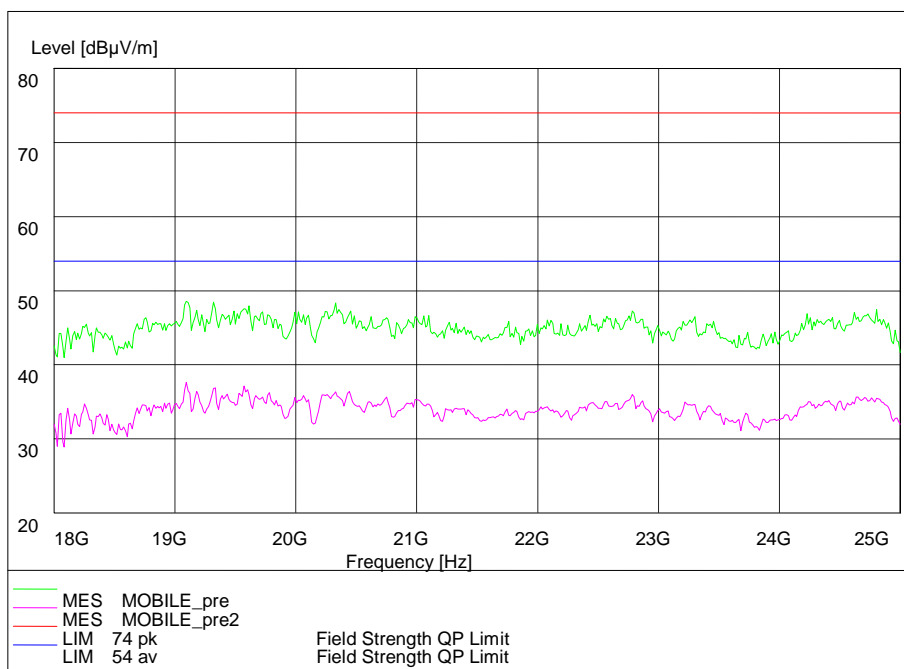

Frequency Range: 18GHz -25GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40)

2.2.6 AC Power line Conducted Emission

2.2.6.1 Ambient condition

Temperature	Relative humidity	Pressure
20°C	35%	101.4kPa

2.2.6.2 Test limit


FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.4-2009

2.2.6.3 Test result

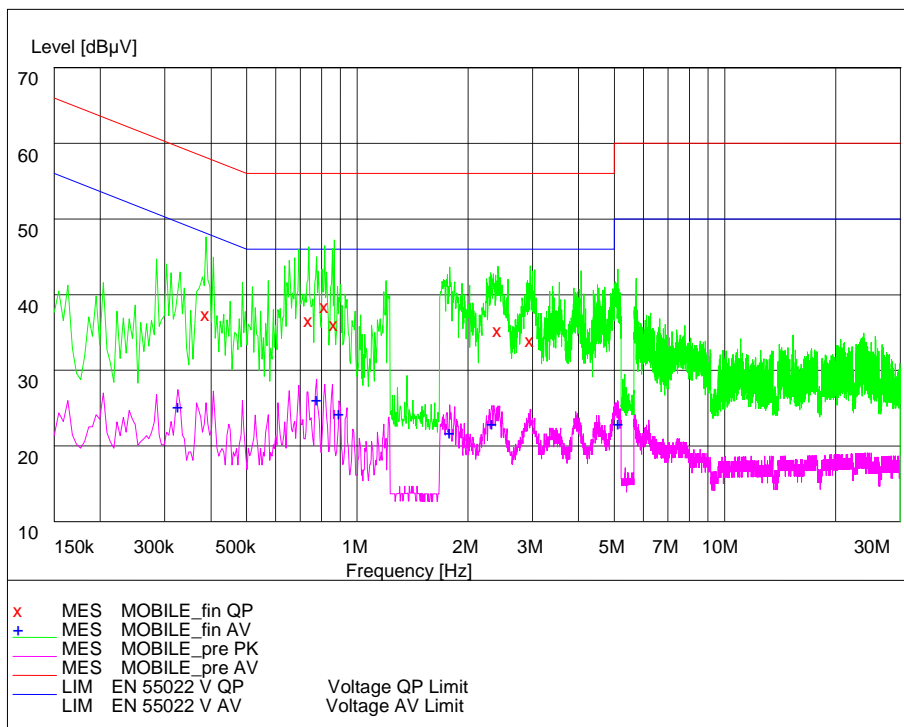


L Line

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.388500	38.80	20.1	58	19.3	---	---
0.739500	38.00	20.1	56	18.0	---	---
0.816000	40.00	20.1	56	16.0	---	---
0.865500	37.50	20.2	56	18.5	---	---
2.418000	36.70	20.2	56	19.3	---	---
2.953500	35.40	20.3	56	20.6	---	---

MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.325500	26.70	20.1	50	22.9	---	---
0.775500	27.70	20.0	46	18.3	---	---
0.892500	25.80	20.1	46	20.2	---	---
1.788000	23.30	20.1	46	22.7	---	---
2.328000	24.50	20.3	46	21.5	---	---
5.136000	24.50	20.4	50	25.5	---	---

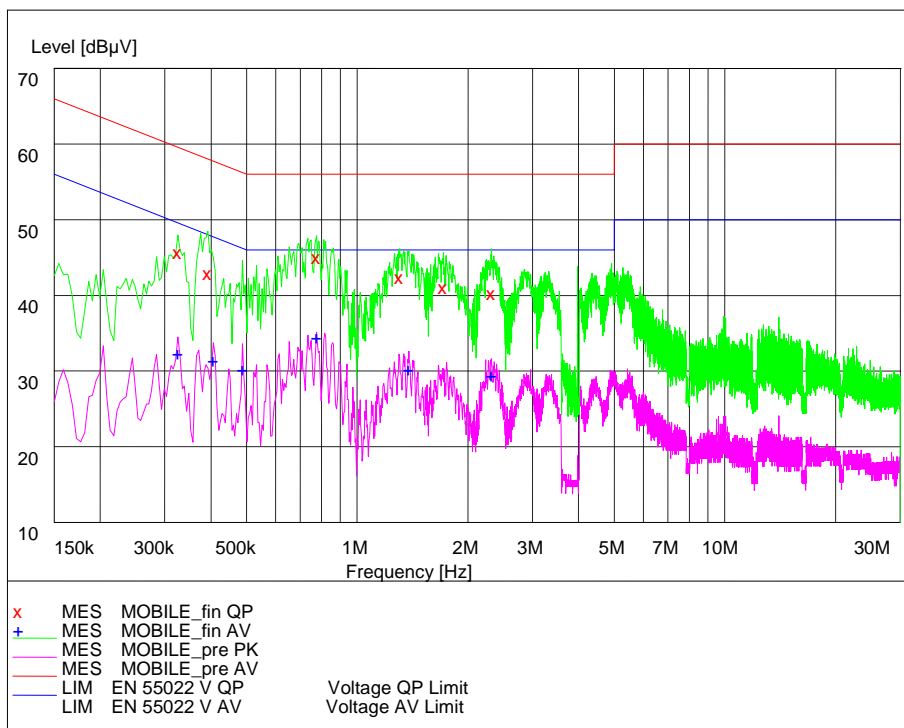

N Line

MEASUREMENT RESULT: "MOBILE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.325500	47.20	20.1	60	12.4	---	---
0.393000	44.30	20.1	58	13.7	---	---
0.775500	46.40	20.0	56	9.6	---	---
1.306500	43.90	20.2	56	12.1	---	---
1.716000	42.50	20.2	56	13.5	---	---
2.319000	41.70	20.3	56	14.3	---	---

MEASUREMENT RESULT: "MOBILE_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.325500	33.90	20.1	50	15.7	---	---
0.406500	32.90	20.1	48	14.9	---	---
0.487500	31.70	20.2	46	14.6	---	---
0.775500	35.90	20.0	46	10.1	---	---
1.383000	31.80	20.2	46	14.2	---	---
2.319000	31.00	20.3	46	15.0	---	---

2.3. Measurement Uncertainty

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Transmitter Power Spectral Density	0.75dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

2.4. List of test equipment

No.	Name/Model	Manufacturer	S/N	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2015.8
2.	Signal Generator MG3700A	Anritsu	6200677084	2015.8
3.	Attenuation 6810.17.B	HUBER+SUHNER	768710	2015.8
4.	Cable 104EA	SUCOFLEX	9272/4EA	2015.8
5.	Cable 104EA	SUCOFLEX	9266/4EA	2015.8
6.	Power Meter E4416A	Agilent	MY52370013	2015.2
7.	Peak Power Sensor E9327A	Agilent	MY52420006	2015.2
8.	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	----	----
9.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	----
10.	Turn table Diameter:1m	HD	----	----
11.	Turn table Diameter:5m	HD	----	----
12.	Antenna master FAC(MA4.0)	MATURO	----	----
13.	Antenna master SAC(MA4.0)	MATURO	----	----
14.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	----	----
15.	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	2015.8
16.	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100029	2015.8
17.	HL562 Ultra log antenna	R&S	100016	2015.8
18.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2015.8
19.	ESI 40 EMI test receiver	R&S	100015	2015.8
20.	Radio tester	CMU 200	114667	2015.8
21.	ESCS30 EMI test receiver	R&S	100029	2015.8
22.	HL562 Receive antenna	R&S	100167	2015.8
23.	ESH3-Z5 LISN	R&S	100020	2015.8

Appendix

Appendix1 Test Setup