

FCC

EMC

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Mobile Phone

ISSUED TO
Shenzhen Sang Fei Consumer Communications Co., Ltd

11 Science and Technology Road, Shenzhen Hi-tech Industrial Park
Nanshan District, Shenzhen city, GuangDong province, 518057, China

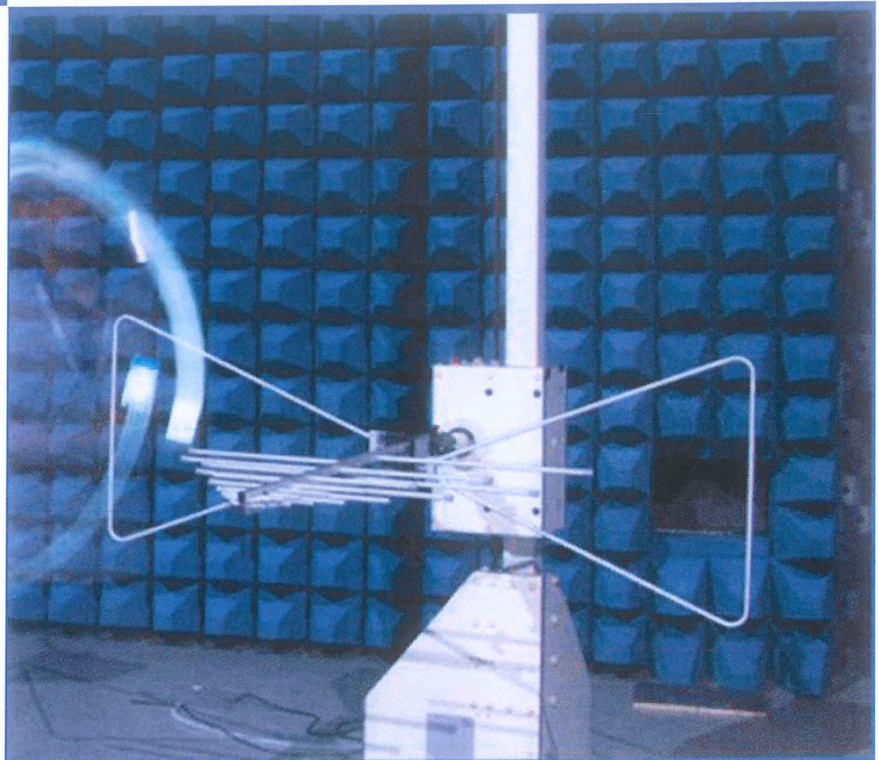

Tested by: Xia Long
Xia Long
(Engineer)

Date: JUN. 26, 2017

Approved by: Liao Jianming
Liao Jianming
(Technical Director)

Date: JUN. 26, 2017

Report No.: BL-SZ1750142-401
EUT Name: Mobile Phone
Model Name: Philips S329
Brand Name: PHILIPS
Test Standard: 47 CFR Part 15 Subpart B
FCC ID: VQRCTS329

Test Conclusion: Pass
Test Date: May 10, 2017 ~ May 26, 2017
Date of Issue: Jun. 26, 2017

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Jun. 26, 2017</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Laboratory Condition	4
1.4	Announce	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Ancillary Equipment	6
2.6	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards	7
3.2	Verdict	7
3.3	Test Uncertainty	7
4	GENERAL TEST CONFIGURATIONS	8
4.1	Test Environments	8
4.2	Test Equipment List	8
4.3	Test Enclosure list	9
4.4	Test Configurations	10
4.5	Test Setups	11
4.6	Test Conditions	13
5	TEST ITEMS	14
5.1	Emission Tests	14
ANNEX A	TEST RESULTS	16

A.1 Radiated Emission 16

A.2 Conducted Emission 22

ANNEX B TEST SETUP PHOTOS 26

ANNEX C EUT EXTERNAL PHOTOS 26

ANNEX D EUT INTERNAL PHOTOS 26

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C~25°C
Ambient Relative Humidity	45% - 55%
Ambient Pressure	100 kPa - 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v6.4.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shenzhen Sang Fei Consumer Communications Co., Ltd
Address	11 Science and Technology Road, Shenzhen Hi-tech Industrial Park Nanshan District, Shenzhen city, Guangdong province, 518057, China

2.2 Manufacturer Information

Manufacturer	Shenzhen Sang Fei Consumer Communications Co., Ltd
Address	11 Science and Technology Road, Shenzhen Hi-tech Industrial Park Nanshan District, Shenzhen city, Guangdong province, 518057, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Mobile Phone
Model Name Under Test	Philips S329
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	WMGEB
Software Version	Philips_S329_1716_V01T02_AG
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band 2/5 4G Network FDD LTE Band 4/5/7 Bluetooth, WIFI, GPS, FM

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	PHILIPS
	Model No.	AB3000LWMT
	Serial No.	N/A
	Capacitance	3000 mAh
	Rated Voltage	3.85 V
	Limit Charge Voltage	4.40 V
Ancillary Equipment 2	Adapter	
	Brand Name	PHILIPS
	Model No.	A88A-050100U-AR1
	Serial No.	N/A
	Rated Input	100 - 240 V ~, 50/60 Hz, 0.2 A
	Rated Output	5 V =, 1.0 A
Ancillary Equipment 3	Earphone	
	Length (Approx.)	120 cm
Ancillary Equipment 4	USB Cable	
	Length (Approx.)	80 cm

2.6 Technical Information

Note: Not applicable.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	FCC 47 CFR Part 15 Subpart B (10-1-16 Edition)	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.109	Pass	Annex A .1
2	Conducted Emission, AC Ports	15.107	Pass	Annex A .2

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.23 dB
Radiated emissions (30 MHz-1 GHz)	4.30 dB
Radiated emissions (1 GHz-18 GHz)	4.81 dB
Radiated emissions (18 GHz-40 GHz)	5.71 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

Environment Parameter	Selected Values During Tests			
	Temperature	Voltage	Relative Humidity	Ambient Pressure
Normal Temperature, Normal Voltage (NTNV)	23°C~26°C	AC 120 V/60 Hz or DC 3.85 V from Battery	50%-55%	100 to 102 kPa

4.2 Test Equipment List

Radiated Emission Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2016.09.09	2017.09.08	<input checked="" type="checkbox"/>
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2016.07.05	2017.07.04	<input type="checkbox"/>
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	9163-624	2015.07.22	2017.07.21	<input checked="" type="checkbox"/>
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	9120D-1148	2015.07.22	2017.07.21	<input checked="" type="checkbox"/>
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20	<input checked="" type="checkbox"/>

Conducted Emission Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2016.07.05	2017.07.04	<input checked="" type="checkbox"/>
LISN	SCHWARZBECK	NSLK 8127	8127-687	2016.07.05	2017.07.04	<input checked="" type="checkbox"/>
LISN	SCHWARZBECK	NNLK 8129	8129-462	2016.09.14	2017.09.13	<input type="checkbox"/>
AMN	SCHWARZBECK	NNBM8124	8124-509	2016.07.05	2017.07.04	<input type="checkbox"/>
AMN	SCHWARZBECK	NNBM8124	8124-510	2016.07.05	2017.07.04	<input type="checkbox"/>
ISN	TESEQ	ISN T800	34449	2016.07.05	2017.07.04	<input type="checkbox"/>
Shielded Enclosure	ChangNing	CN-130701	130703	N/A	N/A	<input checked="" type="checkbox"/>

4.3 Test Enclosure list


Description	Manufacturer	Model	Serial No.	Length	Description	Use
PC	Dell	015K3N	N/A	N/A	Special Handled	<input type="checkbox"/>
Laptop	Apple	A1465	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Printer	HP	DESKJET 1000	N/A	N/A	N/A	<input type="checkbox"/>
Keyboard	Logitech	Y-BP62a	N/A	N/A	N/A	<input type="checkbox"/>
Mouse	Logitech	M100	N/A	N/A	N/A	<input type="checkbox"/>
USB disk	Kingston	N/A	N/A	N/A	N/A	<input type="checkbox"/>
TF Card	Kingston	N/A	N/A	N/A	N/A	<input checked="" type="checkbox"/>
VGA Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
HDMI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
DVI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
Coaxial video cable	N/A	N/A	N/A	2.0 m	Shielded with core	<input type="checkbox"/>
iPhone	Apple	A1586	N/A	N/A	N/A	<input type="checkbox"/>
Phone	MI	M4	N/A	N/A	N/A	<input type="checkbox"/>
Bluetooth Earphone	SAMSUNG	Gear Circle	N/A	N/A	N/A	<input checked="" type="checkbox"/>
GPS/GLONASS Vector signal generator	R&S	N5172B EXG	N/A	N/A	N/A	<input checked="" type="checkbox"/>
WIFI Router	TP-LINK	TL-WDR7500	N/A	N/A	N/A	<input checked="" type="checkbox"/>
Earphone	N/A	OPPO	N/A	1.1 m	N/A	<input type="checkbox"/>
Car Battery	Camel	55530	N/A	N/A	12 V/55 Ah	<input type="checkbox"/>
Artificial load	N/A	N/A	N/A	N/A	2.5 Ω/100 W	<input type="checkbox"/>
Artificial load	N/A	N/A	N/A	N/A	5 Ω/100 W	<input type="checkbox"/>
Electronic Load	ITECH	IT8511	N/A	N/A	N/A	<input type="checkbox"/>
USB Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>
DC Power Supply	ITECH	IT6863A	60001401068 7210006	N/A	N/A	<input type="checkbox"/>
LCD Monitor	SAMSUNG	UA32C4000P	N/A	N/A	N/A	<input type="checkbox"/>
LCD Monitor	Dell	U241HB	N/A	N/A	N/A	<input type="checkbox"/>
RJ45 Cable	N/A	N/A	N/A	1.5 m	Shielded with core	<input type="checkbox"/>

4.4 Test Configurations

Test Configurations (TC) No.	Description
Traffic Test Mode	
TC01	<u>The GSM 850 MHz Test Mode</u> GSM 850 Link + Adapter + USB Cable + Battery + TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC02	<u>The EDGE 850 MHz Test Mode</u> EDGE 850 Link + Adapter + USB Cable + Battery + TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC03	<u>The GSM 1900 Test Mode</u> GSM 1900 Link + Adapter + USB Cable + Battery + TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC04	<u>The EDGE 1900 MHz Test Mode</u> EDGE 1900 Link + Adapter + USB Cable + Battery + TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC05	<u>The WCDMA Band 2 Test Mode</u> WCDMA Band 2 + Adapter + USB Cable + Battery + TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC06	<u>The WCDMA Band 5 test mode</u> WCDMA Band 5 + Adapter + USB Cable + Battery + TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC07	<u>The FDD LTE Band 4 Test Mode</u> LTE Band 4 Link + Adapter + USB Cable + Battery + TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC08	<u>The FDD LTE Band 5 Test Mode</u> LTE Band 5 Link + Adapter + USB Cable + Battery + TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC09	<u>The FDD LTE Band 7 Test Mode</u> LTE Band 7 Link + Adapter + USB Cable + Battery + TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC10	<u>The FDD LTE Band 28 Test Mode</u> LTE Band 28 Link + Adapter + USB Cable + Battery + TF Card + Earphone + BT Link + WIFI Link + GPS RX
TC11	<u>The Idle Test Mode</u> GSM 850(Idle) + Adapter + USB Cable + Battery + TF Card + Earphone + FM RX
Amusement Test Mode	
TC12	<u>The USB Test Mode</u> EUT + USB Cable + Battery + TF Card + Earphone + Laptop
TC13	<u>The Video Record Test Mode</u> EUT + Adapter + USB Cable + Battery + TF Card + Earphone
TC14	<u>The Video Play Test Mode</u> EUT + Adapter + USB Cable + Battery + TF Card + Earphone


4.5 Test Setups

Test Setup 1

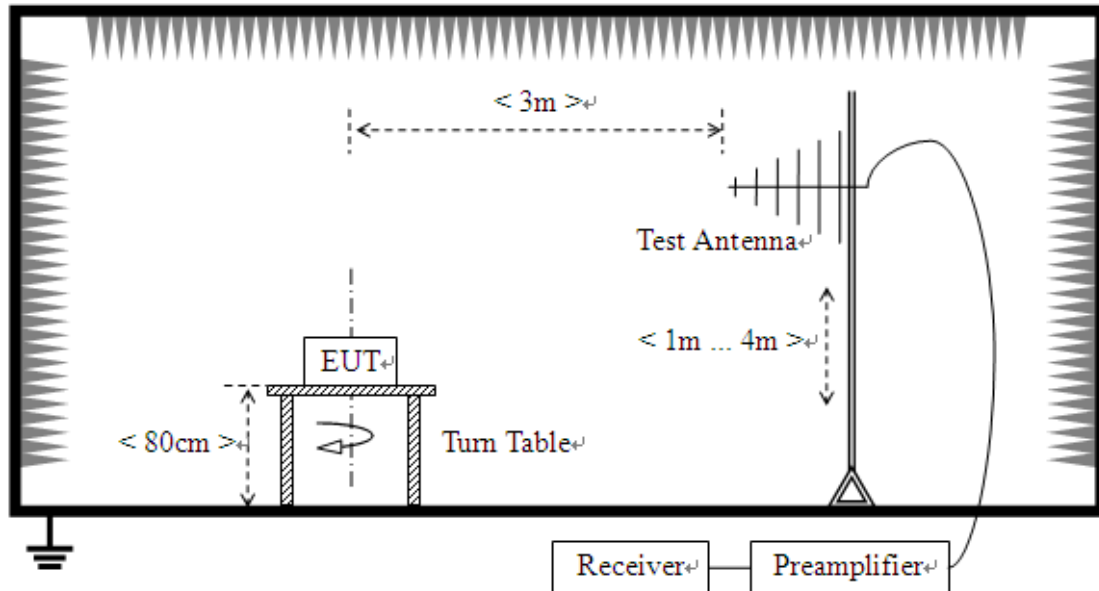


(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 2

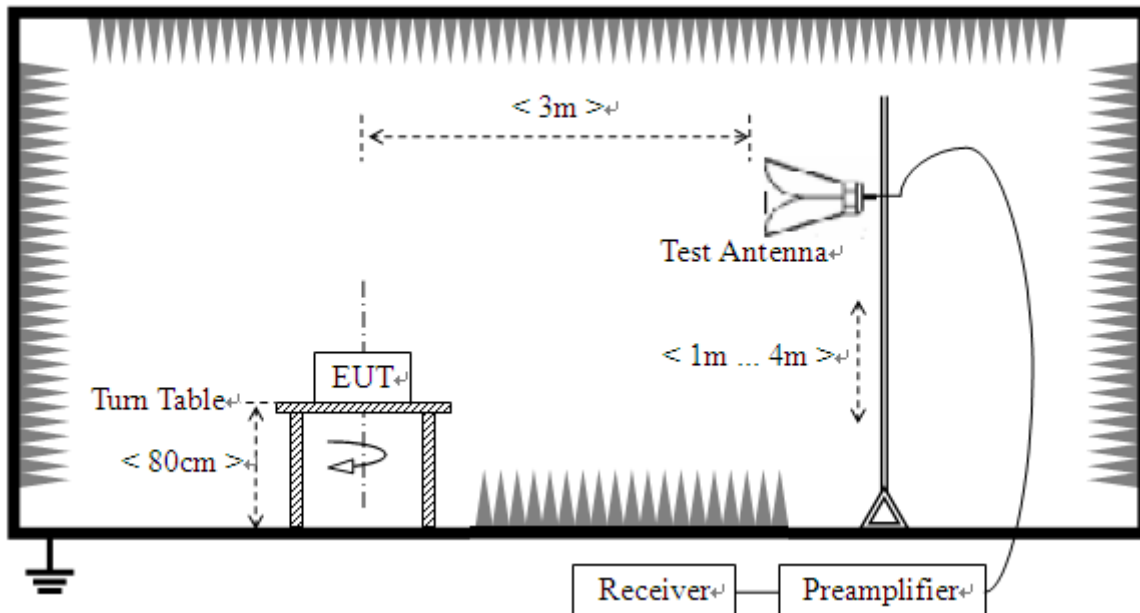

(For Radiated Emission Test (above 1 GHz))

Test Setup 3

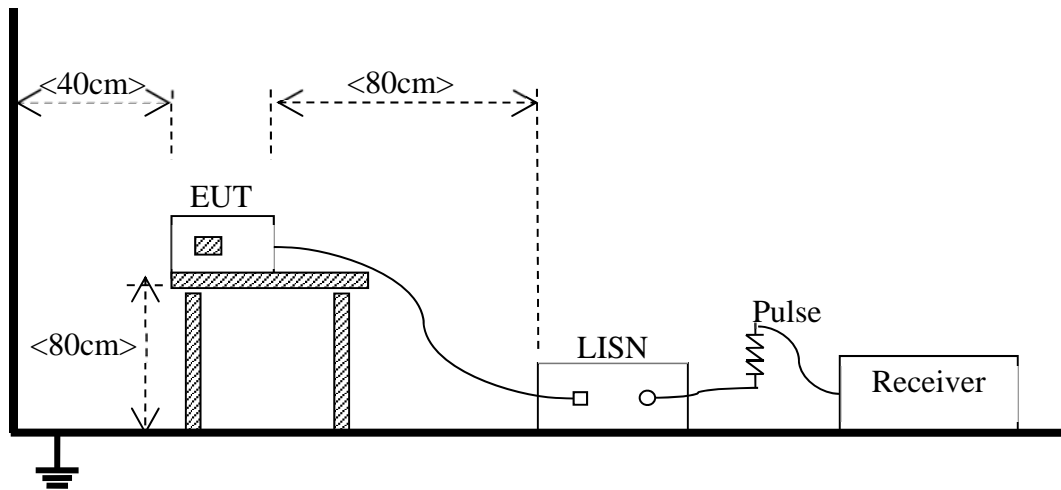

(For Conducted Emission, AC Ports Test)

4.6 Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Env.	NTNV
	Test Setup	Test Setup 1&2
	Test Configuration	TC01~TC14 ^{Note}
Conducted Emission, AC Ports	Test Env.	NTNV
	Test Setup	Test Setup 3
	Test Configuration	TC01~TC14 ^{Note}

Note: Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report. The GSM 850 MHz Test Mode is the worst mode in this report.

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	90	49
88 - 216	150	43.5	150	53.5
216 - 960	200	46	210	56.4
Above 960	500	54	300	59.5

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log$ [Field Strength ($\mu\text{V/m}$)].
- 2) In the emission tables above, the tighter limit applies at the band edges.

5.1.1.2 Test Setup

Refer to 4.5 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

5.1.1.4 Test Result

Please refer to ANNEX A.1.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.5 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.1.2.4 Test Result

Please refer to ANNEX A.2.

ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: This frequency which near 850 MHz with circle should be ignored because they are MS and SS carrier frequency, the marked spikes near 2400 MHz with circle should be ignored because they are Bluetooth or WIFI carrier frequency.

Test Data and Plots


The GSM 850 MHz Test Mode

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz

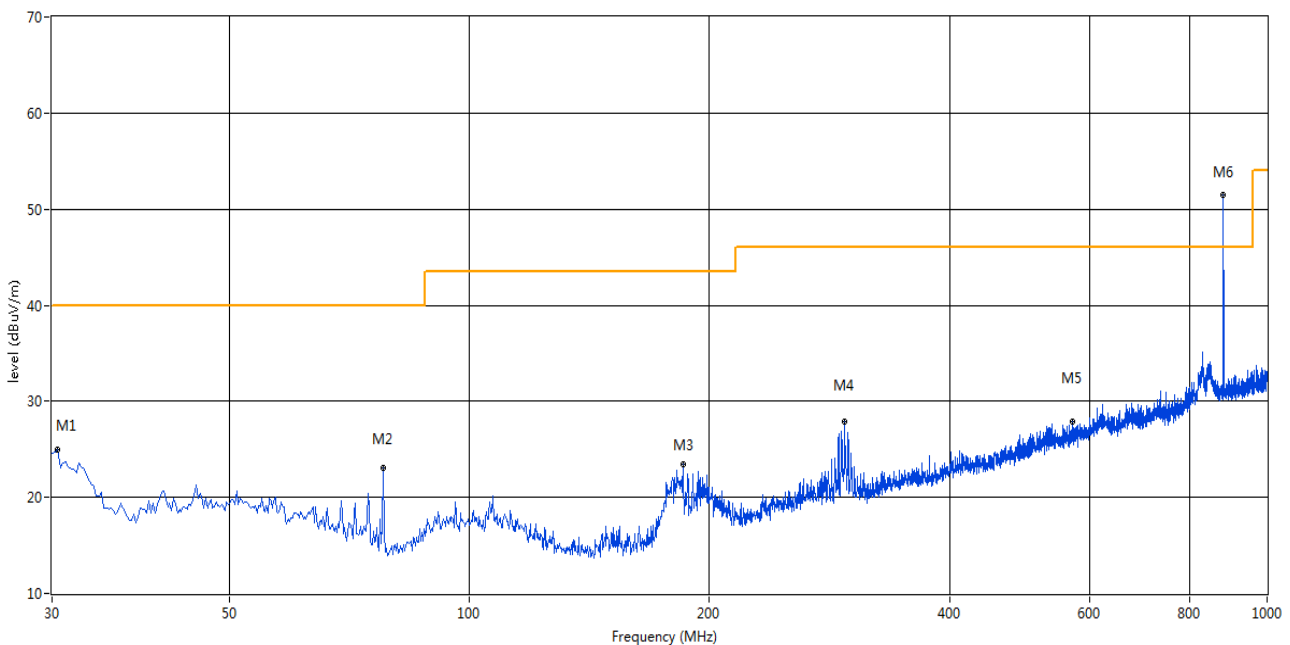


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	30.485	25.01	-22.97	40.0	14.99	Peak	360.00	200	Vertical	Pass
2	78.015	23.09	-25.70	40.0	16.91	Peak	112.20	200	Vertical	Pass
3	185.200	23.51	-22.96	43.5	19.99	Peak	230.60	100	Vertical	Pass
4	295.538	27.83	-19.25	46.0	18.17	Peak	256.70	200	Vertical	Pass
5	569.805	27.94	-12.78	46.0	18.06	Peak	41.60	200	Vertical	Pass
6	881.660	51.53	-6.95	46.0	-5.53	Peak	0.00	100	Vertical	N/A

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

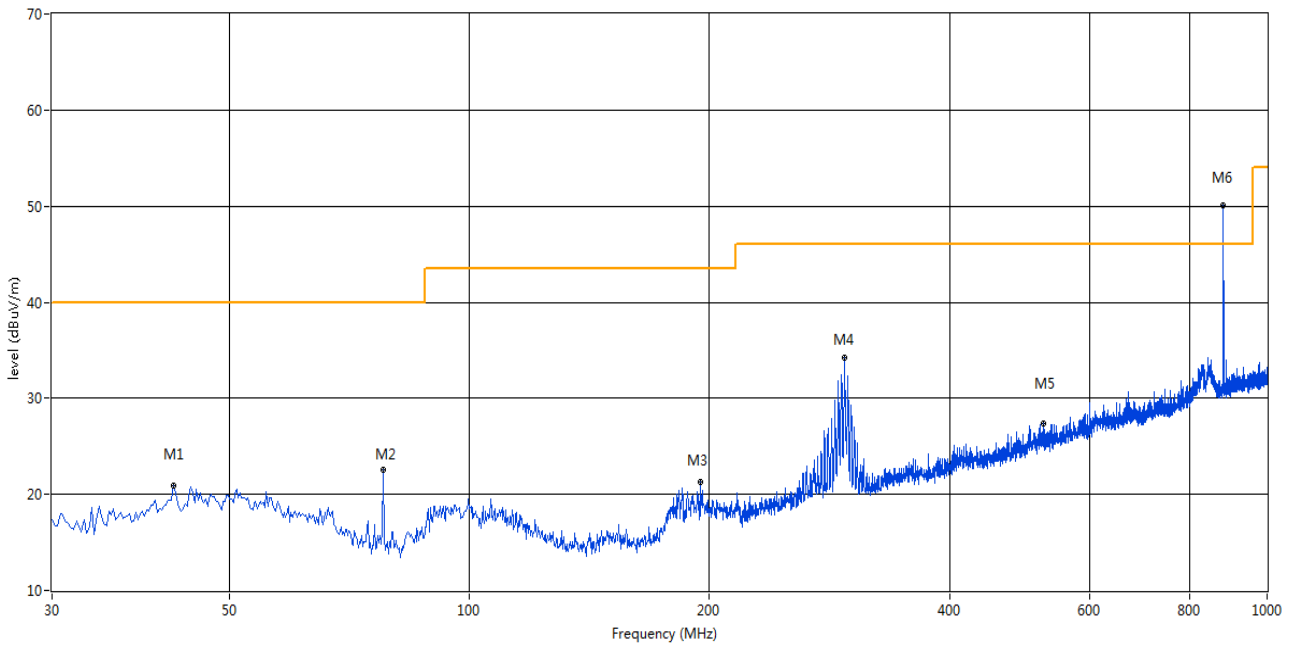


	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	42.610	20.96	-20.21	40.0	19.04	Peak	184.90	100	Horizontal	Pass
2	78.015	22.54	-25.70	40.0	17.46	Peak	360.00	300	Horizontal	Pass
3	194.658	21.31	-21.93	43.5	22.19	Peak	100.80	100	Horizontal	Pass
4	295.538	34.22	-19.25	46.0	11.78	Peak	81.10	100	Horizontal	Pass
5	523.730	27.40	-13.74	46.0	18.60	Peak	136.70	100	Horizontal	Pass
6	881.660	50.13	-6.95	46.0	-4.13	Peak	0.00	200	Horizontal	N/A

A.1.3 Test Antenna Vertical, 1 GHz – 6 GHz

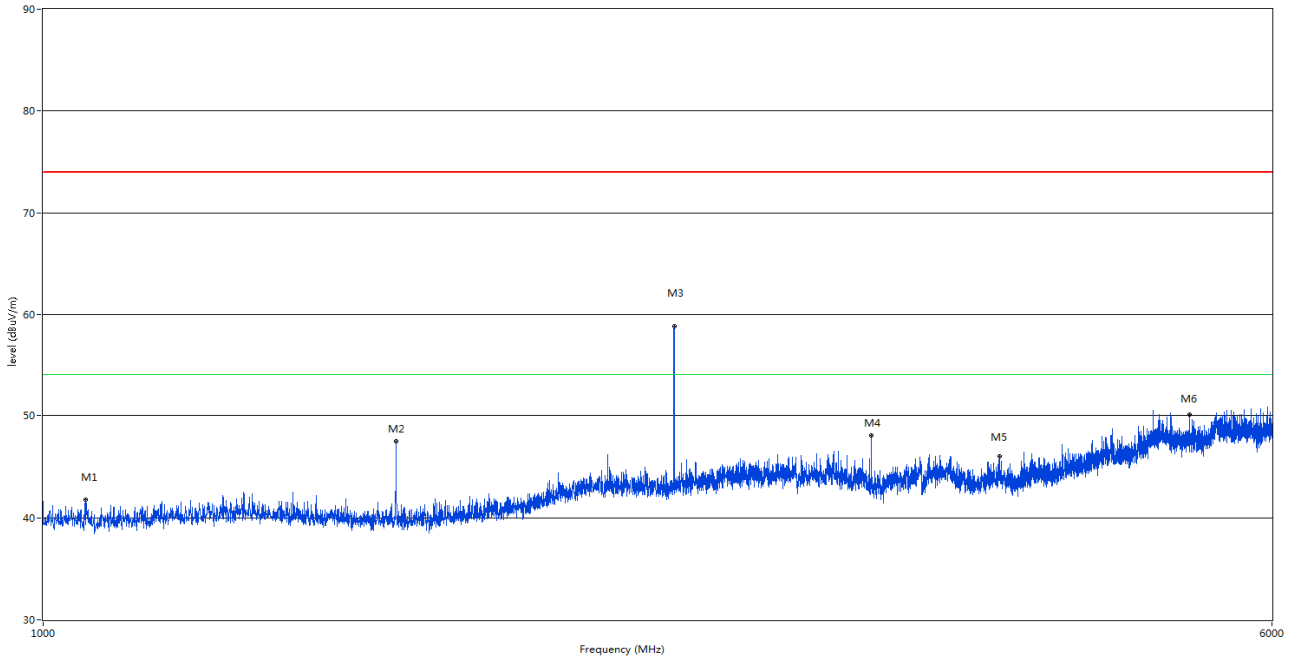

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1064.500	41.77	-7.25	74.0	32.23	Peak	127.90	100	Vertical	Pass
2	1673.000	47.48	-5.89	74.0	26.52	Peak	359.10	100	Vertical	N/A
3	2509.500	58.87	-2.40	74.0	15.13	Peak	359.10	100	Vertical	N/A
4	3345.750	48.03	5.97	74.0	25.97	Peak	328.90	100	Vertical	N/A
5	4032.000	45.99	8.81	74.0	28.01	Peak	0.00	100	Vertical	Pass
6	5317.500	50.15	11.18	74.0	23.85	Peak	4.80	100	Vertical	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 6 GHz

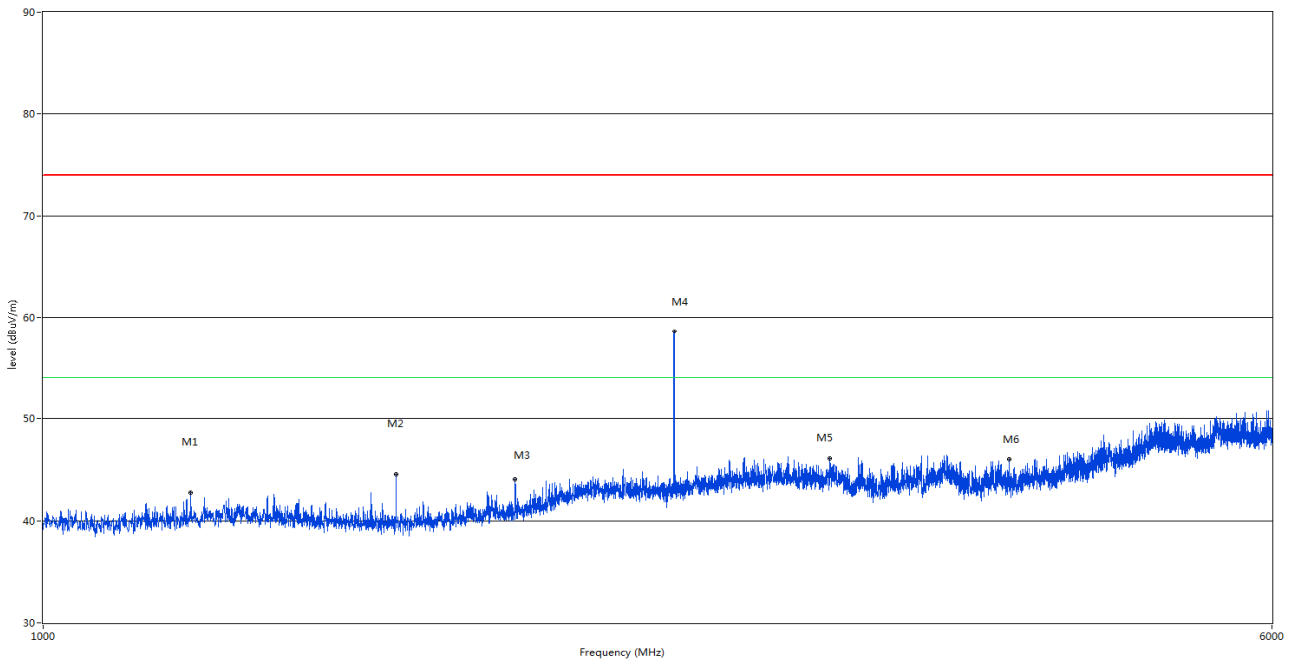


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1240.000	42.76	-6.64	74.0	31.24	Peak	170.30	100	Horizontal	Pass
2	1673.000	44.56	-5.89	74.0	29.44	Peak	257.20	100	Horizontal	N/A
3	1990.500	44.05	-4.54	74.0	29.95	Peak	292.20	100	Horizontal	Pass
4	2509.500	58.59	-2.40	74.0	15.41	Peak	8.40	100	Horizontal	N/A
5	3149.250	46.07	6.44	74.0	27.93	Peak	147.10	100	Horizontal	Pass
6	4089.750	46.05	8.42	74.0	27.95	Peak	244.70	100	Horizontal	Pass

Test Data and Plots


The USB Test Mode

A.1.5 Test Antenna Vertical, 30 MHz – 1 GHz

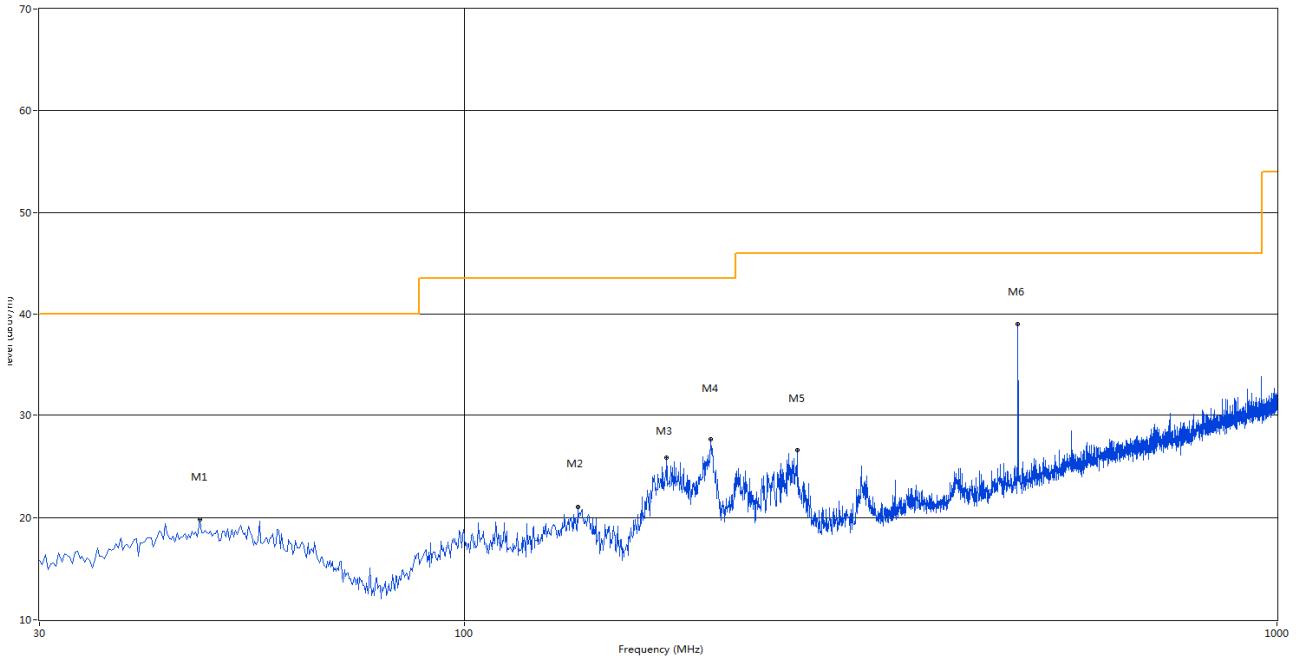

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	47.218	19.78	-20.03	40.0	20.22	Peak	360.00	200	Vertical	Pass
2	137.913	21.03	-25.23	43.5	22.47	Peak	360.00	200	Vertical	Pass
3	177.440	25.88	-23.85	43.5	17.62	Peak	360.00	200	Vertical	Pass
4	200.962	27.64	-21.68	43.5	15.86	Peak	267.30	100	Vertical	Pass
5	256.980	26.63	-20.46	46.0	19.37	Peak	244.00	100	Vertical	Pass
6	480.080	39.05	-15.37	46.0	6.95	Peak	0.80	100	Vertical	Pass

A.1.6 Test Antenna Horizontal, 30 MHz – 1 GHz

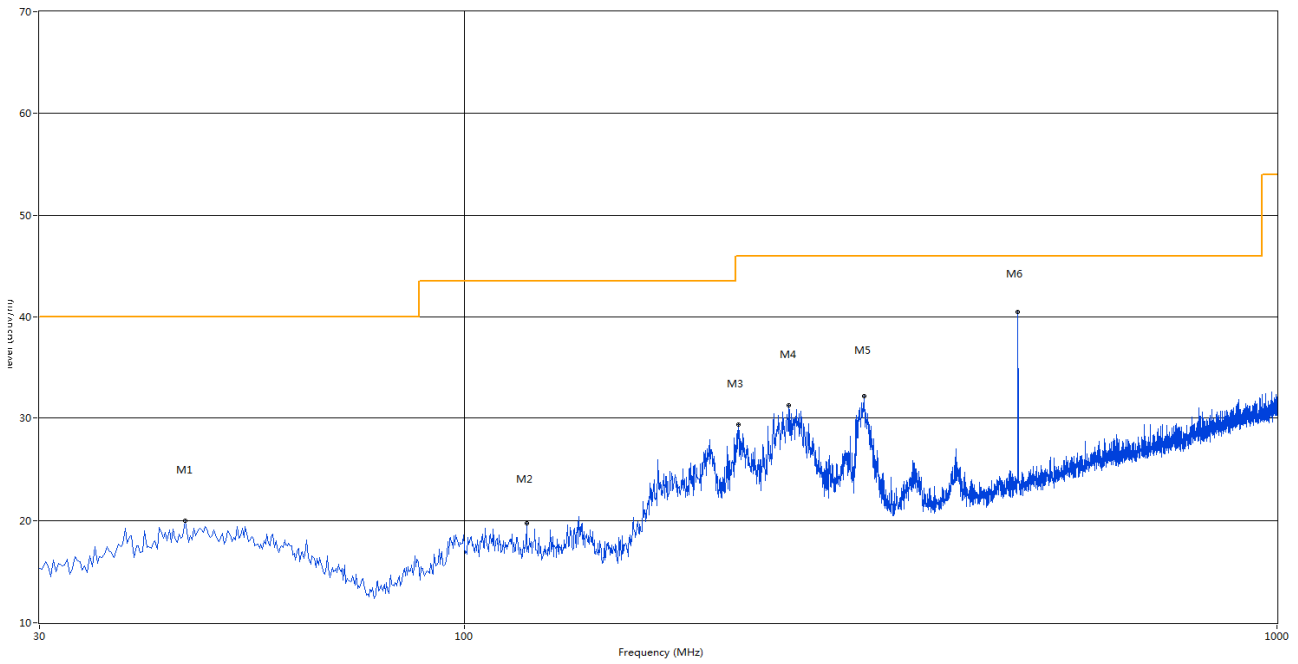

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	45.278	19.96	-20.09	40.0	20.04	Peak	28.80	100	Horizontal	Pass
2	119.240	19.76	-23.30	43.5	23.74	Peak	220.60	100	Horizontal	Pass
3	217.210	29.39	-21.66	46.0	16.61	Peak	56.30	100	Horizontal	Pass
4	250.917	31.21	-20.60	46.0	14.79	Peak	47.20	100	Horizontal	Pass
5	310.573	32.14	-19.04	46.0	13.86	Peak	83.80	100	Horizontal	Pass
6	480.080	40.45	-15.37	46.0	5.55	Peak	250.00	100	Horizontal	Pass


A.2 Conducted Emission

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots


The GSM 850 MHz Test Mode

A.2.1 L Phase

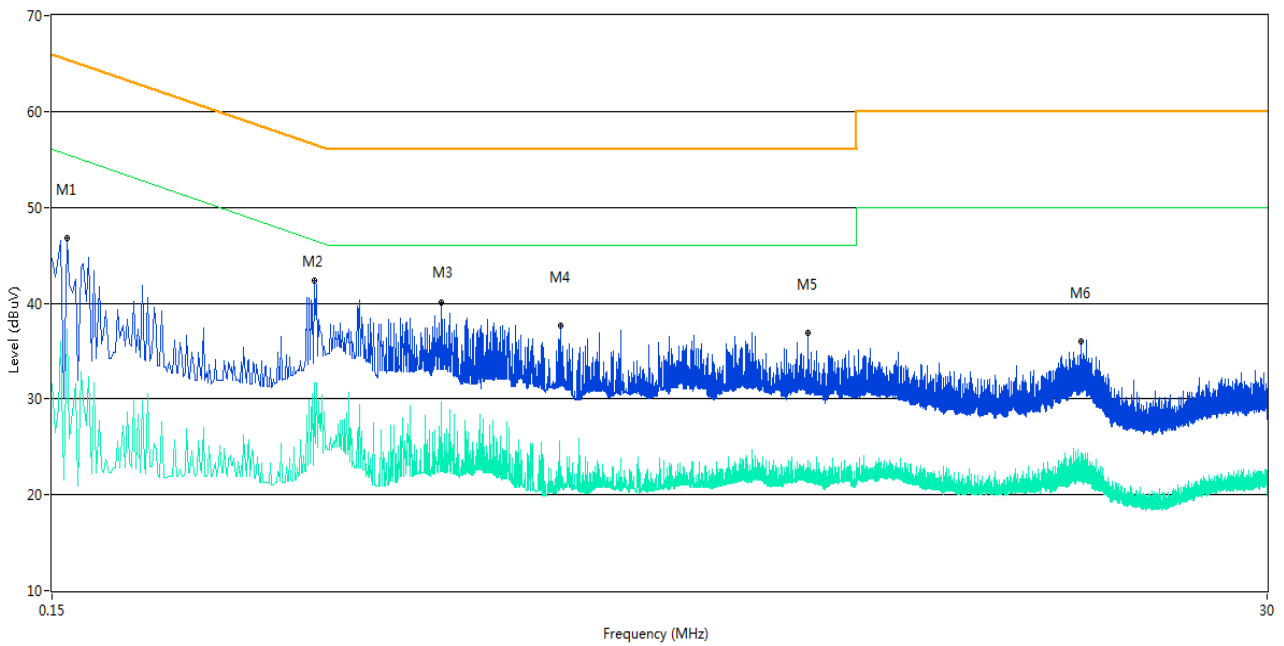

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	46.8	10.29	65.5	18.70	Peak	L Line	Pass
1**	0.160	37.2	10.29	55.5	18.30	AV	L Line	Pass
2	0.470	42.4	10.33	56.5	14.10	Peak	L Line	Pass
2**	0.470	31.7	10.33	46.5	14.80	AV	L Line	Pass
3	0.818	40.1	10.32	56.0	15.90	Peak	L Line	Pass
3**	0.818	29.7	10.32	46.0	16.30	AV	L Line	Pass
4	1.378	37.7	9.94	56.0	18.30	Peak	L Line	Pass
4**	1.378	22.9	9.94	46.0	23.10	AV	L Line	Pass
5	4.048	36.8	10.17	56.0	19.20	Peak	L Line	Pass
5**	4.048	23.6	10.17	46.0	22.40	AV	L Line	Pass
6	13.308	36.0	11.26	60.0	24.00	Peak	L Line	Pass
6**	13.308	23.8	11.26	50.0	26.20	AV	L Line	Pass

A.2.2 N Phase

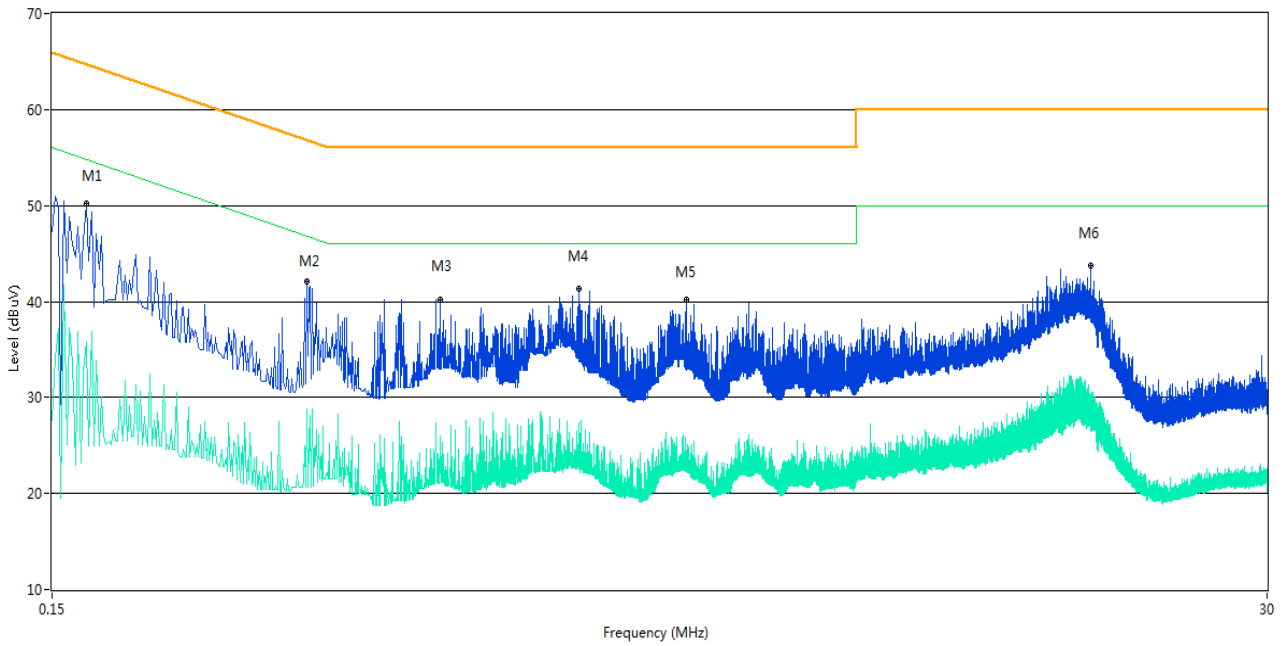


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.174	50.2	9.53	64.8	14.60	Peak	N Line	Pass
1**	0.174	35.8	9.53	54.8	19.00	AV	N Line	Pass
2	0.456	42.1	9.14	56.8	14.70	Peak	N Line	Pass
2**	0.456	28.7	9.14	46.8	18.10	AV	N Line	Pass
3	0.814	40.2	10.04	56.0	15.80	Peak	N Line	Pass
3**	0.814	25.9	10.04	46.0	20.10	AV	N Line	Pass
4	1.490	41.4	10.30	56.0	14.60	Peak	N Line	Pass
4**	1.490	27.4	10.30	46.0	18.60	AV	N Line	Pass
5	2.384	40.2	10.59	56.0	15.80	Peak	N Line	Pass
5**	2.384	24.2	10.59	46.0	21.80	AV	N Line	Pass
6	13.878	43.8	11.30	60.0	16.20	Peak	N Line	Pass
6**	13.878	30.3	11.30	50.0	19.70	AV	N Line	Pass

Test Data and Plots


The USB Test Mode

A.2.3 L Phase

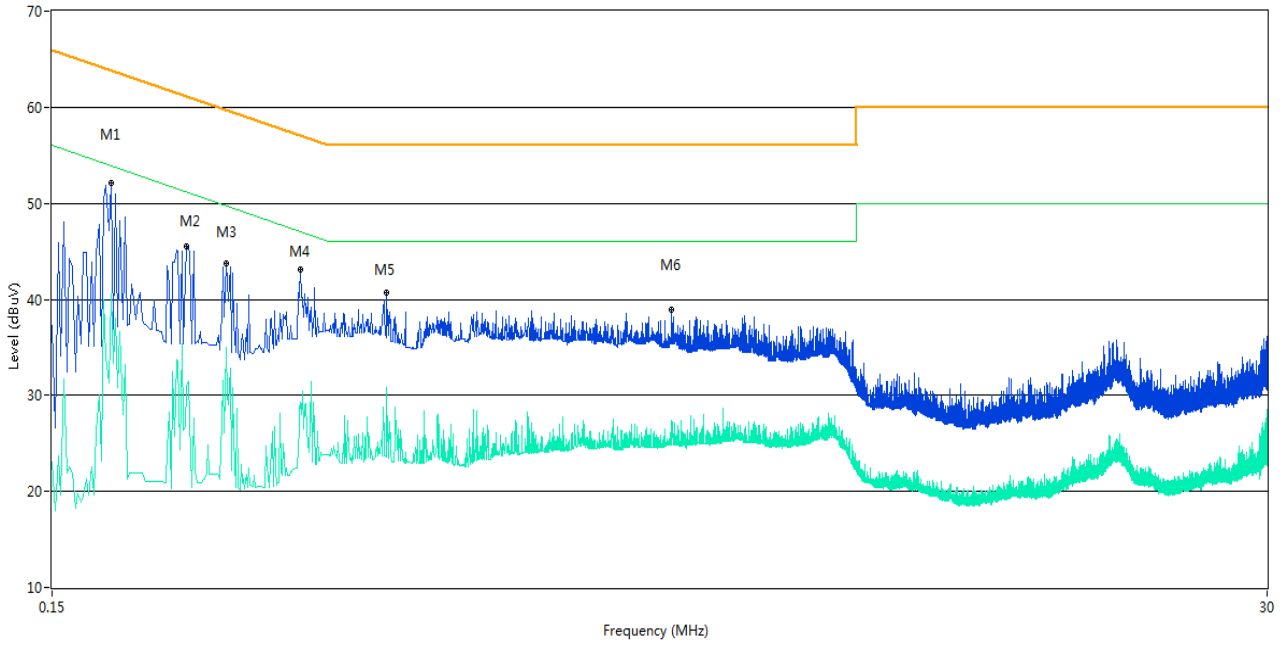

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.194	52.1	9.43	63.9	11.80	Peak	L Line	Pass
1**	0.194	40.5	9.43	53.9	13.40	AV	L Line	Pass
2	0.270	45.5	10.32	61.1	15.60	Peak	L Line	Pass
2**	0.270	31.0	10.32	51.1	20.10	AV	L Line	Pass
3	0.320	43.7	10.13	59.7	16.00	Peak	L Line	Pass
3**	0.320	35.0	10.13	49.7	14.70	AV	L Line	Pass
4	0.444	43.1	10.51	57.0	13.90	Peak	L Line	Pass
4**	0.444	29.3	10.51	47.0	17.70	AV	L Line	Pass
5	0.646	40.7	10.69	56.0	15.30	Peak	L Line	Pass
5**	0.646	30.9	10.69	46.0	15.10	AV	L Line	Pass
6	2.232	38.9	10.64	56.0	17.10	Peak	L Line	Pass
6**	2.232	26.2	10.64	46.0	19.80	AV	L Line	Pass

A.2.4 N Phase

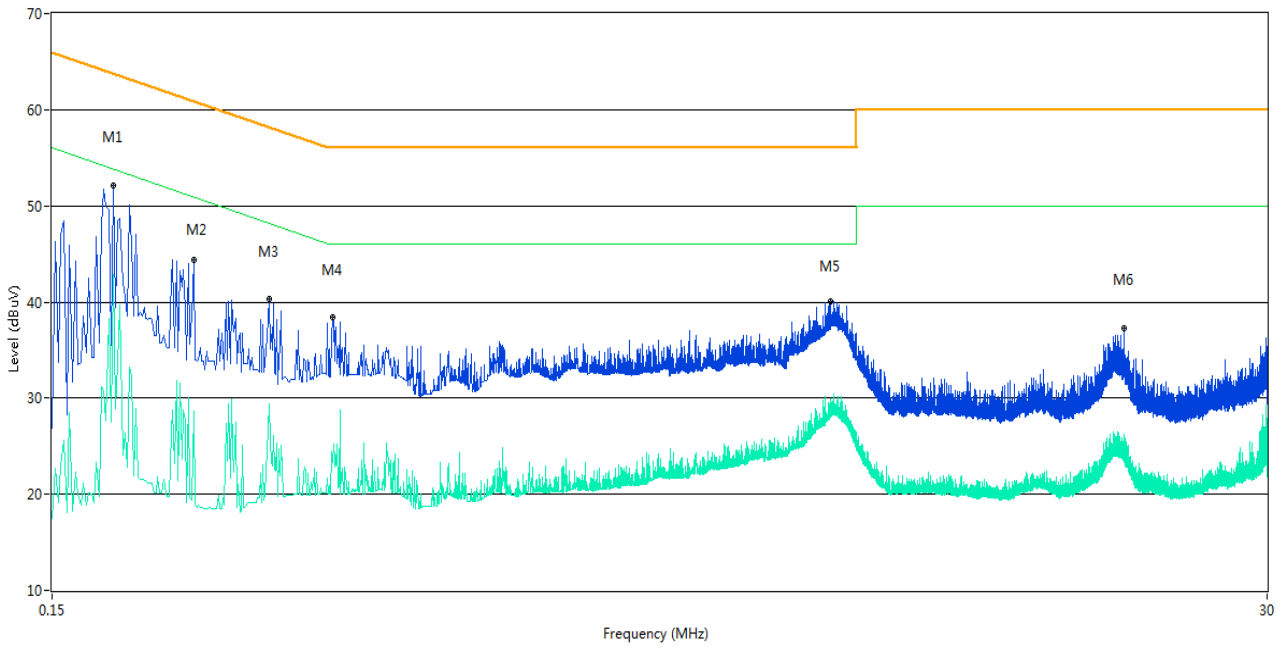

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.196	52.1	9.47	63.8	11.70	Peak	N Line	Pass
1**	0.196	42.9	9.47	53.8	10.90	AV	N Line	Pass
2	0.278	44.4	10.72	60.9	16.50	Peak	N Line	Pass
2**	0.278	28.7	10.72	50.9	22.20	AV	N Line	Pass
3	0.386	40.3	10.43	58.1	17.80	Peak	N Line	Pass
3**	0.386	29.4	10.43	48.1	18.70	AV	N Line	Pass
4	0.510	38.4	9.95	56.0	17.60	Peak	N Line	Pass
4**	0.510	23.4	9.95	46.0	22.60	AV	N Line	Pass
5	4.464	40.0	10.35	56.0	16.00	Peak	N Line	Pass
5**	4.464	29.9	10.35	46.0	16.10	AV	N Line	Pass
6	16.070	37.2	11.35	60.0	22.80	Peak	N Line	Pass
6**	16.070	26.2	11.35	50.0	23.80	AV	N Line	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ1750142-AE.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ1750142-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ1750142-AI.PDF".

--END OF REPORT--