FCC PART 15C
TEST REPORT
No. 2013EEB00530-BT

For

Shenzhen Sang Fei Consumer Communications Co., Ltd.

WG-Raptor

Model Name: Philips W3500

Market Name: W3500

With

Hardware Version: TMAO

Software Version:

Philips_T3500_WCDMA_4+8_GPS_V1.0_20131031

FCC ID: VQRCTW3500

Issued Date: Dec 6th, 2013

Test Laboratory:
FCC 2.948 Listed: No.310359
IC O.A.T.S listed: No.6629C-1

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology
No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191
Tel:+86(0)10-62304633-2678 , Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1. Test Laboratory

1.1. Testing Location

Company Name:	TMC Shenzhen, Telecommunication Metrology Center of MIIT
Address:	No. 12 Building, Shangsha Innovation and Technology Park, Futian District, Shenzhen, P. R. China
Postal Code:	518048
Telephone:	+86(0)755-33322000
Fax:	+86(0)755-33322001

1.2. Testing Environment

Normal Temperature:	15℃-30℃
Extreme Temperature:	-20℃/+55℃
Relative Humidity:	30%-60%

1.3. Project data

Project Leader:	Zhang Bojun
Test Engineer:	Tang Weisheng
Testing Start Date:	Nov 6th, 2013
Testing End Date:	Nov 20th, 2013

1.4. Signature

Tang Weisheng
(Prepared this test report)

Zhang Bojun
(Reviewed this test report)

Lu Minniu
Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name:	Shenzhen Sang Fei Consumer Communications Co., Ltd.
Address /Post:	11 Science and Technology Road, Shenzhen Hi-tech Industrial Park Nanshan District, Shenzhen, PRC
City:	Shenzhen
Postal Code:	/
Country:	China
Telephone:	0755-86138466
Fax:	0755-26503914

2.2. Manufacturer Information

Company Name:	Shenzhen Sang Fei Consumer Communications Co., Ltd.
Address /Post:	11 Science and Technology Road, Shenzhen Hi-tech Industrial Park Nanshan District, Shenzhen, PRC
City:	Shenzhen
Postal Code:	/
Country:	China
Telephone:	0755-86138466
Fax:	0755-26503914

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	WG-Raptor
Model Name	Philips W3500
Marketing Name	W3500
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/π/4 DQPSK/8DPSK
Number of Channels	79
FCC ID	VQRCTW3500

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	/	TMAO	Philips_T3500_WCDMA_4+8_GPS_V1.0_20131031

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Li-ion Battery	AB2200AWML	/
AE2	Travel Charger	A31-500650	/
AE3	Travel Charger	3208SF	

*AE ID: is used to identify the test accessory in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	Oct, 2012 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
FCC Public Notice DA 00-705	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems	Mar, 2000

5. Laboratory Environment

Half-anechoic chamber (11.20 meters×6.10 meters×5.60 meters) did not exceed following limits:

Temperature	Min. = 15 ℃, Max. = 30 ℃
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 0.5 Ω
Normalized Site Attenuation (NSA)	< ±3.5dB, with 3m of Measuring distance, 30MHz 1000MHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Fully-anechoic chamber (11.20 meters×6.10 meters×6.60 meters) did not exceed following limits:

Temperature	Min. = 15 ℃, Max. = 30 ℃
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 30MHz to 18 000 MHz

Conduction Lab did not exceed following limits:

Temperature	Min.=15 ℃, Max.=30 ℃
Relative humidity	Min.=30 %, Max.= 60 %
Shielding effectiveness	> 80 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 0.5 Ω

6. Summary of Test Results

6.1. Summary of Test Results

No	Test cases	Sub-clause of Part15C	Verdict
0	Antenna Requirement	15.203	**P**
1	Maximum Peak Output Power	15.247 (b)	**P**
2	Band Edges Compliance	15.247 (d)	**P**
3	Conducted Spurious Emission	15.247 (d)	**P**
4	Radiated Spurious Emission	15.247,15.205,15.209	**P**
5	Occupied 20dB bandwidth	15.247(a)	**/**
6	Time of Occupancy(Dwell Time)	15.247(a)	**P**
7	Number of Hopping Channel	15.247(a)	**P**
8	Carrier Frequency Separation	15.247(a)	**P**
9	AC Powerline Conducted Emission	15.107,15.207	**P**

6.2. Statements

TMC has evaluated the test cases requested by the applicant/manufacturer as listed in section 6.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2

6.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
BW	Band Width
ISM	Industrial, Scientific and Medical
RF	Radio Frequency

7. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2014-04-23	1 year
2	Bluetooth Tester	CBT32	100584	Rohde & Schwarz	2014-01-12	1 year

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Chamber	FACT5-2.0	4166	ETS-Lindgren	2016-05-29	3 years
2	Test Receiver	ESCI	100701	Rohde & Schwarz	2014-07-31	1 year
3	Spectrum Analyzer	FSP40	100378	Rohde & Schwarz	2013-12-21	1 year
4	BiLog Antenna	VULB9163	9163-330	Schwarzbeck	2014-02-24	3 years
5	Dual-Ridge Waveguide Horn Antenna	3164-05	00085724	ETS-Lindgren	2014-02-17	3 years
6	Test Receiver	ESCI	100702	Rohde & Schwarz	2014-07-31	1 year
7	LISN	ESH2-Z5	100196	Rohde & Schwarz	2014-01-23	1 year
8	Signal Generator	SMR40	100541	Rohde & Schwarz	2014-01-10	1 year
9	Dual-Ridge Waveguide Horn Antenna	3117	00066577	ETS-Lindgren	2016-04-01	3 years
10	Loop Antenna	HLA6120	35779	TESEQ	2016-02-25	3 years
11	EMI Antenna	3160-09	00118383	ETS-Lindgren	2015-09-05	3 years

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren.

ANNEX A: EUT photograph

Pic A-1 Mobile phone

Pic A-2 Mobile phone

Pic A-3 Battery

Pic A-4 Charger 1

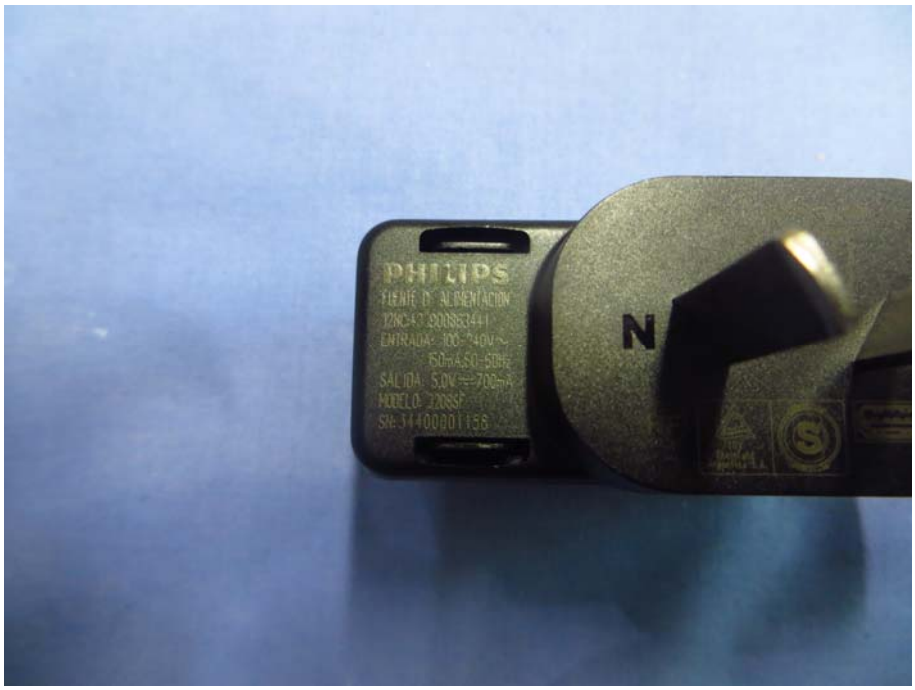

Pic A-5 Charger 2

ANNEX B: MEASUREMENT RESULTS

B.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, § 15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Conclusion: The Directional gains of antenna used for transmitting is 3.0 dBi.
The RF transmitter uses an integrate antenna without connector.

B.1 Maximum Peak Output Power

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)(1)	< 30

Measurement Results:

Mode	Test Result (dBm)					
	2402MHz (Ch0)		2441MHz (Ch39)		2480 MHz (Ch78)	
GFSK	Fig.1	3.20	Fig.2	3.07	Fig.3	3.13
π /4 DQPSK	Fig.4	2.61	Fig.5	2.35	Fig.6	2.38
8DPSK	Fig.7	2.42	Fig.8	2.53	Fig.9	2.44

Conclusion: Pass

B.2 Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	ON	Fig.10	P
	78	ON	Fig.11	P
π /4 DQPSK	0	ON	Fig.12	P
	78	ON	Fig.13	P
8DPSK	0	ON	Fig.14	P
	78	ON	Fig.15	P

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	OFF	Fig.16	P
	78	OFF	Fig.17	P
π /4 DQPSK	0	OFF	Fig.18	P
	78	OFF	Fig.19	P
8DPSK	0	OFF	Fig.20	P
	78	OFF	Fig.21	P

See ANNEX C for test graphs.

Conclusion: Pass

B.3 Conducted Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

MODE	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.402 GHz	Fig.22	P
		30 MHz-3GHz	Fig.23	P
		3GHz-18GHz	Fig.24	P
	39	2.402 GHz	Fig.25	P
		30 MHz-3 GHz	Fig.26	P
		3GHz-18GHz	Fig.27	P
	78	2.480 GHz	Fig.28	P
		30 MHz-3GHz	Fig.29	P
		3GHz-18GHz	Fig.30	P
π /4 DQPSK	0	2.402 GHz	Fig.31	P
		30 MHz-3 GHz	Fig.32	P
		3GHz-18GHz	Fig.33	P
	39	2.480 GHz	Fig.34	P
		30 MHz-3GHz	Fig.35	P
		3GHz-18Ghz	Fig.36	P
	78	2.480 GHz	Fig.37	P
		30 MHz-3GHz	Fig.38	P
		3GHz-18Ghz	Fig.39	P
8DPSK	0	2.402 GHz	Fig.40	P
		30 MHz-3GHz	Fig.41	P
		3GHz-18GHz	Fig.42	P
	39	2.402 GHz	Fig.43	P
		30 MHz-3GHz	Fig.44	P
		3GHz-18GHz	Fig.45	P
	78	2.480 GHz	Fig.46	P
		30 MHz-3GHz	Fig.47	P
		3GHz-18GHz	Fig.48	P
/	All channel	18GHz-26GHz	Fig.49	P

See ANNEX C for test graphs.

Conclusion: Pass

B.4 Radiated Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(μV/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Note: According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band from 9kHz to 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

This test uses the limit of AV and Peak Detection.

Measurement Results:

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	30 MHz ~1 GHz	Fig.50	P
		1 GHz ~ 3 GHz	Fig.51	P
		3 GHz ~ 18 GHz	Fig.52	P
	39	30 MHz ~1 GHz	Fig.53	P
		1 GHz ~ 3 GHz	Fig.54	P
		3 GHz ~ 18 GHz	Fig.55	P
	78	30 MHz ~1 GHz	Fig.56	P
		1 GHz ~ 3 GHz	Fig.57	P
		3 GHz ~ 18 GHz	Fig.58	P
π /4 DQPSK	0	30 MHz ~1 GHz	Fig.59	P
		1 GHz ~ 3 GHz	Fig.60	P
		3 GHz ~ 18 GHz	Fig.61	P
	39	30 MHz ~1 GHz	Fig.62	P
		1 GHz ~ 3 GHz	Fig.63	P
		3 GHz ~ 18 GHz	Fig.64	P
	78	30 MHz ~1 GHz	Fig.65	P
		1 GHz ~ 3 GHz	Fig.66	P
		3 GHz ~ 18 GHz	Fig.67	P
8DPSK	0	30 MHz ~1 GHz	Fig.68	P
		1 GHz ~ 3 GHz	Fig.69	P
		3 GHz ~ 18 GHz	Fig.70	P
	39	30 MHz ~1 GHz	Fig.71	P
		1 GHz ~ 3 GHz	Fig.72	P
		3 GHz ~ 18 GHz	Fig.73	P
	78	30 MHz ~1 GHz	Fig.74	P
		1 GHz ~ 3 GHz	Fig.75	P
		3 GHz ~ 18 GHz	Fig.76	P
/	All channels	18 GHz~ 26.5 GHz	Fig.77	P

GFSK CH0 (1-18GHz)

Frequency (MHz)	Peak (dBµV/m)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
2357.000000	36.5	V	180.0	1.7	17.4	53.9
3602.875000	41.0	V	90.0	3.8	12.9	53.9
7559.625000	37.0	V	90.0	6.9	16.9	53.9
9608.000000	39.8	V	180.0	9.1	14.1	53.9
13458.000000	42.4	H	180.0	11.4	11.5	53.9
16751.000000	48.6	V	90.0	14.3	5.3	53.9

GFSK CH39 (1-18GHz)

Frequency (MHz)	Peak (dBµV/m)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
2357.000000	35.9	V	0.0	1.7	18.0	53.9
3661.500000	37.3	V	0.0	3.8	16.6	53.9
7553.500000	36.5	H	0.0	6.9	17.4	53.9
9923.875000	39.0	H	180.0	9.3	14.9	53.9
13443.000000	41.7	H	90.0	11.4	12.2	53.9
16734.000000	47.6	V	90.0	14.3	6.3	53.9

GFSK CH78 (1-18GHz)

Frequency (MHz)	Peak (dBµV/m)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
2357.000000	36.0	V	180.0	1.7	17.9	53.9
3719.250000	35.0	V	0.0	4.1	18.9	53.9
7561.375000	36.6	H	0.0	7.0	17.3	53.9
10027.000000	39.2	V	180.0	9.4	14.7	53.9
12667.000000	41.6	H	180.0	11.2	12.3	53.9
16747.000000	47.2	H	0.0	14.3	6.7	53.9

π /4 DQPSK CH0 (1-18GHz)

Frequency (MHz)	Peak (dBμV/m)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
2357.000000	36.3	V	180.0	1.7	17.6	53.9
3602.875000	35.8	H	90.0	3.8	18.1	53.9
7551.750000	36.9	H	0.0	6.9	17.0	53.9
9918.625000	39.6	V	180.0	9.3	14.3	53.9
13449.000000	42.4	H	180.0	11.4	11.5	53.9
16760.000000	48.3	H	0.0	14.3	5.6	53.9

π /4 DQPSK CH39 (1-18GHz)

Frequency (MHz)	Peak (dBμV/m)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
2258.000000	36.4	H	0.0	1.6	17.5	53.9
3661.500000	36.9	V	90.0	3.8	17.0	53.9
7561.375000	36.5	H	0.0	7.0	17.4	53.9
10028.000000	39.1	V	180.0	9.4	14.8	53.9
13443.000000	41.9	H	90.0	11.4	12.0	53.9
16777.000000	47.6	H	90.0	14.3	6.3	53.9

π /4 DQPSK CH78 (1-18GHz)

Frequency (MHz)	Peak (dBμV/m)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
2258.000000	36.0	H	0.0	1.6	17.9	53.9
3720.125000	35.2	V	0.0	4.1	18.7	53.9
7556.125000	36.6	V	180.0	6.9	17.3	53.9
10027.000000	39.1	H	180.0	9.4	14.8	53.9
13448.000000	41.9	H	90.0	11.4	12.0	53.9
16750.000000	47.7	H	180.0	14.3	6.2	53.9

8DPSK CH0 (1-18GHz)

Frequency (MHz)	Peak (dBµV/m)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
2357.000000	36.2	V	0.0	1.7	17.7	53.9
3602.875000	38.1	V	90.0	3.8	15.8	53.9
7462.500000	36.9	V	0.0	6.9	17.0	53.9
9916.875000	39.5	V	0.0	9.3	14.4	53.9
13452.000000	42.3	H	180.0	11.4	11.6	53.9
16734.000000	48.2	H	180.0	14.3	5.7	53.9

8DPSK CH39 (1-18GHz)

Frequency (MHz)	Peak (dBµV/m)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
2357.000000	36.3	V	0.0	1.7	17.6	53.9
3660.625000	36.1	V	0.0	3.8	17.8	53.9
7558.750000	36.9	V	180.0	6.9	17.0	53.9
9883.625000	39.5	V	0.0	9.3	14.4	53.9
13449.000000	42.4	H	180.0	11.4	11.5	53.9
16748.000000	48.2	V	90.0	14.3	5.7	53.9

8DPSK CH78 (1-18GHz)

Frequency (MHz)	Peak (dBµV/m)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
2357.000000	36.0	V	180.0	1.7	17.9	53.9
3719.250000	35.5	V	90.0	4.1	18.4	53.9
7459.875000	36.8	H	90.0	6.9	17.1	53.9
9926.500000	39.4	V	180.0	9.3	14.5	53.9
13448.000000	42.1	V	180.0	11.4	11.8	53.9
16761.000000	48.2	H	90.0	14.3	5.7	53.9

See ANNEX C for test graphs.

Conclusion: Pass

B.5 Occupied 20dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	/

Measurement Result:

Mode	Channel	Occupied 20dB Bandwidth (MHz)		conclusion
GFSK	0	Fig.78	1.129	/
	39	Fig.79	1.129	
	78	Fig.80	1.129	
π /4 DQPSK	0	Fig.81	1.295	/
	39	Fig.82	1.303	
	78	Fig.83	1.288	
8DPSK	0	Fig.84	1.310	/
	39	Fig.85	1.324	
	78	Fig.86	1.310	

See ANNEX C for test graphs.

Conclusion: PASS

B.6 Time of Occupancy (Dwell Time)

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	< 400 ms

Measurement Results:

Mode	Channel	Packet	Dwell Time(ms)		Conclusion
GFSK	39	DH5	Fig.87	221.0	**P**
			Fig.88		
π /4 DQPSK	39	2-DH5	Fig.89	178.8	**P**
			Fig.90		
8DPSK	39	3-DH5	Fig.91	199.0	**P**
			Fig.92		

See ANNEX C for test graphs.

Conclusion: Pass

B.7 Number of Hopping Channels

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	At least 15 non-overlapping channels

Measurement Results:

Mode	Channel	Packet	Number of hopping channels		Test result	Conclusion
GFSK	39	DH5	Fig.93	Fig.94	79	**P**
π /4 DQPSK	39	2-DH5	Fig.95	Fig.96	79	**P**
8DPSK	39	3-DH5	Fig.97	Fig.98	79	**P**

See ANNEX C for test graphs.

Conclusion: Pass

B.8 Carrier Frequency Separation

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)	By a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater

Measurement Results:

Mode	Channel	Packet	Separation of hopping channels	Test result (MHz)	Conclusion
GFSK	39	DH5	Fig.99	1.006	P
π /4 DQPSK	39	2-DH5	Fig.100	1.006	P
8DPSK	39	3-DH5	Fig.101	1.006	P

See ANNEX C for test graphs.

Conclusion: Pass

B.9 AC Power line Conducted Emission

Test Condition:

Voltage（V）	Frequency（Hz）
120	60

Measurement Result and limit:

BT (Quasi-peak Limit)-AE2

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		Traffic	Idle	
0.15 to 0.5	66 to 56	Fig.102	Fig.103	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

BT (Average Limit)-AE2

Frequency range (MHz)	Average-peak Limit (dBμV)	Result (dBμV)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig.102	Fig.103	P
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

BT (Quasi-peak Limit)-AE3

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		Traffic	Idle	
0.15 to 0.5	67 to 56	Fig.104	Fig.105	P
0.5 to 5	56			
5 to 30	60			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

BT (Average Limit)-AE3

Frequency range (MHz)	Average-peak Limit (dBμV)	Result (dBμV)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig.104	Fig.105	P
0.5 to 5	46			
5 to 30	50			
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.				

Note: The measurement results include the L1 and N measurements.

See ANNEX C for test graphs.

Conclusion: Pass

ANNEX C: TEST FIGURE LIST

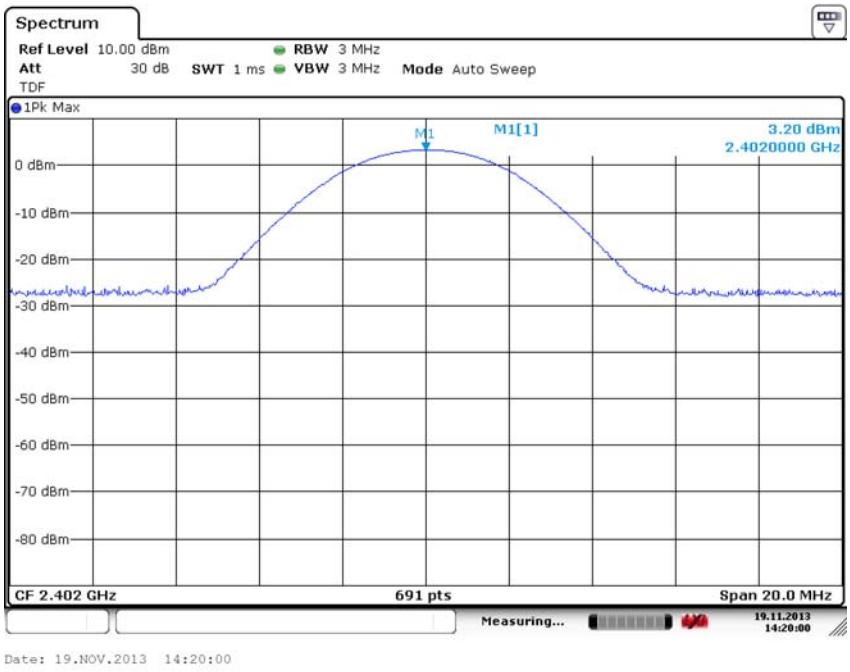

Fig. 1 Maximum Peak Output Power (GFSK, Ch 0, Hopping OFF)

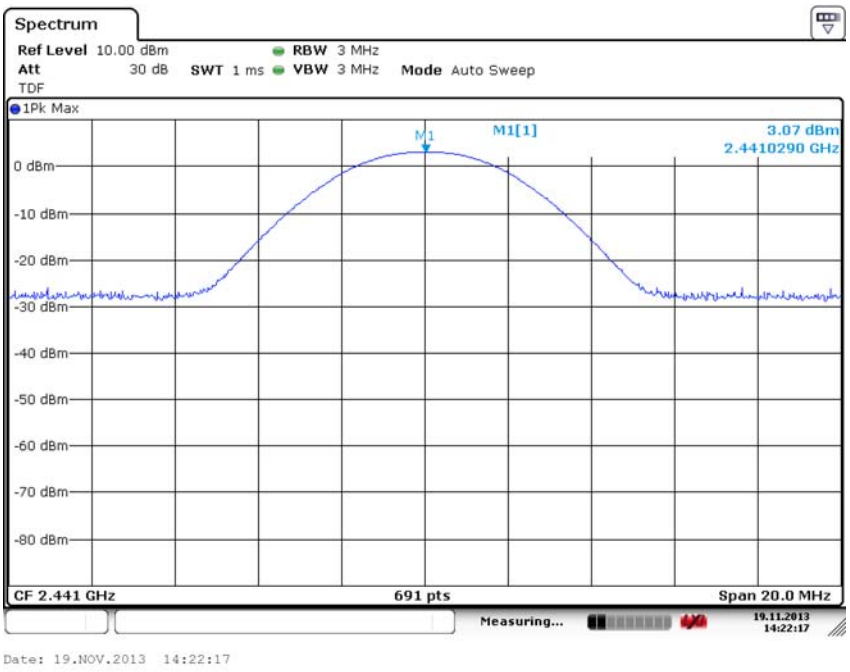

Fig. 2 Maximum Peak Output Power (GFSK, Ch 39, Hopping OFF)

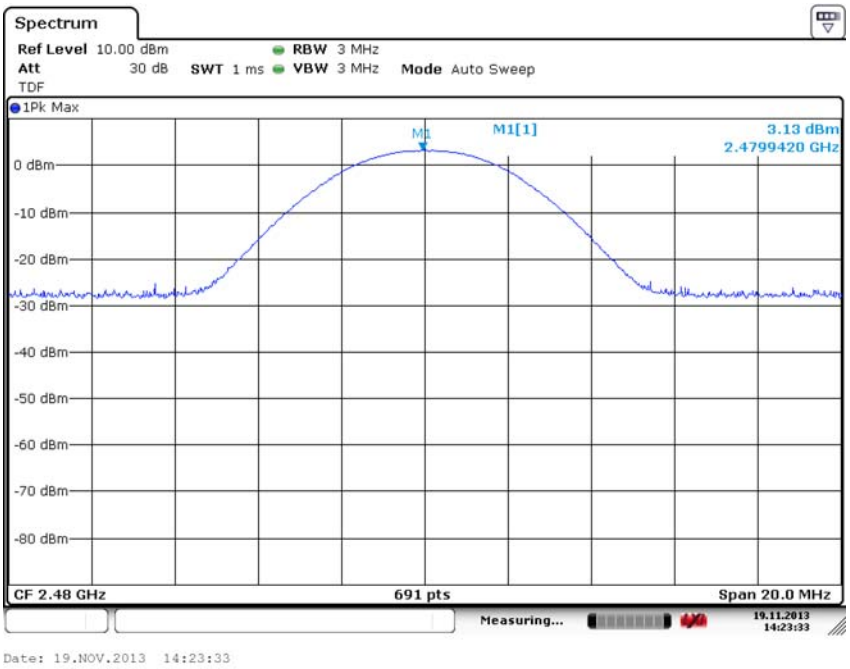

Fig. 3 Maximum Peak Output Power (GFSK, Ch 78, Hopping OFF)

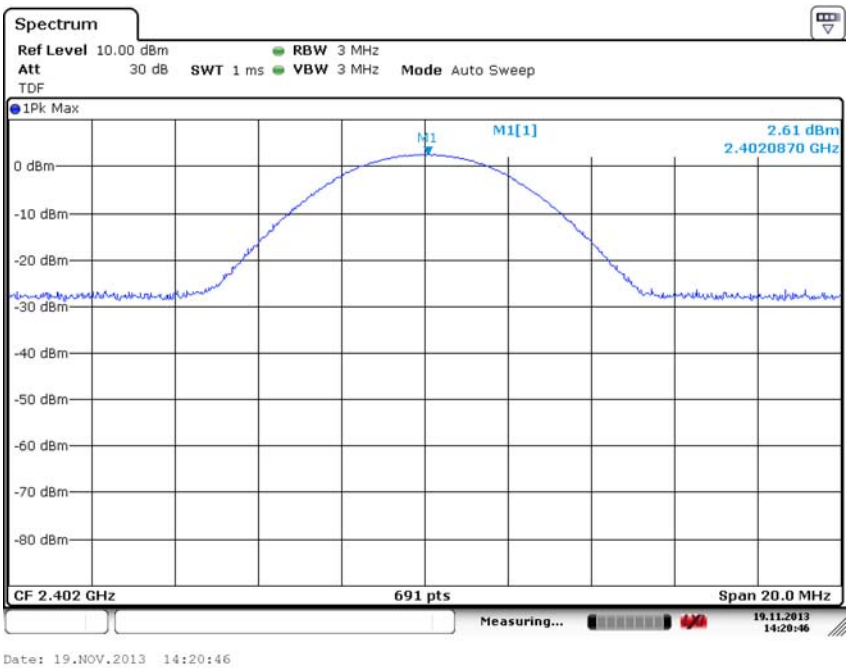

Fig. 4 Maximum Peak Output Power (π /4 DQPSK, Ch 0, Hopping OFF)

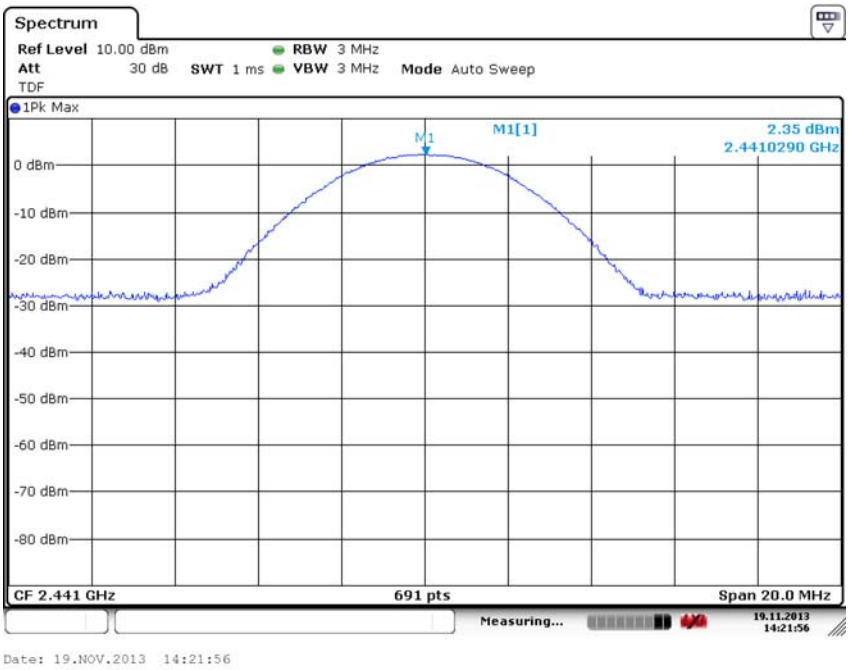

Fig. 5 Maximum Peak Output Power (π /4 DQPSK, Ch 39, Hopping OFF)

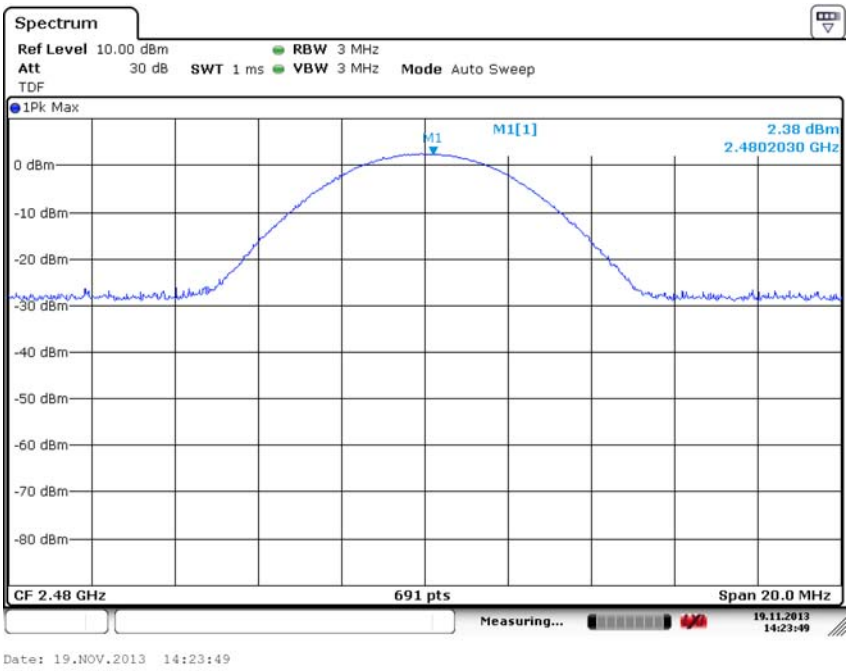

Fig. 6 Maximum Peak Output Power (π /4 DQPSK, Ch 78, Hopping OFF)

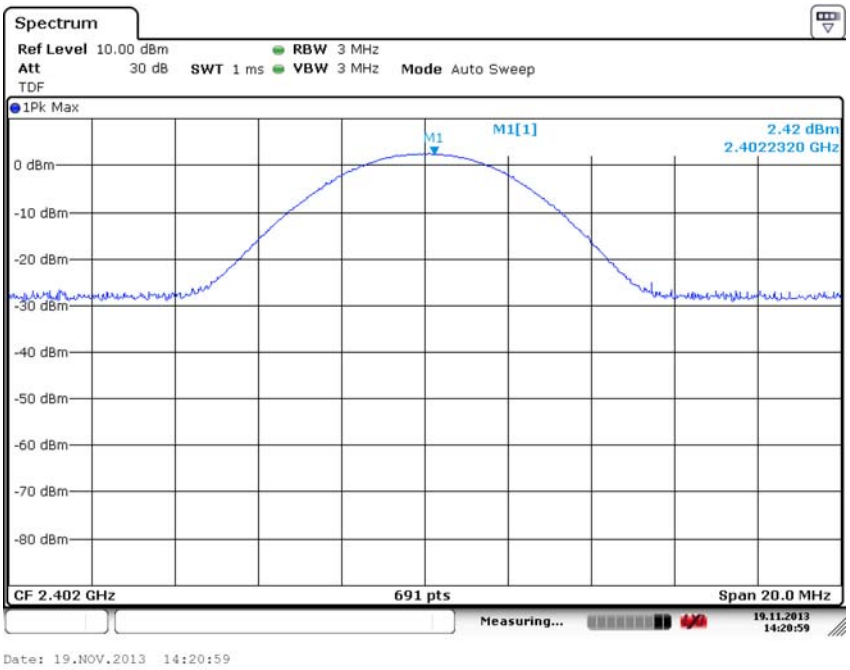

Fig. 7 Maximum Peak Output Power (8DPSK, Ch0, Hopping OFF)

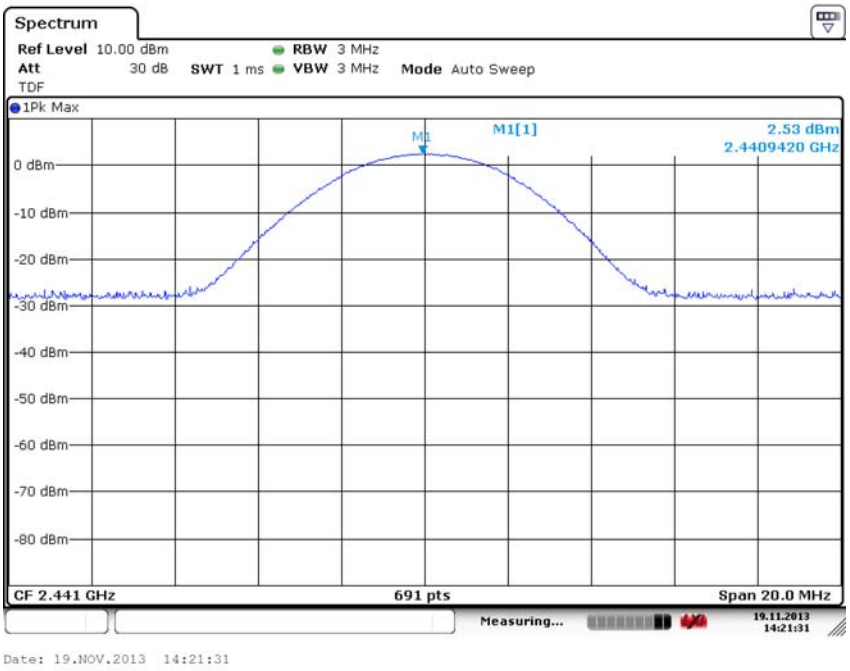

Fig. 8 Maximum Peak Output Power (8DPSK, Ch39, Hopping OFF)

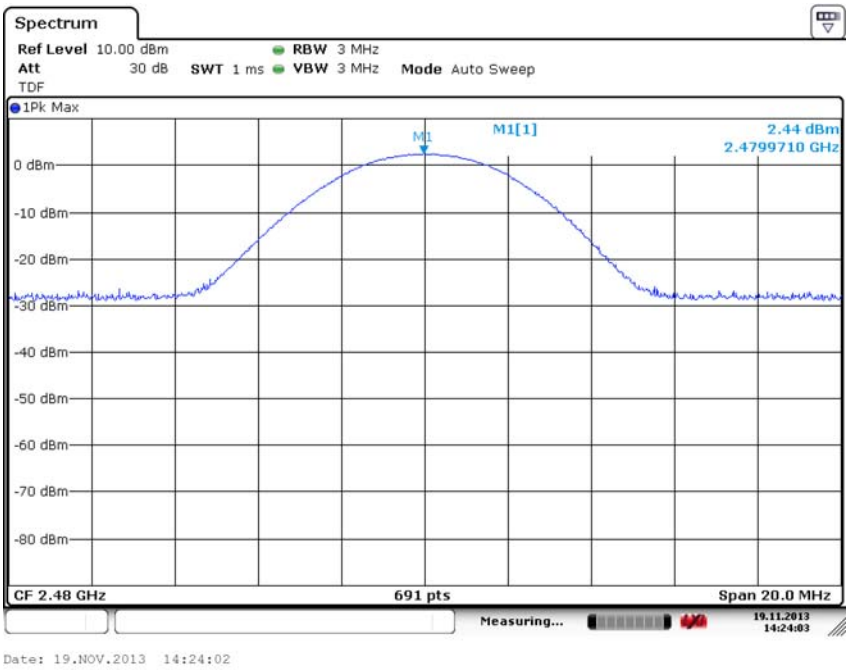

Fig. 9 Maximum Peak Output Power (8DPSK, Ch78, Hopping OFF)

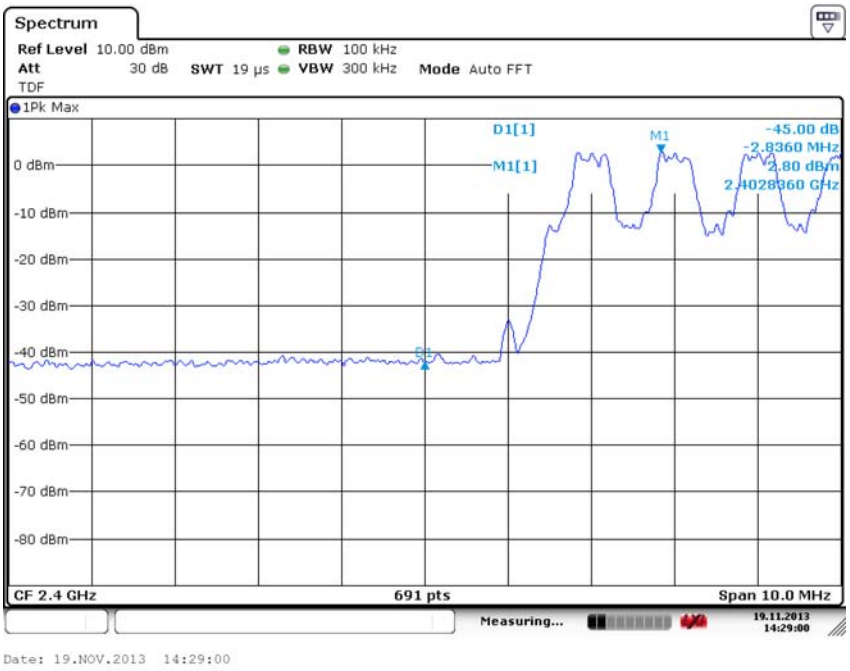

Fig. 10 Band Edges (GFSK, Ch 0, Hopping ON)

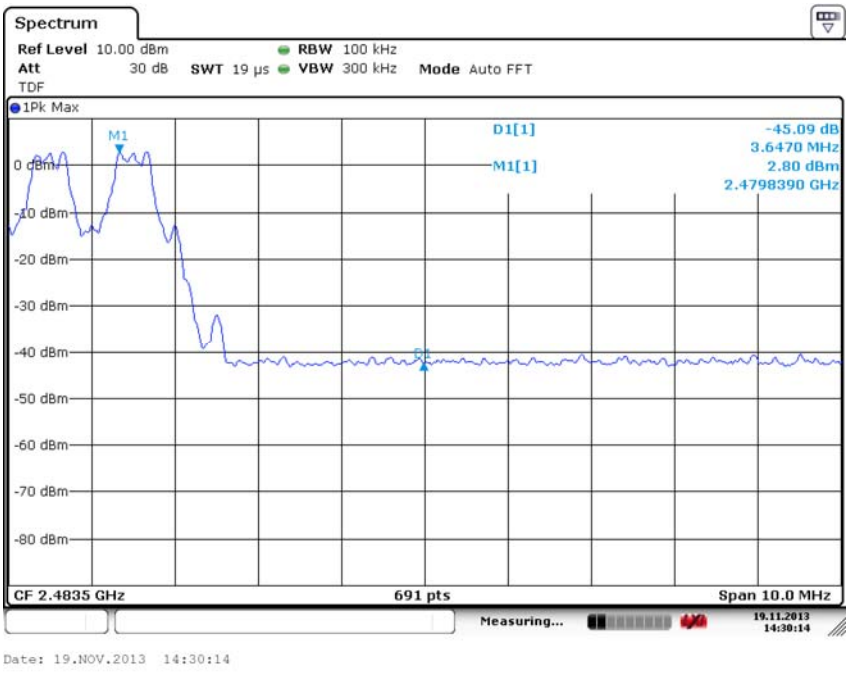

Fig. 11 Band Edges (GFSK, Ch 78, Hopping ON)

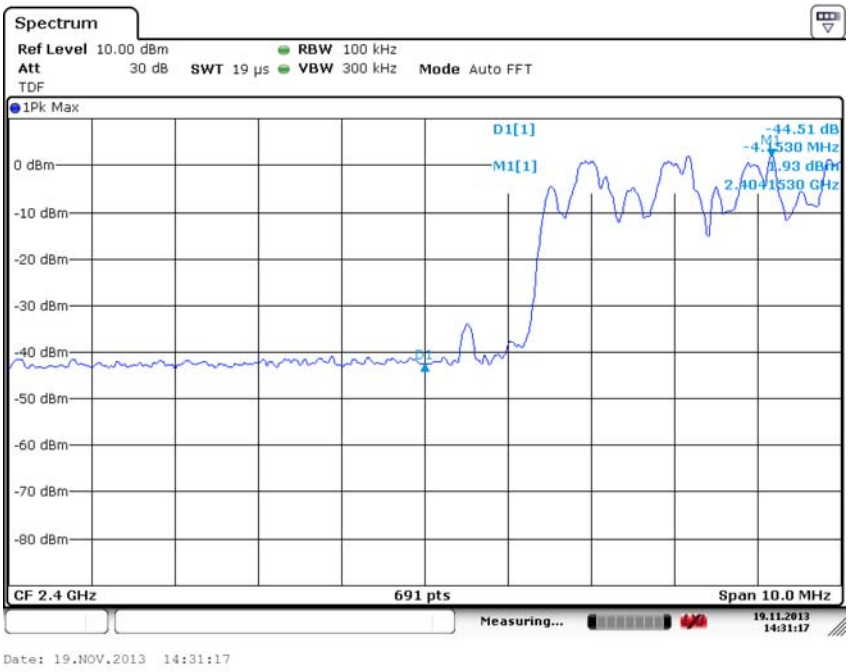

Fig. 12 Band Edges (π /4 DQPSK, Ch 0, Hopping ON)

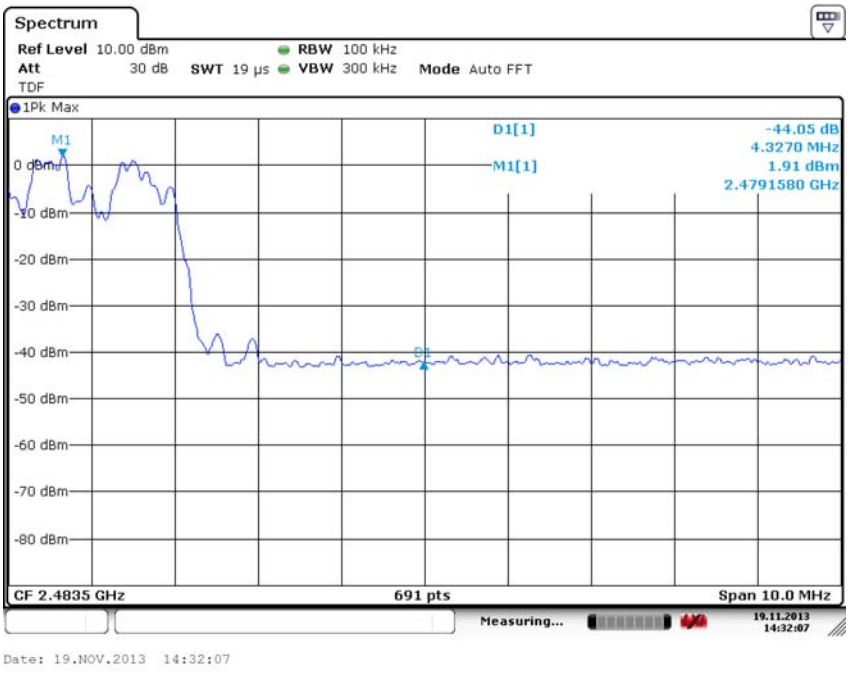

Fig. 13 Band Edges (π /4 DQPSK, Ch 78, Hopping ON)

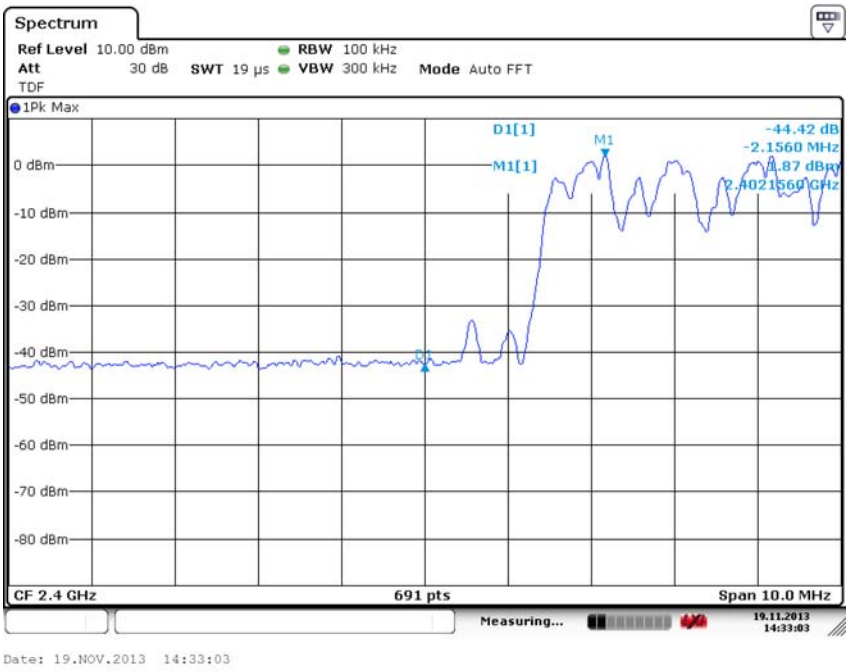

Fig. 14 Band Edges (8DPSK, Ch 0, Hopping ON)

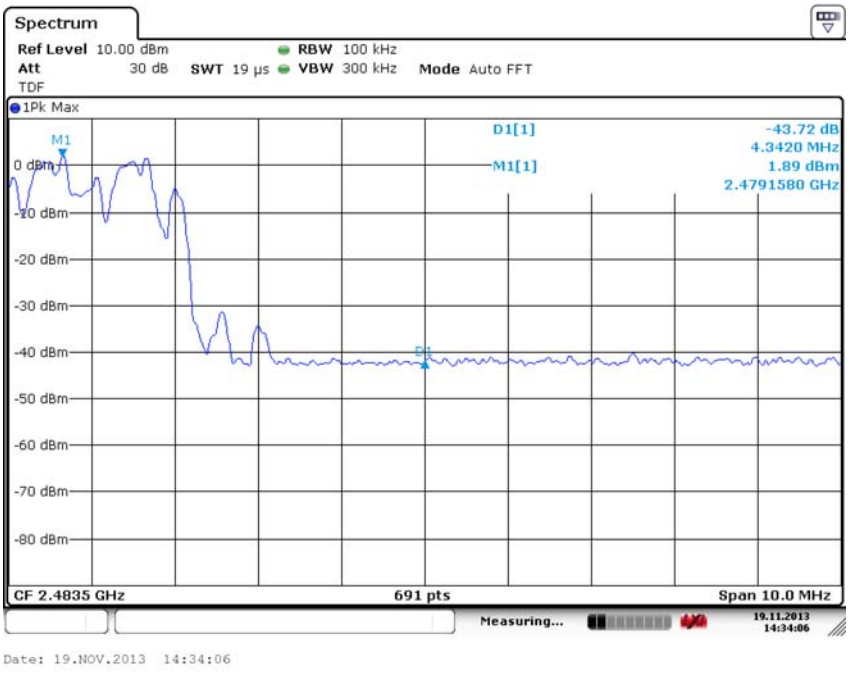

Fig. 15 Band Edges (8DPSK, Ch 78, Hopping ON)

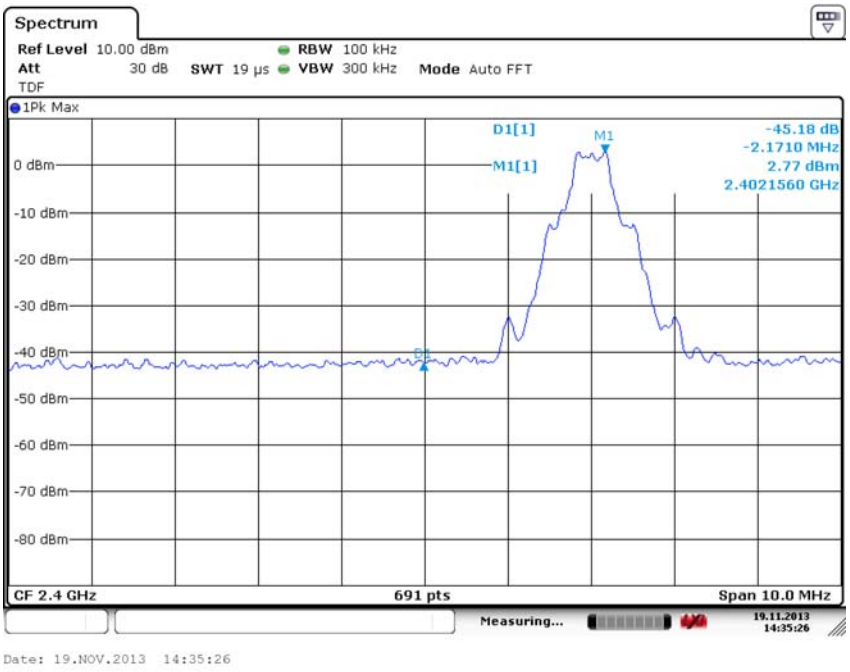

Fig. 16 Band Edges (GFSK, Ch 0, Hopping OFF)

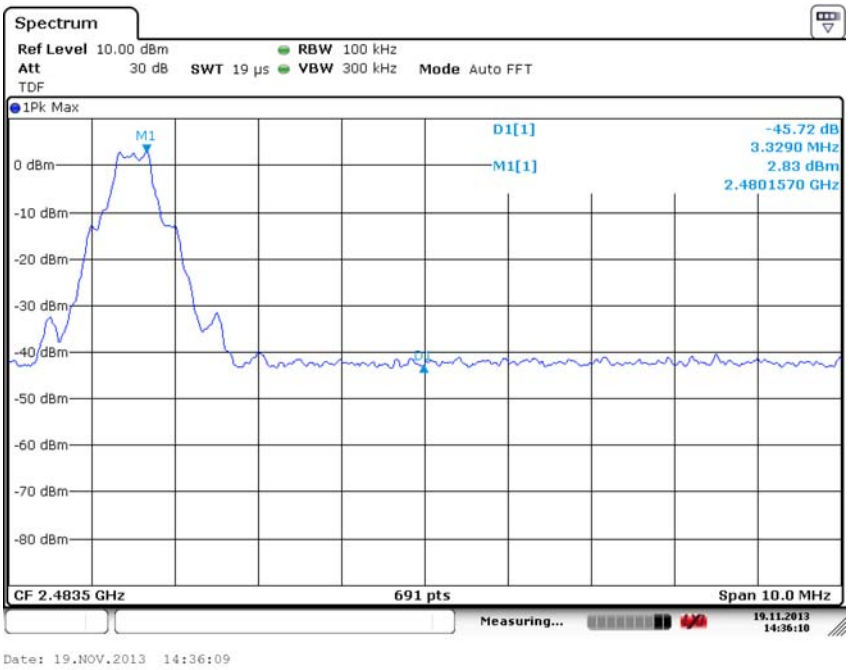

Fig. 17 Band Edges (GFSK, Ch 78, Hopping OFF)

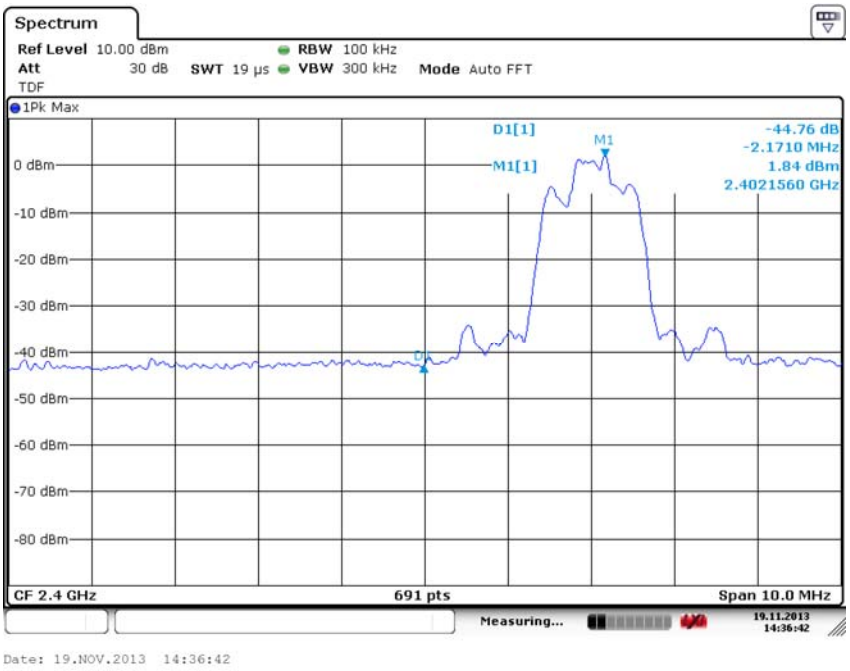

Fig. 18 Band Edges (π /4 DQPSK, Ch 0, Hopping OFF)

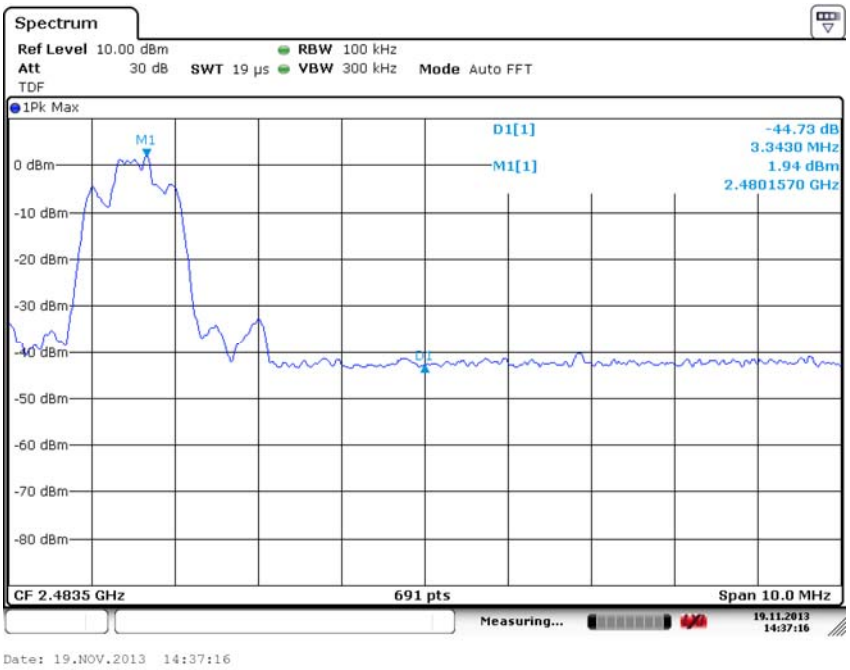

Fig. 19 Band Edges (π /4 DQPSK, Ch 78, Hopping OFF)

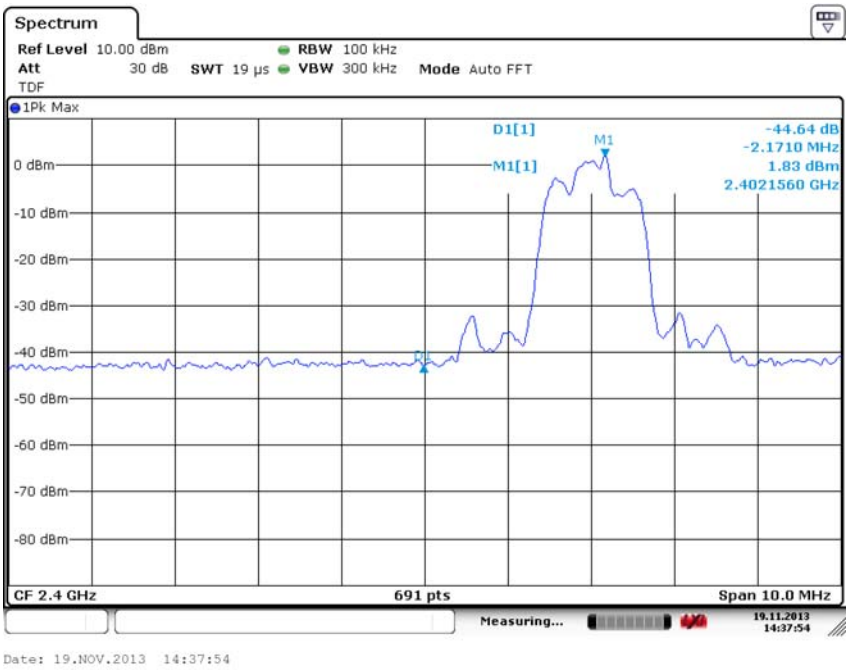

Fig. 20 Band Edges (8DPSK, Ch 0, Hopping OFF)

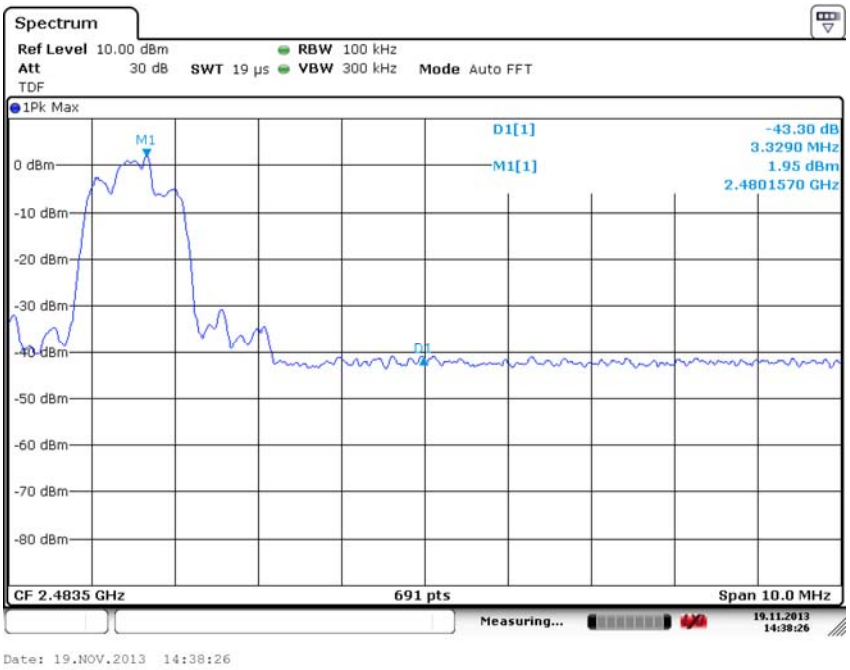

Fig. 21 Band Edges (8DPSK, Ch 78, Hopping OFF)

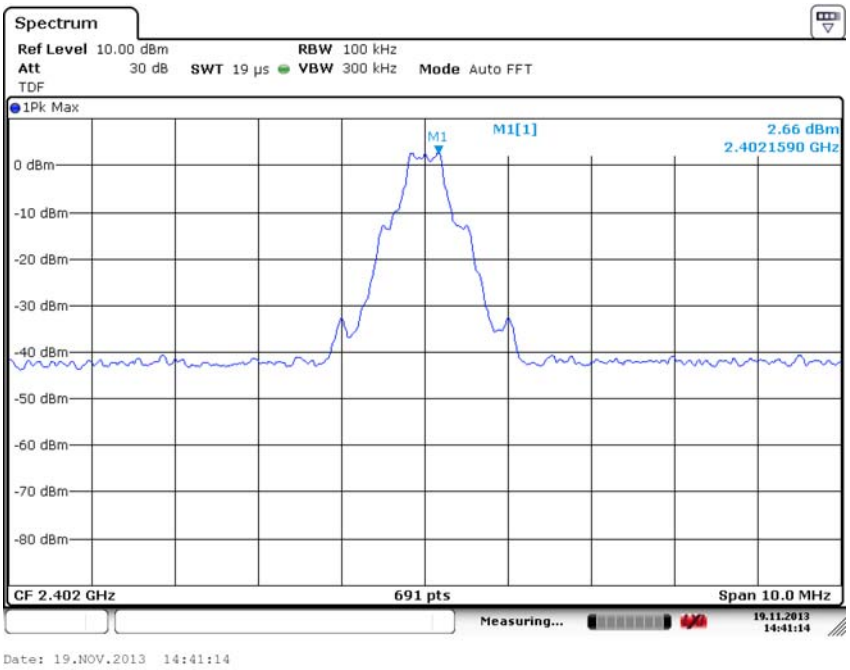

Fig. 22 Conducted Spurious Emission (GFSK, Ch0, 2.402GHz)

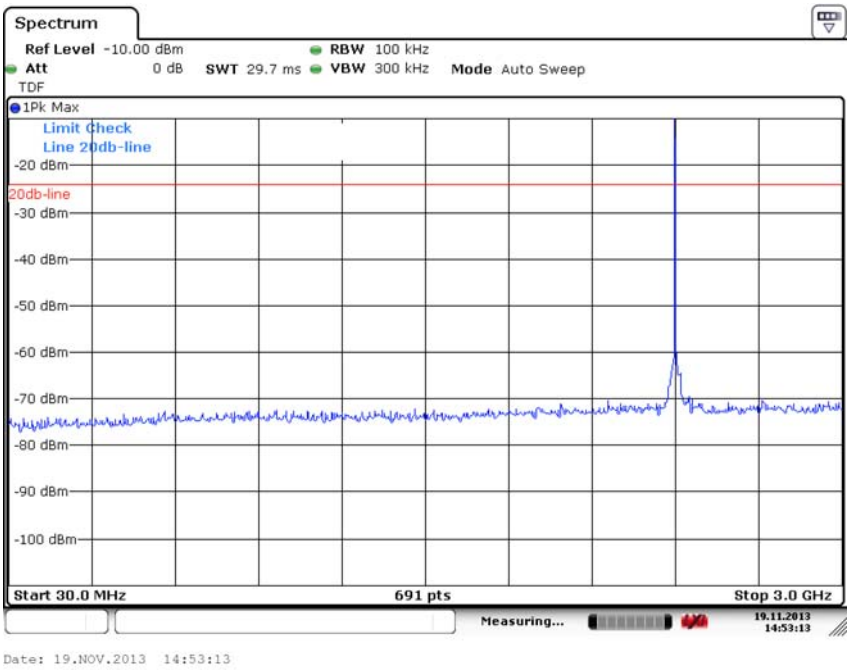

Fig. 23 Conducted Spurious Emission (GFSK, Ch0, 30 MHz-3 GHz)

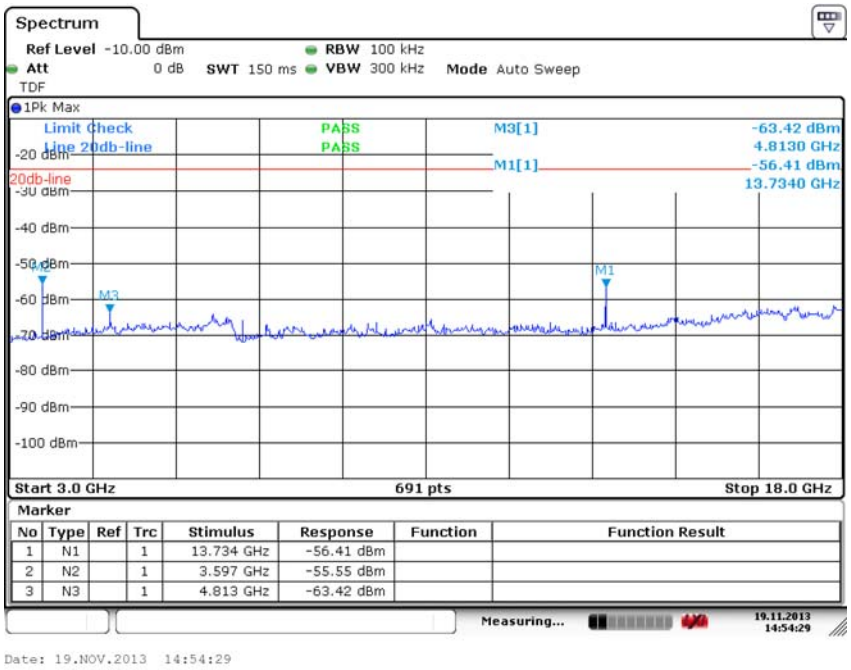

Fig. 24 Conducted Spurious Emission (GFSK, Ch0, 3GHz-18 GHz)

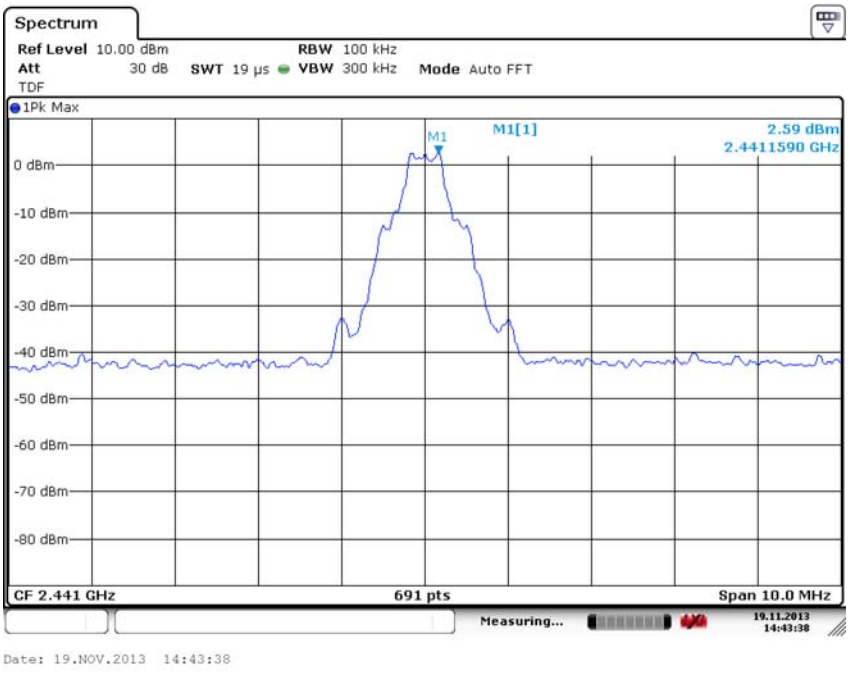

Fig. 25 Conducted Spurious Emission (GFSK, Ch39, 2.441GHz)

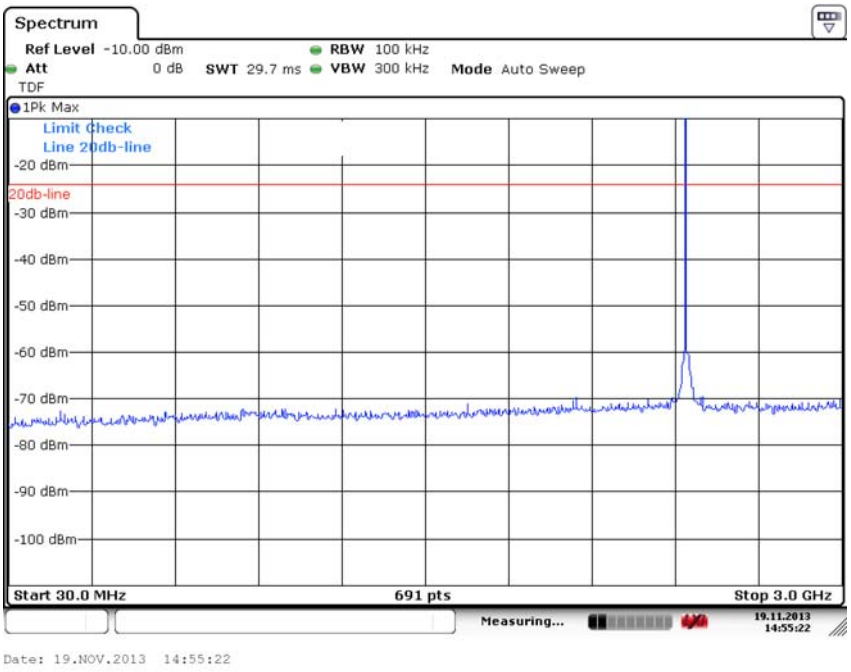

Fig. 26 Conducted Spurious Emission (GFSK, Ch39, 30 MHz-3 GHz)