



TEST REPORT

No. 2008TAR031

for

Shenzhen Sang Fei Consumer Communications Co., Ltd.

GSM/GPRS 900/1800/1900 digital mobile phone

Type: Philips X600

with

Hardware Version: PR1

Software Version: C6133_PR1_V10_080620CN

Issued Date: Jul 29th, 2008



No. DAT-P-114/01-01

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of Ministry of Information Industry

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100083.

Tel:+86(0)10-62303288-2105, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

| | |
|--|-----------|
| 1. TEST LABORATORY..... | 3 |
| 1.1. TESTING LOCATION..... | 3 |
| 1.2. TESTING ENVIRONMENT..... | 3 |
| 1.3. PROJECT DATA..... | 3 |
| 1.4. SIGNATURE..... | 3 |
| 2. CLIENT INFORMATION..... | 4 |
| 2.1. APPLICANT INFORMATION..... | 4 |
| 2.2. MANUFACTURER INFORMATION..... | 4 |
| 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)..... | 5 |
| 3.1. ABOUT EUT..... | 5 |
| 3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST..... | 5 |
| 4. REFERENCE DOCUMENTS..... | 5 |
| 4.1. REFERENCE DOCUMENTS FOR TESTING..... | 5 |
| 5. LABORATORY ENVIRONMENT..... | 5 |
| 6. SUMMARY OF TEST RESULTS..... | 6 |
| 7. TEST EQUIPMENTS UTILIZED..... | 6 |
| ANNEX A: EUT PHOTOGRAPH..... | 8 |
| ANNEX B: MEASUREMENT RESULTS..... | 15 |
| ANNEX C: TEST LAYOUT..... | 19 |

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MII
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China
Postal Code: 100083
Telephone: 00861062303288
Fax: 00861062304793

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data


Testing Start Date: Jun 25th, 2008
Testing End Date: Jun 25th, 2008

1.4. Signature




Zi Xiaogang

(Prepared this test report)



Sun xiangqian

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Shenzhen Sang Fei Consumer Communications Co., Ltd.
Address /Post: 11 Science and Technology Road, Shenzhen Hi-tech Industrial Park
Nanshan District, Shenzhen, PRC
City: Shenzhen
Postal Code: 518057
Country: China
Telephone: 0086-755-26633217
Fax: 0086-755-26635272

2.2. Manufacturer Information

Company Name: Shenzhen Sang Fei Consumer Communications Co., Ltd.
Address /Post: 11 Science and Technology Road, Shenzhen Hi-tech Industrial Park
Nanshan District, Shenzhen, PRC
City: Shenzhen
Postal Code: 518057
Country: China
Telephone: 0086-755-26633217
Fax: 0086-755-26635272

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

| | |
|-----------------|---|
| Description | GSM/GPRS 900/1800/1900 digital mobile phone |
| Model | Philips X600 |
| FCC ID | VQRCTX600 |
| Hardware status | PR1 |
| Software status | C6133_PR1_V10_080620CN |
| Power supply | Battery or Charger (AC Adaptor) |

Note: Photographs of EUT are shown in ANNEX A of this test report. Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

3.2. Internal Identification of EUT used during the test

| EUT ID* | SN or IMEI | HW Version | SW Version |
|----------------|-------------------|-------------------|------------------------|
| EUT1 | 355202020001650 | PR1 | C6133_PR1_V10_080620CN |

*EUT ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference | Title | Version |
|------------------------|--|----------------|
| FCC Part 15, Subpart B | Radio frequency devices | V 10.1.07 |
| ANSI C63.4 | Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz | 2003 |

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

| | |
|-----------------------------------|---|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. = 30 %, Max. = 60 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 10 kΩ |
| Ground system resistance | < 0.5 Ω |
| Normalised site attenuation (NSA) | < ±3.2 dB, 10 m distance, from 30 to 1000 MHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 2000 MHz |

Control room did not exceed following limits along the EMC testing:

| | |
|--------------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. =30 %, Max. = 60 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 10 kΩ |
| Ground system resistance | < 0.5 Ω |

Conducted chamber did not exceed following limits along the EMC testing:

| | |
|--------------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. = 30 %, Max. = 60 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 10 kΩ |
| Ground system resistance | < 0.5 Ω |

Fully-anechoic chamber (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

| | |
|------------------------------|---|
| Temperature | Min. = 15 °C, Max. = 30 °C |
| Relative humidity | Min. = 30 %, Max. = 60 % |
| Shielding effectiveness | > 110 dB |
| Electrical insulation | > 10 kΩ |
| Ground system resistance | < 0.5 Ω |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 2000 MHz |

6. SUMMARY OF TEST RESULTS

| | |
|---|----------------|
| Abbreviations used in this clause: | |
| P | Pass |
| NA | Not applicable |
| F | Fail |

| Clause | List | Clause in FCC rules | Verdict |
|--------|--------------------|---------------------|---------|
| 1 | Radiated Emission | 15.109(a) | P |
| 2 | Conducted Emission | 15.107(a) | P |

7. Test Equipments Utilized

| NO. | Description | TYPE | SERIES NUMBER | MANUFACTURER | CAL DUE DATE |
|-----|------------------|---------|---------------|--------------|--------------|
| 1 | Test Receiver | ESS | 847151/015 | R&S | 2008-10-30 |
| 2 | Test Receiver | ESI40 | 831564/002 | R&S | 2009-2-11 |
| 3 | BiLog Antenna | 3142B | 9908-1403 | EMCO | 2009-1-16 |
| 4 | BiLog Antenna | VUL9163 | 9163 175 | Schwarzbeck | 2009-9-19 |
| 5 | Signal Generator | SMT06 | 831285/005 | R&S | 2008-12-26 |

| | | | | | |
|----|--|---------|------------|-------|-----------|
| 6 | Signal Generator | SMP04 | 100070 | R&S | 2009-4-20 |
| 7 | LISN | ESH2-Z5 | 829991/012 | R&S | 2008-8-13 |
| 8 | Spectrum Analyzer | FSU26 | 200030 | R&S | 2009-6-18 |
| 9 | Universal Radio Communication Tester | CMU200 | 100680 | R&S | 2008-8-23 |
| 10 | Dual-Ridge Waveguide Horn Antenna | 3115 | 9906-5827 | EMCO | 2009-3 |
| 11 | Dual-Ridge Waveguide Horn Antenna | 3116 | 2663 | EMCO | 2009-3 |
| 12 | Dual-Ridge Waveguide Horn Antenna | 3116 | 2661 | EMCO | 2009-3 |
| 13 | Climatic chamber | SH-241 | 92003546 | ESPEC | 2009-5-15 |

ANNEX A: EUT photograph

External Photo



Mobile Phone




Mobile Phone



Mobile Phone



Charger (AC/DC Adapter)

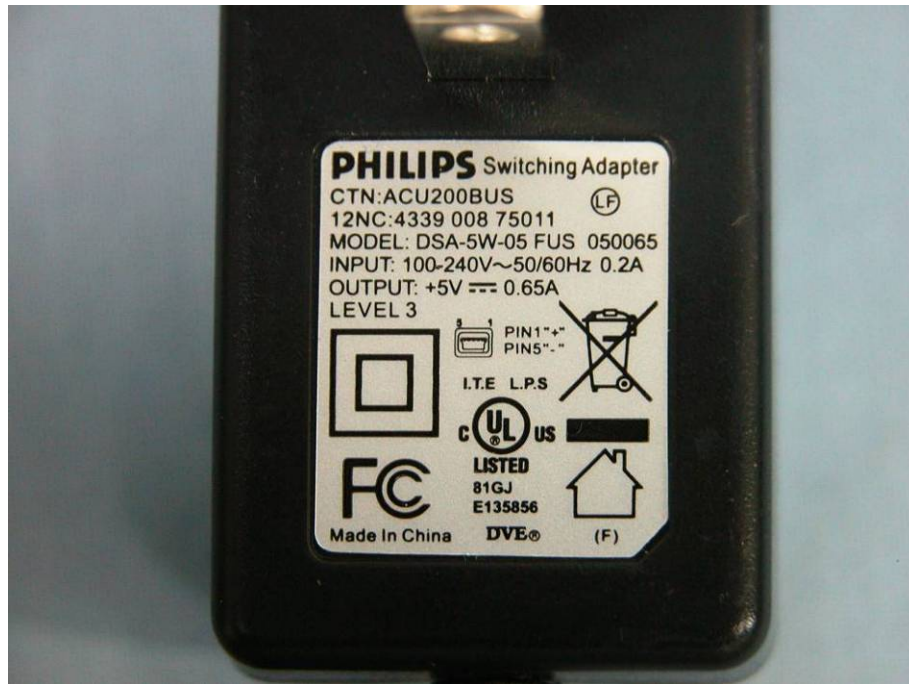

Label of Charger (AC/DC Adapter)



Battery



Battery

Internal Photo




Mobile phone Disassembly




Mobile phone Disassembly



Mobile phone Disassembly

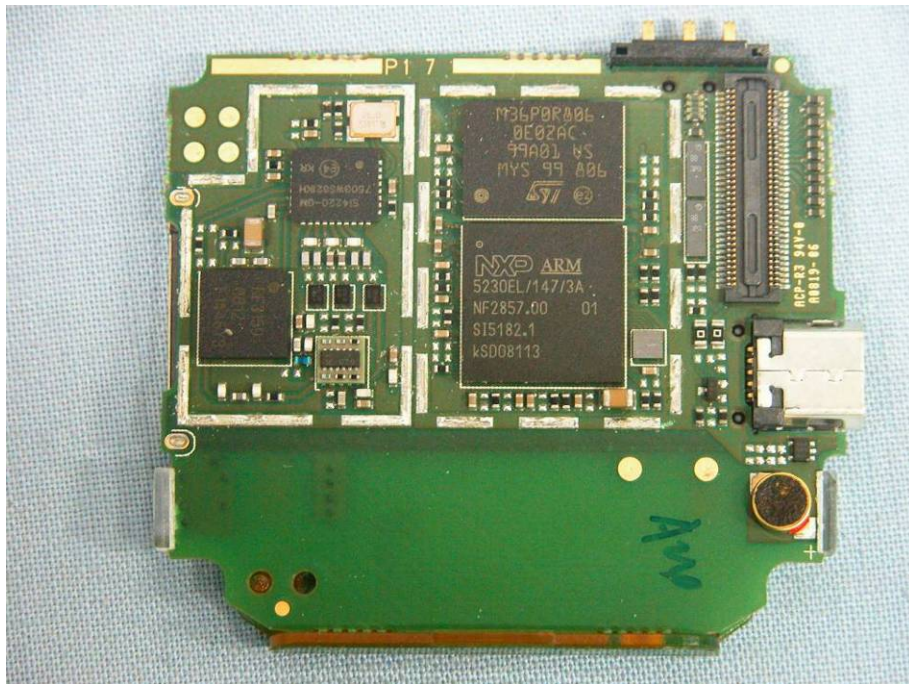

Mobile phone Disassembly

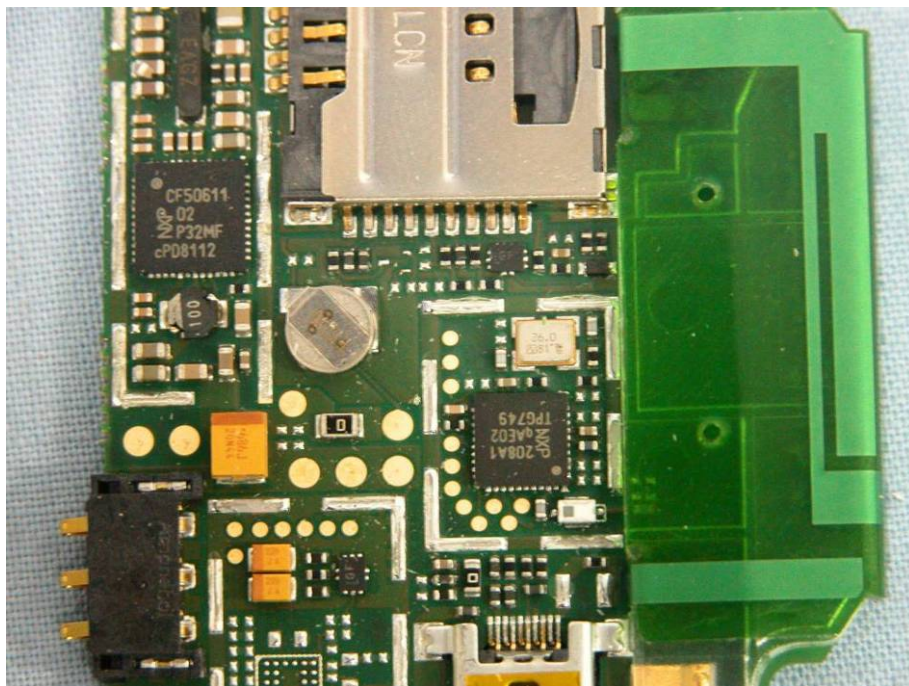

Mobile phone Disassembly



Mobile phone Disassembly



Mobile phone Disassembly

ANNEX B: MEASUREMENT RESULTS

B.1 Radiated Emission (§15.109(a))

B.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2003, section 8.3. The test set-up please refers to Annex C.1.

B.1.2 EUT Operating Mode:

The MS is operating in the USB mode. During the test MS is connected to a laptop via a USB cable. The model of the laptop is IBM T42 2373-M6C, and the serial number of the laptop is 99-FV6P2. The software is used to let the laptop keep on copying data to MS, reading and erasing the data after copy action was finished.

B.1.3 Measurement Limit

| Frequency of emission (MHz) | Field strength (microvolts/meter) |
|-----------------------------|-----------------------------------|
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above 960 | 500 |

B.1.4 Measurement Results

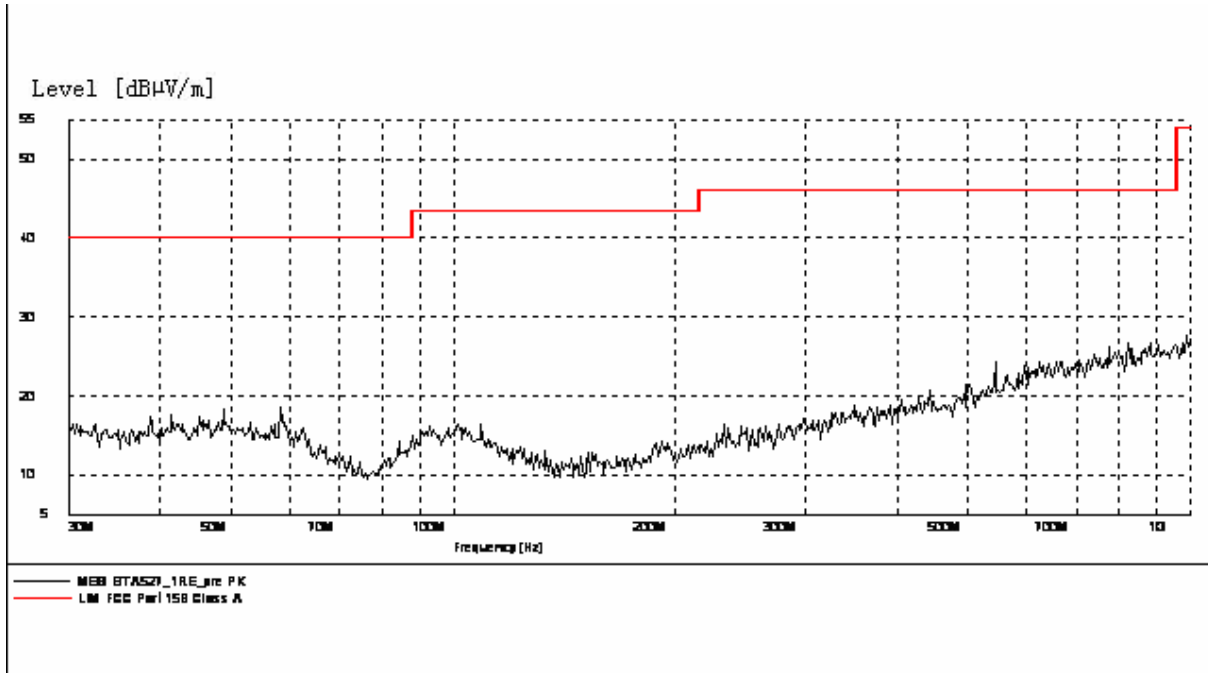


Figure B.1 Radiated Emission from 30MHz to 1GHz

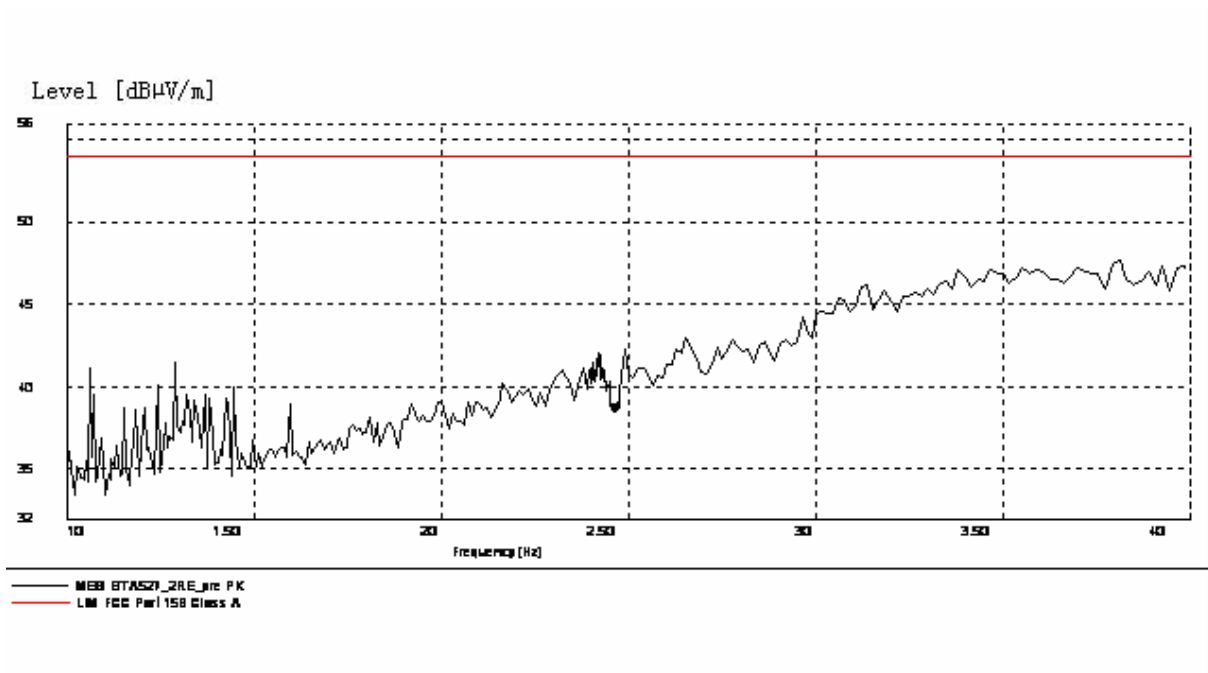


Figure B.2 Radiated Emission from 1GHz to 4GHz

B.2 Conducted Emission (§15.107(a))

B.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2003, section 7.2. The test set-up please refers to Annex C.2.

B.2.2 EUT Operating Mode:

The MS is operating in the USB mode. During the test MS is connected to a laptop via a USB cable. The model of the laptop is IBM T42 2373-M6C, and the serial number of the laptop is 99-FV6P2. The software is used to let the laptop keep on copying data to MS, reading and erasing the data after copy action was finished.

B.2.3 Measurement Limit

| Frequency of emission (MHz) | Conducted limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency

B.2.4 Measurement Results

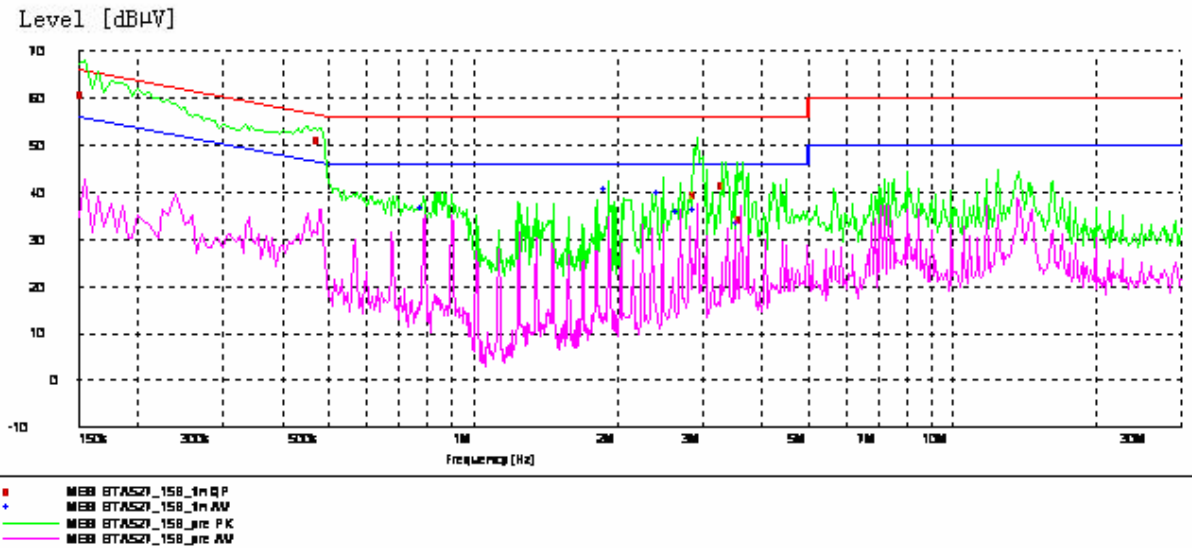


Figure B.3 Conducted Emission

MEASUREMENT RESULT: "8TA527_15B_fin QP"

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Line | PE |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.155000 | 60.70 | 10.1 | 66 | 5.0 | N | FLO |
| 0.480000 | 51.00 | 10.1 | 56 | 5.4 | L1 | FLO |
| 2.931808 | 39.70 | 10.1 | 56 | 16.4 | L1 | FLO |
| 3.357102 | 41.70 | 10.1 | 56 | 14.3 | N | GND |
| 3.635548 | 34.10 | 10.1 | 56 | 21.9 | L1 | GND |

MEASUREMENT RESULT: "8TA527_15B_fin AV"

| Frequency MHz | Level dBµV | Transd dB | Limit dBµV | Margin dB | Line | PE |
|---------------|------------|-----------|------------|-----------|------|-----|
| 0.790000 | 36.60 | 10.1 | 46 | 9.4 | L1 | GND |
| 1.915000 | 40.90 | 10.1 | 46 | 5.1 | L1 | GND |
| 2.480072 | 40.10 | 10.1 | 46 | 5.9 | L1 | GND |
| 2.707262 | 35.90 | 10.1 | 46 | 10.1 | L1 | GND |
| 2.931808 | 36.40 | 10.1 | 46 | 9.6 | L1 | GND |
| 3.606695 | 33.40 | 10.1 | 46 | 12.6 | N | GND |

ANNEX C: TEST LAYOUT



Pic C-1 Conducted Emission



Pic C-2 Radiated Spurious Emission

*****END OF REPORT*****