

January 21, 2020

Amimon  
26 Zarhin St, POBox 2308  
Raanana, 4366250, Israel

Dear Gabi Nocham,

Enclosed is the EMC Wireless test report for compliance testing of the Amimon, AMN41012 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15.407, Subpart E (UNII 2).

Thank you for using the services of Eurofins MET Labs, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
EUROFINS MET LABS, INC



Joel Huna  
Technical Writer

Reference: (\Amimon\EMC101258B-FCC407 UNII 2 Rev. 5)

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins MET Labs, Inc. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.



## **Electromagnetic Compatibility Criteria Test Report**

for the

**Amimon  
Model AMN41012**

**Tested under**  
the FCC Certification Rules  
contained in  
Title 47 of the CFR  
15.407 Subpart E

**MET Report: EMC101258B-FCC407 UNII 2 Rev. 5**

January 9, 2020

**Prepared For:**

**Amimon  
26 Zarhin St, POBox 2308  
Raanana, 4366250, Israel**

**Prepared By:**  
**Eurofins MET Labs, Inc**  
914 West Patapsco Avenue,  
Baltimore, MD 21230

## Electromagnetic Compatibility Criteria Test Report

for the

**Amimon  
Model AMN41012**

**Tested under**  
The FCC Certification Rules  
contained in  
Title 47 of the CFR  
15.407 Subpart E



Donald Salguero, Project Engineer  
Electromagnetic Compatibility Lab



Joel Huna  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of 15.407 of the FCC Rules under normal use and maintenance.



Benjamin Taylor,  
Wireless Manager, Electromagnetic Compatibility Lab

## Report Status Sheet

| Revision | Report Date        | Reason for Revision                |
|----------|--------------------|------------------------------------|
| Ø        | April 10, 2019     | Initial Issue.                     |
| 1        | June 7, 2019       | Updated Occupied Bandwidth Section |
| 2        | September 16, 2019 | TCB Comments                       |
| 3        | December 16, 2019  | TCB Comments                       |
| 4        | January 9, 2020    | TCB Comments – Duty Cycle          |
| 5        | January 21, 2020   | TCB Comments                       |

## Table of Contents

|             |                                                                               |            |
|-------------|-------------------------------------------------------------------------------|------------|
| <b>I.</b>   | <b>Executive Summary .....</b>                                                | <b>1</b>   |
|             | A. Purpose of Test .....                                                      | 2          |
|             | B. Executive Summary .....                                                    | 2          |
| <b>II.</b>  | <b>Equipment Configuration .....</b>                                          | <b>3</b>   |
|             | A. Overview .....                                                             | 4          |
|             | B. References .....                                                           | 5          |
|             | C. Test Site .....                                                            | 5          |
|             | D. Measurement Uncertainty .....                                              | 5          |
|             | E. Description of Test Sample .....                                           | 5          |
|             | F. Equipment Configuration .....                                              | 6          |
|             | G. Support Equipment .....                                                    | 7          |
|             | H. Ports and Cabling Information .....                                        | 7          |
|             | I. Mode of Operation .....                                                    | 8          |
|             | J. Method of Monitoring EUT Operation .....                                   | 8          |
|             | K. Modifications .....                                                        | 8          |
|             | a) Modifications to EUT .....                                                 | 8          |
|             | b) Modifications to Test Standard .....                                       | 8          |
|             | L. Disposition of EUT .....                                                   | 8          |
| <b>III.</b> | <b>Electromagnetic Compatibility Criteria for Intentional Radiators .....</b> | <b>9</b>   |
|             | §15.203 Antenna Requirement .....                                             | 10         |
|             | §15.403(i) 26 dB Bandwidth .....                                              | 11         |
|             | Duty Cycle .....                                                              | 15         |
|             | §15.407(a)(2) Maximum Conducted Output Power .....                            | 16         |
|             | §15.407(a)(2) Maximum Power Spectral Density .....                            | 48         |
|             | §15.407(b)(2 – 3) & (6 – 7) Undesirable Emissions .....                       | 67         |
|             | §15.407(b)(6) Conducted Emissions .....                                       | 104        |
|             | § 15.407 (f) Maximum Permissible Exposure .....                               | 106        |
| <b>IV.</b>  | <b>Test Equipment .....</b>                                                   | <b>107</b> |
| <b>V.</b>   | <b>Certification &amp; User’s Manual Information .....</b>                    | <b>109</b> |
|             | A. Certification Information .....                                            | 110        |
|             | B. Label and User’s Manual Information .....                                  | 114        |

## List of Tables

|                                                                                               |     |
|-----------------------------------------------------------------------------------------------|-----|
| Table 1. Executive Summary of EMC Part 15.407 Compliance Testing .....                        | 2   |
| Table 2. EUT Summary.....                                                                     | 4   |
| Table 3. References .....                                                                     | 5   |
| Table 4. Uncertainty Calculations Summary.....                                                | 5   |
| Table 5. Equipment Configuration .....                                                        | 6   |
| Table 6. Support Equipment.....                                                               | 7   |
| Table 7. Ports and Cabling Information .....                                                  | 7   |
| Table 8. Antenna List .....                                                                   | 10  |
| Table 9. Occupied Bandwidth, Test Results.....                                                | 12  |
| Table 10. Conducted Power, MIMO 2x2 - 2dBi Configuration, Test Results .....                  | 17  |
| Table 11. Conducted Power, MIMO 2x2 - 5dBi Configuration, Test Results .....                  | 17  |
| Table 12. TPC, MIMO 2x2 - 5dBi Configuration, Test Results .....                              | 17  |
| Table 13. Conducted Power, MIMO 4x4 - 2dBi Configuration, Test Results .....                  | 18  |
| Table 14. Conducted Power, MIMO 4x4 - 5dBi Configuration, Test Results .....                  | 18  |
| Table 15. TPC, MIMO 4x4 - 5dBi Configuration, Test Results .....                              | 18  |
| Table 16. Conducted Power Spectral Density, MIMO 2x2 - 2dBi Configuration, Test Results ..... | 48  |
| Table 17. Conducted Power Spectral Density, MIMO 2x2 - 5dBi Configuration, Test Results ..... | 49  |
| Table 18. Conducted Power Spectral Density, MIMO 4x4 - 2dBi Configuration, Test Results ..... | 49  |
| Table 19. Conducted Power Spectral Density, MIMO 4x4 - 5dBi Configuration, Test Results ..... | 49  |
| Table 20. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....       | 104 |
| Table 21. Test Equipment List .....                                                           | 108 |

## List of Figures

|                                                    |   |
|----------------------------------------------------|---|
| Figure 1. Block Diagram of Test Configuration..... | 6 |
|----------------------------------------------------|---|

## List of Plots

|                                                          |    |
|----------------------------------------------------------|----|
| Plot 1. 26 dB Occupied Bandwidth, 40M, 5270 MHz.....     | 13 |
| Plot 2. 26 dB Occupied Bandwidth, 40M, 5310 MHz.....     | 13 |
| Plot 3. 26 dB Occupied Bandwidth, 40M, 5510 MHz.....     | 13 |
| Plot 4. 26 dB Occupied Bandwidth, 40M, 5550 MHz.....     | 14 |
| Plot 5. 26 dB Occupied Bandwidth, 40M, 5670 MHz.....     | 14 |
| Plot 6. 26 dB Occupied Bandwidth, 40M, 5710 MHz.....     | 14 |
| Plot 7. Duty Cycle .....                                 | 15 |
| Plot 8. Output Power, 2dBi, 2x2, 5270MHz c1.....         | 19 |
| Plot 9. Output Power, 2dBi, 2x2, 5270MHz c2.....         | 19 |
| Plot 10. Output Power, 2dBi, 2x2, 5310MHz c1.....        | 19 |
| Plot 11. Output Power, 2dBi, 2x2, 5310MHz c2.....        | 20 |
| Plot 12. Output Power, 5dBi, 2x2, 5270MHz c1.....        | 20 |
| Plot 13. Output Power, 5dBi, 2x2, 5270MHz c2.....        | 20 |
| Plot 14. Output Power, 5dBi, 2x2, 5310MHz c1.....        | 21 |
| Plot 15. Output Power, 5dBi, 2x2, 5310MHz c2.....        | 21 |
| Plot 16. Output Power, 2dBi & 5dBi, 4x4, 5270MHz c1..... | 21 |
| Plot 17. Output Power, 2dBi & 5dBi, 4x4, 5270MHz c2..... | 22 |
| Plot 18. Output Power, 2dBi & 5dBi, 4x4, 5270MHz c3..... | 22 |
| Plot 19. Output Power, 2dBi & 5dBi, 4x4, 5270MHz c4..... | 22 |
| Plot 20. Output Power, 2dBi & 5dBi, 4x4, 5310MHz c1..... | 23 |
| Plot 21. Output Power, 2dBi & 5dBi, 4x4, 5310MHz c2..... | 23 |
| Plot 22. Output Power, 2dBi & 5dBi, 4x4, 5310MHz c3..... | 23 |
| Plot 23. Output Power, 2dBi & 5dBi, 4x4, 5310MHz c4..... | 24 |
| Plot 24. Output Power, 2dBi, 2x2, 5510MHz c1.....        | 24 |
| Plot 25. Output Power, 2dBi, 2x2, 5510MHz c2.....        | 24 |
| Plot 26. Output Power, 5dBi, 2x2, 5510MHz c1.....        | 25 |
| Plot 27. Output Power, 5dBi, 2x2, 5510MHz c2.....        | 25 |
| Plot 28. Output Power, 2dBi & 5dBi, 2x2, 5550MHz c1..... | 25 |
| Plot 29. Output Power, 2dBi & 5dBi, 2x2, 5550MHz c2..... | 26 |
| Plot 30. Output Power, 2dBi & 5dBi, 2x2, 5670MHz c1..... | 26 |
| Plot 31. Output Power, 2dBi & 5dBi, 2x2, 5670MHz c2..... | 26 |
| Plot 32. Output Power, 2dBi & 5dBi, 2x2, 5710MHz c1..... | 27 |
| Plot 33. Output Power, 2dBi & 5dBi, 2x2, 5710MHz c2..... | 27 |
| Plot 34. Output Power, 2dBi 4x4, 5510MHz c1.....         | 27 |
| Plot 35. Output Power, 2dBi 4x4, 5510MHz c2.....         | 28 |
| Plot 36. Output Power, 2dBi 4x4, 5510MHz c3.....         | 28 |
| Plot 37. Output Power, 2dBi 4x4, 5510MHz c4.....         | 28 |
| Plot 38. Output Power, 2dBi 4x4, 5670MHz c1.....         | 29 |
| Plot 39. Output Power, 2dBi 4x4, 5670MHz c2.....         | 29 |
| Plot 40. Output Power, 2dBi 4x4, 5670MHz c3.....         | 29 |
| Plot 41. Output Power, 2dBi 4x4, 5670MHz c4.....         | 30 |
| Plot 42. Output Power, 5dBi 4x4, 5510MHz c1.....         | 30 |
| Plot 43. Output Power, 5dBi, 4x4, 5510MHz c2.....        | 30 |
| Plot 44. Output Power, 5dBi, 4x4, 5510MHz c3.....        | 31 |
| Plot 45. Output Power, 5dBi, 4x4, 5510MHz c4.....        | 31 |
| Plot 46. Output Power, 2dBi & 5dBi, 4x4, 5550MHz c1..... | 31 |
| Plot 47. Output Power, 2dBi & 5dBi, 4x4, 5550MHz c2..... | 32 |
| Plot 48. Output Power, 2dBi & 5dBi, 4x4, 5550MHz c3..... | 32 |
| Plot 49. Output Power, 2dBi & 5dBi, 4x4, 5550MHz c4..... | 32 |
| Plot 50. Output Power, 5dBi, 4x4, 5670MHz c1.....        | 33 |
| Plot 51. Output Power, 5dBi, 4x4, 5670MHz c2.....        | 33 |

|                                                              |    |
|--------------------------------------------------------------|----|
| Plot 52. Output Power, 5dBi, 4x4, 5670MHz c3.....            | 33 |
| Plot 53. Output Power, 5dBi, 4x4, 5670MHz c4.....            | 34 |
| Plot 54. Output Power, 2dBi & 5dBi, 4x4, 5710MHz c1.....     | 34 |
| Plot 55. Output Power, 2dBi & 5dBi, 4x4, 5710MHz c2.....     | 34 |
| Plot 56. Output Power, 2dBi & 5dBi, 4x4, 5710MHz c3.....     | 35 |
| Plot 57. Output Power, 2dBi & 5dBi, 4x4, 5710MHz c4.....     | 35 |
| Plot 58. TPC, 5dBi, 2x2, 5270MHz c0.....                     | 35 |
| Plot 59. TPC, 5dBi, 2x2, 5270MHz c1.....                     | 36 |
| Plot 60. TPC, 5dBi, 2x2, 5310MHz c0.....                     | 36 |
| Plot 61. TPC, 5dBi, 2x2, 5310MHz c1.....                     | 36 |
| Plot 62. TPC, 5dBi, 2x2, 5510MHz c0.....                     | 37 |
| Plot 63. TPC, 5dBi, 2x2, 5510MHz c1.....                     | 37 |
| Plot 64. TPC, 5dBi, 2x2, 5550MHz c0.....                     | 37 |
| Plot 65. TPC, 5dBi, 2x2, 5550MHz c1.....                     | 38 |
| Plot 66. TPC, 5dBi, 2x2, 5670MHz c0.....                     | 38 |
| Plot 67. TPC, 5dBi, 2x2, 5670MHz c1.....                     | 38 |
| Plot 68. TPC, 5dBi, 2x2, 5710MHz c0.....                     | 39 |
| Plot 69. TPC, 5dBi, 2x2, 5710MHz c1.....                     | 39 |
| Plot 70. TPC, 5dBi, 4x4, 5270MHz c0.....                     | 39 |
| Plot 71. TPC, 5dBi, 4x4, 5270MHz c1.....                     | 40 |
| Plot 72. TPC, 5dBi, 4x4, 5270MHz c2.....                     | 40 |
| Plot 73. TPC, 5dBi, 4x4, 5270MHz c3.....                     | 40 |
| Plot 74. TPC, 5dBi, 4x4, 5310MHz c0.....                     | 41 |
| Plot 75. TPC, 5dBi, 4x4, 5310MHz c1.....                     | 41 |
| Plot 76. TPC, 5dBi, 4x4, 5310MHz c2.....                     | 41 |
| Plot 77. TPC, 5dBi, 4x4, 5310MHz c4.....                     | 42 |
| Plot 78. TPC, 5dBi, 4x4, 5510MHz c0.....                     | 42 |
| Plot 79. TPC, 5dBi, 4x4, 5510MHz c1.....                     | 42 |
| Plot 80. TPC, 5dBi, 4x4, 5510MHz c2.....                     | 43 |
| Plot 81. TPC, 5dBi, 4x4, 5510MHz c3.....                     | 43 |
| Plot 82. TPC, 5dBi, 4x4, 5550MHz c0.....                     | 43 |
| Plot 83. TPC, 5dBi, 4x4, 5550MHz c1.....                     | 44 |
| Plot 84. TPC, 5dBi, 4x4, 5550MHz c2.....                     | 44 |
| Plot 85. TPC, 5dBi, 4x4, 5550MHz c3.....                     | 44 |
| Plot 86. TPC, 5dBi, 4x4, 5670MHz c0.....                     | 45 |
| Plot 87. TPC, 5dBi, 4x4, 5670MHz c1.....                     | 45 |
| Plot 88. TPC, 5dBi, 4x4, 5670MHz c2.....                     | 45 |
| Plot 89. TPC, 5dBi, 4x4, 5670MHz c3.....                     | 46 |
| Plot 90. TPC, 5dBi, 4x4, 5710MHz c0.....                     | 46 |
| Plot 91. TPC, 5dBi, 4x4, 5710MHz c1.....                     | 46 |
| Plot 92. TPC, 5dBi, 4x4, 5710MHz c2.....                     | 47 |
| Plot 93. TPC, 5dBi, 4x4, 5710MHz c3.....                     | 47 |
| Plot 94. Power Spectral Density, 2dBi, 2x2, 5270MHz c1.....  | 50 |
| Plot 95. Power Spectral Density, 2dBi, 2x2, 5270MHz c2.....  | 50 |
| Plot 96. Power Spectral Density, 2dBi, 2x2, 5310MHz c1.....  | 50 |
| Plot 97. Power Spectral Density, 2dBi, 2x2, 5310MHz c2.....  | 51 |
| Plot 98. Power Spectral Density, 5dBi, 2x2, 5270MHz c1.....  | 51 |
| Plot 99. Power Spectral Density, 5dBi, 2x2, 5270MHz c2.....  | 51 |
| Plot 100. Power Spectral Density, 5dBi, 2x2, 5310MHz c1..... | 52 |
| Plot 101. Power Spectral Density, 5dBi, 2x2, 5310MHz c2..... | 52 |
| Plot 102. Power Spectral Density, 2dBi, 2x2, 5510MHz c1..... | 52 |
| Plot 103. Power Spectral Density, 2dBi, 2x2, 5510MHz c2..... | 53 |
| Plot 104. Power Spectral Density, 5dBi, 2x2, 5510MHz c1..... | 53 |

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| Plot 105. Power Spectral Density, 5dBi, 2x2, 5510MHz c2 .....         | 53 |
| Plot 106. Power Spectral Density, 2dBi & 5dBi, 2x2, 5550MHz c1.....   | 54 |
| Plot 107. Power Spectral Density, 2dBi & 5dBi, 2x2, 5550MHz c2.....   | 54 |
| Plot 108. Power Spectral Density, 2dBi & 5dBi, 2x2, 5670MHz c1.....   | 54 |
| Plot 109. Power Spectral Density, 2dBi & 5dBi, 2x2, 5670MHz c2.....   | 55 |
| Plot 110. Power Spectral Density, 2dBi & 5dBi, 2x2, 5710MHz c1.....   | 55 |
| Plot 111. Power Spectral Density, 2dBi & 5dBi, 2x2, 5710MHz c2.....   | 55 |
| Plot 112. Power Spectral Density, 2dBi, 4x4, 5510MHz c1 .....         | 56 |
| Plot 113. Power Spectral Density, 2dBi, 4x4, 5510MHz c2 .....         | 56 |
| Plot 114. Power Spectral Density, 2dBi, 4x4, 5510MHz c3 .....         | 56 |
| Plot 115. Power Spectral Density, 2dBi, 4x4, 5510MHz c4 .....         | 57 |
| Plot 116. Power Spectral Density, 2dBi, 4x4, 5670MHz c1 .....         | 57 |
| Plot 117. Power Spectral Density, 2dBi, 4x4, 5670MHz c2 .....         | 57 |
| Plot 118. Power Spectral Density, 2dBi, 4x4, 5670MHz c3 .....         | 58 |
| Plot 119. Power Spectral Density, 2dBi, 4x4, 5670MHz c4 .....         | 58 |
| Plot 120. Power Spectral Density, 2dBi & 5dBi, 4x4, 5270MHz c1.....   | 58 |
| Plot 121. Power Spectral Density, 2dBi & 5dBi, 4x4, 5270MHz c2.....   | 59 |
| Plot 122. Power Spectral Density, 2dBi & 5dBi, 4x4, 5270MHz c3.....   | 59 |
| Plot 123. Power Spectral Density, 2dBi & 5dBi, 4x4, 5270MHz c4.....   | 59 |
| Plot 124. Power Spectral Density, 2dBi & 5dBi, 4x4, 5310MHz c1.....   | 60 |
| Plot 125. Power Spectral Density, 2dBi & 5dBi, 4x4, 5310MHz c2.....   | 60 |
| Plot 126. Power Spectral Density, 2dBi & 5dBi, 4x4, 5310MHz c3.....   | 60 |
| Plot 127. Power Spectral Density, 2dBi & 5dBi, 4x4, 5310MHz c4.....   | 61 |
| Plot 128. Power Spectral Density, 5dBi, 4x4, 5510MHz c1 .....         | 61 |
| Plot 129. Power Spectral Density, 5dBi, 4x4, 5510MHz c2 .....         | 61 |
| Plot 130. Power Spectral Density, 5dBi, 4x4, 5510MHz c3 .....         | 62 |
| Plot 131. Power Spectral Density, 5dBi, 4x4, 5510MHz c4 .....         | 62 |
| Plot 132. Power Spectral Density, 2dBi & 5dBi, 4x4, 5550MHz c1.....   | 62 |
| Plot 133. Power Spectral Density, 2dBi & 5dBi, 4x4, 5550MHz c2.....   | 63 |
| Plot 134. Power Spectral Density, 2dBi & 5dBi, 4x4, 5550MHz c3.....   | 63 |
| Plot 135. Power Spectral Density, 2dBi & 5dBi, 4x4, 5550MHz c4.....   | 63 |
| Plot 136. Power Spectral Density, 5dBi, 4x4, 5670MHz c1 .....         | 64 |
| Plot 137. Power Spectral Density, 5dBi, 4x4, 5670MHz c2 .....         | 64 |
| Plot 138. Power Spectral Density, 5dBi, 4x4, 5670MHz c3 .....         | 64 |
| Plot 139. Power Spectral Density, 5dBi, 4x4, 5670MHz c4 .....         | 65 |
| Plot 140. Power Spectral Density, 2dBi & 5dBi, 4x4, 5710MHz c1.....   | 65 |
| Plot 141. Power Spectral Density, 2dBi & 5dBi, 4x4, 5710MHz c2.....   | 65 |
| Plot 142. Power Spectral Density, 2dBi & 5dBi, 4x4, 5710MHz c3.....   | 66 |
| Plot 143. Power Spectral Density, 2dBi & 5dBi, 4x4, 5710MHz c4.....   | 66 |
| Plot 144. Radiated Emissions, Average, 2x2, 5dBi, 5270, 1-7GHz .....  | 68 |
| Plot 145. Radiated Emissions, Average, 2x2, 5dBi, 5270, 7-18GHz ..... | 68 |
| Plot 146. Radiated Emissions, Average, 2x2, 5dBi, 5310, 1-7GHz .....  | 68 |
| Plot 147. Radiated Emissions, Average, 2x2, 5dBi, 5310, 7-18GHz ..... | 69 |
| Plot 148. Radiated Emissions, Average, 2x2, 5dBi, 5510, 1-7GHz .....  | 69 |
| Plot 149. Radiated Emissions, Average, 2x2, 5dBi, 5510, 7-18GHz ..... | 69 |
| Plot 150. Radiated Emissions, Average, 2x2, 5dBi, 5550, 1-7GHz .....  | 70 |
| Plot 151. Radiated Emissions, Average, 2x2, 5dBi, 5550, 7-18GHz ..... | 70 |
| Plot 152. Radiated Emissions, Average, 2x2, 5dBi, 5670, 1-7GHz .....  | 70 |
| Plot 153. Radiated Emissions, Average, 2x2, 5dBi, 5670, 7-18GHz ..... | 71 |
| Plot 154. Radiated Emissions, Average, 2x2, 5dBi, 5710, 1-7GHz .....  | 71 |
| Plot 155. Radiated Emissions, Average, 2x2, 5dBi, 5710, 7-18GHz ..... | 71 |
| Plot 156. Radiated Emissions, Peak, 2x2, 5dBi, 5270, 1-7GHz .....     | 72 |
| Plot 157. Radiated Emissions, Peak, 2x2, 5dBi, 5270, 7-18GHz .....    | 72 |

|                                                                      |    |
|----------------------------------------------------------------------|----|
| Plot 158. Radiated Emissions, Peak, 2x2, 5dBi, 5310, 1-7GHz.....     | 72 |
| Plot 159. Radiated Emissions, Peak, 2x2, 5dBi, 5310, 7-18GHz.....    | 73 |
| Plot 160. Radiated Emissions, Peak, 2x2, 5dBi, 5510, 1-7GHz.....     | 73 |
| Plot 161. Radiated Emissions, Peak, 2x2, 5dBi, 5510, 7-18GHz.....    | 73 |
| Plot 162. Radiated Emissions, Peak, 2x2, 5dBi, 5550, 1-7GHz.....     | 74 |
| Plot 163. Radiated Emissions, Peak, 2x2, 5dBi, 5550, 7-18GHz.....    | 74 |
| Plot 164. Radiated Emissions, Peak, 2x2, 5dBi, 5670, 1-7GHz.....     | 74 |
| Plot 165. Radiated Emissions, Peak, 2x2, 5dBi, 5670, 7-18GHz.....    | 75 |
| Plot 166. Radiated Emissions, Peak, 2x2, 5dBi, 5710, 1-7GHz.....     | 75 |
| Plot 167. Radiated Emissions, Peak, 2x2, 5dBi, 5710, 7-18GHz.....    | 75 |
| Plot 168. Radiated Emissions, -27dBm, 2x2, 5dBi, 5270, 1-7GHz.....   | 76 |
| Plot 169. Radiated Emissions, -27dBm, 2x2, 5dBi, 5270, 7-18GHz.....  | 76 |
| Plot 170. Radiated Emissions, -27dBm, 2x2, 5dBi, 5310, 1-7GHz.....   | 76 |
| Plot 171. Radiated Emissions, -27dBm, 2x2, 5dBi, 5310, 7-18GHz.....  | 77 |
| Plot 172. Radiated Emissions, -27dBm, 2x2, 5dBi, 5510, 1-7GHz.....   | 77 |
| Plot 173. Radiated Emissions, -27dBm, 2x2, 5dBi, 5510, 7-18GHz.....  | 77 |
| Plot 174. Radiated Emissions, -27dBm, 2x2, 5dBi, 5550, 1-7GHz.....   | 78 |
| Plot 175. Radiated Emissions, -27dBm, 2x2, 5dBi, 5550, 7-18GHz.....  | 78 |
| Plot 176. Radiated Emissions, -27dBm, 2x2, 5dBi, 5670, 1-7GHz.....   | 78 |
| Plot 177. Radiated Emissions, -27dBm, 2x2, 5dBi, 5670, 7-18GHz.....  | 79 |
| Plot 178. Radiated Emissions, -27dBm, 2x2, 5dBi, 5710, 1-7GHz.....   | 79 |
| Plot 179. Radiated Emissions, -27dBm, 2x2, 5dBi, 5710, 7-18GHz.....  | 79 |
| Plot 180. Radiated Emissions, Average, 4x4, 5dBi, 5270, 1-7GHz.....  | 80 |
| Plot 181. Radiated Emissions, Average, 4x4, 5dBi, 5270, 7-18GHz..... | 80 |
| Plot 182. Radiated Emissions, Average, 4x4, 5dBi, 5310, 1-7GHz.....  | 80 |
| Plot 183. Radiated Emissions, Average, 4x4, 5dBi, 5310, 7-18GHz..... | 81 |
| Plot 184. Radiated Emissions, Average, 4x4, 5dBi, 5510, 1-7GHz.....  | 81 |
| Plot 185. Radiated Emissions, Average, 4x4, 5dBi, 5510, 7-18GHz..... | 81 |
| Plot 186. Radiated Emissions, Average, 4x4, 5dBi, 5550, 1-7GHz.....  | 82 |
| Plot 187. Radiated Emissions, Average, 4x4, 5dBi, 5550, 7-18GHz..... | 82 |
| Plot 188. Radiated Emissions, Average, 4x4, 5dBi, 5670, 1-7GHz.....  | 82 |
| Plot 189. Radiated Emissions, Average, 4x4, 5dBi, 5670, 7-18GHz..... | 83 |
| Plot 190. Radiated Emissions, Average, 4x4, 5dBi, 5710, 1-7GHz.....  | 83 |
| Plot 191. Radiated Emissions, Average, 4x4, 5dBi, 5710, 7-18GHz..... | 83 |
| Plot 192. Radiated Emissions, Peak, 4x4, 5dBi, 5270, 1-7GHz.....     | 84 |
| Plot 193. Radiated Emissions, Peak, 4x4, 5dBi, 5270, 7-18GHz.....    | 84 |
| Plot 194. Radiated Emissions, Peak, 4x4, 5dBi, 5310, 1-7GHz.....     | 84 |
| Plot 195. Radiated Emissions, Peak, 4x4, 5dBi, 5310, 7-18GHz.....    | 85 |
| Plot 196. Radiated Emissions, Peak, 4x4, 5dBi, 5510, 1-7GHz.....     | 85 |
| Plot 197. Radiated Emissions, Peak, 4x4, 5dBi, 5510, 7-18GHz.....    | 85 |
| Plot 198. Radiated Emissions, Peak, 4x4, 5dBi, 5550, 1-7GHz.....     | 86 |
| Plot 199. Radiated Emissions, Peak, 4x4, 5dBi, 5550, 7-18GHz.....    | 86 |
| Plot 200. Radiated Emissions, Peak, 4x4, 5dBi, 5670, 1-7GHz.....     | 86 |
| Plot 201. Radiated Emissions, Peak, 4x4, 5dBi, 5670, 7-18GHz.....    | 87 |
| Plot 202. Radiated Emissions, Peak, 4x4, 5dBi, 5710, 1-7GHz.....     | 87 |
| Plot 203. Radiated Emissions, Peak, 4x4, 5dBi, 5710, 7-18GHz.....    | 87 |
| Plot 204. Radiated Emissions, -27dBm, 4x4, 5dBi, 5270, 1-7GHz.....   | 88 |
| Plot 205. Radiated Emissions, -27dBm, 4x4, 5dBi, 5270, 7-18GHz.....  | 88 |
| Plot 206. Radiated Emissions, -27dBm, 4x4, 5dBi, 5310, 1-7GHz.....   | 88 |
| Plot 207. Radiated Emissions, -27dBm, 4x4, 5dBi, 5310, 7-18GHz.....  | 89 |
| Plot 208. Radiated Emissions, -27dBm, 4x4, 5dBi, 5510, 1-7GHz.....   | 89 |
| Plot 209. Radiated Emissions, -27dBm, 4x4, 5dBi, 5510, 7-18GHz.....  | 89 |
| Plot 210. Radiated Emissions, -27dBm, 4x4, 5dBi, 5550, 1-7GHz.....   | 90 |

|                                                                               |     |
|-------------------------------------------------------------------------------|-----|
| Plot 211. Radiated Emissions, -27dBm, 4x4, 5dBi, 5550, 7-18GHz.....           | 90  |
| Plot 212. Radiated Emissions, -27dBm, 4x4, 5dBi, 5670, 1-7GHz.....            | 90  |
| Plot 213. Radiated Emissions, -27dBm, 4x4, 5dBi, 5670, 7-18GHz.....           | 91  |
| Plot 214. Radiated Emissions, -27dBm, 4x4, 5dBi, 5710, 1-7GHz.....            | 91  |
| Plot 215. Radiated Emissions, -27dBm, 4x4, 5dBi, 5710, 7-18GHz.....           | 91  |
| Plot 216. Radiated Spurious Emissions, 5270MHz, Worst Case, 30-1000MHz.....   | 92  |
| Plot 217. Radiated Spurious Emissions, 5310MHz, Worst Case, 30-1000MHz.....   | 92  |
| Plot 218. Radiated Spurious Emissions, 5510MHz, Worst Case, 30-1000MHz.....   | 92  |
| Plot 219. Radiated Spurious Emissions, 5550MHz, Worst Case, 30-1000MHz.....   | 93  |
| Plot 220. Radiated Spurious Emissions, 5670MHz, Worst Case, 30-1000MHz.....   | 93  |
| Plot 221. Radiated Spurious Emissions, 5710MHz, Worst Case, 30-1000MHz.....   | 93  |
| Plot 222. Radiated Band Edge, Average, 5350, BW40M, CF5310MHz, 2x2, 5dBi..... | 94  |
| Plot 223. Radiated Band Edge, Average, 5350, BW40M, CF5310MHz, 2x2, 2dBi..... | 94  |
| Plot 224. Radiated Band Edge, Average, 5350, BW40M, CF5310MHz, 4x4, 2dBi..... | 94  |
| Plot 225. Radiated Band Edge, Average, 5350, BW40M, CF5310MHz, 4x4, 5dBi..... | 95  |
| Plot 226. Radiated Band Edge, Peak, 5350, BW40M, CF5310MHz, 2x2, 5dBi.....    | 95  |
| Plot 227. Radiated Band Edge, Peak, 5350, BW40M, CF5310MHz, 2x2, 2dBi.....    | 95  |
| Plot 228. Radiated Band Edge, Peak, 5350, BW40M, CF5310MHz, 4x4, 2dBi.....    | 96  |
| Plot 229. Radiated Band Edge, Peak, 5350, BW40M, CF5310MHz, 4x4, 5dBi.....    | 96  |
| Plot 230. Radiated Band Edge, -27dBm, 5350, BW40M, CF5310MHz, 2x2, 5dBi.....  | 96  |
| Plot 231. Radiated Band Edge, -27dBm, 5350, BW40M, CF5310MHz, 2x2, 2dBi.....  | 97  |
| Plot 232. Radiated Band Edge, -27dBm, 5350, BW40M, CF5310MHz, 4x4, 2dBi.....  | 97  |
| Plot 233. Radiated Band Edge, -27dBm, 5350, BW40M, CF5310MHz, 4x4, 5dBi.....  | 97  |
| Plot 234. Radiated Band Edge, -27dBm, 5725, BW40M, CF5670MHz, 2x2, 5dBi.....  | 98  |
| Plot 235. Radiated Band Edge, -27dBm, 5725, BW40M, CF5670MHz, 2x2, 2dBi.....  | 98  |
| Plot 236. Radiated Band Edge, -27dBm, 5725, BW40M, CF5670MHz, 4x4, 2dBi.....  | 98  |
| Plot 237. Radiated Band Edge, -27dBm, 5725, BW40M, CF5670MHz, 4x4, 5dBi.....  | 99  |
| Plot 238. Radiated Band Edge, -27dBm, 5850, BW40M, CF5710MHz, 2x2, 5dBi.....  | 99  |
| Plot 239. Radiated Band Edge, -27dBm, 5850, BW40M, CF5710MHz, 4x4, 5dBi.....  | 99  |
| Plot 240. Radiated Band Edge, Average, 5460, BW40M, CF5510MHz, 2x2, 5dBi..... | 100 |
| Plot 241. Radiated Band Edge, Average, 5460, BW40M, CF5510MHz, 2x2, 2dBi..... | 100 |
| Plot 242. Radiated Band Edge, Average, 5460, BW40M, CF5510MHz, 4x4, 2dBi..... | 100 |
| Plot 243. Radiated Band Edge, Average, 5460, BW40M, CF5510MHz, 4x4, 5dBi..... | 101 |
| Plot 244. Radiated Band Edge, Peak, 5460, BW40M, CF5510MHz, 2x2, 5dBi.....    | 101 |
| Plot 245. Radiated Band Edge, Peak, 5460, BW40M, CF5510MHz, 2x2, 2dBi.....    | 101 |
| Plot 246. Radiated Band Edge, Peak, 5460, BW40M, CF5510MHz, 4x4, 2dBi.....    | 102 |
| Plot 247. Radiated Band Edge, Peak, 5460, BW40M, CF5510MHz, 4x4, 5dBi.....    | 102 |
| Plot 248. Radiated Band Edge, -27dBm, 5470, BW40M, CF5510MHz, 2x2, 5dBi.....  | 102 |
| Plot 249. Radiated Band Edge, -27dBm, 5470, BW40M, CF5510MHz, 2x2, 2dBi.....  | 103 |
| Plot 250. Radiated Band Edge, -27dBm, 5470, BW40M, CF5510MHz, 4x4, 2dBi.....  | 103 |
| Plot 251. Radiated Band Edge, -27dBm, 5470, BW40M, CF5510MHz, 4x4, 5dBi.....  | 103 |
| Plot 252. Conducted Emissions, neutral prescan.....                           | 105 |
| Plot 253. Conducted Emissions, phase prescan.....                             | 105 |

## List of Terms and Abbreviations

|              |                                               |
|--------------|-----------------------------------------------|
| AC           | Alternating Current                           |
| ACF          | Antenna Correction Factor                     |
| Cal          | Calibration                                   |
| <i>d</i>     | Measurement Distance                          |
| dB           | Decibels                                      |
| dB $\mu$ A   | Decibels above one <b>microamp</b>            |
| dB $\mu$ V   | Decibels above one <b>microvolt</b>           |
| dB $\mu$ A/m | Decibels above one <b>microamp per meter</b>  |
| dB $\mu$ V/m | Decibels above one <b>microvolt per meter</b> |
| DC           | Direct Current                                |
| E            | Electric Field                                |
| DSL          | Digital Subscriber Line                       |
| ESD          | Electrostatic Discharge                       |
| EUT          | Equipment Under Test                          |
| <i>f</i>     | Frequency                                     |
| FCC          | Federal Communications Commission             |
| GRP          | Ground Reference Plane                        |
| H            | Magnetic Field                                |
| HCP          | Horizontal Coupling Plane                     |
| Hz           | Hertz                                         |
| IEC          | International Electrotechnical Commission     |
| kHz          | kilohertz                                     |
| kPa          | kilopascal                                    |
| kV           | kilovolt                                      |
| LISN         | Line Impedance Stabilization Network          |
| MHz          | Megahertz                                     |
| $\mu$ H      | <b>microhenry</b>                             |
| $\mu$        | <b>microfarad</b>                             |
| $\mu$ s      | <b>microseconds</b>                           |
| PRF          | Pulse Repetition Frequency                    |
| RF           | Radio Frequency                               |
| RMS          | Root-Mean-Square                              |
| TWT          | Traveling Wave Tube                           |
| V/m          | Volts <b>per meter</b>                        |
| VCP          | Vertical Coupling Plane                       |

# I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Amimon AMN41012, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the AMN41012. Amimon should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the AMN41012, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with Amimon, purchase order number 18000496. All tests were conducted using measurement procedure ANSI C63.10-2013.

| FCC Reference               | Description                    | Results   |
|-----------------------------|--------------------------------|-----------|
| §15.203                     | Antenna Requirement            | Compliant |
| §15.403(i)                  | 26 dB Occupied Bandwidth       | Compliant |
| §15.407 (a)(2)              | Maximum Conducted Output Power | Compliant |
| §15.407 (a)(2)              | Maximum Power Spectral Density | Compliant |
| §15.407 (b)(2 – 3)& (6 - 7) | Undesirable Emissions          | Compliant |
| §15.407(b)(6)               | Conducted Emission             | Compliant |
| §15.407(f)                  | RF Exposure                    | Compliant |

**Table 1. Executive Summary of EMC Part 15.407 Compliance Testing**

## II. Equipment Configuration

## A. Overview

Eurofins MET Labs, Inc was contracted by Amimon to perform testing on the AMN41012, under Amimon's purchase order number 18000496.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Amimon AMN41012.

The results obtained relate only to the item(s) tested.

|                                       |                                                         |                              |  |
|---------------------------------------|---------------------------------------------------------|------------------------------|--|
| <b>Model(s) Tested:</b>               | AMN41012                                                |                              |  |
| <b>Model(s) Covered:</b>              | AMN41012                                                |                              |  |
| <b>EUT Specifications:</b>            | Primary Power: 5 VDC, module only                       |                              |  |
|                                       | FCC ID: VQSAMN41012                                     |                              |  |
|                                       | Type of Modulations:                                    | OFDM, 64QAM, 16QAM           |  |
|                                       | Equipment Code:                                         | NII                          |  |
|                                       | Peak RF Output Power:                                   | 23.975 dBm                   |  |
|                                       | EUT Frequency Ranges:                                   | 5270-5310 MHz; 5510-5710 MHz |  |
| <b>Analysis:</b>                      | The results obtained relate only to the item(s) tested. |                              |  |
| <b>Environmental Test Conditions:</b> | Temperature: 15-35° C                                   |                              |  |
|                                       | Relative Humidity: 30-60%                               |                              |  |
|                                       | Barometric Pressure: 860-1060 mbar                      |                              |  |
| <b>Type of Filing:</b>                | Original                                                |                              |  |
| <b>Evaluated by:</b>                  | Donald Salguero                                         |                              |  |
| <b>Report Date(s):</b>                | January 9, 2020                                         |                              |  |

**Table 2. EUT Summary**

## B. References

|                                                                 |                                                                                                                                                                                               |
|-----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CFR 47, Part 15, Subpart E</b>                               | Unlicensed National Information Infrastructure Devices (UNII)                                                                                                                                 |
| <b>ANSI C63.4:2014</b>                                          | Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz                                                        |
| <b>ISO/IEC 17025:2017</b>                                       | General Requirements for the Competence of Testing and Calibration Laboratories                                                                                                               |
| <b>ANSI C63.10-2013</b>                                         | American National Standard for Testing Unlicensed Wireless Devices                                                                                                                            |
| <b>789033 D02 General UNII Test Procedures New Rules v02r01</b> | Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E                                                                        |
| <b>905462 DO2 UNII DFS Compliance Procedures New Rules v02</b>  | Compliance Measurement Procedures for Unlicensed-National Information Infrastructure Devices Operating in the 5250-5350 MHz and 5470-5725 MHz Bands Incorporating Dynamic Frequency Selection |
| <b>662911 D01 Multiple Transmitter Output v02r01</b>            | Emissions Testing of Transmitters with Multiple Outputs in the Same Band                                                                                                                      |

**Table 3. References**

## C. Test Site

All testing was performed at Eurofins MET Labs, Inc, 914 West Patapsco Avenue, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## D. Measurement Uncertainty

| Test Method                                  | Typical Expanded Uncertainty | K | Confidence Level |
|----------------------------------------------|------------------------------|---|------------------|
| <b>RF Frequencies</b>                        | ±4.52 Hz                     | 2 | 95%              |
| <b>RF Power Conducted Emissions</b>          | ±2.32 dB                     | 2 | 95%              |
| <b>RF Power Conducted Spurious Emissions</b> | ±2.25 dB                     | 2 | 95%              |
| <b>RF Power Radiated Emissions</b>           | ±3.01 dB                     | 2 | 95%              |

**Table 4. Uncertainty Calculations Summary**


## E. Description of Test Sample

The Amimon AMN41012, Equipment Under Test (EUT), is a wireless HD Video system at 5GHz with zero-latency. It consists of 2 companion devices:

VSU- Video Source Unit

VDU – Video Display Unit.

VSU receives a Video signal from an external source and up-mixes it using a proprietary protocol to 5GHz similar to IEEE802.11 a/n.

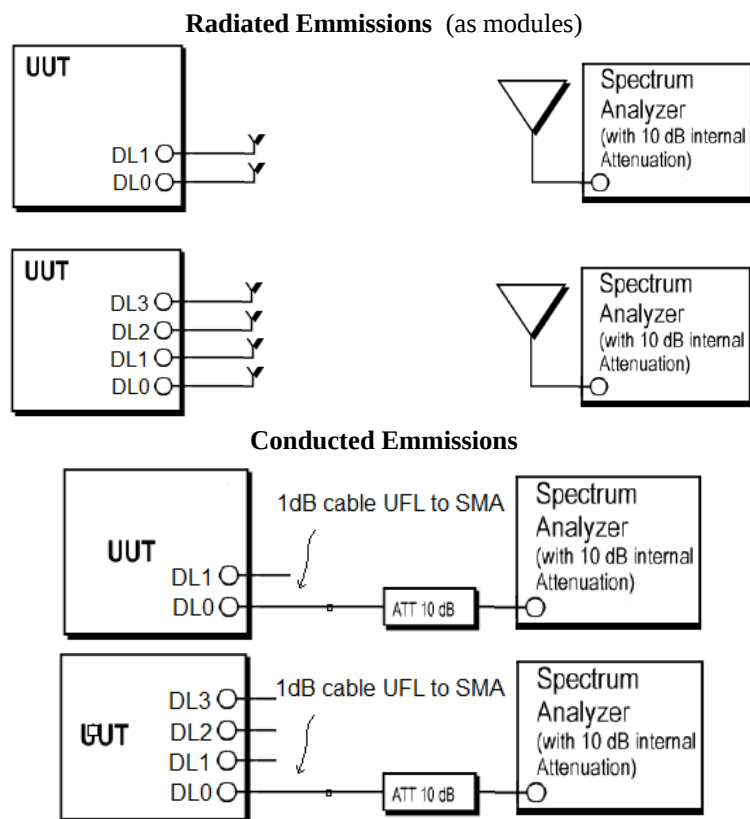

**Figure 1. Block Diagram of Test Configuration**

## F. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

| Ref. ID         | Slot # | Name / Description         | Model Number | Part Number | Serial Number | Rev. # |
|-----------------|--------|----------------------------|--------------|-------------|---------------|--------|
| AMN41012        |        | Draco TX (2 or 4 TX ports) | AMN41012     |             |               |        |
| WSS002          |        | 2dBi omni dipole Antenna   | WSS002       |             |               |        |
| RFDPA151<br>300 |        | 5dBi omni dipole Antenna   | RFDPA151300  |             |               |        |

**Table 5. Equipment Configuration**

Tested configurations:

MIMO 2x2 with 2dBi antennas  
MIMO 2x2 with 5dBi antennas  
MIMO 4x4 with 2dBi antennas  
MIMO 4x4 with 5dBi antennas

## G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

| Ref. ID                                                                                                                                                                | Name / Description          | Manufacturer | Model Number | *Customer Supplied Calibration Data |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|--------------|--------------|-------------------------------------|
|                                                                                                                                                                        | 1dB cable UFL to RP-SMA     |              |              |                                     |
|                                                                                                                                                                        | 5V AC adapter               |              |              |                                     |
|                                                                                                                                                                        | HDMI cables                 |              |              |                                     |
|                                                                                                                                                                        | Draco Tx Balcony            |              |              |                                     |
|                                                                                                                                                                        | Draco Rx Balcony            |              |              |                                     |
|                                                                                                                                                                        | Video generator             |              |              |                                     |
|                                                                                                                                                                        | screen                      |              |              |                                     |
|                                                                                                                                                                        | 12V AC adapter              |              |              |                                     |
|                                                                                                                                                                        | USB cables (long and short) |              |              |                                     |
|                                                                                                                                                                        | Debug board TX              |              |              |                                     |
|                                                                                                                                                                        | Debug board RX              |              |              |                                     |
|                                                                                                                                                                        | Laptop                      |              |              |                                     |
|                                                                                                                                                                        | SMA to RP-SMA adapters      |              |              |                                     |
| The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer. |                             |              |              |                                     |

**Table 6. Support Equipment**

## H. Ports and Cabling Information

| Ref. ID | Port name on EUT | Cable Description or reason for no cable          | Qty    | Length as tested (m) | Max Length (m) | Shielded? (Y/N) | Termination Box ID & Port Name |
|---------|------------------|---------------------------------------------------|--------|----------------------|----------------|-----------------|--------------------------------|
| 1       | J5, J6           | UFL connectors for RF ports<br>2 TX configuration | 2      |                      |                |                 |                                |
| 1       | J5, J6, J3, J4   | UFL connectors for RF ports<br>4 TX configuration | 4      |                      |                |                 |                                |
| 2       | J2               | Board to board interface connector (to balcony)   |        |                      |                |                 |                                |
| 3       | J1               | Debug connector                                   |        |                      |                |                 |                                |
| 4       |                  | Balcony board connecting to J2                    |        |                      |                |                 |                                |
| 5       |                  | UFL to RP-SMA cables                              | 2 or 4 | 10cm                 |                | yes             |                                |
| 6       |                  | Debug board connecting to J1                      |        |                      |                |                 |                                |

**Table 7. Ports and Cabling Information**

## **I. Mode of Operation**

The devices can be set to TechMode and the RF signal is simulated internally or for the VSU, a video source can be used when an additional digital board is used.

The VSU has a duty cycle slightly lower than 98%.

For radiated emissions the devices will be tested as modules.

For conducted measurements it is suggested to use with the balcony board to enable use of video and ease of testing.

TECH mode is enabled by simple GUI provided by AMIMON's 'AppCom' Tool or TechTool.

The tool enables setting the EUT to Transmit or Receive modes. It controls the center channel frequency, the operating channel bandwidth, and the TX channel power.

A complete description of operation is detailed in 'How to use AppCom Regulation control.doc' file

## **J. Method of Monitoring EUT Operation**

Feedback from the debug window can provide information on device performance

All other parameters will be measured by RF equipment

## **K. Modifications**

### **a) Modifications to EUT**

No modifications were made to the EUT.

### **b) Modifications to Test Standard**

No modifications were made to the test standard.

## **L. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Amimon upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:** § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested is compliant the criteria of §15.203. EUT uses unique type of connector.

| Name / Description       | Model Number |
|--------------------------|--------------|
| 2dBi omni dipole Antenna | WSS002       |
| 5dBi omni dipole Antenna | RFDPA151300  |

**Table 8. Antenna List**

**Test Engineer(s):** Donald Salguero

**Test Date(s):** March 6, 2019

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15. 403(i) 26dB Bandwidth


**Test Requirements:** § 15.403(i): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

**Test Procedure:** The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 26 dB Bandwidth was measured and recorded.

**Test Results** The 26 dB Bandwidth was compliant with the requirements of this section.

**Test Engineer(s):** Donald Salguero


**Test Date(s):** December 18, 2018




| Center Frequency | Chain | 26dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|------------------|-------|----------------------|---------------------|
| 5270             | c0    | 41.014               | 37.8447             |
|                  | c1    | 41.075               | 37.7024             |
|                  | c2    | 40.975               | 37.8012             |
|                  | c3    | 40.853               | 37.7603             |
| 5310             | c0    | 41.104               | 37.7574             |
|                  | c1    | 41.156               | 37.8208             |
|                  | c2    | 41.135               | 37.7950             |
|                  | c3    | 41.141               | 37.8209             |
| 5510             | c0    | 41.019               | 37.8073             |

|      |    |        |         |
|------|----|--------|---------|
|      | c1 | 40.931 | 37.8160 |
|      | c2 | 41.124 | 37.8194 |
|      | c3 | 41.183 | 37.7554 |
| 5550 | c0 | 40.987 | 37.8305 |
|      | c1 | 40.932 | 37.7661 |
|      | c2 | 40.822 | 37.6978 |
|      | c3 | 41.121 | 37.7404 |
| 5670 | c0 | 40.865 | 37.7832 |
|      | c1 | 41.020 | 37.8499 |
|      | c2 | 41.045 | 37.7195 |
|      | c3 | 41.230 | 37.7142 |
| 5710 | c0 | 40.949 | 37.8313 |
|      | c1 | 40.966 | 37.8269 |
|      | c2 | 41.028 | 37.8470 |
|      | c3 | 40.987 | 37.7878 |


**Table 9. Occupied Bandwidth, Test Results**

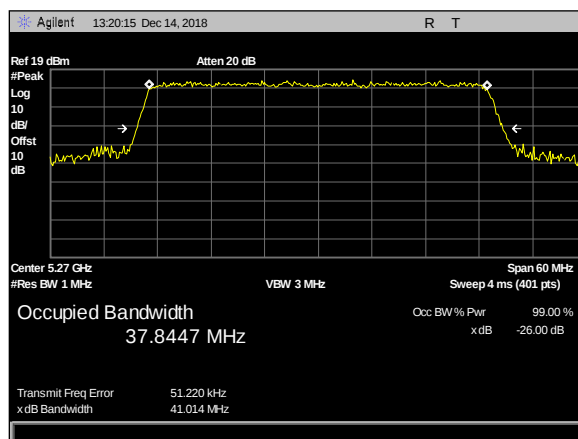


Plot 1. 26 dB Occupied Bandwidth, 40M, 5270 MHz

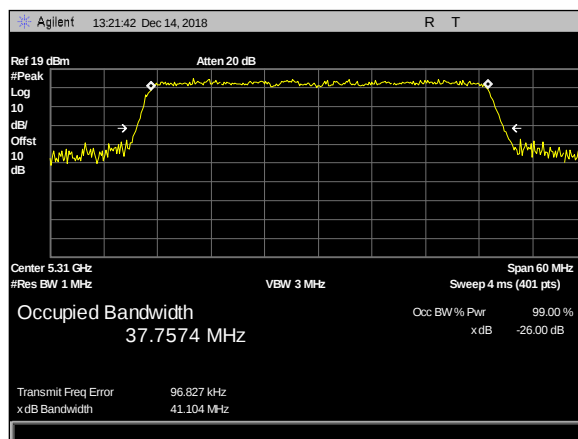


Plot 2. 26 dB Occupied Bandwidth, 40M, 5310 MHz

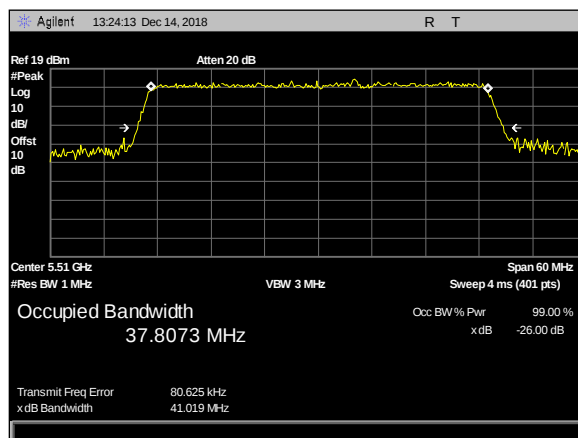


Plot 3. 26 dB Occupied Bandwidth, 40M, 5510 MHz

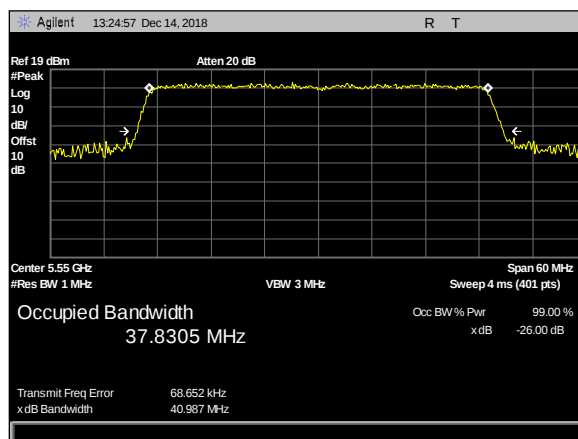

Plot 4. 26 dB Occupied Bandwidth, 40M, 5550 MHz

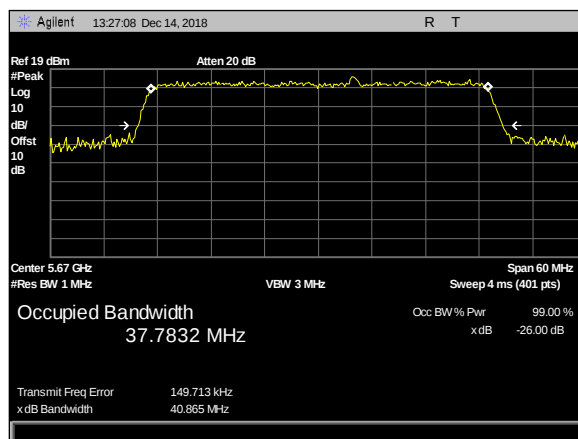

Plot 5. 26 dB Occupied Bandwidth, 40M, 5670 MHz

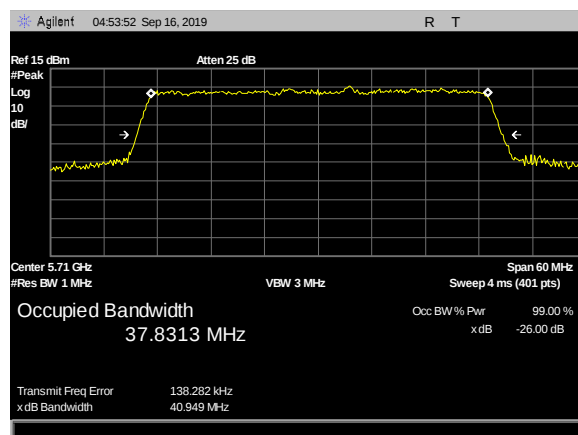

Plot 6. 26 dB Occupied Bandwidth, 40M, 5710 MHz

## Electromagnetic Compatibility Criteria for Intentional Radiators


### Duty Cycle

**Test Procedure:** The EUT was connected to a spectrum analyzer and was ran at maximum achievable duty cycle for all modes. The duty cycle was measured in accordance with section 12.2 of ANSI C63.10-2013.

**Test Engineer:** Donald Salguero

**Test Date:** January 9, 2019

| Mode  | On Time (ms) | Period (ms) | Duty Cycle (%) | DCCF (dB) | 1/T Minimum VBW (Hz) |
|-------|--------------|-------------|----------------|-----------|----------------------|
| 40MHz | 16.25        | 16.69       | 97.36          | 0.11      | 62                   |

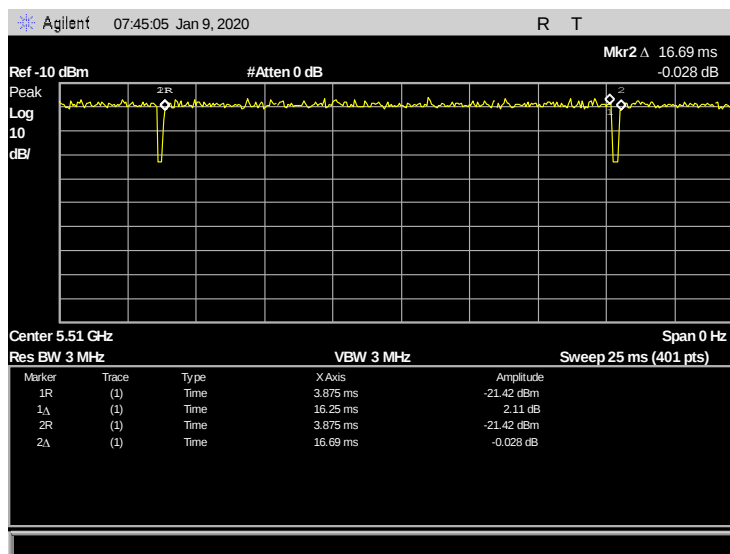

Plot 7. Duty Cycle

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15. 407(a)(2) Maximum Conducted Output Power

**Test Requirements:** **§15.407(a)(2):** For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**§15.407(h)(1):** Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.


**Test Procedure:** The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. The multiple outputs are un-correlated. Its power was measured according to measurement method SA-2, as described in 789033 D02 General UNII Test Procedures v02r01.

To verify the TPC requirement of the rule part, observations using the same measurement method were made with the EUT set to a lower power setting.

**Test Results:** The EUT as tested is compliant with the requirements of this section.

**Test Engineer(s):** Donald Salguero

**Test Date(s):** September 16, 2019



| Center Frequency (MHz) | Port 1 | Port 2 | Sum (dBm) | Duty Cycle (dB) | Gain (dBi) | Cond. Power (dBm) | Limit (dBm) | Margin (dB) |
|------------------------|--------|--------|-----------|-----------------|------------|-------------------|-------------|-------------|
| 5270                   | 20.84  | 20.87  | 23.865    | 0.11            | 2          | 23.975            | 24          | -0.025      |
| 5310                   | 17.16  | 16.75  | 19.97     | 0.11            | 2          | 20.08             | 24          | -3.92       |
| 5510                   | 19.36  | 19.38  | 22.38     | 0.11            | 2          | 22.49             | 24          | -1.51       |
| 5550                   | 19.53  | 20.37  | 22.981    | 0.11            | 2          | 23.091            | 24          | -0.909      |
| 5670                   | 18.77  | 18.67  | 21.731    | 0.11            | 2          | 21.841            | 24          | -2.159      |
| 5710                   | 21.04  | 19.88  | 23.509    | 0.11            | 2          | 23.619            | 24          | -0.381      |

**Table 10. Conducted Power, MIMO 2x2 - 2dBi Configuration, Test Results**

| Center Frequency (MHz) | Port 1 | Port 2 | Sum (dBm) | Duty Cycle (dB) | Gain (dBi) | Cond. Power (dBm) | Limit (dBm) | Margin (dB) |
|------------------------|--------|--------|-----------|-----------------|------------|-------------------|-------------|-------------|
| 5270                   | 19.51  | 19.15  | 22.344    | 0.11            | 5          | 22.454            | 24          | -1.546      |
| 5310                   | 16.21  | 15.64  | 18.945    | 0.11            | 5          | 19.155            | 24          | -4.945      |
| 5510                   | 18.68  | 18.29  | 21.5      | 0.11            | 5          | 21.61             | 24          | -2.39       |
| 5550                   | 19.53  | 20.37  | 22.981    | 0.11            | 5          | 23.091            | 24          | -0.909      |
| 5670                   | 18.77  | 18.67  | 21.731    | 0.11            | 5          | 21.841            | 24          | -2.159      |
| 5710                   | 21.04  | 19.88  | 23.509    | 0.11            | 5          | 23.619            | 24          | -0.381      |

**Table 11. Conducted Power, MIMO 2x2 - 5dBi Configuration, Test Results**

| Center Frequency (MHz) | Port 1 | Port 2 | Sum (dBm) | Gain (dBi) | Duty Cycle (dB) | EIRP Limit (dBm) | Margin (dB) |
|------------------------|--------|--------|-----------|------------|-----------------|------------------|-------------|
| 5270                   | 15.78  | 14.79  | 18.323    | 5          | 0.11            | 24               | -0.567      |
| 5310                   | 15.14  | 15.88  | 18.536    | 5          | 0.11            | 24               | -0.354      |
| 5510                   | 15.52  | 15.31  | 18.427    | 5          | 0.11            | 24               | -0.463      |
| 5550                   | 15.21  | 15.41  | 18.321    | 5          | 0.11            | 24               | -0.569      |
| 5670                   | 15.61  | 15.57  | 18.6      | 5          | 0.11            | 24               | -0.29       |
| 5710                   | 15.19  | 15.61  | 18.415    | 5          | 0.11            | 24               | -0.475      |

**Table 12. TPC, MIMO 2x2 - 5dBi Configuration, Test Results**

| Center Frequency (MHz) | Port 1 | Port 2 | Port 3 | Port 4 | Sum (dBm) | Duty Cycle (dB) | Gain (dBi) | Cond. Power (dBm) | Limit (dBm) | Margin (dB) |
|------------------------|--------|--------|--------|--------|-----------|-----------------|------------|-------------------|-------------|-------------|
| 5270                   | 17.02  | 16.93  | 17.16  | 17.25  | 23.112    | 0.11            | 2          | 23.222            | 24          | -0.778      |
| 5310                   | 14.76  | 15.3   | 15.75  | 15.73  | 21.424    | 0.11            | 2          | 21.534            | 24          | -2.466      |
| 5510                   | 17.68  | 17.37  | 17.19  | 17.37  | 23.427    | 0.11            | 2          | 23.537            | 24          | -0.463      |
| 5550                   | 17.63  | 17.62  | 17.72  | 17.99  | 23.763    | 0.11            | 2          | 23.873            | 24          | -0.127      |
| 5670                   | 15.68  | 15.98  | 16.31  | 16.36  | 22.112    | 0.11            | 2          | 22.222            | 24          | -1.778      |
| 5710                   | 17.33  | 17.27  | 17.55  | 16.72  | 23.249    | 0.11            | 2          | 23.359            | 24          | -0.641      |


**Table 13. Conducted Power, MIMO 4x4 - 2dBi Configuration, Test Results**

| Center Frequency (MHz) | Port 1 | Port 2 | Port 3 | Port 4 | Sum (dBm) | Duty Cycle (dB) | Gain (dBi) | Cond. Power (dBm) | Limit (dBm) | Margin (dB) |
|------------------------|--------|--------|--------|--------|-----------|-----------------|------------|-------------------|-------------|-------------|
| 5270                   | 17.02  | 16.93  | 17.16  | 17.25  | 23.112    | 0.11            | 5          | 23.222            | 24          | -0.778      |
| 5310                   | 14.76  | 15.3   | 15.75  | 15.73  | 21.424    | 0.11            | 5          | 21.534            | 24          | -2.466      |
| 5510                   | 16.63  | 16.54  | 16.56  | 16.42  | 22.559    | 0.11            | 5          | 22.669            | 24          | -1.331      |
| 5550                   | 17.63  | 17.62  | 17.72  | 17.99  | 23.763    | 0.11            | 5          | 23.873            | 24          | -0.127      |
| 5670                   | 14.93  | 15.46  | 15.73  | 16.26  | 21.642    | 0.11            | 5          | 22.752            | 24          | -2.248      |
| 5710                   | 17.33  | 17.27  | 17.55  | 16.72  | 23.249    | 0.11            | 5          | 23.359            | 24          | -0.641      |


**Table 14. Conducted Power, MIMO 4x4 - 5dBi Configuration, Test Results**

| Center Frequency (MHz) | Port 1 | Port 2 | Port 3 | Port 4 | Sum (dBm) | Gain (dBi) | Duty Cycle (dB) | EIRP Limit (dBm) | Margin (dB) |
|------------------------|--------|--------|--------|--------|-----------|------------|-----------------|------------------|-------------|
| 5270                   | 12.78  | 12.57  | 12.25  | 12.14  | 18.463    | 5          | 0.11            | 24               | -0.427      |
| 5310                   | 12.58  | 12.96  | 12.37  | 11.75  | 18.457    | 5          | 0.11            | 24               | -0.433      |
| 5510                   | 12.75  | 12.9   | 12.54  | 12.6   | 18.72     | 5          | 0.11            | 24               | -0.17       |
| 5550                   | 12.62  | 12.97  | 12.41  | 12.05  | 18.546    | 5          | 0.11            | 24               | -0.344      |
| 5670                   | 11.56  | 12.57  | 12.11  | 11.74  | 18.033    | 5          | 0.11            | 24               | -0.857      |
| 5710                   | 11.71  | 12.93  | 12.46  | 12.2   | 18.368    | 5          | 0.11            | 24               | -0.522      |


**Table 15. TPC, MIMO 4x4 - 5dBi Configuration, Test Results**

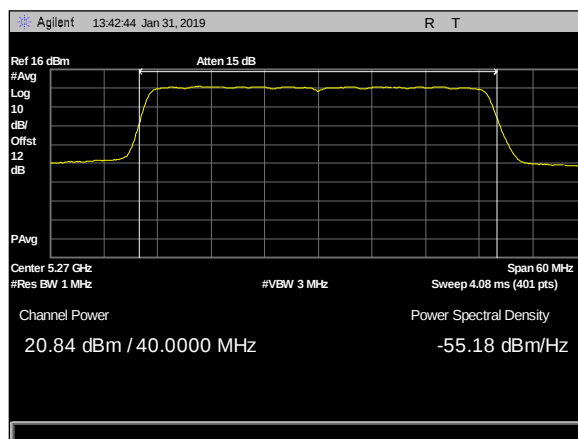


Plot 8. Output Power, 2dBi, 2x2, 5270MHz c1

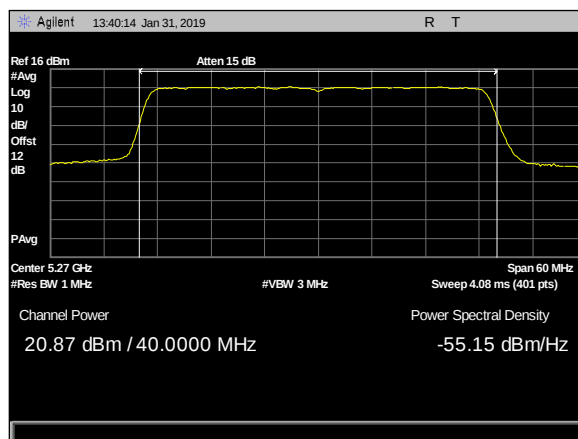


Plot 9. Output Power, 2dBi, 2x2, 5270MHz c2

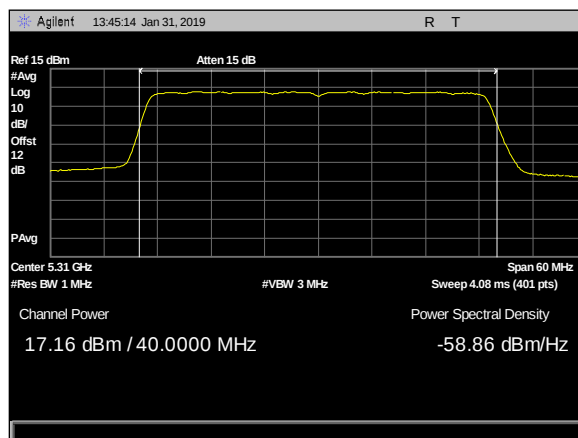


Plot 10. Output Power, 2dBi, 2x2, 5310MHz c1

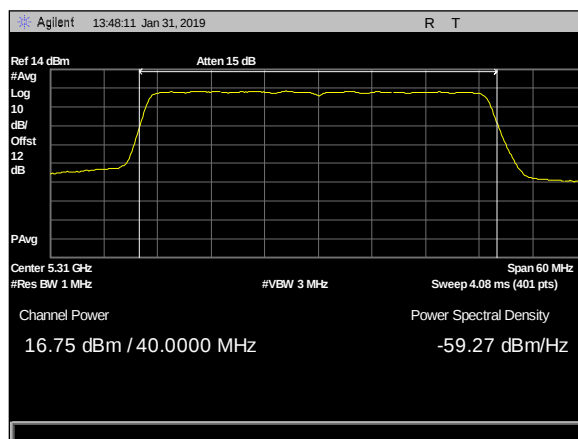


Plot 11. Output Power, 2dBi, 2x2, 5310MHz c2

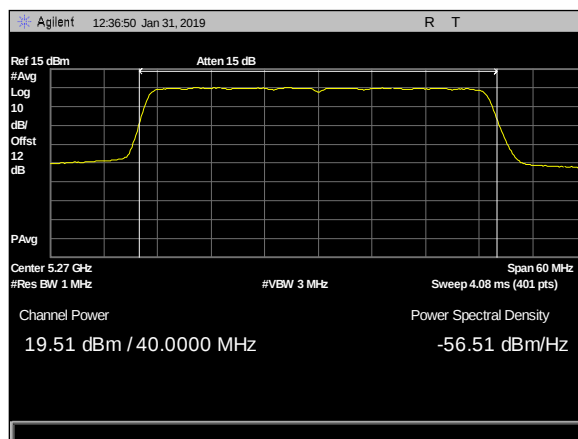


Plot 12. Output Power, 5dBi, 2x2, 5270MHz c1

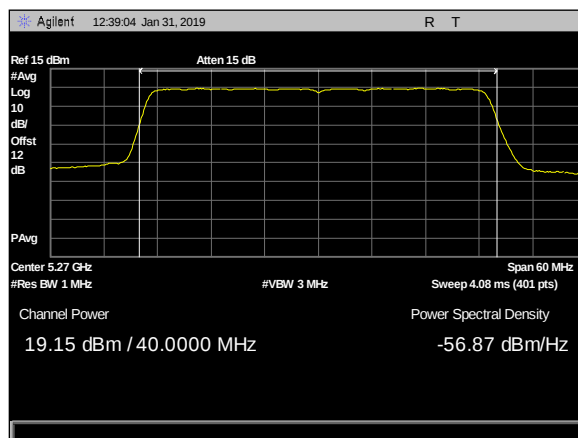


Plot 13. Output Power, 5dBi, 2x2, 5270MHz c2

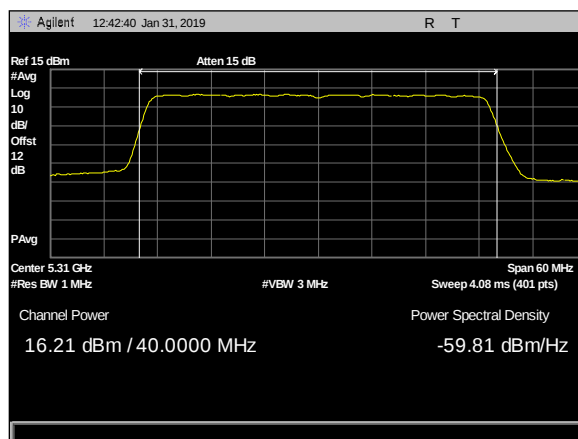


Plot 14. Output Power, 5dBi, 2x2, 5310MHz c1

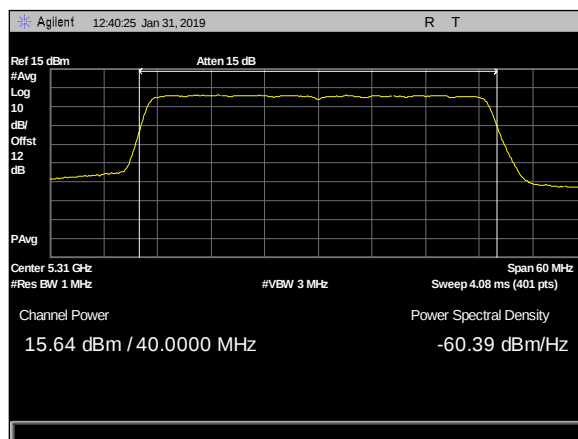


Plot 15. Output Power, 5dBi, 2x2, 5310MHz c2

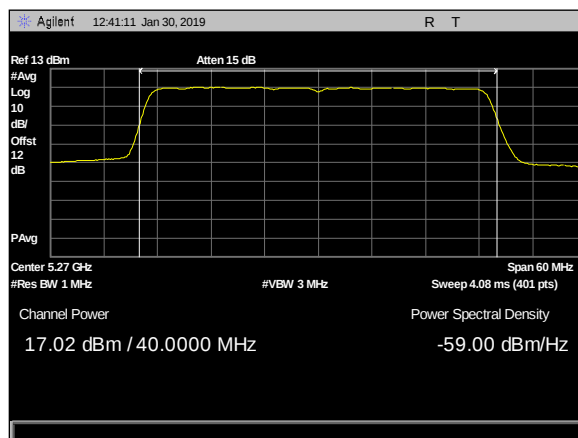


Plot 16. Output Power, 2dBi & 5dBi, 4x4, 5270MHz c1

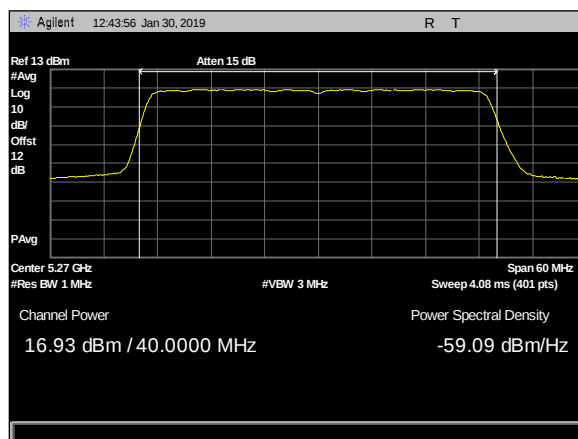


Plot 17. Output Power, 2dBi & 5dBi, 4x4, 5270MHz c2

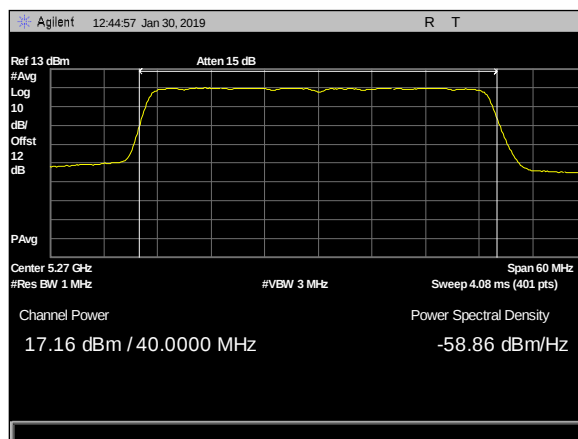


Plot 18. Output Power, 2dBi & 5dBi, 4x4, 5270MHz c3

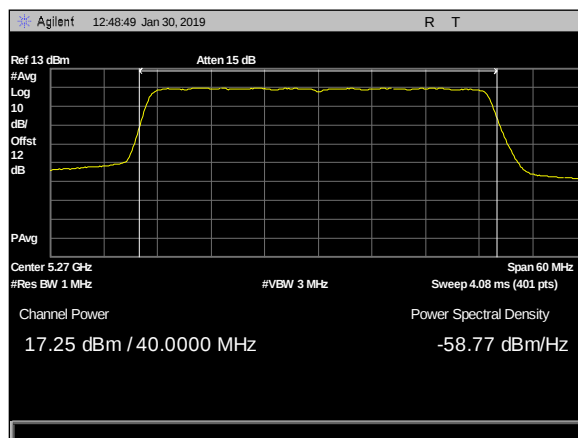


Plot 19. Output Power, 2dBi & 5dBi, 4x4, 5270MHz c4

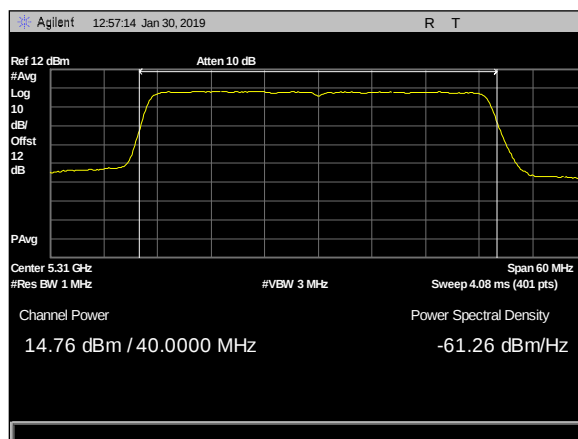


Plot 20. Output Power, 2dBi & 5dBi, 4x4, 5310MHz c1

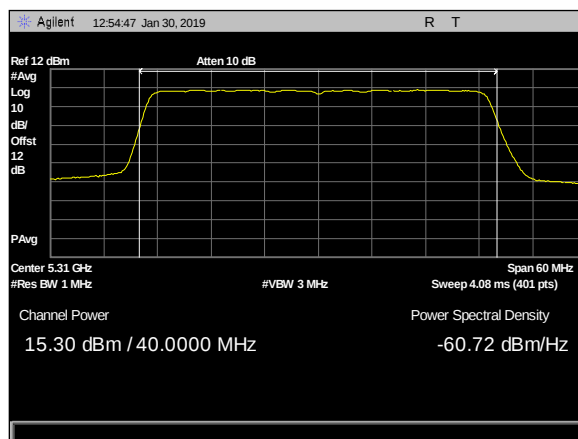


Plot 21. Output Power, 2dBi & 5dBi, 4x4, 5310MHz c2

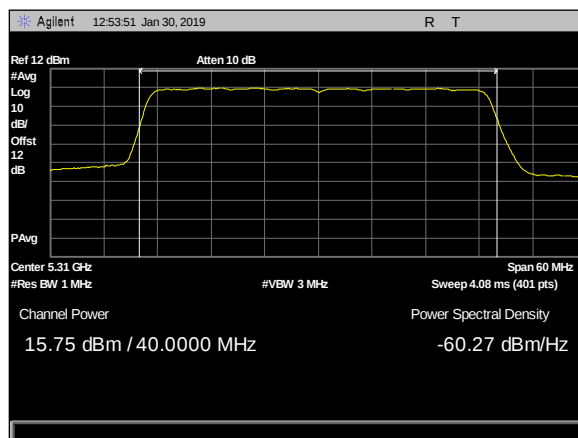


Plot 22. Output Power, 2dBi & 5dBi, 4x4, 5310MHz c3

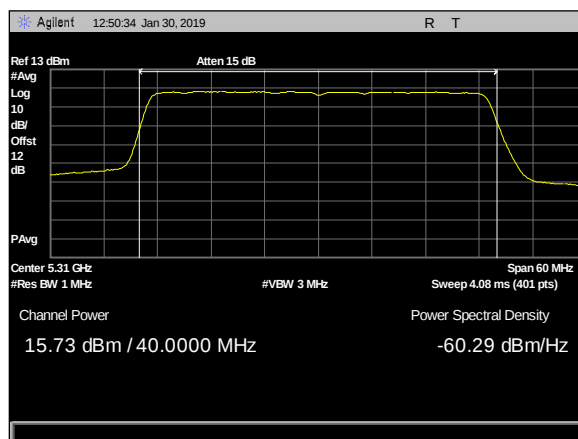


Plot 23. Output Power, 2dBi & 5dBi, 4x4, 5310MHz c4

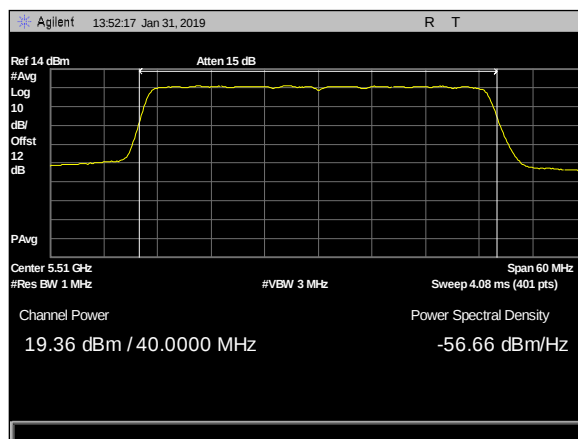


Plot 24. Output Power, 2dBi, 2x2, 5510MHz c1

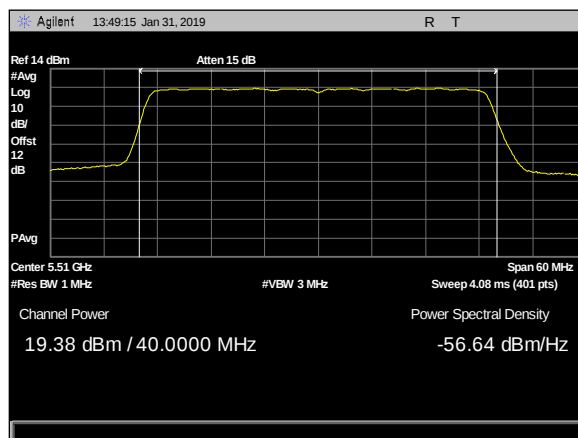


Plot 25. Output Power, 2dBi, 2x2, 5510MHz c2

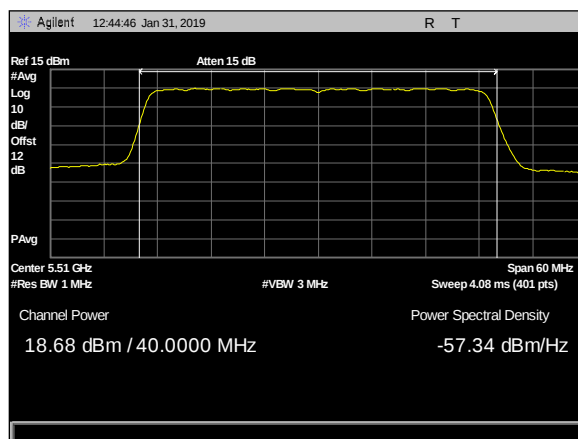


Plot 26. Output Power, 5dBi, 2x2, 5510MHz c1

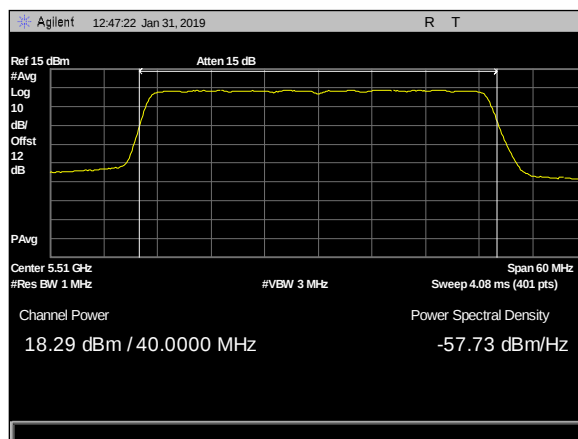


Plot 27. Output Power, 5dBi, 2x2, 5510MHz c2

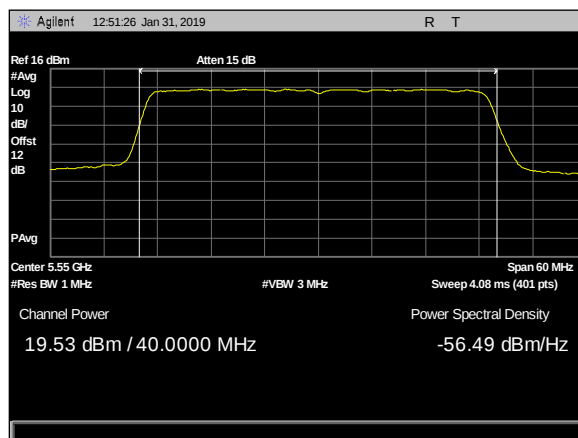


Plot 28. Output Power, 2dBi & 5dBi, 2x2, 5550MHz c1

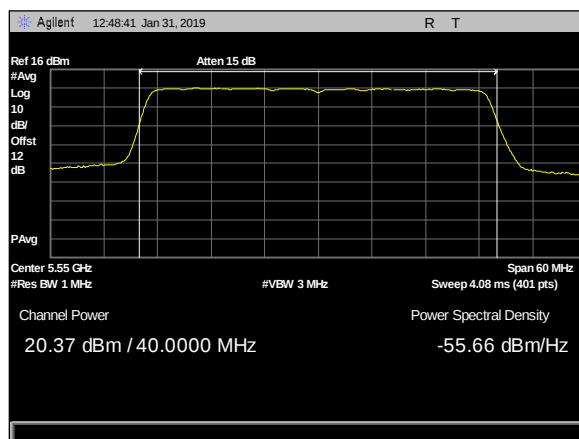


Plot 29. Output Power, 2dBi & 5dBi, 2x2, 5550MHz c2

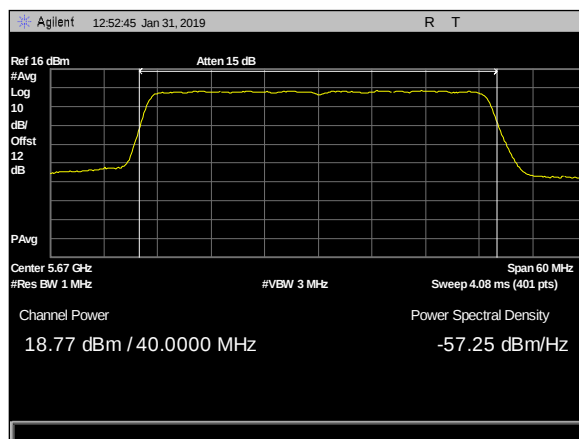


Plot 30. Output Power, 2dBi & 5dBi, 2x2, 5670MHz c1

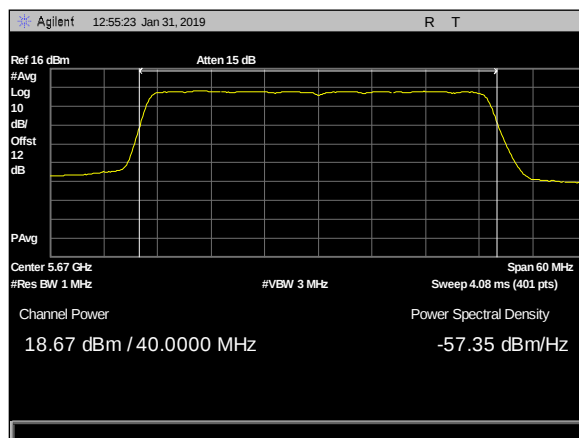


Plot 31. Output Power, 2dBi & 5dBi, 2x2, 5670MHz c2

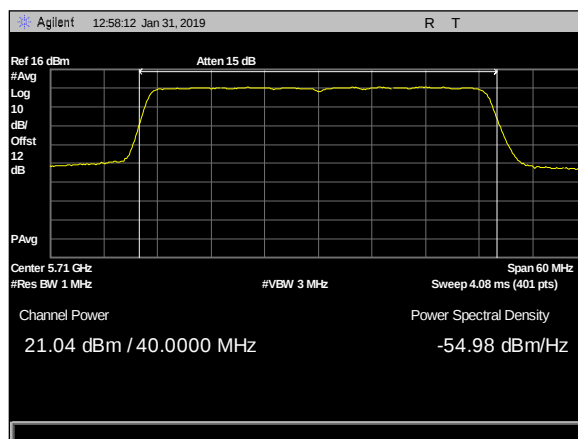


Plot 32. Output Power, 2dBi & 5dBi, 2x2, 5710MHz c1

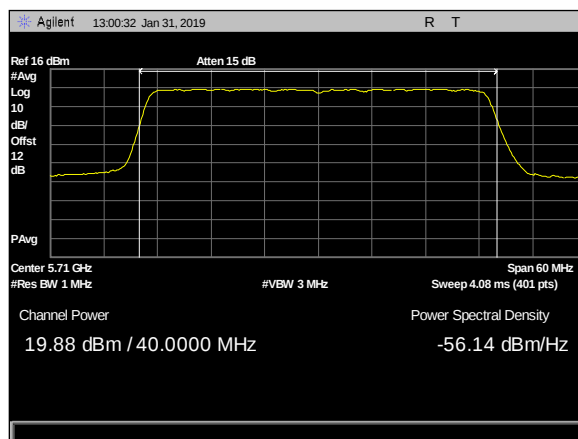


Plot 33. Output Power, 2dBi & 5dBi, 2x2, 5710MHz c2

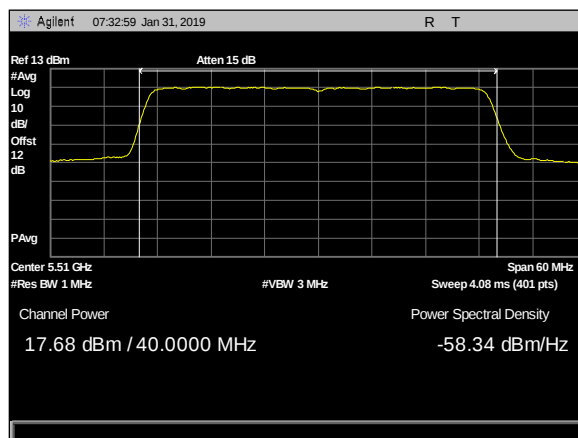


Plot 34. Output Power, 2dBi 4x4, 5510MHz c1

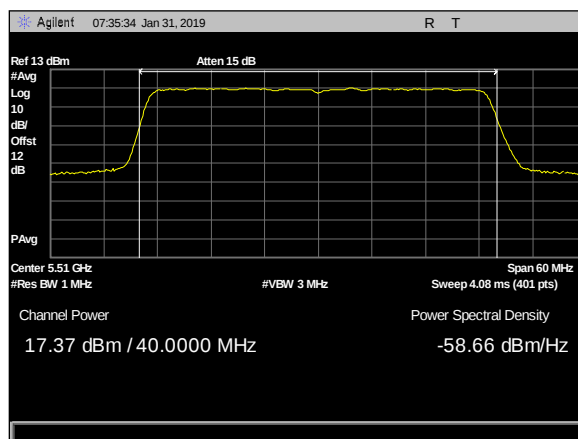


Plot 35. Output Power, 2dBi 4x4, 5510MHz c2

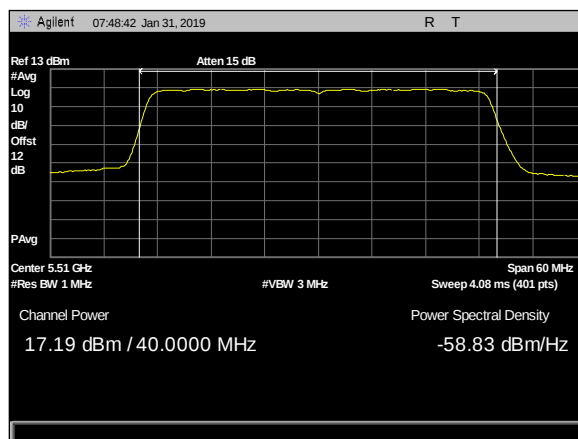


Plot 36. Output Power, 2dBi 4x4, 5510MHz c3

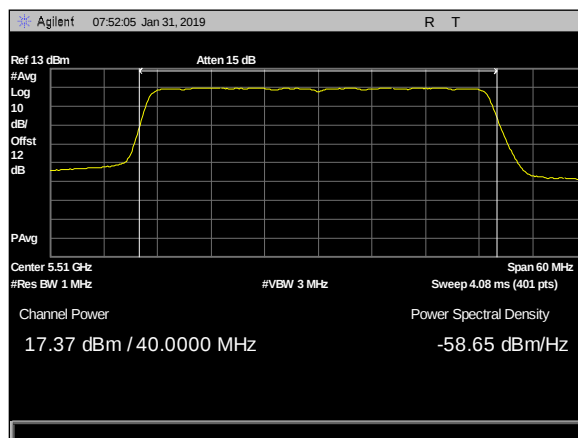


Plot 37. Output Power, 2dBi 4x4, 5510MHz c4

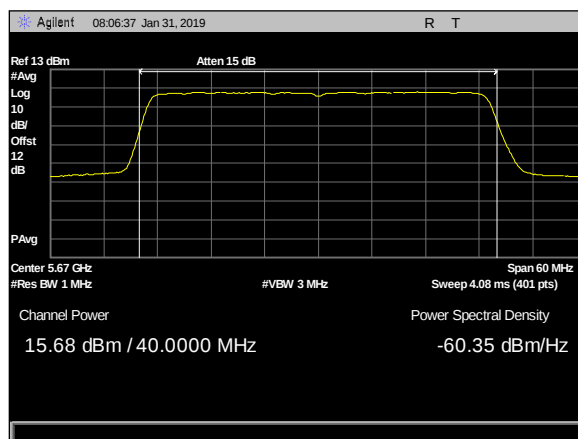


Plot 38. Output Power, 2dBi 4x4, 5670MHz c1

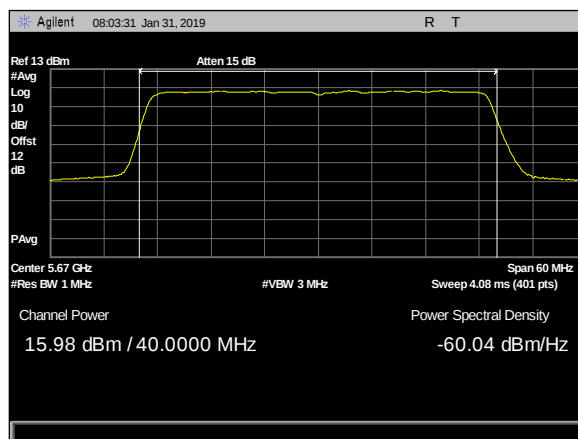


Plot 39. Output Power, 2dBi 4x4, 5670MHz c2

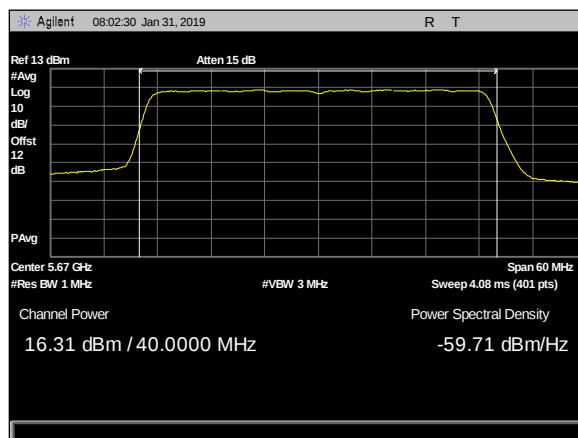


Plot 40. Output Power, 2dBi 4x4, 5670MHz c3

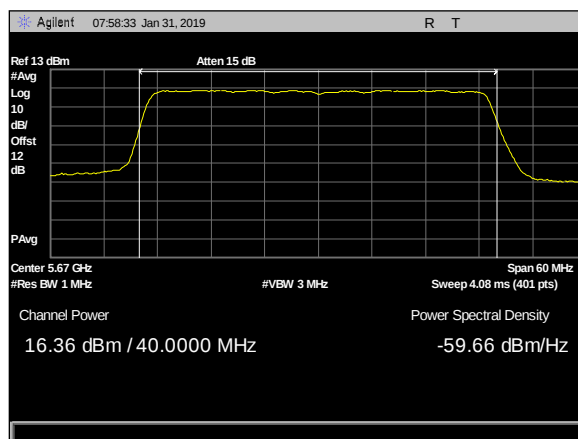


Plot 41. Output Power, 2dBi 4x4, 5670MHz c4

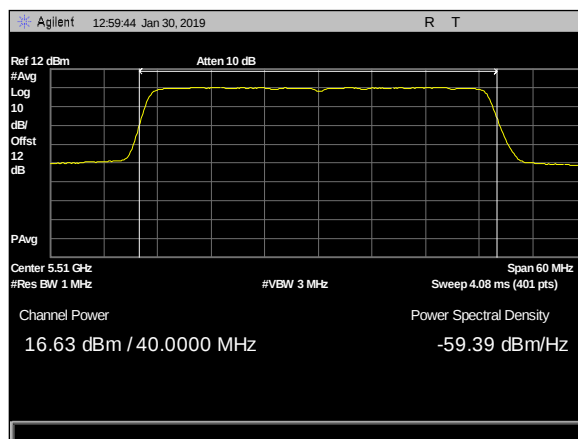


Plot 42. Output Power, 5dBi 4x4, 5510MHz c1

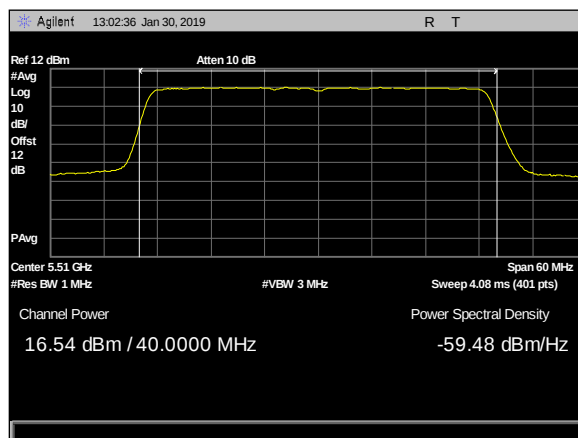


Plot 43. Output Power, 5dBi, 4x4, 5510MHz c2

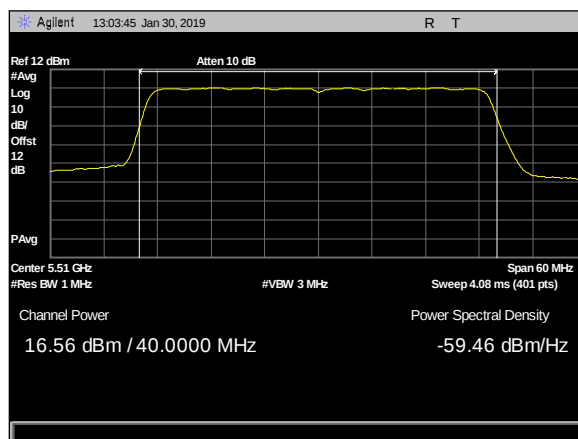


Plot 44. Output Power, 5dBi, 4x4, 5510MHz c3

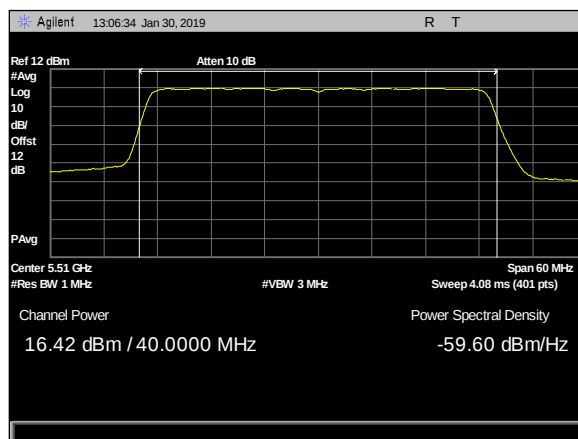


Plot 45. Output Power, 5dBi, 4x4, 5510MHz c4

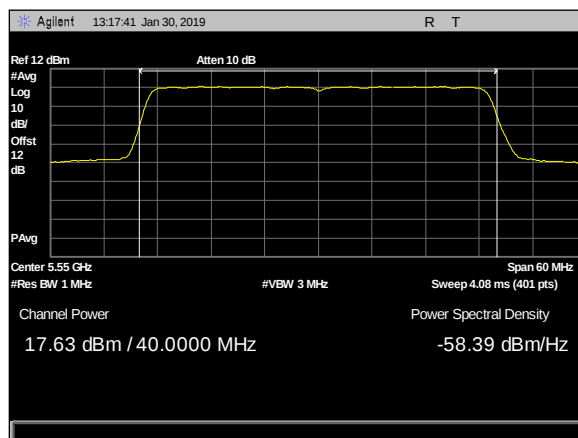


Plot 46. Output Power, 2dBi & 5dBi, 4x4, 5550MHz c1

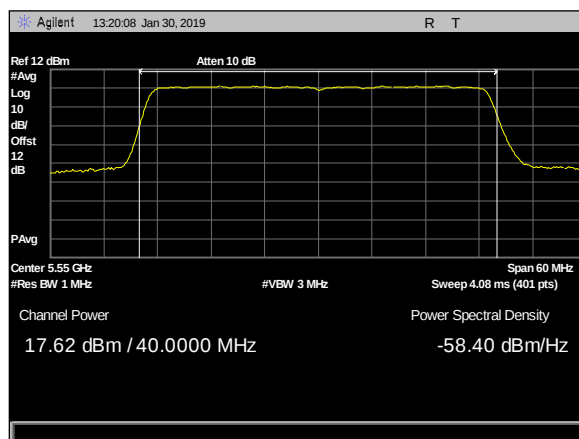


Plot 47. Output Power, 2dBi & 5dBi, 4x4, 5550MHz c2

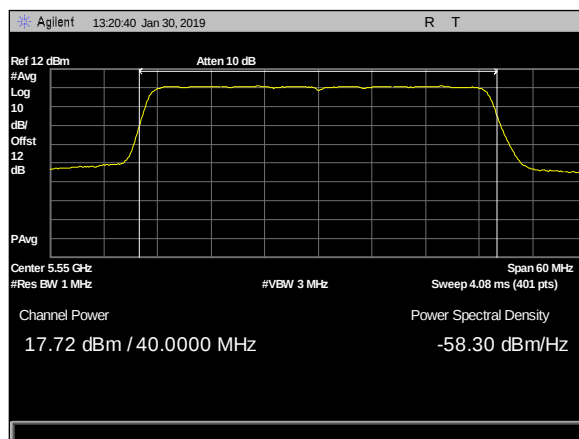


Plot 48. Output Power, 2dBi & 5dBi, 4x4, 5550MHz c3

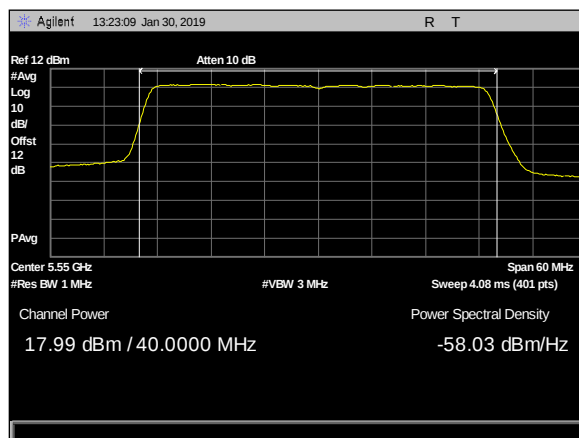


Plot 49. Output Power, 2dBi & 5dBi, 4x4, 5550MHz c4

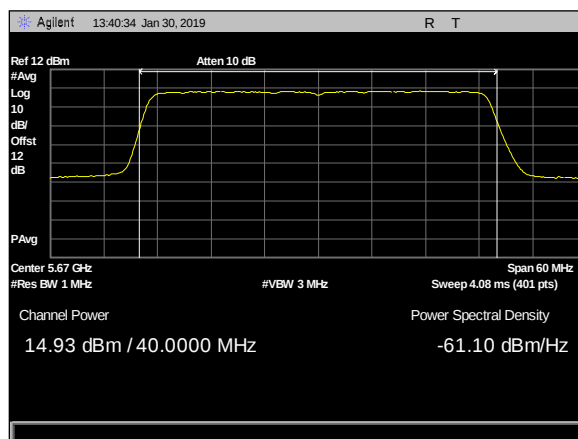


Plot 50. Output Power, 5dBi, 4x4, 5670MHz c1

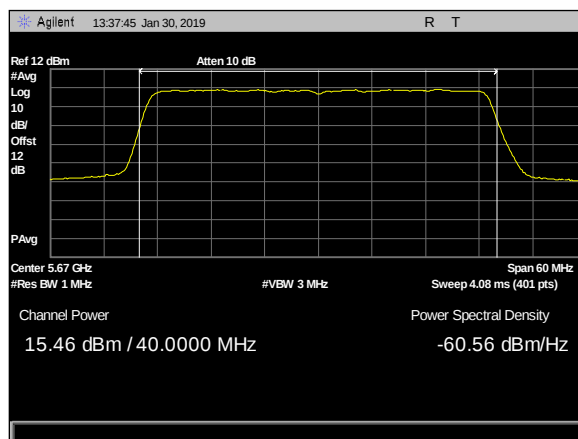


Plot 51. Output Power, 5dBi, 4x4, 5670MHz c2

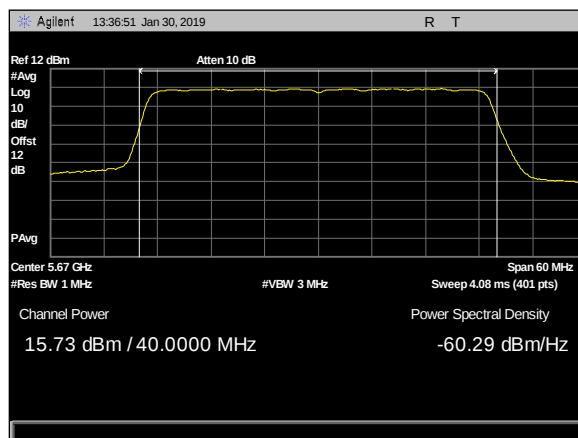


Plot 52. Output Power, 5dBi, 4x4, 5670MHz c3

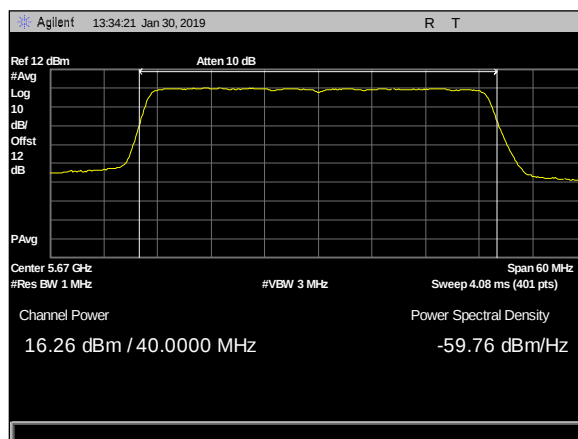


Plot 53. Output Power, 5dBi, 4x4, 5670MHz c4

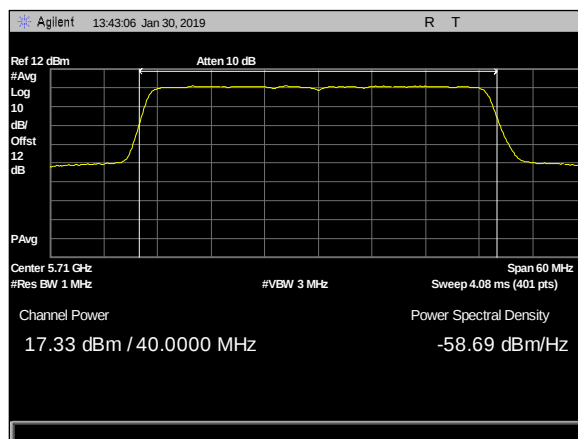


Plot 54. Output Power, 2dBi & 5dBi, 4x4, 5710MHz c1

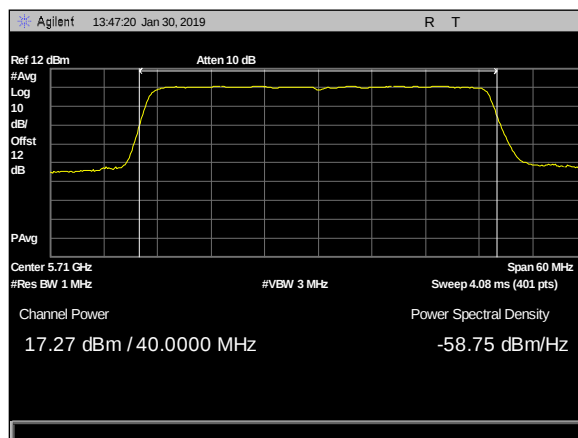


Plot 55. Output Power, 2dBi & 5dBi, 4x4, 5710MHz c2

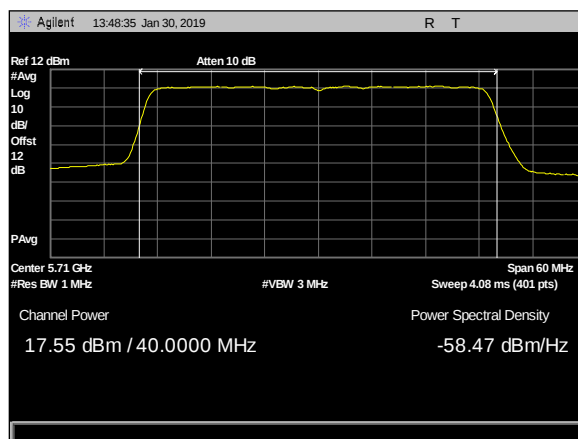


Plot 56. Output Power, 2dBi & 5dBi, 4x4, 5710MHz c3

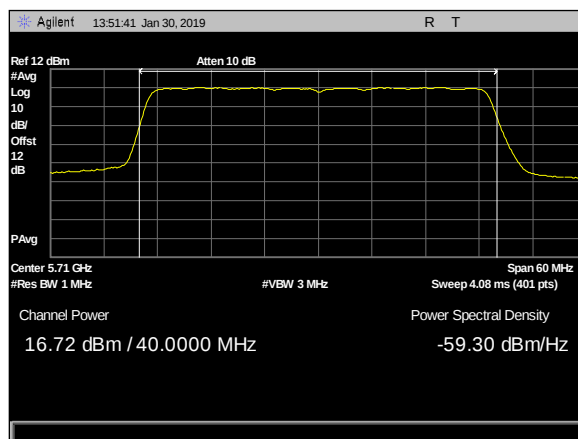


Plot 57. Output Power, 2dBi & 5dBi, 4x4, 5710MHz c4

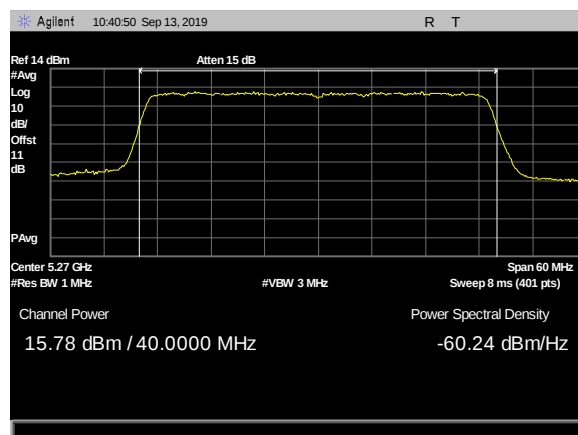


Plot 58. TPC, 5dBi, 2x2, 5270MHz c0

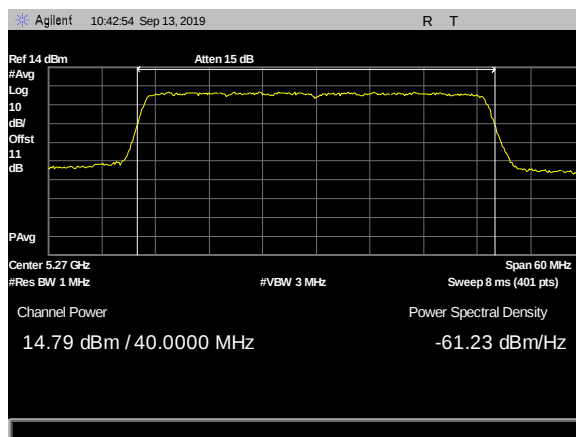


Plot 59. TPC, 5dBi, 2x2, 5270MHz c1

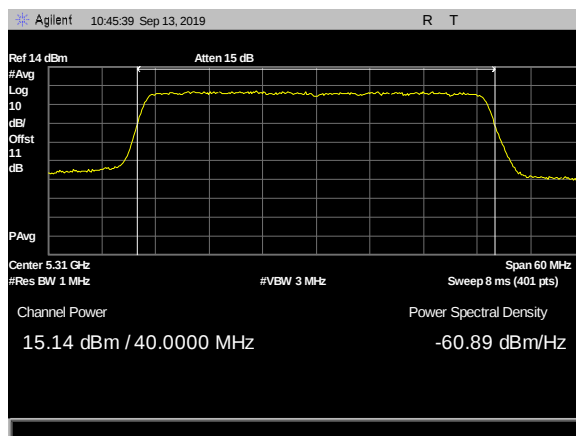


Plot 60. TPC, 5dBi, 2x2, 5310MHz c0

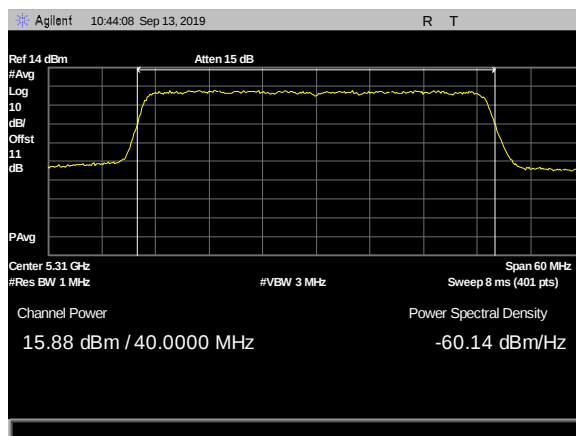


Plot 61. TPC, 5dBi, 2x2, 5310MHz c1

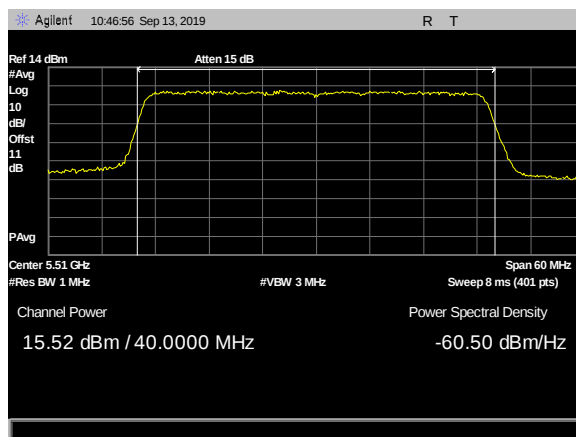


Plot 62. TPC, 5dBi, 2x2, 5510MHz c0

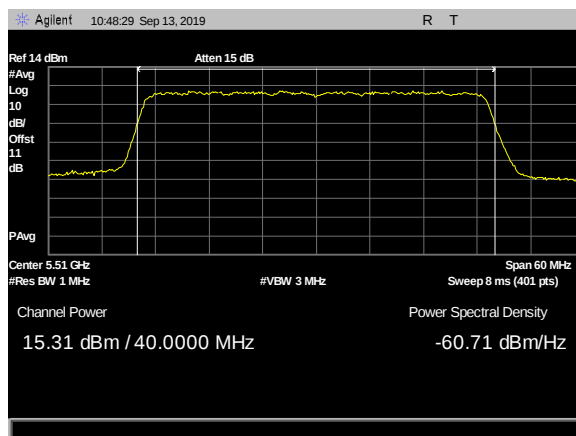


Plot 63. TPC, 5dBi, 2x2, 5510MHz c1

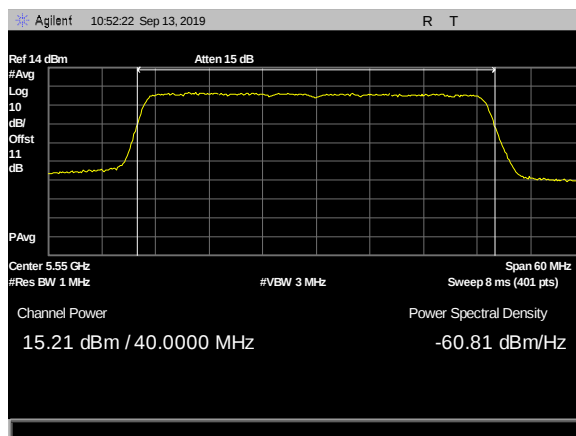


Plot 64. TPC, 5dBi, 2x2, 5550MHz c0

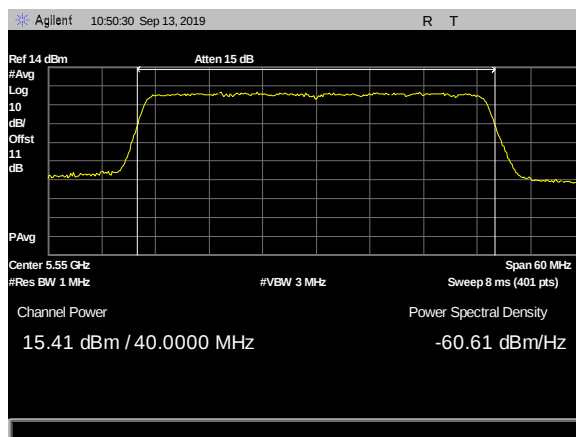


Plot 65. TPC, 5dBi, 2x2, 5550MHz c1

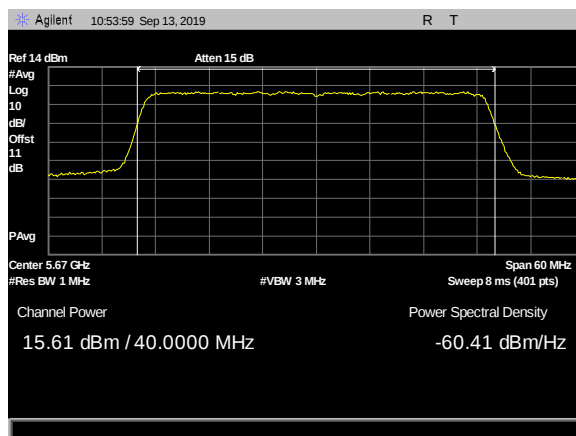


Plot 66. TPC, 5dBi, 2x2, 5670MHz c0

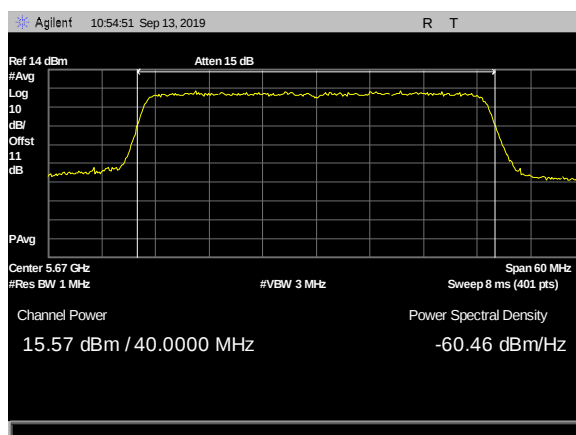


Plot 67. TPC, 5dBi, 2x2, 5670MHz c1

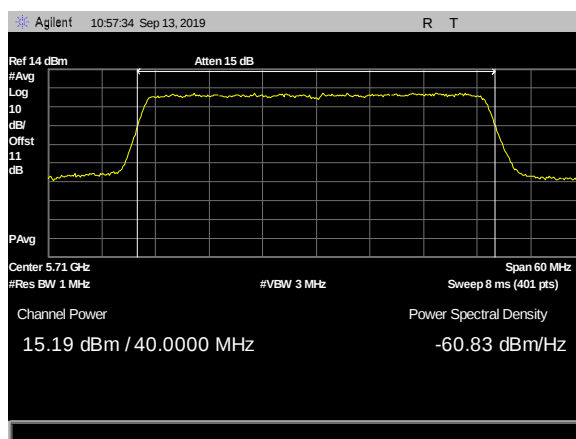


Plot 68. TPC, 5dBi, 2x2, 5710MHz c0

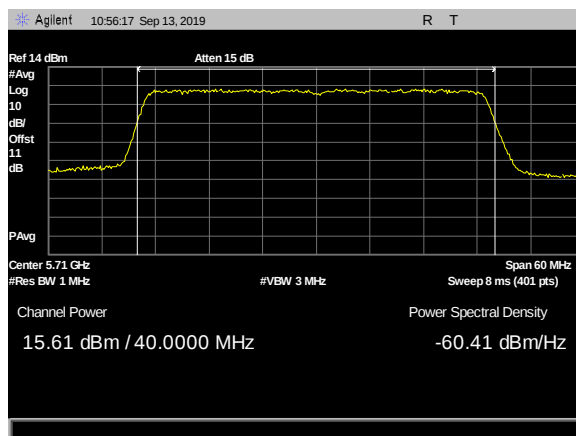


Plot 69. TPC, 5dBi, 2x2, 5710MHz c1

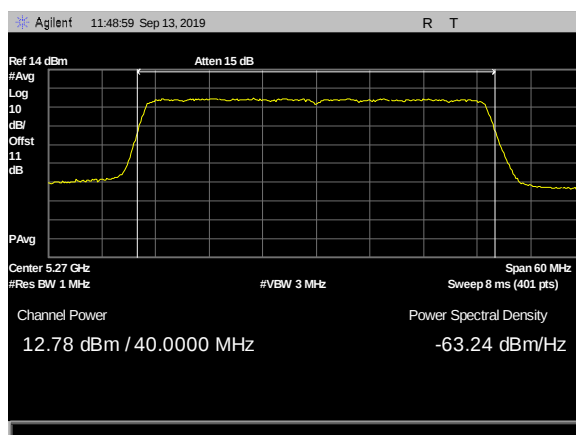


Plot 70. TPC, 5dBi, 4x4, 5270MHz c0

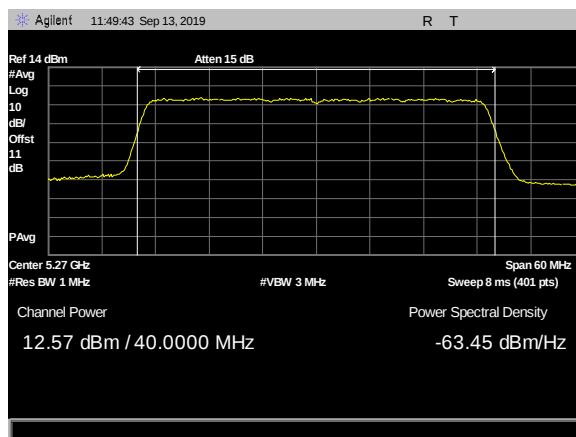


Plot 71. TPC, 5dBi, 4x4, 5270MHz c1

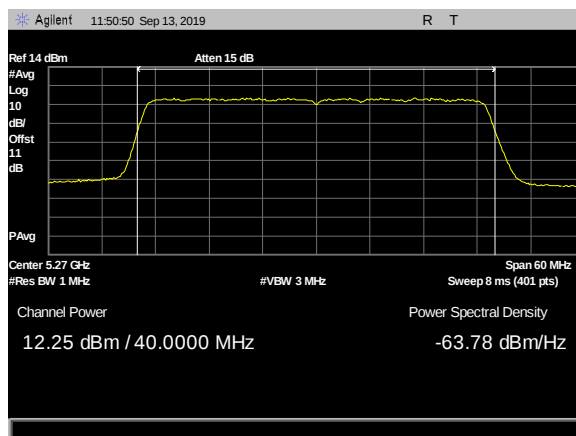


Plot 72. TPC, 5dBi, 4x4, 5270MHz c2

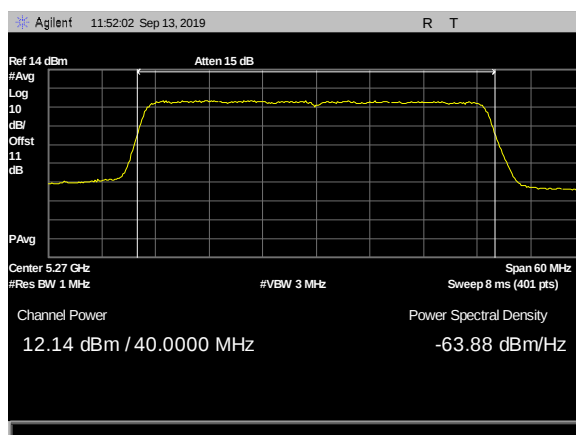


Plot 73. TPC, 5dBi, 4x4, 5270MHz c3

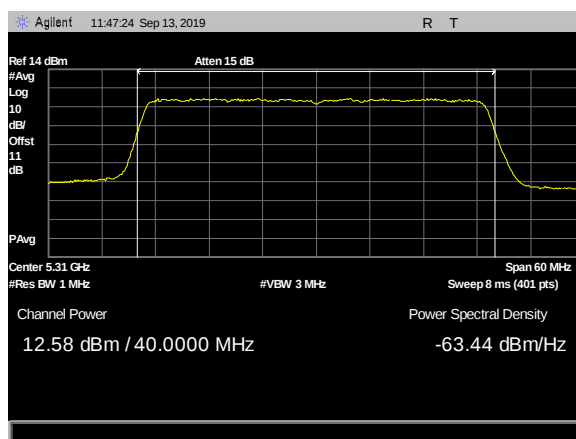


Plot 74. TPC, 5dBi, 4x4, 5310MHz c0

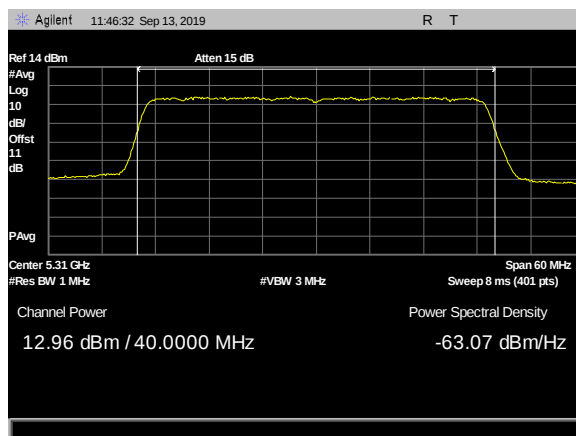


Plot 75. TPC, 5dBi, 4x4, 5310MHz c1

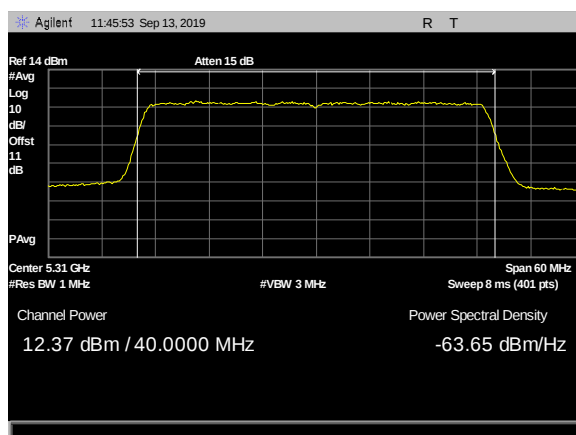


Plot 76. TPC, 5dBi, 4x4, 5310MHz c2

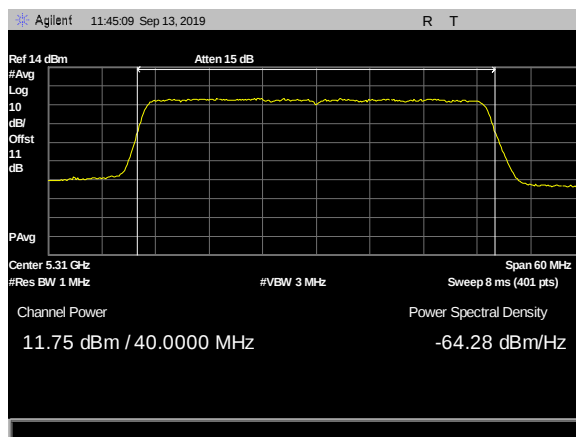


Plot 77. TPC, 5dBi, 4x4, 5310MHz c4

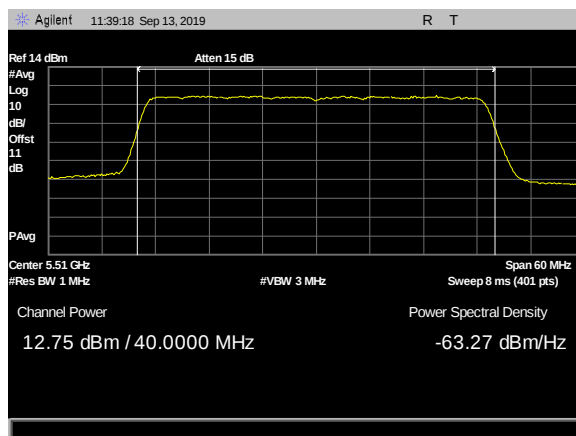


Plot 78. TPC, 5dBi, 4x4, 5510MHz c0

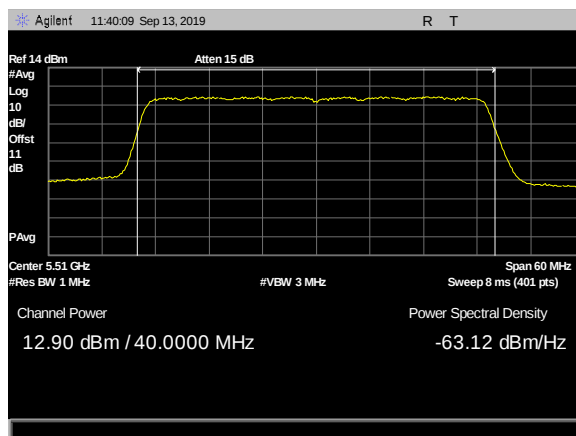


Plot 79. TPC, 5dBi, 4x4, 5510MHz c1

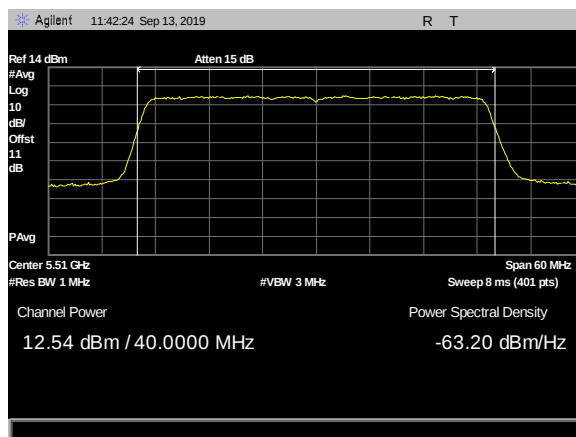


Plot 80. TPC, 5dBi, 4x4, 5510MHz c2

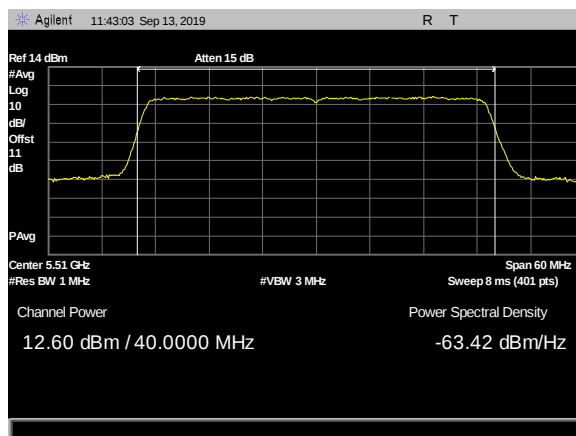


Plot 81. TPC, 5dBi, 4x4, 5510MHz c3

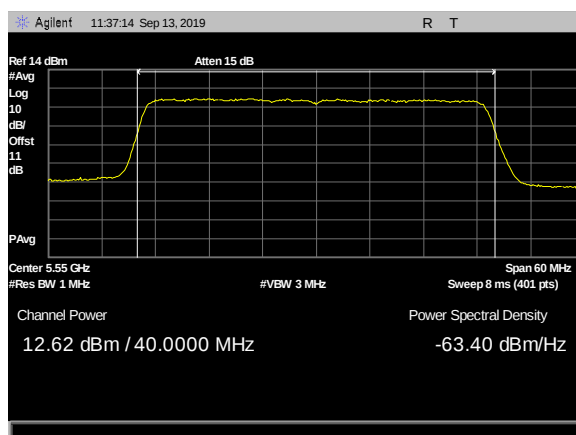


Plot 82. TPC, 5dBi, 4x4, 5550MHz c0

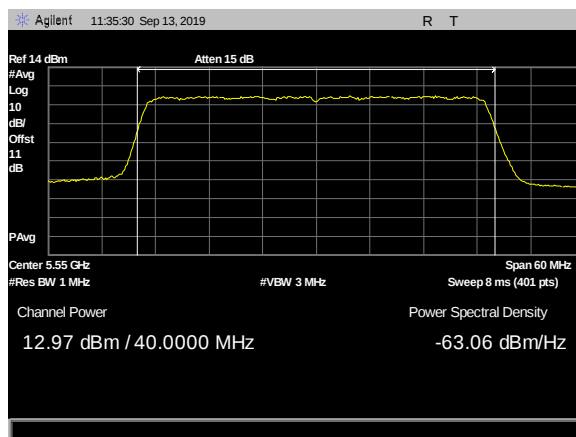


Plot 83. TPC, 5dBi, 4x4, 5550MHz c1

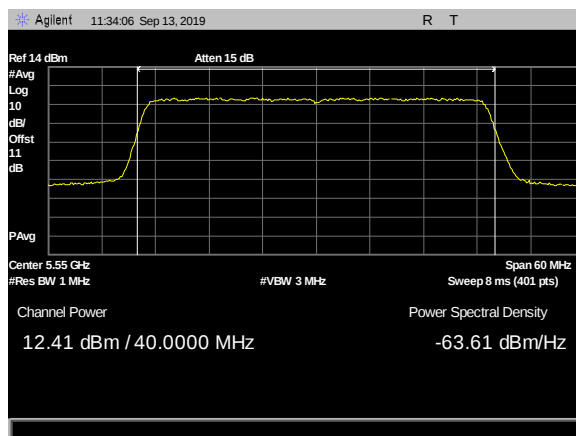


Plot 84. TPC, 5dBi, 4x4, 5550MHz c2

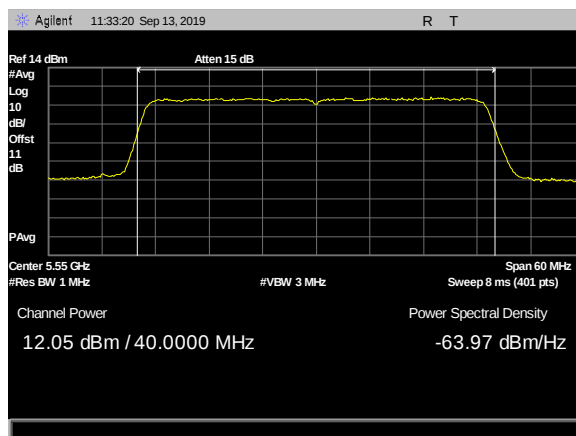


Plot 85. TPC, 5dBi, 4x4, 5550MHz c3

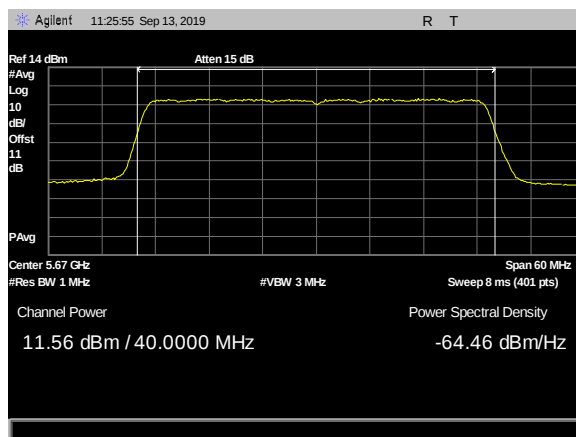


Plot 86. TPC, 5dBi, 4x4, 5670MHz c0

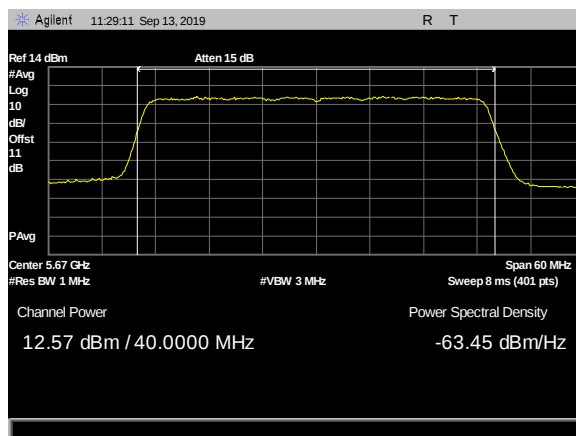


Plot 87. TPC, 5dBi, 4x4, 5670MHz c1

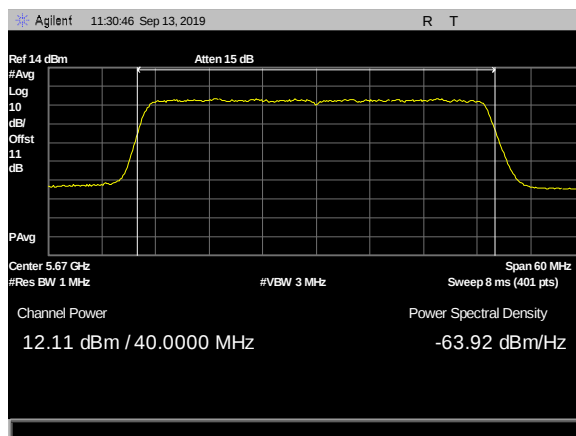


Plot 88. TPC, 5dBi, 4x4, 5670MHz c2

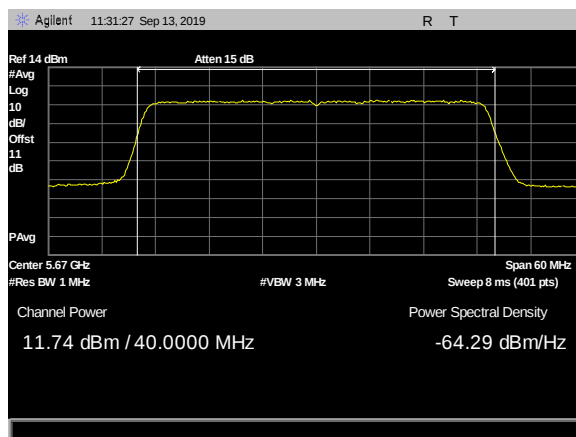


Plot 89. TPC, 5dBi, 4x4, 5670MHz c3

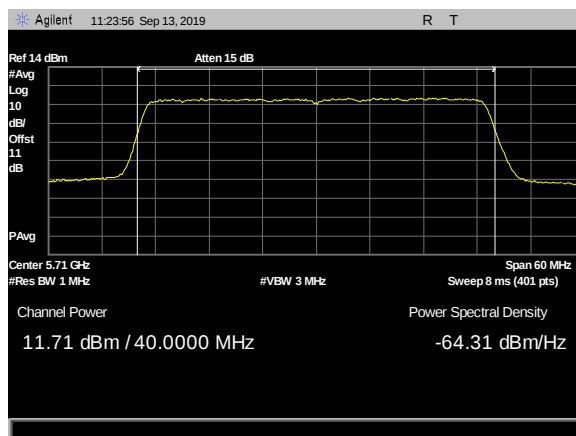


Plot 90. TPC, 5dBi, 4x4, 5710MHz c0

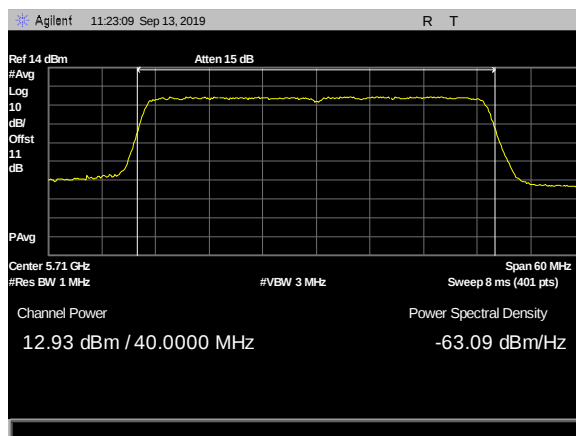

Plot 91. TPC, 5dBi, 4x4, 5710MHz c1

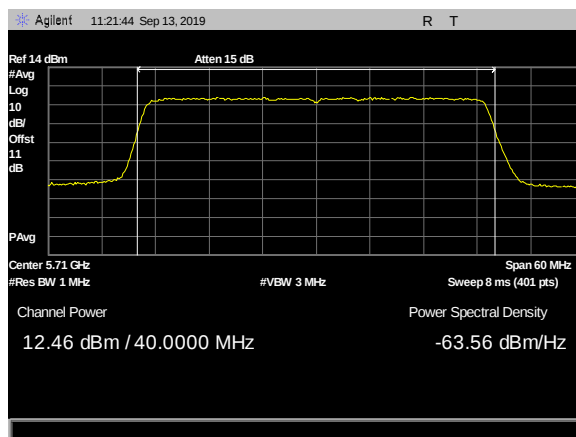

Plot 92. TPC, 5dBi, 4x4, 5710MHz c2

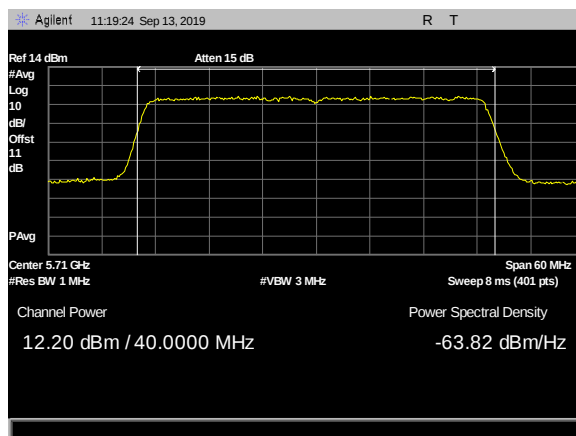

Plot 93. TPC, 5dBi, 4x4, 5710MHz c3

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(a)(2) Maximum Power Spectral Density

**Test Requirements:** §15.407(a)(2): In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**Test Procedure:** The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. The multiple outputs are un-correlated. Its power was measured according method SA-2, as described in KDB 789033 D02 General UNII Test Procedures v02r01.

**Test Results:** The EUT as tested is compliant with the requirements of this section.

**Test Engineer(s):** Donald Salguero

**Test Date(s):** January 3, 2019



| Center Frequency (MHz) | Port 1 | Port 2 | Sum (dBm) | Duty Cycle (dB) | Gain (dBi) | Cond. PSD (dBm) | Limit (dBm) | Margin (dB) |
|------------------------|--------|--------|-----------|-----------------|------------|-----------------|-------------|-------------|
| 5270                   | 6.65   | 6.081  | 9.385     | 0.11            | 2          | 9.495           | 11          | -1.505      |
| 5310                   | 2.505  | 2.409  | 5.468     | 0.11            | 2          | 5.578           | 11          | -5.422      |
| 5510                   | 4.984  | 4.645  | 7.828     | 0.11            | 2          | 7.938           | 11          | -3.062      |
| 5550                   | 4.951  | 5.826  | 8.421     | 0.11            | 2          | 8.531           | 11          | -2.469      |
| 5670                   | 4.126  | 4.136  | 7.141     | 0.11            | 2          | 7.251           | 11          | -3.749      |
| 5710                   | 6.39   | 5.228  | 8.858     | 0.11            | 2          | 8.968           | 11          | -2.032      |

Table 16. Conducted Power Spectral Density, MIMO 2x2 - 2dBi Configuration, Test Results

| Center Frequency (MHz) | Port 1 | Port 2 | Sum (dBm) | Duty Cycle (dB) | Gain (dBi) | Cond. PSD (dBm) | Limit (dBm) | Margin (dB) |
|------------------------|--------|--------|-----------|-----------------|------------|-----------------|-------------|-------------|
| 5270                   | 5.014  | 4.608  | 7.826     | 0.11            | 5          | 7.936           | 11          | -3.064      |
| 5310                   | 1.688  | 1.047  | 4.39      | 0.11            | 5          | 4.5             | 11          | -6.5        |
| 5510                   | 4.043  | 3.733  | 6.901     | 0.11            | 5          | 7.011           | 11          | -3.989      |
| 5550                   | 4.951  | 5.826  | 8.421     | 0.11            | 5          | 8.531           | 11          | -2.469      |
| 5670                   | 4.126  | 4.136  | 7.141     | 0.11            | 5          | 7.251           | 11          | -3.749      |
| 5710                   | 6.39   | 5.228  | 8.858     | 0.11            | 5          | 8.968           | 11          | -2.032      |


**Table 17. Conducted Power Spectral Density, MIMO 2x2 - 5dBi Configuration, Test Results**

| Center Frequency (MHz) | Port 1 | Port 2 | Port 3 | Port 4 | Sum (dBm) | Duty Cycle (dB) | Gain (dBi) | Cond. PSD (dBm) | Limit (dBm) | Margin (dB) |
|------------------------|--------|--------|--------|--------|-----------|-----------------|------------|-----------------|-------------|-------------|
| 5270                   | 2.344  | 2.235  | 2.851  | 2.706  | 8.562     | 0.11            | 2          | 8.672           | 11          | -2.328      |
| 5310                   | 0.165  | 0.682  | 1.503  | 1.064  | 6.902     | 0.11            | 2          | 7.012           | 11          | -3.988      |
| 5510                   | 2.924  | 2.798  | 3.006  | 2.76   | 8.894     | 0.11            | 2          | 9.004           | 11          | -1.996      |
| 5550                   | 2.811  | 2.79   | 3.087  | 3.467  | 9.068     | 0.11            | 2          | 9.178           | 11          | -1.822      |
| 5670                   | 0.91   | 1.25   | 1.729  | 1.395  | 7.352     | 0.11            | 2          | 7.462           | 11          | -3.538      |
| 5710                   | 2.401  | 2.932  | 2.754  | 1.939  | 8.543     | 0.11            | 2          | 8.653           | 11          | -2.347      |


**Table 18. Conducted Power Spectral Density, MIMO 4x4 - 2dBi Configuration, Test Results**

| Center Frequency (MHz) | Port 1 | Port 2 | Port 3 | Port 4 | Sum (dBm) | Duty Cycle (dB) | Gain (dBi) | Cond. PSD (dBm) | Limit (dBm) | Margin (dB) |
|------------------------|--------|--------|--------|--------|-----------|-----------------|------------|-----------------|-------------|-------------|
| 5270                   | 2.344  | 2.235  | 2.851  | 2.706  | 8.562     | 0.11            | 5          | 8.672           | 11          | -2.328      |
| 5310                   | 0.165  | 0.682  | 1.503  | 1.064  | 6.902     | 0.11            | 5          | 7.012           | 11          | -3.988      |
| 5510                   | 1.837  | 1.947  | 2.012  | 1.623  | 7.878     | 0.11            | 5          | 7.988           | 11          | -3.012      |
| 5550                   | 2.811  | 2.79   | 3.087  | 3.467  | 9.068     | 0.11            | 5          | 9.178           | 11          | -1.822      |
| 5670                   | 0.381  | 0.847  | 1.354  | 1.566  | 7.082     | 0.11            | 5          | 7.192           | 11          | -3.808      |
| 5710                   | 2.401  | 2.932  | 2.754  | 1.939  | 8.543     | 0.11            | 5          | 8.653           | 11          | -2.347      |


**Table 19. Conducted Power Spectral Density, MIMO 4x4 - 5dBi Configuration, Test Results**

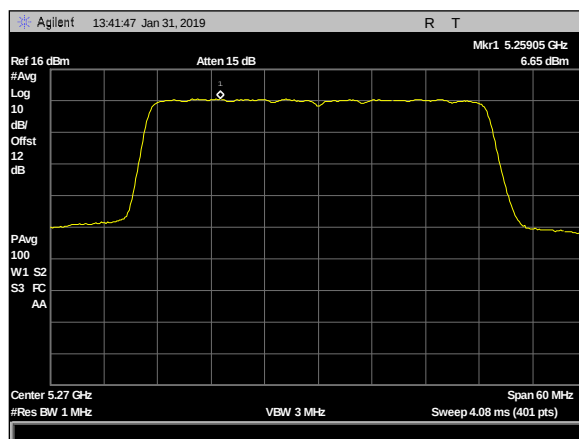


Plot 94. Power Spectral Density, 2dBi, 2x2, 5270MHz c1

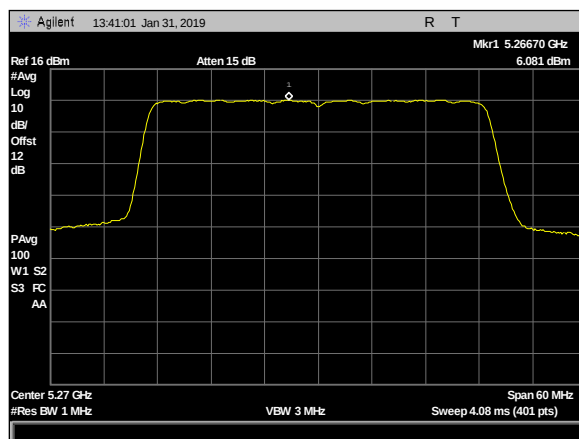


Plot 95. Power Spectral Density, 2dBi, 2x2, 5270MHz c2

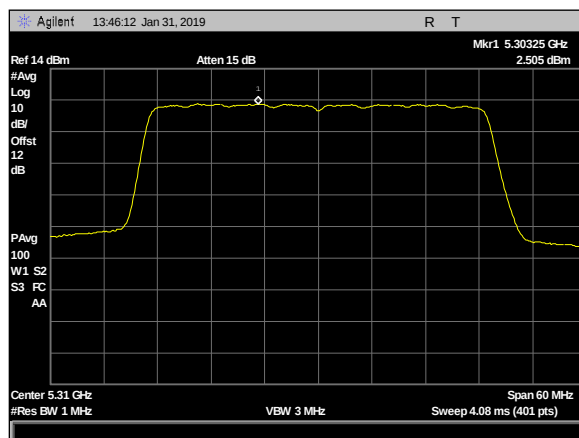


Plot 96. Power Spectral Density, 2dBi, 2x2, 5310MHz c1

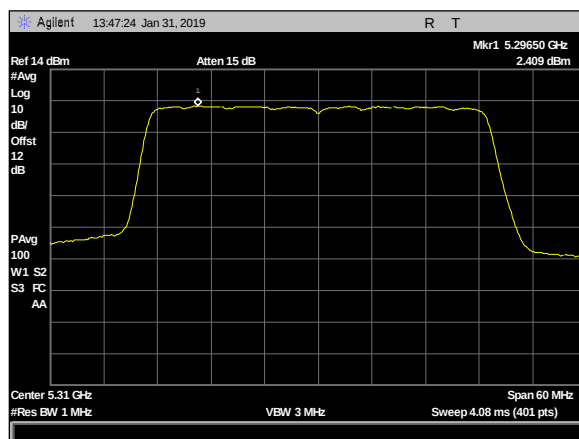


Plot 97. Power Spectral Density, 2dBi, 2x2, 5310MHz c2

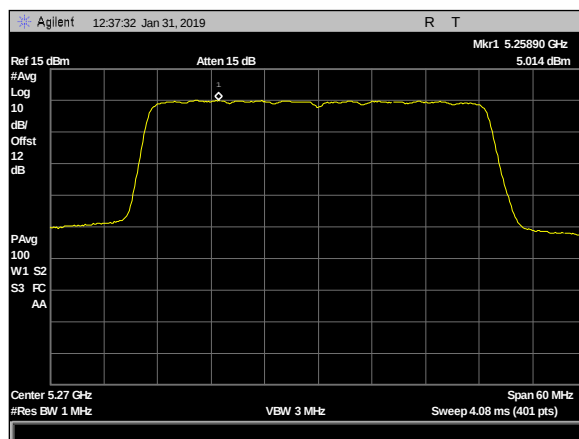


Plot 98. Power Spectral Density, 5dBi, 2x2, 5270MHz c1

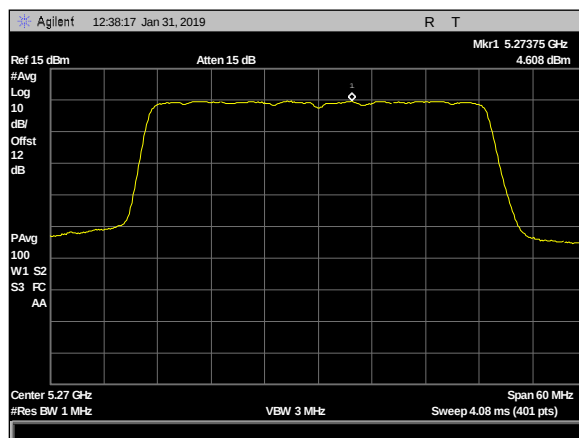


Plot 99. Power Spectral Density, 5dBi, 2x2, 5270MHz c2

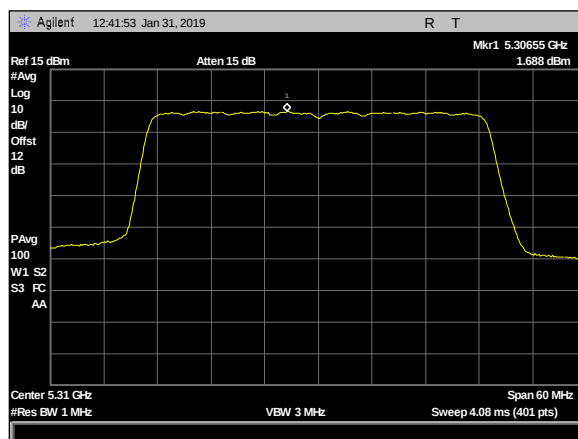


Plot 100. Power Spectral Density, 5dBi, 2x2, 5310MHz c1

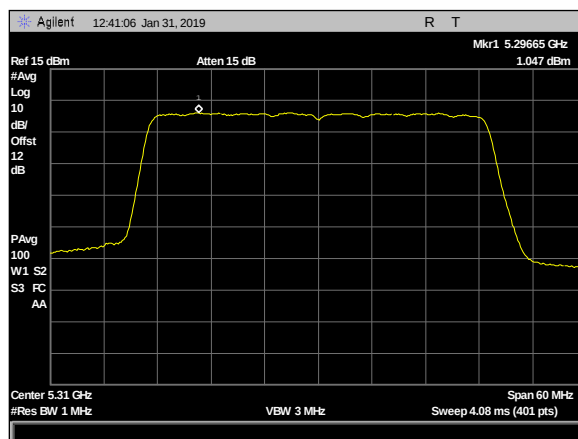


Plot 101. Power Spectral Density, 5dBi, 2x2, 5310MHz c2

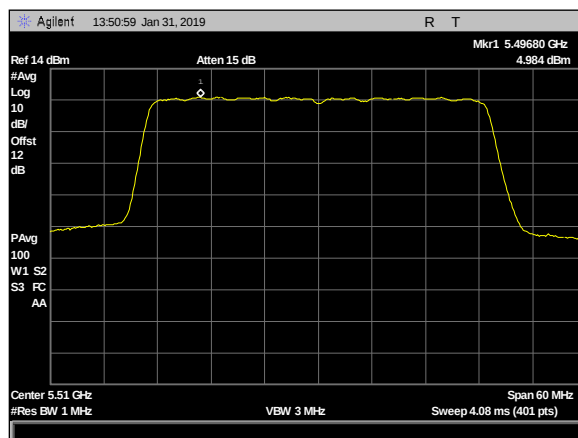


Plot 102. Power Spectral Density, 2dBi, 2x2, 5510MHz c1

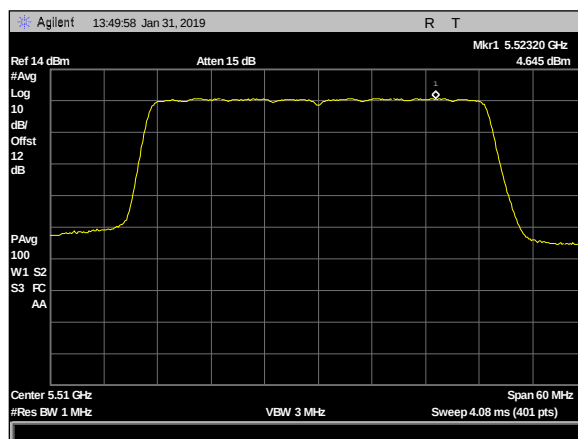


Plot 103. Power Spectral Density, 2dBi, 2x2, 5510MHz c2

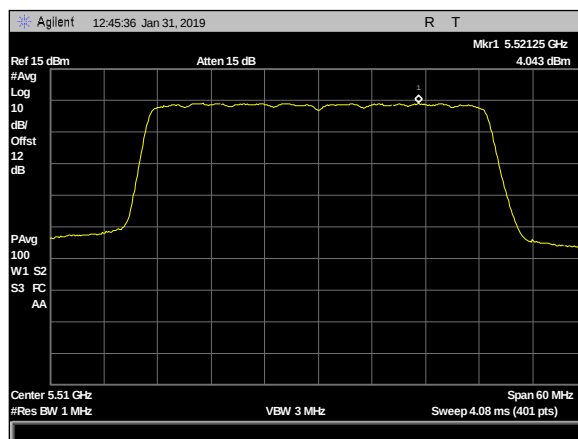


Plot 104. Power Spectral Density, 5dBi, 2x2, 5510MHz c1

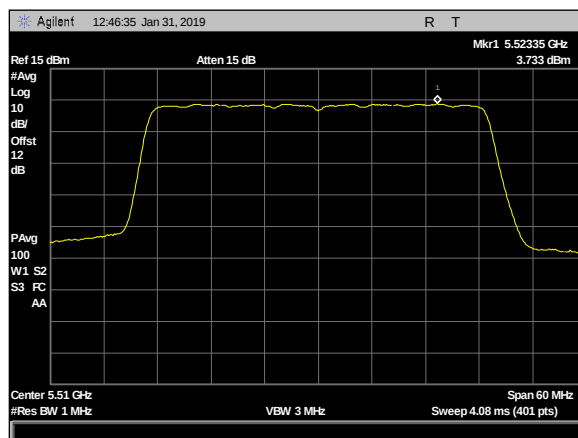


Plot 105. Power Spectral Density, 5dBi, 2x2, 5510MHz c2

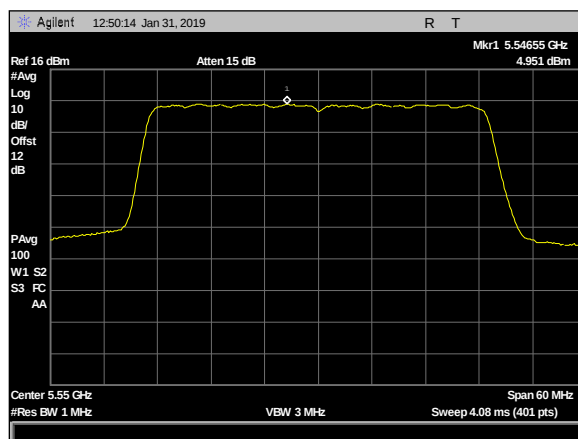


Plot 106. Power Spectral Density, 2dBi & 5dBi, 2x2, 5550MHz c1

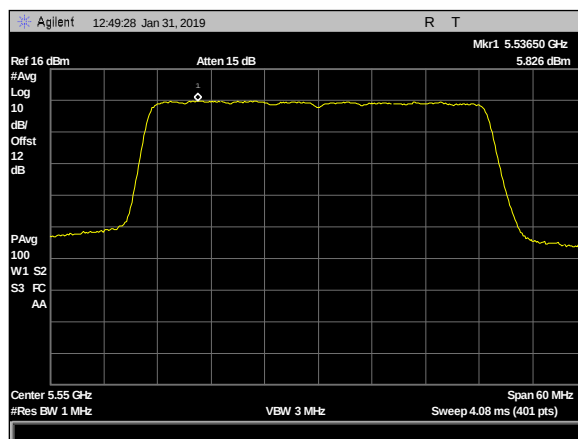


Plot 107. Power Spectral Density, 2dBi & 5dBi, 2x2, 5550MHz c2

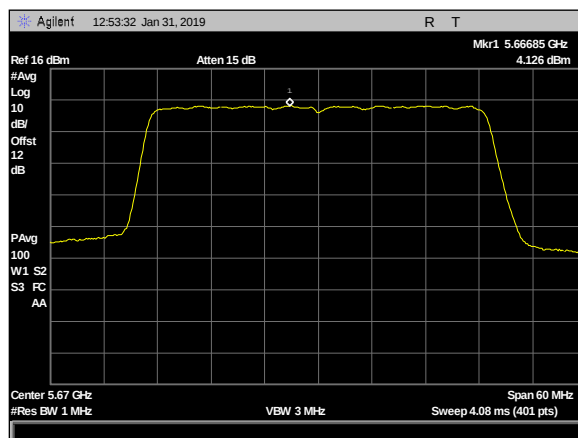


Plot 108. Power Spectral Density, 2dBi & 5dBi, 2x2, 5670MHz c1

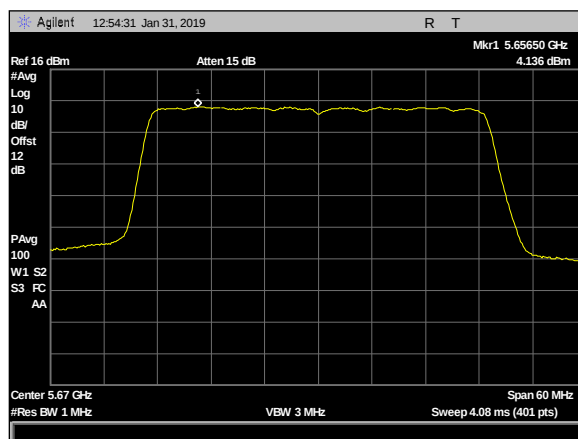


Plot 109. Power Spectral Density, 2dBi & 5dBi, 2x2, 5670MHz c2

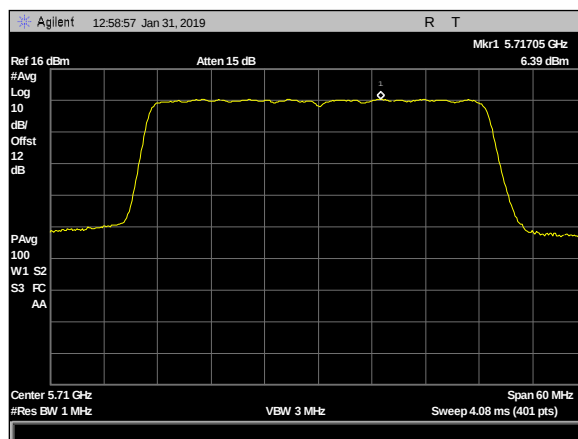


Plot 110. Power Spectral Density, 2dBi & 5dBi, 2x2, 5710MHz c1

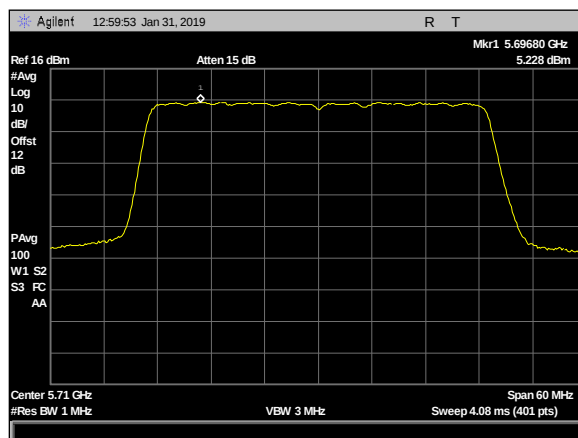


Plot 111. Power Spectral Density, 2dBi & 5dBi, 2x2, 5710MHz c2

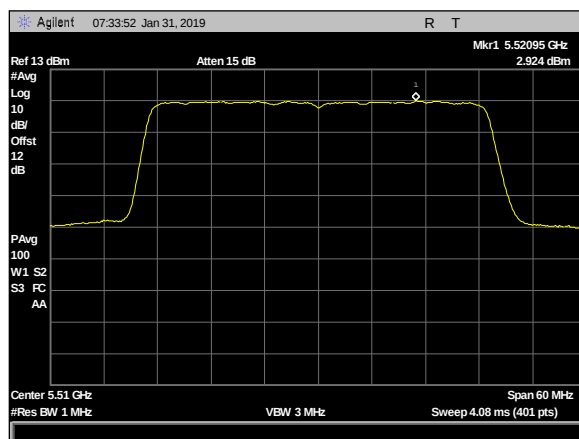


Plot 112. Power Spectral Density, 2dBi, 4x4, 5510MHz c1

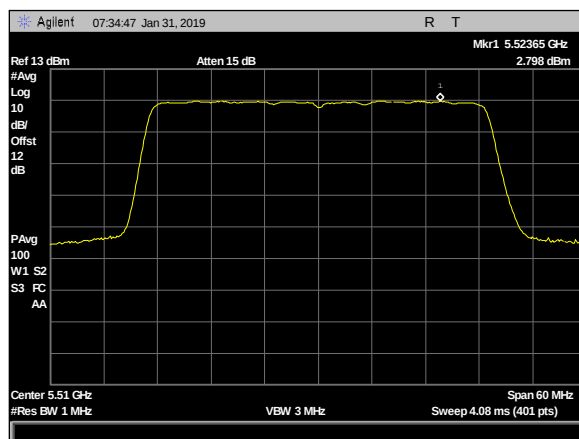


Plot 113. Power Spectral Density, 2dBi, 4x4, 5510MHz c2

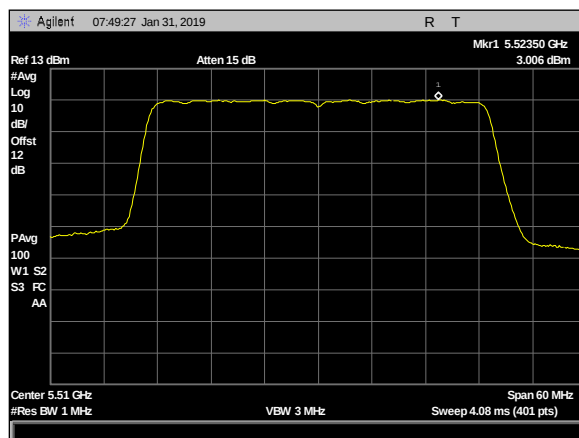


Plot 114. Power Spectral Density, 2dBi, 4x4, 5510MHz c3

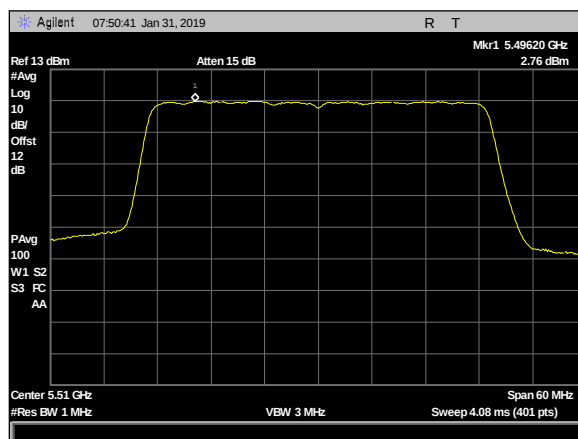


Plot 115. Power Spectral Density, 2dBi, 4x4, 5510MHz c4

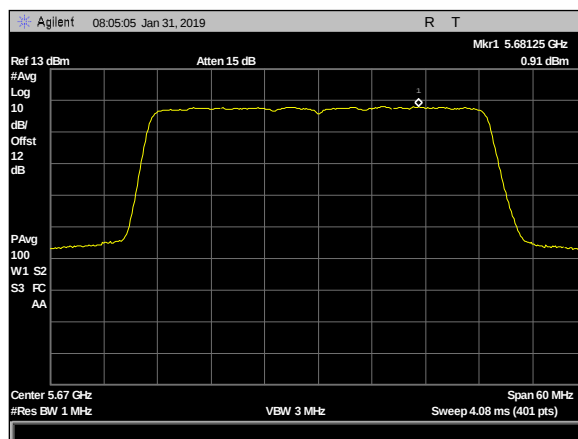


Plot 116. Power Spectral Density, 2dBi, 4x4, 5670MHz c1

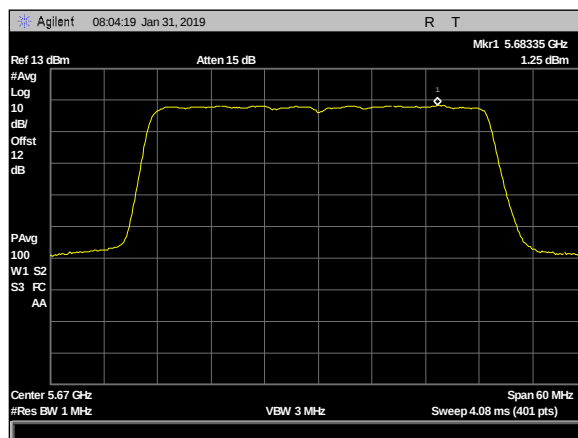


Plot 117. Power Spectral Density, 2dBi, 4x4, 5670MHz c2

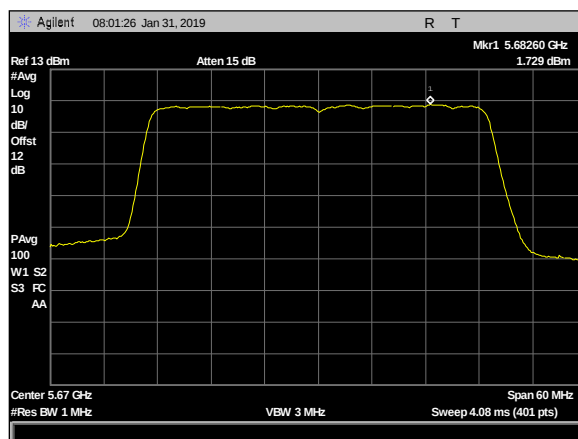


Plot 118. Power Spectral Density, 2dBi, 4x4, 5670MHz c3

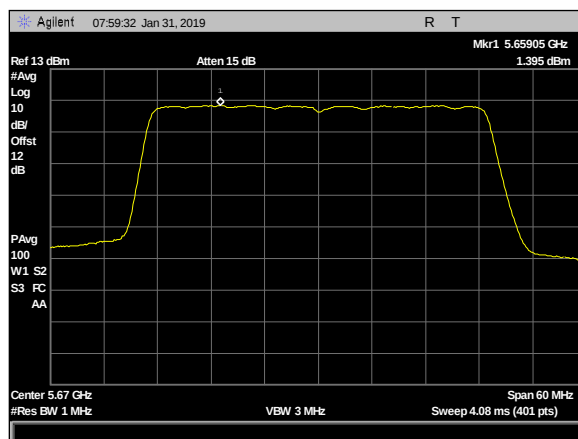


Plot 119. Power Spectral Density, 2dBi, 4x4, 5670MHz c4

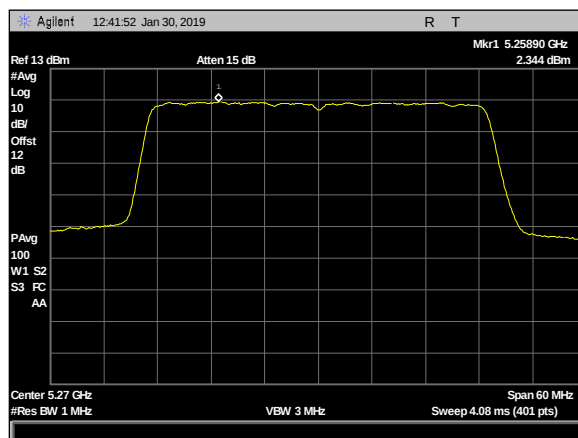


Plot 120. Power Spectral Density, 2dBi & 5dBi, 4x4, 5270MHz c1

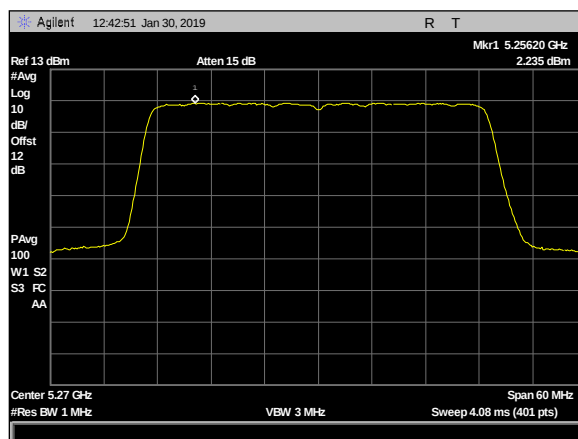


Plot 121. Power Spectral Density, 2dBi & 5dBi, 4x4, 5270MHz c2

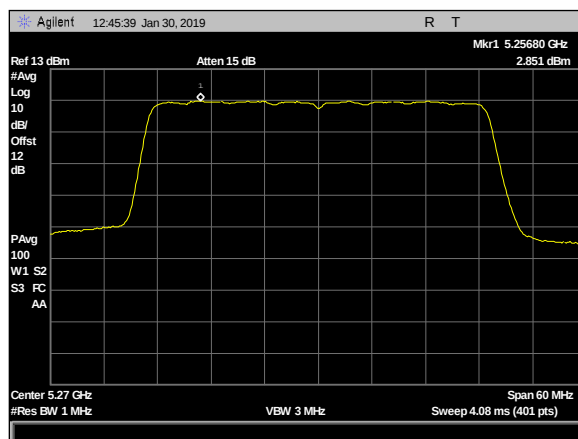


Plot 122. Power Spectral Density, 2dBi & 5dBi, 4x4, 5270MHz c3

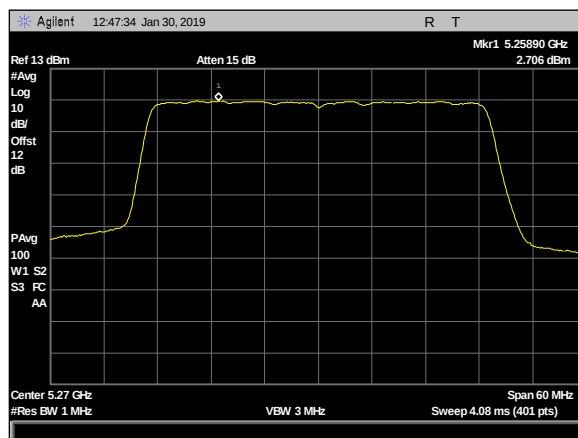


Plot 123. Power Spectral Density, 2dBi & 5dBi, 4x4, 5270MHz c4

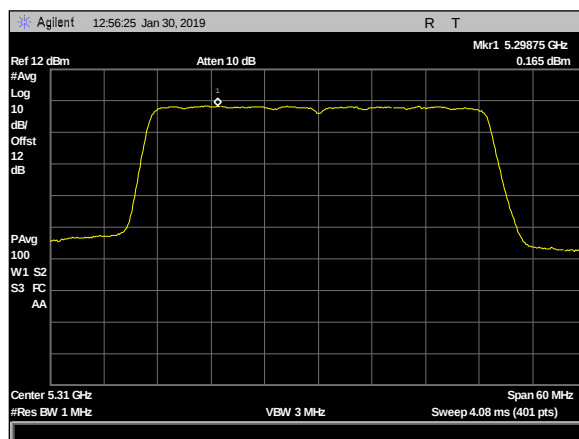


Plot 124. Power Spectral Density, 2dBi & 5dBi, 4x4, 5310MHz c1

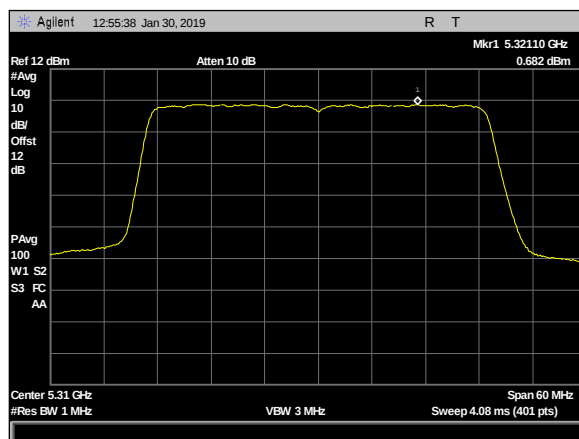


Plot 125. Power Spectral Density, 2dBi & 5dBi, 4x4, 5310MHz c2

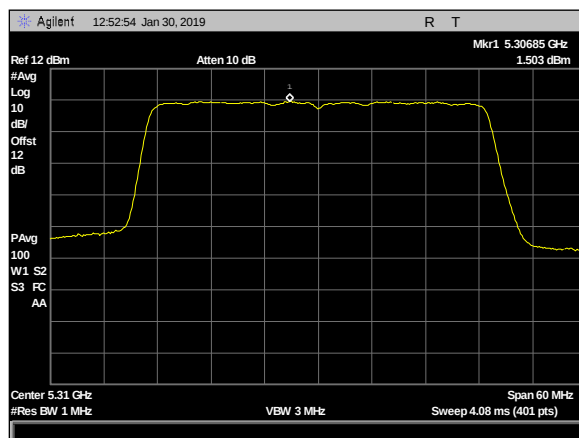


Plot 126. Power Spectral Density, 2dBi & 5dBi, 4x4, 5310MHz c3

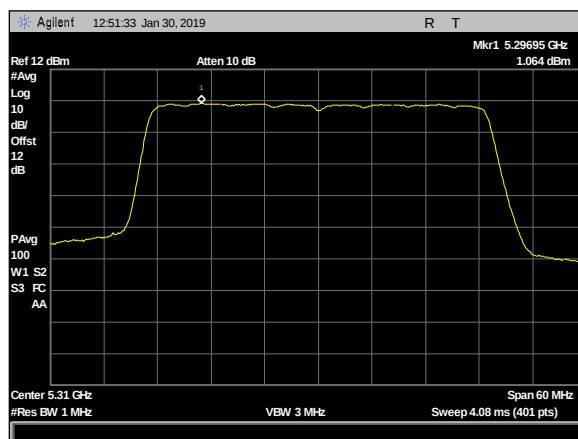


Plot 127. Power Spectral Density, 2dBi & 5dBi, 4x4, 5310MHz c4

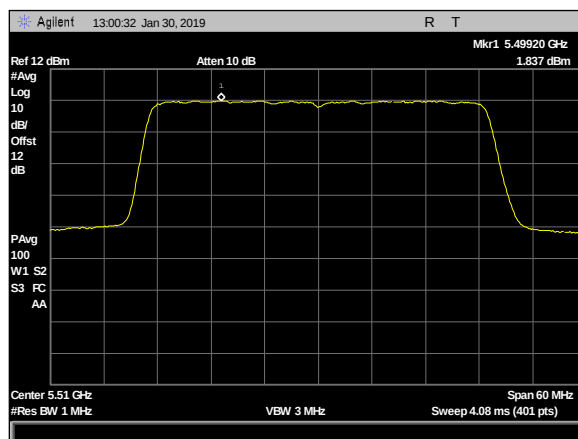


Plot 128. Power Spectral Density, 5dBi, 4x4, 5510MHz c1

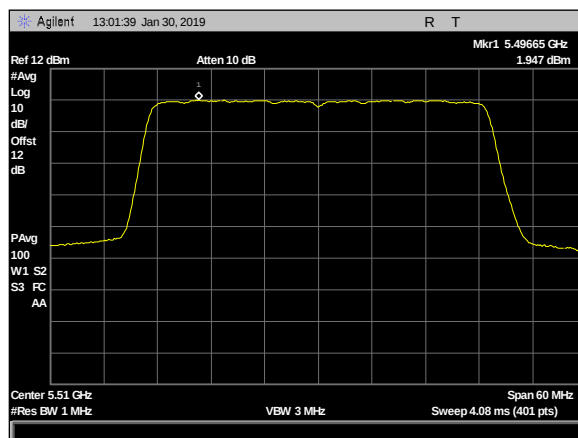


Plot 129. Power Spectral Density, 5dBi, 4x4, 5510MHz c2

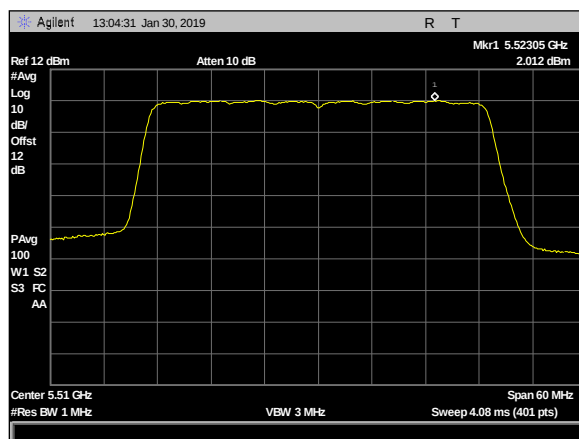


Plot 130. Power Spectral Density, 5dBi, 4x4, 5510MHz c3

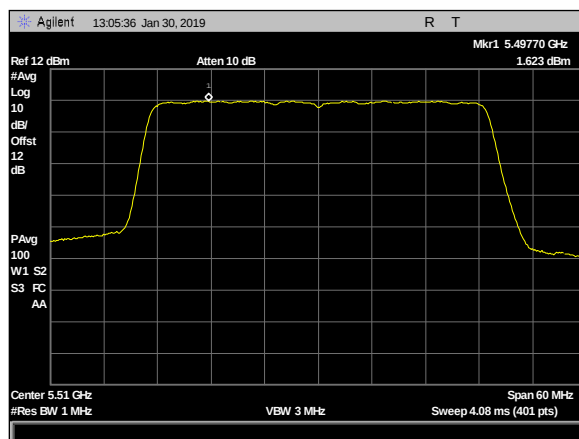


Plot 131. Power Spectral Density, 5dBi, 4x4, 5510MHz c4

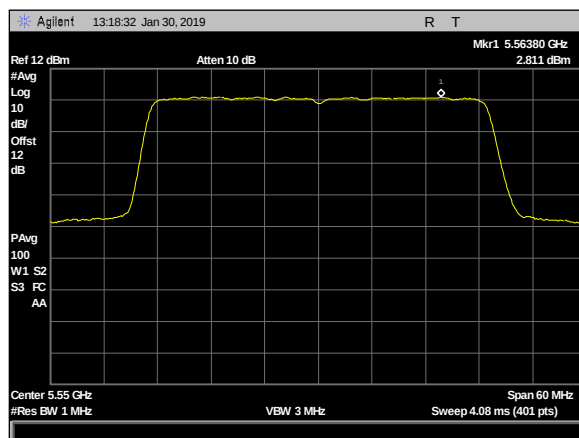


Plot 132. Power Spectral Density, 2dBi & 5dBi, 4x4, 5550MHz c1

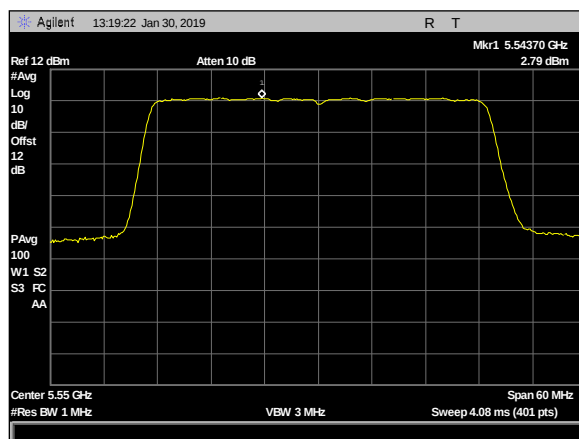


Plot 133. Power Spectral Density, 2dBi & 5dBi, 4x4, 5550MHz c2

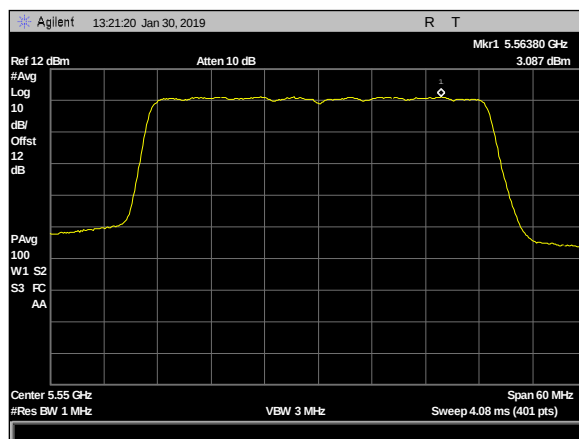


Plot 134. Power Spectral Density, 2dBi & 5dBi, 4x4, 5550MHz c3

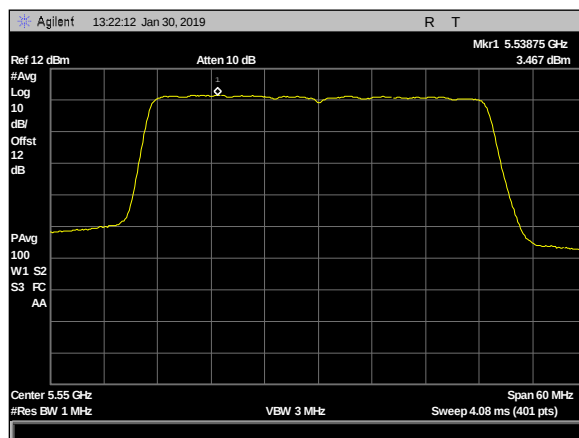


Plot 135. Power Spectral Density, 2dBi & 5dBi, 4x4, 5550MHz c4

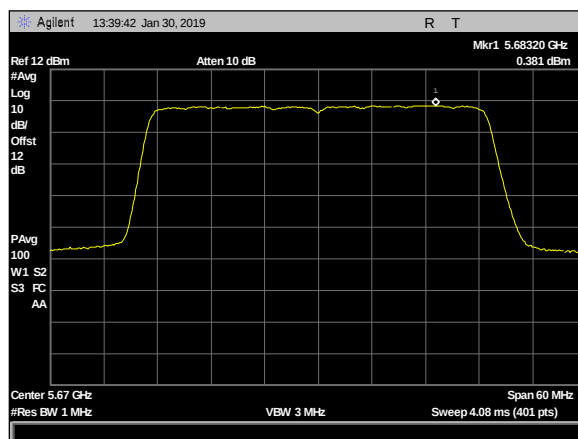


Plot 136. Power Spectral Density, 5dBi, 4x4, 5670MHz c1

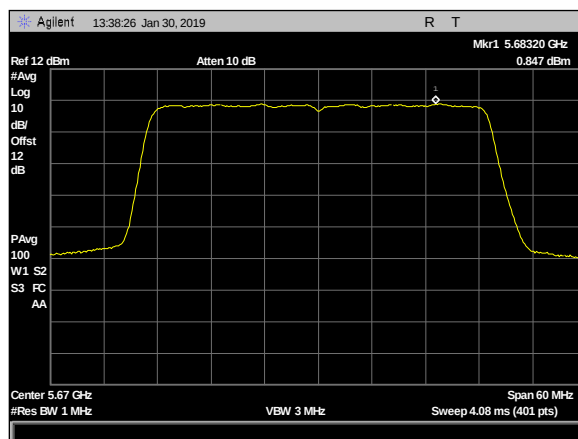


Plot 137. Power Spectral Density, 5dBi, 4x4, 5670MHz c2

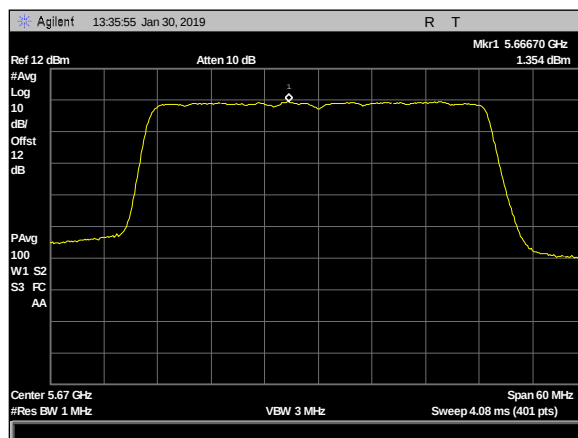


Plot 138. Power Spectral Density, 5dBi, 4x4, 5670MHz c3

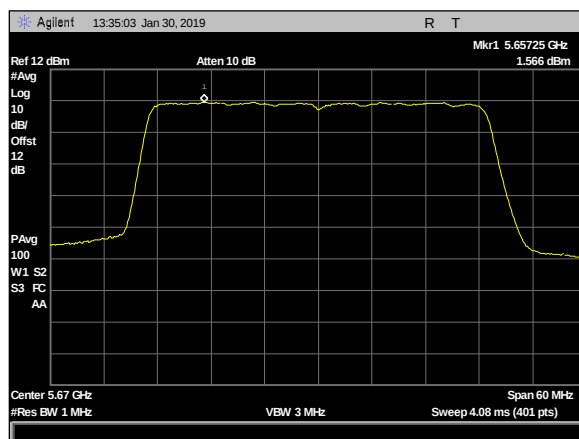


Plot 139. Power Spectral Density, 5dBi, 4x4, 5670MHz c4

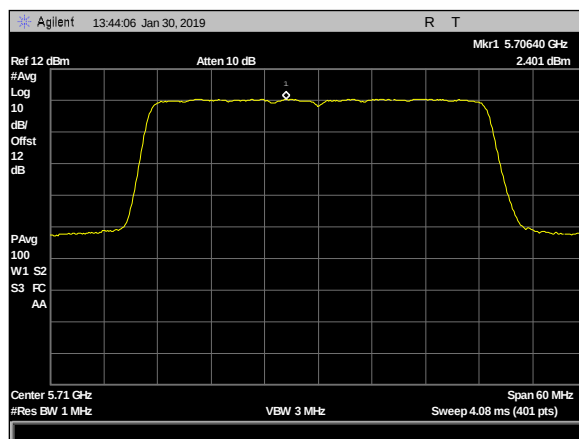


Plot 140. Power Spectral Density, 2dBi & 5dBi, 4x4, 5710MHz c1

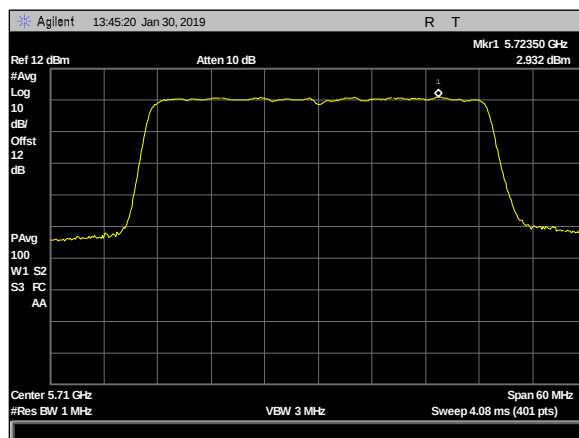

Plot 141. Power Spectral Density, 2dBi & 5dBi, 4x4, 5710MHz c2

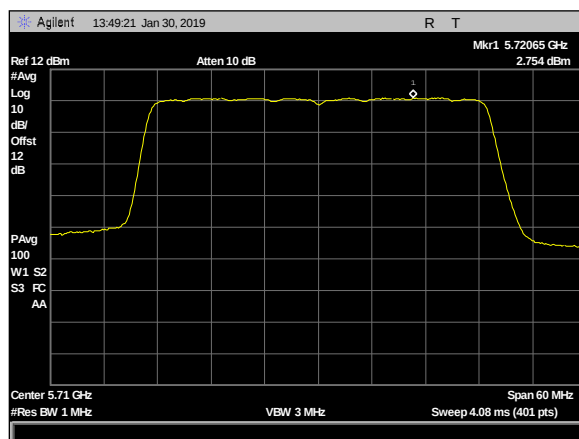

Plot 142. Power Spectral Density, 2dBi & 5dBi, 4x4, 5710MHz c3

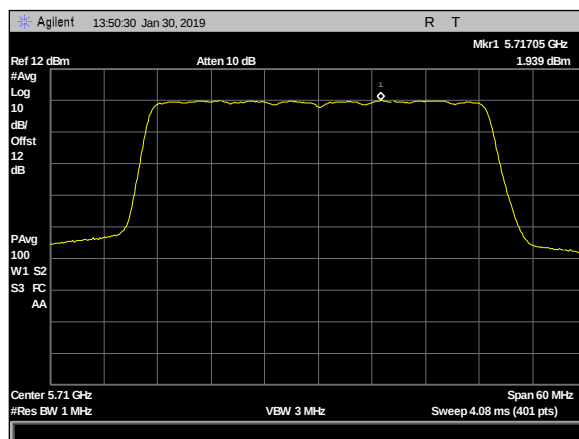

Plot 143. Power Spectral Density, 2dBi & 5dBi, 4x4, 5710MHz c4

## Electromagnetic Compatibility Criteria for Intentional Radiators

### §15.407(b)(2 – 3) & (6 – 7) Undesirable Emissions

- Test Requirements:**
- § 15.407(b)(2): For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
  - § 15.407(b)(3): For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
  - § 15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.
  - § 15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

**Test Procedure:** The EUT was placed on a non-conducting stand on a turntable in a chamber. To find the maximum emission the EUT was set to transmit on low, mid, and high channels. Additionally, the turntable was rotated 360 degrees, the EUT was oriented through its three orthogonal axes, and the receive antenna height was varied in order to maximize emissions.

For frequencies from 30 MHz to 1 GHz, measurements were first made using a peak detector with a 100 kHz resolution bandwidth. Emissions which exceeded the limits were re-measured using a quasi-peak detector with a 120 kHz resolution bandwidth.

Above 1 GHz, measurements were made pursuant the method described in FCC KDB 789033 D02 General UNII Test Procedure New Rules v02r01. The equation,  $EIRP = E + 20 \log D - 104.8$  was used to convert field strength to EIRP ( $E$  = field strength (dBμV/m) and  $D$  = Reference measurement distance).


For emissions above 1 GHz and in restricted bands, measurements of the field strength were made with a peak detector and an average detector and compared with the limits of 15.209.

**Test Results:** For below 1 GHz, the EUT was compliant with the requirements of this section.


For above 1 GHz, the EUT was compliant with the requirements of this section. Only noise was observed above 18GHz, noise level was 6dB below applicable limit.

**Test Engineer(s):** Donald Salguero


**Test Date(s):** March 6, 2019

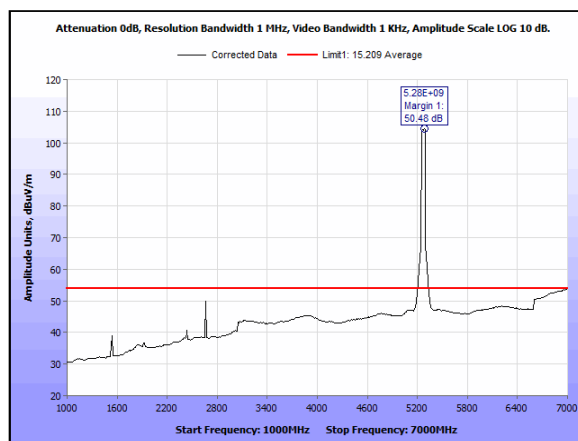


Plot 144. Radiated Emissions, Average, 2x2, 5dBi, 5270, 1-7GHz

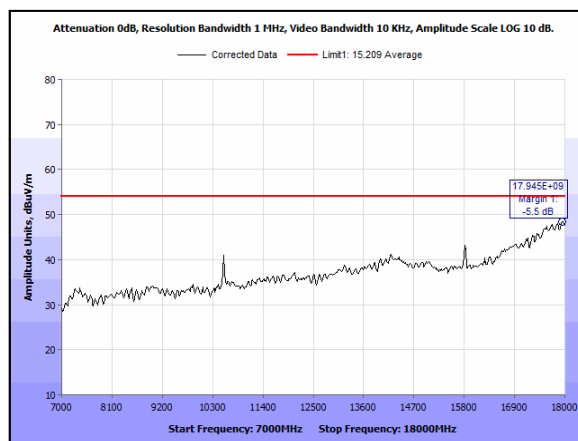


Plot 145. Radiated Emissions, Average, 2x2, 5dBi, 5270, 7-18GHz

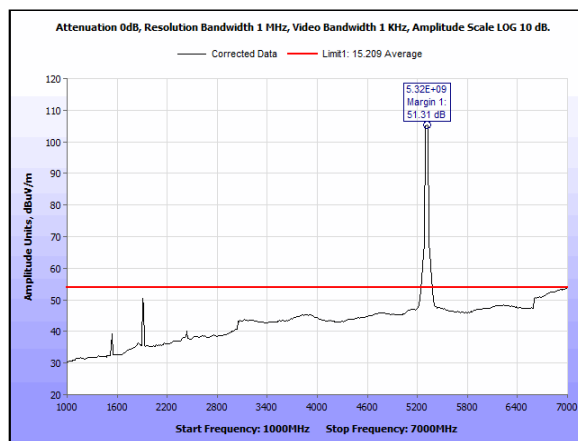


Plot 146. Radiated Emissions, Average, 2x2, 5dBi, 5310, 1-7GHz

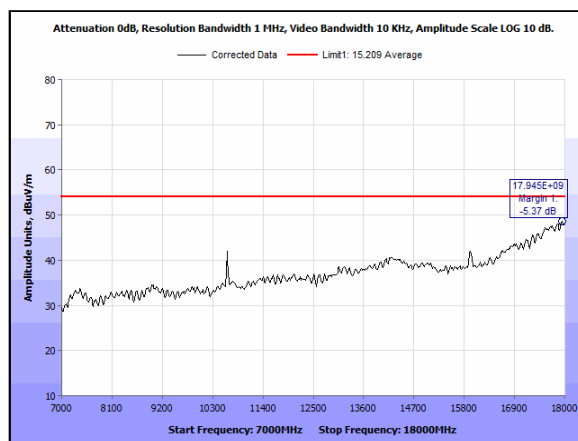


Plot 147. Radiated Emissions, Average, 2x2, 5dBi, 5310, 7-18GHz

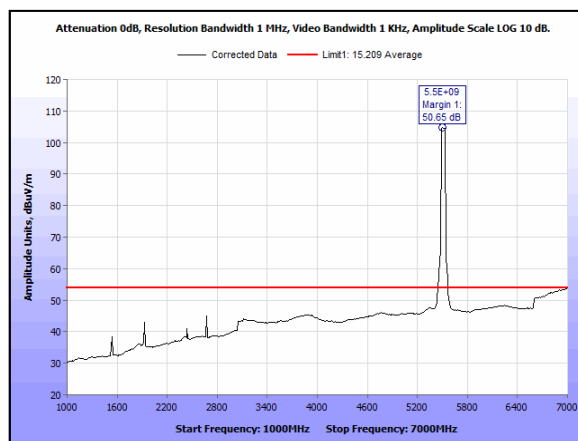


Plot 148, Radiated Emissions, Average, 2x2, 5dBi, 5510, 1-7GHz

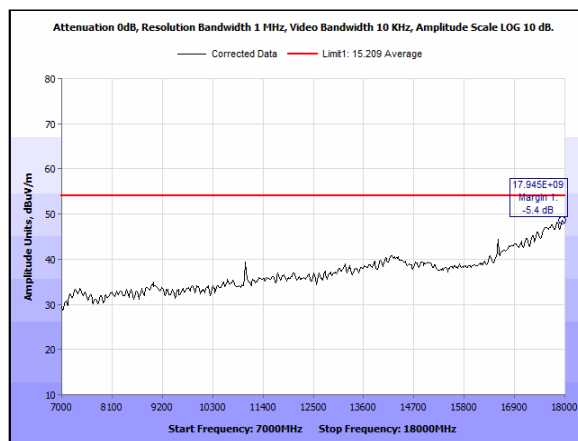


Plot 149. Radiated Emissions, Average, 2x2, 5dBi, 5510, 7-18GHz

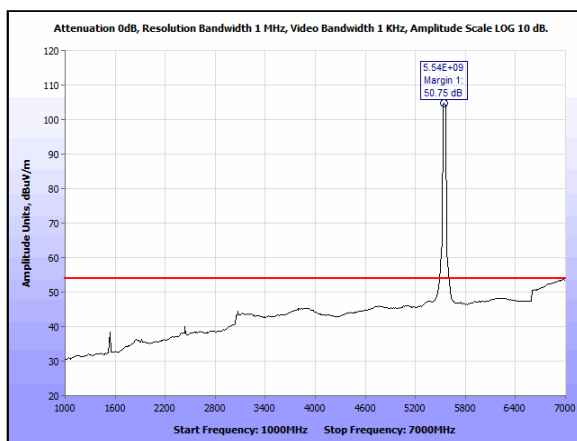


Plot 150, Radiated Emissions, Average, 2x2, 5dBi, 5550, 1-7GHz

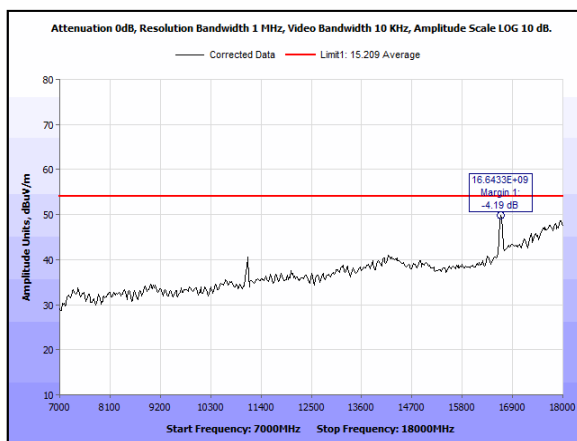


Plot 151. Radiated Emissions, Average, 2x2, 5dBi, 5550, 7-18GHz

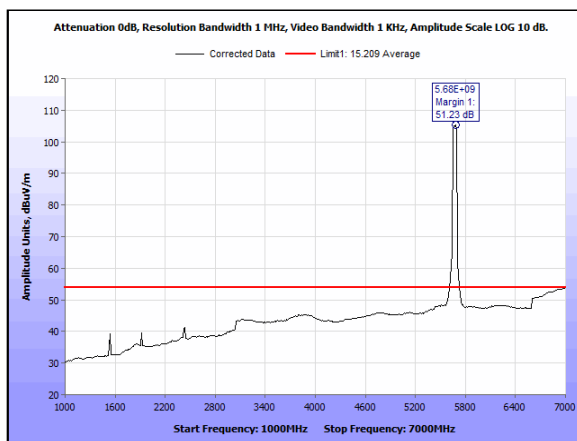


Plot 152. Radiated Emissions, Average, 2x2, 5dBi, 5670, 1-7GHz

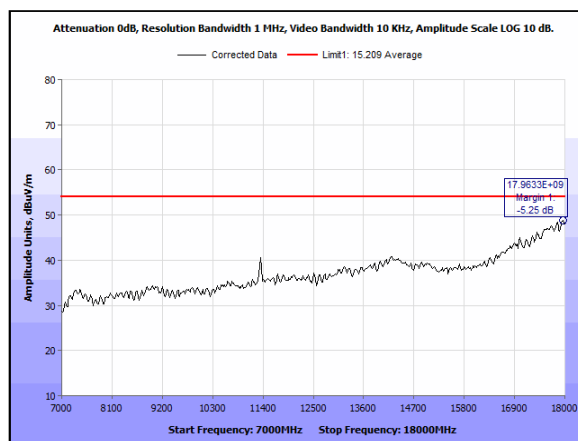


Plot 153. Radiated Emissions, Average, 2x2, 5dBi, 5670, 7-18GHz

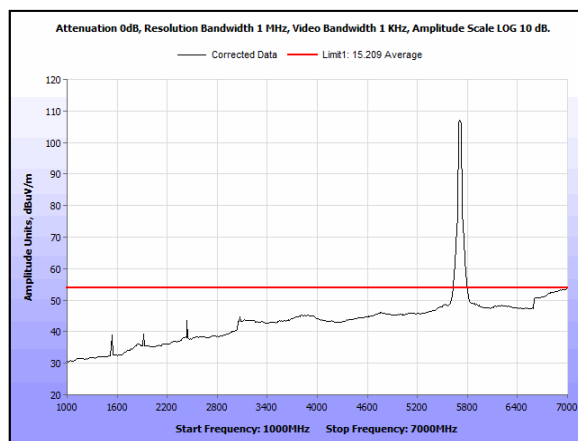


Plot 154, Radiated Emissions, Average, 2x2, 5dBi, 5710, 1-7GHz

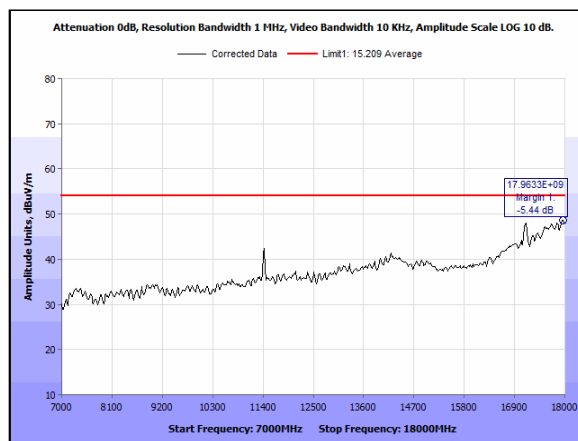


Plot 155. Radiated Emissions, Average, 2x2, 5dBi, 5710, 7-18GHz

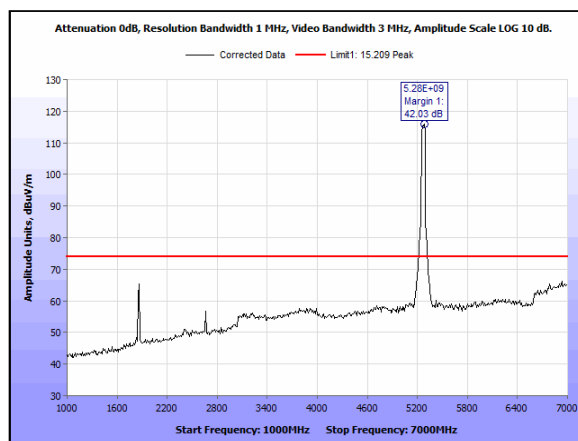


Plot 156. Radiated Emissions, Peak, 2x2, 5dBi, 5270, 1-7GHz

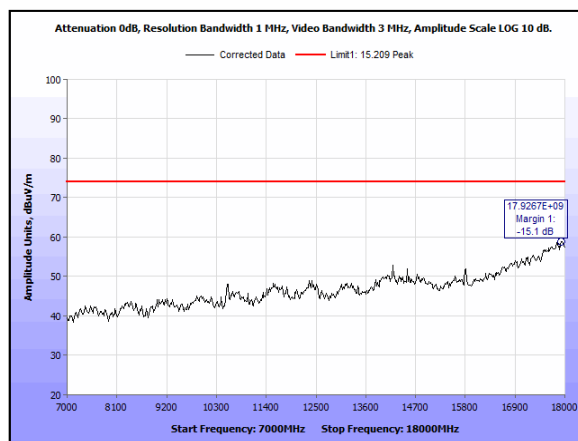


Plot 157. Radiated Emissions, Peak, 2x2, 5dBi, 5270, 7-18GHz

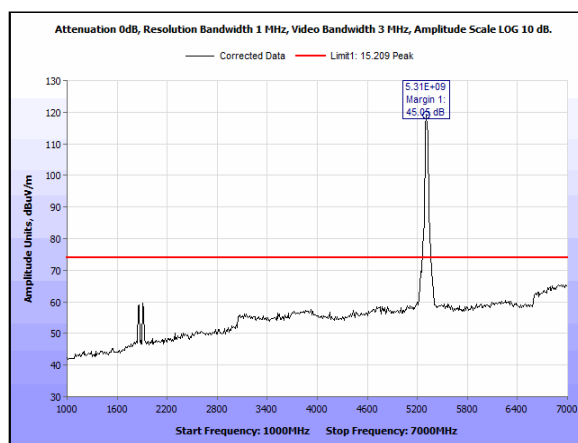


Plot 158. Radiated Emissions, Peak, 2x2, 5dBi, 5310, 1-7GHz

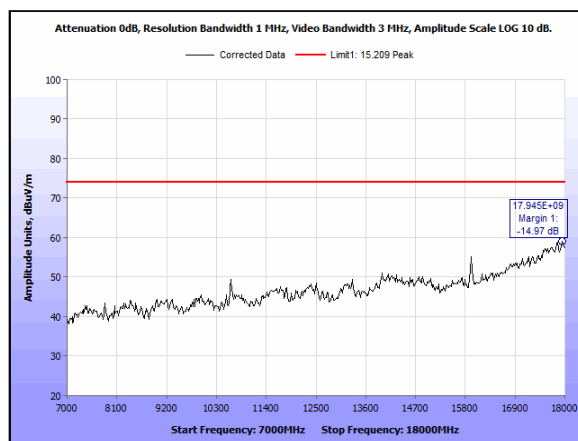


Plot 159, Radiated Emissions, Peak, 2x2, 5dBi, 5310, 7-18GHz

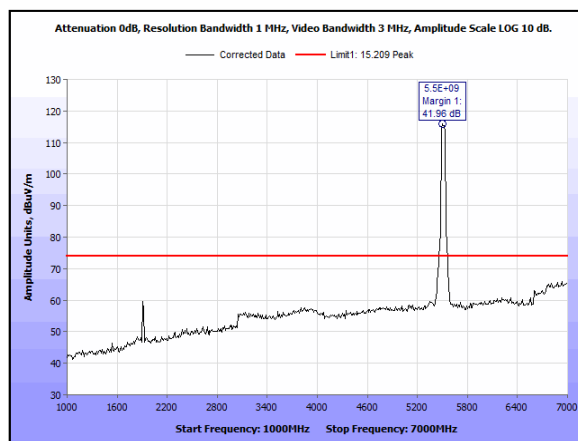


Plot 160. Radiated Emissions, Peak, 2x2, 5dBi, 5510, 1-7GHz

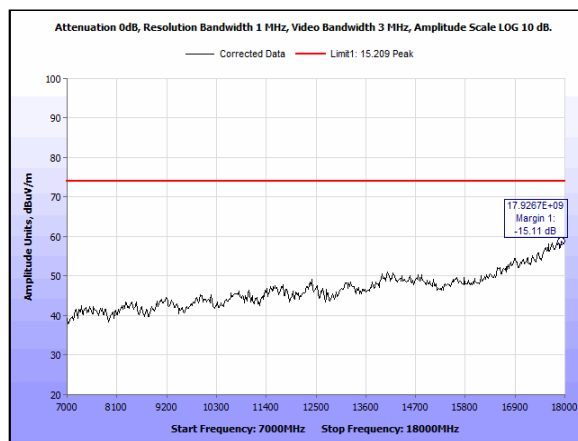


Plot 161. Radiated Emissions, Peak, 2x2, 5dBi, 5510, 7-18GHz

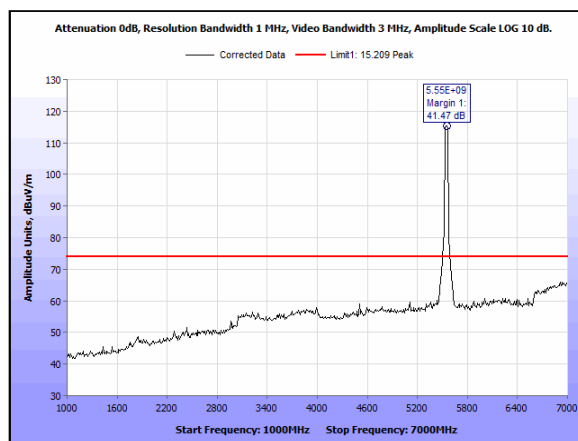


Plot 162. Radiated Emissions, Peak, 2x2, 5dBi, 5550, 1-7GHz

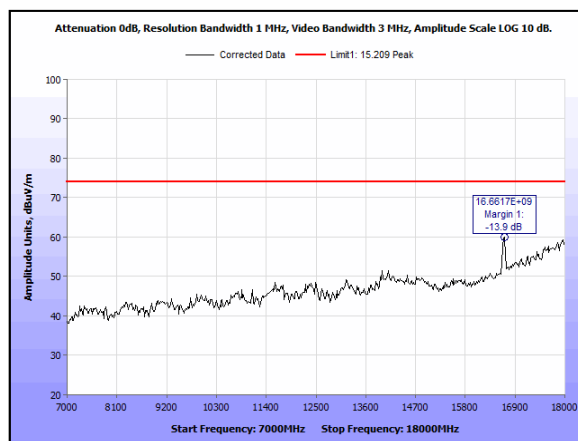


Plot 163. Radiated Emissions, Peak, 2x2, 5dBi, 5550, 7-18GHz

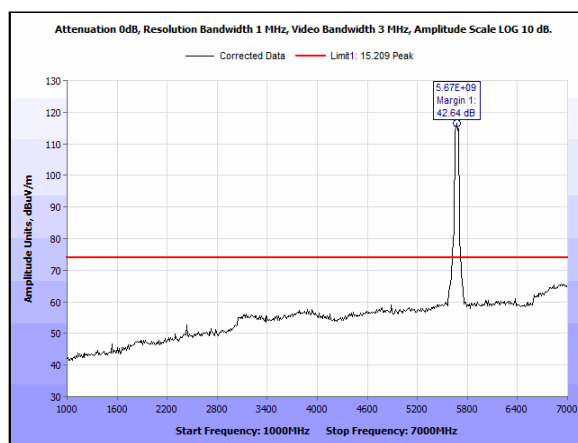


Plot 164. Radiated Emissions, Peak, 2x2, 5dBi, 5670, 1-7GHz

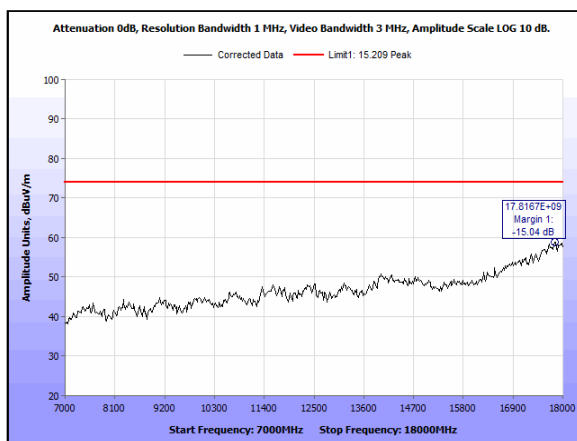


Plot 165. Radiated Emissions, Peak, 2x2, 5dBi, 5670, 7-18GHz

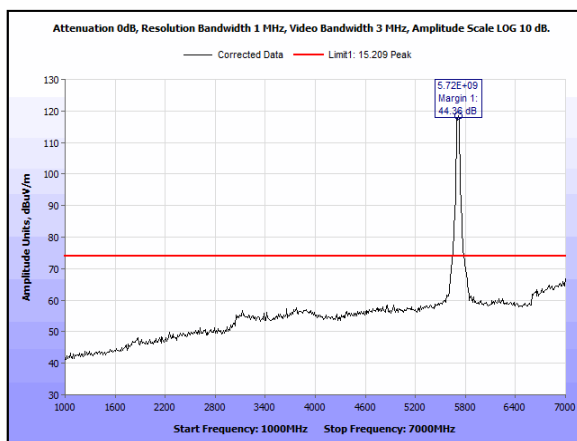


Plot 166. Radiated Emissions, Peak, 2x2, 5dBi, 5710, 1-7GHz

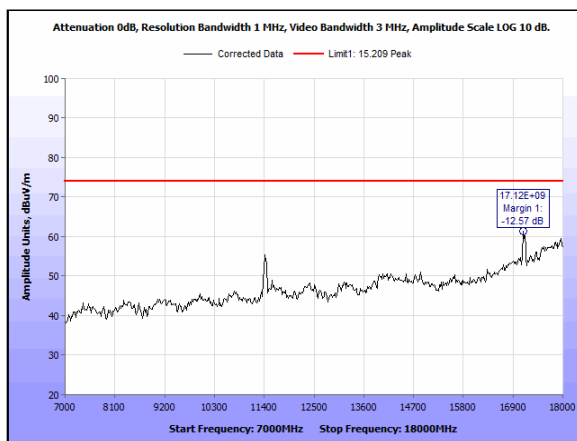


Plot 167. Radiated Emissions, Peak, 2x2, 5dBi, 5710, 7-18GHz

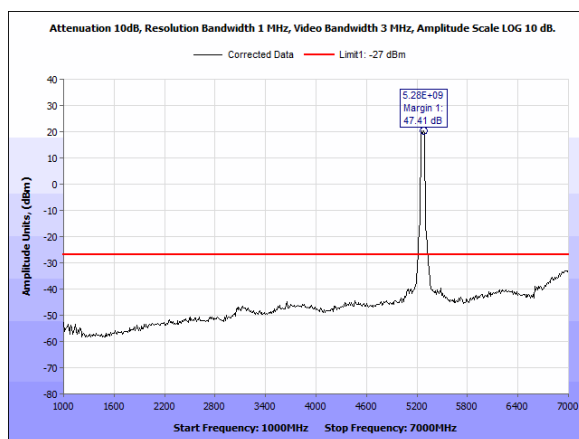


Plot 168. Radiated Emissions, -27dBm, 2x2, 5dBi, 5270, 1-7GHz

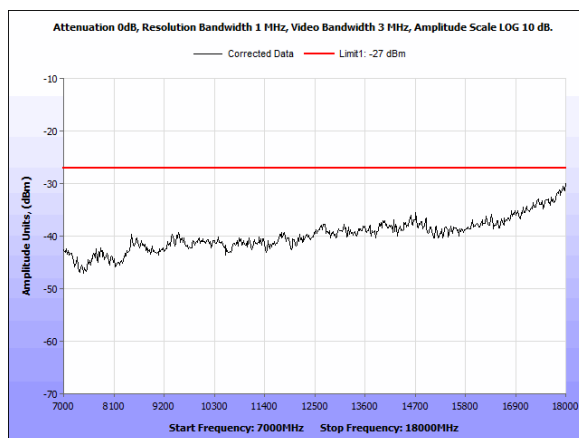


Plot 169. Radiated Emissions, -27dBm, 2x2, 5dBi, 5270, 7-18GHz

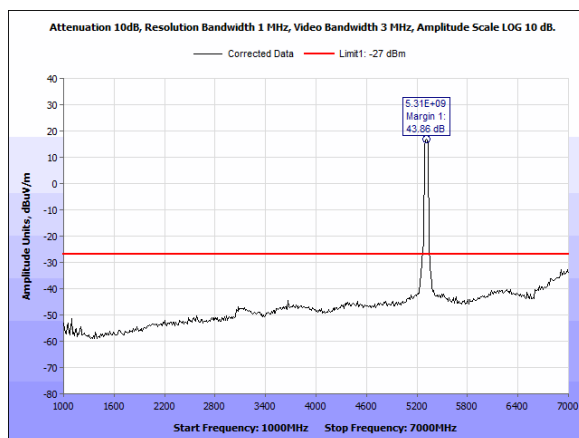


Plot 170. Radiated Emissions, -27dBm, 2x2, 5dBi, 5310, 1-7GHz

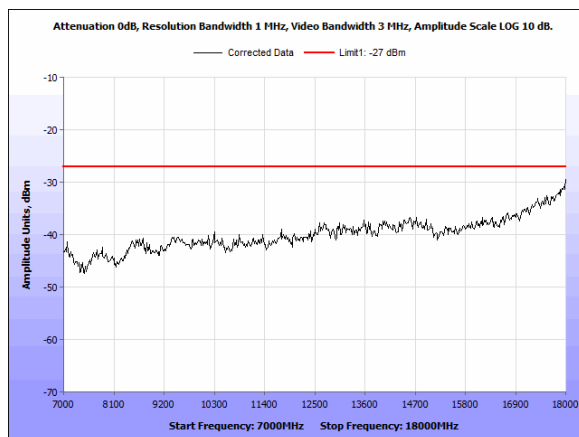


Plot 171, Radiated Emissions, -27dBm, 2x2, 5dBi, 5310, 7-18GHz

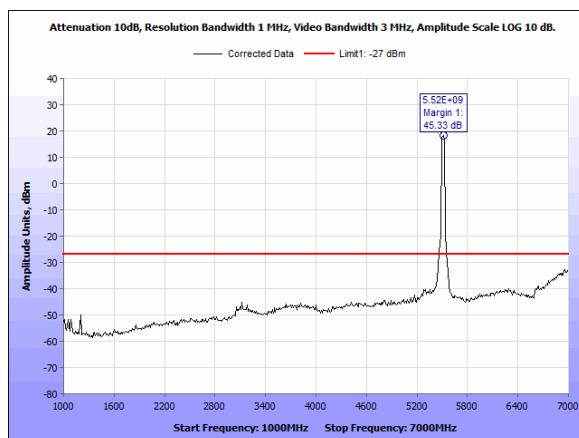


Plot 172. Radiated Emissions, -27dBm, 2x2, 5dBi, 5510, 1-7GHz

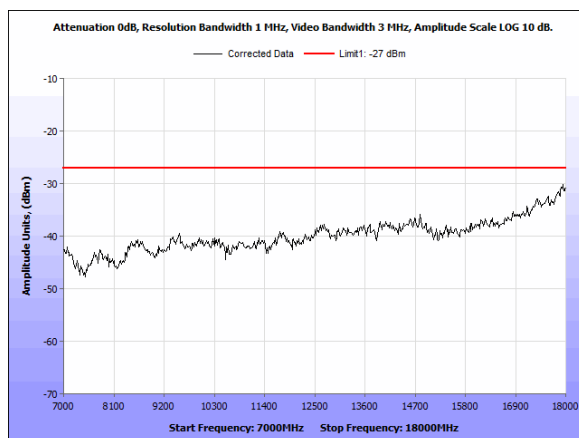


Plot 173. Radiated Emissions, -27dBm, 2x2, 5dBi, 5510, 7-18GHz

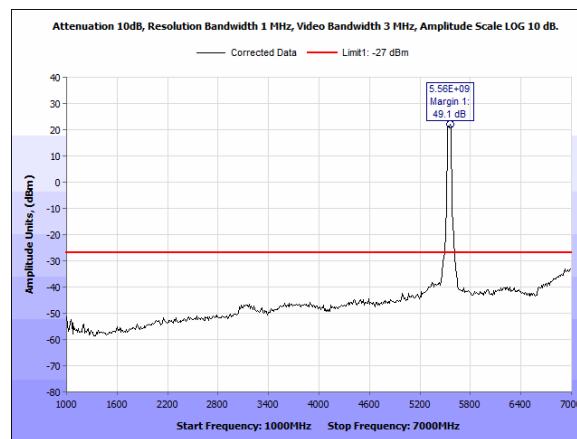


Plot 174. Radiated Emissions, -27dBm, 2x2, 5dBi, 5550, 1-7GHz

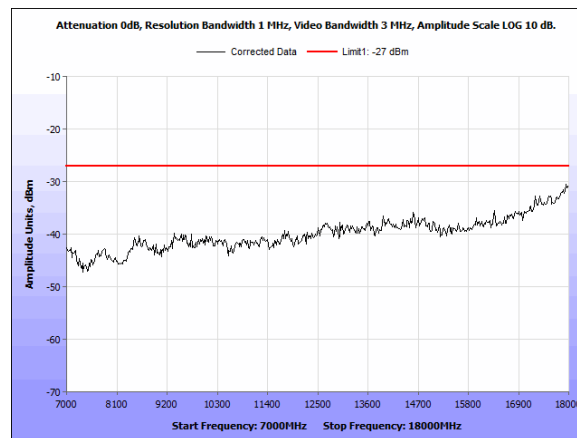


Plot 175. Radiated Emissions, -27dBm, 2x2, 5dBi, 5550, 7-18GHz

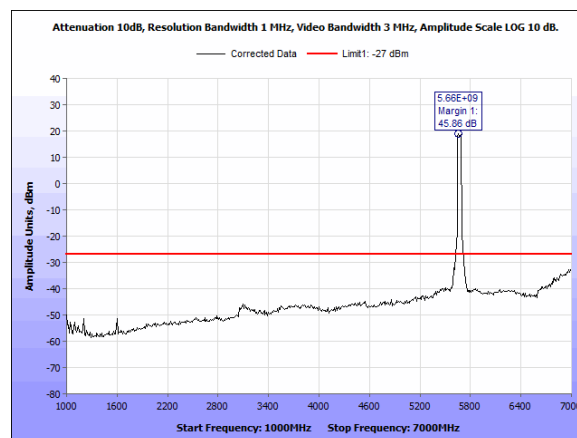


Plot 176. Radiated Emissions, -27dBm, 2x2, 5dBi, 5670, 1-7GHz

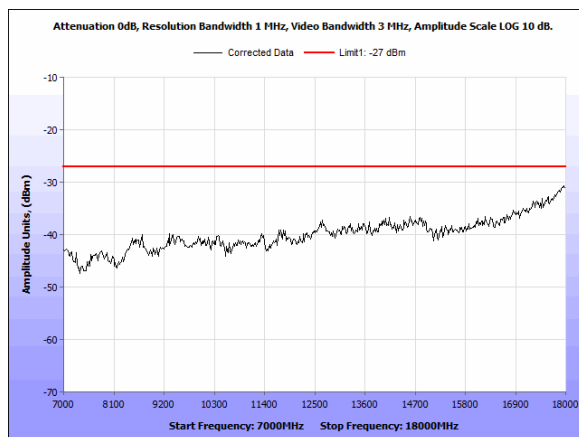


Plot 177. Radiated Emissions, -27dBm, 2x2, 5dBi, 5670, 7-18GHz

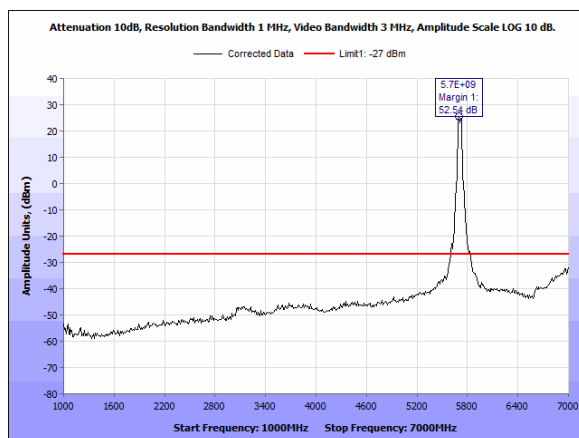


Plot 178. Radiated Emissions, -27dBm, 2x2, 5dBi, 5710, 1-7GHz

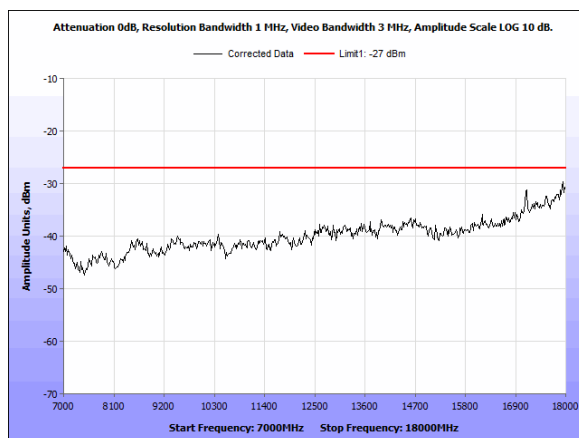


Plot 179. Radiated Emissions, -27dBm, 2x2, 5dBi, 5710, 7-18GHz

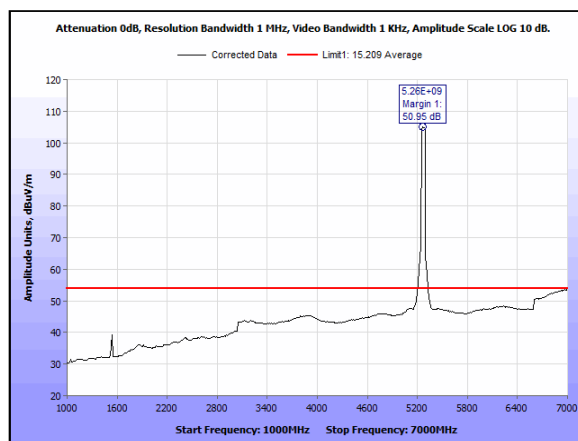


Plot 180. Radiated Emissions, Average, 4x4, 5dBi, 5270, 1-7GHz

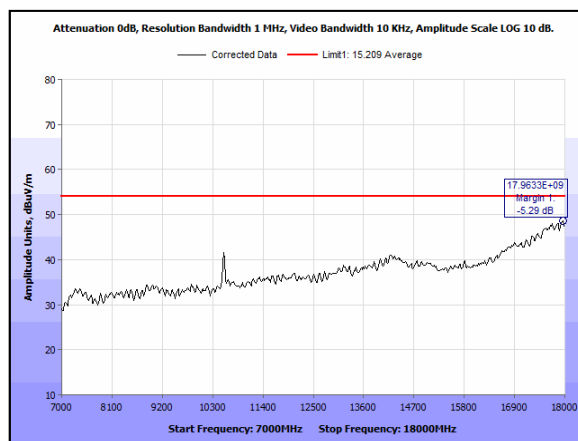


Plot 181. Radiated Emissions, Average, 4x4, 5dBi, 5270, 7-18GHz

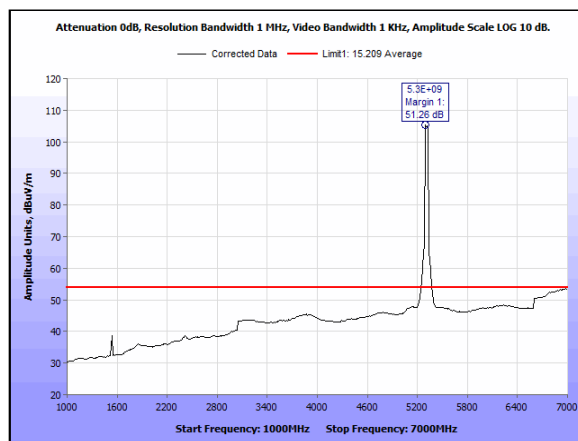


Plot 182. Radiated Emissions, Average, 4x4, 5dBi, 5310, 1-7GHz

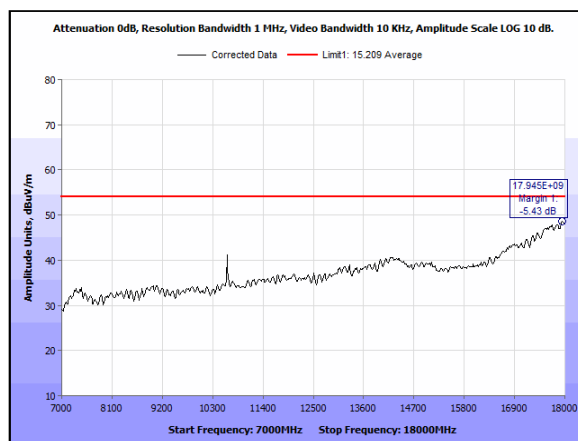


Plot 183. Radiated Emissions, Average, 4x4, 5dBi, 5310, 7-18GHz

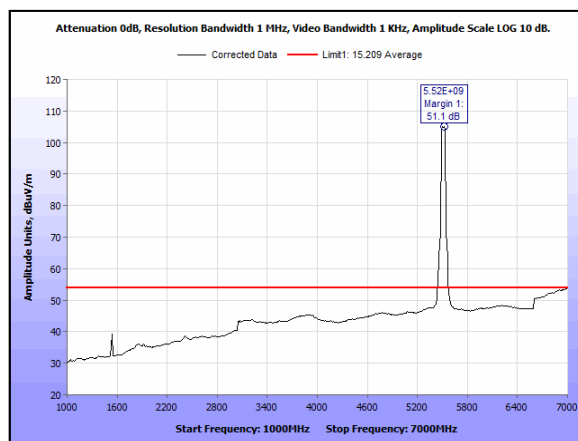


Plot 184. Radiated Emissions, Average, 4x4, 5dBi, 5510, 1-7GHz

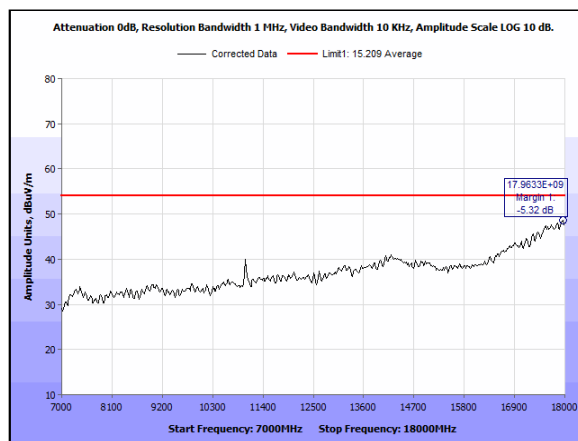


Plot 185. Radiated Emissions, Average, 4x4, 5dBi, 5510, 7-18GHz

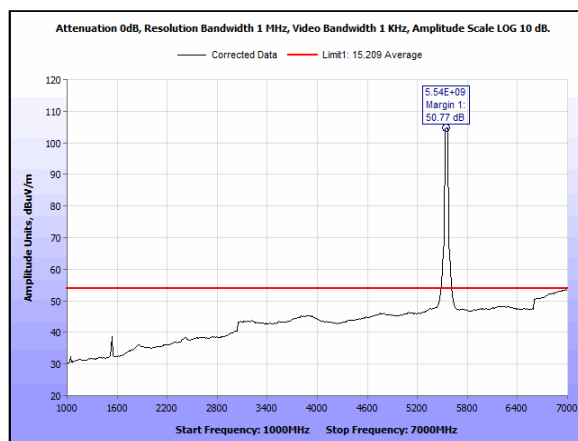


Plot 186. Radiated Emissions, Average, 4x4, 5dBi, 5550, 1-7GHz

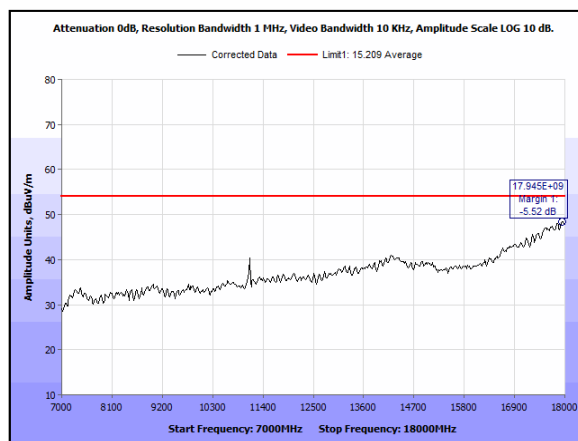


Plot 187. Radiated Emissions, Average, 4x4, 5dBi, 5550, 7-18GHz

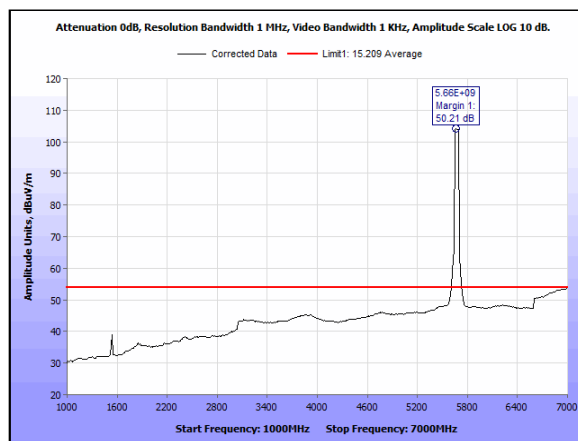


Plot 188. Radiated Emissions, Average, 4x4, 5dBi, 5670, 1-7GHz

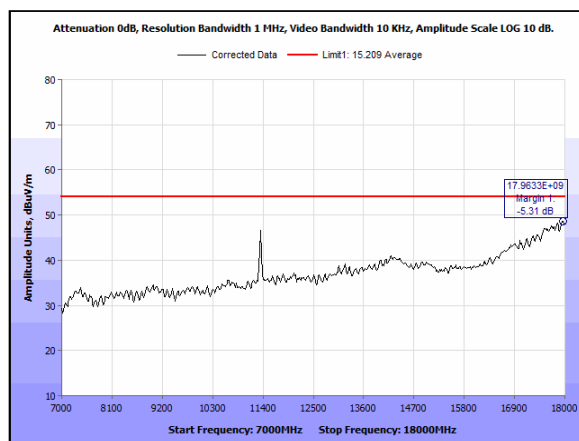


Plot 189. Radiated Emissions, Average, 4x4, 5dBi, 5670, 7-18GHz

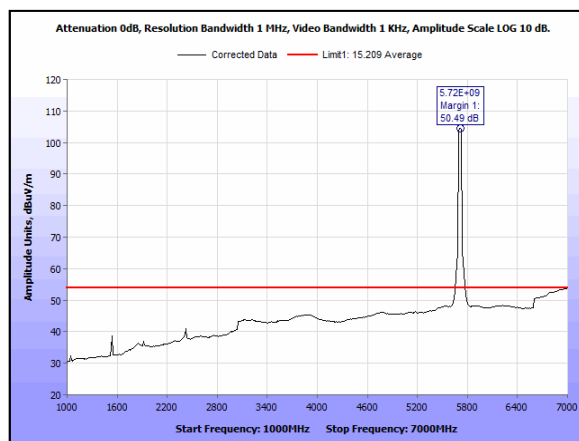


Plot 190. Radiated Emissions, Average, 4x4, 5dBi, 5710, 1-7GHz

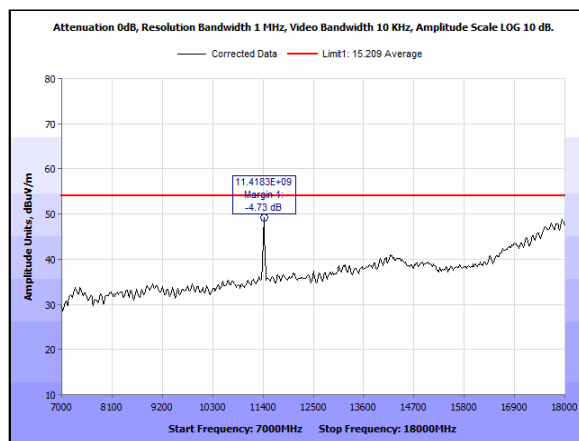


Plot 191. Radiated Emissions, Average, 4x4, 5dBi, 5710, 7-18GHz

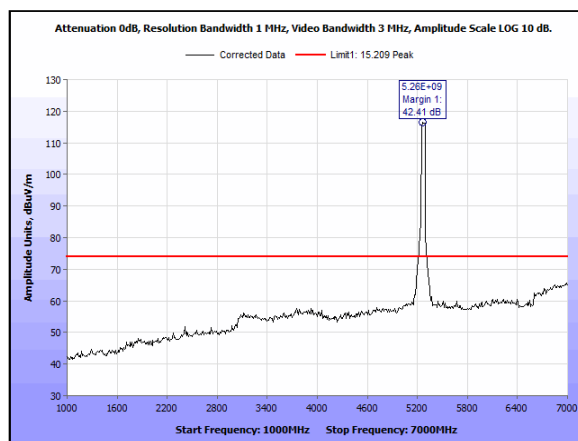


Plot 192. Radiated Emissions, Peak, 4x4, 5dBi, 5270, 1-7GHz

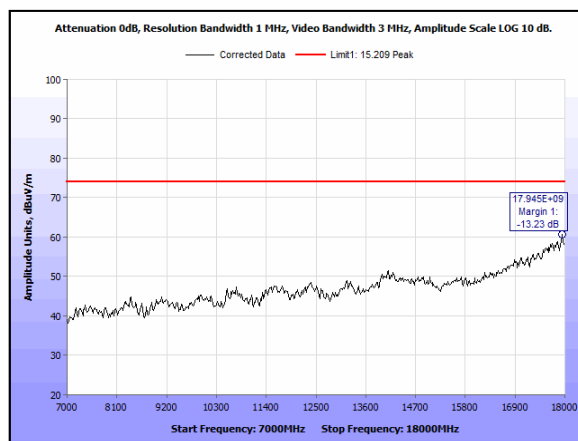


Plot 193. Radiated Emissions, Peak, 4x4, 5dBi, 5270, 7-18GHz

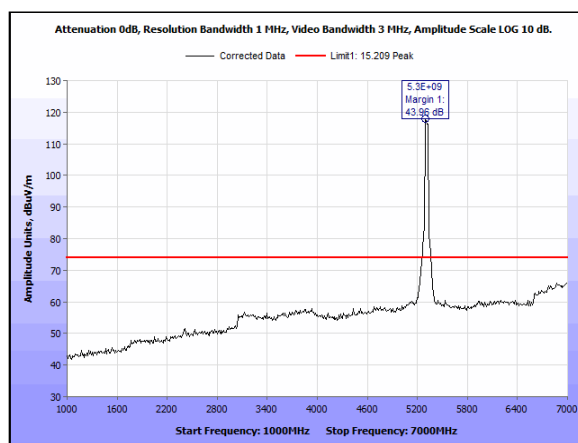


Plot 194. Radiated Emissions, Peak, 4x4, 5dBi, 5310, 1-7GHz

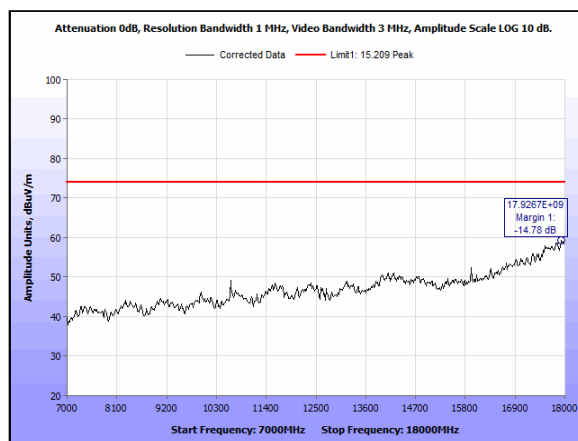


Plot 195. Radiated Emissions, Peak, 4x4, 5dBi, 5310, 7-18GHz

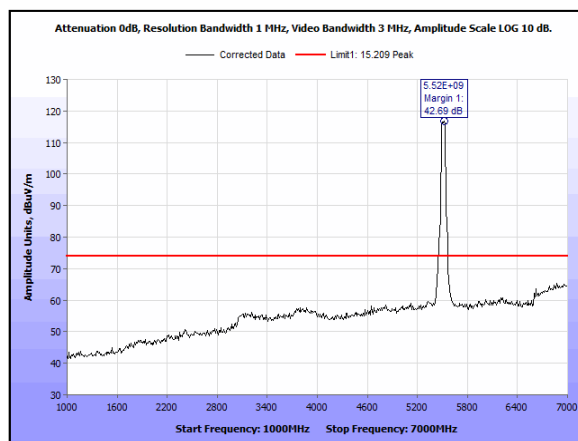


Plot 196. Radiated Emissions, Peak, 4x4, 5dBi, 5510, 1-7GHz

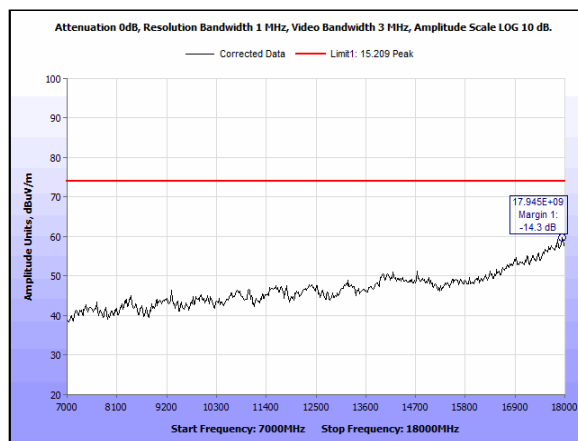


Plot 197. Radiated Emissions, Peak, 4x4, 5dBi, 5510, 7-18GHz

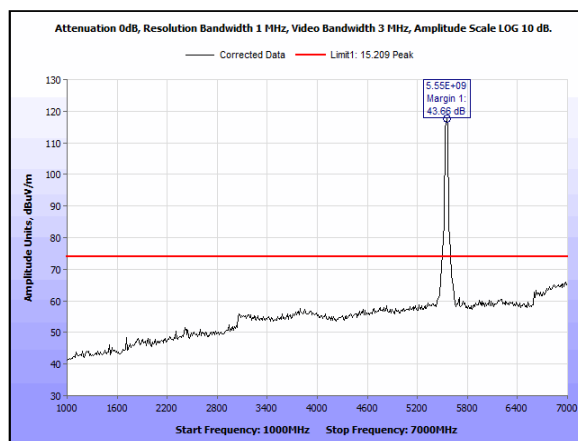


Plot 198. Radiated Emissions, Peak, 4x4, 5dBi, 5550, 1-7GHz

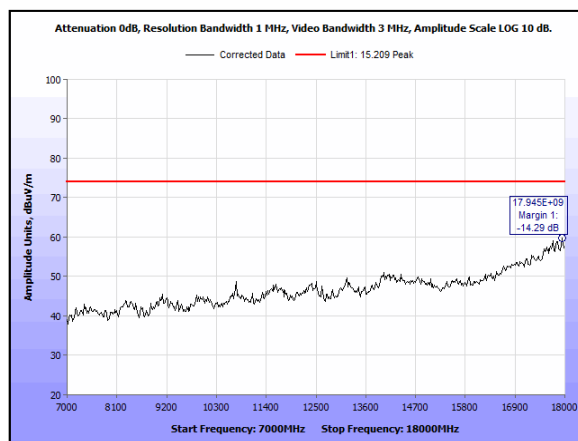


Plot 199. Radiated Emissions, Peak, 4x4, 5dBi, 5550, 7-18GHz

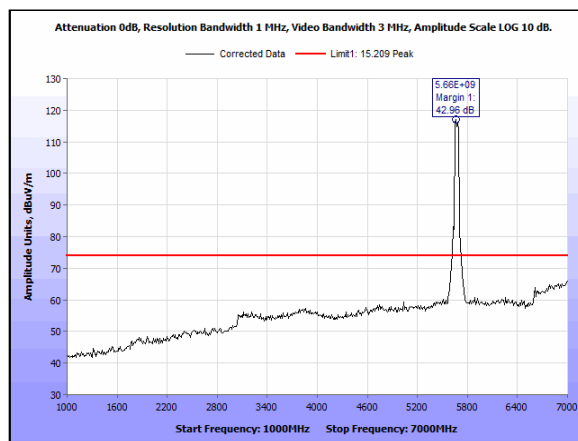


Plot 200. Radiated Emissions, Peak, 4x4, 5dBi, 5670, 1-7GHz

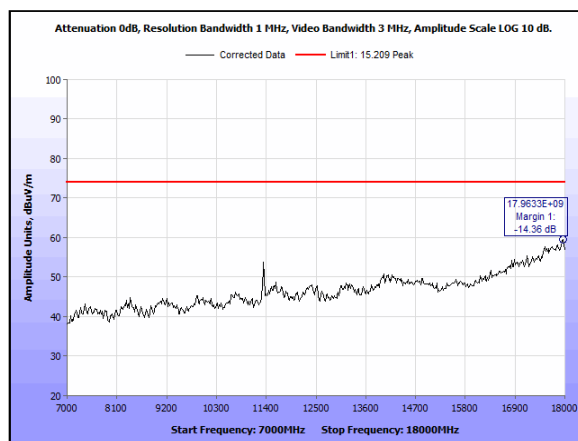


Plot 201. Radiated Emissions, Peak, 4x4, 5dBi, 5670, 7-18GHz

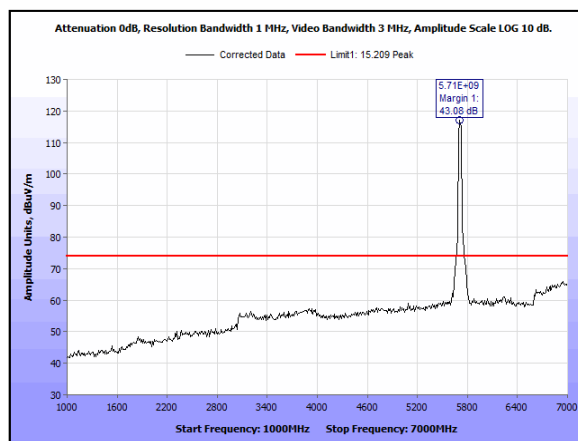


Plot 202. Radiated Emissions, Peak, 4x4, 5dBi, 5710, 1-7GHz

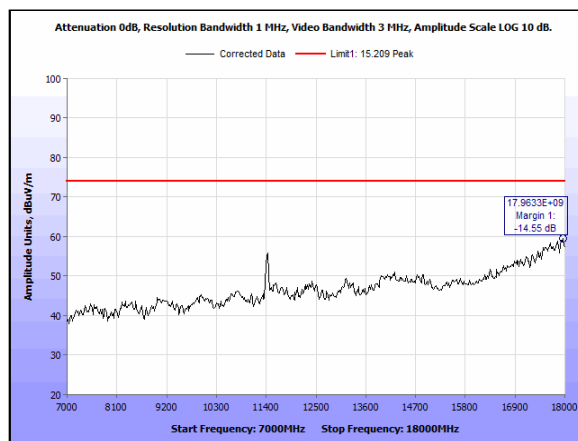


Plot 203. Radiated Emissions, Peak, 4x4, 5dBi, 5710, 7-18GHz

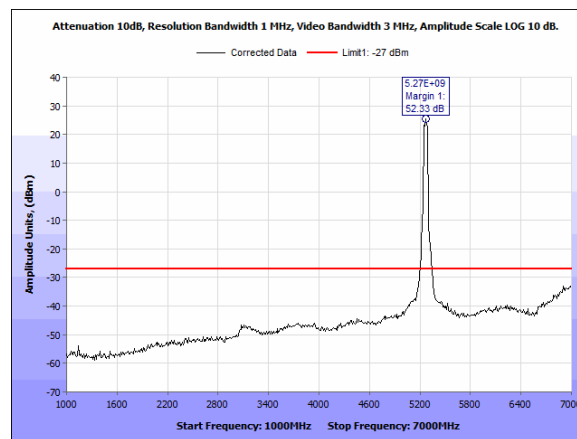


Plot 204. Radiated Emissions, -27dBm, 4x4, 5dBi, 5270, 1-7GHz

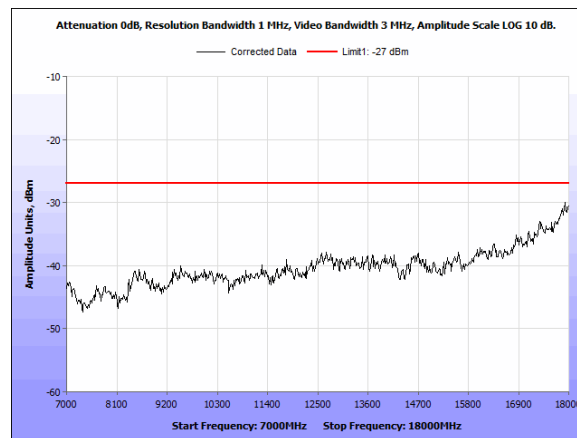


Plot 205. Radiated Emissions, -27dBm, 4x4, 5dBi, 5270, 7-18GHz

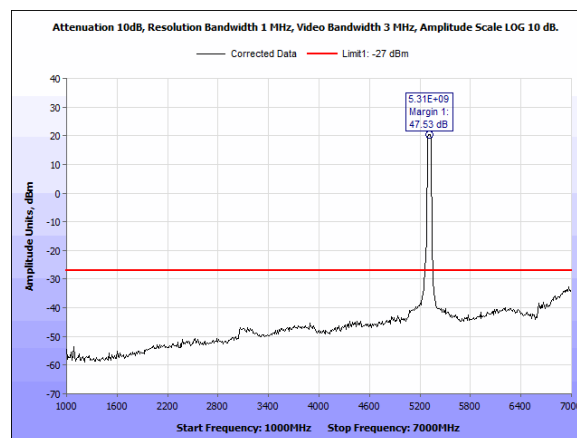


Plot 206. Radiated Emissions, -27dBm, 4x4, 5dBi, 5310, 1-7GHz

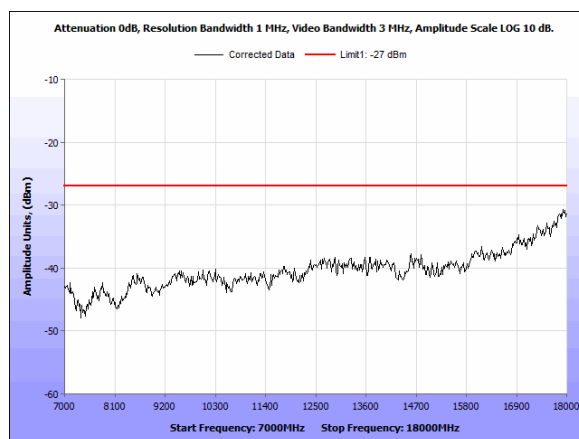


Plot 207. Radiated Emissions, -27dBm, 4x4, 5dBi, 5310, 7-18GHz

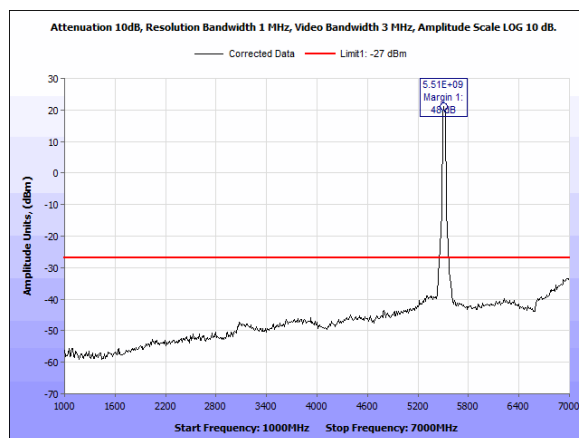


Plot 208. Radiated Emissions, -27dBm, 4x4, 5dBi, 5510, 1-7GHz

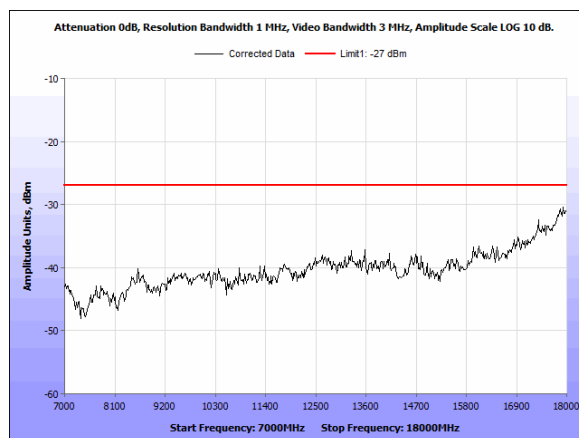


Plot 209. Radiated Emissions, -27dBm, 4x4, 5dBi, 5510, 7-18GHz

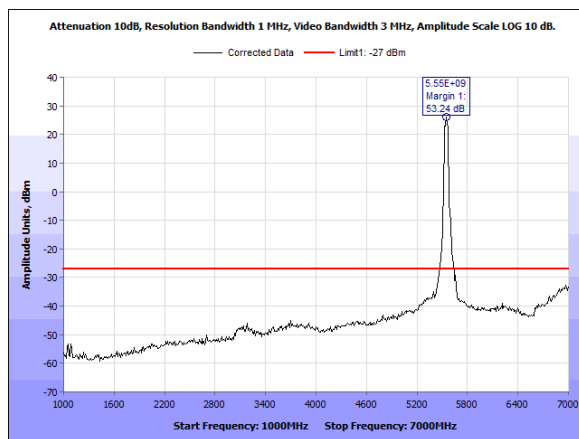


Plot 210. Radiated Emissions, -27dBm, 4x4, 5dBi, 5550, 1-7GHz

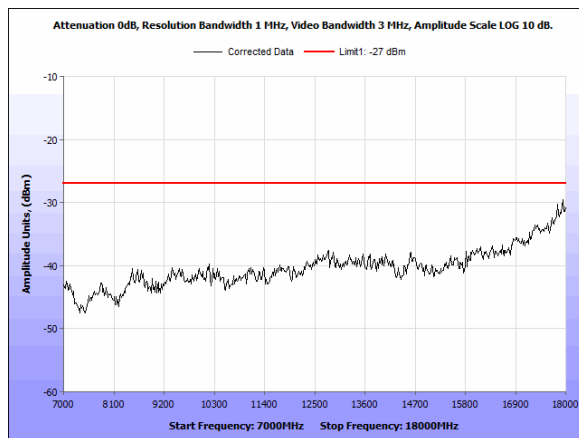


Plot 211. Radiated Emissions, -27dBm, 4x4, 5dBi, 5550, 7-18GHz

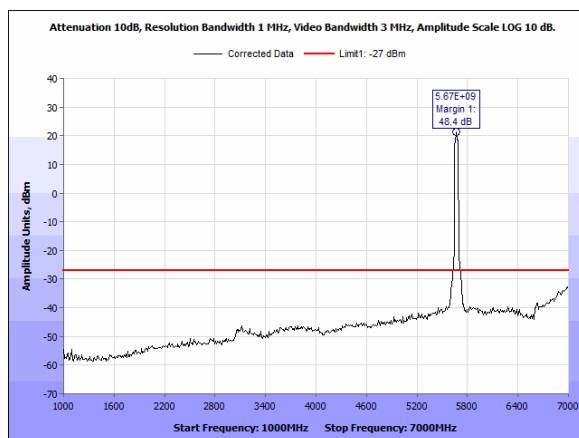


Plot 212. Radiated Emissions, -27dBm, 4x4, 5dBi, 5670, 1-7GHz

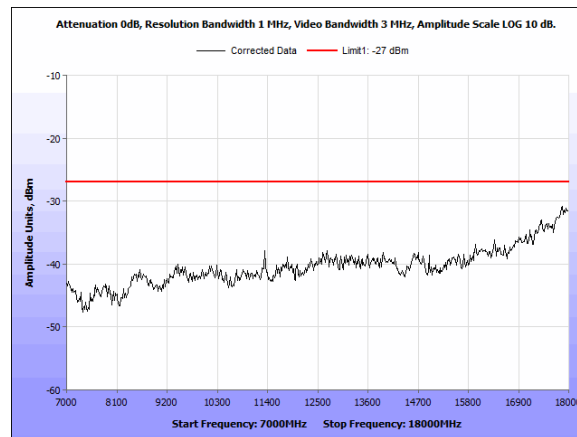


Plot 213. Radiated Emissions, -27dBm, 4x4, 5dBi, 5670, 7-18GHz

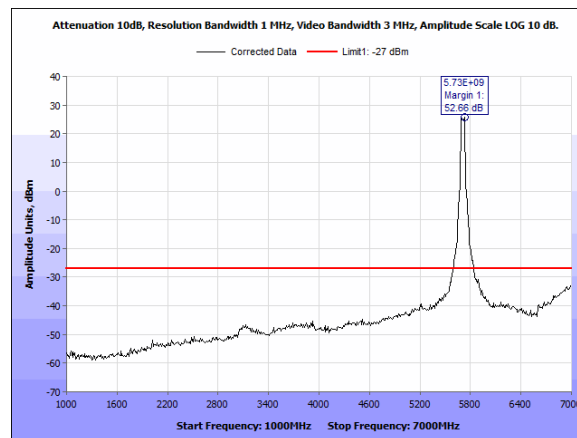


Plot 214. Radiated Emissions, -27dBm, 4x4, 5dBi, 5710, 1-7GHz

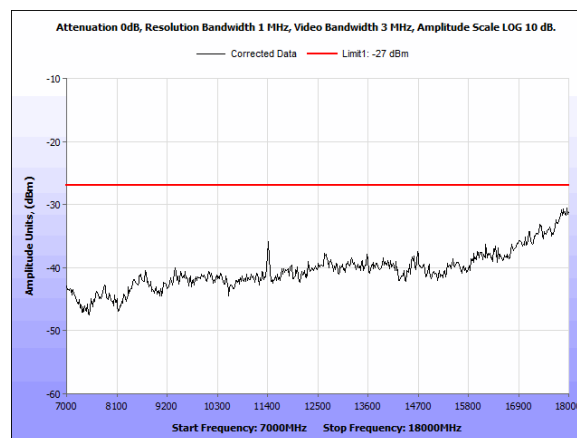


Plot 215. Radiated Emissions, -27dBm, 4x4, 5dBi, 5710, 7-18GHz

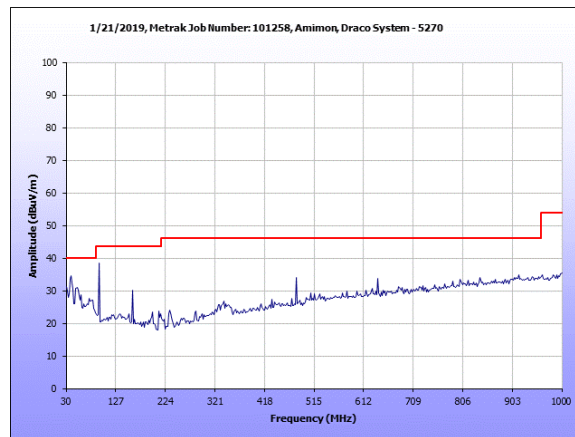


Plot 216. Radiated Spurious Emissions, 5270MHz, Worst Case, 30-1000MHz

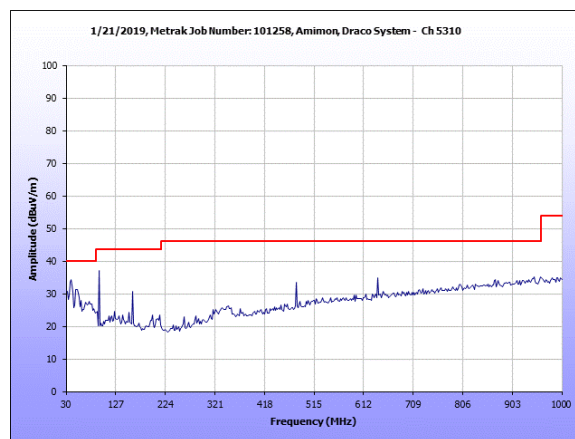


Plot 217. Radiated Spurious Emissions, 5310MHz, Worst Case, 30-1000MHz

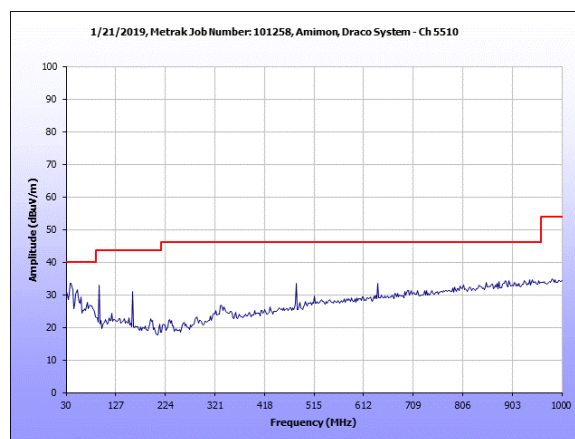


Plot 218. Radiated Spurious Emissions, 5510MHz, Worst Case, 30-1000MHz

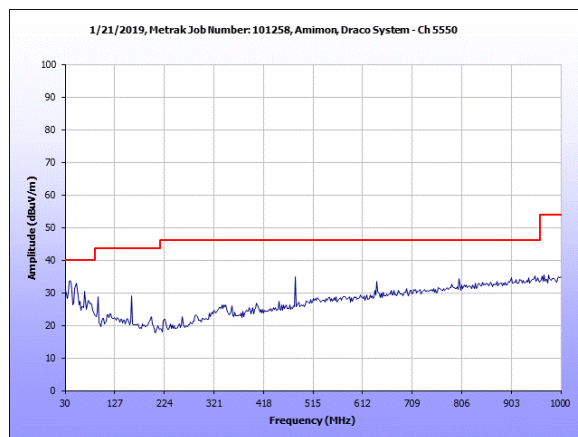

Plot 219. Radiated Spurious Emissions, 5550MHz, Worst Case, 30-1000MHz

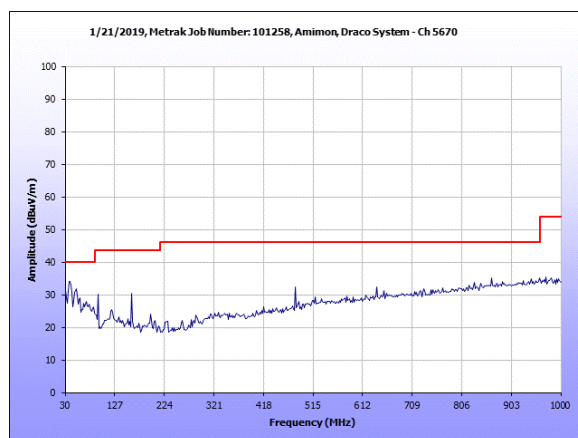


Plot 220. Radiated Spurious Emissions, 5670MHz, Worst Case, 30-1000MHz

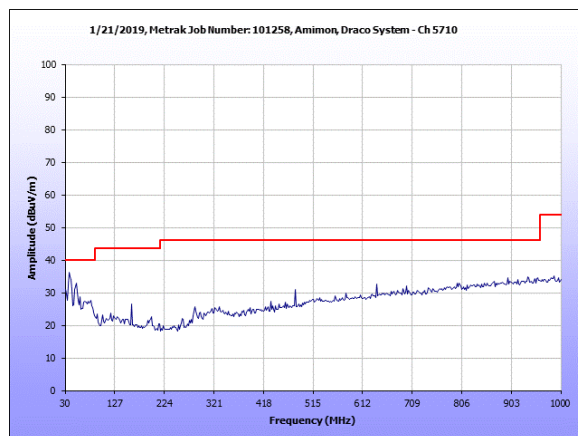


Plot 221. Radiated Spurious Emissions, 5710MHz, Worst Case, 30-1000MHz


## Radiated Band Edge

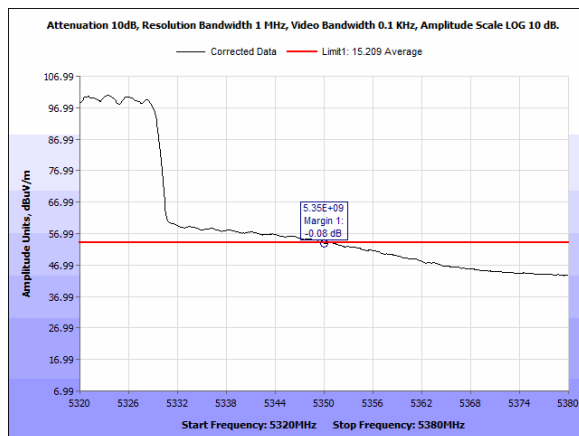


Plot 222. Radiated Band Edge, Average, 5350, BW40M, CF5310MHz, 2x2, 5dBi

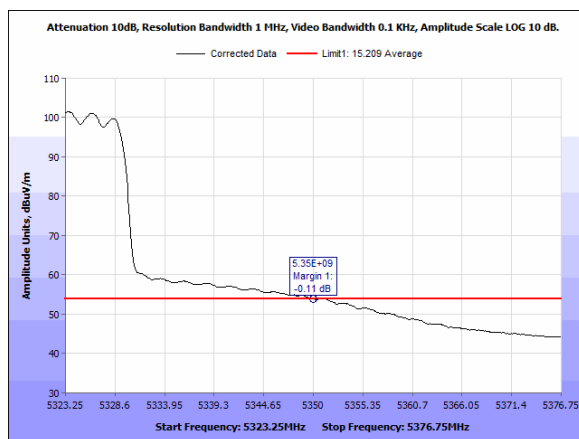


Plot 223. Radiated Band Edge, Average, 5350, BW40M, CF5310MHz, 2x2, 2dBi

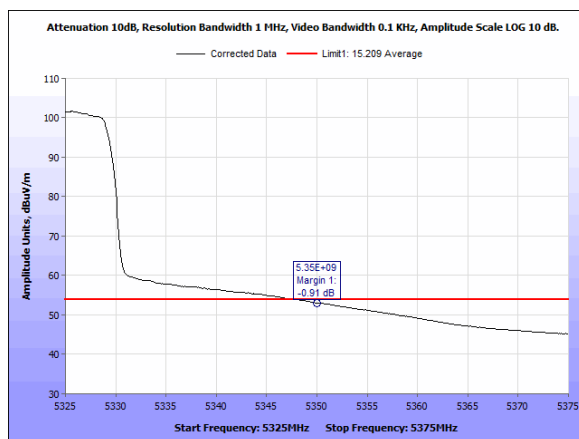


Plot 224. Radiated Band Edge, Average, 5350, BW40M, CF5310MHz, 4x4, 2dBi

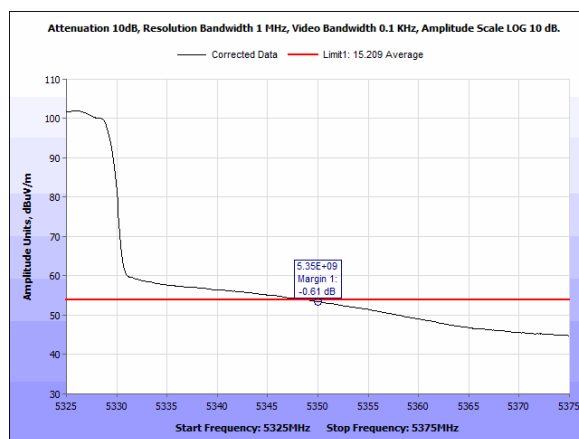


Plot 225. Radiated Band Edge, Average, 5350, BW40M, CF5310MHz, 4x4, 5dBi

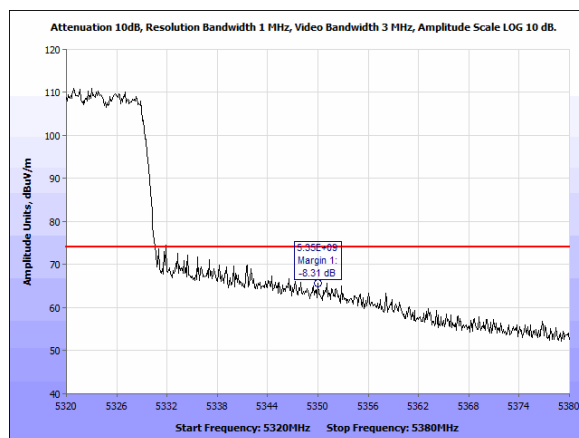


Plot 226. Radiated Band Edge, Peak, 5350, BW40M, CF5310MHz, 2x2, 5dBi

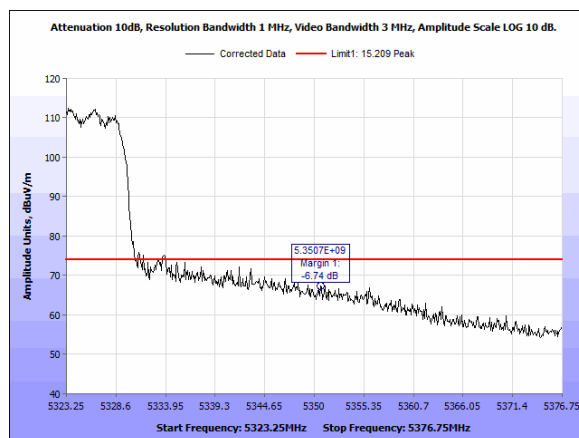


Plot 227. Radiated Band Edge, Peak, 5350, BW40M, CF5310MHz, 2x2, 2dBi

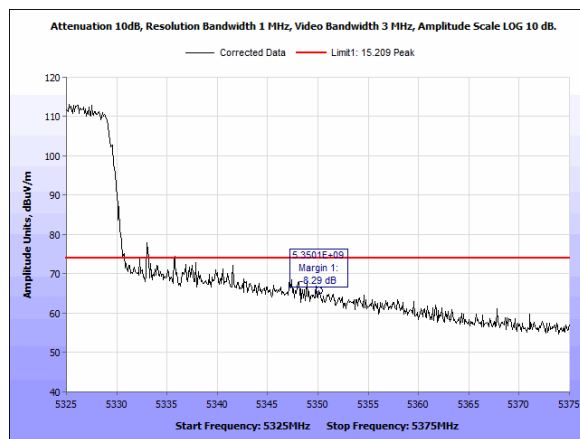


Plot 228. Radiated Band Edge, Peak, 5350, BW40M, CF5310MHz, 4x4, 2dBi

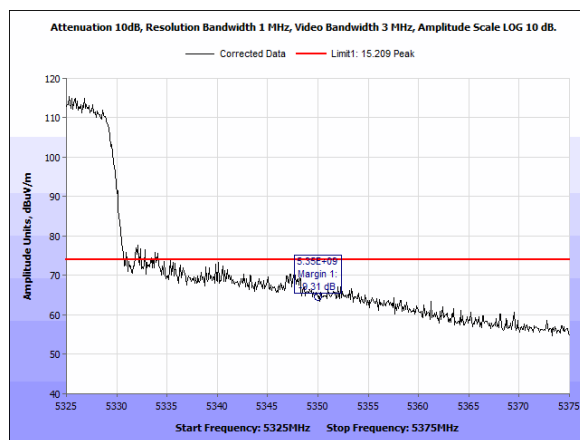


Plot 229. Radiated Band Edge, Peak, 5350, BW40M, CF5310MHz, 4x4, 5dBi

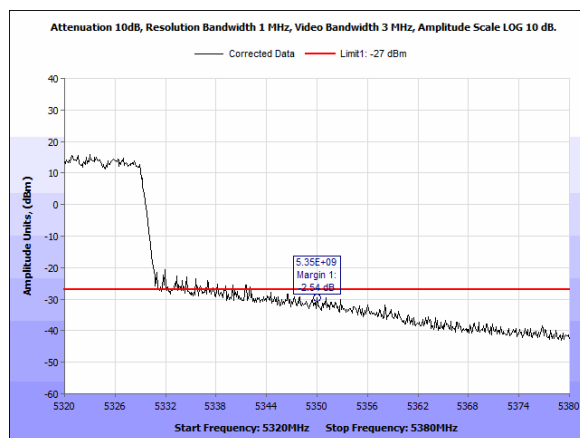


Plot 230. Radiated Band Edge, -27dBm, 5350, BW40M, CF5310MHz, 2x2, 5dBi

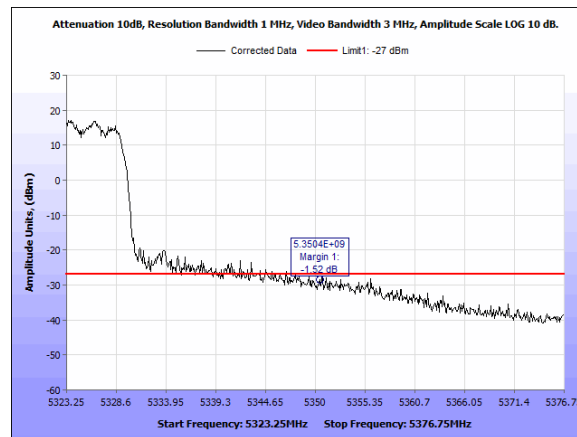


Plot 231. Radiated Band Edge, -27dBm, 5350, BW40M, CF5310MHz, 2x2, 2dBi

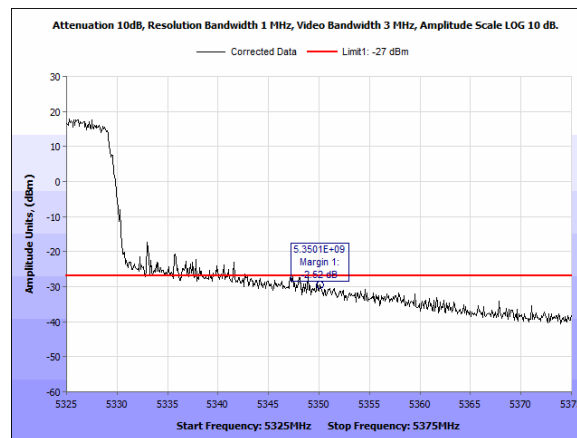


Plot 232. Radiated Band Edge, -27dBm, 5350, BW40M, CF5310MHz, 4x4, 2dBi

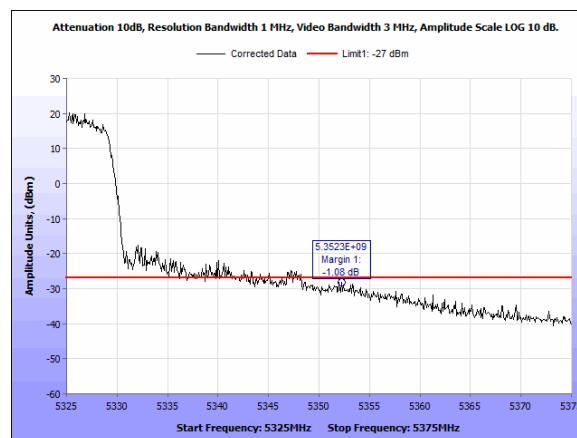


Plot 233. Radiated Band Edge, -27dBm, 5350, BW40M, CF5310MHz, 4x4, 5dBi

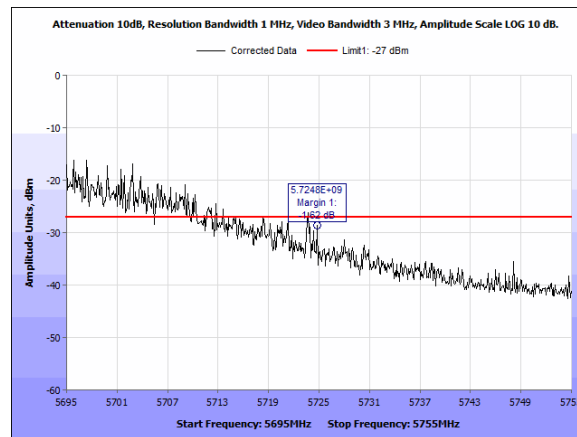


Plot 234. Radiated Band Edge, -27dBm, 5725, BW40M, CF5670MHz, 2x2, 5dBi

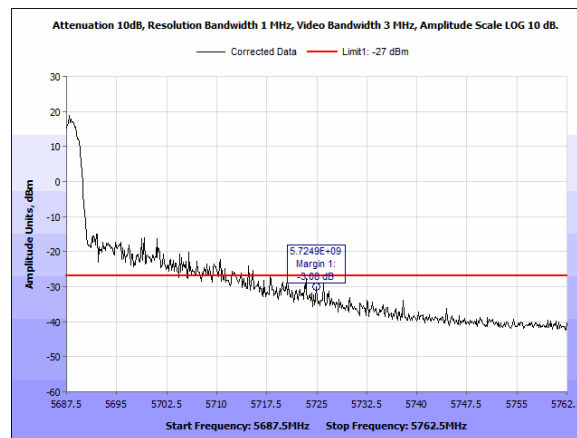


Plot 235. Radiated Band Edge, -27dBm, 5725, BW40M, CF5670MHz, 2x2, 2dBi

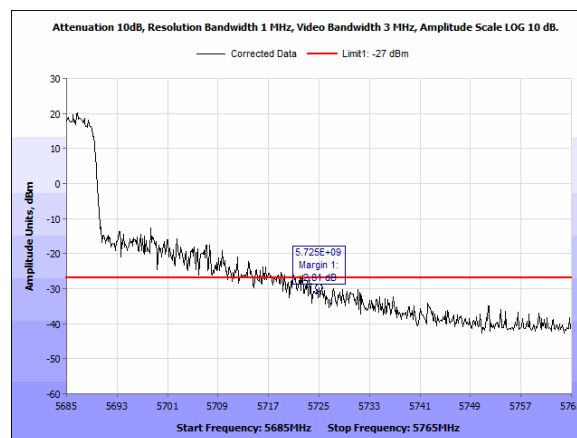


Plot 236. Radiated Band Edge, -27dBm, 5725, BW40M, CF5670MHz, 4x4, 2dBi

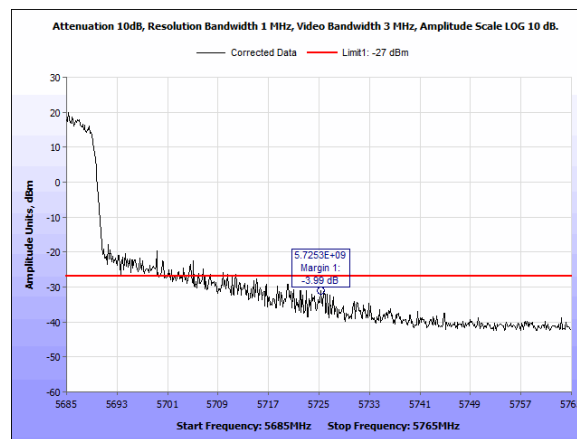


Plot 237. Radiated Band Edge, -27dBm, 5725, BW40M, CF5670MHz, 4x4, 5dBi

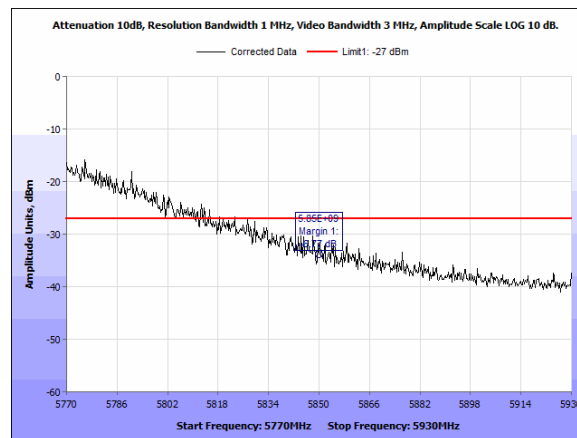


Plot 238. Radiated Band Edge, -27dBm, 5850, BW40M, CF5710MHz, 2x2, 5dBi

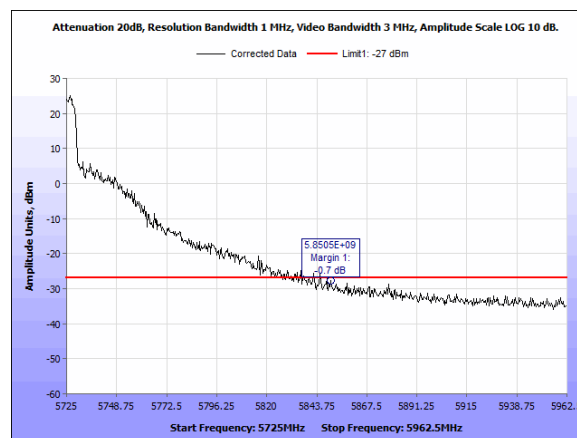


Plot 239. Radiated Band Edge, -27dBm, 5850, BW40M, CF5710MHz, 4x4, 5dBi

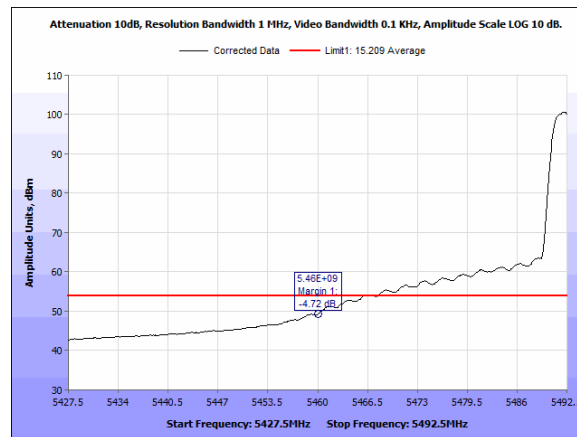


Plot 240. Radiated Band Edge, Average, 5460, BW40M, CF5510MHz, 2x2, 5dBi

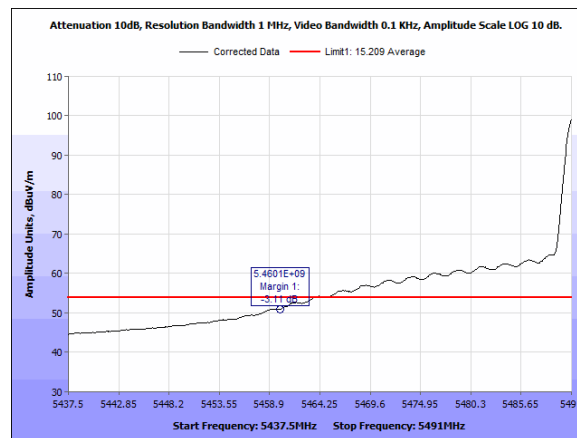


Plot 241. Radiated Band Edge, Average, 5460, BW40M, CF5510MHz, 2x2, 2dBi

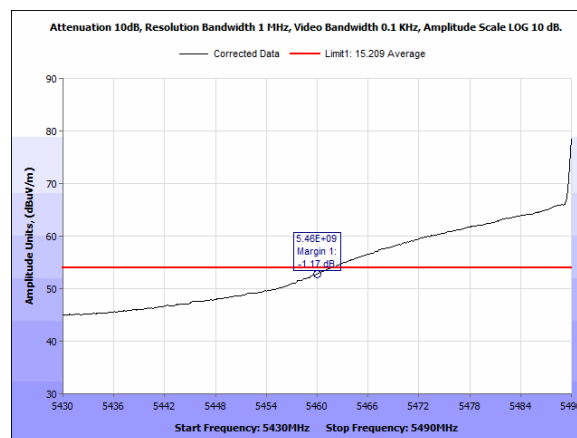


Plot 242. Radiated Band Edge, Average, 5460, BW40M, CF5510MHz, 4x4, 2dBi

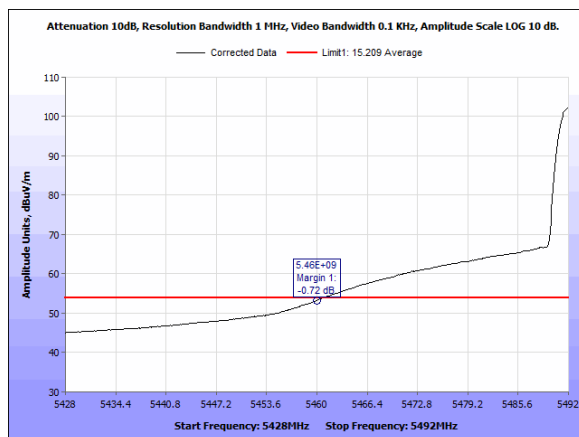


Plot 243. Radiated Band Edge, Average, 5460, BW40M, CF5510MHz, 4x4, 5dBi

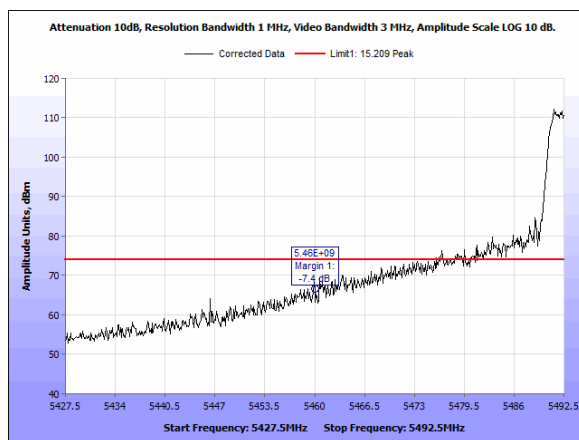


Plot 244. Radiated Band Edge, Peak, 5460, BW40M, CF5510MHz, 2x2, 5dBi

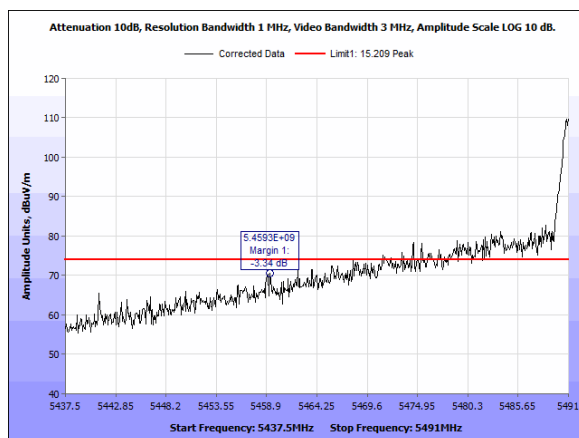


Plot 245. Radiated Band Edge, Peak, 5460, BW40M, CF5510MHz, 2x2, 2dBi

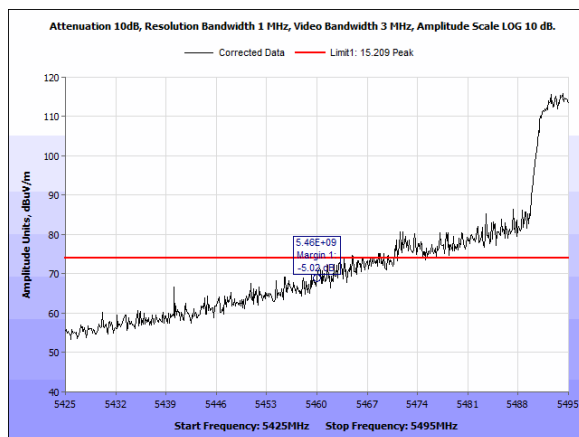


Plot 246. Radiated Band Edge, Peak, 5460, BW40M, CF5510MHz, 4x4, 2dBi

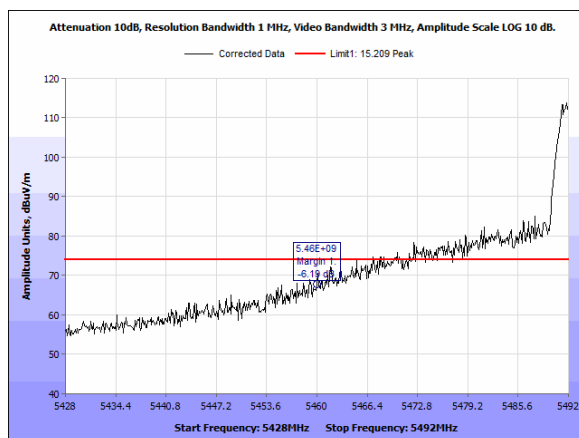


Plot 247. Radiated Band Edge, Peak, 5460, BW40M, CF5510MHz, 4x4, 5dBi

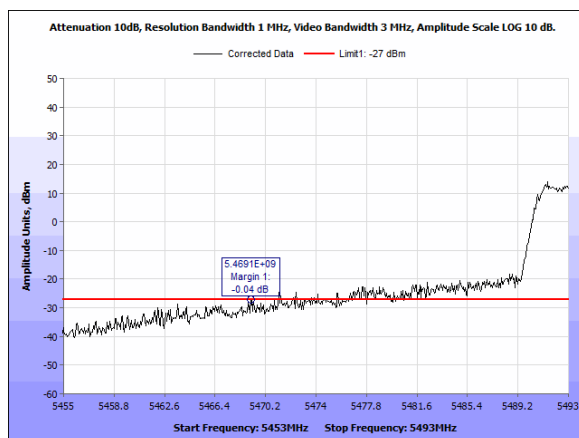


Plot 248. Radiated Band Edge, -27dBm, 5470, BW40M, CF5510MHz, 2x2, 5dBi

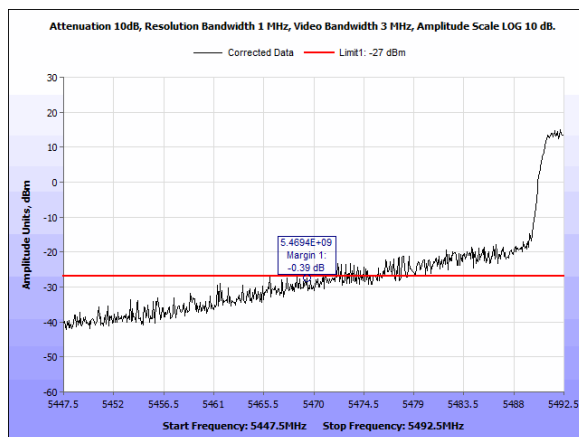

Plot 249. Radiated Band Edge, -27dBm, 5470, BW40M, CF5510MHz, 2x2, 2dBi

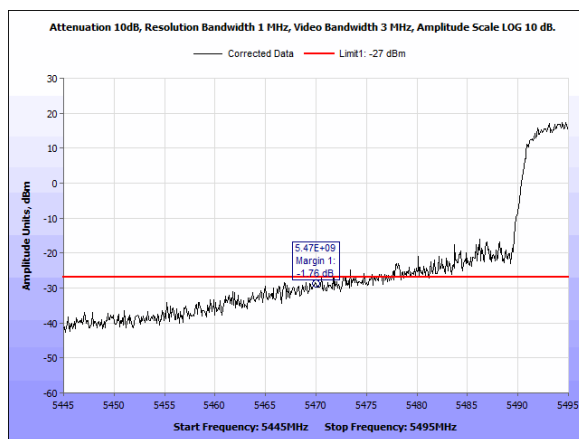

Plot 250. Radiated Band Edge, -27dBm, 5470, BW40M, CF5510MHz, 4x4, 2dBi

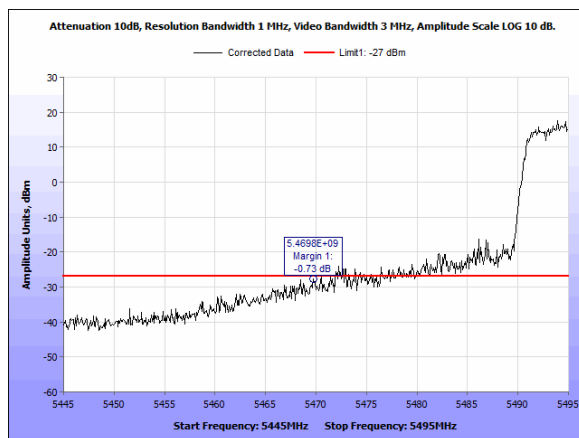

Plot 251. Radiated Band Edge, -27dBm, 5470, BW40M, CF5510MHz, 4x4, 5dBi

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(b)(6) Conducted Emissions

**Test Requirement(s):** § 15.407 (b)(6): Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

§ 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Sigma$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency range<br>(MHz) | § 15.207(a), Conducted Limit (dB $\mu$ V) |         |
|--------------------------|-------------------------------------------|---------|
|                          | Quasi-Peak                                | Average |
| * 0.15 - 0.5             | 66 - 56                                   | 56 - 46 |
| 0.5 - 5                  | 56                                        | 46      |
| 5 - 30                   | 60                                        | 50      |

**Table 20. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**


Note: \*Decreases with the logarithm of the frequency.

**Test Procedure:** The EUT was placed on a non-metallic table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.10-2013


**Test Results:** The EUT was compliant with requirements of this section.

**Test Engineer(s):** Donald Salguero

**Test Date(s):** March 6, 2019

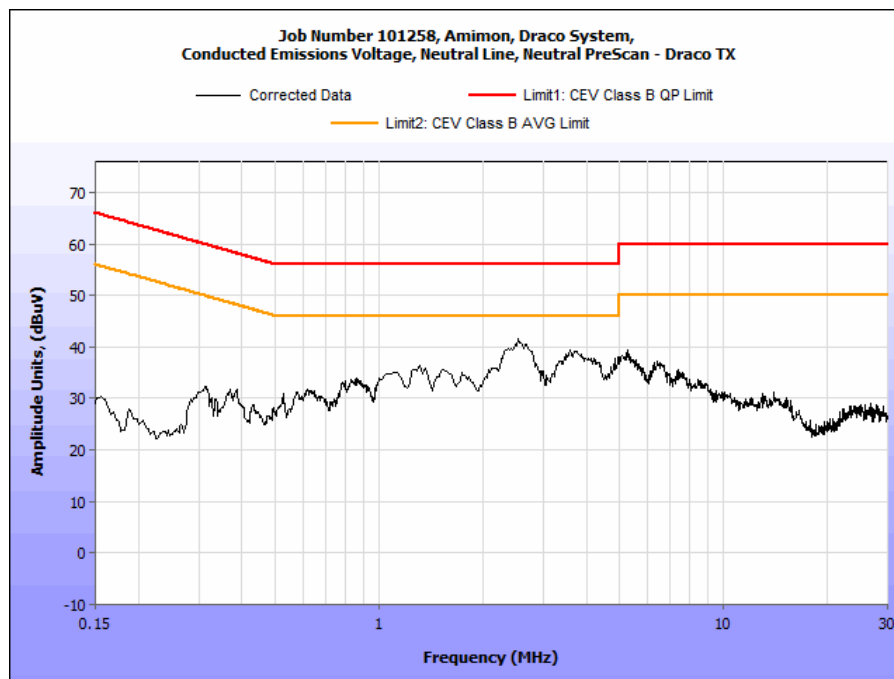

Plot 252. Conducted Emissions, neutral prescan

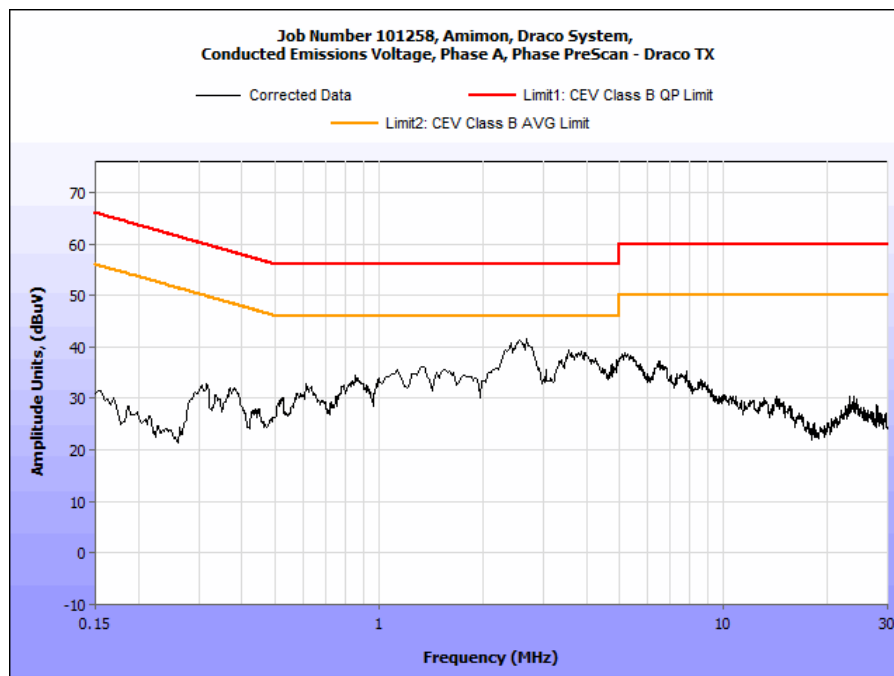

Plot 253. Conducted Emissions, phase prescan

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(f) Maximum Permissible Exposure

**Test Requirement(s):** §15.407(f): U-NII devices are subject to the radio frequency radiation exposure requirements specified in §1.1307(b), §2.1091 and §2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment.

**RF Exposure Requirements:** §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission’s guidelines.

**RF Radiation Exposure Limit:** §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit: EUT’s operating frequencies @ 5250-5350 MHz and 5470 – 5725 MHz; **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

#### Test Results:

| FCC             |                 |                |                 |                   |                                    |                             |         |               |        |
|-----------------|-----------------|----------------|-----------------|-------------------|------------------------------------|-----------------------------|---------|---------------|--------|
| Frequency (MHz) | Con. Pwr. (dBm) | Con. Pwr. (mW) | Ant. Gain (dBi) | Ant. Gain numeric | Pwr. Density (mW/cm <sup>2</sup> ) | Limit (mW/cm <sup>2</sup> ) | Margin  | Distance (cm) | Result |
| 5270            | 23.975          | 249.747        | 2               | 1.585             | 0.07875                            | 1                           | 0.92125 | 20            | Pass   |
| 5550            | 23.873          | 243.95         | 5               | 3.162             | 0.15347                            | 1                           | 0.84653 | 20            | Pass   |

The safe distance where Power Density is less than the MPE Limit listed above was found to be 20 cm.

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

| MET Asset # | Equipment                      | Manufacturer              | Model               | Last Cal Date | Cal Due Date |
|-------------|--------------------------------|---------------------------|---------------------|---------------|--------------|
| 1T4409      | EMI Receiver                   | Rohde & Schwarz           | ESIB7               | 01/04/2019    | 01/04/2021   |
| 1T2948      | LISN                           | Solar Electronics Company | 8028-50-TS-24-BNC   | 8/31/2018     | 2/29/2020    |
| 1T2947      | LISN                           | Solar Electronics Company | 8028-50-TS-24-BNC   | 8/31/2018     | 2/29/2020    |
| 1T4771      | PSA Spectrum Analyzer          | Agilent Technologies      | E4446A              | 5/16/2018     | 12/16/2019   |
| 1T4503      | Shielded Room                  | Universal Shielding Corp  | N/A                 | Not Required  |              |
| 1T4905      | Horn Antenna                   | Com-Power                 | AH-118              | 5/7/2019      | 11/7/2020    |
| 1T4576      | Antenna, Active Horn           | Com-Power                 | AHA-118             | 5/8/2019      | 11/8/2020    |
| 1T4414      | Microwave Pre-Amplifier        | A.H. Systems, Inc.        | PAM-0118            | Func Verify   |              |
| 1T4753      | Antenna - Bilog                | Sunol Sciences            | JB6                 | 08/30/2018    | 02/29/2020   |
| 1T4300B     | Semi-Anechoic 3m Chamber sVSWR | EMC TEST SYSTEMS          | NONE                | 6/30/2019     | 12/30/2020   |
| 1T4300      | SEMI-ANECHOIC CHAMBER (NSA)    | EMC TEST SYSTEMS          | NONE                | 6/30/2019     | 6/30/2020    |
| 1T4612      | Spectrum Analyzer              | Agilent Technologies      | E4407B              | 5/15/2018     | 12/15/2019   |
| 1T4829      | Spectrum Analyzer              | Agilent Technologies      | E4407B              | 09/28/2018    | 03/28/2020   |
| 1T4745      | Antenna, Horn                  | ETS-Lindgren              | 3116                | 11/27/2018    | 5/27/2020    |
| 1T4752      | Pre-Amplifier                  | Miteq                     | JS44-18004000-35-8P | Func. Verify  |              |
| 1T8743      | Preamplifier                   | A.H. Systems, Inc.        | PAM-0118P           | Func. Verify  |              |

**Table 21. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

## **V. Certification & User's Manual Information**

## Certification & User's Manual Information

### M. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.