



## MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

September 29, 2015

Amimon  
2 Maskit St. Building D, 2nd Floor  
Herzlia, Israel 46733

Dear Tal Keren-Zvi,

Enclosed is the EMC Wireless test report for compliance testing of the Amimon, Kite - TX Module as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15, Subpart B for Unintentional Radiators and Part 15.407 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\Amimon\EMC39997A-FCC407 Rev. 3)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



## **MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

---

### **Electromagnetic Compatibility Criteria Test Report**

for the

#### **Amimon Kite - TX Module**

**Tested under**  
the Certification Rules  
contained in  
Title 47 of the CFR, Part 15, Subpart B  
for Unintentional Radiators  
and  
Title 47 of the CFR, Part 15.407  
for Intentional Radiators

**MET Report: EMC39997A-FCC407 Rev. 3**

September 29, 2015

#### **Prepared For:**

**Amimon  
2 Maskit St. Building D, 2<sup>nd</sup> Floor  
Herzlia, Israel 46733**

**Prepared By:**


**MET Laboratories, Inc.**  
914 W. Patapsco Ave  
Baltimore, MD 21230

## Electromagnetic Compatibility Criteria Test Report

for the

### Amimon Model Kite - TX Module

**Tested under**  
the Certification Rules  
contained in  
Title 47 of the CFR, Part 15, Subpart B  
for Unintentional Radiators  
and  
Title 47 of the CFR, Part 15.407  
for Intentional Radiators



Djed Mouada, Project Engineer  
Electromagnetic Compatibility Lab



Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.



Asad Bajwa, Director  
Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	January 30, 2014	Initial Issue.
1	February 20, 2014	Revised to reflect engineer corrections.
2	March 11, 2014	Revised to reflect engineer corrections.
3	September 29, 2015	Revised to reflect new FCC rules.

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview.....	4
	B. References.....	5
	C. Test Site .....	5
	D. Description of Test Sample .....	5
	E. Equipment Configuration.....	6
	F. Support Equipment .....	7
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	8
	I. Method of Monitoring EUT Operation.....	8
	J. Modifications .....	8
	a) Modifications to EUT .....	8
	b) Modifications to Test Standard.....	8
	K. Disposition of EUT .....	8
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Unintentional Radiators .....</b>	<b>9</b>
	§ 15.107(a) Conducted Emissions Limits.....	10
	§ 15.109(a) Radiated Emissions Limits .....	14
<b>IV.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>17</b>
	§ 15.203 Antenna Requirement .....	18
	§ 15.207 Conducted Emissions Limits .....	19
	§ 15.403(c) 26dB Bandwidth.....	23
	§ 15.407(a)(1) RF Power Output .....	34
	§ 15.407(a)(1) Peak Power Spectral Density .....	40
	§ 15.407(b) Undesirable Emissions .....	46
	§ 15.407(f) RF Exposure .....	66
	§ 15.407(g) Frequency Stability .....	67
<b>V.</b>	<b>Test Equipment .....</b>	<b>80</b>
<b>VI.</b>	<b>Certification &amp; User's Manual Information .....</b>	<b>82</b>
	A. Certification Information .....	83
	B. Label and User's Manual Information .....	87

## List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing .....	2
Table 2. EUT Summary.....	4
Table 3. References .....	5
Table 4. Equipment Configuration .....	6
Table 5. Support Equipment.....	7
Table 6. Ports and Cabling Information .....	7
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a) .....	10
Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz).....	11
Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz) .....	12
Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b) .....	14
Table 11. Radiated Emissions Limits, Test Results .....	15
Table 12. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	19
Table 13. Conducted Emissions, §15.207 - Voltage, AC Power, Phase Line (120 VAC, 60 Hz).....	20
Table 14. Conducted Emissions, §15.207 - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz) .....	21
Table 15. RF Power Output, Test Results .....	34
Table 16. Power Spectral Density, Test Results.....	40
Table 18. Frequency Stability, Test Results .....	67
Table 19. Test Equipment List .....	81

## List of Figures

Figure 1. Block Diagram of Equipment .....	8
Figure 2. Occupied Bandwidth, Test Setup .....	23
Figure 3. Power Output Test Setup .....	34
Figure 4. Power Spectral Density Test Setup .....	40

## List of Photographs

Photograph 1. Amimon Kite - TX Module.....	6
Photograph 2. Conducted Emissions, Test Setup .....	13
Photograph 3. Radiated Emission, Test Setup.....	16
Photograph 4. Conducted Emissions, §15.207, Test Setup .....	22
Photograph 5. Radiated Spurious Emissions, Test Setup Above 1 GHz .....	64

## List of Plots

Plot 1. Conducted Emission, Phase Line Plot .....	11
Plot 2. Conducted Emission, Neutral Line Plot.....	12
Plot 3. Radiated Emissions, Pre-Scan.....	15
Plot 4. Conducted Emissions, §15.207, Phase Line Plot .....	20
Plot 5. Conducted Emissions, §15.207, Neutral Line Plot .....	21
Plot 6. 26 dB Occupied Bandwidth, 5160 MHz, 20 MHz, Channel 0 .....	24
Plot 7. 26 dB Occupied Bandwidth, 5160 MHz, 20 MHz, Channel 1 .....	24
Plot 8. 26 dB Occupied Bandwidth, 5200 MHz, 20 MHz, Channel 0 .....	25
Plot 9. 26 dB Occupied Bandwidth, 5200 MHz, 20 MHz, Channel 1 .....	25
Plot 10. 26 dB Occupied Bandwidth, 5240 MHz, 20 MHz, Channel 0 .....	26
Plot 11. 26 dB Occupied Bandwidth, 5240 MHz, 20 MHz, Channel 1 .....	26
Plot 12. 26 dB Occupied Bandwidth, 5190 MHz, 40 MHz, Channel 0 .....	27
Plot 13. 26 dB Occupied Bandwidth, 5190 MHz, 40 MHz, Channel 1 .....	27
Plot 14. 26 dB Occupied Bandwidth, 5230 MHz, 40 MHz, Channel 0 .....	28
Plot 15. 26 dB Occupied Bandwidth, 5230 MHz, 40 MHz, Channel 1 .....	28
Plot 16. 99% Bandwidth, 5160 MHz, 20 MHz, Channel 0 .....	29
Plot 17. 99% Bandwidth, 5160 MHz, 20 MHz, Channel 1 .....	29
Plot 18. 99% Bandwidth, 5200 MHz, 20 MHz, Channel 0 .....	30
Plot 19. 99% Bandwidth, 5200 MHz, 20 MHz, Channel 1 .....	30
Plot 20. 99% Bandwidth, 5240 MHz, 20 MHz, Channel 0 .....	31
Plot 21. 99% Bandwidth, 5240 MHz, 20 MHz, Channel 1 .....	31
Plot 22. 99% Bandwidth, 5190 MHz, 40 MHz, Channel 0 .....	32
Plot 23. 99% Bandwidth, 5190 MHz, 40 MHz, Channel 1 .....	32
Plot 24. 99% Bandwidth, 5230 MHz, 40 MHz, Channel 0 .....	33
Plot 25. 99% Bandwidth, 5230 MHz, 40 MHz, Channel 1 .....	33
Plot 26. RF Power Output, 5160 MHz, 20 MHz, Channel 0 .....	35
Plot 27. RF Power Output, 5160 MHz, 20 MHz, Channel 1 .....	35
Plot 28. RF Power Output, 5200 MHz, 20 MHz, Channel 0 .....	36
Plot 29. RF Power Output, 5200 MHz, 20 MHz, Channel 1 .....	36
Plot 30. RF Power Output, 5240 MHz, 20 MHz, Channel 0 .....	37
Plot 31. RF Power Output, 5240 MHz, 20 MHz, Channel 1 .....	37
Plot 32. RF Power Output, 5190 MHz, 40 MHz, Channel 0 .....	38
Plot 33. RF Power Output, 5190 MHz, 40 MHz, Channel 1 .....	38
Plot 34. RF Power Output, 5230 MHz, 40 MHz, Channel 0 .....	39
Plot 35. RF Power Output, 5230 MHz, 40 MHz, Channel 1 .....	39
Plot 36. Power Spectral Density, 5160 MHz, 20 MHz, Channel 0.....	41
Plot 37. Power Spectral Density, 5160 MHz, 20 MHz, Channel 1.....	41
Plot 38. Power Spectral Density, 5200 MHz, 20 MHz, Channel 0...	42
Plot 39. Power Spectral Density, 5200 MHz, 20 MHz, Channel 1...	42
Plot 40. Power Spectral Density, 5240 MHz, 20 MHz, Channel 0.....	43
Plot 41. Power Spectral Density, 5240 MHz, 20 MHz, Channel 1.....	43
Plot 42. Power Spectral Density, 5190 MHz, 40 MHz, Channel 0.....	44
Plot 43. Power Spectral Density, 5190 MHz, 40 MHz, Channel 1.....	44
Plot 44. Power Spectral Density, 5230 MHz, 40 MHz, Channel 0.....	45
Plot 45. Power Spectral Density, 5230 MHz, 40 MHz, Channel 1.....	45
Plot 47. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 30 MHz – 1 GHz.....	47
Plot 48. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 30 MHz – 1 GHz.....	47
Plot 49. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Peak .....	48
Plot 50. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Average .....	48
Plot 51. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Peak .....	49
Plot 52. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Average .....	49
Plot 53. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 30 MHz – 1 GHz.....	50

Plot 54. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 30 MHz – 1 GHz.....	50
Plot 55. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Peak.....	51
Plot 56. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Average .....	51
Plot 57. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Peak.....	52
Plot 58. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Average .....	52
Plot 59. Radiated Spurious Emissions, 5240 MHz, 20 MHz Channel, 30 MHz – 1 GHz.....	53
Plot 60. Radiated Spurious Emissions, 5240 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Peak.....	53
Plot 61. Radiated Spurious Emissions, 5240 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Average .....	54
Plot 62. Radiated Spurious Emissions, 5240 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Peak.....	54
Plot 63. Radiated Spurious Emissions, 5240 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Average .....	55
Plot 64. Radiated Spurious Emissions, 5190 MHz, 40 MHz Channel, 30 MHz – 1 GHz.....	55
Plot 65. Radiated Spurious Emissions, 5190 MHz, 40 MHz Channel, 1 GHz – 7 GHz, Peak.....	56
Plot 66. Radiated Spurious Emissions, 5190 MHz, 40 MHz Channel, 1 GHz – 7 GHz, Average .....	56
Plot 67. Radiated Spurious Emissions, 5190 MHz, 40 MHz Channel, 7 GHz – 18 GHz, Peak.....	57
Plot 68. Radiated Spurious Emissions, 5190 MHz, 40 MHz Channel, 7 GHz – 18 GHz, Average .....	57
Plot 69. Radiated Spurious Emissions, 5230 MHz, 40 MHz Channel, 30 MHz – 1 GHz.....	58
Plot 70. Radiated Spurious Emissions, 5230 MHz, 40 MHz Channel, 1 GHz – 7 GHz, Peak.....	58
Plot 71. Radiated Spurious Emissions, 5230 MHz, 40 MHz Channel, 1 GHz – 7 GHz, Average .....	59
Plot 72. Radiated Spurious Emissions, 5230 MHz, 40 MHz Channel, 7 GHz – 18 GHz, Peak.....	59
Plot 73. Radiated Spurious Emissions, 5230 MHz, 40 MHz Channel, 7 GHz – 18 GHz, Average .....	60
Plot 74. Radiated Restricted Band, 5160 MHz, 20 MHz.....	61
Plot 75. Radiated Restricted Band, 5190 MHz, 40 MHz.....	61
Plot 76. Radiated Restricted Band, 5310 MHz, 40 MHz.....	62
Plot 77. Radiated Restricted Band, 5340 MHz, 20 MHz.....	62
Plot 78. Radiated Restricted Band, 5340 MHz, 20 MHz.....	63
Plot 79. Frequency Stability, 5200 MHz, -20°C, 120 V.....	68
Plot 80. Frequency Stability, 5200 MHz, -10°C, 120 V.....	68
Plot 81. Frequency Stability, 5200 MHz, 0°C, 120 V .....	69
Plot 82. Frequency Stability, 5200 MHz, 10°C, 120 V .....	69
Plot 83. Frequency Stability, 5200 MHz, 20°C, 108V .....	70
Plot 84. Frequency Stability, 5200 MHz, 20°C, 120 V .....	70
Plot 85. Frequency Stability, 5200 MHz, 20°C, 132 V .....	71
Plot 86. Frequency Stability, 5200 MHz, 30°C, 120 V .....	71
Plot 87. Frequency Stability, 5200 MHz, 40°C, 120 V .....	72
Plot 88. Frequency Stability, 5200 MHz, 50°C, 120 V .....	72
Plot 89. Frequency Stability, 5200 MHz, 55°C, 132 V .....	73
Plot 90. Frequency Stability, 5300 MHz, -20°C, 120 V .....	74
Plot 91. Frequency Stability, 5300 MHz, -10°C, 120 V .....	74
Plot 92. Frequency Stability, 5300 MHz, 0°C, 120 V .....	75
Plot 93. Frequency Stability, 5300 MHz, 10°C, 120 V .....	75
Plot 94. Frequency Stability, 5300 MHz, 20°C, 108V .....	76
Plot 95. Frequency Stability, 5300 MHz, 20°C, 120 V .....	76
Plot 96. Frequency Stability, 5300 MHz, 20°C, 132 V .....	77
Plot 97. Frequency Stability, 5300 MHz, 30°C, 120 V .....	77
Plot 98. Frequency Stability, 5300 MHz, 40°C, 120 V .....	78
Plot 99. Frequency Stability, 5300 MHz, 50°C, 120 V .....	78
Plot 100. Frequency Stability, 5300 MHz, 55°C, 132 V .....	79

## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<math>\mu</math>A</b>	Decibels above one <b>microamp</b>
<b>dB<math>\mu</math>V</b>	Decibels above one <b>microvolt</b>
<b>dB<math>\mu</math>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<math>\mu</math>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b><math>\mu</math>H</b>	<b>microhenry</b>
$\mu$	<b>microfarad</b>
$\mu$ s	<b>microseconds</b>
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts per meter
<b>VCP</b>	Vertical Coupling Plane

## I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Amimon Kite - TX Module, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Kite - TX Module. Amimon should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Kite - TX Module, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with Amimon, purchase order number 130238. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	Description	Results
15.107	Conducted Emissions	Compliant
15.109	Radiated Emissions	Compliant
15.203	Antenna Requirements	Compliant
15.207	AC Conducted Emissions	Compliant
15.403 (i)	26dB Occupied Bandwidth	Compliant
15.407 (a)(1)(iv)	Conducted Transmitter Output Power	Compliant
15.407 (a)(1)(iv)	Power Spectral Density	Compliant
15.407 (b)(1), (6)	Undesirable Emissions (15.205/15.209 - General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Compliant
15.407(f)	RF Exposure	Compliant
15.407(g)	Frequency Stability	Compliant

**Table 1. Executive Summary of EMC Part 15.407 Compliance Testing**

## II. Equipment Configuration

## A. Overview

MET Laboratories, Inc. was contracted by Amimon to perform testing on the Kite - TX Module, under Amimon's purchase order number 130238.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Amimon Kite - TX Module.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	Kite - TX Module	
<b>Model(s) Covered:</b>	Kite - TX Module	
<b>EUT Specifications:</b>	Primary Power: 120VAC, 60Hz	
	Secondary Line: 12 VDC	
	FCC ID: VSQAMNKHIN1	
	Type of Modulations:	OFDM
	Equipment Code:	NII
	Peak RF Output Power:	16.58 dBm
<b>Analysis:</b>	EUT Frequency Ranges: 5160 – 5240 MHz	
	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: -20-55° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Djed Mouada	
<b>Report Date(s):</b>	September 29, 2015	

**Table 2. EUT Summary**

## B. References

<b>CFR 47, Part 15, Subpart B</b>	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
<b>CFR 47, Part 15, Subpart E</b>	Unlicensed National Information Infrastructure Devices (UNII)
<b>ANSI C63.4:2003</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2005</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2009</b>	American National Standard for Testing Unlicensed Wireless Devices

**Table 3. References**

## C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## D. Description of Test Sample

The AMN35223\_PB AMIMON Source is designed to modulate and transmit downstream video and audio content over the wireless medium and receive a control channel over the wireless upstream. The modulation uses a 40 or 20 MHz bandwidth and is carried over the 5GHz unlicensed band. The EUT uses space time block codes for which different digital data is carried by each transmit channel during any symbol period and therefore signals are completely uncorrelated.



**Photograph 1. Amimon Kite - TX Module**

## E. Equipment Configuration

All cards, racks, etc., incorporated as part of the EUT is included in the following list.

01- Ext antenna RP-SMA connector CH#1	14- LED #3 - Low battery LED
02- Ext antenna RP-SMA connector CH#0	15-HDMI female connector
03- Internal antenna CH#0	16-Reset Button
04- External antenna UFL connector CH#0	17-Registration & Boot button
05- 5v Input Voltage connector(DC JACK)	18- 7-17v Input Voltage connector(Lemo connector)
06- APP debug Port	19- PTT connector
07- Jack 2.5mm connector	20- USB connector
08- External host connector	21- Slide switch #2 – Operation mode selector
09- Internal antenna CH#1	22- Slide switch #1 – Operation mode selector
10- External antenna UFL connector CH#1	23- DIP Switch 1- Audio path selection, 2- ADC master/slave
11- LED #1 - NETWORK status	24- DIP Switch- 1 – BOOT1, 2- DIP0
12- Jack 3.5mm connector	25- MAC DEBUG Port
13- LED #2 - VIDEO status	

**Table 4. Equipment Configuration**

## F. Support Equipment

Amimon supplied support equipment necessary for the operation and testing of the Kite - TX Module. All support equipment supplied is listed in the following Support Equipment List.


Ref. ID	Name / Description	Manufacturer	Model Number
1	PC Laptop	N/A	N/A
2	Debug Board (MAC)	Amimon	AMN043PCB
3	Debug Board (APP)	Amimon	AMN043PCB
4	USB-to-Serial Converter (MAC)	ATEN	UC-232A
5	USB-to-Serial Converter (APP)	ATEN	UC-232A
6	12V Power Supply	Switching Power Supply	S075AQ12000600
7	Lemo plug adaptor	Amimon	-
8	HDMI Cable	standard	standard
9	HDMI Pattern Generator	CYPRESS	CPHD-1

**Table 5. Support Equipment**

## G. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
J16	J16 power supply	Lemo plug adaptor	1	--	N	--
J29	J29 - HDMI in	HDMI cable	1	--	Y	--
J24	J24 - APP	Standard USB cable with USB to serial converter	1	--	Y	--
J13	J13 - MAC	Standard USB cable with USB to serial converter	1	--	Y	--

**Table 6. Ports and Cabling Information**

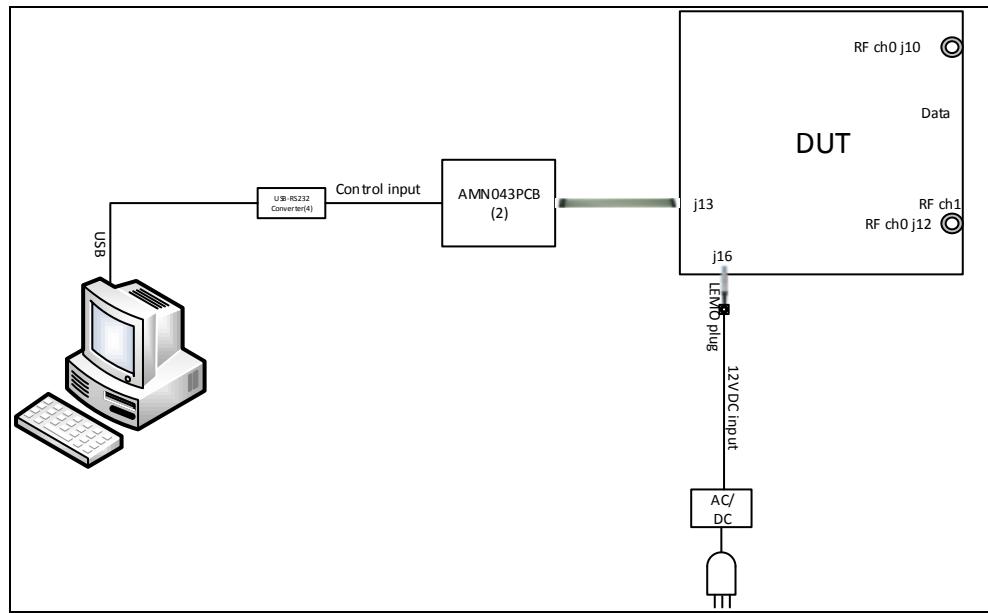

**Figure 1. Block Diagram of Equipment**

## H. Mode of Operation

The AMN35223\_PB is programmed to transmit a 100% duty cycle of streaming auto generated video test pattern. The frequency and power of operation may be programmed by the LAB using a PC tool and a serial communication connector.

## I. Method of Monitoring EUT Operation

Slow blinking (on-off once during 1sec) blue LED indicates that board is functioning.

Fast blinking (on-off 3-4 times during 1sec) same LED, means that the board is out of calibration.

When this LED is not blinking this means that board has a certain problem.

Using the SW tool to configure the board, when configuration ended successfully a clear green indication appears, while a red bad indication appears when the desired configuration fails.

## J. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Amimon upon completion of testing.

### III. Electromagnetic Compatibility Criteria for Unintentional Radiators

## Electromagnetic Compatibility Criteria

### § 15.107 Conducted Emissions Limits

**Test Requirement(s):** **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

**15.107 (b)** For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

Frequency range (MHz)	Class A Conducted Limits (dB $\mu$ V)		*Class B Conducted Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.

Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.

\* -- Limits per Subsection 15.207(a).

**Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)**

**Test Results:** The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


**Test Engineer(s):** Djed Mouada

**Test Date(s):** 12/10/13

### Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) Avg.	Limit (dBuV) Avg.	Margin (dB) Avg.
0.1539	24.47	0	24.47	65.79	-41.32	9.64	0	9.64	55.79	-46.15
0.4765	13.61	0	13.61	56.4	-42.79	5.32	0	5.32	46.4	-41.08
0.838	17.19	0	17.19	56	-38.81	7.482	0	7.482	46	-38.518
9.659	25.73	0	25.73	60	-34.27	17.8	0	17.8	50	-32.2
12.03	28.98	0	28.98	60	-31.02	20.95	0	20.95	50	-29.05
24.7	13.94	0	13.94	60	-46.06	4.09	0	4.09	50	-45.91

Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

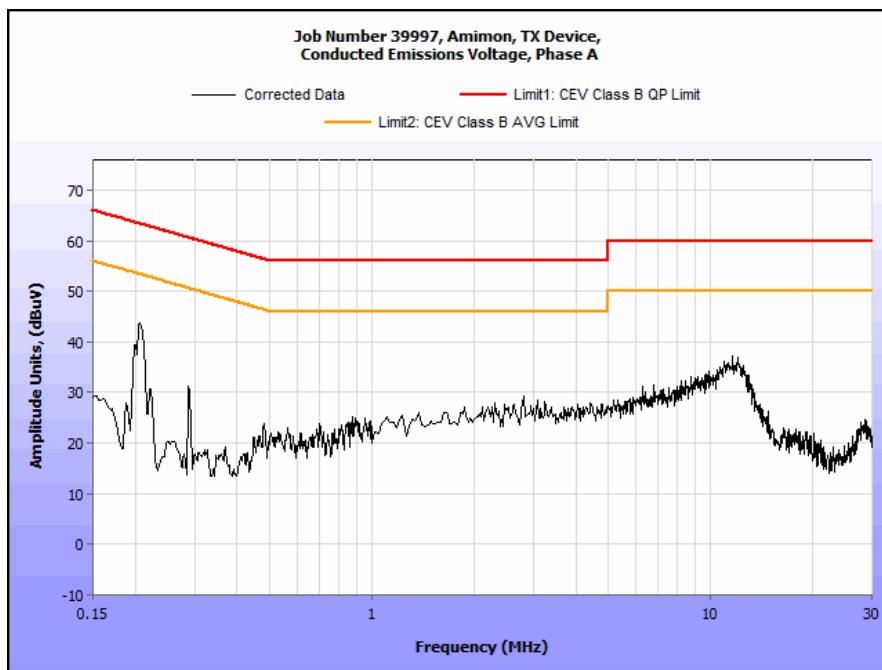


Plot 1. Conducted Emission, Phase Line Plot

### Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) Avg.	Limit (dBuV) Avg.	Margin (dB) Avg.
0.294	9.615	0	9.615	60.41	-50.795	3.708	0	3.708	50.41	-46.702
0.3346	9.26	0	9.26	59.34	-50.08	3.21	0	3.21	49.34	-46.13
0.658	12.15	0	12.15	56	-43.85	4.5	0	4.5	46	-41.5
6.021	21.74	0	21.74	60	-38.26	12.82	0	12.82	50	-37.18
12.5	32.52	0	32.52	60	-27.48	25.52	0	25.52	50	-24.48
20.82	23.01	0	23.01	60	-36.99	16.4	0	16.4	50	-33.6

Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

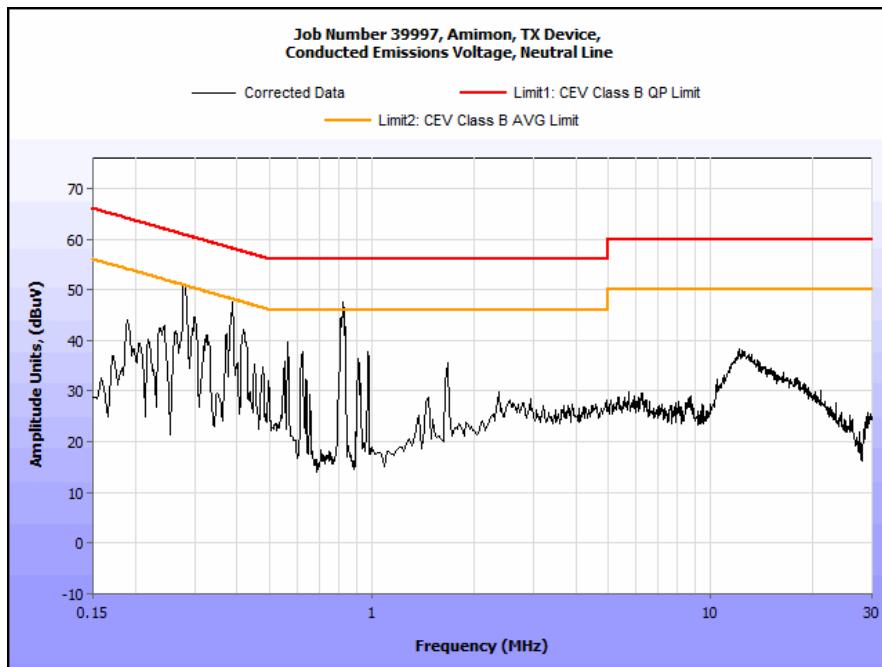

Plot 2. Conducted Emission, Neutral Line Plot

## Conducted Emission Limits Test Setup



Photograph 2. Conducted Emissions, Test Setup

## Radiated Emission Limits

### § 15.109

### Radiated Emissions Limits

**Test Requirement(s):**

**15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 10.

**15.109 (b)** The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 10.

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	
	§15.109 (b), Class A Limit (dB $\mu$ V) @ 10m	§15.109 (a), Class B Limit (dB $\mu$ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)**

**Test Procedures:**

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

**Test Results:**

The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


**Test Engineer(s):** Dqed Mouada

**Test Date(s):** 12/11/13

## Radiated Emissions Limits Test Results, Class B


Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dB $\mu$ V)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
41.663327	348	H	1.12	9.47	13.00	0.43	0.00	22.90	40.00	-17.10
41.663327	350	V	1.10	10.16	13.00	0.43	0.00	23.59	40.00	-16.41
116.36874	31	H	1.31	14.95	13.40	0.85	0.00	29.20	43.50	-14.30
116.36874	50	V	1.17	16.48	13.40	0.85	0.00	30.73	43.50	-12.77
229.3365	361	H	1.44	14.54	11.76	1.06	0.00	27.36	46.00	-18.64
229.3365	196	V	1.28	6.98	11.76	1.06	0.00	19.80	46.00	-26.20
247.79559	-3	H	1.15	6.98	12.14	1.23	0.00	13.37	46.00	-32.63
247.79559	27	V	1.28	8.78	12.14	1.23	0.00	22.15	46.00	-23.85
625.00013	20	H	1.19	5.26	19.90	2.09	0.00	27.25	46.00	-18.75
625.00013	55	V	1.19	5.18	19.90	2.09	0.00	27.17	46.00	-18.83
952.8	26	H	1.19	5.65	23.30	2.84	0.00	31.79	46.00	-14.21
952.8	356	V	1.11	5.72	23.30	2.84	0.00	31.86	46.00	-14.14

Table 11. Radiated Emissions Limits, Test Results

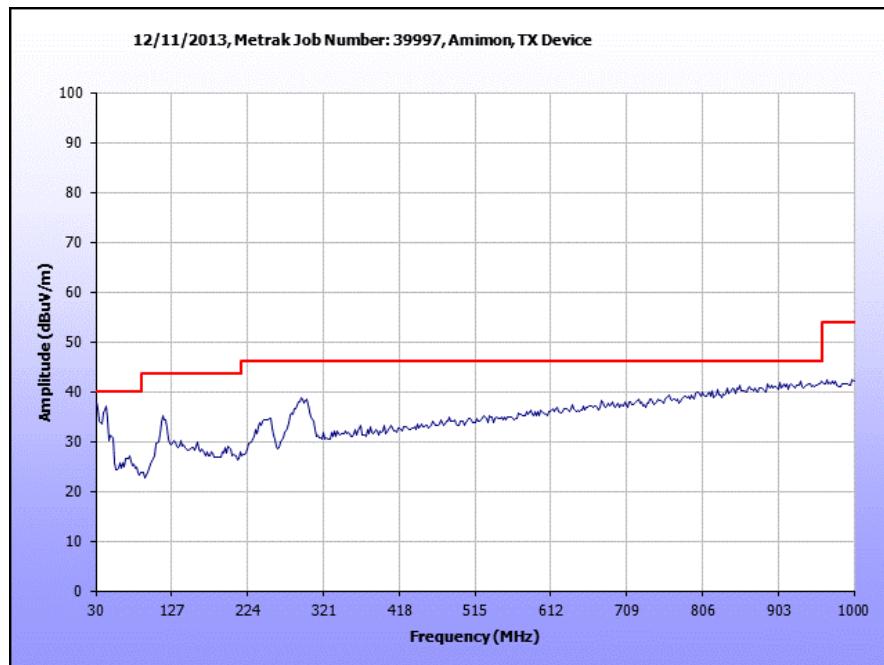

Plot 3. Radiated Emissions, Pre-Scan

## Radiated Emission Limits Test Setup

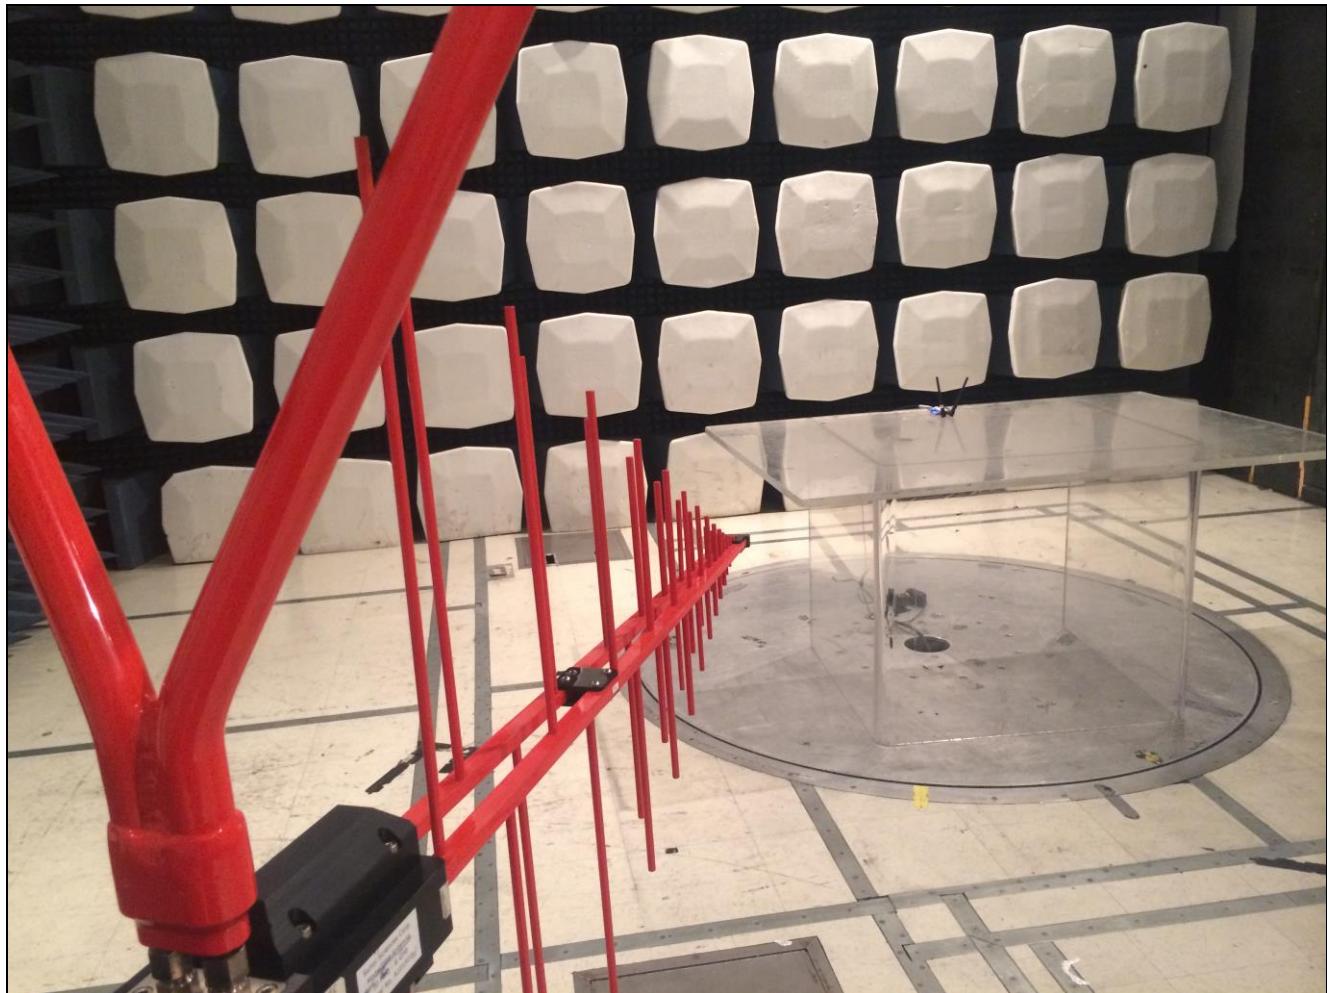

Photograph 3. Radiated Emission, Test Setup

## IV. Electromagnetic Compatibility Criteria for Intentional Radiators

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:**

**§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:**

The EUT has a unique antenna connector. Therefore, the EUT as tested is compliant with the criteria of §15.203 by virtue of unique connector. Gain of each antenna is 5 dBi.

**Test Engineer(s):** Djed Mouada

**Test Date(s):** 12/13/13

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207 Conducted Emissions Limits

**Test Requirement(s):** **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Sigma$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15 - 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 12. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:**

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter.

**Test Results:**

The EUT was compliant with the requirement(s) of this section.


**Test Engineer(s):** Djed Mouada

**Test Date(s):** 12/10/13

### Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) Avg.	Limit (dBuV) Avg.	Margin (dB) Avg.
0.1539	24.47	0	24.47	65.79	-41.32	9.64	0	9.64	55.79	-46.15
0.4765	13.61	0	13.61	56.4	-42.79	5.32	0	5.32	46.4	-41.08
0.838	17.19	0	17.19	56	-38.81	7.482	0	7.482	46	-38.518
9.659	25.73	0	25.73	60	-34.27	17.8	0	17.8	50	-32.2
12.03	28.98	0	28.98	60	-31.02	20.95	0	20.95	50	-29.05
24.7	13.94	0	13.94	60	-46.06	4.09	0	4.09	50	-45.91

Table 13. Conducted Emissions, §15.207 - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

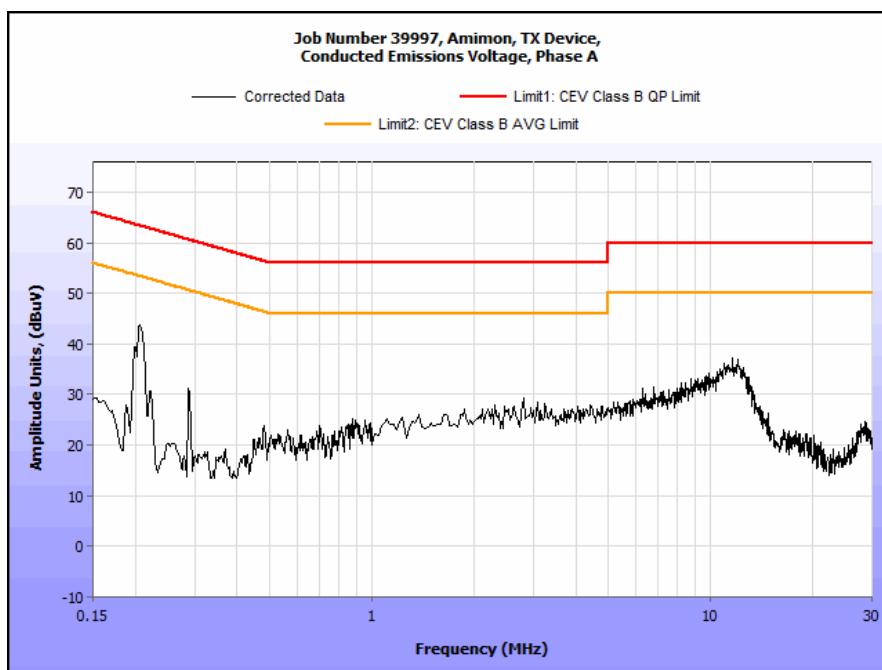


Plot 4. Conducted Emissions, §15.207, Phase Line Plot

### Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) Avg.	Limit (dBuV) Avg.	Margin (dB) Avg.
0.294	9.615	0	9.615	60.41	-50.795	3.708	0	3.708	50.41	-46.702
0.3346	9.26	0	9.26	59.34	-50.08	3.21	0	3.21	49.34	-46.13
0.658	12.15	0	12.15	56	-43.85	4.5	0	4.5	46	-41.5
6.021	21.74	0	21.74	60	-38.26	12.82	0	12.82	50	-37.18
12.5	32.52	0	32.52	60	-27.48	25.52	0	25.52	50	-24.48
20.82	23.01	0	23.01	60	-36.99	16.4	0	16.4	50	-33.6

Table 14. Conducted Emissions, §15.207 - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

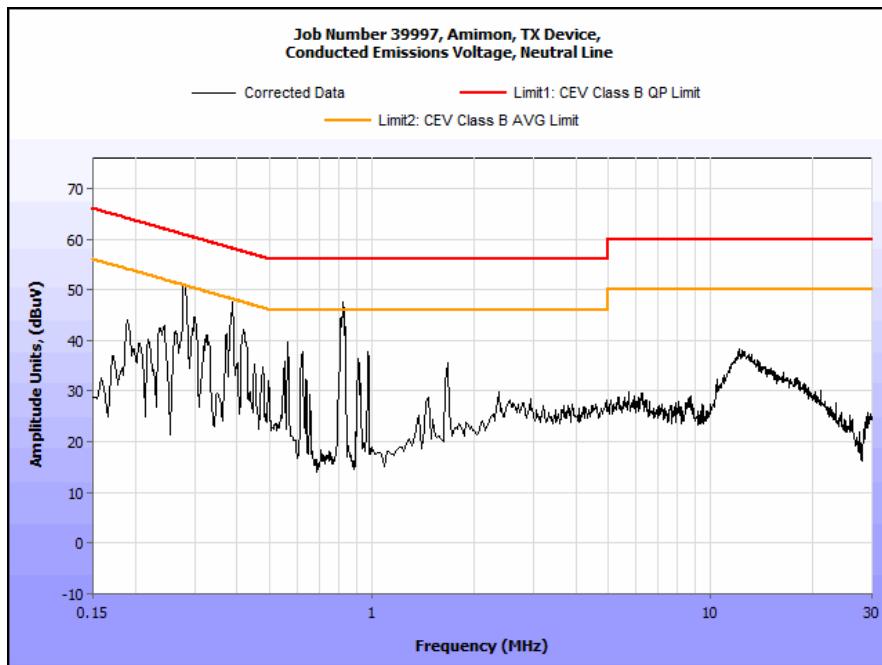

## Conducted Emission Limits Test Setup



Photograph 4. Conducted Emissions, §15.207, Test Setup

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15. 403(i) 26dB Bandwidth


**Test Requirements:** **§ 15.403 (i):** For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

**Test Procedure:** The transmitter was set to both operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth,  $VBW > RBW$ . The 26 dB Bandwidth was measured and recorded.

**Test Results** The 26 dB Bandwidth was compliant with the requirements of this section and was determined from the plots on the following pages.


**Test Engineer(s):** Djed Mouada

**Test Date(s):** 12/13/13

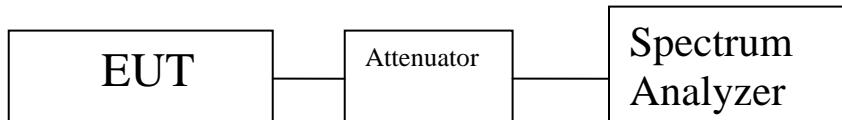


**Figure 2. Occupied Bandwidth, Test Setup**


## 26 dB Occupied Bandwidth

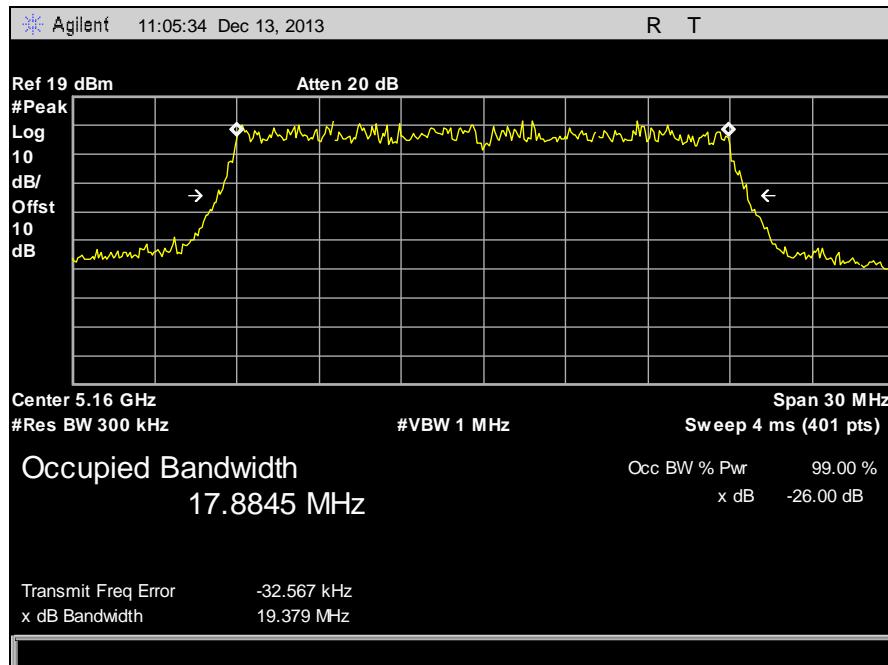


**Plot 6. 26 dB Occupied Bandwidth, 5160 MHz, 20 MHz, Channel 0**

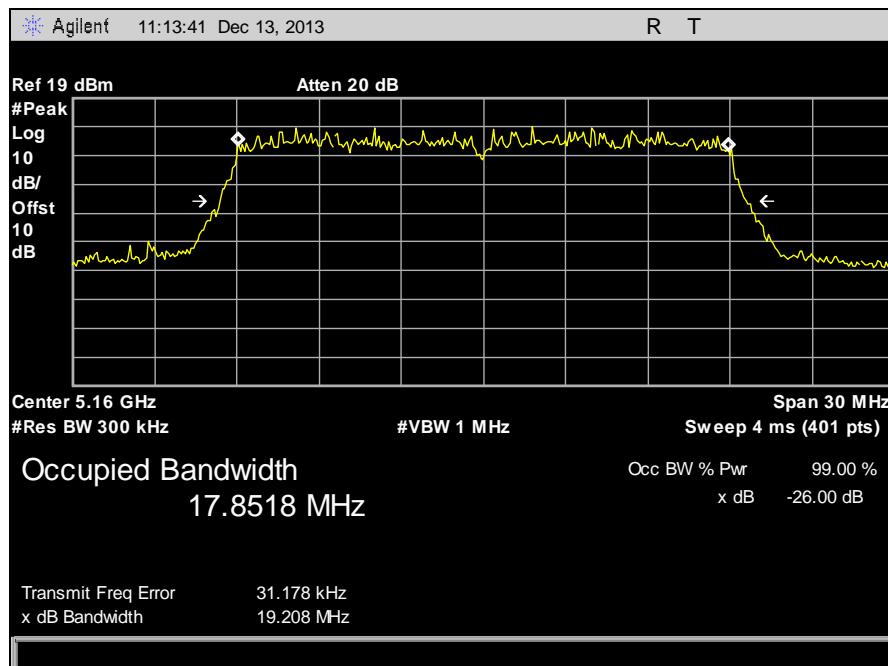


**Plot 7. 26 dB Occupied Bandwidth, 5160 MHz, 20 MHz, Channel 1**

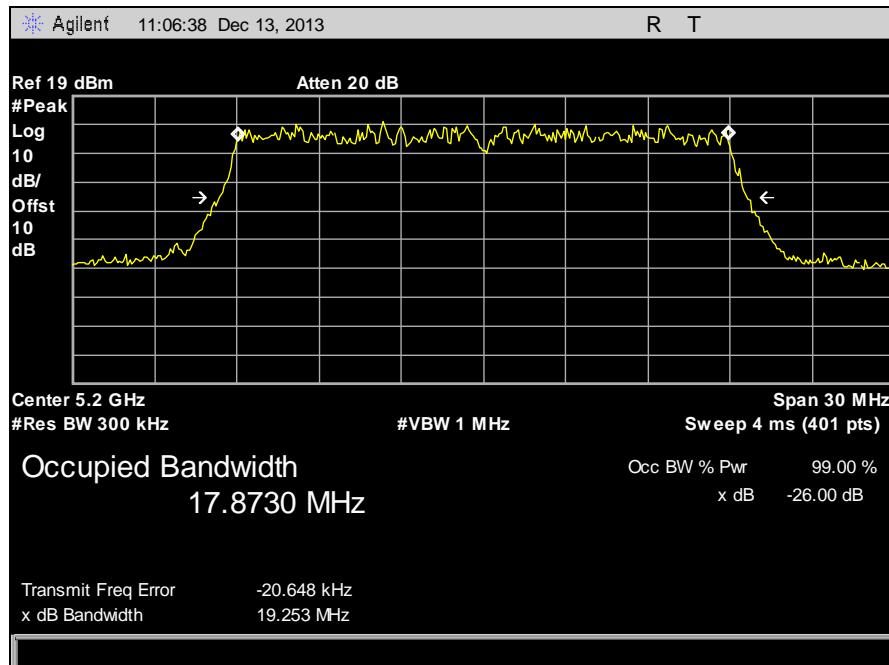


**Plot 8. 26 dB Occupied Bandwidth, 5200 MHz, 20 MHz, Channel 0**

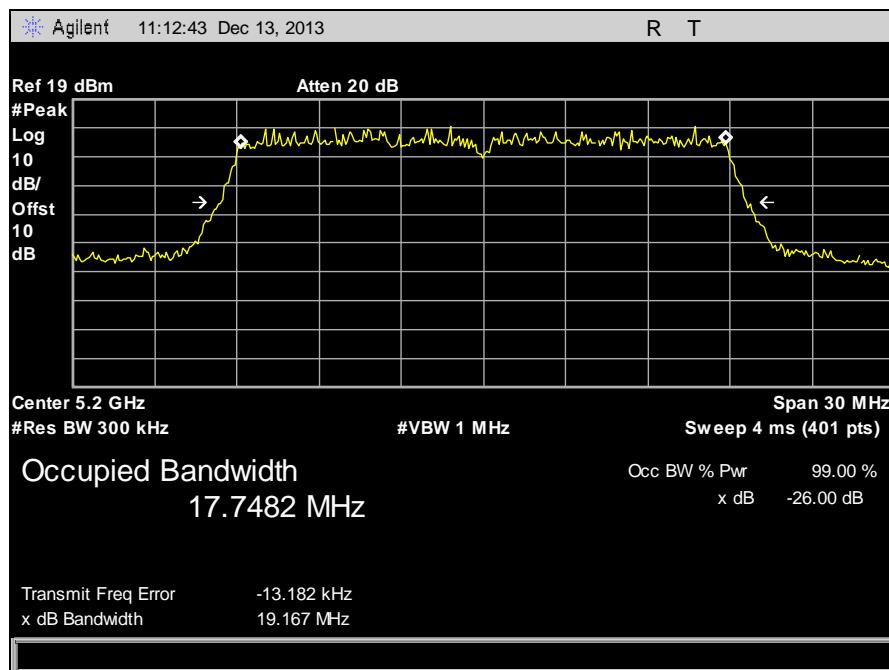


**Plot 9. 26 dB Occupied Bandwidth, 5200 MHz, 20 MHz, Channel 1**

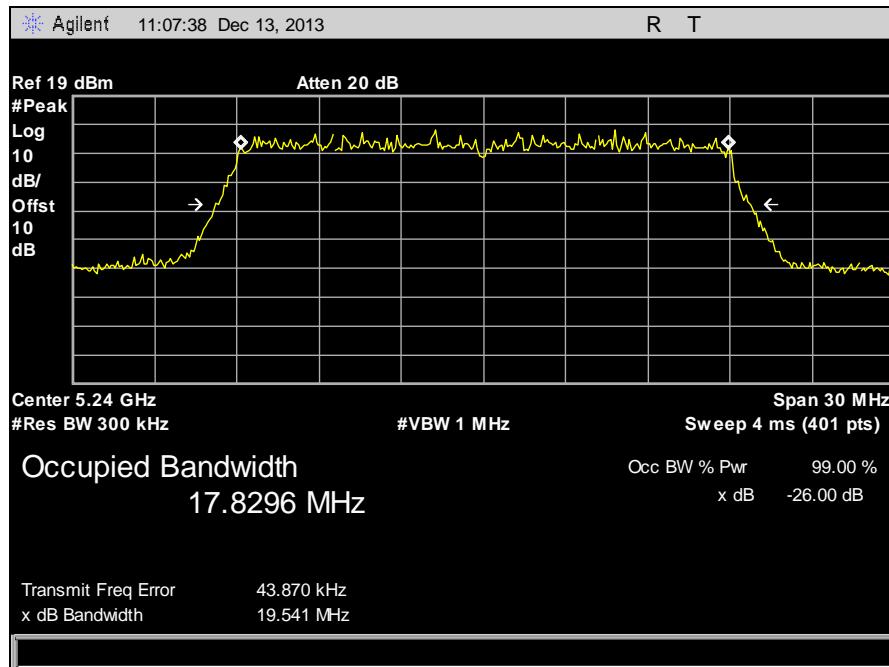


**Plot 10. 26 dB Occupied Bandwidth, 5240 MHz, 20 MHz, Channel 0**

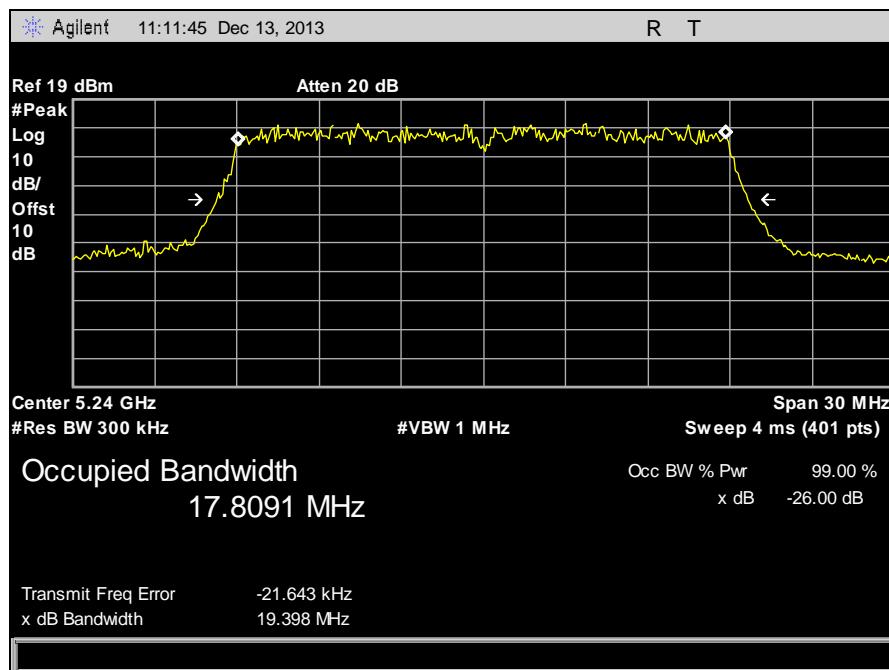


**Plot 11. 26 dB Occupied Bandwidth, 5240 MHz, 20 MHz, Channel 1**

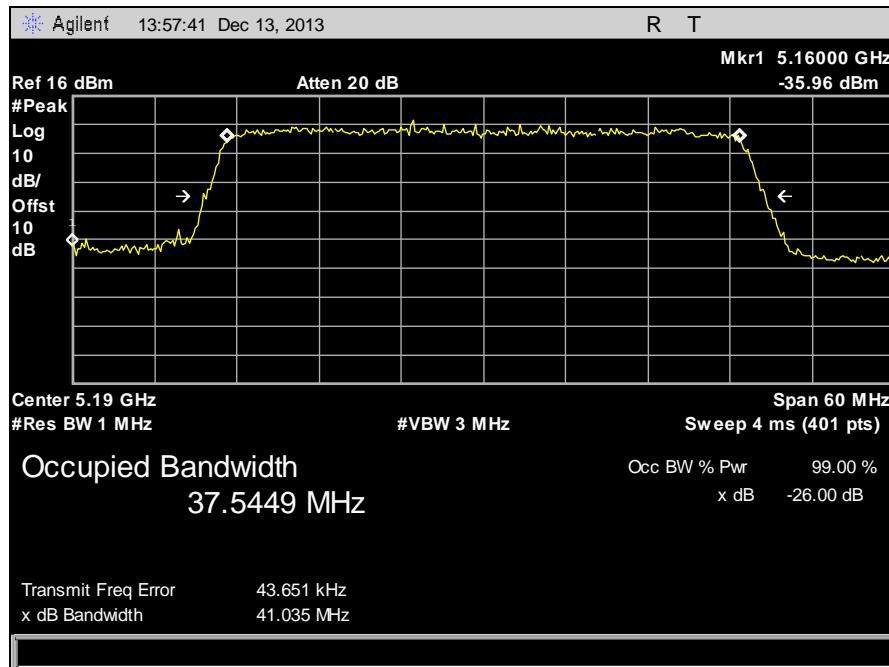


Plot 12. 26 dB Occupied Bandwidth, 5190 MHz, 40 MHz, Channel 0

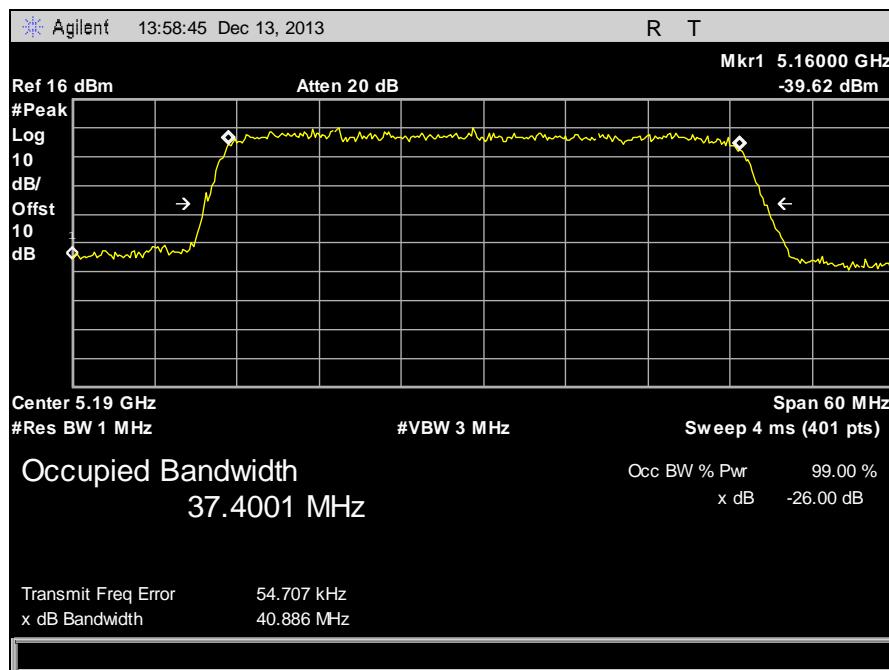

Plot 13. 26 dB Occupied Bandwidth, 5190 MHz, 40 MHz, Channel 1

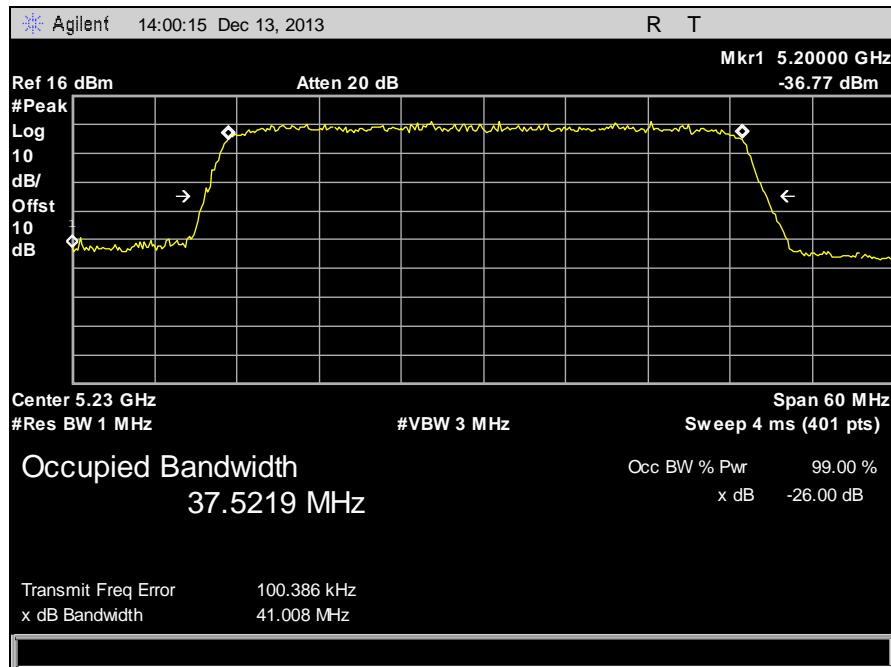


Plot 14. 26 dB Occupied Bandwidth, 5230 MHz, 40 MHz, Channel 0

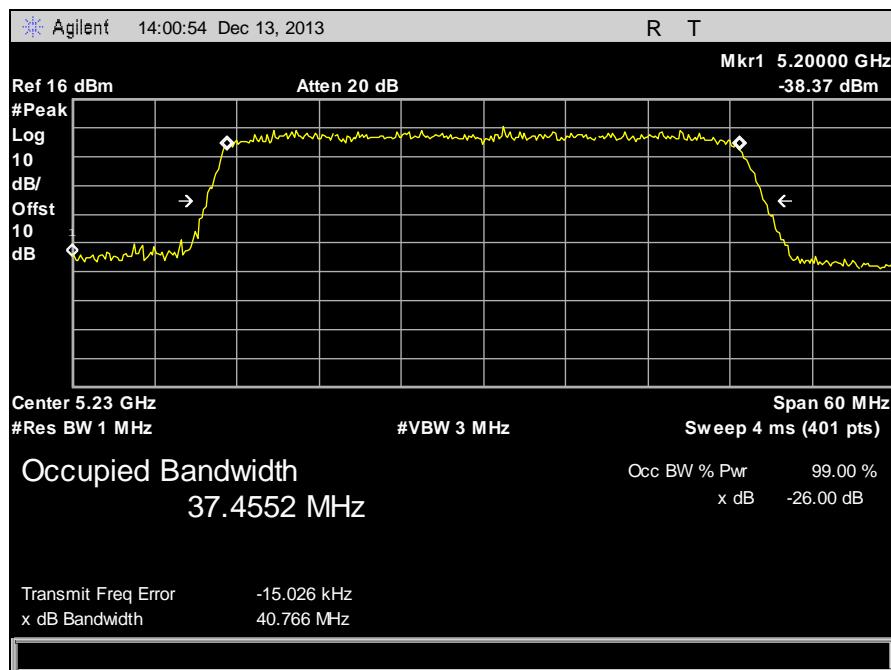


Plot 15. 26 dB Occupied Bandwidth, 5230 MHz, 40 MHz, Channel 1


## 99% Bandwidth

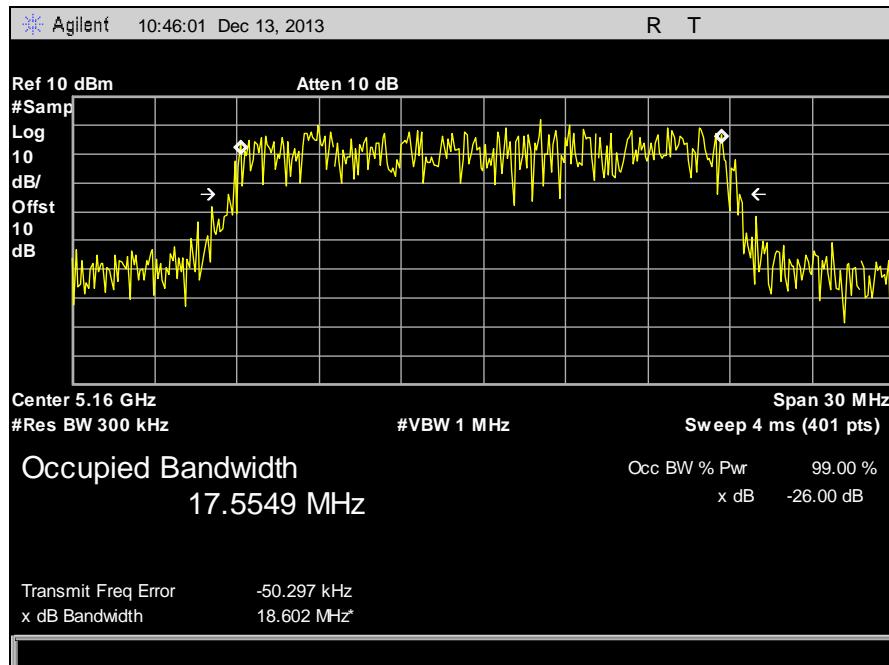


Plot 16. 99% Bandwidth, 5160 MHz, 20 MHz, Channel 0

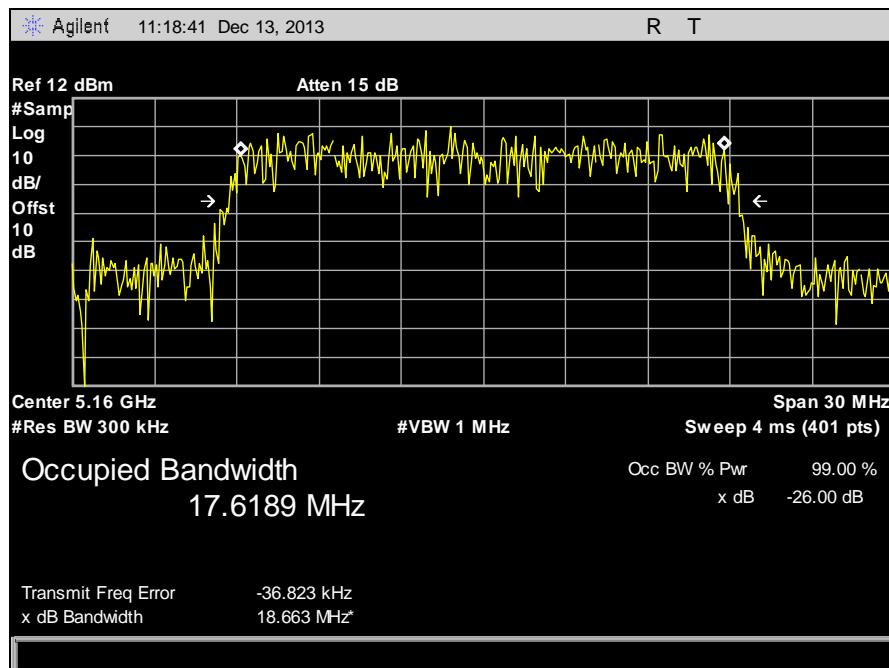


Plot 17. 99% Bandwidth, 5160 MHz, 20 MHz, Channel 1

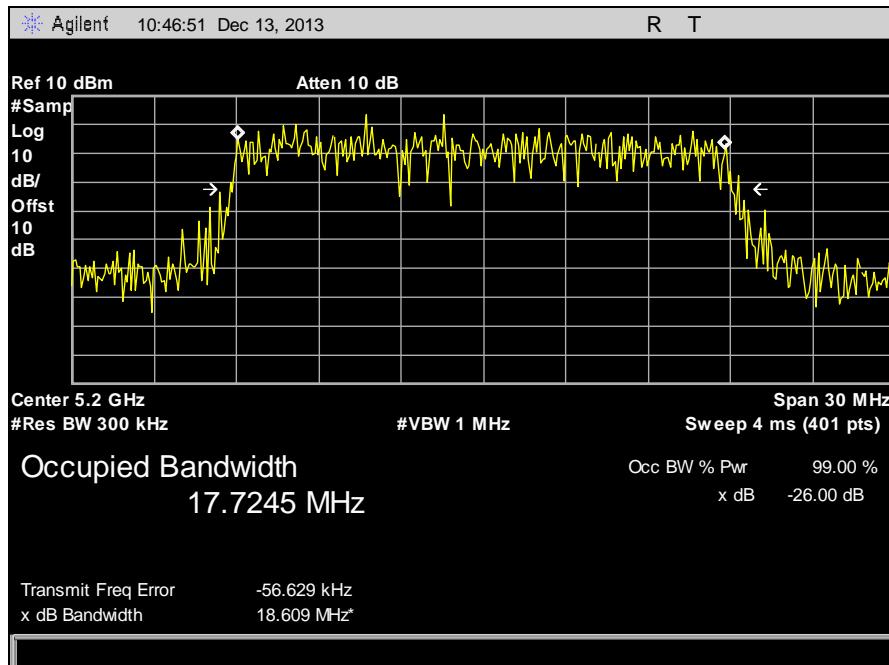


**Plot 18. 99% Bandwidth, 5200 MHz, 20 MHz, Channel 0**

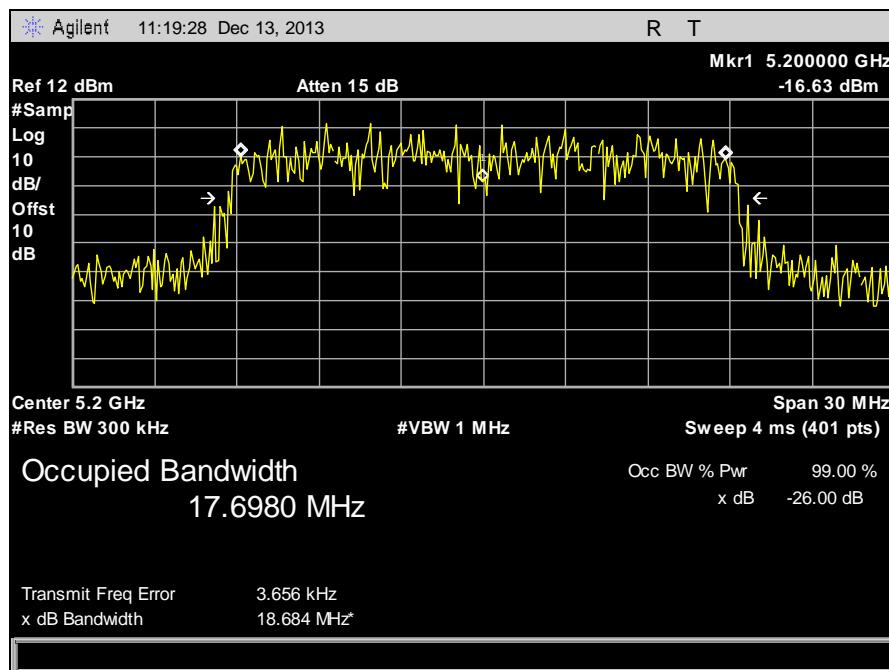


**Plot 19. 99% Bandwidth, 5200 MHz, 20 MHz, Channel 1**

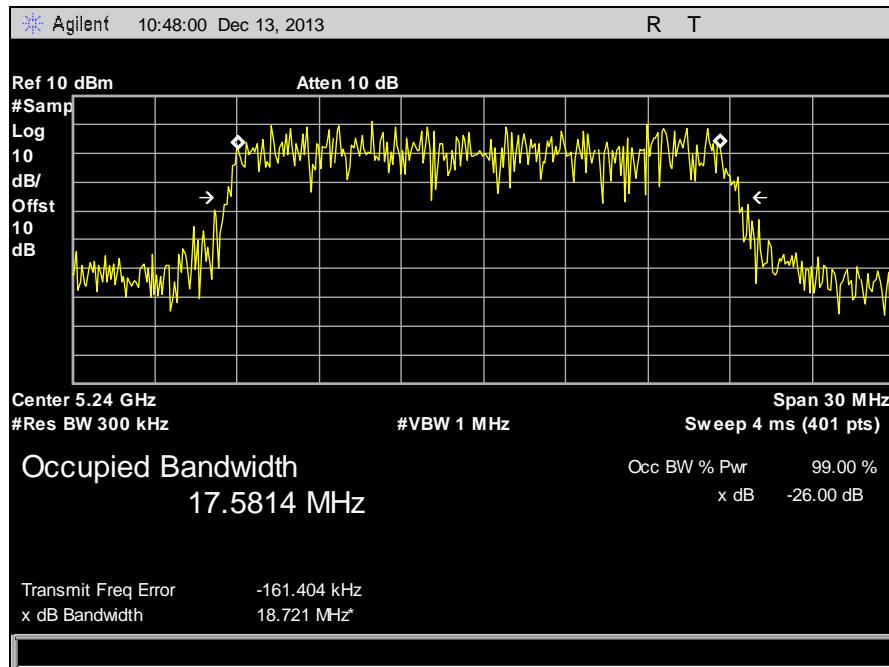


**Plot 20. 99% Bandwidth, 5240 MHz, 20 MHz, Channel 0**

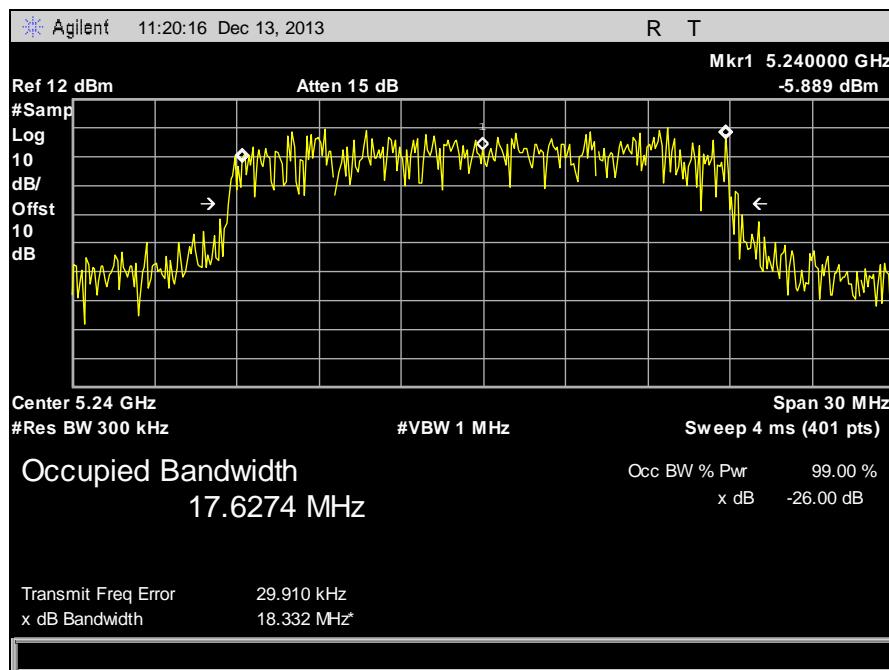


**Plot 21. 99% Bandwidth, 5240 MHz, 20 MHz, Channel 1**

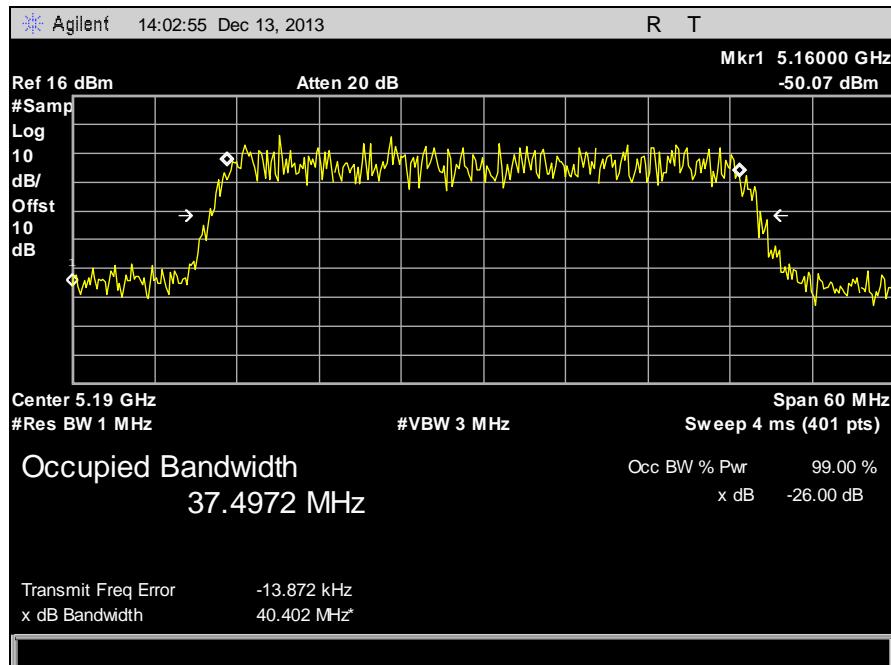


Plot 22. 99% Bandwidth, 5190 MHz, 40 MHz, Channel 0

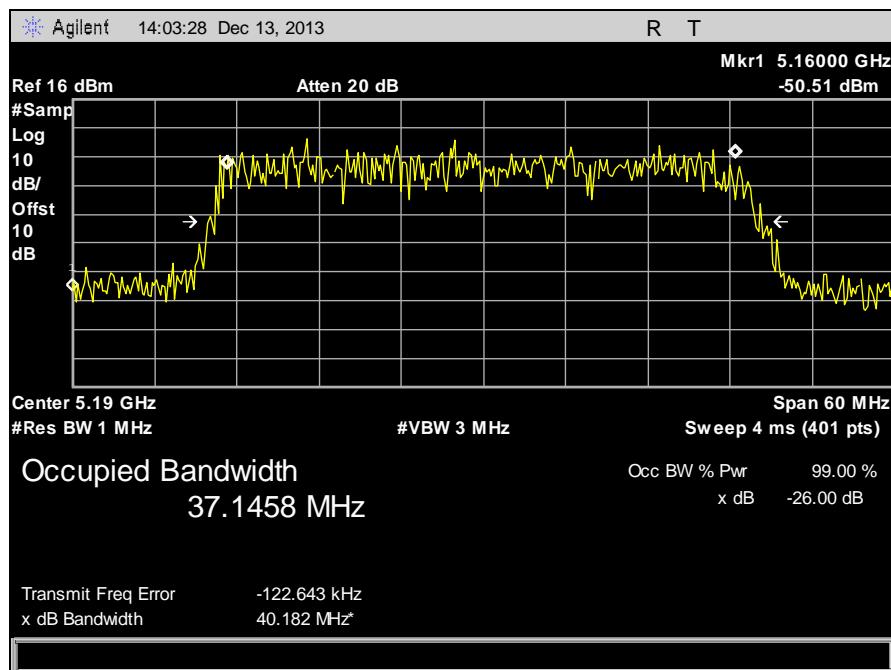

Plot 23. 99% Bandwidth, 5190 MHz, 40 MHz, Channel 1

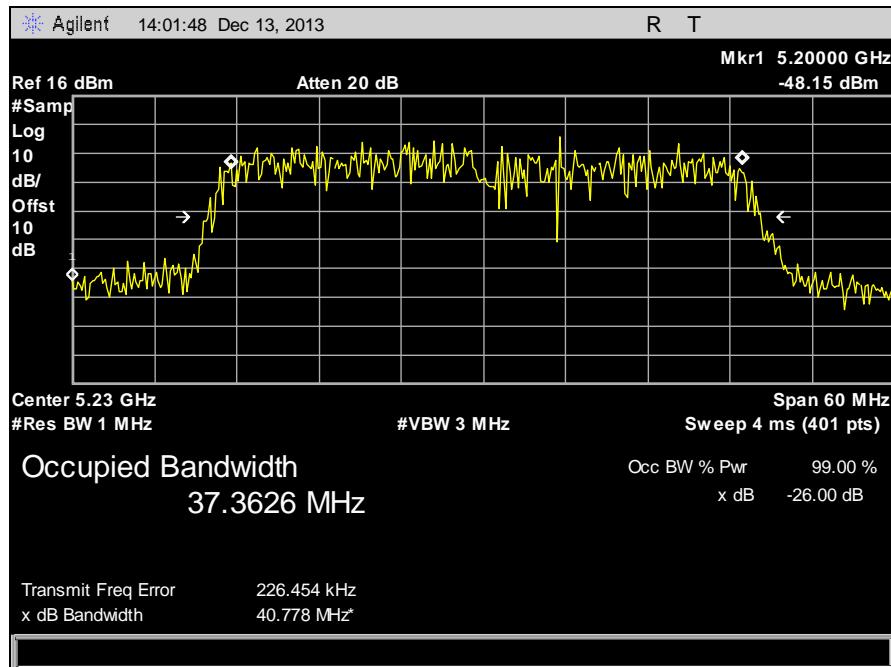

Plot 24. 99% Bandwidth, 5230 MHz, 40 MHz, Channel 0

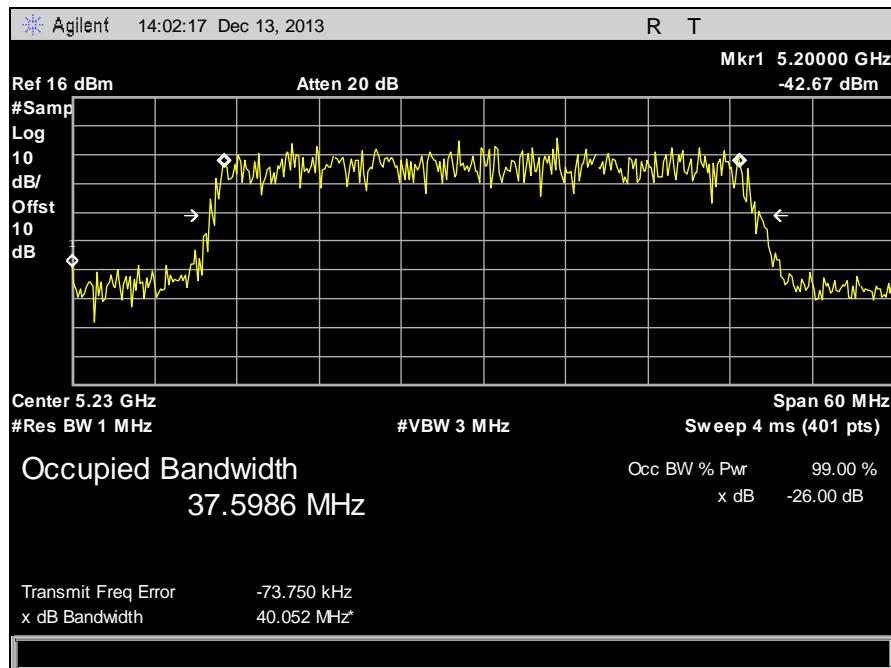

Plot 25. 99% Bandwidth, 5230 MHz, 40 MHz, Channel 1

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(a)(1)(iv) RF Power Output

**Test Requirements:** **§15.407(a)(1)(iv):** For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

**Test Procedure:** The EUT was connected to a Spectrum Analyzer. The power was measured on both channels. Method SA-1 from KDB 789033 D01 was used for making measurements.


**Test Results:** Equipment was compliant with the Peak Power Output limits of **§ 15.401(a)(1)(iv)**.

**Test Engineer(s):** Djed Mouada


**Test Date(s):** 12/12/13

Frequency (MHz)	Bandwidth	Channel 0 Power (dBm)	Channel 1 Power (dBm)	Summed Power (dBm)	Antenna Gain (dBi)	Limit (dBm)	Margin (dB)
5160	20 MHz	12.13	11.54	14.86	5.00	24	-9.14
5200	20 MHz	12.00	11.43	14.73	5.00	24	-9.27
5240	20 MHz	12.23	12.41	15.33	5.00	24	-8.67
5190	40 MHz	13.23	13.83	16.55	5.00	24	-7.45
5230	40 MHz	13.46	13.68	16.58	5.00	24	-7.42


**Table 15. RF Power Output, Test Results**




**Figure 3. Power Output Test Setup**

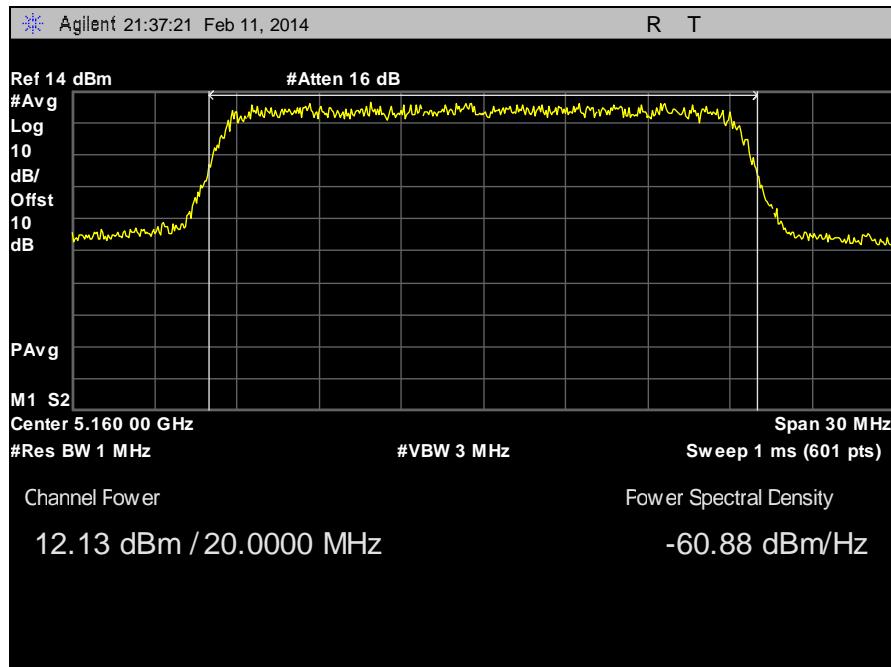


Plot 26. RF Power Output, 5160 MHz, 20 MHz, Channel 0

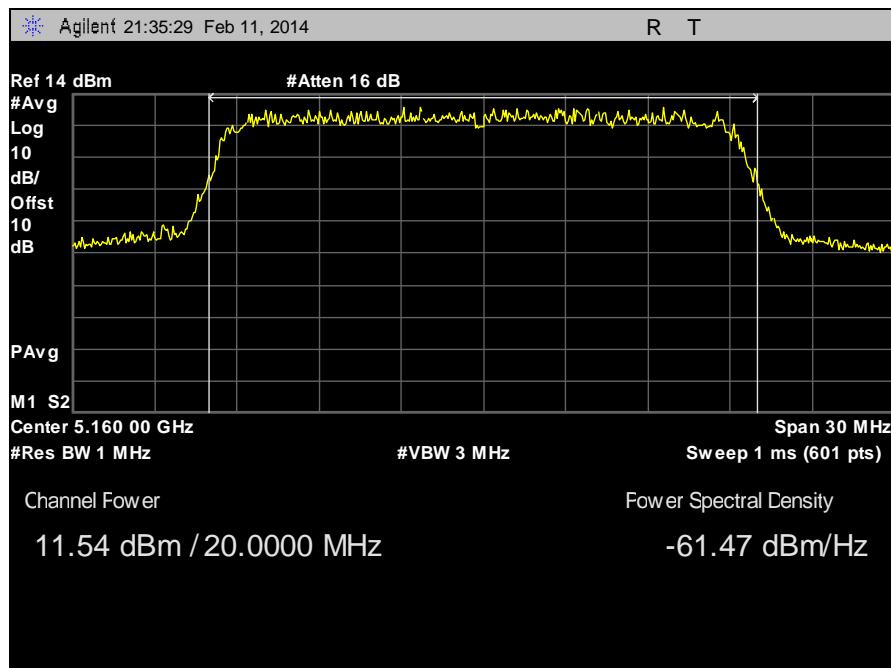


Plot 27. RF Power Output, 5160 MHz, 20 MHz, Channel 1

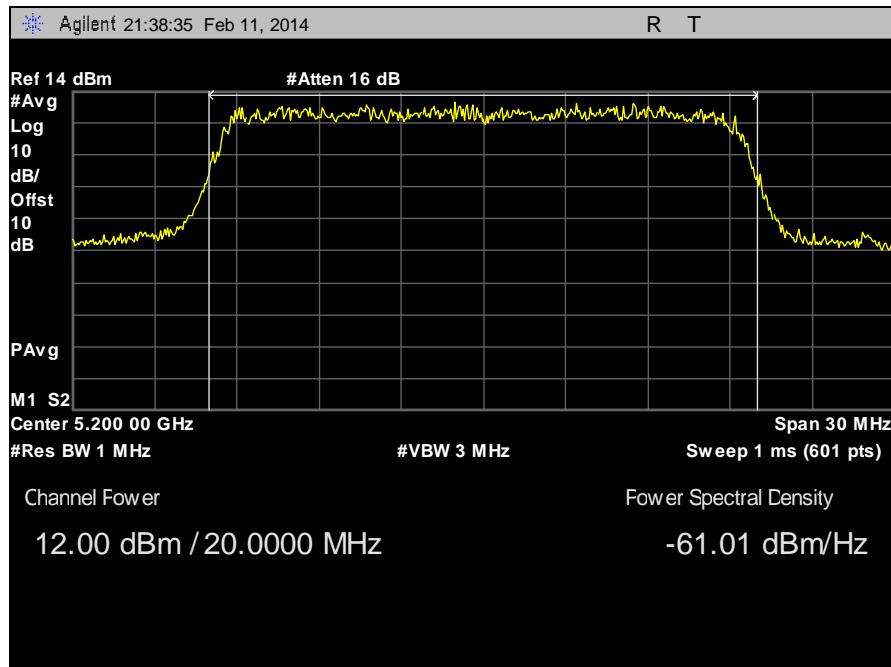


Plot 28. RF Power Output, 5200 MHz, 20 MHz, Channel 0

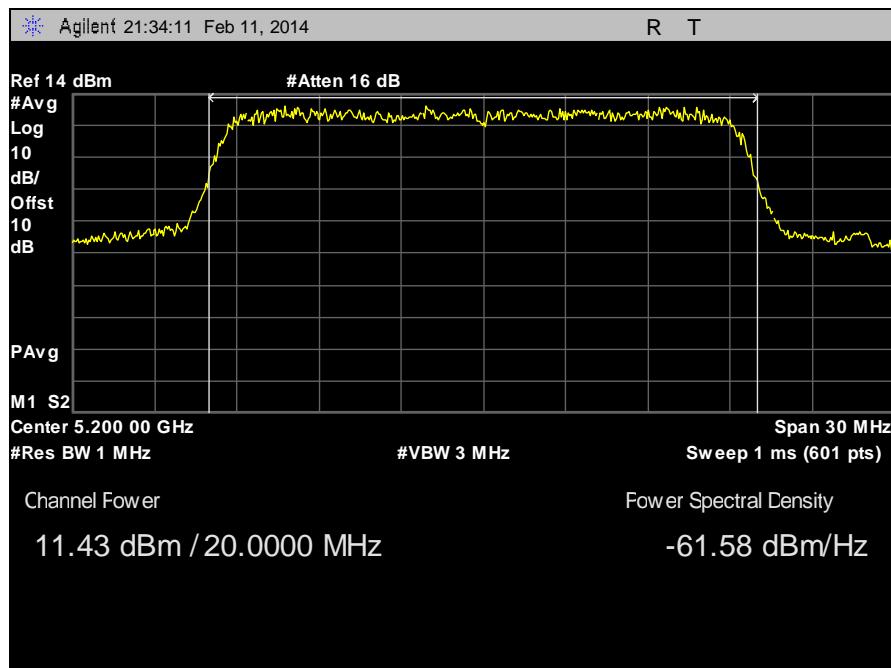


Plot 29. RF Power Output, 5200 MHz, 20 MHz, Channel 1

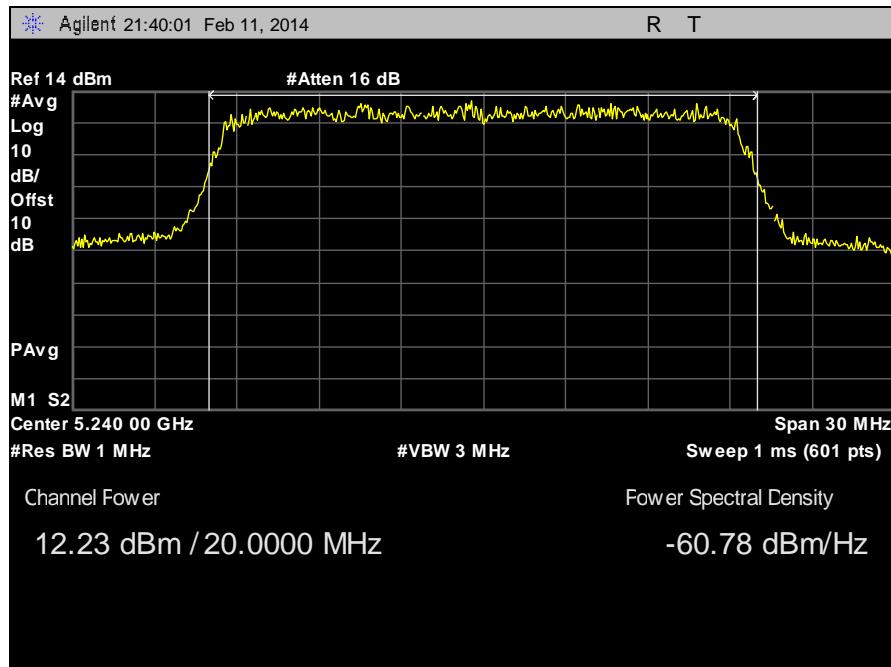


Plot 30. RF Power Output, 5240 MHz, 20 MHz, Channel 0

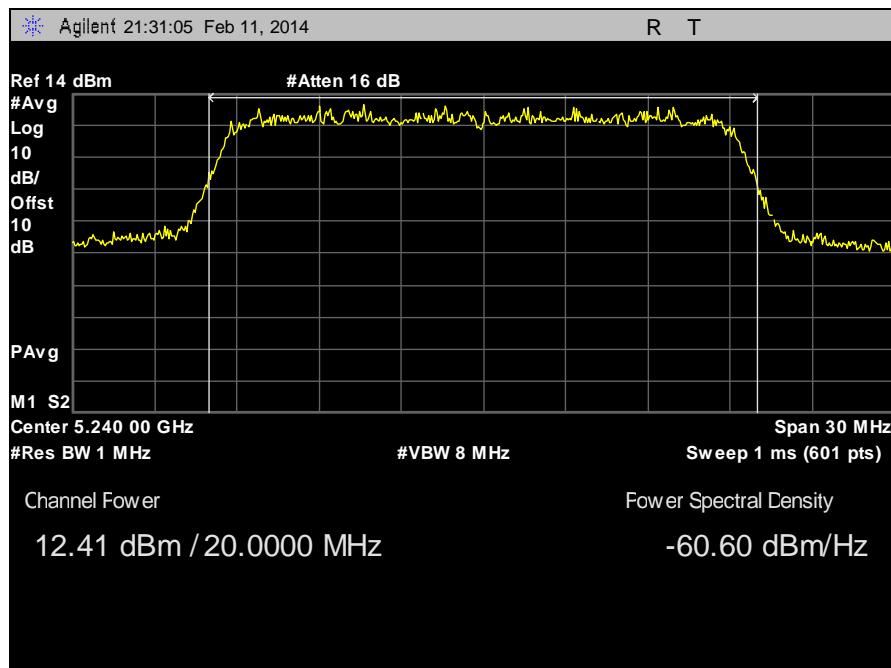


Plot 31. RF Power Output, 5240 MHz, 20 MHz, Channel 1

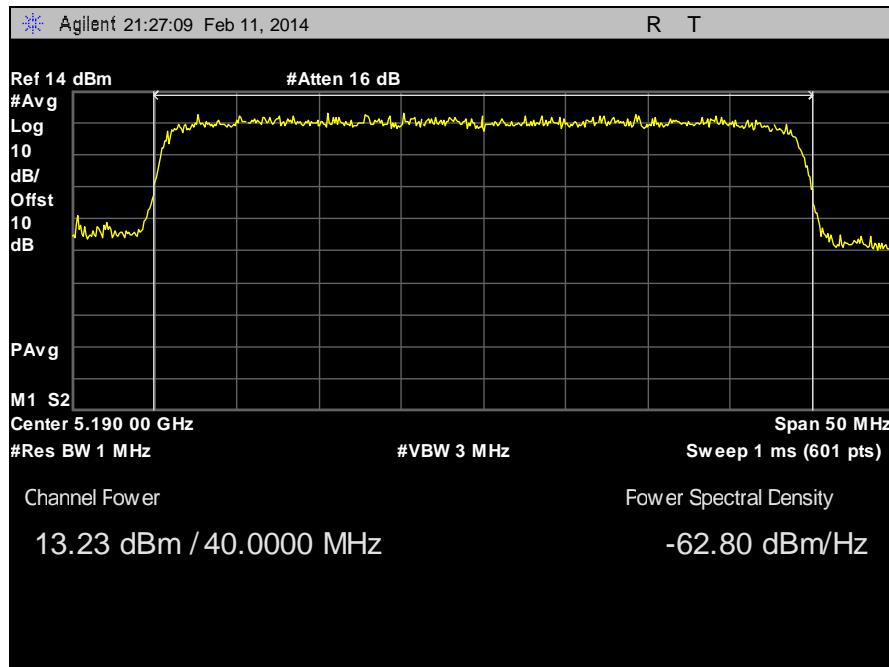


Plot 32. RF Power Output, 5190 MHz, 40 MHz, Channel 0

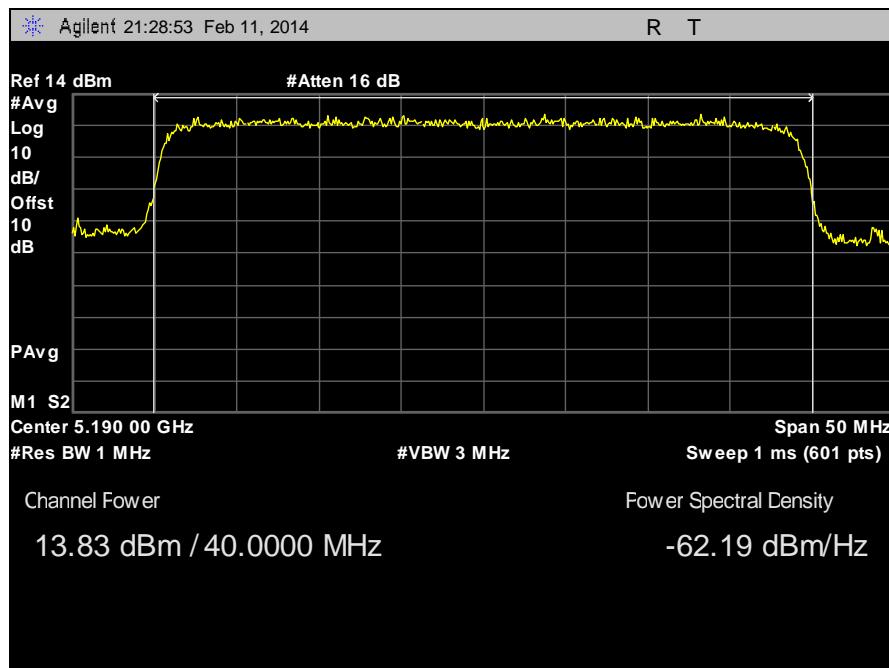

Plot 33. RF Power Output, 5190 MHz, 40 MHz, Channel 1

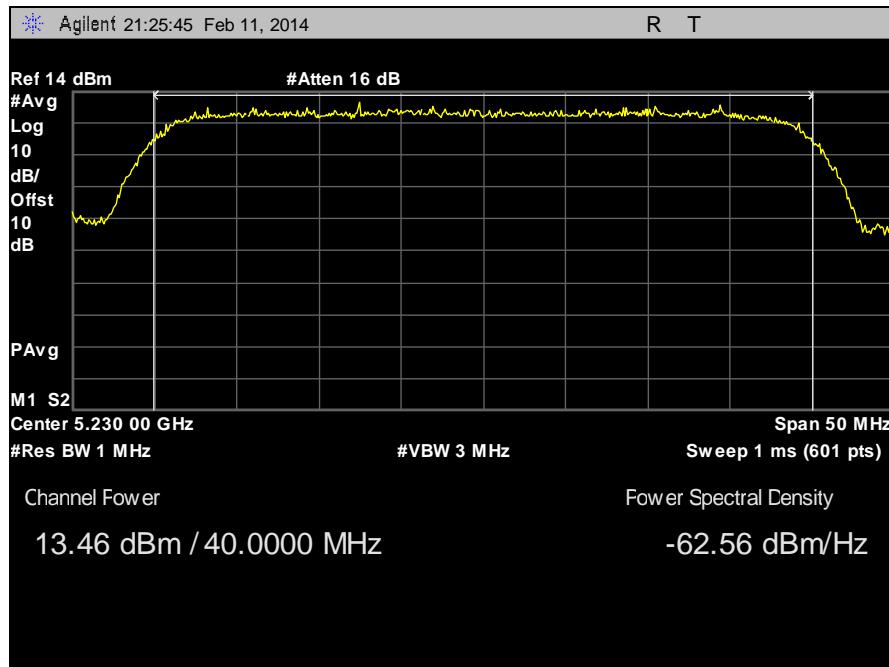

Plot 34. RF Power Output, 5230 MHz, 40 MHz, Channel 0

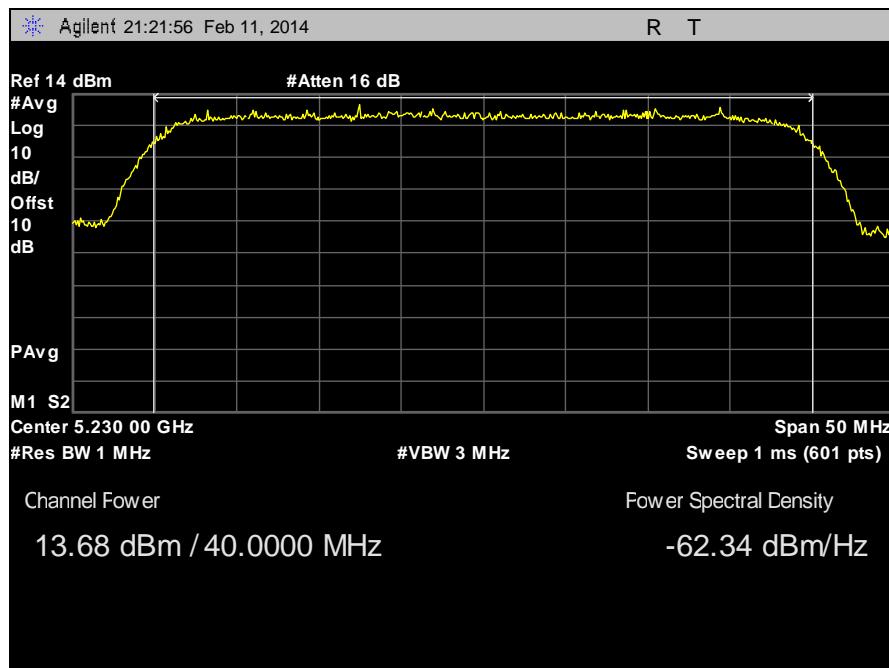

Plot 35. RF Power Output, 5230 MHz, 40 MHz, Channel 1

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(a)(1)(iv) Peak Power Spectral Density

**Test Requirements:** **§ 15.407(a)(1)(iv):** In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band

**Test Procedure:** The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level on the EUT. The RBW was set to 1MHz and the VBW was set to 3MHz. The method of measurement from FCC Publication 789033 was used.

**Test Results:** Equipment was compliant with the peak power spectral density limits of **§ 15.407 (a)(1)**. The peak power spectral density was determined from plots on the following page(s).

**Test Engineer(s):** Djed Mouada


**Test Date(s):** 12/12/13

Frequency (MHz)	Bandwidth	Channel 0 PSD (dBm)	Channel 1 PSD (dBm)	Summed PSD (dBm)	Antenna Gain (dBi)	Limit (dBm)	Margin (dB)
5160	20 MHz	-0.58	-0.37	2.54	5.00	11.00	-8.46
5200	20 MHz	-0.68	0.22	2.80	5.00	11.00	-8.20
5240	20 MHz	-0.93	-0.80	2.14	5.00	11.00	-8.86
5190	40 MHz	-1.39	-1.54	1.55	5.00	11.00	-9.45
5230	40 MHz	-1.59	-1.29	1.58	5.00	11.00	-9.42


**Table 16. Power Spectral Density, Test Results**




**Figure 4. Power Spectral Density Test Setup**

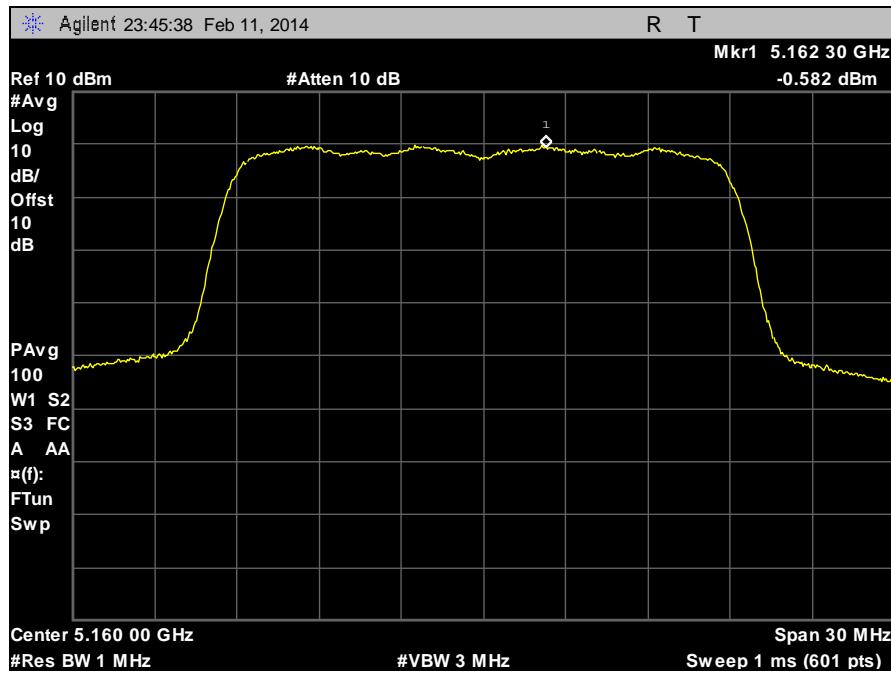


Plot 36. Power Spectral Density, 5160 MHz, 20 MHz, Channel 0

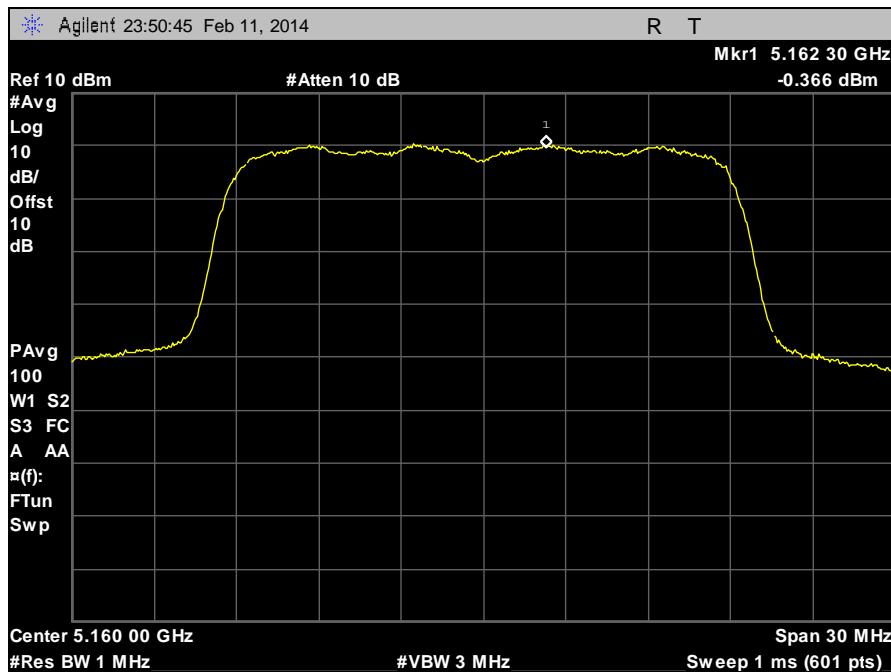


Plot 37. Power Spectral Density, 5160 MHz, 20 MHz, Channel 1

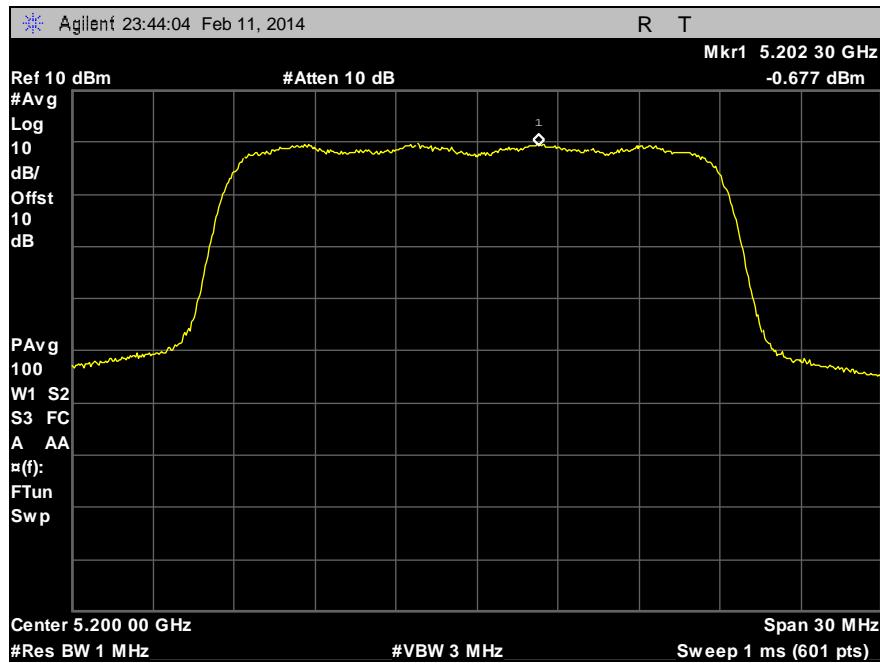


Plot 38. Power Spectral Density, 5200 MHz, 20 MHz, Channel 0

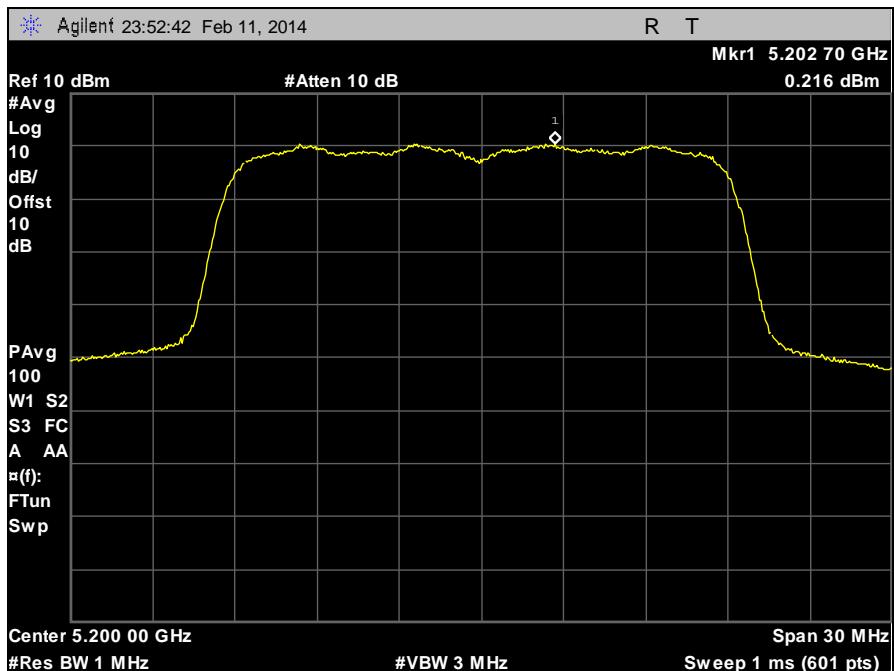


Plot 39. Power Spectral Density, 5200 MHz, 20 MHz, Channel 1

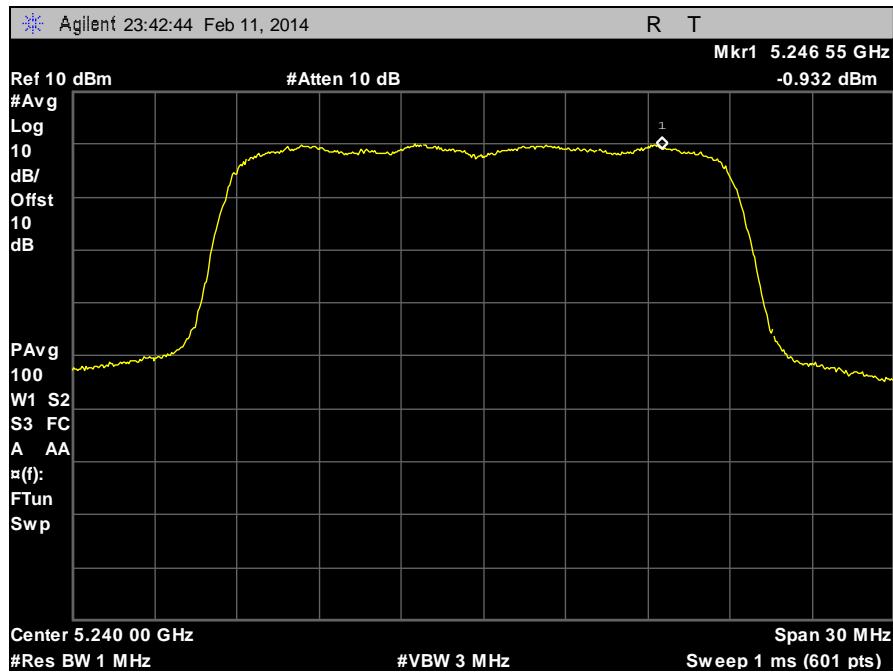


Plot 40. Power Spectral Density, 5240 MHz, 20 MHz, Channel 0

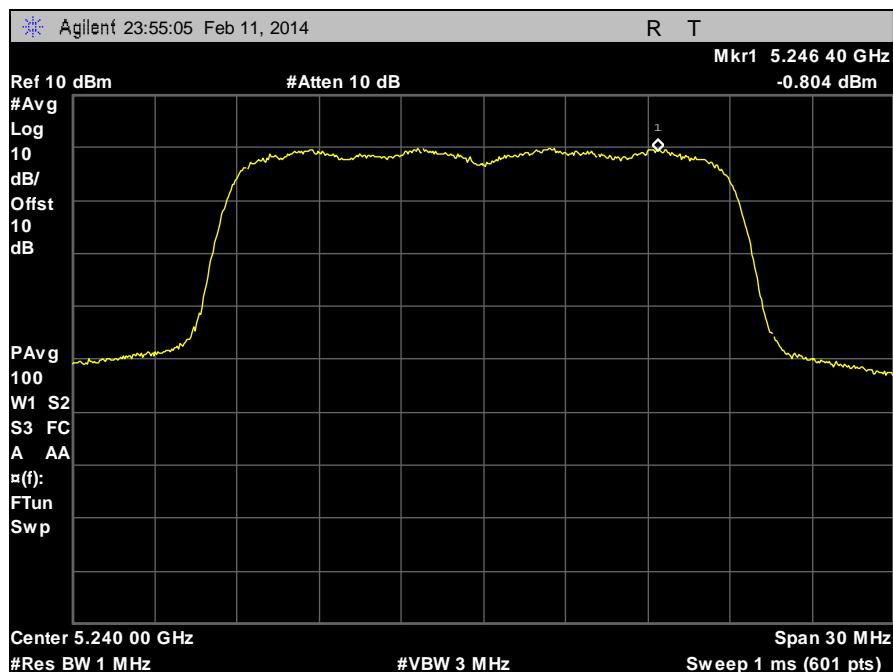


Plot 41. Power Spectral Density, 5240 MHz, 20 MHz, Channel 1

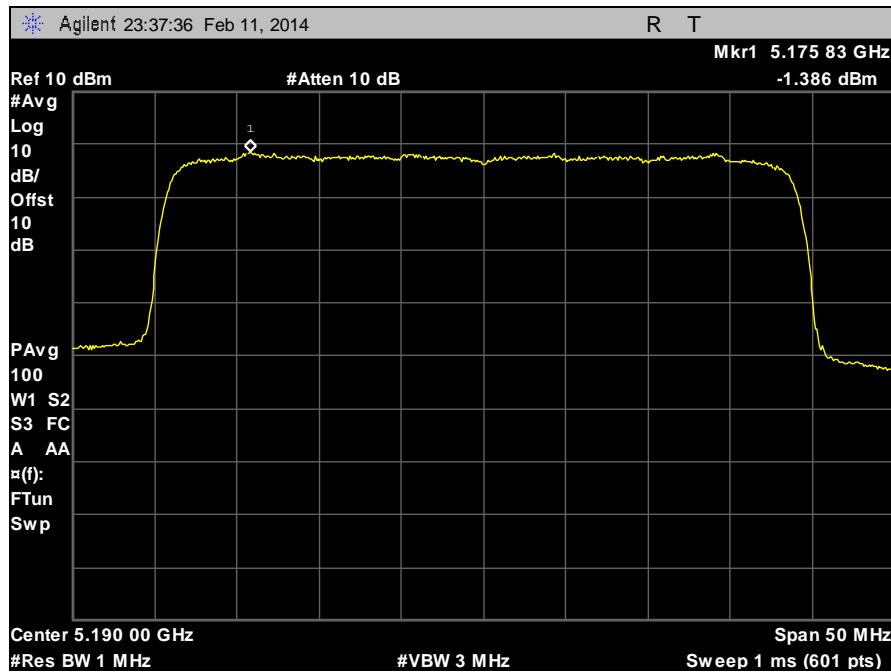


Plot 42. Power Spectral Density, 5190 MHz, 40 MHz, Channel 0

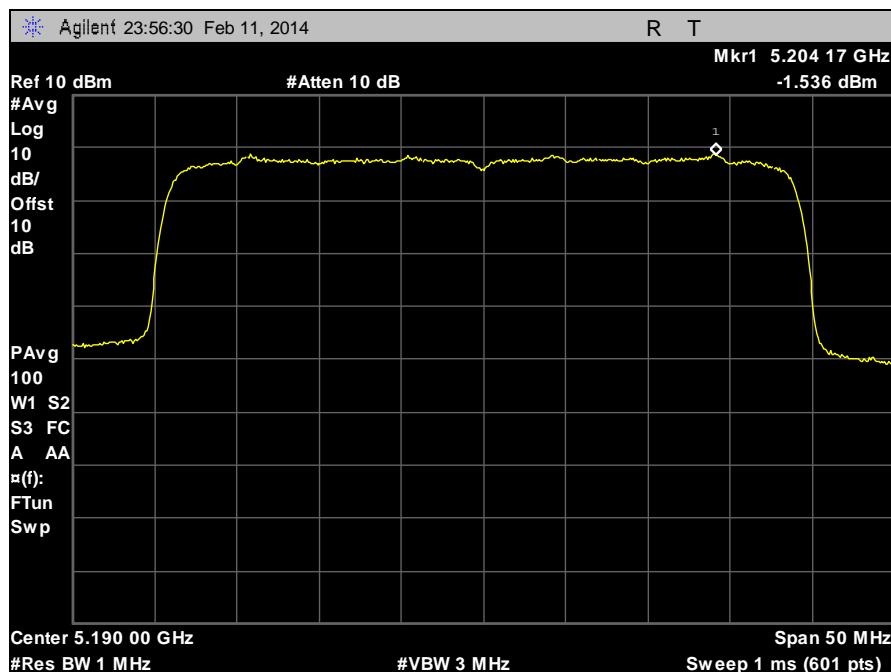

Plot 43. Power Spectral Density, 5190 MHz, 40 MHz, Channel 1

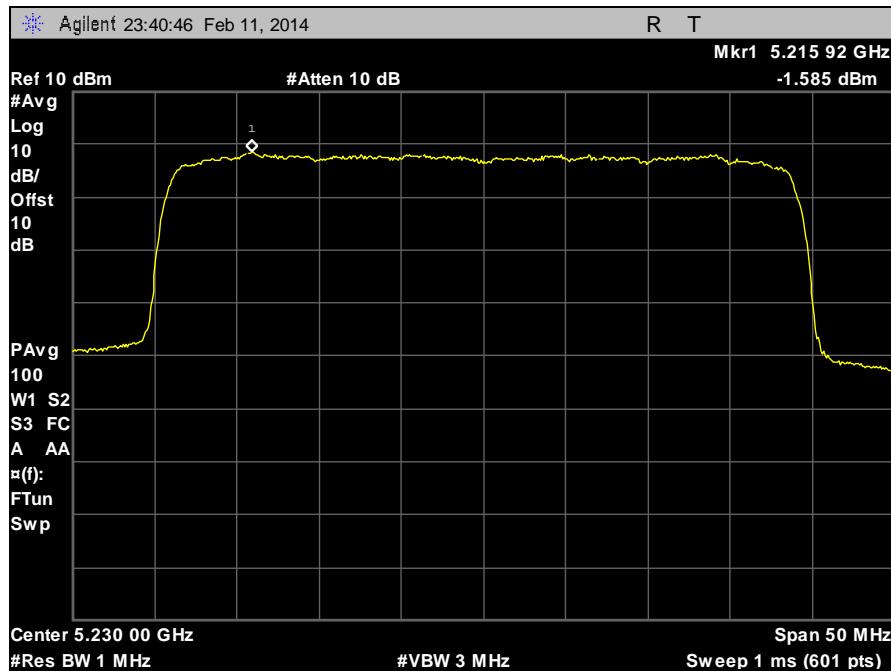

Plot 44. Power Spectral Density, 5230 MHz, 40 MHz, Channel 0

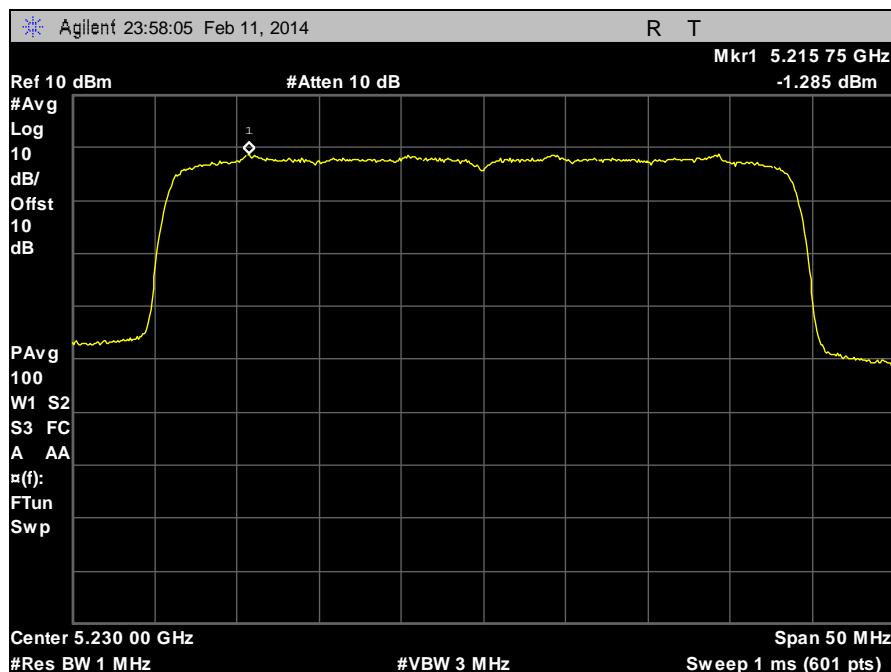

Plot 45. Power Spectral Density, 5230 MHz, 40 MHz, Channel 1

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(b)(1), (6), (7) Undesirable Emissions

**Test Requirements:** § 15.407(b)(1), (6), (7); §15.205: Emissions outside the frequency band.

**§ 15.407(b)(1):** For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or  $4 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz.

**§ 15.407(b)(6):** Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

**§ 15.407(b)(7):** The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

**Test Procedure:** The transmitter was placed on an acrylic stand inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast height to determine worst case orientation for maximum emissions.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.


For measurements above 1 GHz, measurements were made with a Peak detector with 1 MHz resolution bandwidth. Where the spurious emissions fell into a restricted band, measurements were also made with an average detector to make sure they complied with 15.209 limits. Emissions were explored up to 40 GHz.

**Test Results:** The EUT was compliant with the Radiated Emission limits for Intentional Radiators. See following pages for detailed test results.


**Test Engineer(s):** Djed Mouada

**Test Date(s):** 12/18/13


## § 15.209 Radiated Emissions Limits

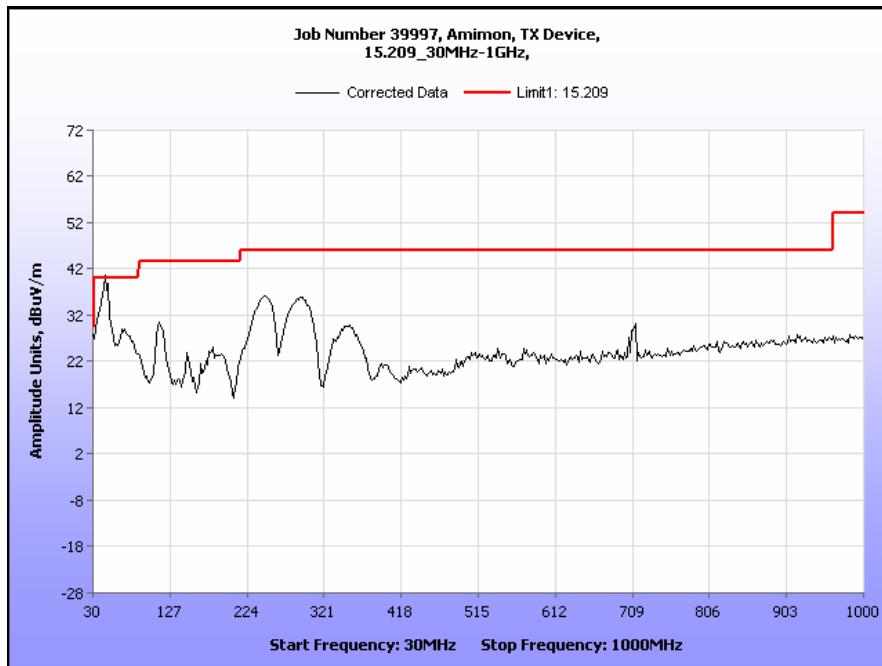


Plot 46. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 30 MHz – 1 GHz

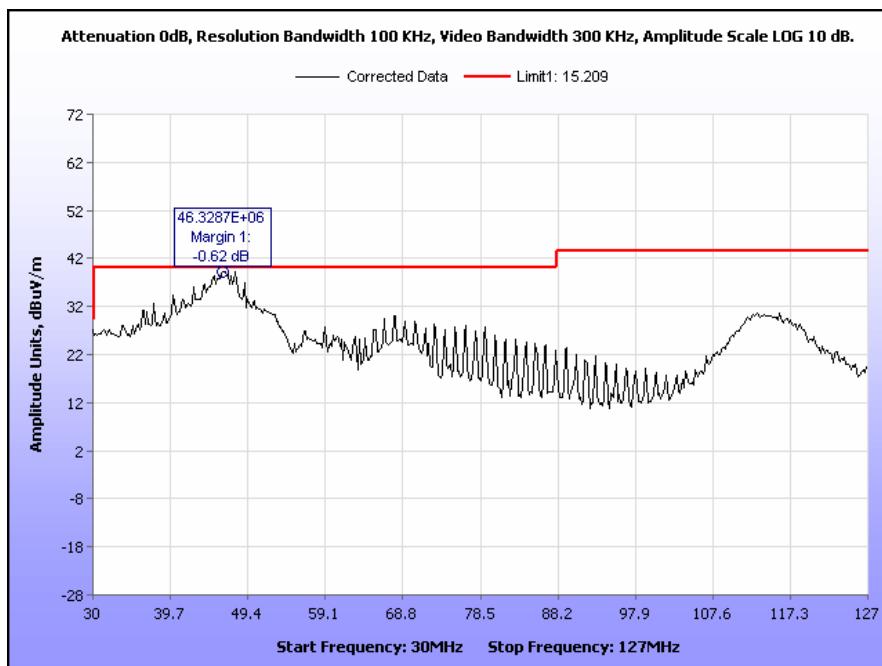


Plot 47. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 30 MHz – 1 GHz

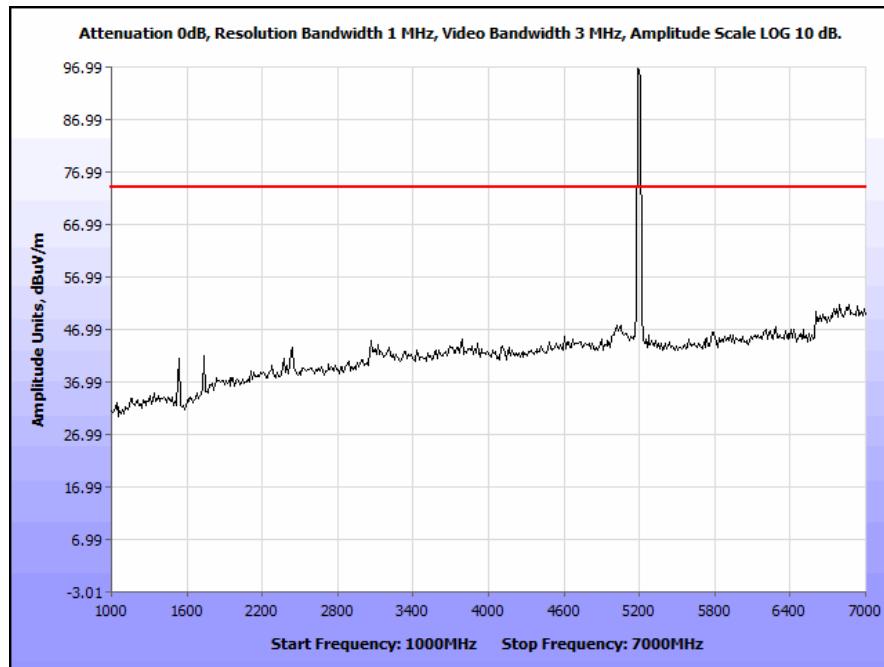


**Plot 48. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Peak**

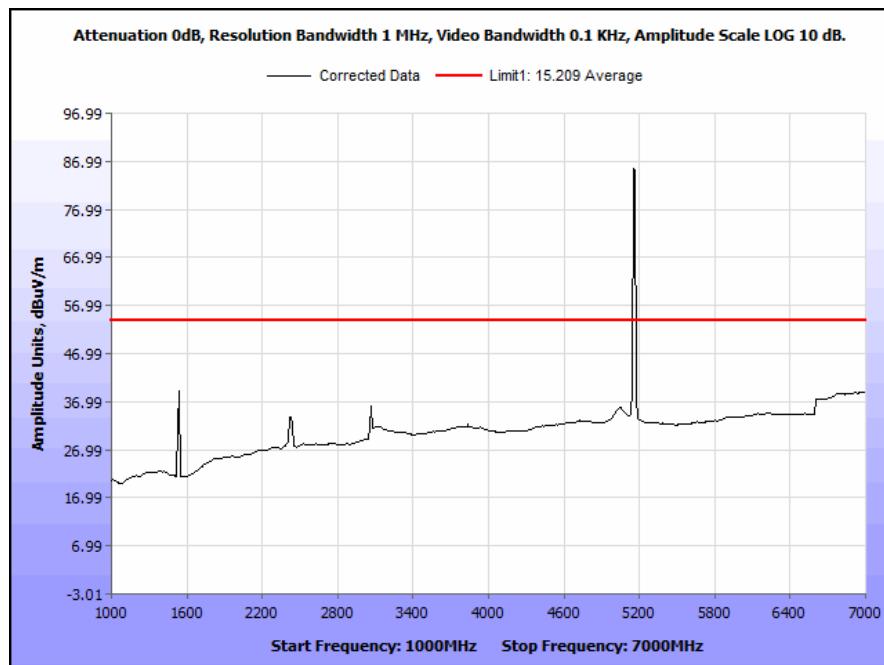


**Plot 49. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Average**

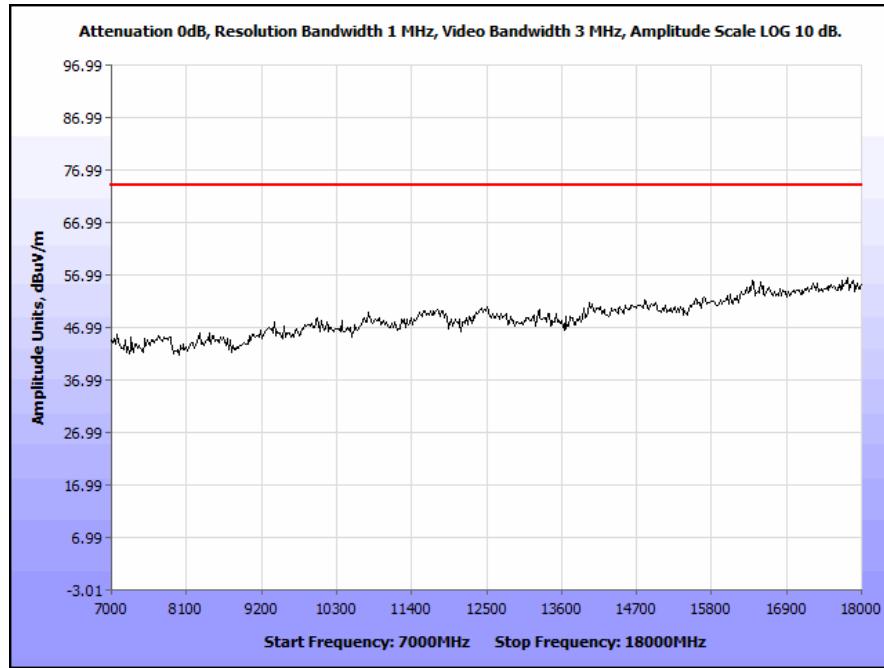


**Plot 50. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Peak**

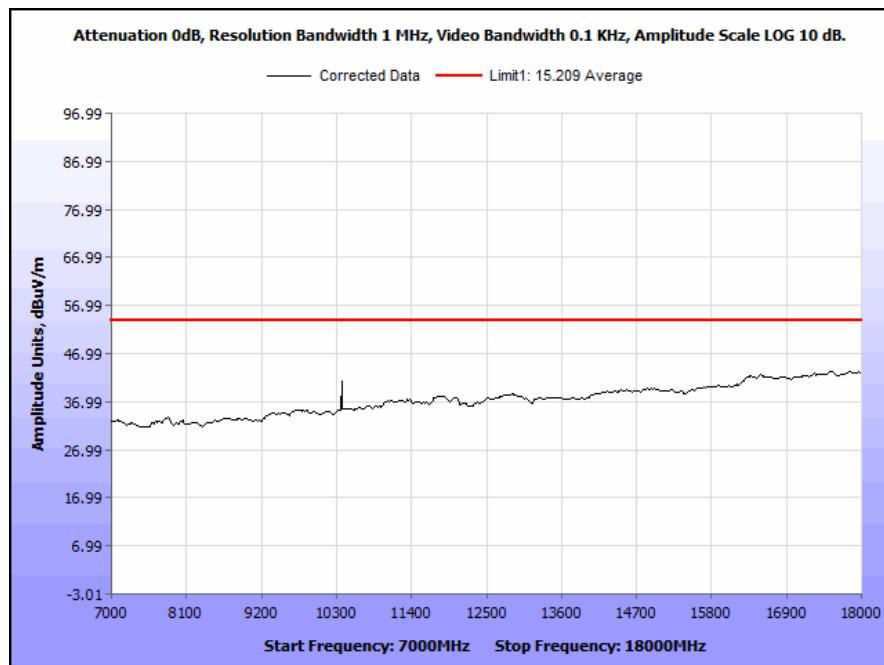


**Plot 51. Radiated Spurious Emissions, 5160 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Average**

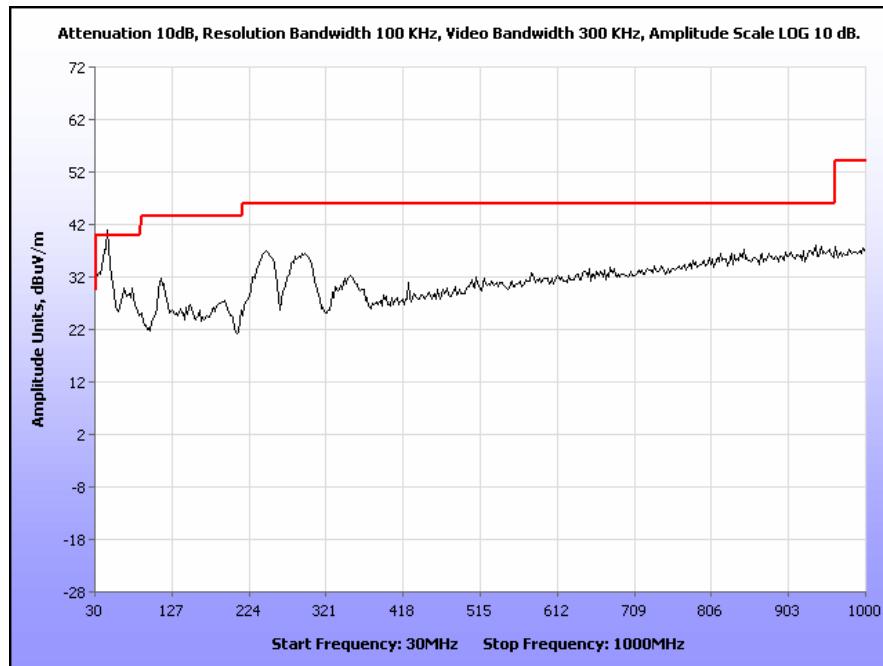


Plot 52. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 30 MHz – 1 GHz

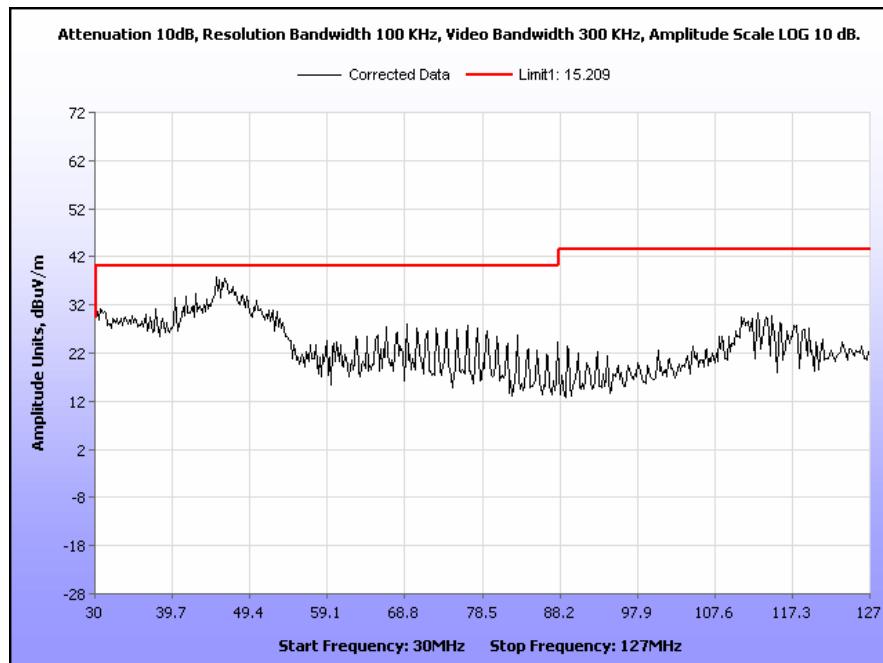


Plot 53. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 30 MHz – 1 GHz

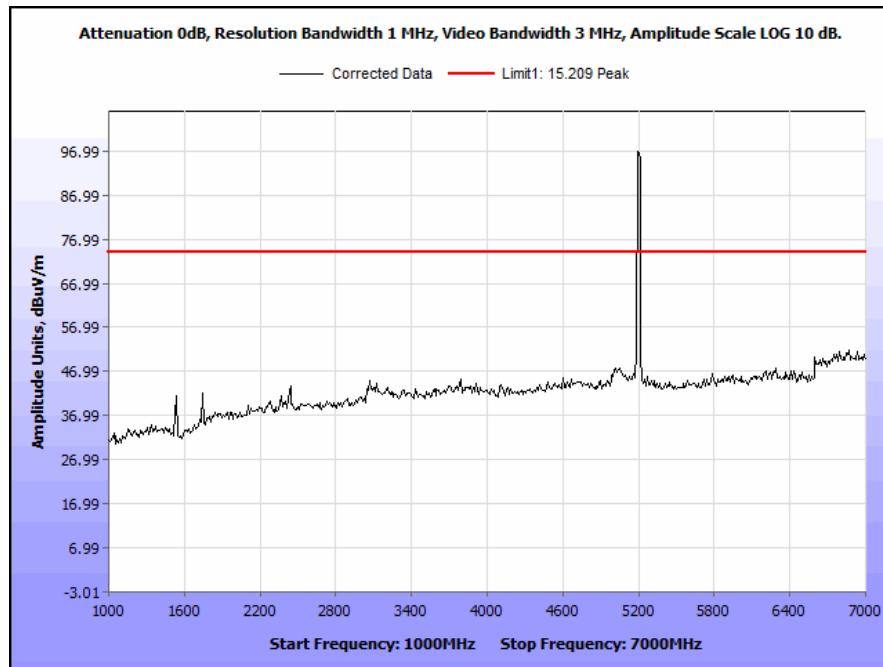


**Plot 54. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Peak**

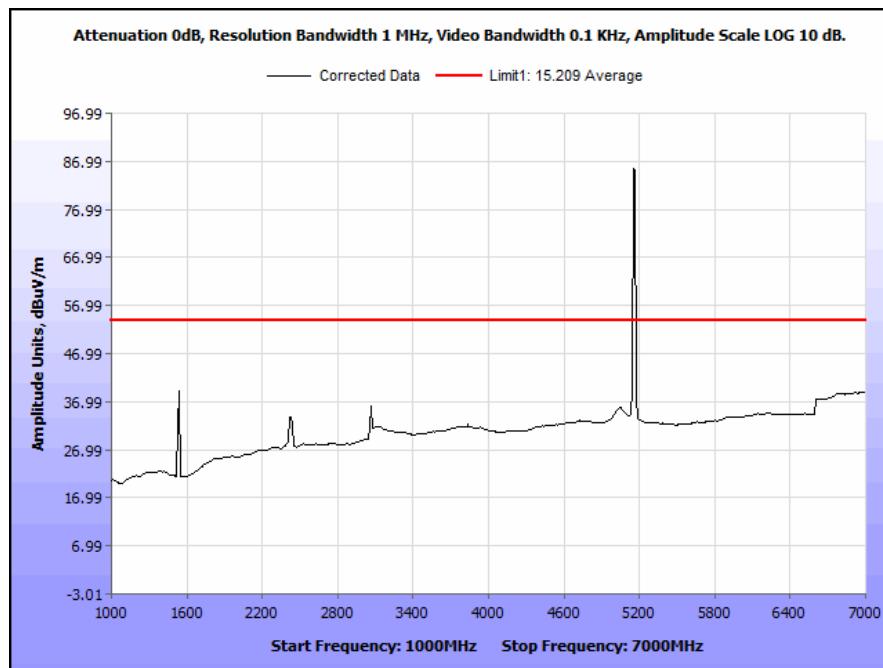


**Plot 55. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Average**

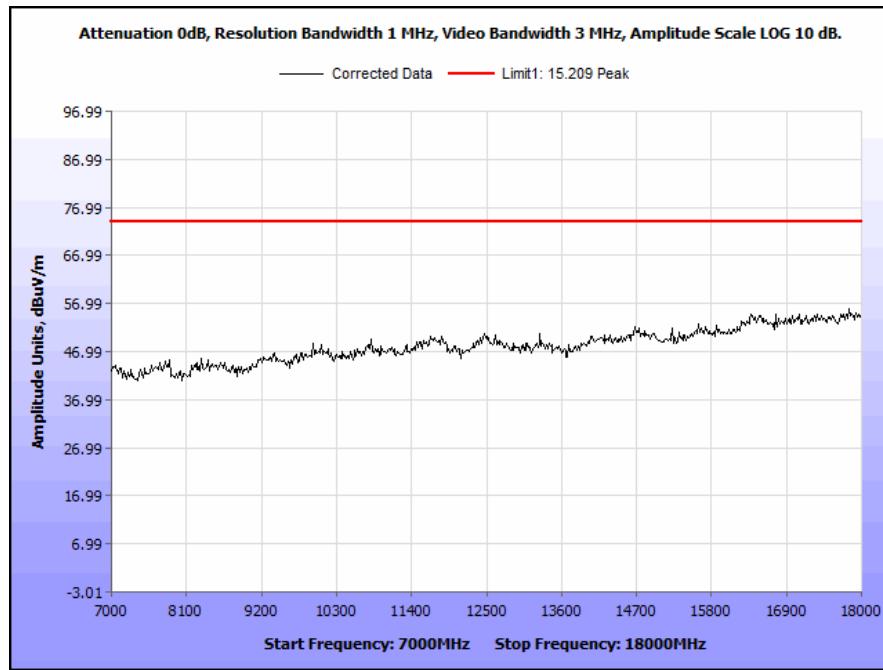


**Plot 56. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Peak**

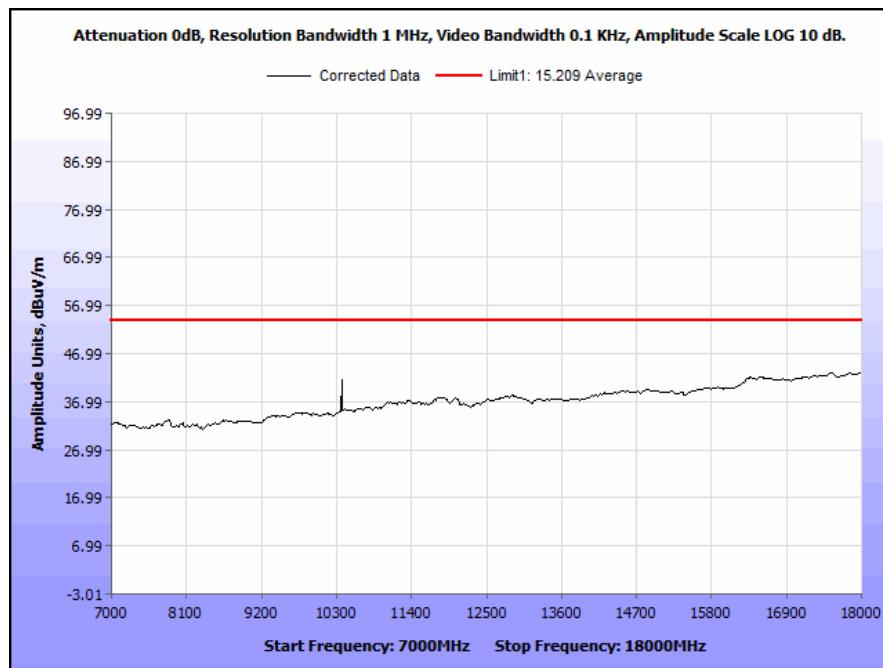


**Plot 57. Radiated Spurious Emissions, 5200 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Average**

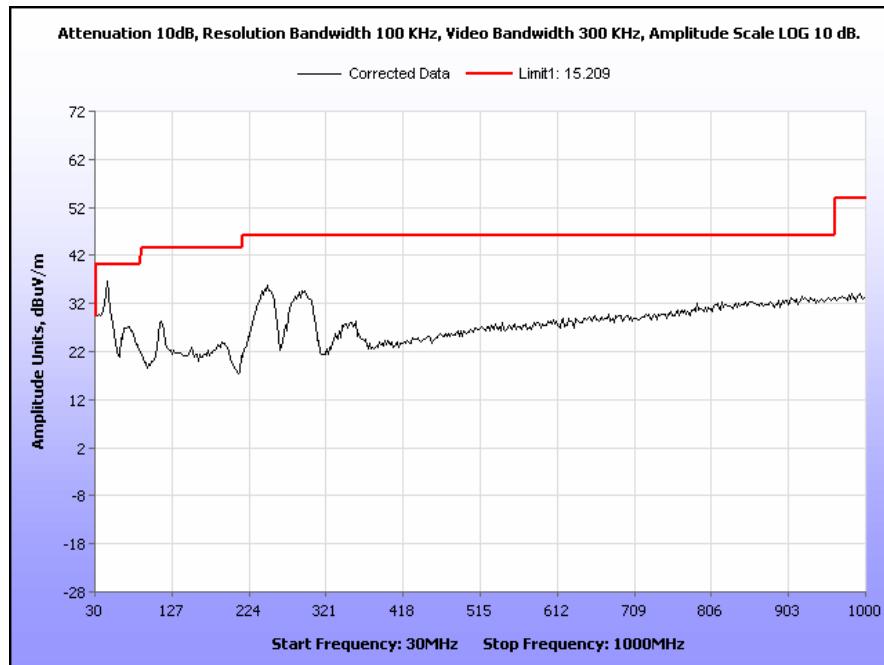


**Plot 58. Radiated Spurious Emissions, 5240 MHz, 20 MHz Channel, 30 MHz – 1 GHz**

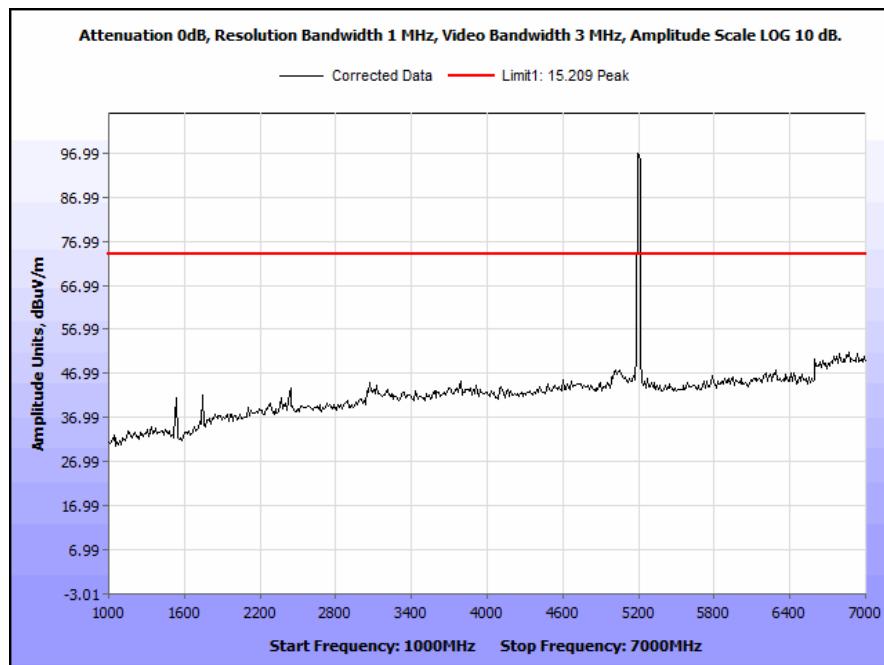


**Plot 59. Radiated Spurious Emissions, 5240 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Peak**

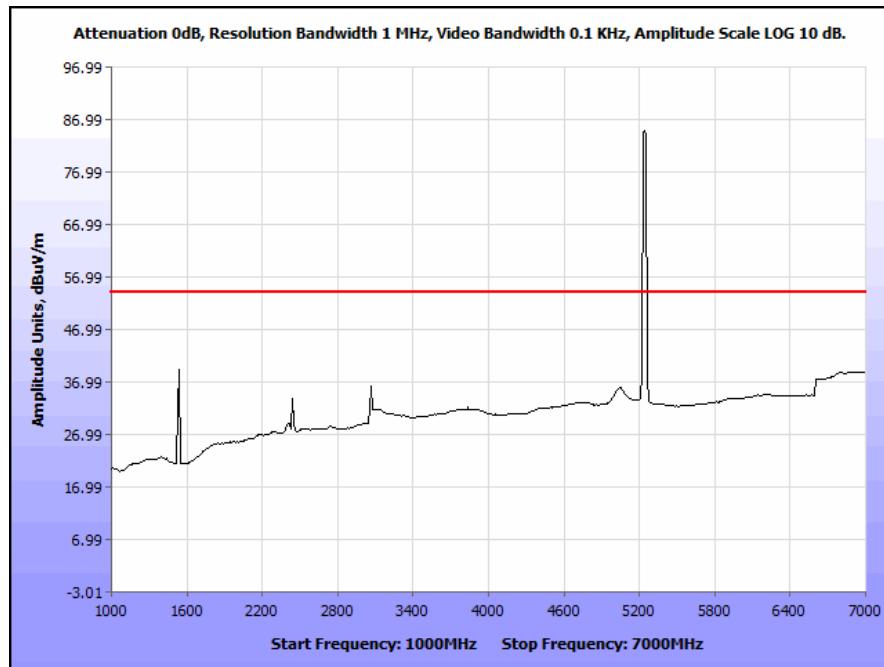


**Plot 60. Radiated Spurious Emissions, 5240 MHz, 20 MHz Channel, 1 GHz – 7 GHz, Average**

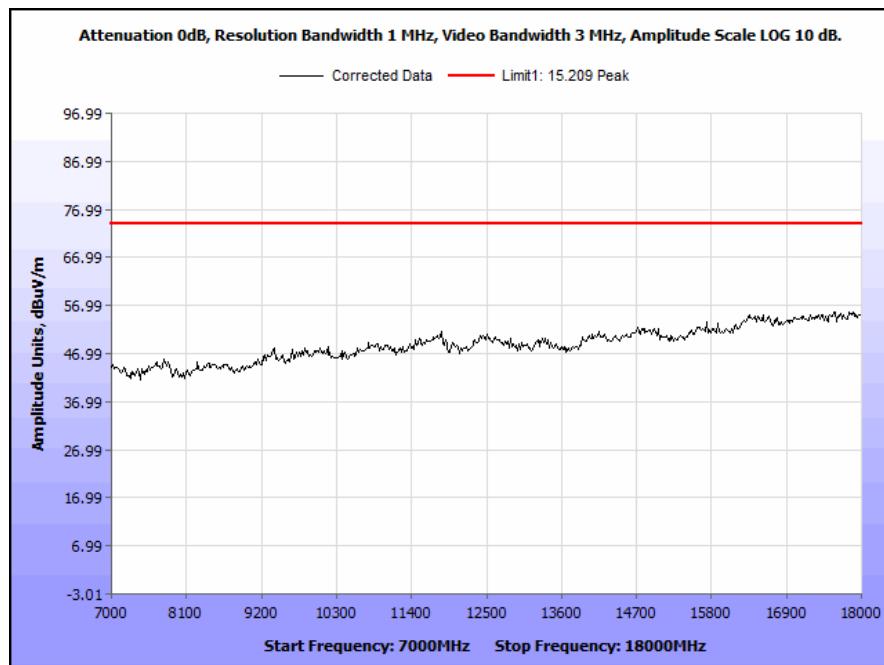


**Plot 61. Radiated Spurious Emissions, 5240 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Peak**

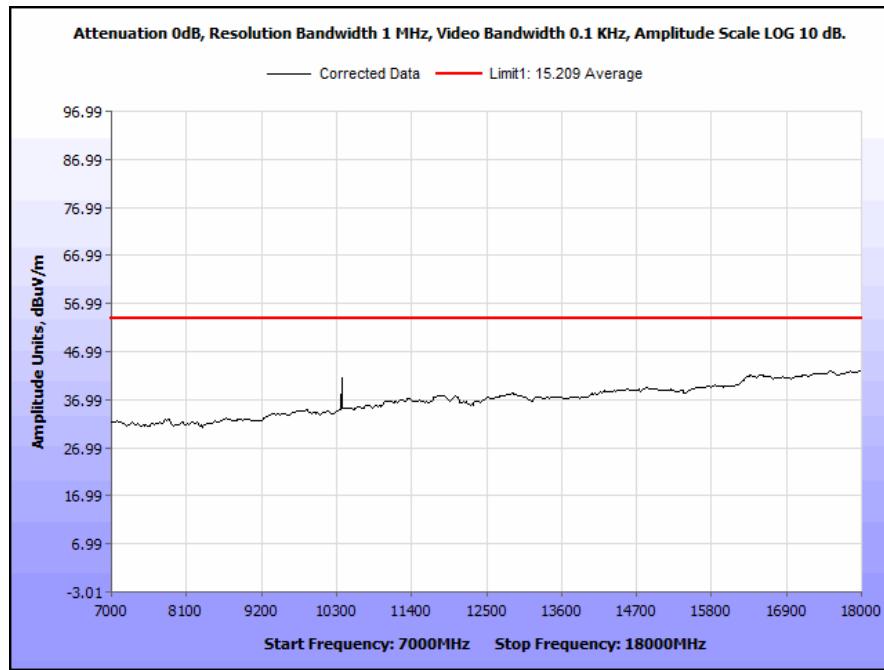


Plot 62. Radiated Spurious Emissions, 5240 MHz, 20 MHz Channel, 7 GHz – 18 GHz, Average

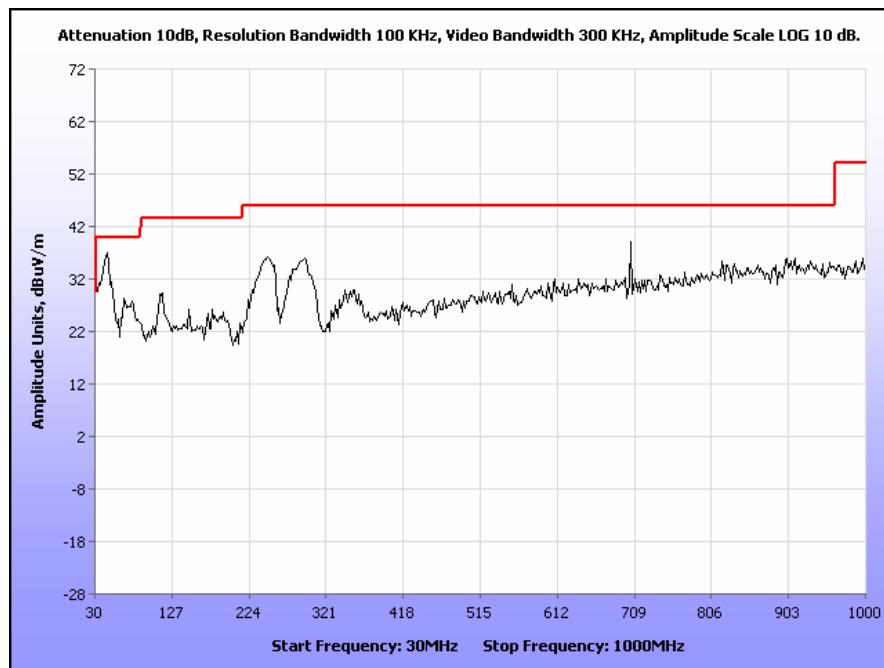


Plot 63. Radiated Spurious Emissions, 5190 MHz, 40 MHz Channel, 30 MHz – 1 GHz

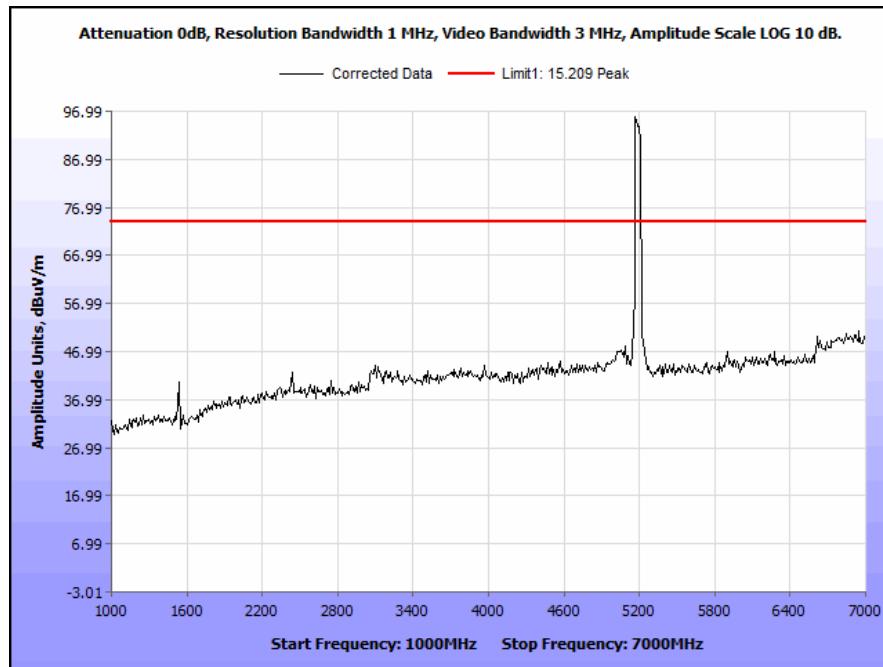


**Plot 64. Radiated Spurious Emissions, 5190 MHz, 40 MHz Channel, 1 GHz – 7 GHz, Peak**

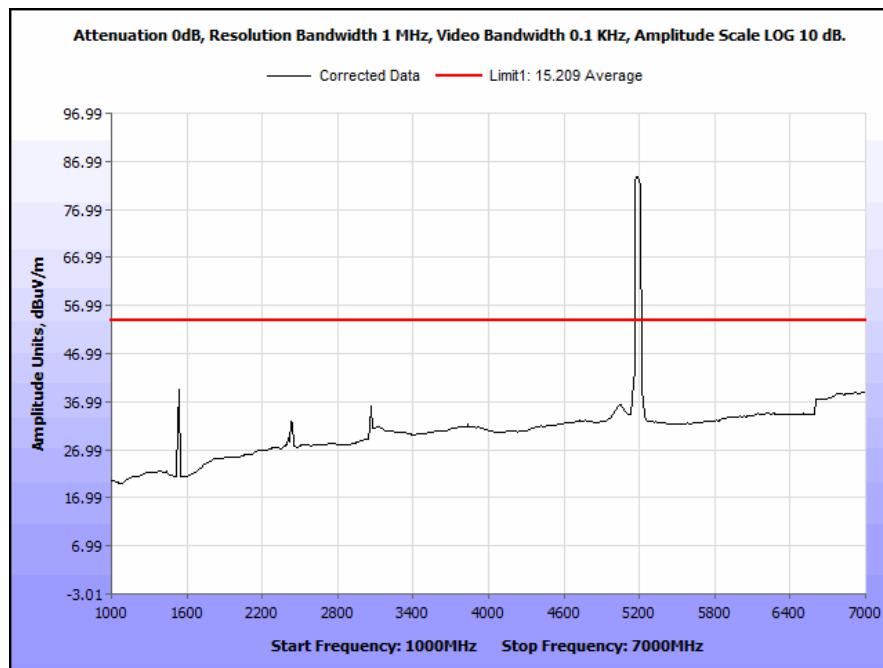


**Plot 65. Radiated Spurious Emissions, 5190 MHz, 40 MHz Channel, 1 GHz – 7 GHz, Average**

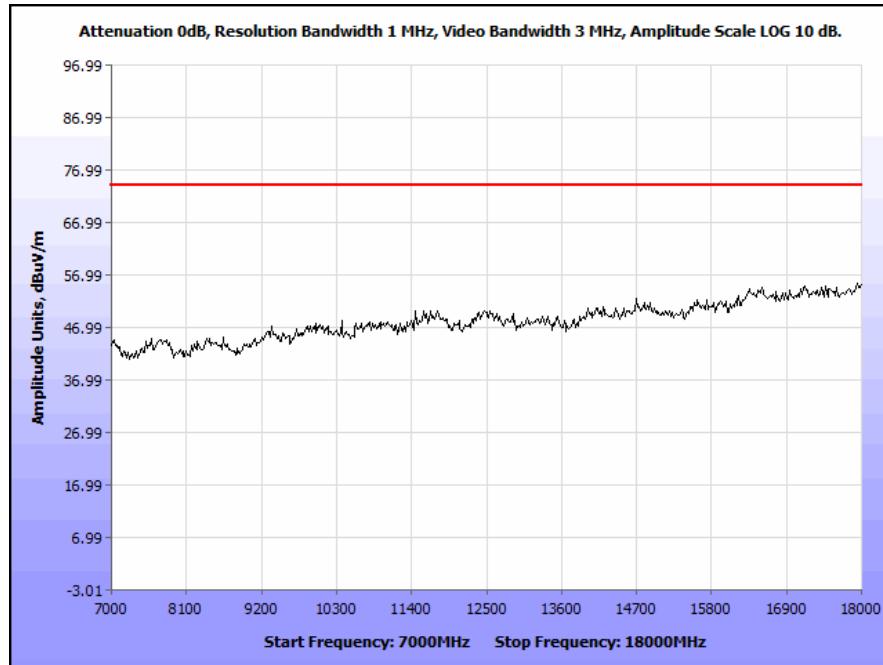


**Plot 66. Radiated Spurious Emissions, 5190 MHz, 40 MHz Channel, 7 GHz – 18 GHz, Peak**

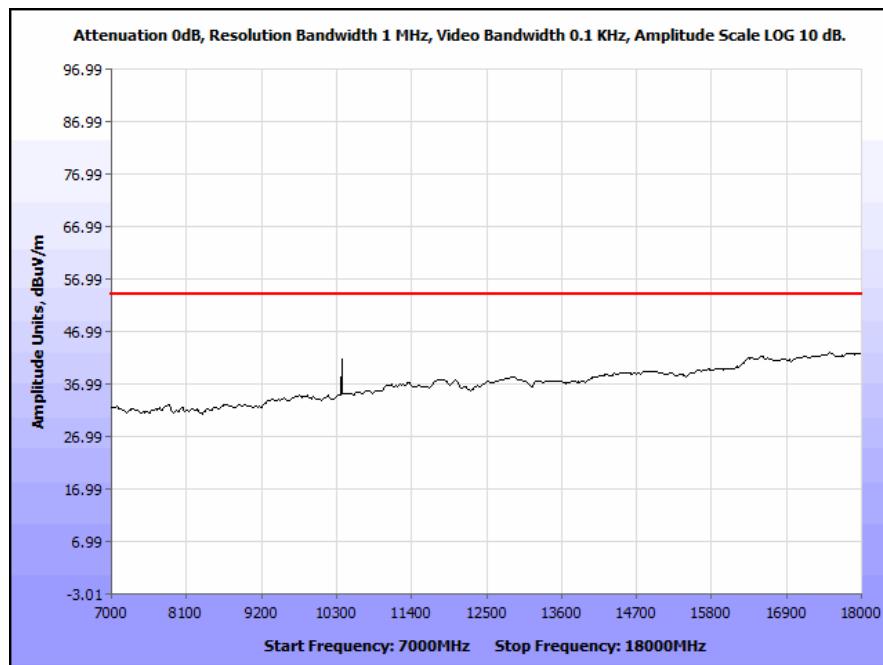


**Plot 67. Radiated Spurious Emissions, 5190 MHz, 40 MHz Channel, 7 GHz – 18 GHz, Average**

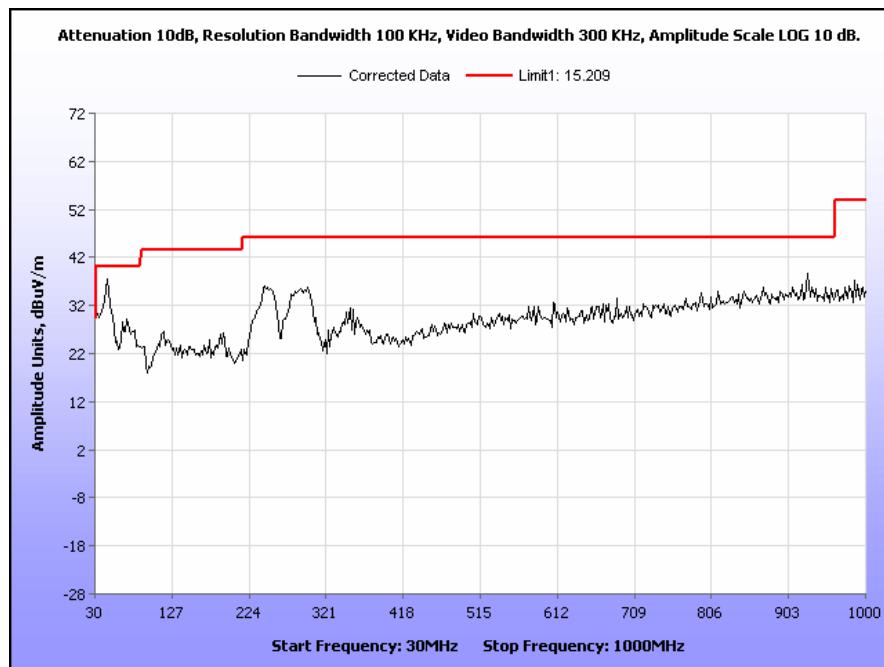


Plot 68. Radiated Spurious Emissions, 5230 MHz, 40 MHz Channel, 30 MHz – 1 GHz

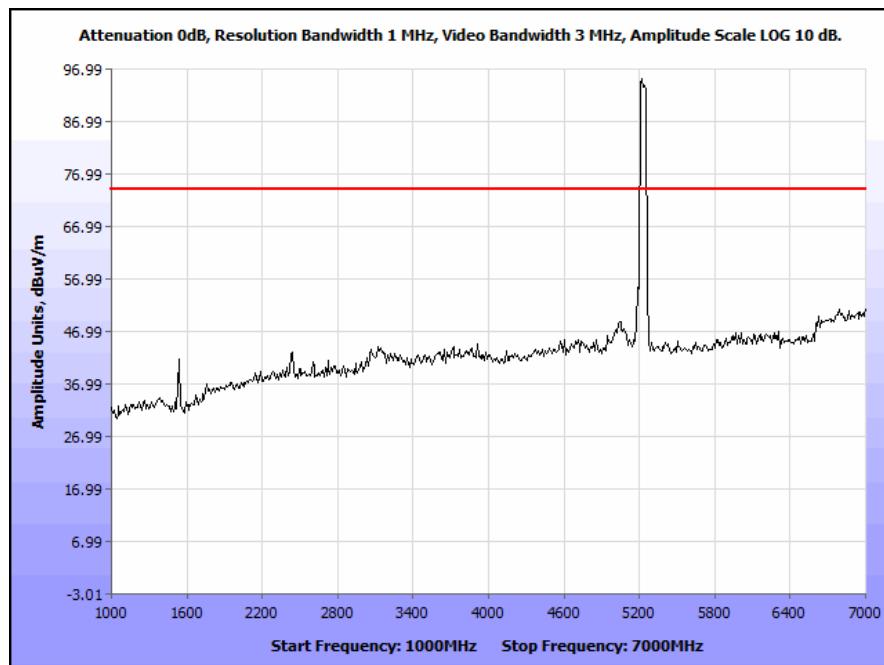


Plot 69. Radiated Spurious Emissions, 5230 MHz, 40 MHz Channel, 1 GHz – 7 GHz, Peak

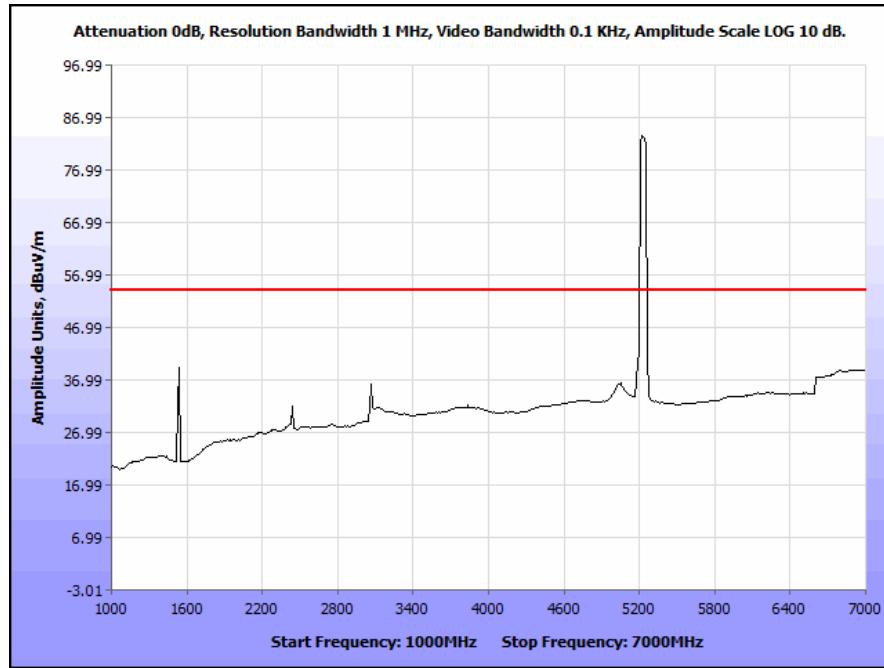


**Plot 70.** Radiated Spurious Emissions, 5230 MHz, 40 MHz Channel, 1 GHz – 7 GHz, Average

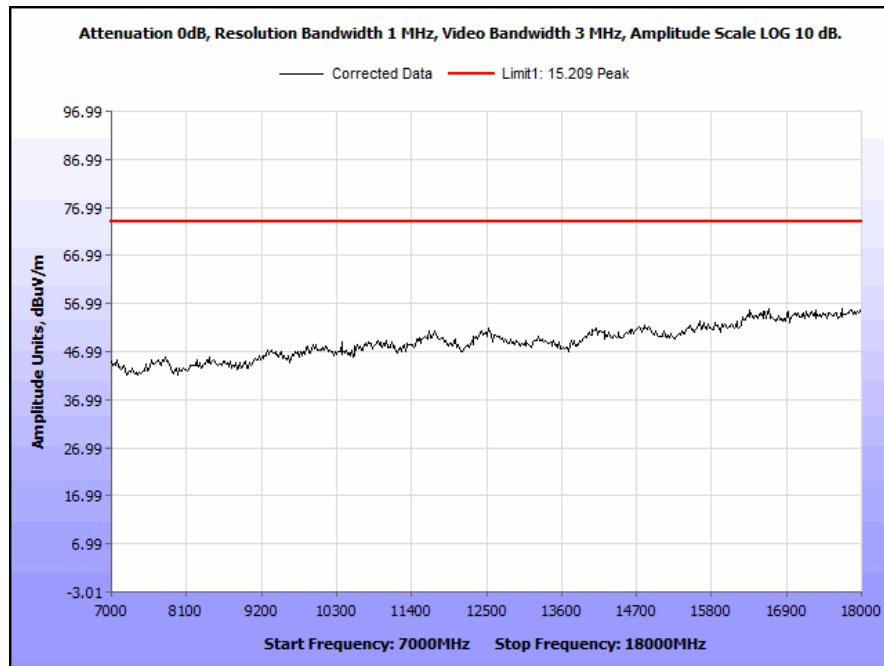


**Plot 71.** Radiated Spurious Emissions, 5230 MHz, 40 MHz Channel, 7 GHz – 18 GHz, Peak

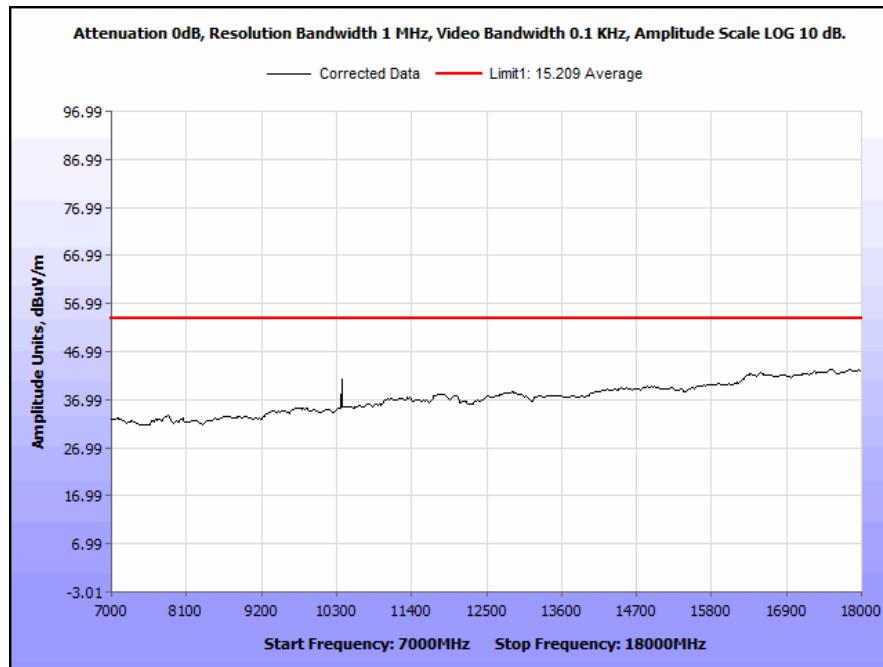


Plot 72. Radiated Spurious Emissions, 5230 MHz, 40 MHz Channel, 7 GHz – 18 GHz, Average

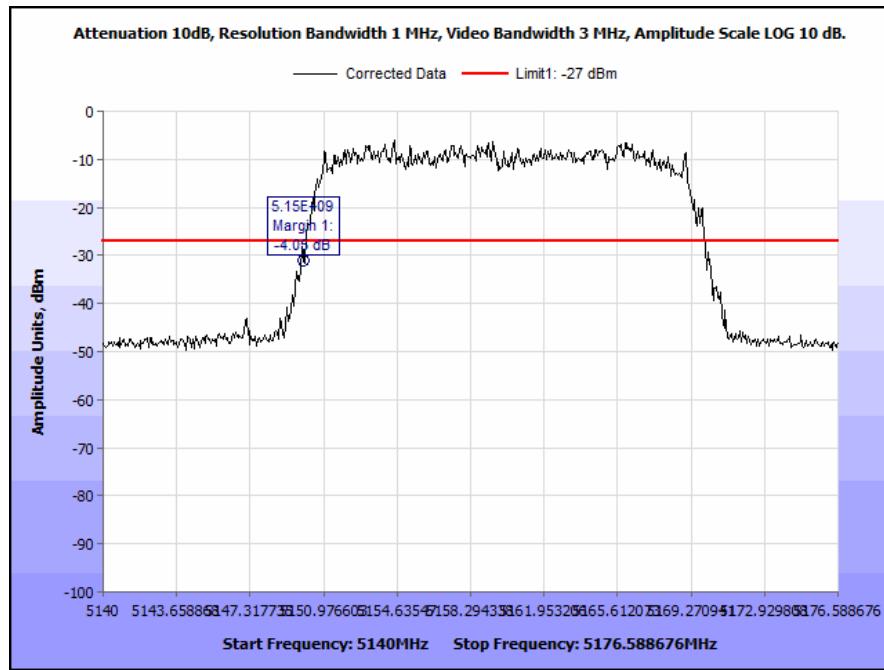


Plot 73. Radiated Restricted Band, 5160 MHz, 20 MHz

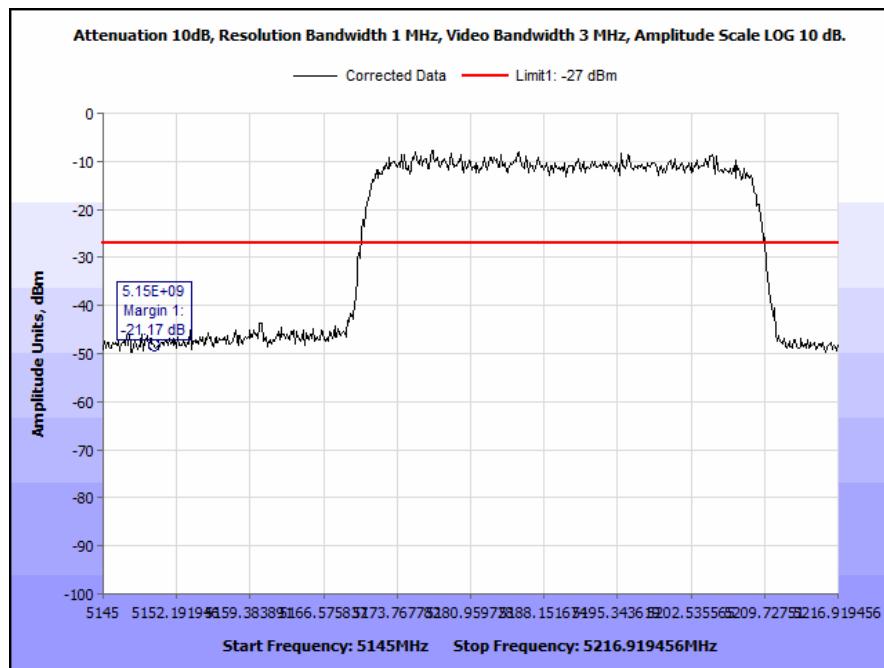

Plot 74. Radiated Restricted Band, 5190 MHz, 40 MHz

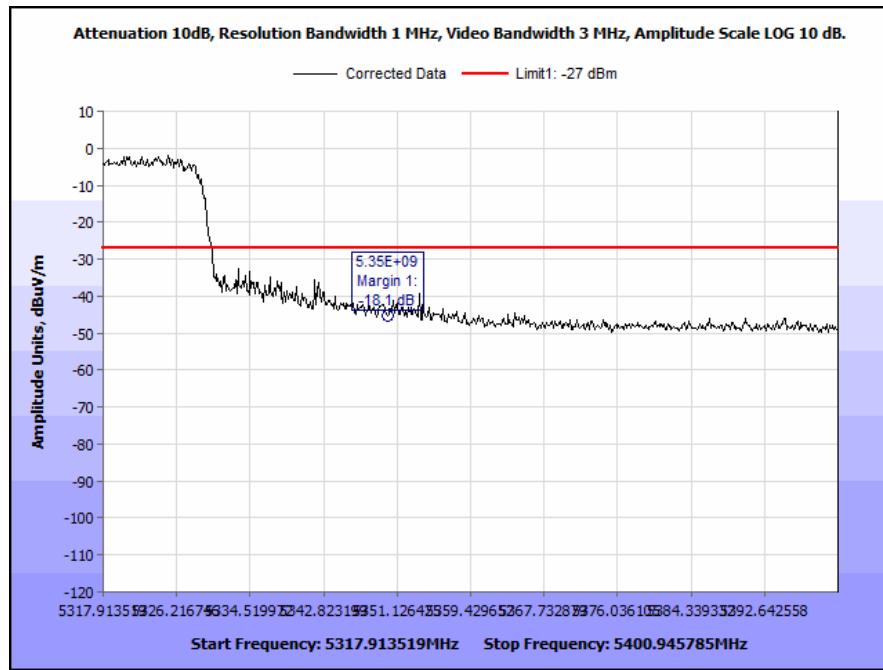


**Plot 75. Radiated Restricted Band, 5310 MHz, 40 MHz**

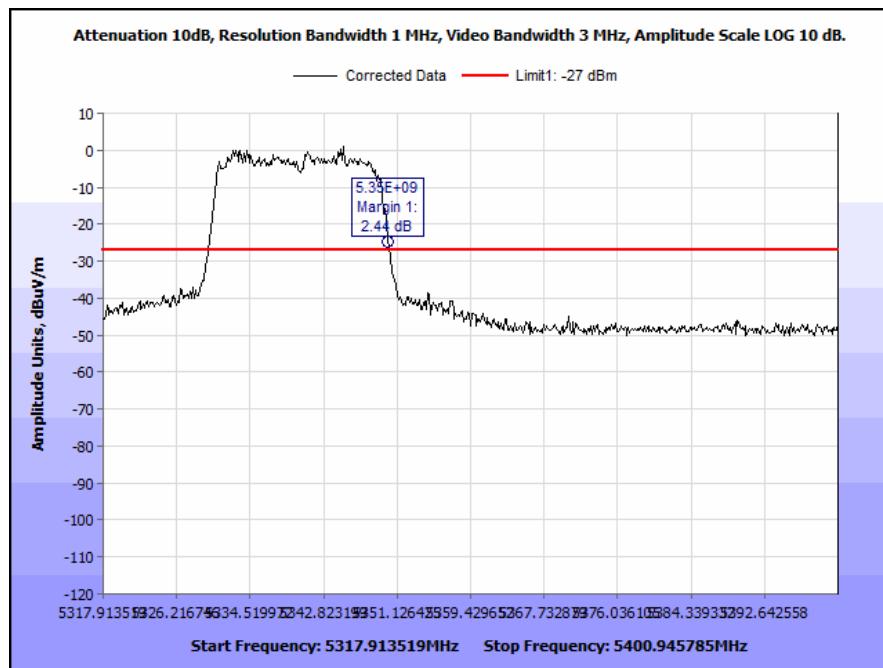


**Plot 76. Radiated Restricted Band, 5340 MHz, 20 MHz**


Note: The band edge for the 20 MHz was re-measured using the integration method and was shown to meet the limit in the following plot:

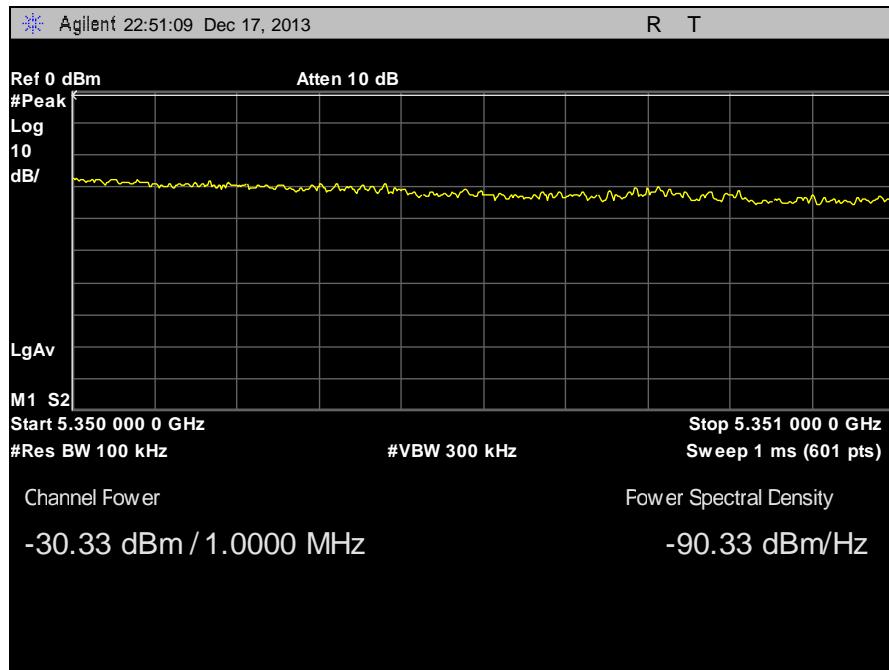

Plot 77. Radiated Restricted Band, 5340 MHz, 20 MHz

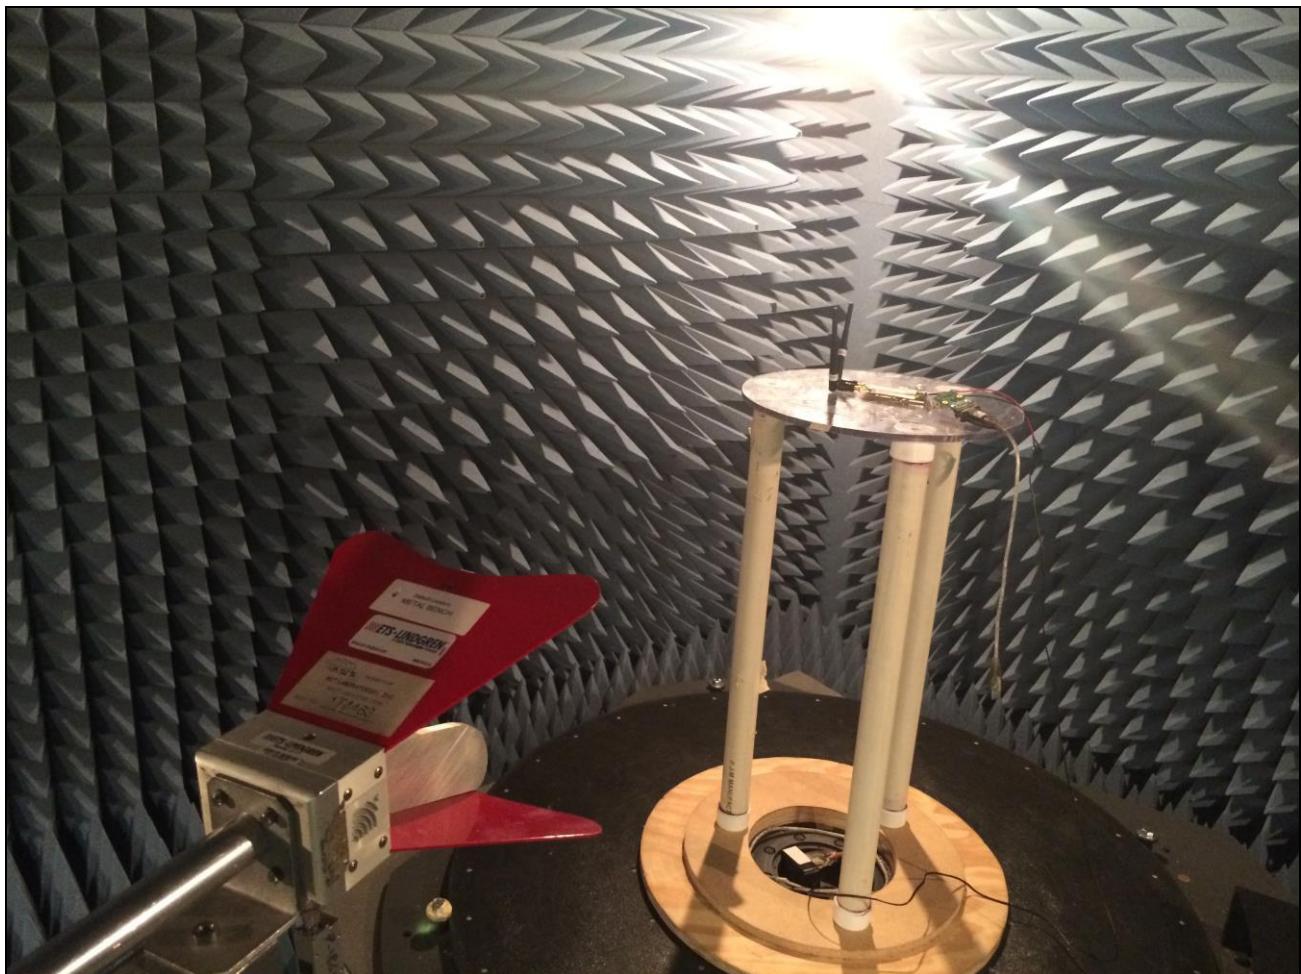

**Photograph 5. Radiated Spurious Emissions, Test Setup Above 1 GHz**

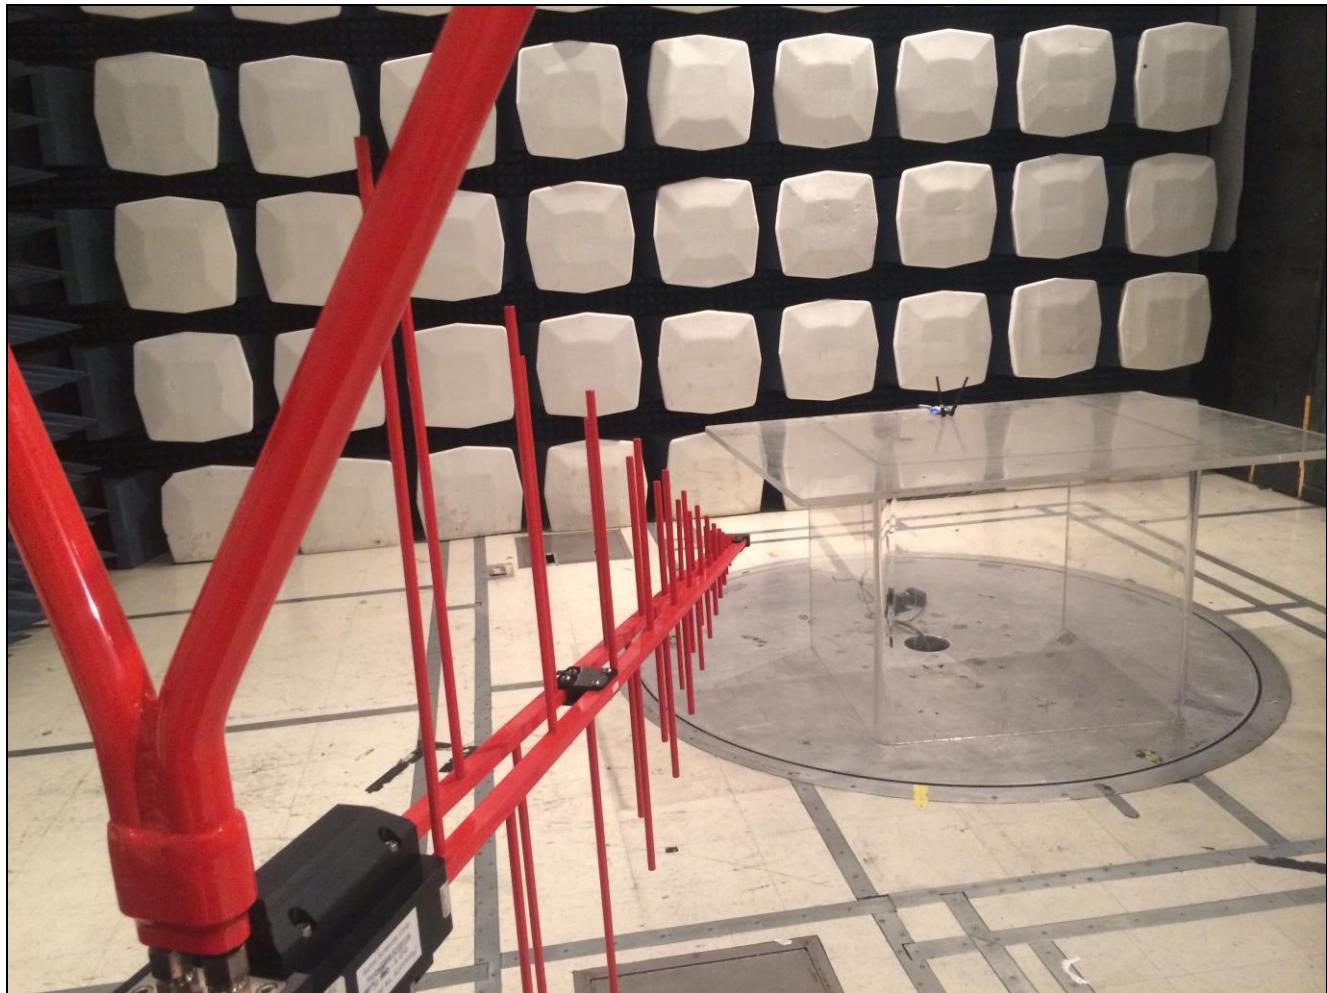

**Photograph 6. Radiated Spurious Emissions, Test Setup Below 1 GHz**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(f) RF Exposure

**RF Exposure Requirements:** **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 5160-5240MHz; highest conducted power = 16.58 dBm (Avg) therefore, **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where,  $S$  = Power Density ( $<1 \text{ mW/cm}^2$ )  
 $P$  = Power Input to antenna (45.49mW)  
 $G$  = Antenna Gain (3.16 numeric)  
 $R$  = Minimum Distance between User and Antenna (20 cm)

$$S = (45.49 * 3.16) / (4 * 3.14 * 20^2) = 0.028 \text{ mW/cm}^2$$

Since  $S < 1 \text{ mW/cm}^2$ , the minimum distance ( $R$ ) is 20cm

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.407(g) Frequency Stability

**Test Requirements:** **§ 15.407(g):** Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

**Test Procedure:** The EUT was connected directly to a spectrum analyzer through an attenuator. The resolution band width of the spectrum analyzer was set to 1 MHz. A reference frequency was found at 20°C with input voltage of 120VAC. The voltage was varied at ambient temperature and the temperature was changed in steps no greater than 10°C. The carrier frequency was recorded in each case and compared to the reference frequency.


**Test Results:** The EUT was compliant with the requirements of **§15.407(g)**.

**Test Engineer(s):** Djed Mouada


**Test Date(s):** 12/16/13

Frequency	5200 MHz	UNII1	
Temperature (C)	Voltage (V)	Center Frequency (MHz)	Drift (PPM)
-20	120	5200.030148	4.909882371
-10	120	5200.035509	5.940756841
0	120	5200.030499	4.977263465
10	120	5200.018951	2.756571591
20	108	5200.004171	-0.08584589
20	120	5200.004617	0
20	132	5200.004054	-0.10825817
30	120	5199.995305	-1.79086937
40	120	5199.99279	-2.27453125
50	120	5199.998626	-1.15206667
55	120	5200.007298	0.51561185


**Table 17. Frequency Stability, Test Results**

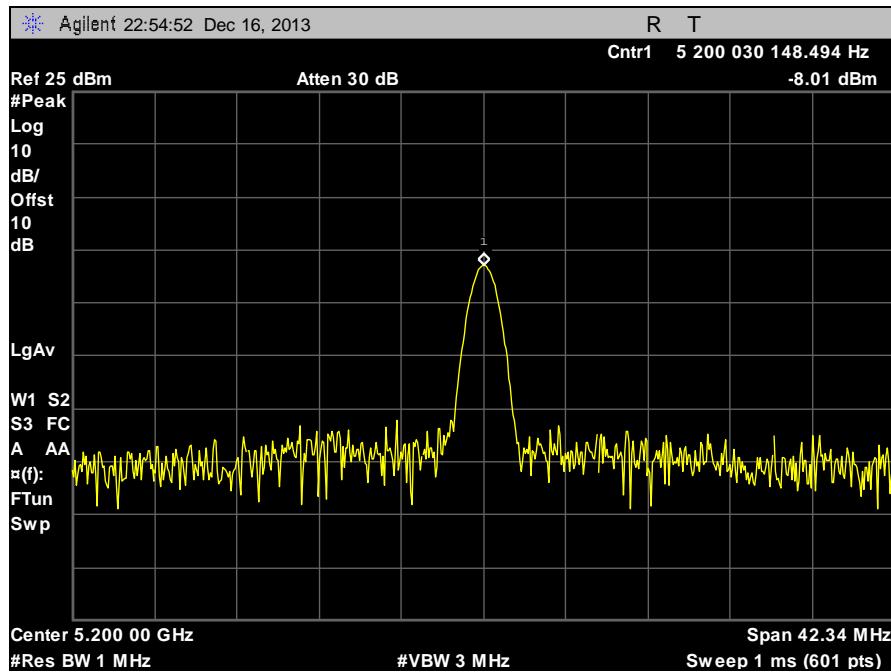


Plot 78. Frequency Stability, 5200 MHz, -20°C, 120 V

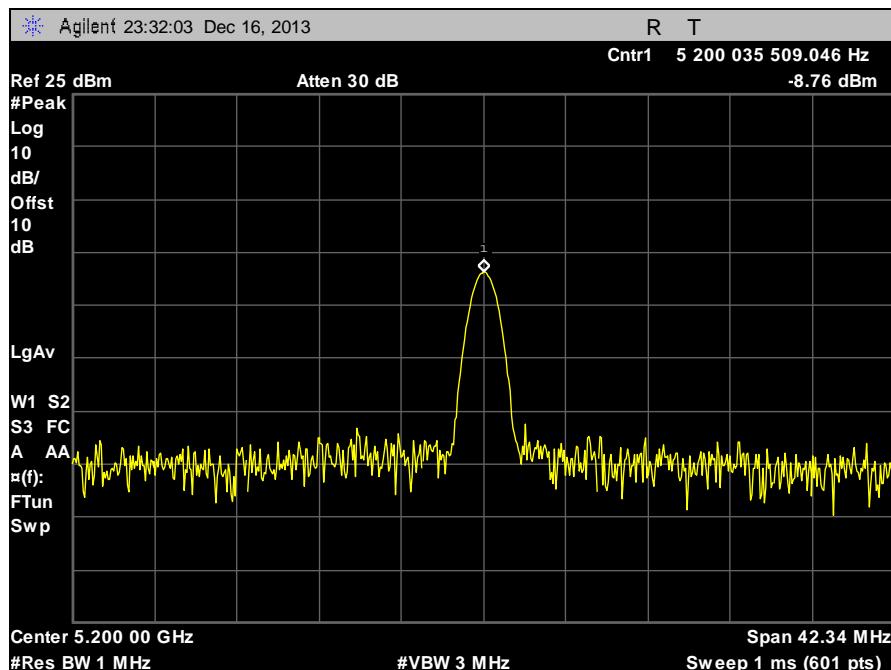


Plot 79. Frequency Stability, 5200 MHz, -10°C, 120 V

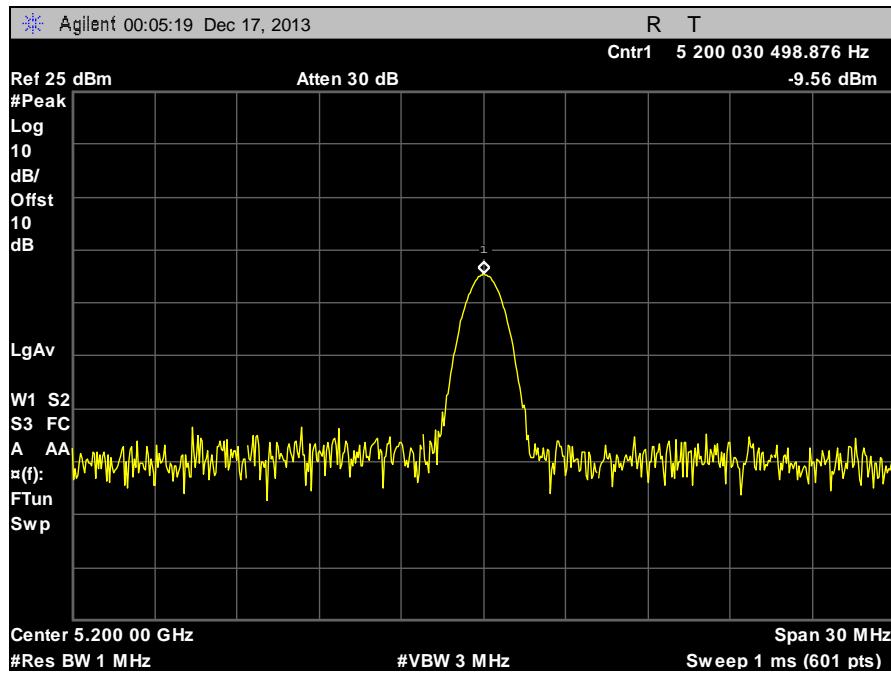


Plot 80. Frequency Stability, 5200 MHz, 0°C, 120 V

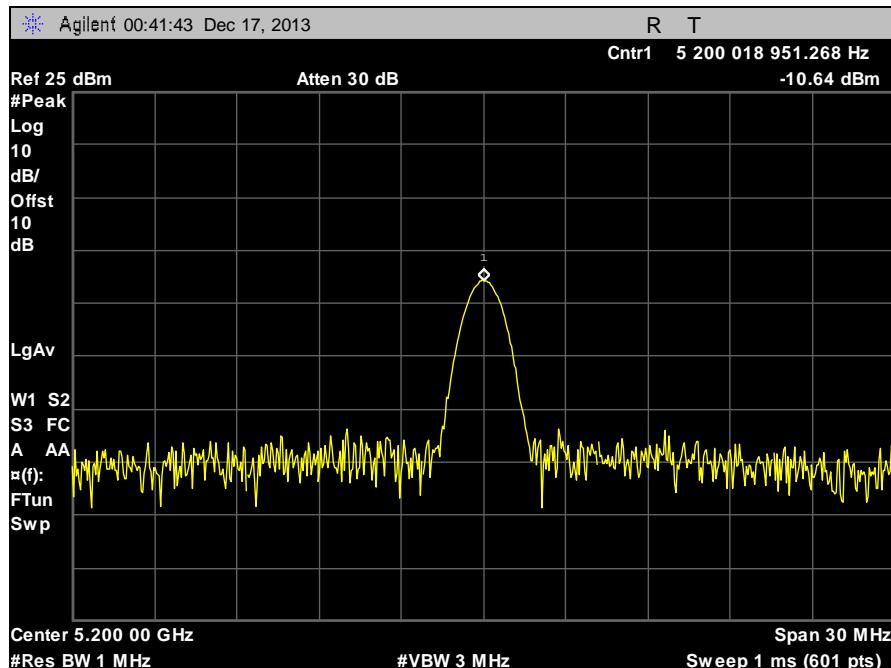


Plot 81. Frequency Stability, 5200 MHz, 10°C, 120 V

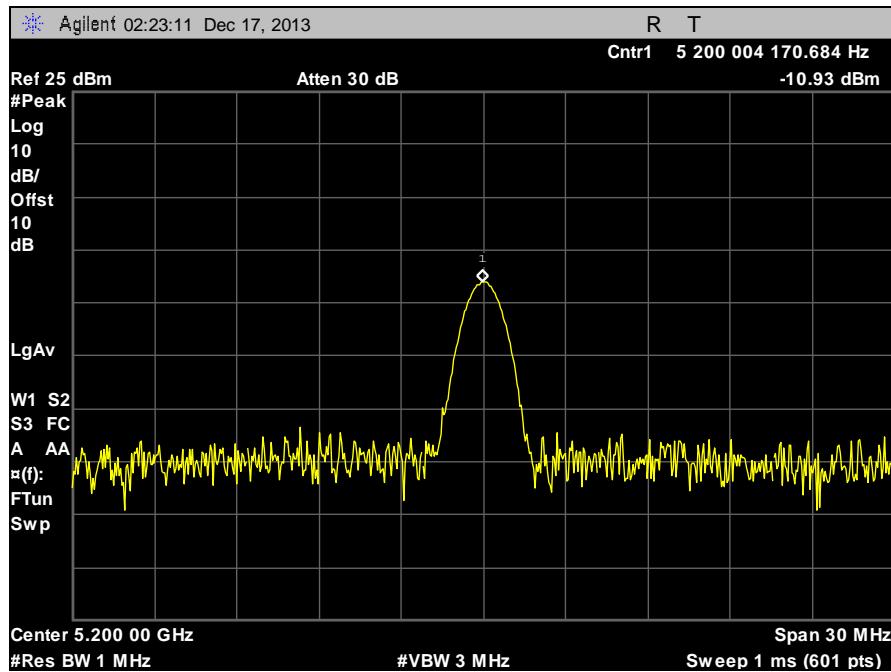


Plot 82. Frequency Stability, 5200 MHz, 20°C, 108V

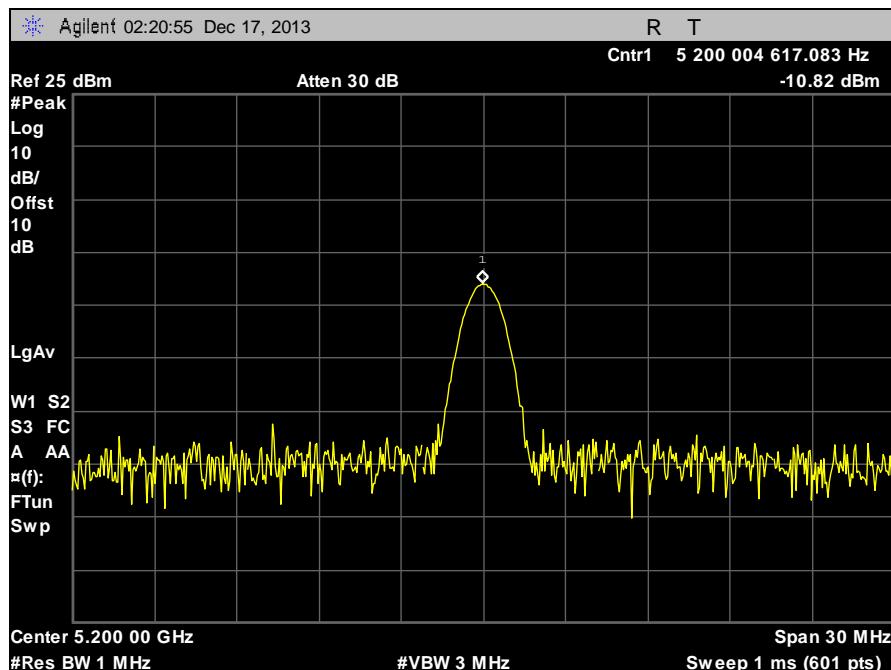


Plot 83. Frequency Stability, 5200 MHz, 20°C, 120 V

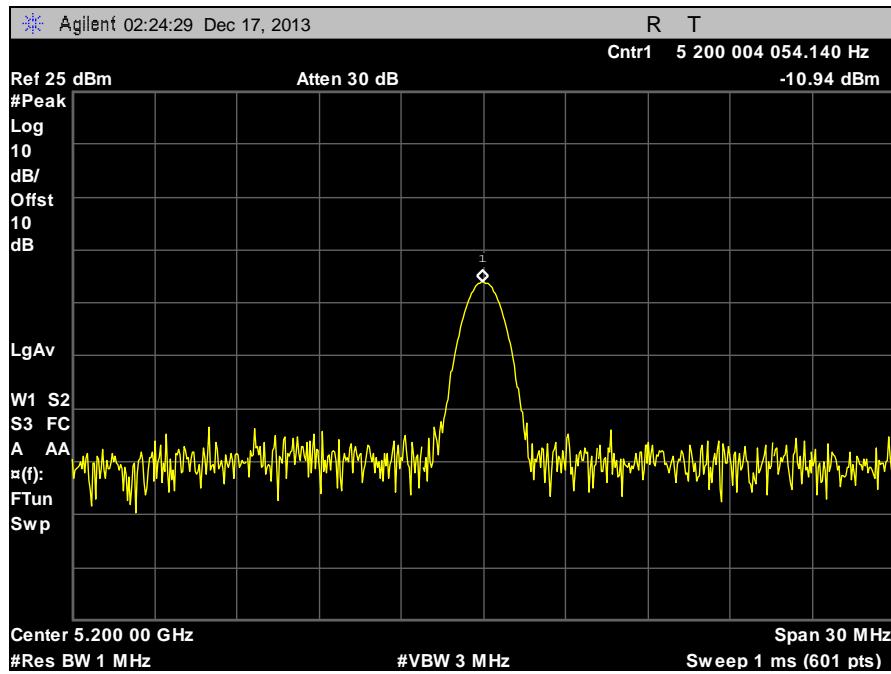


Plot 84. Frequency Stability, 5200 MHz, 20°C, 132 V

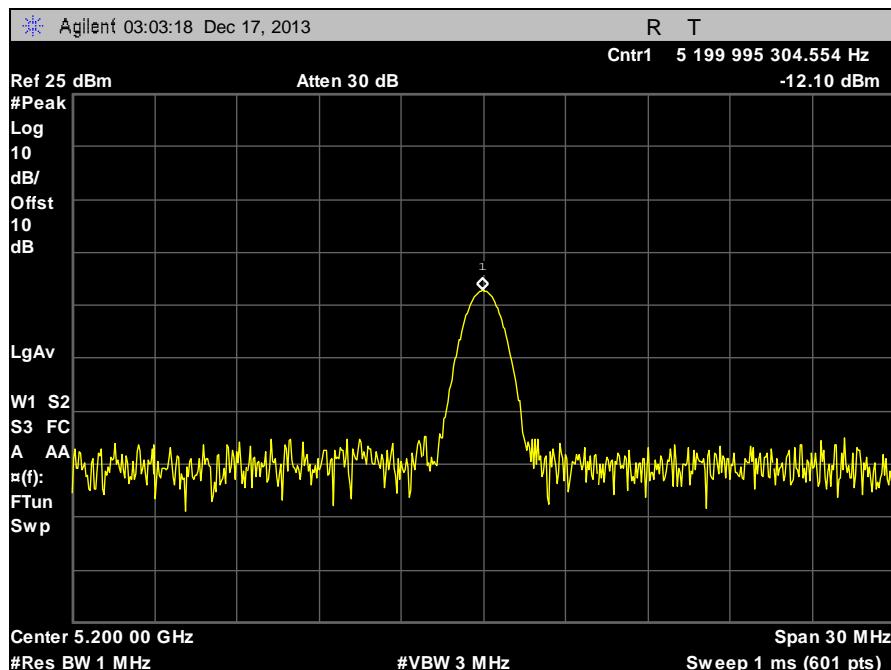


Plot 85. Frequency Stability, 5200 MHz, 30°C, 120 V

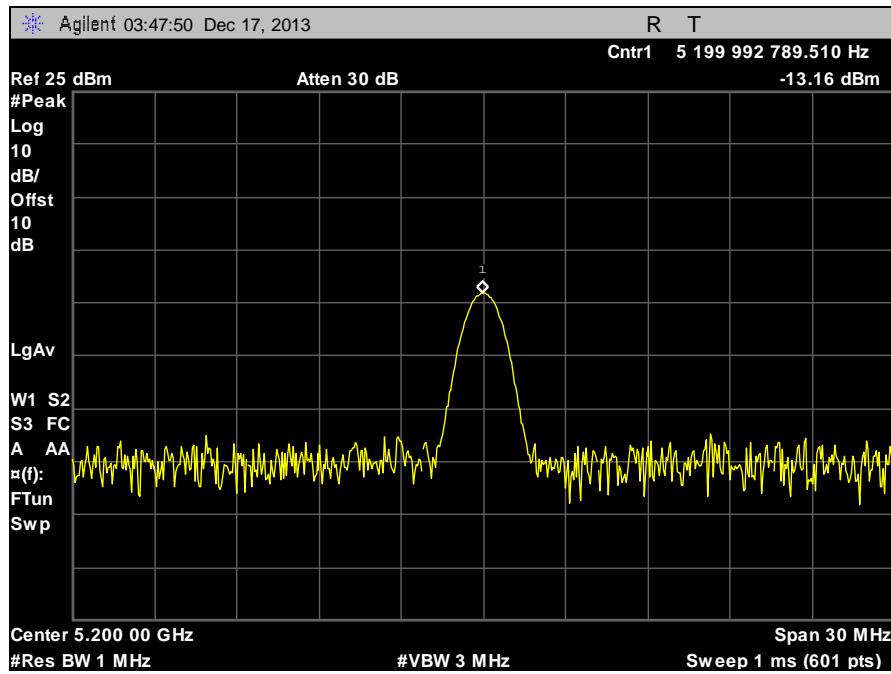


Plot 86. Frequency Stability, 5200 MHz, 40°C, 120 V

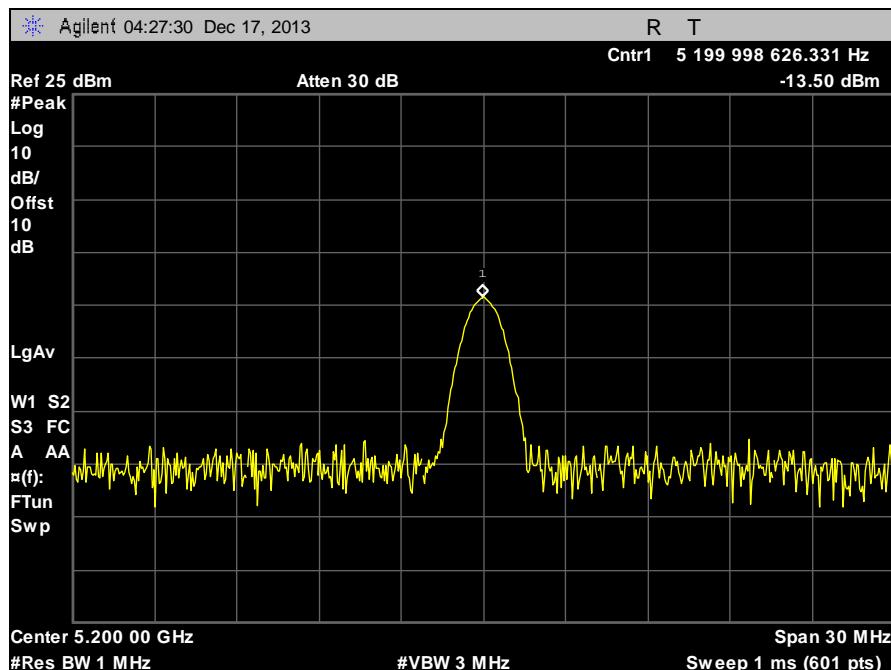


Plot 87. Frequency Stability, 5200 MHz, 50°C, 120 V

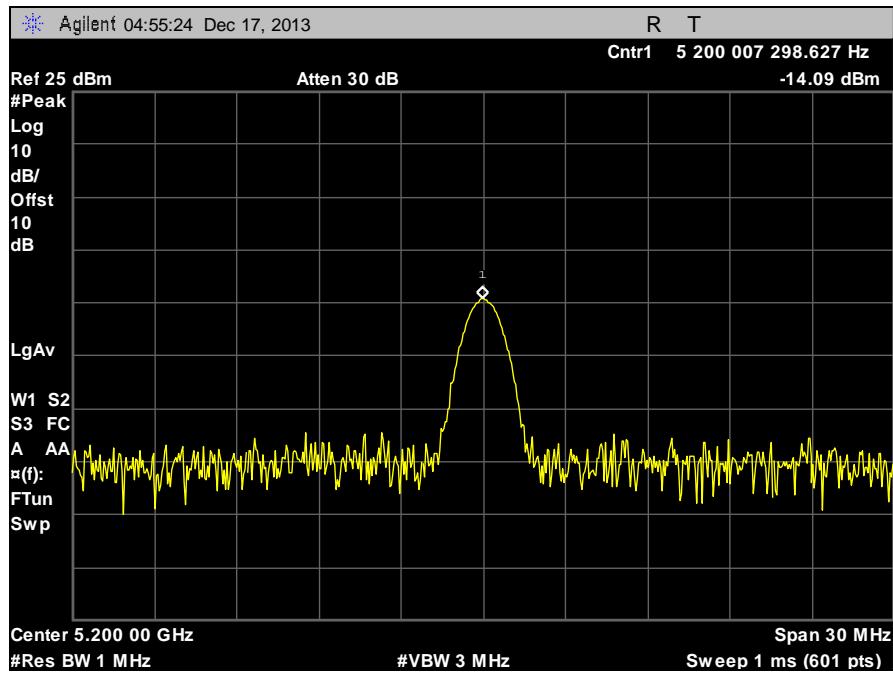


Plot 88. Frequency Stability, 5200 MHz, 55°C, 132 V

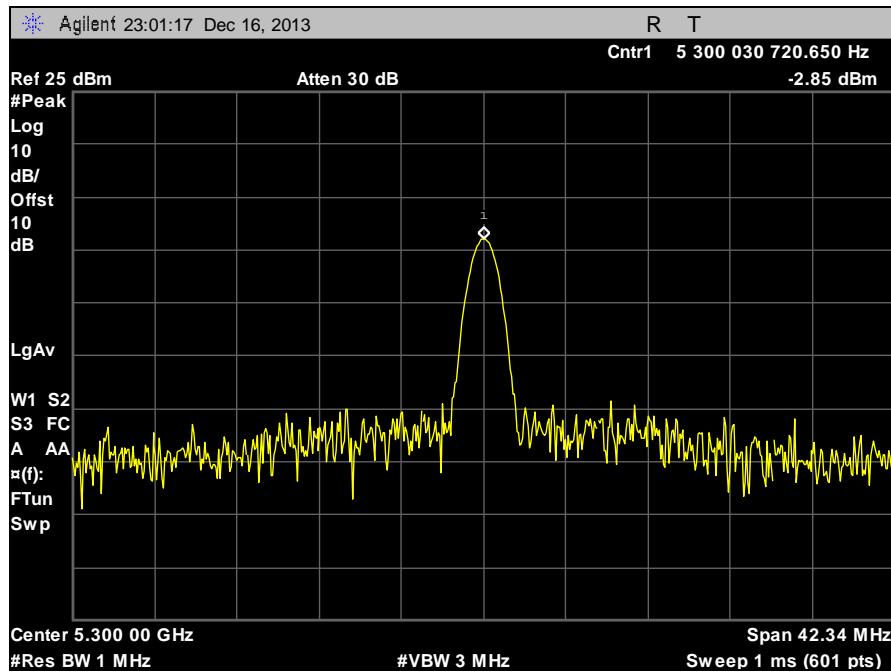


Plot 89. Frequency Stability, 5300 MHz, -20°C, 120 V

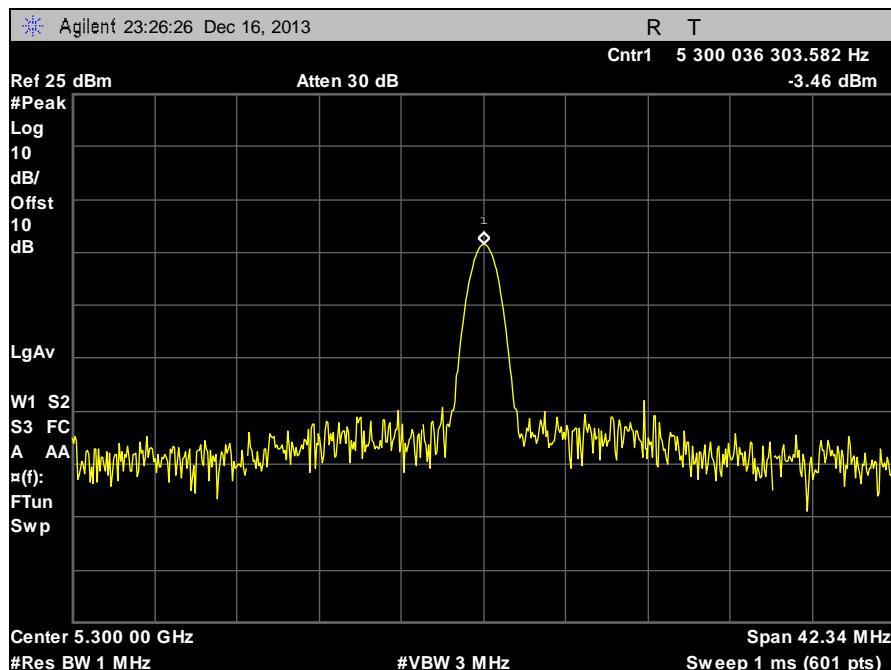


Plot 90. Frequency Stability, 5300 MHz, -10°C, 120 V

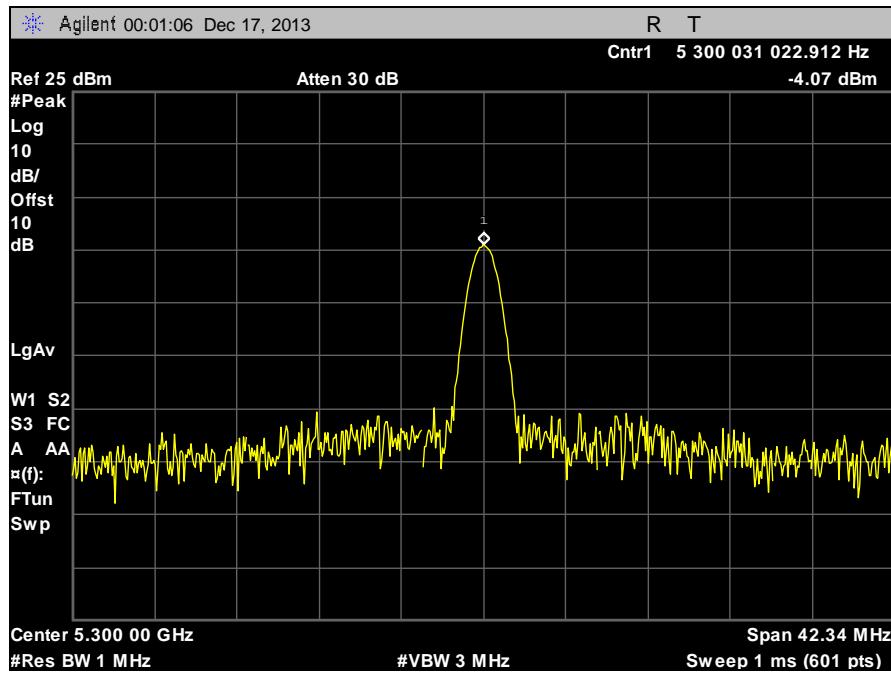


Plot 91. Frequency Stability, 5300 MHz, 0°C, 120 V

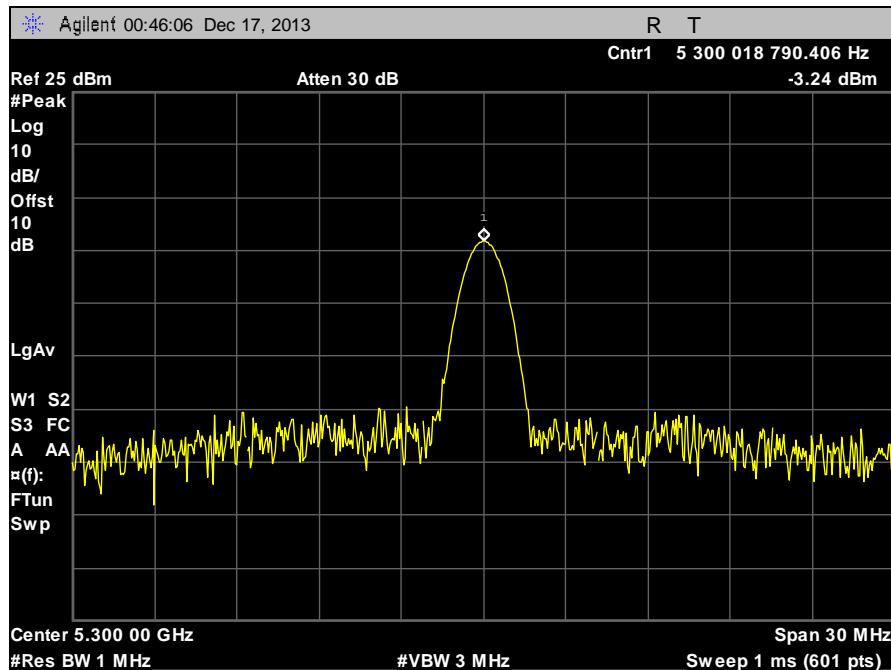


Plot 92. Frequency Stability, 5300 MHz, 10°C, 120 V

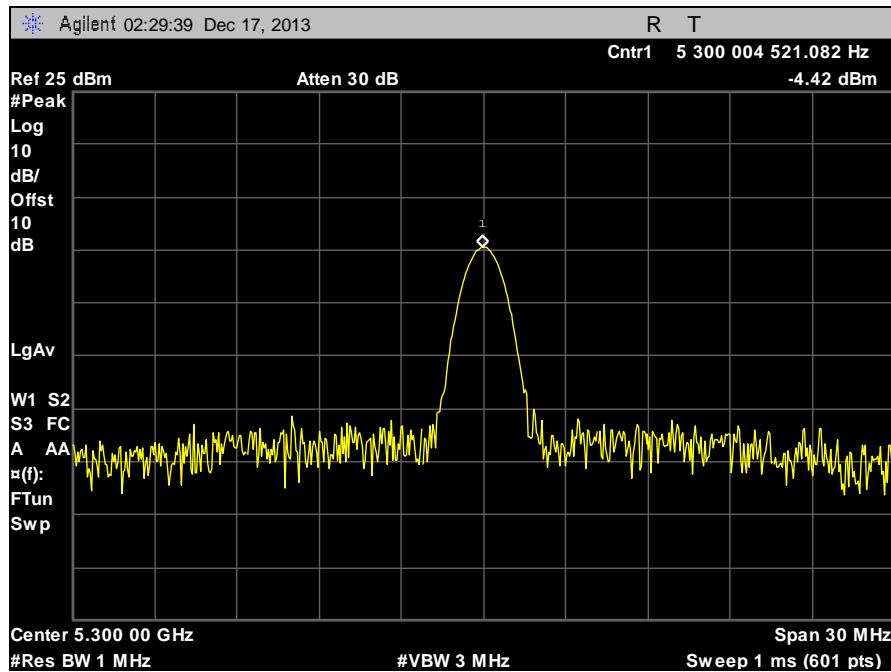


Plot 93. Frequency Stability, 5300 MHz, 20°C, 108V

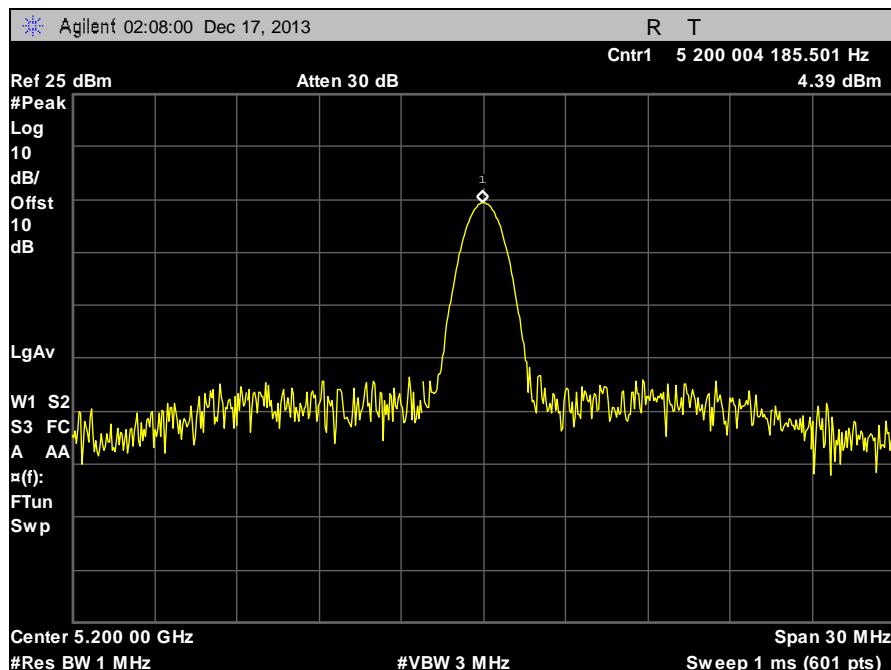


Plot 94. Frequency Stability, 5300 MHz, 20°C, 120 V

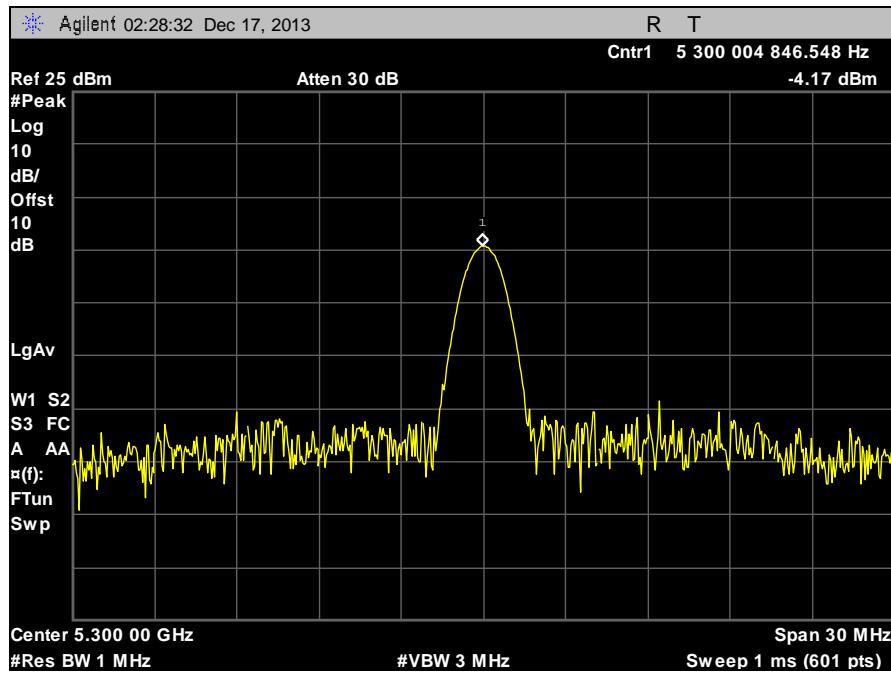


Plot 95. Frequency Stability, 5300 MHz, 20°C, 132 V

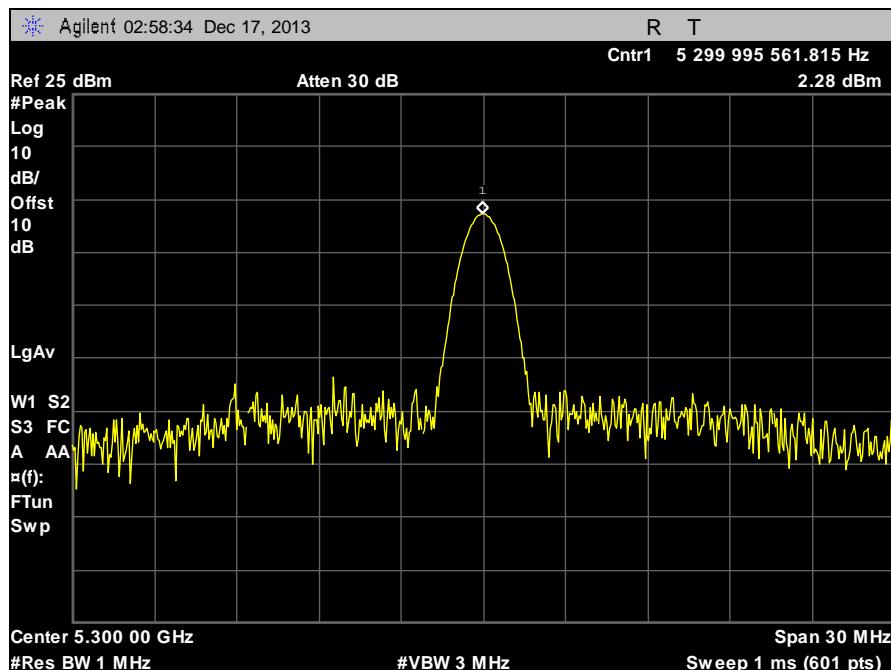


Plot 96. Frequency Stability, 5300 MHz, 30°C, 120 V

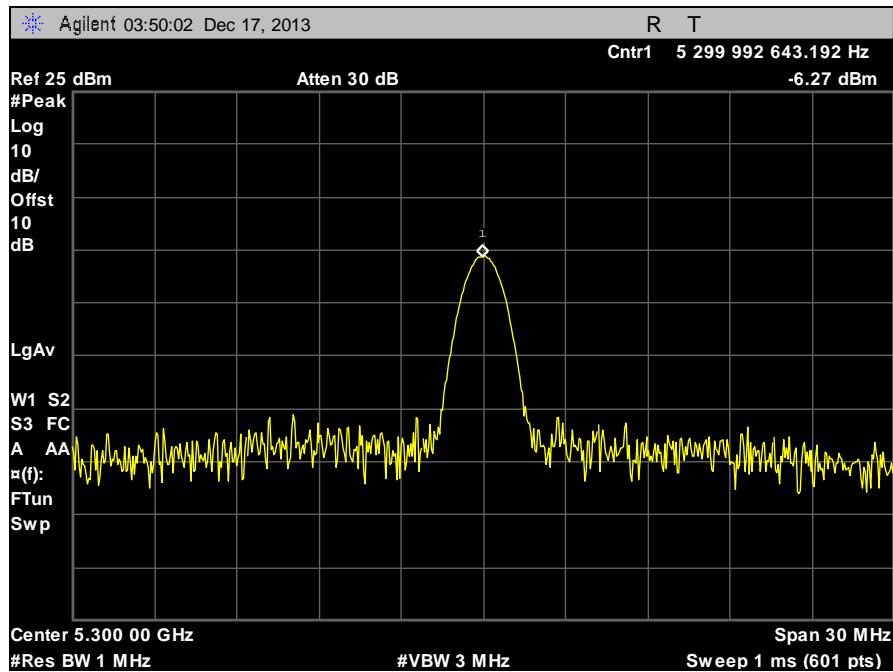

Plot 97. Frequency Stability, 5300 MHz, 40°C, 120 V

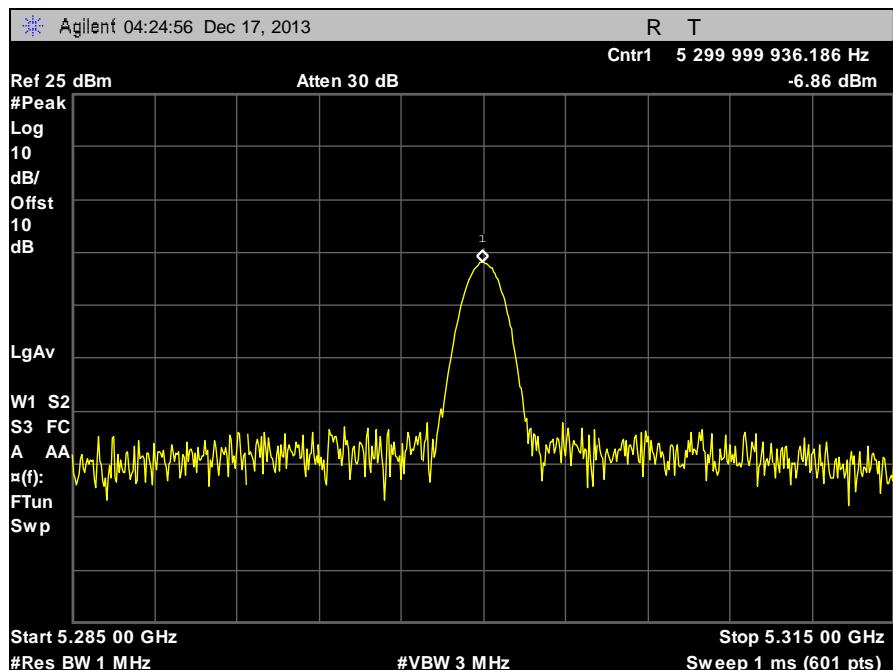

Plot 98. Frequency Stability, 5300 MHz, 50°C, 120 V

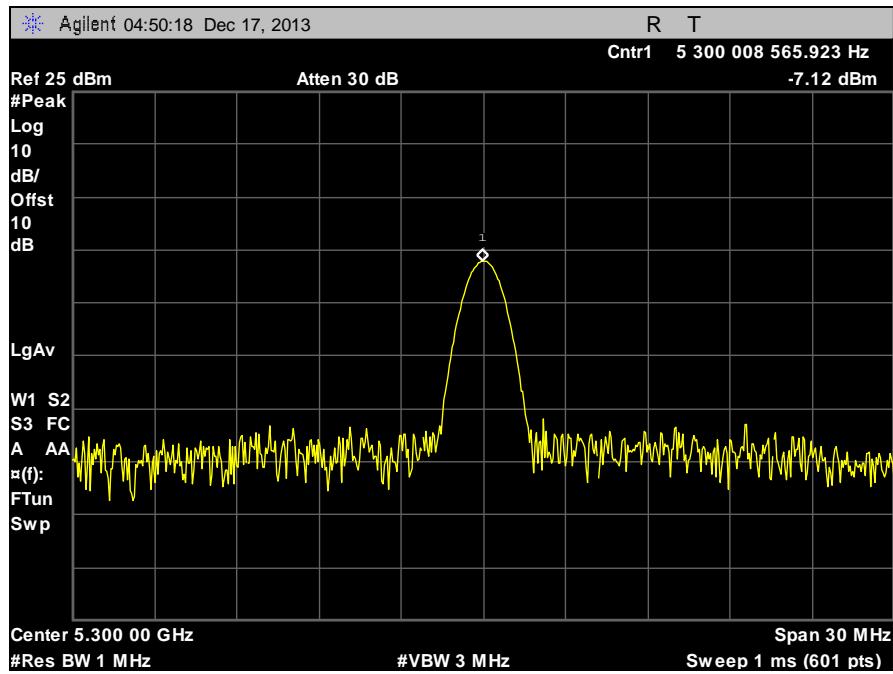

Plot 99. Frequency Stability, 5300 MHz, 55°C, 132 V

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET ASSET #	EQUIPMENT	MANUFACTURER	MODEL	LAST CAL DATE	CAL DUE DATE
1T4149	HIGH-FREQUENCY ANECHOIC CHAMBER	RAY-PROOF	81	SEE NOTE	
1T4300	SEMI-ANECHOIC CHAMBER #1 (FCC)	EMC TEST SYSTEMS	NONE	7/24/2012	7/24/2015
1T4612	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	7/30/2013	7/30/2014
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	7/16/2012	7/16/2014
1T4753	ANTENNA - BILOG	SUNOL SCIENCES	JB6	7/24/2013	1/24/2015
1T4505	TEMPERATURE CHAMBER	TEST EQUITY	115	1/5/2014	1/5/2015
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	8/6/2012	2/6/2014
1T2511	ANTENNA; HORN	EMCO	3115	3/28/2013	9/28/2014
1T4502	COMB GENERATOR	COM-POWER	CGC-255	8/21/2012	2/21/2014
1T4568	RADIATING NOISE SOURCE	MET LABORATORIES	N/A	SEE NOTE	
1T4791	THERM./CLOCK/HUMIDITY	CONTROL COMPANY	06-662-4	3/8/2012	3/8/2014
1T4563	LISN (10 AMP)	SOLAR ELECTRONICS	9322-50-R-10-BNC	11/27/2012	5/27/2014
1T2948	LISN	SOLAR ELECTRONICS	8028-50-TS-24-BNC	8/9/2013	2/9/2015
1T4503	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	SEE NOTE	
1T4504	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	SEE NOTE	
1T4814	COMB GENERATOR	COM-POWER	CGO-5100	SEE NOTE	
1T4479	POWER SUPPLY PROGRAMMABLE	CALIFORNIA INSTRUMENTS	1501TC	SEE NOTE	

**Table 18. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

## V. Certification & User's Manual Information

## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of emitting radio-frequency energy by radiation, conduction, or other means. Radio-frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Amimon  
Kite - TX Module

Electromagnetic Compatibility  
End of Report  
CFR Title 47, Part 15B & 15E

## End of Report