

FCC Report

Applicant: Amimon Ltd.

Address of Applicant: 2 Maskit St. Herzlia Israel

Equipment Under Test (EUT)

Product Name: Digital propotional radio control system

Model No.: AMI-I8

FCC ID: VQSFALCORETX

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2016

Date of sample receipt: December 14, 2016


Date of Test: December 15-26, 2016

Date of report issued: December 27, 2016

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A circular blue ink stamp from GTS Global United Technology Services Co., Ltd. is visible. The stamp contains the text "GTS", "GLOBAL TESTING", and "UNITED TECHNOLOGY SERVICES CO., LTD.". Overlaid on the stamp is a handwritten signature in blue ink, which appears to read "Robinson Lo".

Robinson Lo
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	December 27, 2016	Original

Prepared By:

Tiger Chen

Date:

December 27, 2016

Project Engineer

Check By:

Andy Wu

Date:

December 27, 2016

Reviewer

3 Contents

Page

1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
4.1	MEASUREMENT UNCERTAINTY	4
5	GENERAL INFORMATION	5
5.1	CLIENT INFORMATION	5
5.2	GENERAL DESCRIPTION OF EUT	5
5.3	TEST MODE	8
5.4	TEST FACILITY.....	8
5.5	TEST LOCATION	8
5.6	OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
5.7	DESCRIPTION OF SUPPORT UNITS	8
5.8	TEST INSTRUMENTS LIST.....	9
6	TEST RESULTS AND MEASUREMENT DATA.....	10
6.1	ANTENNA REQUIREMENT	10
6.2	CONDUCTED EMISSIONS	11
6.3	CONDUCTED PEAK OUTPUT POWER.....	14
6.4	20dB EMISSION BANDWIDTH	17
6.5	CARRIER FREQUENCIES SEPARATION.....	20
6.6	HOPPING CHANNEL NUMBER	24
6.7	DWELL TIME.....	26
6.8	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	34
6.9	BAND EDGE	35
6.9.1	Conducted Emission Method.....	35
6.9.2	Radiated Emission Method.....	38
6.10	SPURIOUS EMISSION.....	40
6.10.1	Conducted Emission Method	40
6.10.2	Radiated Emission Method.....	43
7	TEST SETUP PHOTO	50
8	EUT CONSTRUCTIONAL DETAILS	53

4 Test Summary

Test Item	Section	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10: 2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)
Conducted Peak Output Power	2.4GHz ~ 2.4835GHz	$\pm 1.5\text{dB}$	(1)
20dB Emission Bandwidth	2.4GHz ~ 2.4835GHz	$\pm 5\%$	(1)
Carrier Frequencies Separation	2.4GHz ~ 2.4835GHz	$\pm 5\%$	(1)
Dwell Time	2.4GHz ~ 2.4835GHz	$\pm 5\%$	(1)
Band Edge	2.31GHz ~ 2.5GHz	$\pm 3.5\text{dB}$	(1)
Hopping Channel Number	2.4GHz ~ 2.4835GHz	N/A	(1)
Pseudorandom Frequency Hopping Sequence	2.4GHz ~ 2.4835GHz	N/A	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

5 General Information

5.1 Client Information

Applicant:	Amimon Ltd.
Address of Applicant:	2 Maskit St. Herzlia Israel
Manufacturer/Factory:	Dongguan Flysky RC Model technology Co.,Ltd
Address of Manufacturer/ Factory:	West building 3, Huangjiangyuan Ind Park, Qiaoli North Gate, Changping Town, Dongguan ,China

5.2 General Description of EUT

Product Name:	Digital propotional radio control system
Model No.:	AMI-I8
Operation Frequency:	2408.0MHz~2475.0MHz
Channel numbers:	135
Modulation technology:	GFSK
Antenna Type:	ANT 1: Integral Antenna ANT 2: Integral Antenna
Antenna gain:	ANT 1: 2dBi ANT 2: 2dBi
Power supply:	DC 7.4V 5000mAh Li-ion Battery

Remark: The system works in the frequency range of 2408.0MHz to 2475MHz. This band has been divided to 135 independent channels. Each radio system uses 16 different channels, the minimum channel separation is ≥ 1 MHz. By using various switch-on times, hopping scheme and channel frequencies, the system can guarantee a jamming free radio transmission. The channel list is below.

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2408.00	36	2425.50	71	2443.00	106	2460.50
2	2408.50	37	2426.00	72	2443.50	107	2461.00
3	2409.00	38	2426.50	73	2444.00	108	2461.50
4	2409.50	39	2427.00	74	2444.50	109	2462.00
5	2410.00	40	2427.50	75	2445.00	110	2462.50
6	2410.50	41	2428.00	76	2445.50	111	2463.00
7	2411.00	42	2428.50	77	2446.00	112	2463.50
8	2411.50	43	2429.00	78	2446.50	113	2464.00
9	2412.00	44	2429.50	79	2447.00	114	2464.50
10	2412.50	45	2430.00	80	2447.50	115	2465.00
11	2413.00	46	2430.50	81	2448.00	116	2465.50
12	2413.50	47	2431.00	82	2448.50	117	2466.00
13	2414.00	48	2431.50	83	2449.00	118	2466.50
14	2414.50	49	2432.00	84	2449.50	119	2467.00
15	2415.00	50	2432.50	85	2450.00	120	2467.50
16	2415.50	51	2433.00	86	2450.50	121	2468.00
17	2416.00	52	2433.50	87	2451.00	122	2468.50
18	2416.50	53	2434.00	88	2451.50	123	2469.00
19	2417.00	54	2434.50	89	2452.00	124	2469.50
20	2417.50	55	2435.00	90	2452.50	125	2470.00
21	2418.00	56	2435.50	91	2453.00	126	2470.50
22	2418.50	57	2436.00	92	2453.50	127	2471.00
23	2419.00	58	2436.50	93	2454.00	128	2471.50
24	2419.50	59	2437.00	94	2454.50	129	2472.00
25	2420.00	60	2437.50	95	2455.00	130	2472.50
26	2420.50	61	2438.00	96	2455.50	131	2473.00
27	2421.00	62	2438.50	97	2456.00	132	2473.50
28	2421.50	63	2439.00	98	2456.50	133	2474.00
29	2422.00	64	2439.50	99	2457.00	134	2474.50
30	2422.50	65	2440.00	100	2457.50	135	2475.00
31	2423.00	66	2440.50	101	2458.00		
32	2423.50	67	2441.00	102	2458.50		
33	2424.00	68	2441.50	103	2459.00		
34	2424.50	69	2442.00	104	2459.50		
35	2425.00	70	2442.50	105	2460.00		

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2408.0MHz
The middle channel	2440.0MHz
The Highest channel	2475.0MHz

5.3 Test mode

Transmitting mode	Keep the EUT in transmitting mode.
-------------------	------------------------------------

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC —Registration No.: 600491 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016. ● Industry Canada (IC) —Registration No.: 9079A-2 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.
--

5.5 Test Location

All other tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.

5.7 Description of Support Units

None.

5.8 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 29 2016	June 28 2017
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 29 2016	June 28 2017
5	Loop Antenna	ZHINAN	ZN30900A	GTS534	June 29 2016	June 28 2017
6	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 29 2016	June 28 2017
7	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2016	June 28 2017
8	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 29 2016	June 28 2017
9	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
10	Coaxial Cable	GTS	N/A	GTS213	June 29 2016	June 28 2017
11	Coaxial Cable	GTS	N/A	GTS211	June 29 2016	June 28 2017
12	Coaxial cable	GTS	N/A	GTS210	June 29 2016	June 28 2017
13	Coaxial Cable	GTS	N/A	GTS212	June 29 2016	June 28 2017
14	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 29 2016	June 28 2017
15	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 29 2016	June 28 2017
16	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2016	June 28 2017
17	Band filter	Amindeon	82346	GTS219	June 29 2016	June 28 2017

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	June 29 2016	June 28 2017
2	EMI Test Receiver	Rohde & Schwarz	ESCI 7	GTS552	June 29 2016	June 28 2017
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	June 29 2016	June 28 2017
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 29 2016	June 28 2017
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	June 29 2016	June 28 2017
6	Coaxial Cable	GTS	N/A	GTS227	June 29 2016	June 28 2017
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 29 2016	June 28 2017

6 Test results and Measurement Data

6.1 Antenna requirement


Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
<i>The antenna is integral Antenna, the best case gain of the antenna is 2dBi</i> Two antenna can't transmit at the same time. While the ANT1 transmitting, the ANT2 act as a receiver antenna and vice versa.	
	

6.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * Decreases with the logarithm of the frequency.			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
Test setup:	Reference Plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m																
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.3 for details																
Test results:	Pass																

Measurement data:


Line:

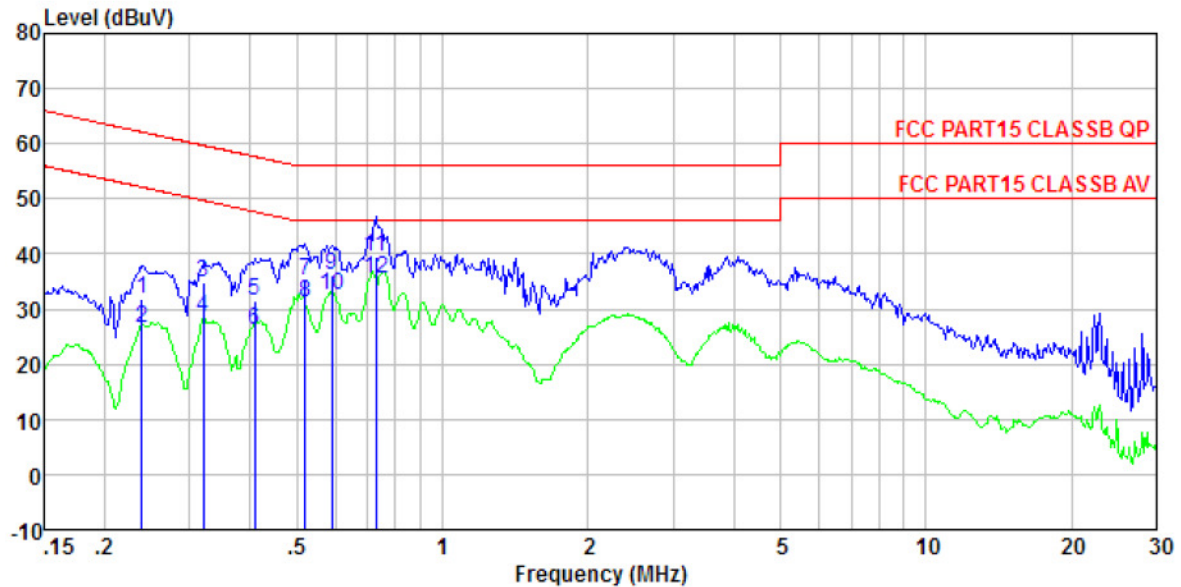

Site : Shielded room
 Condition : FCC PART15 CLASSB QP LISN-2016 LINE
 Job No. : GTS201612000078
 Test mode : Transmitting mode
 Test Engineer: Boy

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.239	31.31	0.44	0.12	31.87	62.13	-30.26	QP
2	0.239	25.97	0.44	0.12	26.53	52.13	-25.60	Average
3	0.320	34.26	0.44	0.10	34.80	59.71	-24.91	QP
4	0.320	27.98	0.44	0.10	28.52	49.71	-21.19	Average
5	0.408	31.04	0.41	0.11	31.56	57.68	-26.12	QP
6	0.408	25.81	0.41	0.11	26.33	47.68	-21.35	Average
7	0.521	34.71	0.37	0.11	35.19	56.00	-20.81	QP
8	0.521	30.76	0.37	0.11	31.24	46.00	-14.76	Average
9	0.592	35.61	0.31	0.12	36.04	56.00	-19.96	QP
10	0.592	32.15	0.31	0.12	32.58	46.00	-13.42	Average
11	0.727	39.15	0.28	0.13	39.56	56.00	-16.44	QP
12	0.727	35.03	0.28	0.13	35.44	46.00	-10.56	Average

Neutral:

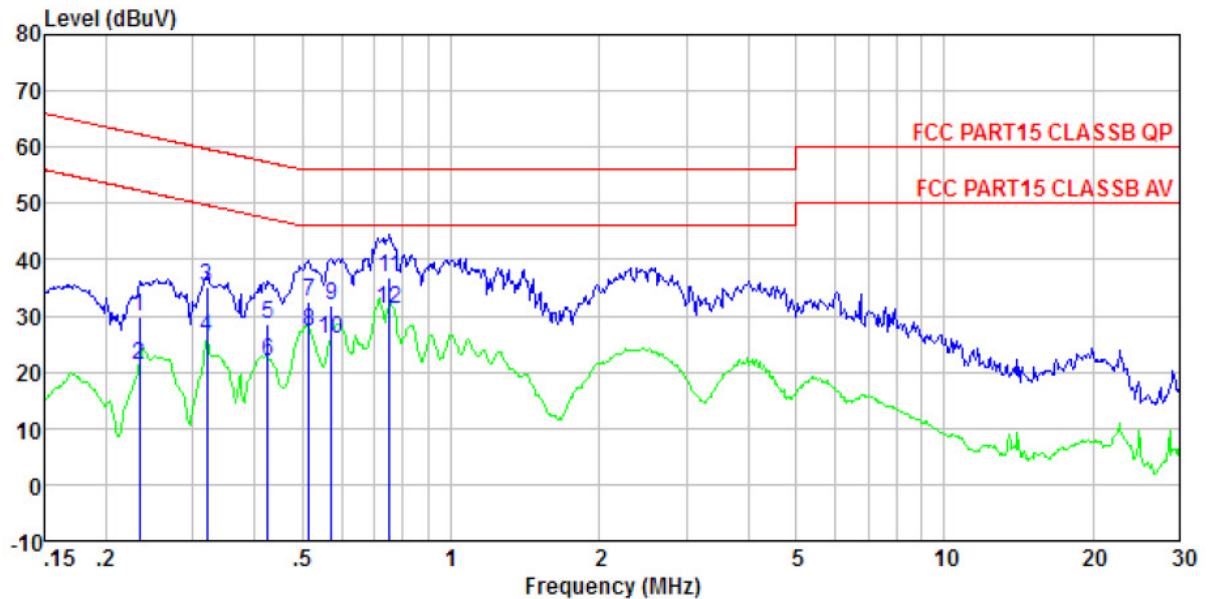


Site : Shielded room
 Condition : FCC PART15 CLASSB QP LISN-2016 NEUTRAL
 Job No. : GTS201612000078
 Test mode : Transmitting mode
 Test Engineer: Boy

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.234	29.21	0.42	0.12	29.75	62.30	-32.55	QP
2	0.234	20.62	0.42	0.12	21.16	52.30	-31.14	Average
3	0.320	34.59	0.42	0.10	35.11	59.71	-24.60	QP
4	0.320	25.66	0.42	0.10	26.18	49.71	-23.53	Average
5	0.426	28.10	0.38	0.11	28.59	57.33	-28.74	QP
6	0.426	21.55	0.38	0.11	22.04	47.33	-25.29	Average
7	0.516	32.09	0.34	0.11	32.54	56.00	-23.46	QP
8	0.516	26.66	0.34	0.11	27.11	46.00	-18.89	Average
9	0.573	31.40	0.29	0.12	31.81	56.00	-24.19	QP
10	0.573	25.45	0.29	0.12	25.86	46.00	-20.14	Average
11	0.751	36.37	0.24	0.13	36.74	56.00	-19.26	QP
12	0.751	30.93	0.24	0.13	31.30	46.00	-14.70	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

6.3 Conducted Peak Output Power

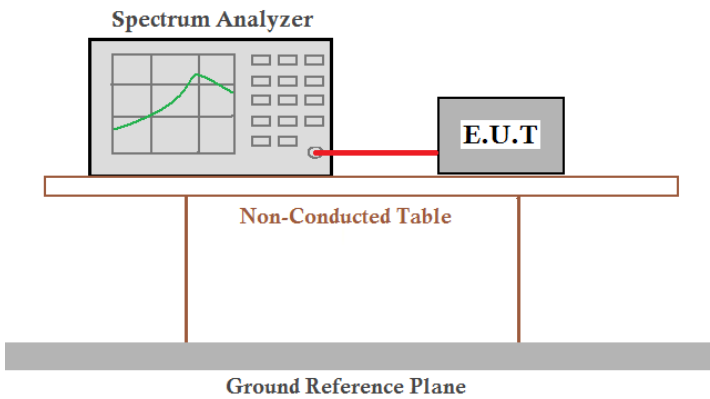Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	DA 00-705, ANSI C63.10:2013
Limit:	20.97dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Antenna 1:


Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	14.10	20.97	Pass
Middle	14.14		
Highest	13.62		

Antenna 2:


Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	13.41	20.97	Pass
Middle	14.10		
Highest	14.60		

Test plot as follows:


		Antenna:	Antenna 1
--	--	----------	-----------

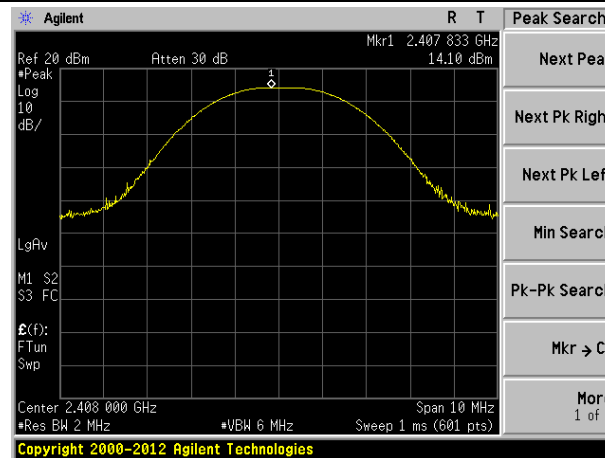

Lowest channel

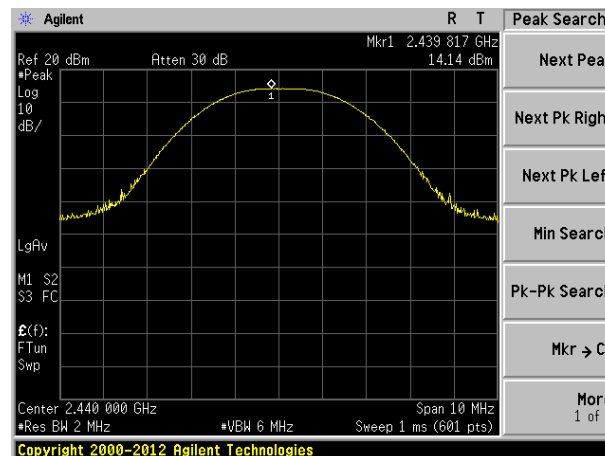


Middle channel

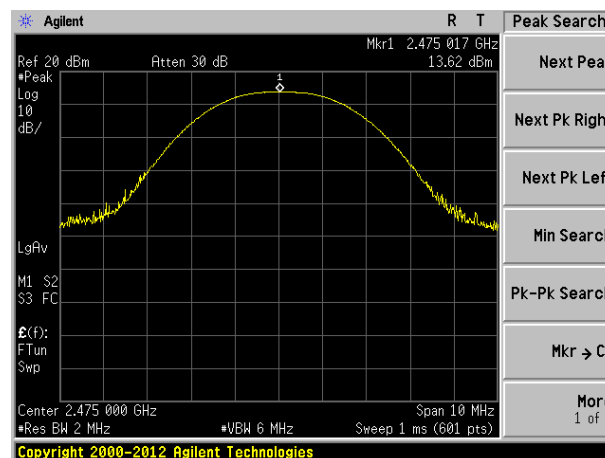


Highest channel


	Antenna:	Antenna 2
--	----------	-----------

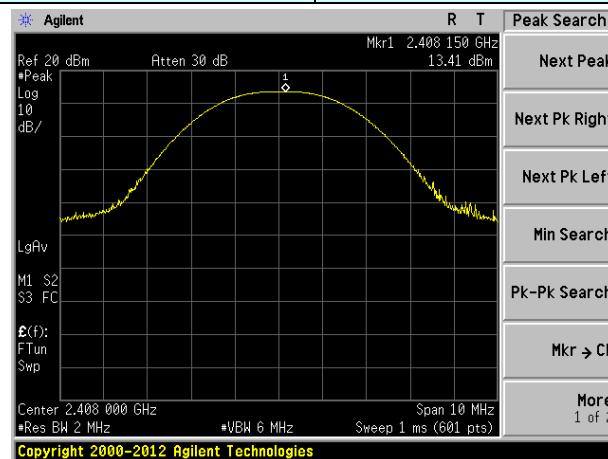

Lowest channel

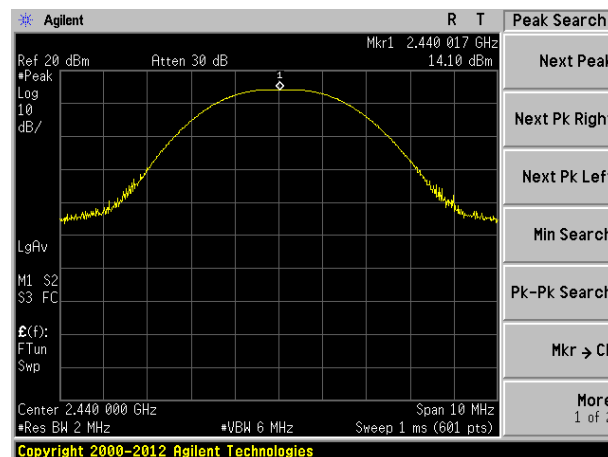


Middle channel

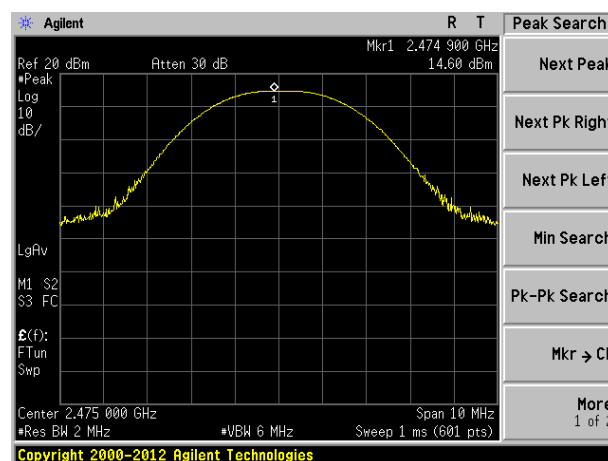

Highest channel

6.4 20dB Emission Bandwidth

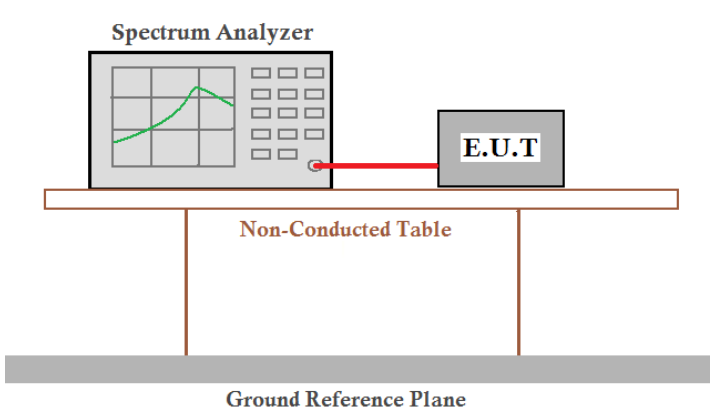Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	DA 00-705, ANSI C63.10:2013
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Antenna 1:


Test channel	20dB Emission Bandwidth (MHz)	Result
Lowest	1.050	Pass
Middle	1.051	
Highest	1.046	

Antenna 2:


Test channel	20dB Emission Bandwidth (MHz)	Result
Lowest	1.048	Pass
Middle	1.046	
Highest	1.049	

Test plot as follows:


		Antenna:	Antenna 1
--	--	----------	-----------

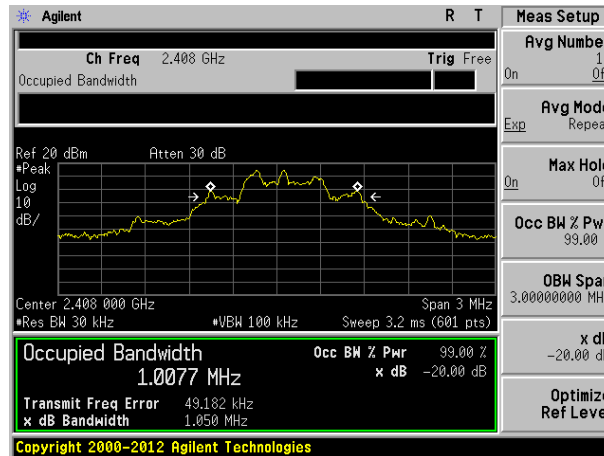

Lowest channel

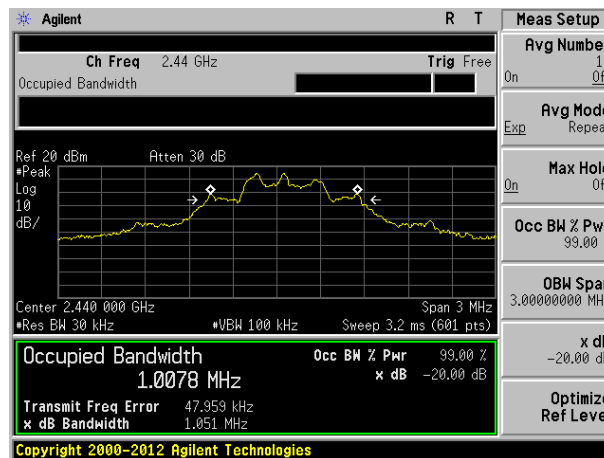

Middle channel

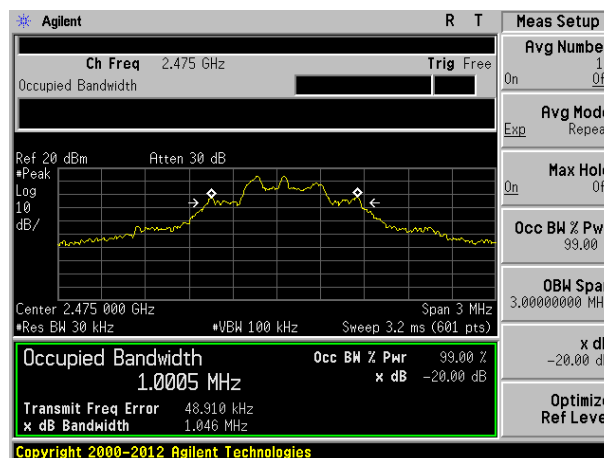


Highest channel


		Antenna:	Antenna 2
--	--	----------	-----------



Lowest channel

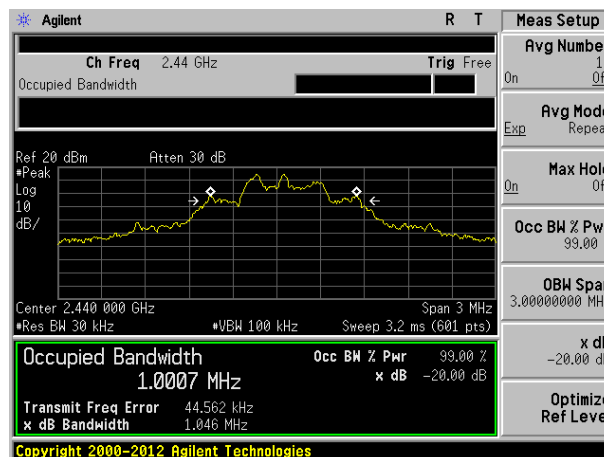


Middle channel

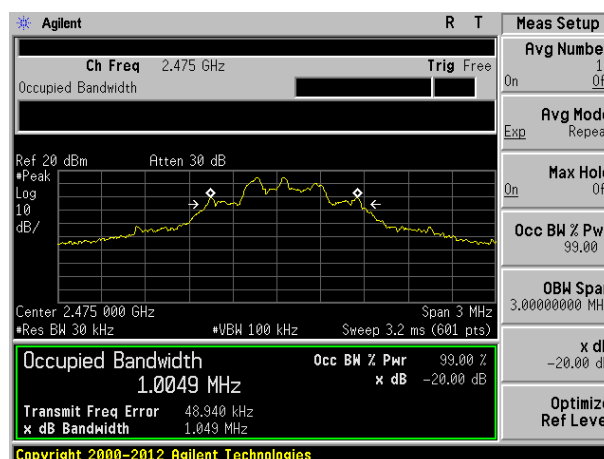

Highest channel

6.5 Carrier Frequencies Separation

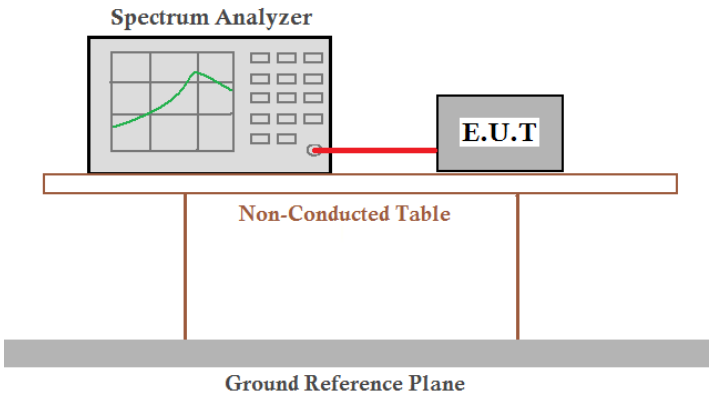Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	DA 00-705, ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a green trace on its screen, is connected to an E.U.T. (Equipment Under Test) by a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a table labeled 'Non-Conducted Table'. Below this table is a thick grey bar representing the 'Ground Reference Plane'.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Antenna 1:

Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	2008	701	Pass
Middle	2008	701	Pass
Highest	3008	701	Pass

Note: According to section 6.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1051	701

Antenna 2:


Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	2008	699	Pass
Middle	2008	699	Pass
Highest	3008	699	Pass

Note: According to section 6.4


Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1049	699

Test plot as follows:


	Antenna:	Antenna 1
--	----------	-----------

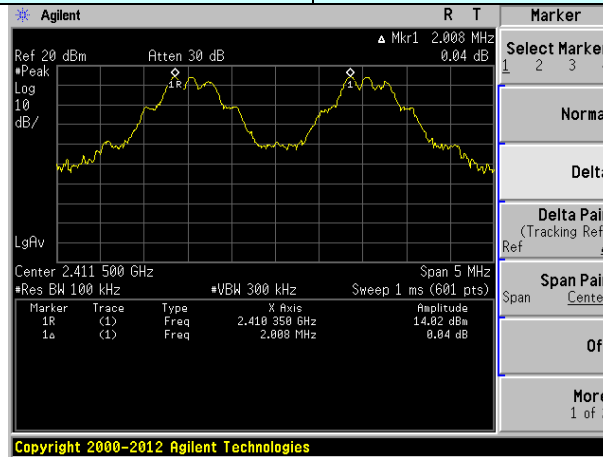

Lowest channel

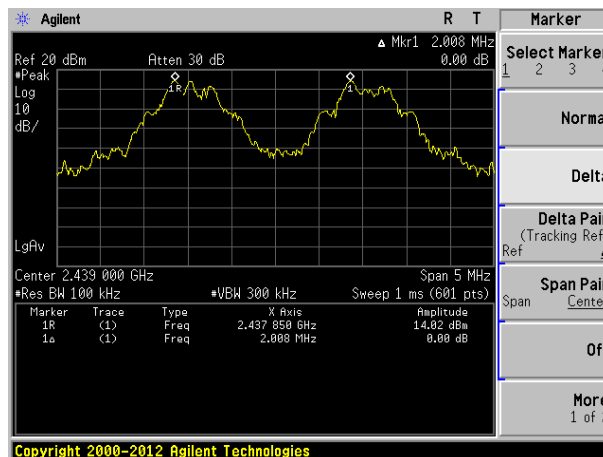


Middle channel

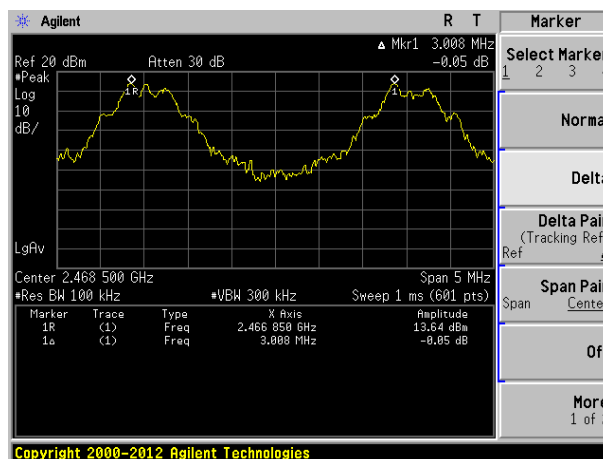


Highest channel


	Antenna:	Antenna 2
--	----------	-----------

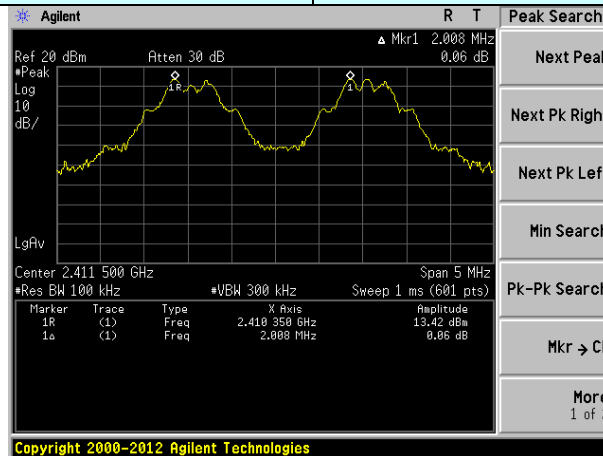

Lowest channel

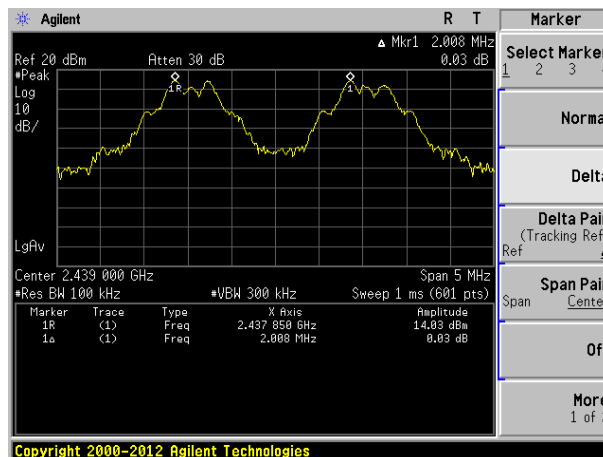


Middle channel

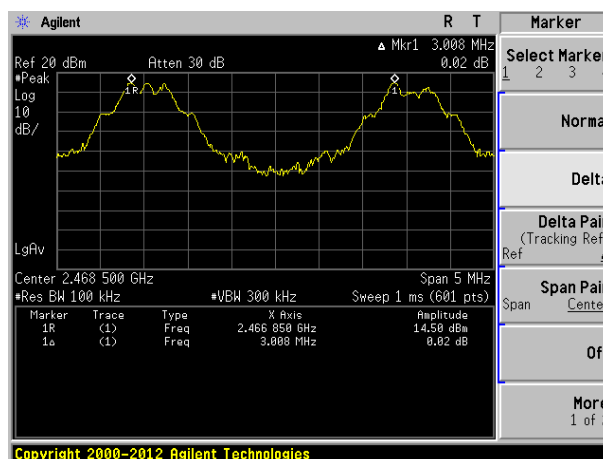

Highest channel


6.6 Hopping Channel Number

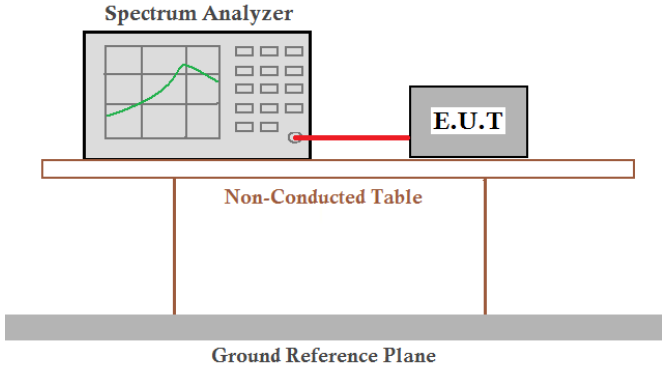Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	DA 00-705, ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data:


Antenna 1:

Hopping channel numbers	Limit	Result
16	15	Pass

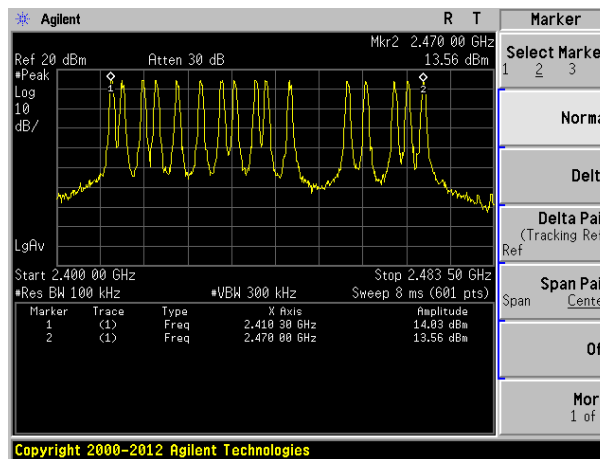


Antenna 2:

Hopping channel numbers	Limit	Result
16	15	Pass

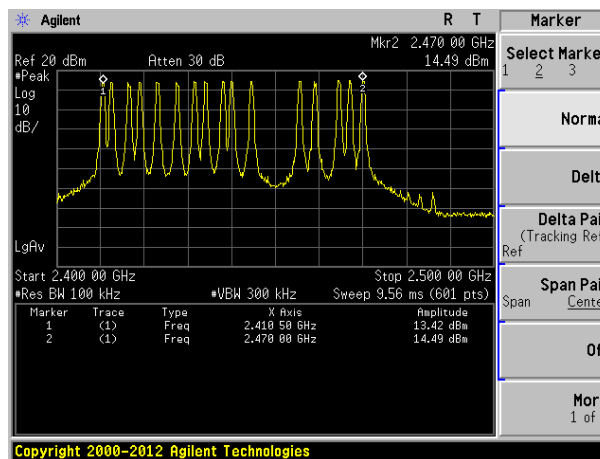

6.7 Dwell Time

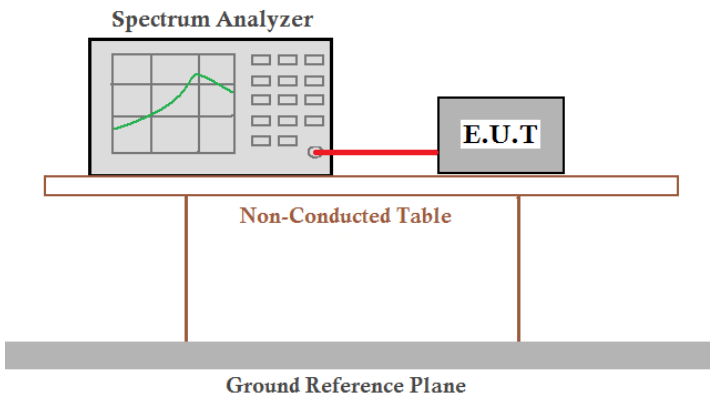Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	DA 00-705, ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data**Antenna 1:**

Frequency	Ton (ms)	Dwell time(ms)	Limit(ms)	Result
2.408GHz	1.300	66.56	400	Pass
2.440GHz	1.300	66.56	400	Pass
2.475GHz	1.292	66.15	400	Pass

The formula as below:

2408MHz: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=1.300ms*8*0.4*16=66.56ms

2440MHz: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=1.300ms*8*0.4*16=66.56ms

2475MHz: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=1.292ms*8*0.4*16=66.15ms

Antenna 2:

Frequency	Ton (ms)	Dwell time(ms)	Limit(ms)	Result
2.408GHz	1.300	66.56	400	Pass
2.440GHz	1.283	65.69	400	Pass
2.475GHz	1.283	65.69	400	Pass

The formula as below:


2408MHz: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=1.300ms*8*0.4*16=66.56ms

2440MHz: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=1.283ms*8*0.4*16=65.69ms


2475MHz: Dwell time = Ton * Ton times in 1s * 0.4s * channel numbers=1.283ms*8*0.4*16=65.69ms

Test plot as follows:

Frequency:	2408MHz	Antenna:	Antenna 1
------------	---------	----------	-----------

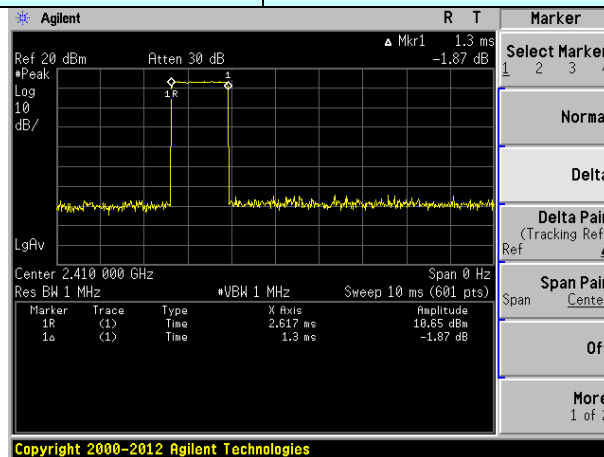


Ton

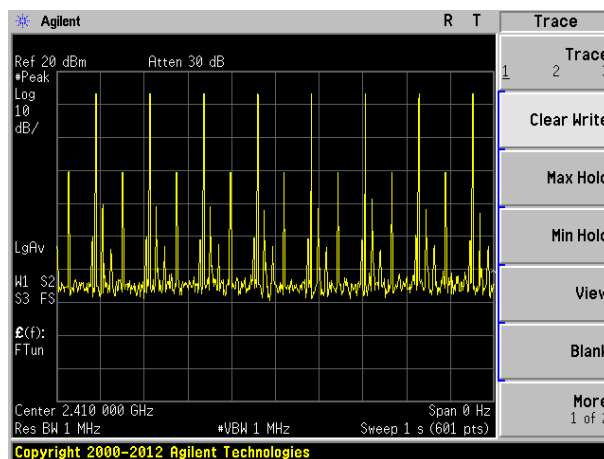


Ton times in 1s

Frequency:	2440MHz	Antenna:	Antenna 1
------------	---------	----------	-----------

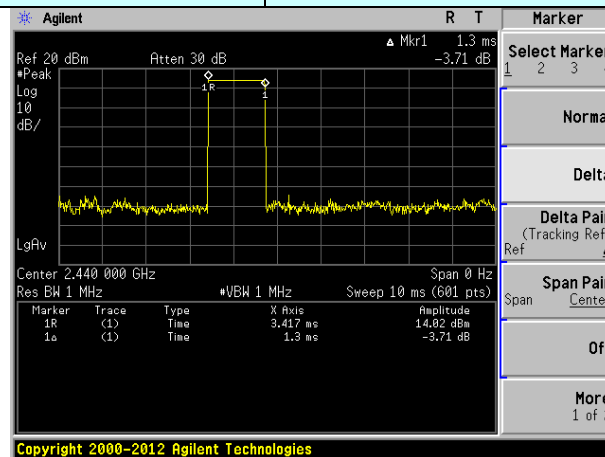


Ton

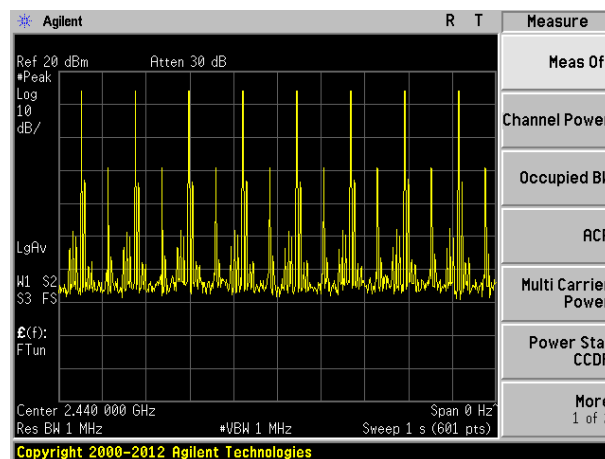


Ton times in 1s

Frequency:	2475MHz	Antenna:	Antenna 1
------------	---------	----------	-----------

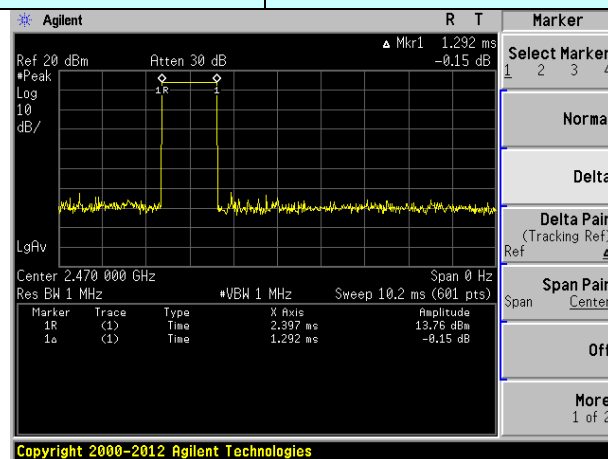


Ton

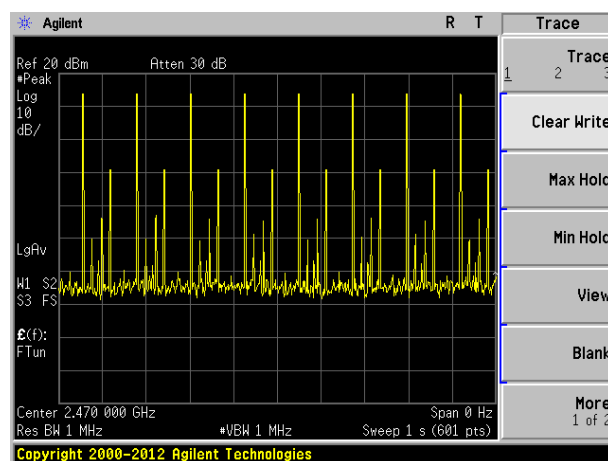


Ton times in 1s

Frequency:	2408MHz	Antenna:	Antenna 2
------------	---------	----------	-----------

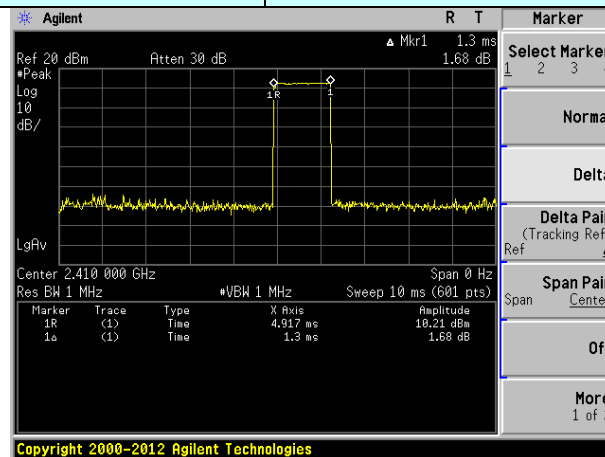


Ton

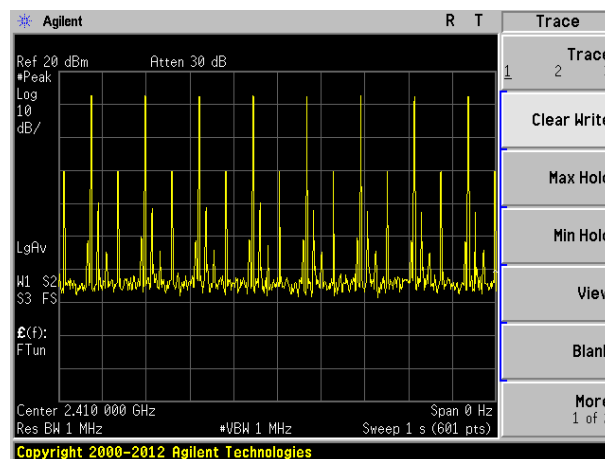


Ton times in 1s

Frequency:	2440MHz	Antenna:	Antenna 2
------------	---------	----------	-----------

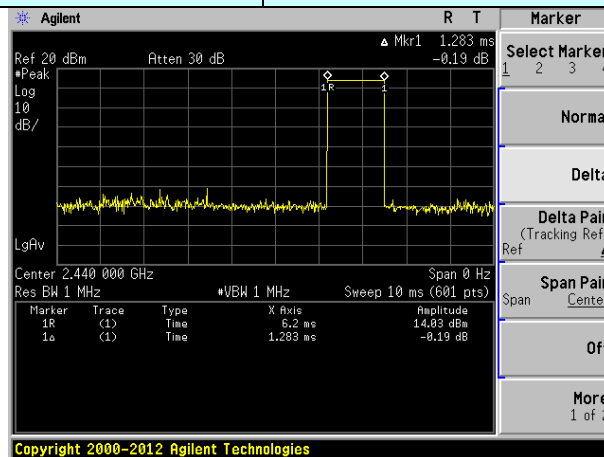


Ton

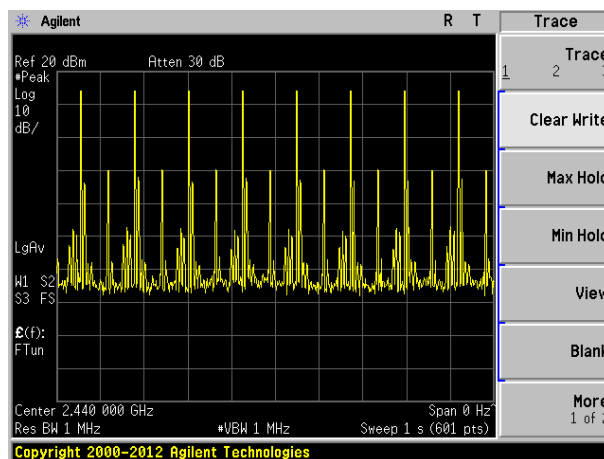


Ton times in 1s

Frequency:	2475MHz	Antenna:	Antenna 2
------------	---------	----------	-----------

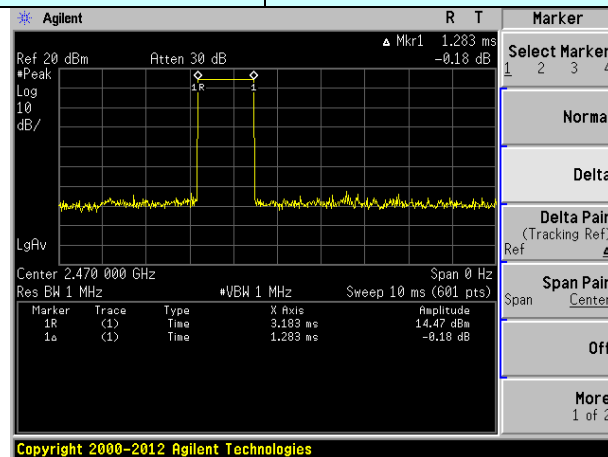

Ton

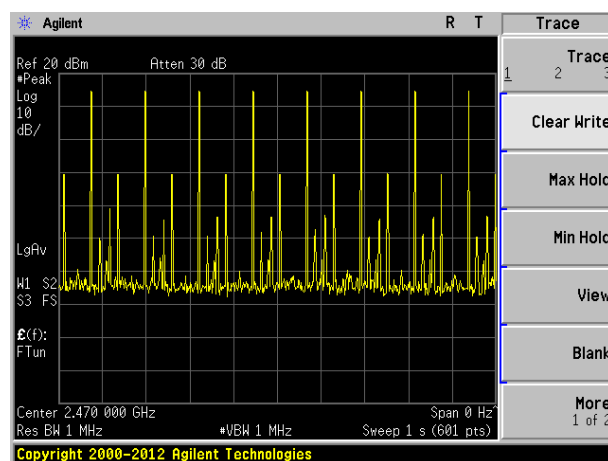


Ton times in 1s

6.8 Pseudorandom Frequency Hopping Sequence

Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
<i>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</i> <i>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</i>	
EUT Pseudorandom Frequency Hopping Sequence	
<i>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</i> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> <i>Each frequency used equally on the average by each transmitter.</i> <i>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</i>	


6.9 Band Edge

6.9.1 Conducted Emission Method

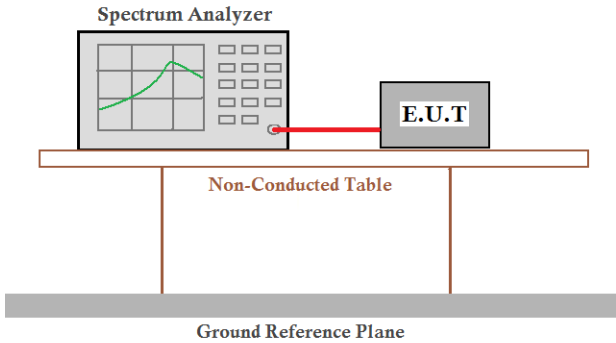Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	DA 00-705, ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Test plot as follows:

Antenna 1:

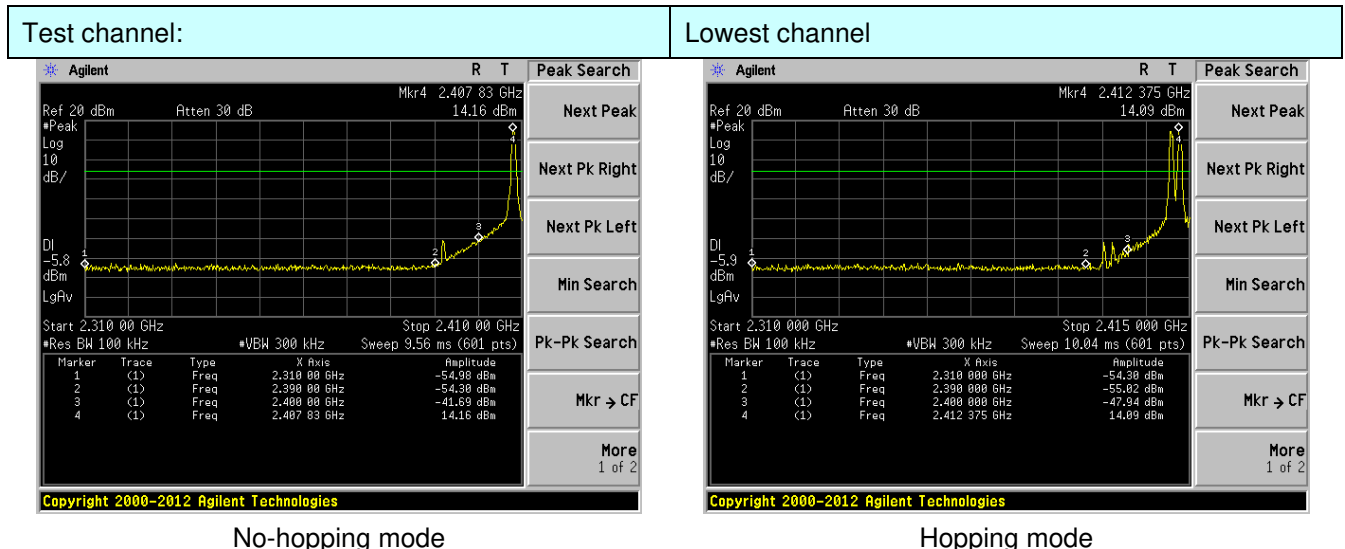

No-hopping mode


Hopping mode

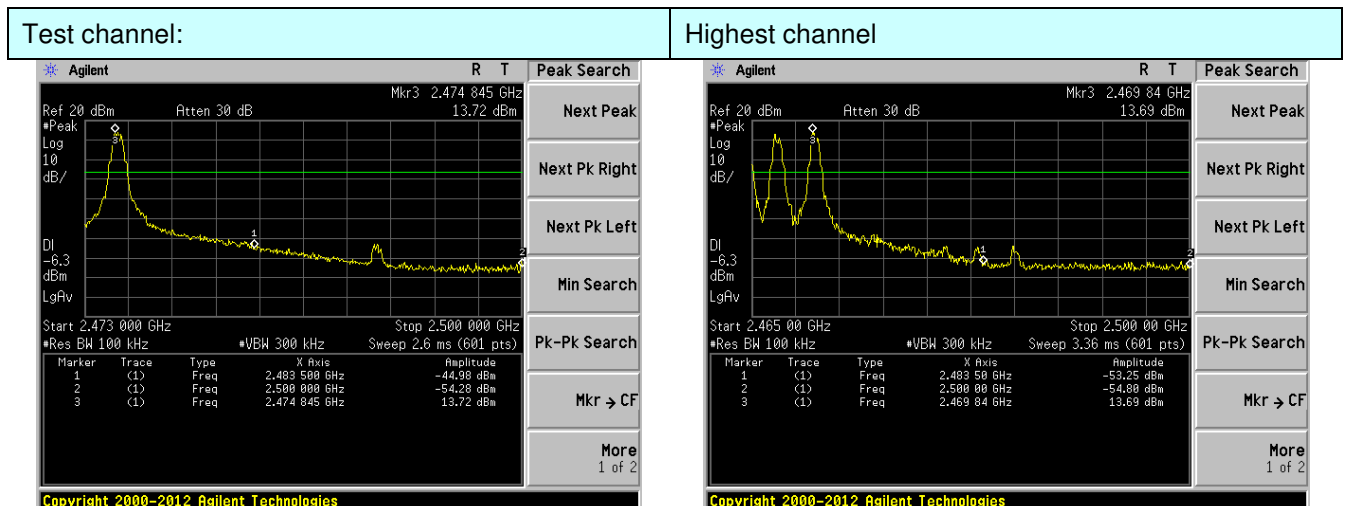

No-hopping mode


Hopping mode

Antenna 2:

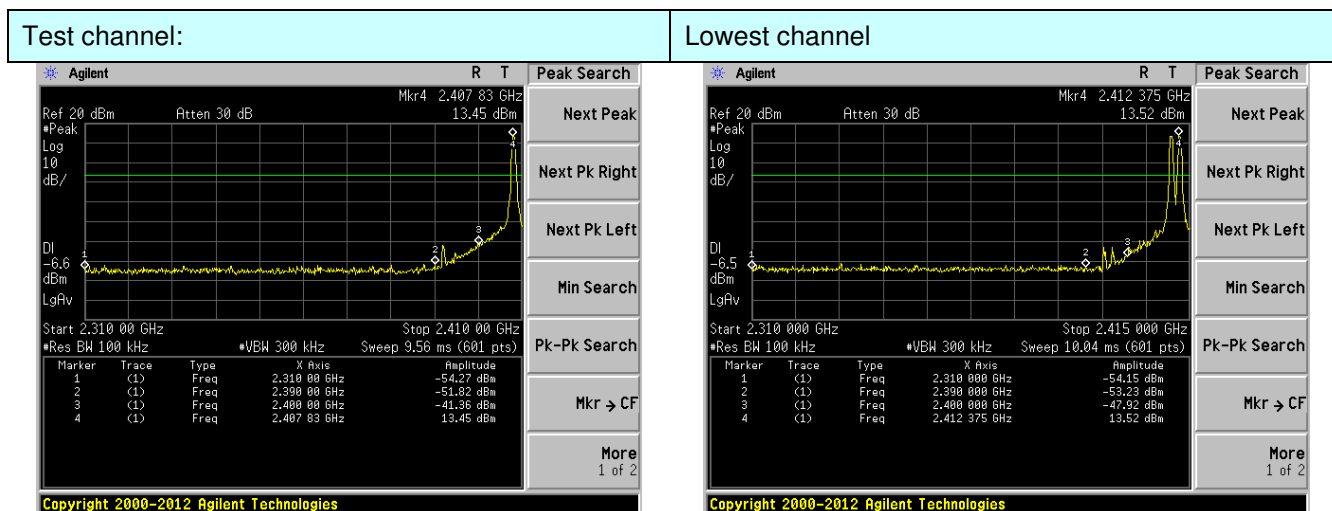

No-hopping mode


Hopping mode

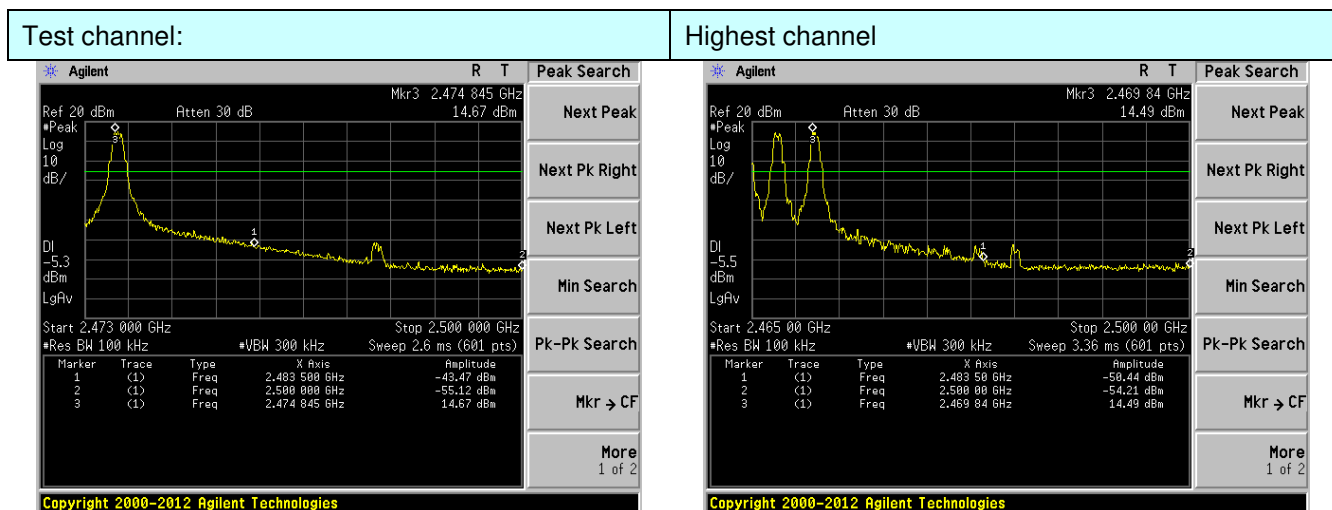

No-hopping mode

Hopping mode

6.9.2 Radiated Emission Method

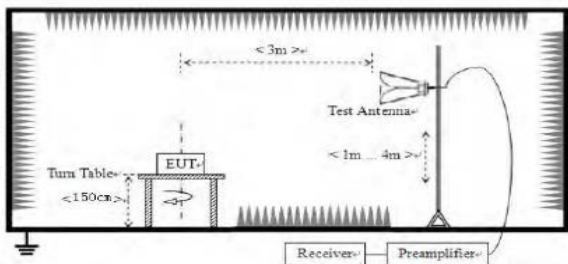Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All restriction band have been tested, and 2.3GHz to 2.5GHz band is the worse case				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test Instruments:	Refer to section 5.8 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Pass				

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
2. Two antenna were tested and found the antenna2 is worse. So only the data of antenna2 is reported.

Antenna 2:

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	52.74	27.59	5.38	30.18	55.53	74.00	-18.47	Vertical
2400.00	58.22	27.58	5.39	30.18	61.01	74.00	-12.99	Vertical
2390.00	55.38	27.59	5.38	30.18	58.17	74.00	-15.83	Horizontal
2400.00	58.44	27.58	5.39	30.18	61.23	74.00	-12.77	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	40.07	27.59	5.38	30.18	42.86	54.00	-11.14	Vertical
2400.00	40.78	27.58	5.39	30.18	43.57	54.00	-10.43	Vertical
2390.00	42.14	27.59	5.38	30.18	44.93	54.00	-9.07	Horizontal
2400.00	41.56	27.58	5.39	30.18	44.35	54.00	-9.65	Horizontal

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	59.12	27.53	5.47	29.93	62.19	74.00	-11.81	Vertical
2500.00	45.88	27.55	5.49	29.93	48.99	74.00	-25.01	Vertical
2483.50	57.10	27.53	5.47	29.93	60.17	74.00	-13.83	Horizontal
2500.00	46.71	27.55	5.49	29.93	49.82	74.00	-24.18	Horizontal

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	42.01	27.53	5.47	29.93	45.08	54.00	-8.92	Vertical
2500.00	34.55	27.55	5.49	29.93	37.66	54.00	-16.34	Vertical
2483.50	40.90	27.53	5.47	29.93	43.97	54.00	-10.03	Horizontal
2500.00	34.51	27.55	5.49	29.93	37.62	54.00	-16.38	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


6.10 Spurious Emission

6.10.1 Conducted Emission Method

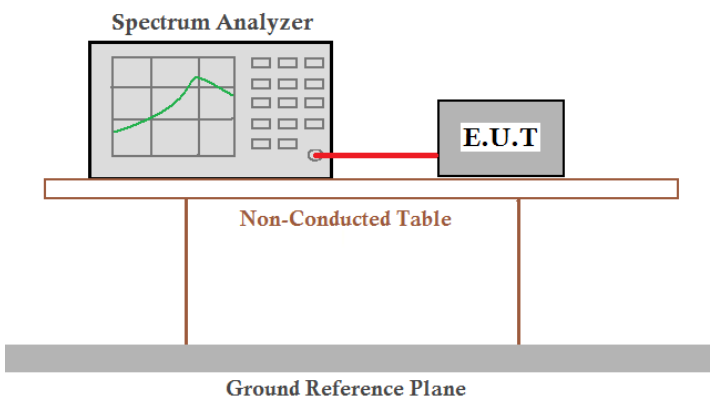Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Antenna 1:

Test channel:	Lowest channel
---------------	----------------

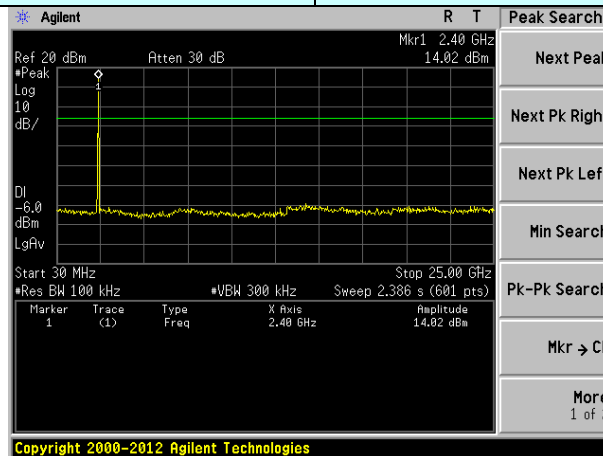


30MHz~25GHz

Test channel:	Middle channel
---------------	----------------

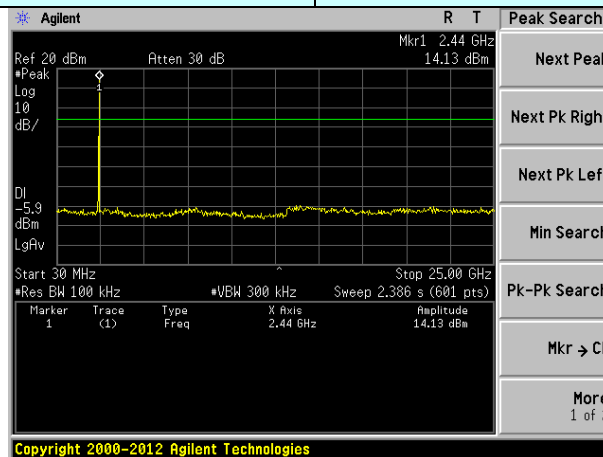

30MHz~25GHz


Test channel:	Highest channel
---------------	-----------------

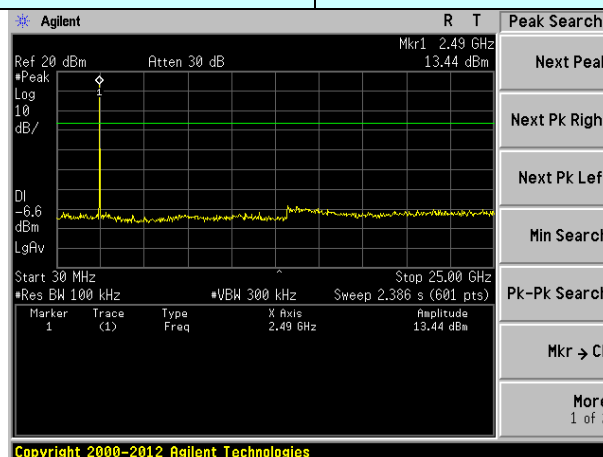

30MHz~25GHz


Antenna 2:

Test channel:	Lowest channel
---------------	----------------

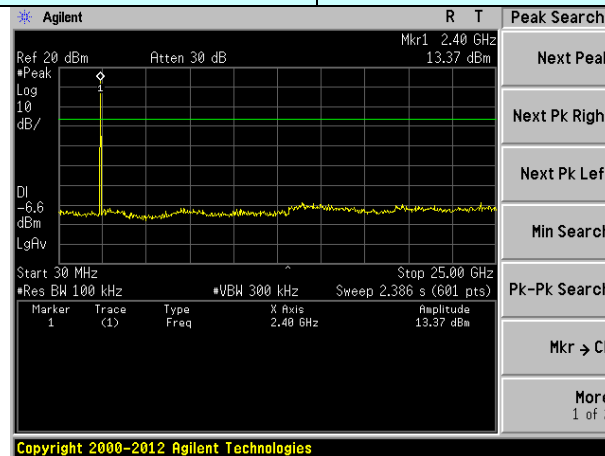


30MHz~25GHz

Test channel:	Middle channel
---------------	----------------

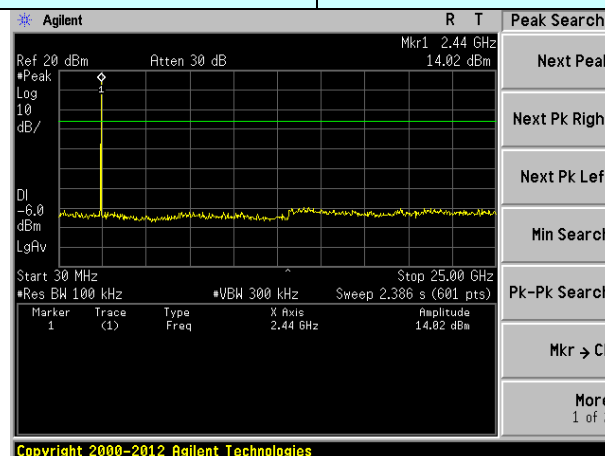


30MHz~25GHz


Test channel:	Highest channel
---------------	-----------------

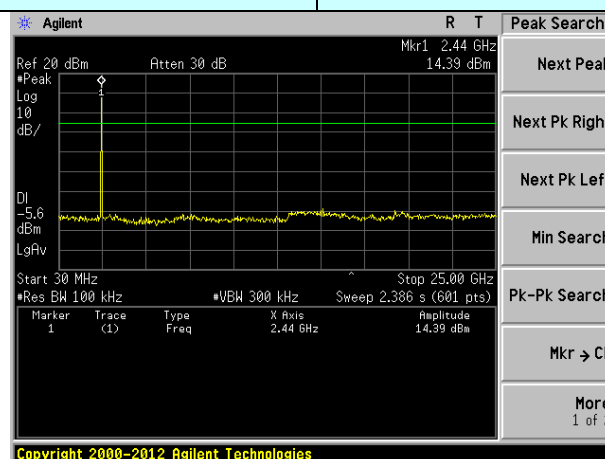

30MHz~25GHz

6.10.2 Radiated Emission Method

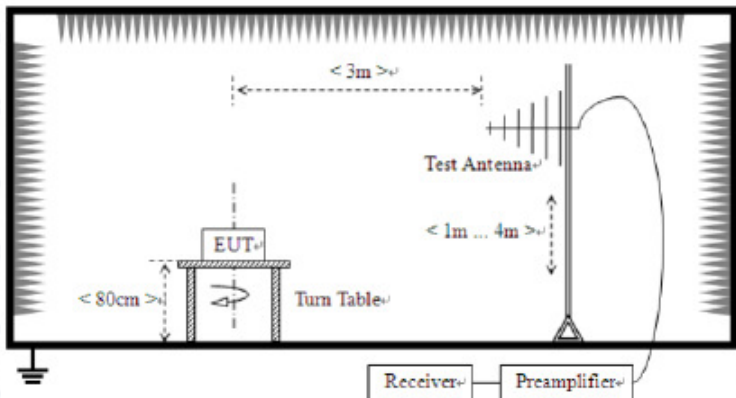Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-10KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	Below 1GHz				
					
	Above 1GHz				

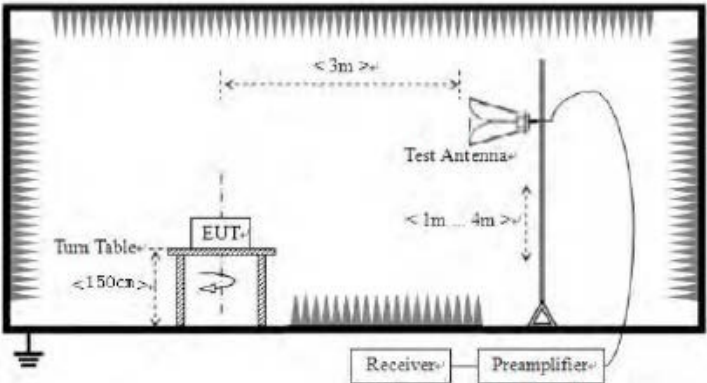	
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:


1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
2. The measured filed strength at frequencies below 30MHz are lower than the limit over 30dB. So the data isn't reported.
3. Two antenna were tested and found the antenna2 is worse. So only the data of antenna2 is reported.

Measurement data:

■ 30MHz ~ 1GHz

ANT 2:


Horizontal:

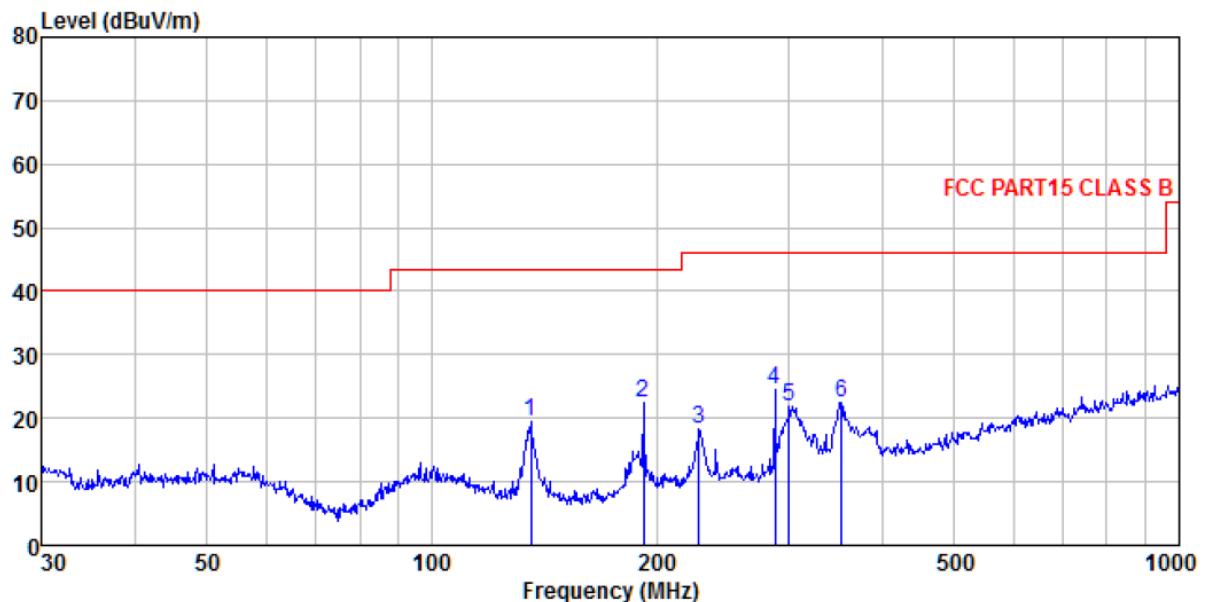

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m HORIZONTAL
 Job No. : GTS201612000078
 Test Mode : Transmitting mode
 Test Engineer: Sky

	Read	Antenna	Preamp	Cable	Limit	Over		
Freq	Level	Factor	Factor	Loss	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	135.506	36.90	10.51	29.48	1.47	19.40	43.50	-24.10 QP
2	191.745	37.28	12.56	29.23	1.80	22.41	43.50	-21.09 QP
3	227.691	32.22	13.51	29.46	2.01	18.28	46.00	-27.72 QP
4	287.990	37.30	14.84	29.92	2.31	24.53	46.00	-21.47 QP
5	300.367	34.54	15.06	29.99	2.36	21.97	46.00	-24.03 QP
6	352.943	33.28	16.33	29.72	2.64	22.53	46.00	-23.47 QP

Vertical:

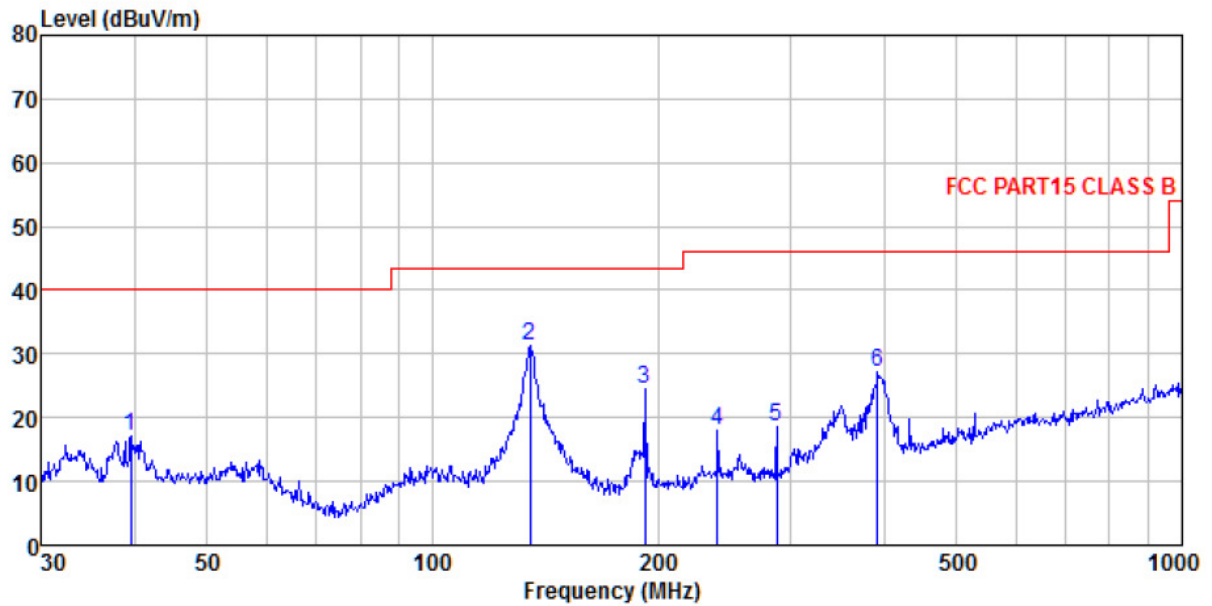

Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VERTICAL
Job No. : GTS201612000078
Test Mode : Transmitting mode
Test Engineer: Sky

	Read	Antenna	Preamp	Cable		Limit	Over	
Freq	Level	Factor	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	39.576	31.15	15.49	30.05	0.66	17.25	40.00	-22.75 QP
2	135.032	48.75	10.56	29.49	1.47	31.29	43.50	-12.21 QP
3	191.745	39.27	12.56	29.23	1.80	24.40	43.50	-19.10 QP
4	239.987	31.55	14.09	29.56	2.07	18.15	46.00	-27.85 QP
5	287.990	31.47	14.84	29.92	2.31	18.70	46.00	-27.30 QP
6	392.095	36.95	16.87	29.54	2.82	27.10	46.00	-18.90 QP

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4816.00	34.79	31.79	8.61	37.66	37.53	74.00	-36.47	Vertical
7224.00	27.05	36.19	11.66	35.69	39.21	74.00	-34.79	Vertical
9632.00	26.81	38.01	14.16	34.92	44.06	74.00	-29.94	Vertical
12040.00	*					74.00		Vertical
14448.00	*					74.00		Vertical
4816.00	38.78	31.79	8.61	37.66	41.52	74.00	-32.48	Horizontal
7224.00	27.03	36.19	11.66	35.69	39.19	74.00	-34.81	Horizontal
9632.00	26.15	38.01	14.16	34.92	43.40	74.00	-30.60	Horizontal
12040.00	*					74.00		Horizontal
14448.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4816.00	34.53	31.79	8.61	37.66	37.27	54.00	-16.73	Vertical
7224.00	26.22	36.19	11.66	35.69	38.38	54.00	-15.62	Vertical
9632.00	23.06	38.01	14.16	34.92	40.31	54.00	-13.69	Vertical
12040.00	*					54.00		Vertical
14448.00	*					54.00		Vertical
4816.00	36.52	31.79	8.61	37.66	39.26	54.00	-14.74	Horizontal
7224.00	26.19	36.19	11.66	35.69	38.35	54.00	-15.65	Horizontal
9632.00	23.39	38.01	14.16	34.92	40.64	54.00	-13.36	Horizontal
12040.00	*					54.00		Horizontal
14448.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880.00	32.67	31.85	8.66	37.68	35.50	74.00	32.67	Vertical
7320.00	27.80	36.37	11.72	35.64	40.25	74.00	27.80	Vertical
9760.00	27.56	38.35	14.25	34.98	45.18	74.00	27.56	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	33.60	31.85	8.66	37.68	36.43	74.00	33.60	Horizontal
7320.00	27.25	36.37	11.72	35.64	39.70	74.00	27.25	Horizontal
9760.00	26.18	38.35	14.25	34.98	43.80	74.00	26.18	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880.00	32.50	31.85	8.66	37.68	35.33	54.00	-18.67	Vertical
7320.00	26.25	36.37	11.72	35.64	38.70	54.00	-15.30	Vertical
9760.00	23.17	38.35	14.25	34.98	40.79	54.00	-13.21	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	31.43	31.85	8.66	37.68	34.26	54.00	-19.74	Horizontal
7320.00	27.70	36.37	11.72	35.64	40.15	54.00	-13.85	Horizontal
9760.00	22.79	38.35	14.25	34.98	40.41	54.00	-13.59	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4950.00	31.75	31.91	8.71	37.69	34.68	74.00	-39.32	Vertical
7425.00	27.52	36.56	11.79	35.59	40.28	74.00	-33.72	Vertical
9900.00	26.67	38.81	14.35	35.06	44.77	74.00	-29.23	Vertical
12375.00	*					74.00		Vertical
14850.00	*					74.00		Vertical
4950.00	31.06	31.91	8.71	37.69	33.99	74.00	-40.01	Horizontal
7425.00	27.47	36.56	11.79	35.59	40.23	74.00	-33.77	Horizontal
9900.00	26.85	38.81	14.35	35.06	44.95	74.00	-29.05	Horizontal
12375.00	*					74.00		Horizontal
14850.00	*					74.00		Horizontal

Average value:



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4950.00	31.25	31.91	8.71	37.69	35.93	54.00	-16.32	Vertical
7425.00	26.87	36.56	11.79	35.59	39.63	54.00	-14.37	Vertical
9900.00	22.54	38.81	14.35	35.06	40.64	54.00	-13.36	Vertical
12375.00	*					54.00		Vertical
14850.00	*					54.00		Vertical
4950.00	33.00	31.91	8.71	37.69	35.93	54.00	-18.07	Horizontal
7425.00	27.23	36.56	11.79	35.59	39.99	54.00	-14.01	Horizontal
9900.00	22.96	38.81	14.35	35.06	41.06	54.00	-12.94	Horizontal
12375.00	*					54.00		Horizontal
14850.00	*					54.00		Horizontal


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

7 Test Setup Photo

Radiated Emission

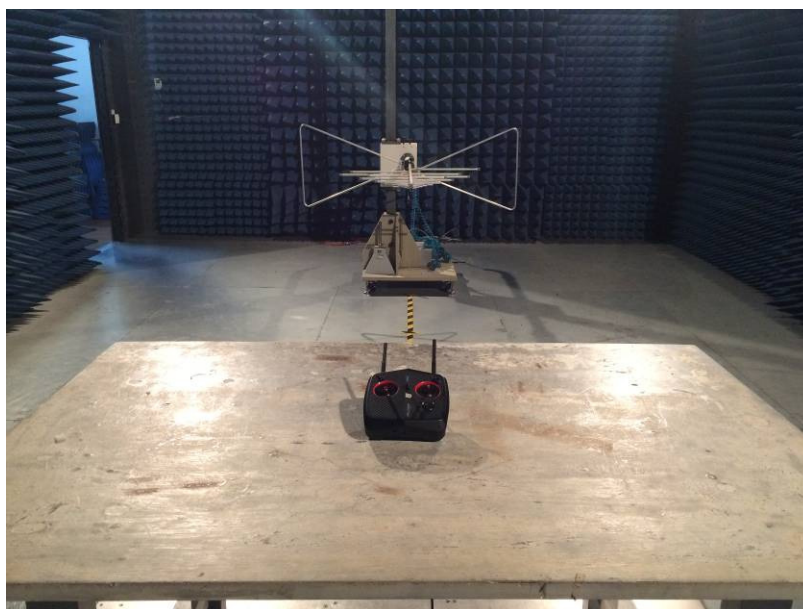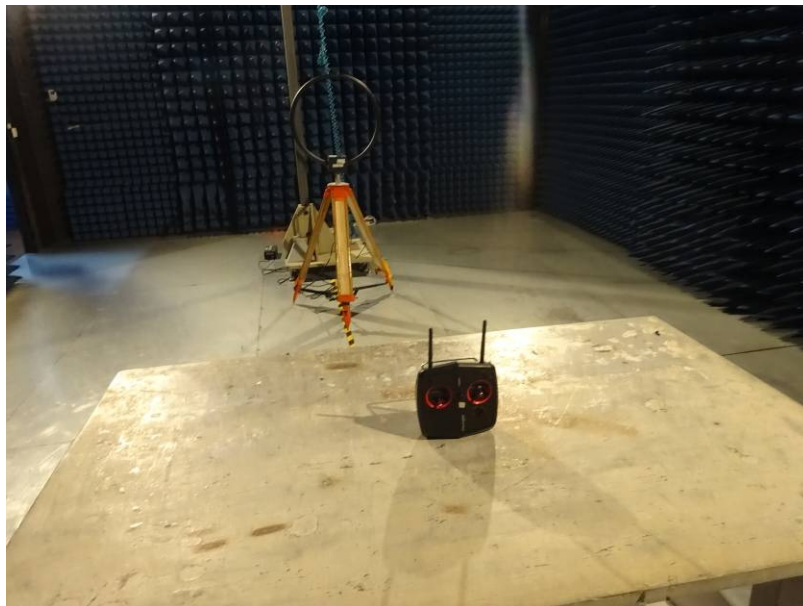

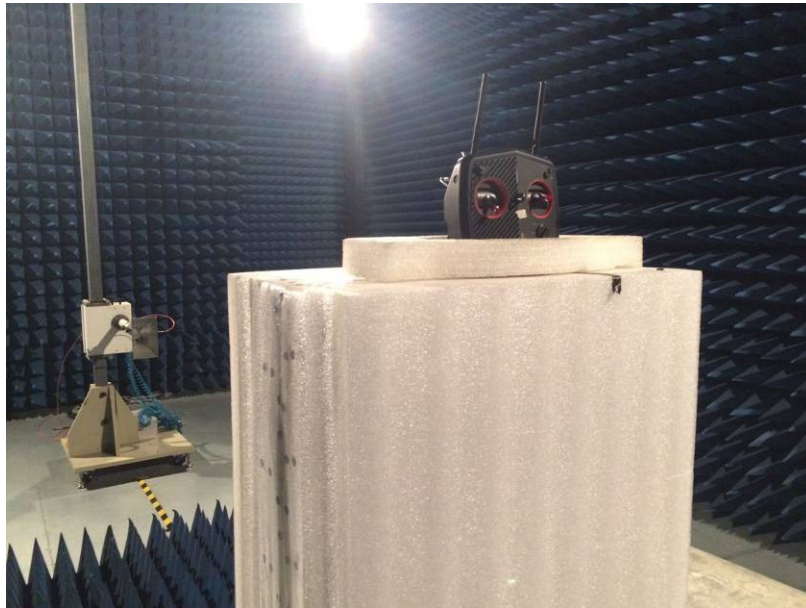

Conducted Emission




RF tests







8 EUT Constructional Details









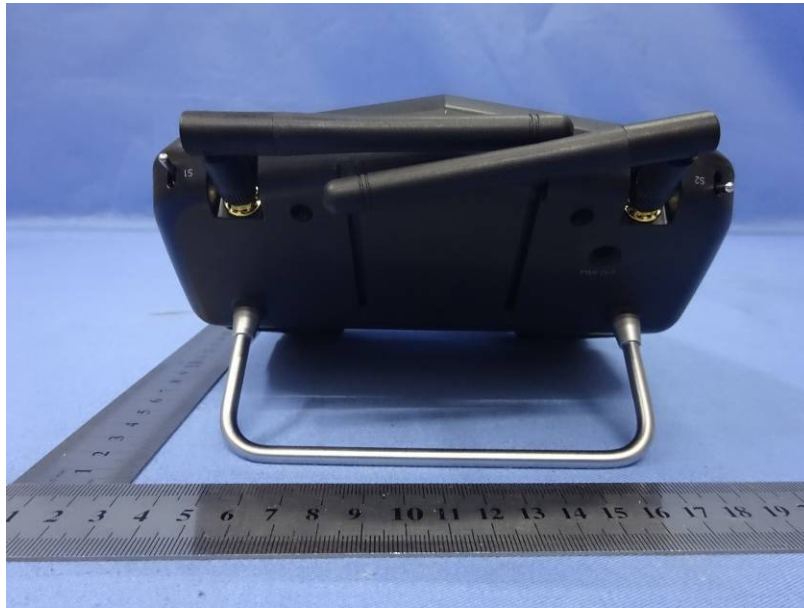


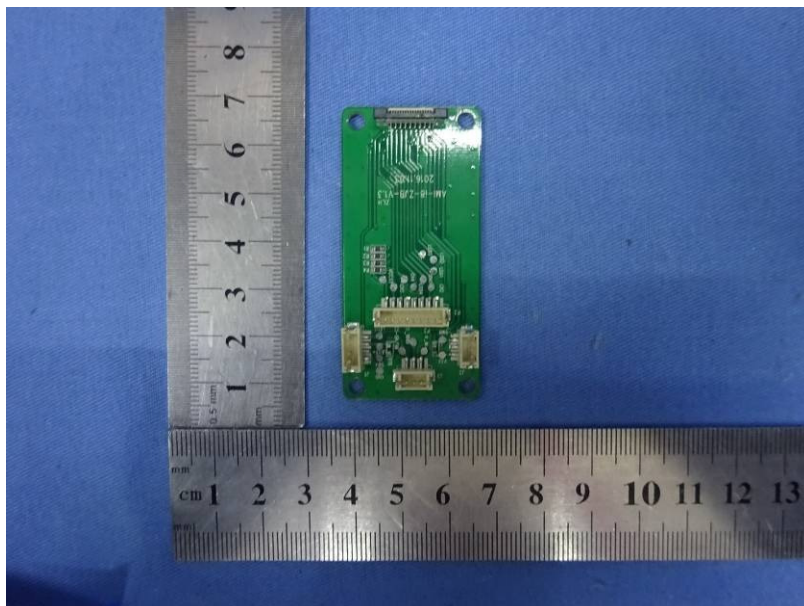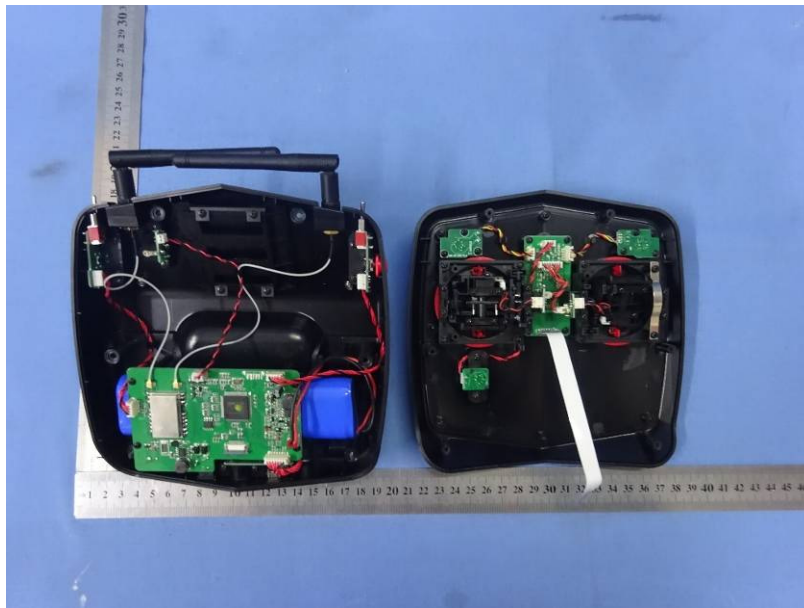

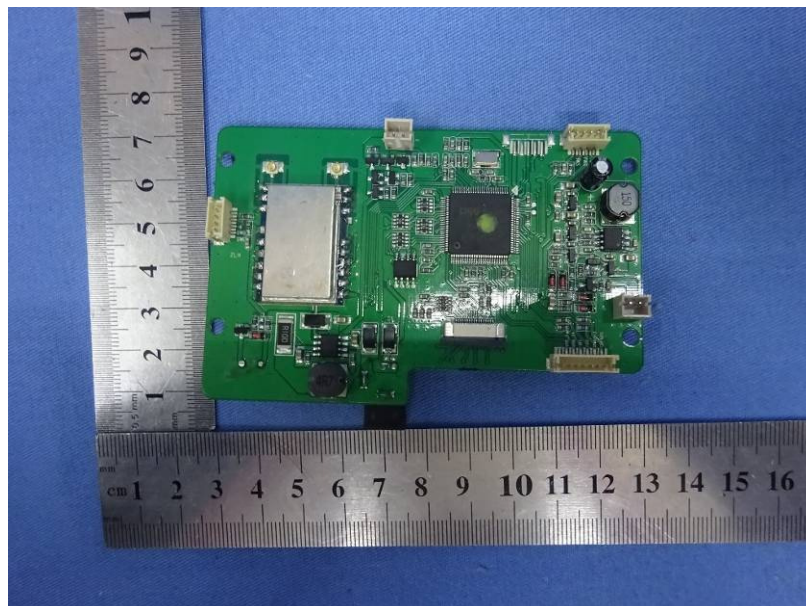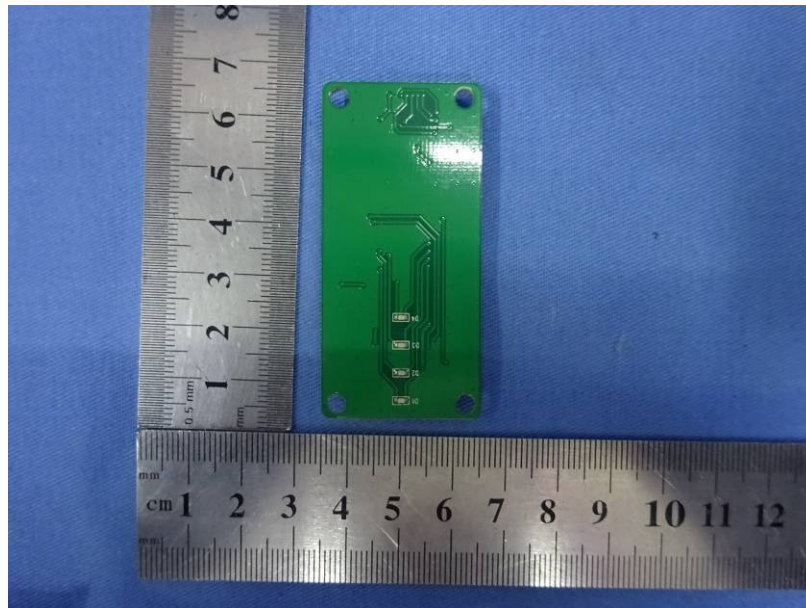

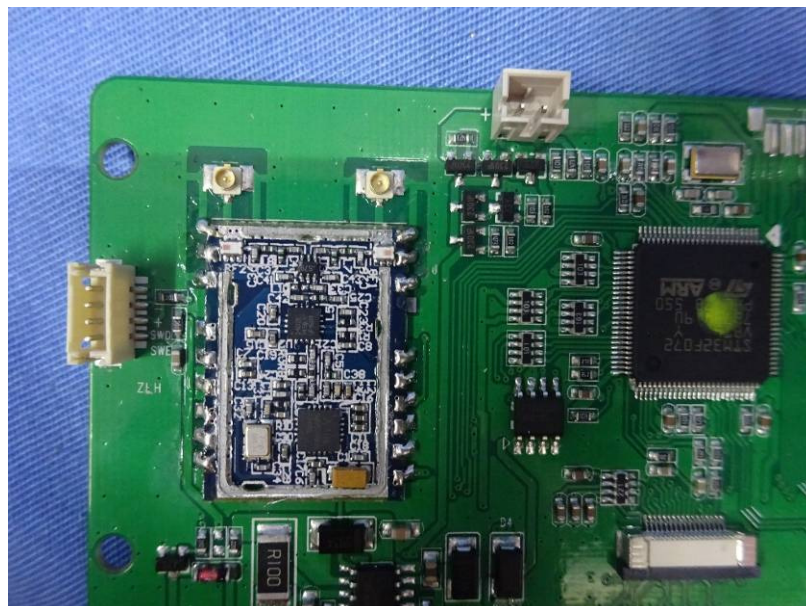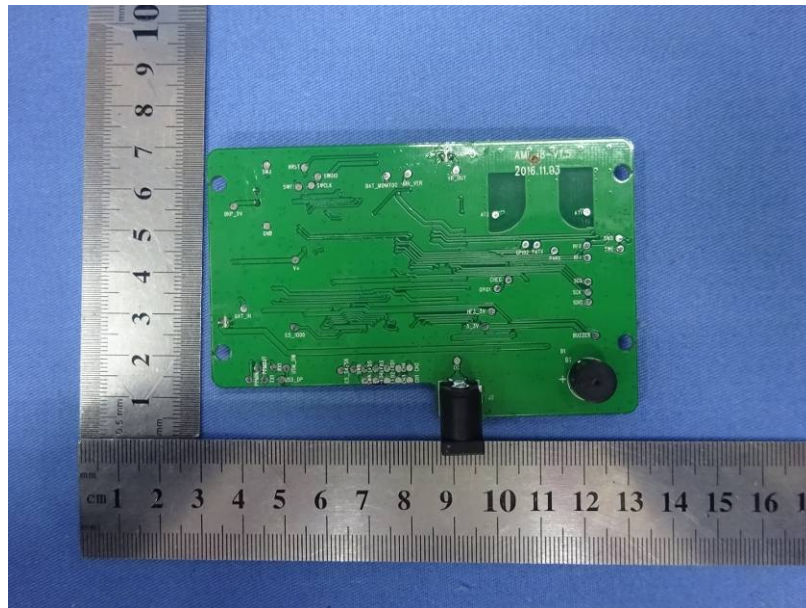

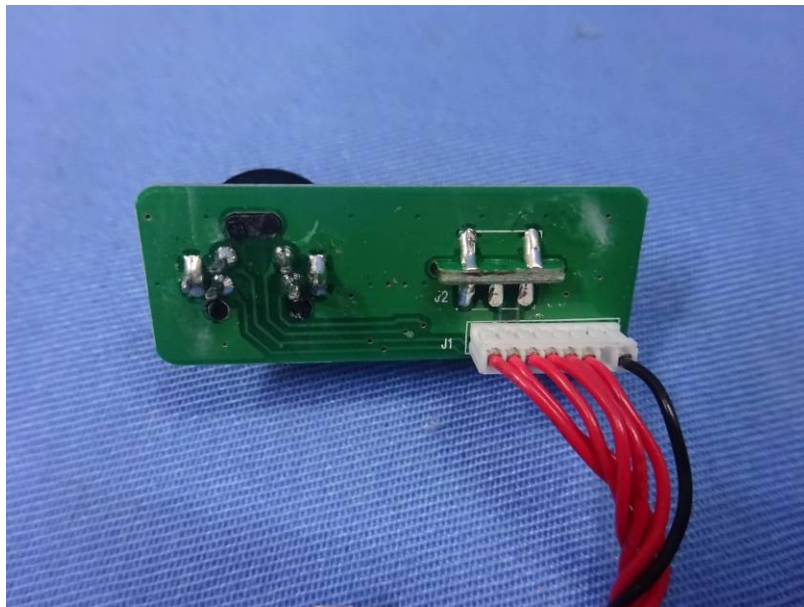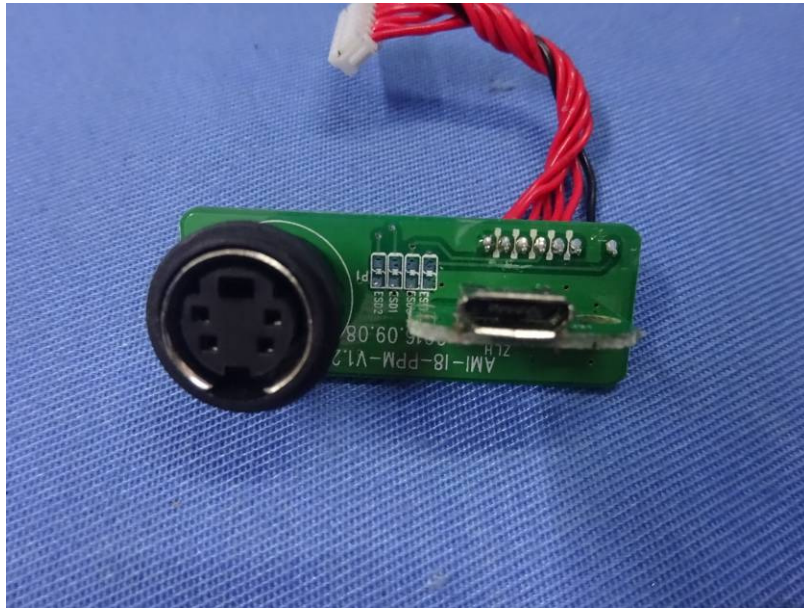

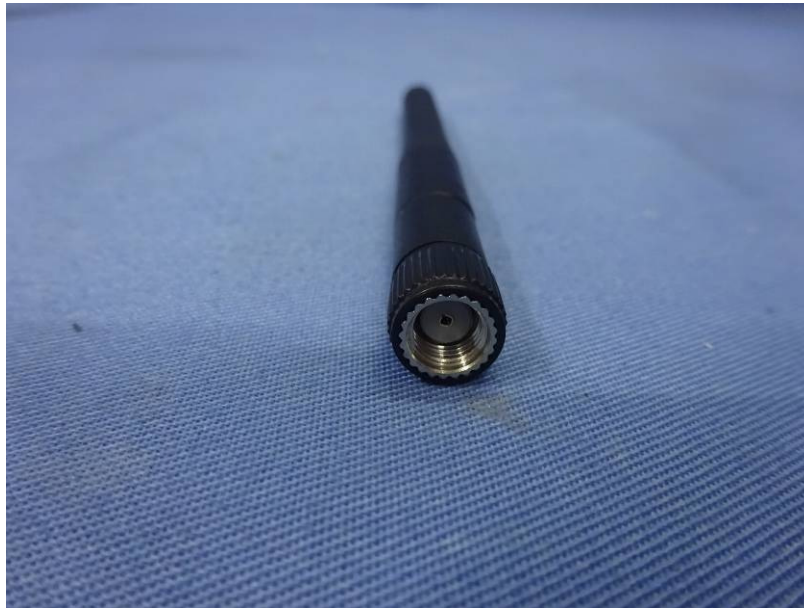

---End---