

Page: 1 of 29

FCC Test Report

Application No.: HKES131000263101

Applicant: GOODBETTERBEST LIMITED

Address: Suite 103 - 107, Devonshire Business Centre

Works Road, Letchworth, Herts, SG6 1GJ

United Kingdom

Product Information:

Product Description: Mono Bluetooth Headset

Model: EX3PS3

Product Class: Low Power Communication Device – Transmitter (2.4 GHz)

FCC ID: VS9EX3P31GS

Requirement: CFR 47 FCC PART 15 SUBPART C, 2012

- Intentional Radiators (Section 15.249)

Date of Receipt: 2013-10-18, 2013-11-14

Date of Test: 2013-10-28 to 2013-11-18

Date of Issue: 2013-11-20

Test Result : PASS*

* In the configuration tested, the EUT complied with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

Authorized Signature:

LOKE Sai Kit, Wilson Senior Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS IECC Limited or testing done by SGS IECC Limited in connection with, distribution or use of the product described in this report must be approved by SGS IECC Limited in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's object responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 2 of 29

2 Test Summary

Test	Test Requirement	Test Method	Result
Conducted Emission (150KHz to 30MHz)	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2003	PASS
Radiated Emission (9kMHz to 1GHz)	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2003	PASS
Radiated Emission above 1 GHz	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2003	PASS
Band edge / 20 dB Bandwidth	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2003 Marker-Detla measurement	PASS

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 3 of 29

3 Contents

		Page
1	COVER PAGE	1
2	TEST SUMMARY	
3	CONTENTS	3
4	GENERAL INFORMATION	4
	4.1 GENERAL DESCRIPTION OF EUT	4
	4.2 DETAILS OF EUT	4
	4.3 CONDITIONS OF EUT	4
	4.4 DESCRIPTION OF SUPPORT UNITS	4
	4.5 STANDARDS APPLICABLE FOR TESTING	
	4.6 Test Location	
	4.7 Test Facility	
	4.8 DEVIATION FROM STANDARDS	
	4.9 ABNORMALITIES FROM STANDARD CONDITIONS	
	4.10 DECLARATION OF FAMILY GROUPING	
	4.11 Abbreviations	5
5	EQUIPMENTS USED DURING TEST	6
Ŭ		
6	TEST RESULTS	8
	6.1 CONDUCTED EMISSIONS MAINS TERMINALS, 150kHz to 30MHz	
	6.1.1 EUT Operation	
	6.1.2 Test Setup and Procedure	
	6.1.3 Measurement Data	
	6.2 RADIATED EMISSIONS, 9KHZ TO1GHZ	
	6.2.1 EUT Operation	
	6.2.3 Measurement Data	
	6.2.3 Weasurement Data	
	6.3.1 EUT Operation	
	6.3.2 Test Setup and Procedure	
	6.3.3 Measurement Data	
	6.4 BAND EDGE / 20 DB BANDWIDTH	
7		
	7.1 CONDUCT EMISSION TEST SETUP	
	7.2 RADIATD EMISSION TEST SETUP	27
	7.3 EUT CONSTRUCTIONAL DETAILS	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 4 of 29

4 General Information

4.1 General Description of EUT

EUT Name: Mono Bluetooth Headset

Model: EX3PS3

Serial No.: --

4.2 Details of EUT

Power Supply: DC 3.7V (Rechargeable battery x 1)

DC 5V USB Power

Power Cable: 2 wires unscreened adaptor output cable

Operating Frequency 2402-2480MHz

Antenna Type: Integral antenna (14mm x 6mm)

Bluetooth version V2.1+EDR

Modulation Type: GFSK, Π/4-DQPSK and 8DPSK

4.3 Conditions of EUT

The received sample was under good condition.

4.4 Description of Support Units

Description	Manufacturer	Model No.	Serial No.		
Adaptor	SGS IECC	DYS052	N/A		
PS3	SGS IECC	CECH-2504A	03-27456822-6402829-CECH- 2504A		
Notebook	HP	Omnibook xt6200	OE116		
BT test board	SGS IECC	RF 02	RF 02		
Test software	Bluetooth test 3				

All field strength measures in this test report were done by the aid of test software which places the device in continuous transmission with 100% duty cycle under different package type and the test software above allowed to set the frequency fixed and hopping stopped.

When testing, the software about power grade (Ext, Int) setting is 255, 70 as worse case.

4.5 Standards Applicable for Testing

CFR 47, FCC Part 15, Oct 2012 ANSI C63.4:2003

4.6 Test Location

All tests were performed at:

SGS IECC Limited (Member of the SGS Group (SGS SA))

Units 303-305, 3/F., 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

FCC ID: VS9EX3P31GS



Page: 5 of 29

Tel: +852 2305 2570 Fax: +852 2756 4480

4.7 Test Facility

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules (FCC Registration No. : 97774).

The test facility is recognized, certified, or accredited by the following organizations:

FCC - CAB Registration No.: 446297

Measurement facility located at Fanling (Hong Kong), accredited as a Conformity Assessment Body (CAB) and was designated by FCC to perform compliance testing on equipment subject to Declaration Of Conformity (DOC) and Certification under Part 15 and 18 of the Commission's Rules.

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.

4.10 Declaration of Family Grouping

None.

4.11 Abbreviations

FCC ID: VS9EX3P31GS

N/A: Not Applicable

EUT: Equipment Under Test



Page: 6 of 29

5 Equipments Used during Test

Conducted Emission							
Equipment	Manufacturer	Model / Serial No.	Cal. Date	Cal. Due Date			
Test Receiver	Rohde & Schwarz	ESHS 30 / 839667/002	2012-11-19	2013-11-18			
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127 / 8127312	2013-04-17	2014-04-16			
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2 / 375881052	2013-01-21	2015-01-20			

Radiated Emission	Radiated Emission						
Equipment	Manufacturer	Model / Serial No.	Cal. Date	Cal. Due Date			
3m Semi-Anechoic Chamber (pre-test)							
3m / 10m Open Aera Test Site			2012-02-24	2015-02-23			
Test Receiver	Rohde & Schwarz	ESCS 30 / 100388	2013-10-23	2014-10-22			
Spectrum Analyzer	Rohde & Schwarz	FSP 30 / 101474	2013-08-08	2014-08-07			
Spectrum Analyzer 100Hz - 26.5GHz	Advantest	R3273 / 120301765	2013-07-11	2014-07-10			
Loop antenna	Rohde & Schwarz	HFH2-Z2	2012-10-11	2014-10-10			
Antenna 30-1000MHz	Schaffner	CBL6111C / 2791	2012-10-11	2014-10-10			
Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D / 9120D-1070	2012-11-13	2014-11-12			
Horn Antenna 15-26.5GHz	Schwarzbeck	BBHA9170 / 9170-492	2012-11-12	2014-11-11			
Preamplifier 10MHz – 6GHz	Schwarzbeck	BBV9743 / 9743-052	2012-11-13	2014-11-12			
Preamplifier 1-18GHz	Schwarzbeck	BBV9718 / 9718-223	2012-11-13	2014-11-12			
Preamplifier 18- 26.5GHz	Schwarzbeck	BBV9719 / 9719-019	2012-11-13	2014-11-12			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: HKES131000263101 Page: 7 of 29

Coaxial Cable	Coaxial Cable E167		2013-06-28	2014-06-27
RF Cable	HUBER+SUHNER	E207	2012-11-14	2014-11-13
Antenna Mast System	Schwarzbeck	AM9104 / -		
Turntable with Controller	Drehtisch	DT312 / -		

General Use Equipment						
Equipment	Manufacturer	Model / Serial No.	Cal. Date	Cal. Due Date		
Digital Multimeter	Fluke	189 / 83640020	2013-04-10	2014-04-09		
Temperature / Humidity meter	-	E159	2013-11-05	2014-11-04		



Page: 8 of 29

6 Test Results

6.1 Conducted Emissions Mains Terminals, 150kHz to 30MHz

Test Requirement: FCC Part15 B
Test Method: ANSI C63.4
Test Date: 2013-10-28

Frequency Range: 150kHz to 30MHz

Class / Severity: Class B

Detector: Peak for pre-scan (9kHz Resolution Bandwidth)

Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit

Limit:

Frequency range MHz	Class B Limits dB (μV)		
***************************************	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	

Note:

- The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.
- 2) The lower limit is applicable at the transition frequency.

6.1.1 EUT Operation

Operating Environment:

Temperature: 21 °C Humidity: 55% RH

EUT Operation:

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.


Remark: BT communication more is worst case and report it.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document on the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 9 of 29

6.1.2 Test Setup and Procedure

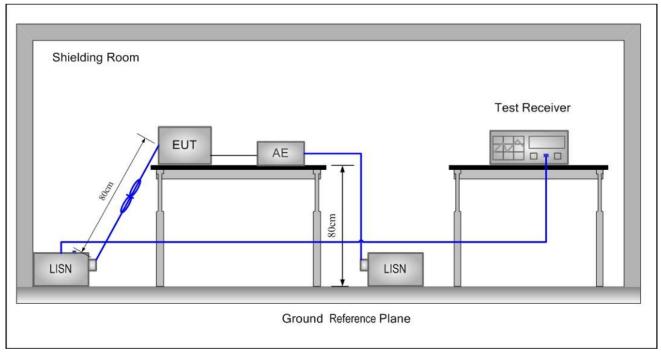

- The mains terminal conducted emission test was conducted in a shielded room.
- 2. The EUT was connected to AC power source through a LISN (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu H + 5\Omega$ linear impedance. For Load terminal voltage measurement, a voltage probe was used on the load terminals. Measurement at control terminals were carried out by means of an impedance stabilization network (ISN). The ISN was bounded to ground.
- 3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
- 4. The EUT kept a distance of at least 0.8m from any other earthed conducting surface. The Artificial Mains Network was situated at a distance of 0.8m from the EUT. The mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 10 of 29

6.1.3 Measurement Data

Live Line:

Quasi-peak measurement:

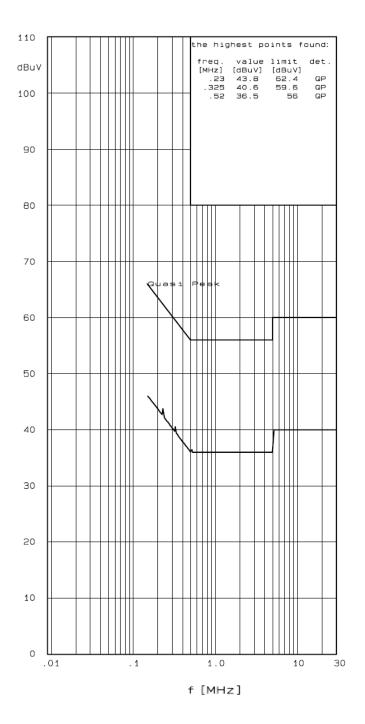


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 11 of 29

Live Line:

Average measurement:

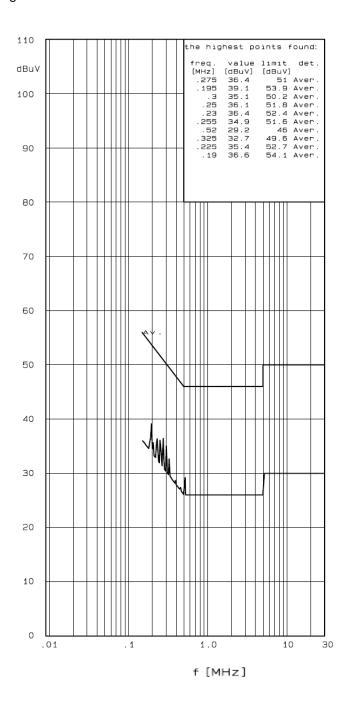

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 12 of 29

Neutral Line:

Live Line:

Quasi-peak measurement:

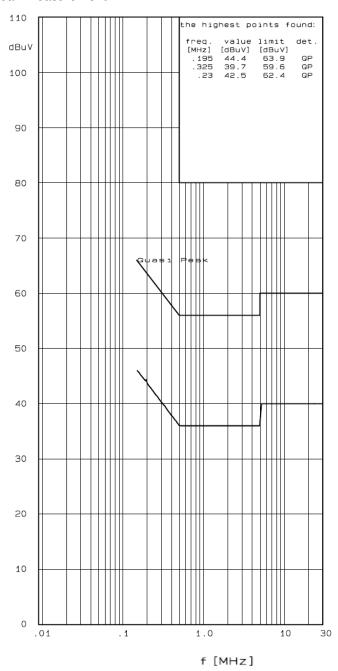

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 13 of 29

Neutral Line:

Live Line:

Average measurement:

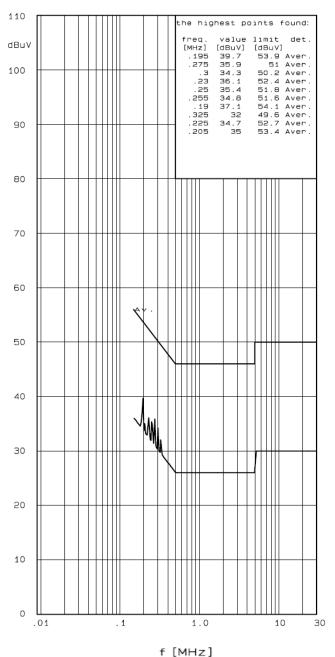

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 14 of 29

6.2 Radiated Emissions, 9kHz to1GHz

Test Requirement: FCC Part15 Subpart C Section 15.209 and 15.249(d)

Test Method: ANSI C63.4:2003

Test Date: 2013-11-18
Frequency Range: 9kHz – 1GHz

Measurement Distance: 3m

Detector: For PK value:

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz

 $VBW \ge RBW$ Sweep = auto

Detector function = peak

Trace = max hold For AV value:

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz

VBW =10 Hz Sweep = auto

Detector function = peak

Trace = max hold

Limit:

Frequency range MHz	Quasi-peak limits dB (μV/m)
0.009 - 0.490	-72.4 – 20logF(MHz)
0.490 - 1.705	-12.4 – 20logF(MHz)
1.705 – 30.0	-10.5
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

Note:

- 1) At transitional frequencies the lower limit applies.
- 2) F is the frequency of the spurious emission measured in MHz.
- 3) Limit from 0.009 30 MHz is converted from measuring distance 300m or 30m to 3m with the formulat provided in FCC Part 15, section 15.31(f)(2)
- 4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

6.2.1 EUT Operation

Operating Environment:

Temperature: 22 °C Humidity: 54%

EUT Operation: Pre-test with Peak detector with the following mode(s):

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Clent's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

FCC ID: VS9EX3P31GS



15 of 29 Page:

1: Transmission with GFSK

2: Transmimssion with $\Pi/4$ -DQPSK;

3: Transmission with 8DPSK;

Final test with Quasi-Peak detector with the following mode(s):


1: Transmission with GFSK and in continuous transmission with 100% duty cycle mode

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 16 of 29

6.2.2 Test Setup and Procedure

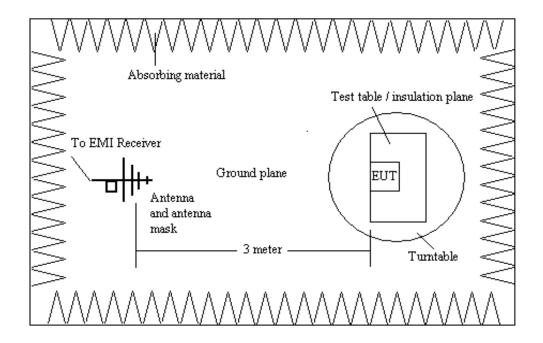

- 1. The pre-test of the radiated emissions test was conducted in a semi-anechoic chamber and the final measurement was conducted in the open area test site.
- 2. The EUT was connected to AC power source through a mains power outlet which was bonded to the ground reference plane. The EUT was placed upon a non-metallic table 0.8m above the ground reference plane.
- 3. Loop antennat and Bilog antenna was used for the frequency range from the lowest generated frequency to 30MHz and 30MHz to 1GHz respectively
- 4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT with located frequencies.
- 5. The actual frequencies of maximum emission were confirmed in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters for Bilog antenna (Loop antenna is still maintain in 1m hight) in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 17 of 29

6.2.3 Measurement Data

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured by Bilog antenna with 2 orthogonal polarities and frequencies of peak emissions from the EUT were detected within 6dB of the limit line. Final measurement was conducted in the open area test site with data as follows:

Test results:

(1) Operation Frequency: 2402.0 MHz

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)
30.000	V	19.4	2.6	22.0	40.0	-18.0
100.000	V	9.9	4.7	14.6	43.5	-28.9
200.000	V	9.5	4.4	13.9	43.5	-29.6
300.000	V	14.1	4.1	18.2	46.0	-27.8
500.000	V	18.2	4.7	22.9	46.0	-23.1
800.000	V	21.7	2.9	24.6	46.0	-21.4

(2) Operation Frequency: 2441.0 MHz

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)
30.000	V	19.4	2.6	22.0	40.0	-18.0
100.000	V	9.9	4.4	14.3	43.5	-29.2
200.000	V	9.5	4.3	13.8	43.5	-29.7
300.000	V	14.1	4.5	18.6	46.0	-27.4
500.000	V	18.2	5.0	23.2	46.0	-22.8
800.000	V	21.7	2.7	24.4	46.0	-21.6

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 18 of 29

(3) Operation Frequency: 2480.0 MHz

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)
30.000	V	19.4	2.6	22.0	40.0	-18.0
100.000	V	9.9	4.6	14.5	43.5	-29.0
200.000	V	9.5	4.0	13.5	43.5	-30.0
300.000	V	14.1	4.4	18.5	46.0	-27.5
500.000	V	18.2	4.8	23.0	46.0	-23.0
800.000	V	21.7	2.8	24.5	46.0	-21.5

Note:

FCC ID: VS9EX3P31GS

- 1) All readings are Quasi-Peak values.
- 2) Correction Factor = Antenna Factor + Cable Loss.
- 3) The above results were the worst case results with the EUT positioned in all 3 axis during the test. The EUT was positioned vertically and horizontally on the table for vertical and horizontal measurement respectively.
- 4) Other emissions more than 20dB below the limit are not shown on the above table and only worst six emissions below 1GHz are listed.
- 5) There is not any other emission which falls in restricted bands which set out in Section 15.205 Restricted bands can be detected and reported.



Page: 19 of 29

6.3 Radiated Emissions above 1 GHz

Test Requirement: FCC Part15 Subpart C Section 15.209 & 15.249(a) & (d)

Test Method: ANSI C63.4:2003 Test Date: 2013-11-18

1GHz - 26GHz Frequency Range:

Measurement Distance: 3m

For PK value: Detector:

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz

VBW ≥ RBW Sweep = auto

Detector function = peak Trace = max hold For AV value:

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz

VBW =10 Hz Sweep = auto

Detector function = peak

Trace = max hold

Limit:

Fundamental Frequency:

Frequency range MHz	Limits (Peak) dB (μV/m)	Limits (Average) dB (μV/m)		
2400 to 2483.5	114	94		

Spurious Emission:

Frequency range MHz	Limits (Peak) dB (μV/m)	Limits (Average) dB (μV/m)		
Over 1000	74	54		

6.3.1 EUT Operation

Operating Environment:

Humidity: 54 % Temperature: 22 °C

EUT Operation: Pre-test with Peak detector with the following mode(s):

1: Transmission with GFSK

2: Transmission with $\Pi/4$ -DQPSK; 3: Transmission with 8DPSK;

Final test with Peak and Avearge detector with the following mode(s):

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 20 of 29

1: Transmission with GFSK and in continuous transmission with 100% duty cycle mode


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

FCC ID: VS9EX3P31GS



Page: 21 of 29

6.3.2 Test Setup and Procedure

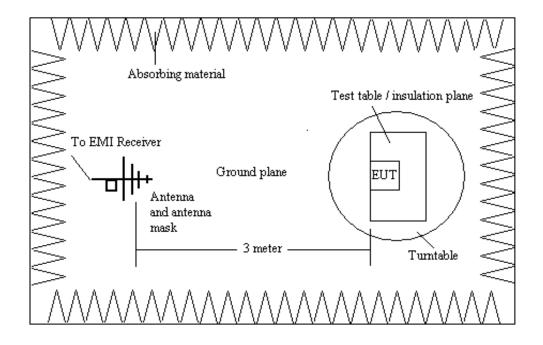

- 1. The pre-test of the radiated emissions test was conducted in a semi-anechoic chamber and the final measurement was conducted in the open area test site.
- 2. The EUT was connected to AC power source through a mains power outlet which was bonded to the ground reference plane. The EUT was placed upon a non-metallic table 0.8m above the ground reference plane.
- 3. Horn antenna was used for the frequency over 1GHz
- 4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT with located frequencies.
- 5. The actual frequencies of maximum emission were confirmed in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



22 of 29 Page:

6.3.3 Measurement Data

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured with 2 orthogonal polarities and frequencies of average emissions from the EUT were measured as follows:

Test results:

(1) Fundmental Frequency

Frequency An	Antenna	Emission Level (dBμV/m)		Limit (dBμV/m)		Damark
(MHz)	(MHz) Polarization	Peak	Average	Peak	Average	Remark
2402.0	Н	90.12	79.42	114	94	Pass
2402.0	V	96.00	83.52	114	94	Pass
2441.0	Н	92.79	81.60	114	94	Pass
2441.0	V	98.08	82.44	114	94	Pass
2480.0	Н	93.13	81.44	114	94	Pass
2480.0	V	96.51	82.34	114	94	Pass

(2) Spurious Emission

Operation Frequency: 2402.0 MHz

Frequency Anten	Antenna	Emission Level (dBµV/m)		Limit (dBμV/m)		Remark
(MHz)	Polarization	Peak	Average	Peak	Average	nemark
7804	V	52.36	48.22	74	54	Pass
7206	V	49.70	42.50	74	54	Pass
9608	Н	49.20	34.90	74	54	Pass
12010	Н	51.80	37.80	74	54	Pass
14412	Н	61.0	48.0	74	54	Pass
16814	Н	60.0	47.1	74	54	Pass



Page: 23 of 29

Operation Frequency: 2441.0 MHz

Frequency	Antenna	Emission Level (dBμV/m)		Limit (dBμV/m)		Remark
(MHz)	Polarization	Peak	Average	Peak	Average	Hemark
4882	V	51.55	47.67	74	54	Pass
7323	V	49.20	42.00	74	54	Pass
9764	Н	49.10	41.00	74	54	Pass
12205	Н	49.80	39.00	74	54	Pass
14646	Н	50.49	37.00	74	54	Pass
17087	Н	58.33	47.00	74	54	Pass

Operation Frequency: 2480.0 MHz

Frequency Anter	Antenna	Emission Level (dBµV/m)		Limit (dBμV/m)		Domorle
(MHz)	Polarization	Peak	Average	Peak	Average	Remark
4960	V	57.30	49.22	74	54	Pass
7440	V	49.40	43.00	74	54	Pass
9920	Н	48.30	36.20	74	54	Pass
12400	Н	50.90	38.00	74	54	Pass
14880	Н	56.80	46.10	74	54	Pass
17360	Н	60.90	49.30	74	54	Pass

Note:

- 1) The above results were the worst case results with the EUT positioned in all 3 axis during the test. The EUT was positioned vertically and horizontally on the table for vertical and horizontal measurement respectively.
- 2) Other emissions more than 20dB below the limit are not shown on the above table and only worst six emissions below 1GHz are listed.
- 3) There is not any other emission which falls in restricted bands which set out in Section 15.205 Restricted bands can be detected and reported.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 24 of 29

6.4 Band Edge / 20 dB Bandwidth

Test Requirement: FCC Part15 Subpart C Section 15.215, 15.249(d)
Test Method: ANSI C63.4:2003 and Marker-Delta Method

Test Date: 2013-11-18


EUT Operation: 1: Transmission with GFSK

2: Transmission with Π/4-DQPSK;3: Transmission with 8DPSK;

Result: Pass

Test Plot: (Worst case: Transmission with 8DPSK)

Operation frequency: 2402.0 MHz

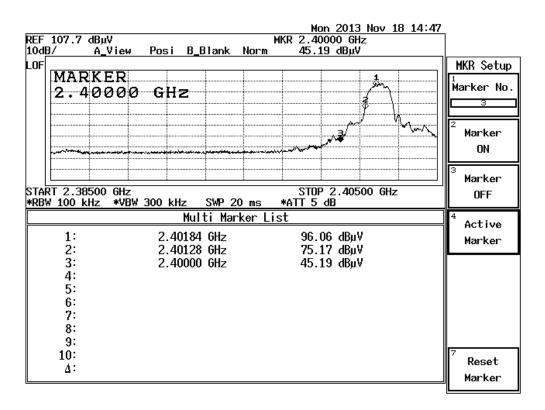

According to the page 19 of this report, the emission of the fundamental frequency 2400MHz is 96.00dBuV/m and 83.52dBuV/m for peak and average level respectively. Based on the delta method, the emission at the bandedge, 2400MHz, is more than 40dB below the fundamental and 20dB bandwidth falls in assigned band. It is deemed to comply with section 15.215. Besides, it is below the limit of 74dBuV/m and 54dBuV/m for peak and average level under 15.209. It is deemed to comply with section 15.249(d).


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and Conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 25 of 29

Test Plot: (Worst case: Transmission with 8DPSK)

Operation frequency: 2480.0 MHz

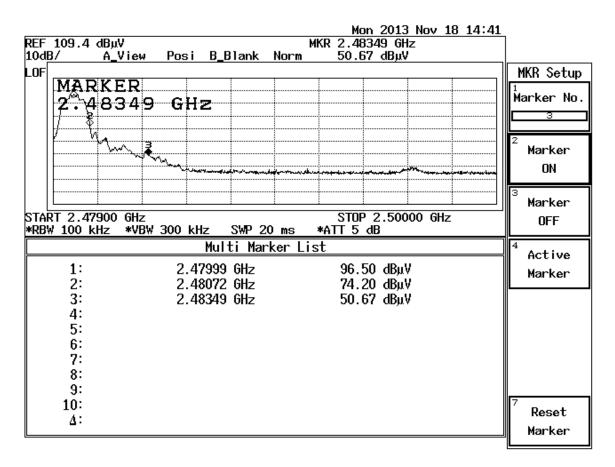

According to the page 19 of this report, the emission of the fundamental frequency 2483MHz is 96.51dBuV/m and 82.34dBuV/m for peak and average level respectively. Based on the delta method, the emission at the bandedge, 2483.5MHz, is more than 40dB below the fundamental and 20dB bandwidth falls in the assigned band. It is deemed to comply with section 15.215. Besides, it is below the limit of 74dBuV/m and 54dBuV/m for peak and average level under 15.209. It is deemed to comply with section 15.249(d).



Page: 26 of 29

7 Photographs

7.1 Conduct Emission Test Setup





This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: HKES131000263101 Page: 27 of 29

7.2 Radiatd Emission Test Setup

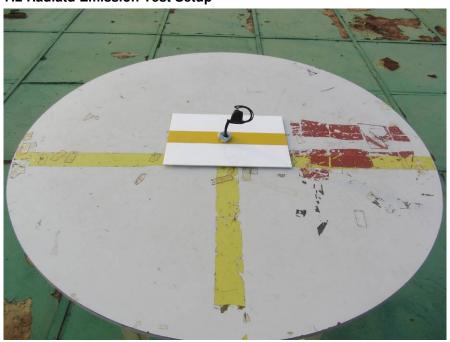

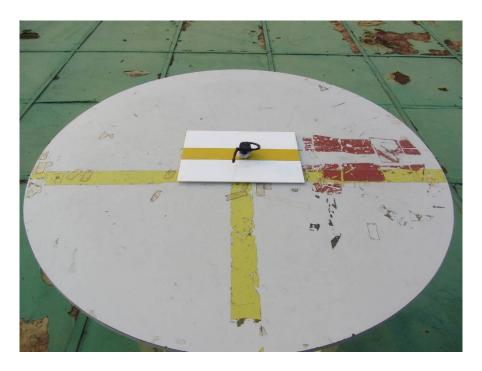

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 28 of 29

7.3 EUT Constructional Details





This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any, The Company's object responsibility is to its Client and this document do not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 29 of 29





-- END OF REPORT--

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.