

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

	OF
Product Name:	Embedded wireless module
Brand Name:	Silex
Model No.:	SX-SDMAC-2832S, SX-SDMAC-2832S+
Model Difference:	For market segmentation
FCC ID:	N6C-PMACS
Report No.:	ER/2017/70041
Issue Date:	Jul. 28, 2017
FCC Rule Part:	§15.247, Cat: DTS
Prepared for:	silex technology,Inc 2-3-1Hikaridai,Seika-cho,Souraku-gun,Kyoto 619-0237
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industri- al Park, Wuku District, New Taipei City, Tai- wan 24803



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



VERIFICATION OF COMPLIANCE

Applicant:	silex technology,Inc 2-3-1Hikaridai,Seika-cho,Souraku-gun,Kyoto 619-0237
Product Name:	Embedded wireless module
Brand Name:	Silex
Model No.:	SX-SDMAC-2832S, SX-SDMAC-2832S+
Model Difference:	For market segmentation
FCC ID:	N6C-PMACS
Report Number:	ER/2017/70041
Date of test:	Jul. 19, 2017(Conducted), Jul. 13, 2017(Radiated)
Date of EUT Received:	Jul. 04, 2017

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Cooper HSU	Date	Jul. 28, 2017
Prepared By:	Cooper Hsu/Engineer Allen Tsai	Date	Jul. 28, 2017
Approved By:	Allen Tsai / Engineer Jim Chang / Asst. Manager	Date	Jul. 28, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Revision History

Report Number	Revision	Description	Issue Date
ER/2017/70041	Rev.00	Initial creation of document	Jul. 28, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> JNo.134 WuKungRoad. NewTaipeildustrialPark WukuDistrict NewTaipeiCity Taiwan24803/新 t. 市 5. Big 新 t. & 業 聞 展 5. - X & 134 w

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Table of Contents

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSION TEST	12
7	PEAK OUTPUT POWER MEASUREMENT	16
8	6dB BANDWIDTH MEASUREMENT	19
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	22
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	30
11	PEAK POWER SPECTRAL DENSITY	51
12	ANTENNA REQUIREMENT	54



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	Embedded wireless module
Brand Name:	Silex
Model No.:	SX-SDMAC-2832S, SX-SDMAC-2832S+
Model Difference:	For market segmentation
Software version:	N/A
Hardware version:	N/A
Power Supply:	3.3Vdc from Power supply

Bluetooth Low Energy:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	BT 4.2 Dual mode
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	2.03 dBm (Peak) -0.04 dBm (Avg.)

Antenna Type	Supplier	Antenna Part No.	Freq.	Peak Antenna Gain (dBi)	Worst Antenna Gain
	Molex	146153	2.4GHz	3.25	V
PCB type di-pole	Unictron	AA258 (H2B1PC1A1C)	2.4GHz	2.9	
antenna	Unictron	AA222 (H2B1PD1A1C)	2.4GHz	2.8	
untornia	PFU	PA391-222	2.4GHz	3	

Note: Pre-scanned was done on the above 4 antennas, the 146153 results higher emission at 2.4GHz. Therefore, the completed set of measurement was done on the antenna to be presented on this test report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2017/70041 Page 6 of 54



1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance.

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Numbers are: 509634

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



SYSTEM TEST CONFIGURATION 2

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss 2dB.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.5 Configuration of Tested System

Fig. 2-1 Conducted Emission Configuration



Fig. 2-2 Radiated Emission Configuration



Table 2-1 Equipment Used in Tested System

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	Notebook	DELL	E5400	3704625136	Shielded	Unshielded
2	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A

SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對测试之樣品負責, 同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is underders may the prosecuted to the fulleet evtent of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-parators of this document is unjawity and offenders may the prosecuted to the fulleet evtent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.



DESCRIPTION OF TEST MODES 4

4.1 Operated in 2400 ~ 2483.5MHz Band

40 channels are provided for Bluetooth LE

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
0	2402 MHz	14	2430 MHz	28	2458 MHz
1	2404 MHz	15	2432 MHz	29	2460 MHz
2	2406 MHz	16	2434 MHz	30	2462 MHz
3	2408 MHz	17	2436 MHz	31	2464 MHz
4	2410 MHz	18	2438 MHz	32	2466 MHz
5	2412 MHz	19	2440 MHz	33	2468 MHz
6	2414 MHz	20	2442 MHz	34	2470 MHz
7	2416MHz	21	2444 MHz	35	2472 MHz
8	2418 MHz	22	2446 MHz	36	2474 MHz
9	2420 MHz	23	2448 MHz	37	2476 MHz
10	2422 MHz	24	2450 MHz	38	2478 MHz
11	2424 MHz	25	2452 MHz	39	2480 MHz
12	2426 MHz	26	2454 MHz		
13	2428 MHz	27	2456 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
Bluetooth LE	0 to 39	0,19,39	GFSK	1
	RADI	ATED EMISSIO	N TEST (ABOVE 1	GHz)
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
Bluetooth LE	0 to 39	0,19,39	GFSK	1

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE Transmitter for channel Low, Mid and High, the worst case E1 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST								
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)				
Bluetooth LE	0 to 39	0,19,39	GFSK	1				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



5 MEASUREMENT UNCERTAINTY

Test Items	Uncertainty		
AC Power Line Conducted Emission	+/- 2.586 dB		
Peak Output Power	+/- 0.84 dB		
6dB Bandwidth	+/- 51.33 Hz		
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB		
Peak Power Density	+/- 1.3 dB		
Temperature	+/- 0.65 °C		
Humidity	+/- 4.6 %		
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%		

Radiated Spurious Emission:

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



CONDUCTED EMISSION TEST 6

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

<u> </u>			
Quasi-peak	Average		
66 to 56	56 to 46		
56	46		
60 50			
	66 to 56 56		

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
EMI Test Receiver	R&S	ESCI7	100760	05/11/2017	05/10/2018			
LISN	SCHWARZB ECK	NSLK 8127	8127-649	05/22/2017	05/21/2018			
LISN	MESS TEC	FCC-LISN-50/250-25- 2-01	4034	03/19/2017	03/18/2018			
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2016	11/25/2017			

6.3 EUT Setup:


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



6.4 Test SET-UP (Block Diagram of Configuration)

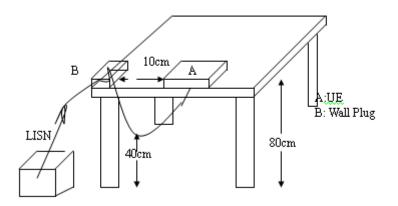

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




AC POWER LINE CONDUCTED EMISSION TEST DATA

Site Conduction Room Limit: FCC Class B Conduction(QP) Mode: Operation Note:

Phase: L1 Power: AC 110V/60Hz

emperature; 20.0 Humidity 58 %

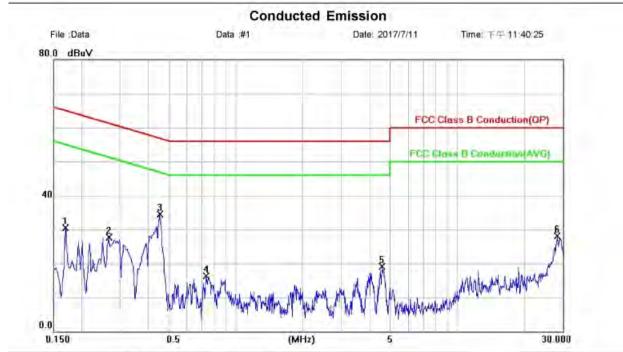

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1700	30.32	0.12	30.44	64.96	-34.52	peak	
2		0.2660	27.62	0.12	27.74	61.24	-33.50	peak	
3	*	0.4540	34.46	0.11	34.57	56.80	-22.23	peak	
4	1	0.7340	16.27	0.12	16.39	56.00	-39,61	peak	
5		4.5500	18.93	0.26	19.19	56.00	-36.81	peak	
6	1 1	28.3780	27.26	0.84	28.10	60.00	-31.90	peak	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 50 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-resources of this document is unsure in a particular to the fullest evaluated to the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Site Conduction Room Phase: emperature: 20 0 Ν Limit: FCC Class B Conduction(QP) AC 110V/60Hz Humidity: 58 % Power: Mode: Operation Note:

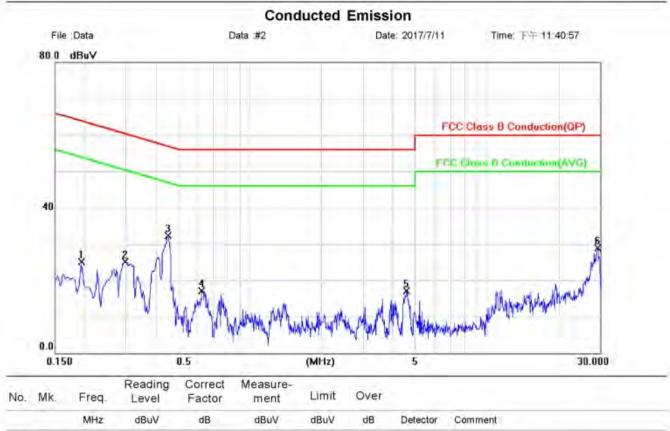

40.	WIN.	rieq.	Level	Factor	ment	Linne	over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1940	25.08	0.12	25.20	63.86	-38.66	peak	
2		0.2980	25.03	0.12	25.15	60.30	-35.15	peak	
3 *	•	0.4500	32.28	0.11	32.39	56.88	-24,49	peak	
4		0.6260	17.05	0.11	17.16	56.00	-38.84	peak	
5		4.5820	16.76	0.27	17.03	56.00	-38.97	peak	
6		29.2900	28.00	0.86	28.86	60.00	-31.14	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對测试之樣品負責, 同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is underders may the prosecuted to the fulleet evtent of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-parators of this document is unjawity and offenders may the prosecuted to the fulleet evtent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



PEAK OUTPUT POWER MEASUREMENT 7

7.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.


If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

7.2 Measurement Equipment Used:


Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Power Meter	Anritsu	ML2495A	1005007	12/15/2016	12/14/2017		
Power Sensor	Anritsu	MA2411B	917032	12/15/2016	12/14/2017		
DC Block	Mini-Circuits	BLK-18-S+	1	01/05/2017	01/04/2018		
Coaxial Cable	HUBER+SUHN ER	SUCOFLEX 102	23670/2	01/05/2017	01/04/2018		

7.3 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gines Galaxien in Little States in Source States and Source Sta tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law





7.4 Measurement Procedure:

- 1.Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

4. Record the max. Reading as observed from Power Meter.


5. Repeat above procedures until all test default channel measured was complete.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Duty Factor:

	Duty Cycle (%)	Duty Factor (dB)
BLE	65.22	1.86

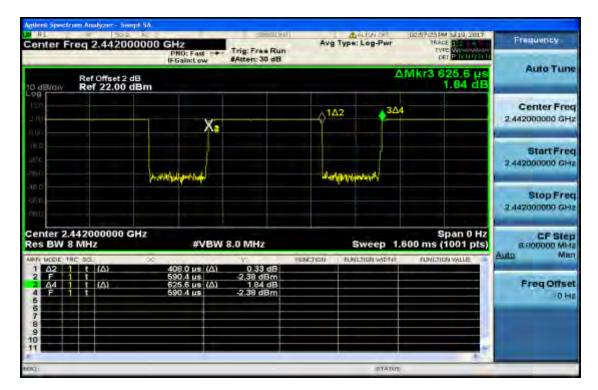

Duty Cycle Factor:10*log(1/65.22/100)=1.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Gines Galaxien in Little States in Source States and Source Sta tronic format documents, subject to Term's and Conditions for Electronic Documents at www.sqs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



7.5 **Measurement Result:**

СН	Frequency (MHz)	Peak Power Output (dBm)	Required Limit
0	2402	1.73	1 Watt = 30 dBm
20	2442	2.03	1 Watt = 30 dBm
39	2480	1.83	1 Watt = 30 dBm
BLE mo	de:		
СН	Frequency (MHz)	Max. Avg. Output include tune up tolerance Power (dBm)	Required Limit
0	2402	-0.33	1 Watt = 30 dBm
20	2442	-0.04	1 Watt = 30 dBm
39	2480	-0.24	1 Watt = 30 dBm

*Note: Measured by power meter, cable loss as 2 dB that offsets on the power meter in Peak

*Note: Measured by power meter, as cable loss+ Duty cycle factor that offsets on the power meter *Note: Max. Output include tune up tolerance Power is average power

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6DB BANDWIDTH MEASUREMENT 8


8.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz .

8.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
EXA Spectrum Ana- lyzer	Agilent	N9030A	MY53120760	03/21/2017	03/20/2018		
DC Block	Mini-Circuits	BLK-18-S+	1	01/05/2017	01/04/2018		
Coaxial Cable	HUBER+SUHN ER	SUCOFLEX 102	23670/2	01/05/2017	01/04/2018		

8.3 Test Set-up:



8.4 Measurement Procedure:

- Place the EUT on the table and set it in transmitting mode. 1.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:

Set the spectrum analyzer as RBW=100 kHz, VBW= 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto.

- 5. Mark the peak frequency and -6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:

Set the spectrum analyzer as RBW=1%, VBW=3*RBW, Span = 2MHz, Detector=Sample, Sweep=auto.

- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sos.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.




8.5 Measurement Result:

BLE mode			
Frequency (MHz)	6d B BW (MHz)	BW (MHz)	Result
2402	0.6858	> 0.5	PASS
2442	0.6891	> 0.5	PASS
2480	0.6873	> 0.5	PASS

Note: Refer to next page for plots.


6dB Band Width Test Data CH-Low

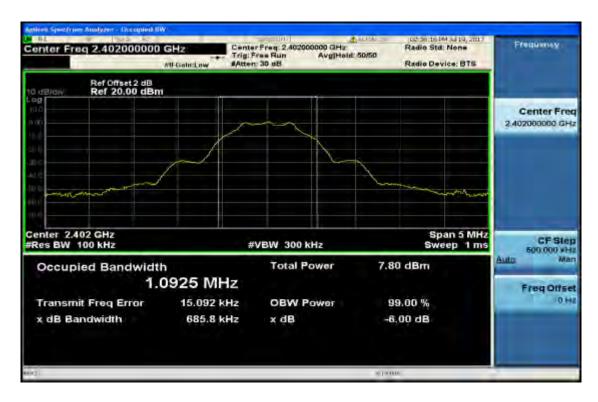


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6dB Band Width Test Data CH-Mid

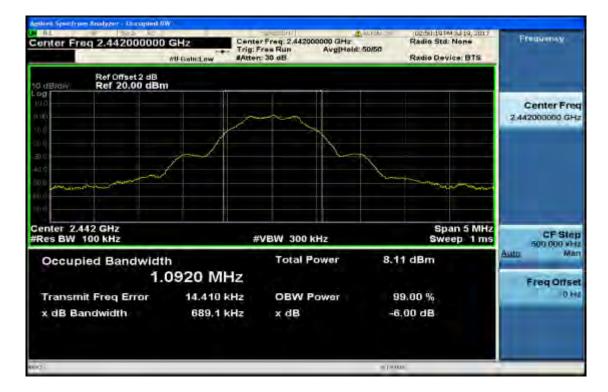

6dB Band Width Test Data CH-High

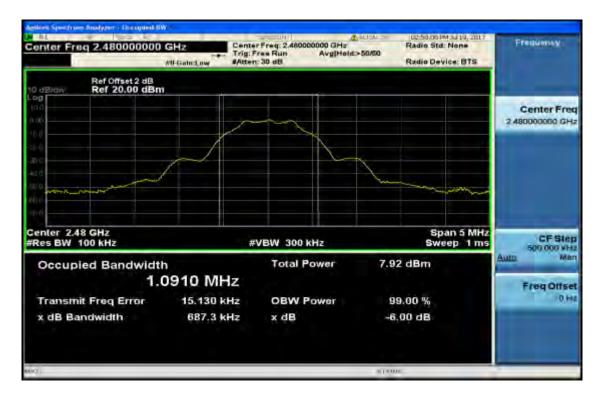

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 9


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
EXA Spectrum Ana- lyzer	Agilent	N9030A	MY53120760	03/21/2017	03/20/2018		
DC Block	Mini-Circuits	BLK-18-S+	1	01/05/2017	01/04/2018		
Coaxial Cable	HUBER+SUHNE R	SUCOFLEX 102	23670/2	01/05/2017	01/04/2018		

9.3 Test SET-UP:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



9.4 Measurement Procedure

Band Edge Limit Calculation:

- Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Conducted Band Edge:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

9.5 Measurement Result

Frequency (MHz)	RF Power Density (dBm)	Bandedge Limit = PSD - 20dB (dBm)			
2402	1.00	-19.00			
2480	1.12	-18.88			

Band Edge Limit

NOTE: cable loss as dB that offsets in the spectrum NOTE: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of a state of the leaders stated the results state of the stat Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Power Spectral Density for Bandedge Limit (CH-Low)



Power Spectral Density for Bandedge Limit (CH-High)


enter Freq 2.48000000	PHO: Wide Con Trig: F	res Run 30 dB	Avg Type: Log-Pwr	162:50:27 PM Jul 19, 2017 168:02 1 2 2 3 TVPE 12 2 3 DET P 12 12 11	Frequency
Ref Offset 2 dB Ref 20.00 dBm			Mkr1 2.4	80 010 5 GHz 1.12 dBm	Auto Tuni
					Center Fre 2.48000000 GH
		-	~		Start Free 2.479250000 GH
					Stop Fre 2.480750000 GH
10					CF Ste 160.000 kH Auto Ma
					Freq Offse 0 H
tart 2.4792500 GHz Res BW 100 kHz	#VBW 300 ki	H2	Stop Sweep 1.0	2.4807500 GHz 00 ms (1001 pts)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






BT4.0 mode **Band Edges Test Data CH-Low**

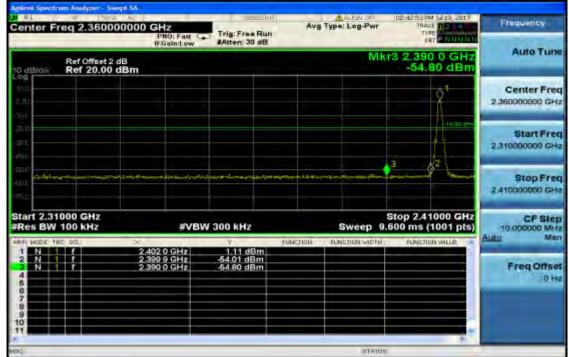

Band Edges Test Data CH-High

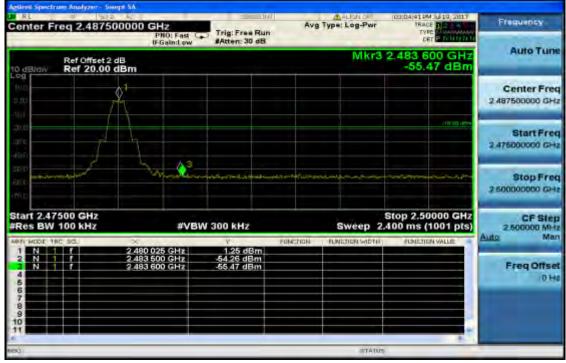

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Conducted Spurious Emission Measurement Result CH-Low 30MHz - 3GHz

RL	8 22	<u>k</u> .	10100000110	ALE NOT	(02:43:19 PM 34 19, 2017	Frequency
Center Fre	eq 1.515000	PNO: Fast C	Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr	TYPE ALMANA	(Tradentey
	Ref Offset 2 d Ref 20.00 d		system to ob	Mk	1 2.403 0 GHz 0.91 dBm	Auto Tune
0.00					1	Center Free 1,51600000 GH;
-1011 -2010 -2010					10.03 dSe	Start Free 30,000000 MHz
so d en ri mus		ay the state of the second second	لياد المعرانية (فرينا بر الله اليا ^ر العمل الل	llan ordanaa ah dah day fa waxadda bay kalad		Stop Free 3.00000000 GH
Start 30 Mi #Res BW 1		#VBV	V 300 kHz	Sweep 28	Stop 3.000 GHz 33.9 ms (1001 pts)	CF Step 297.000000 MH
ANN MODE THE		2.403 0 GHz	9 10 0.91 dBm	NUTION FUNCTION SOFTI	FUNCTION WALLE	Freq Offse
5 5 7 8 9						
11						A commencement of the second s

CH-Low 3GHz – 26.5GHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



CH-Mid 30MHz – 3GHz

Agilersi Spectrum A							
enter Freq	1.51500000		Trig: Free Run #Atten: 30 dB	Avg	Type: Log-Pwr	TYPE NUMBER	Frequency
	f Offset 2 dB ef 20.00 dBm				Miki	1 2.441 6 GHz -0.58 dBm	Auto Tune
1000 9.00 -100							Center Freq 1.516000000 GHz
300 -30°c						child ic.	Start Freq 30,000000 MHz
SD-D -Entre (ML)	***	مان بينا ۽ وهار Mile	alan an a	-	andergroup of the destroy of the short of		Stop Freq 3.00000000 GHz
Start 30 MHz #Res BW 100		#VBV	V 300 kHz		Sweep 28	Stop 3.000 GHz 3.9 ms (1001 pts)	
NRA MODE THE SO		2.441 6 GHz	ү -0.58 dBm	NUNCTION	FUNCTION SADTHE	FUNCTION WALLE	Auto Man
23456							Freq Offset 0 Hz
7 8 9 10							
(20)					STATUS		

CH-Mid 3GHz – 26.5GHz

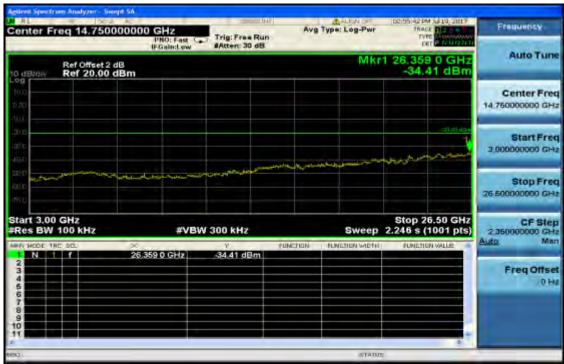

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對测试之樣品負責, 同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is underders may the prosecuted to the fulleet evtent of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-parators of this document is unjawity and offenders may the prosecuted to the fulleet evtent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



CH-High 30MHz – 3GHz

Agilenii Spectrum A	nalyzer - Swept SA						
Center Freq	1.515000000	CH2 PNO: Fast C	Trig: Free Run #Atten: 30 dB		Type: Log-Pwr	Interiors and the set of the set	Frequency
10 devaiv Re	of Offset 2 dB	Tridamicow	STATELE OF DE		Mk	1 2 480 3 GHz 0.22 dBm	
1000 9.30						• ¹	Center Freq 1.51600000 GHz
-100 200 200 -200						19.79.404	Start Freq 30,000000 MHz
solo enic imiti	استحدم فيستسترين و	li ninger an anger	LS-g-an-J-M-L-en-Ager		م اليوبر م اليون المراجع ال		Stop Freq 3.00000000 GHz
Start 30 MHz #Res BW 100		#VBV	V 300 kHz		Sweep 2	Stop 3.000 GHz 33.9 ms (1001 pts	297.000000 MHz
MRN MODE THE SE		80 3 GHz	V 0.22 dBm	PUNCTION	FUNCTION SADTHE	FUNCTION WALLS	Auto Man
23466							Freq Offset 0 Ha
7 8 9 10 11							
(DRM					STATUS		

CH- High 3GHz – 26.5GHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對测试之樣品負責, 同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is underders may the prosecuted to the fulleet evtent of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-parators of this document is unjawity and offenders may the prosecuted to the fulleet evtent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

Standard Applicable 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$

SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




Measurement Equipment Used 10.2

		966 Chamber		_	
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCI7	100760	05/11/2017	05/10/2018
Spectrum Analyzer	Agilent	E4446A	MY51100003	04/25/2017	04/24/2018
Loop Antenna	ETS-Lindgren	6502	148045	09/20/2016	09/19/2017
Bilog Antenna	SCHWAZBECK	VULB9168	378	12/19/2016	12/18/2017
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/01/2016	07/31/2017
Pre-Amplifier	Agilent	8447D	2944A07676	01/05/2017	01/04/2018
Pre-Amplifier	EMC Instruments Corp.	EMC0126530	980038	01/05/2017	01/04/2018
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	ChamPro	AM-BS-4500-B	060776-ABS	N.C.R	N.C.R
Controller	ChamPro	EM1000	60776	N.C.R	N.C.R
Low Loss Cable	Huber Suhner	966_RX	9	01/05/2017	01/04/2018
3m Site NSA	SGS	966 chamber	N/A	07/01/2017	06/30/2018
Low Loss Cable	Huber Suhner	966 TX	1	01/05/2017	01/04/2018
Horn Antenna	Schwarzbeck	BBHA9170	184	12/12/2016	12/11/2017
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/05/2017	01/04/2018




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

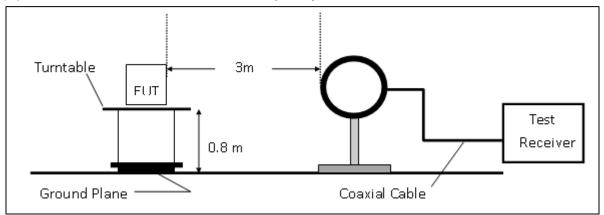

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

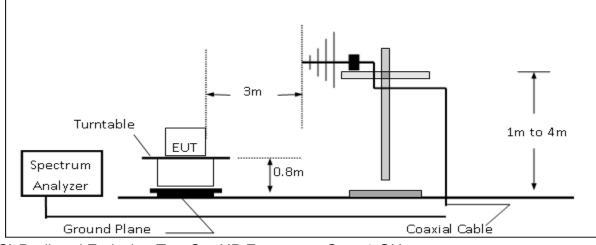

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

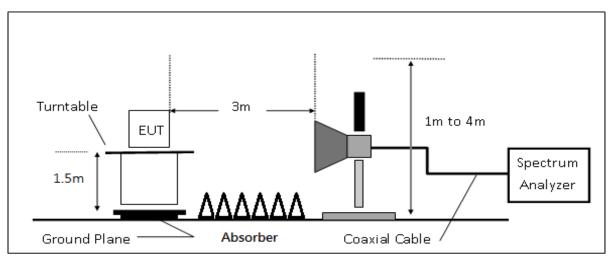

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW \geq 1/T 7. (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



10.5 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	5	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note :

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only




Radiated Band Edge Measurement Result

Operation Band	
Fundamental Frequency	
Operation Mode	
EUT Pol.	

:BLE :2402 MHz :Bandedge CH LOW :E1 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2017-07-13 :21 deg_C / 61 RH :Mike :VERTICAL

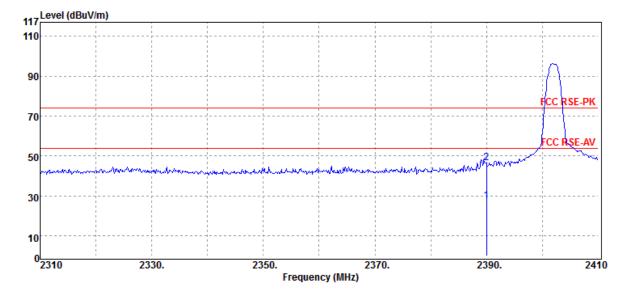

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00) E	Average	29.12	-1.74	27.38	54.00	-26.62
2390.00) E	Peak	48.46	-1.74	46.72	74.00	-27.28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2017/70041 Page 36 of 54



:BLE **Operation Band** Fundamental Frequency :2402 MHz **Operation Mode** :Bandedge CH LOW EUT Pol. :E1 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2017-07-13 :21 deg_C / 61 RH :Mike :HORIZONTAL

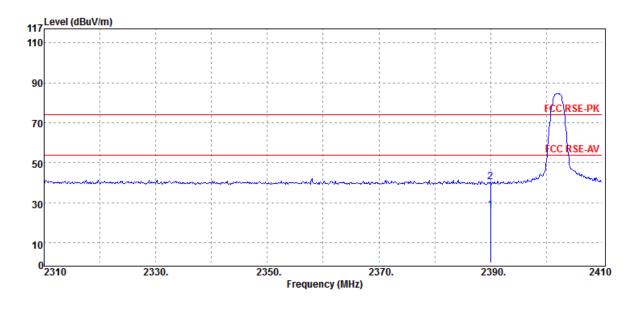

Limit Margin
@3m
$dB\mu V/m$ dB
54.00 -27.60
74.00 -33.61
 <u>n</u>)


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2017/70041 Page 37 of 54



:BLE **Operation Band** Fundamental Frequency :2480 MHz **Operation Mode** :Bandedge CH HIGH EUT Pol. :E1 Plane

Test Date :2017-07-13 Temp./Humi. :21 deg_C / 61 RH Engineer :Mike :VERTICAL Measurement Antenna Pol.

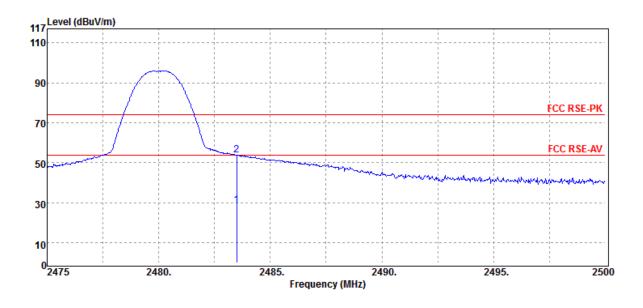

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	30.26	-1.62	28.64	54.00	-25.36
2483.50	E	Peak	55.44	-1.62	53.82	74.00	-20.18
	E	U					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 50 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-resources of this document is unsure in a particular to the fullest evaluated to the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


Report No.: ER/2017/70041 Page 38 of 54



:BLE **Operation Band** Fundamental Frequency :2480 MHz **Operation Mode** :Bandedge CH HIGH EUT Pol. :E1 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2017-07-13 :21 deg_C / 61 RH :Mike :HORIZONTAL

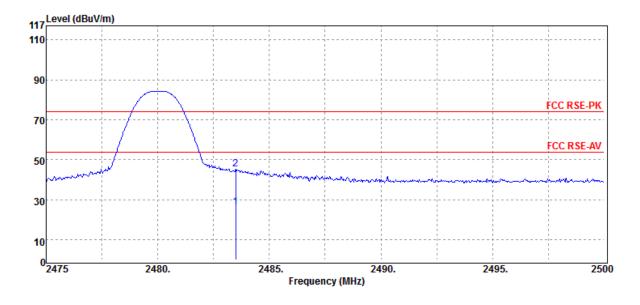

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	28.08	-1.62	26.46	54.00	-27.54
2483.50	E	Peak	47.01	-1.62	45.39	74.00	-28.61
2-00.00	L	i can	47.01	1.02	-0.00	17.00	20.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 50 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-resources of this document is unsure in a particular to the fullest evaluated to the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Radiated Spurious Emission Measurement Result

For Frequency form 30MHz to 1000MHz

Operation Band **Fundamental Frequency Operation Mode** EUT Pol.

:BLE :2402 MHz :Tx CH LOW :E2 Plane

Test Date	:2017-07-13
Temp./Humi.	:21 deg_C / 61 RH
Engineer	:Mike
Measurement Antenna Pol.	:VERTICAL

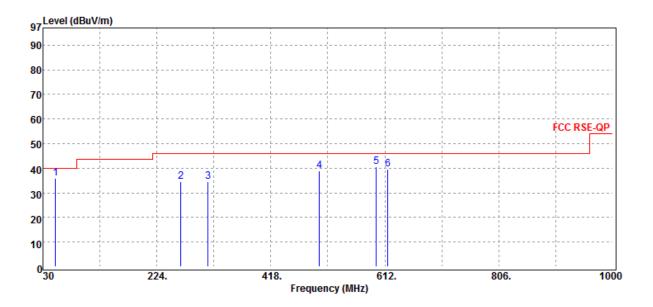

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
51.34	S	QP	43.63	-7.75	35.88	40.00	-4.12
264.74	S	Peak	41.64	-7.05	34.59	46.00	-11.41
311.30	S	Peak	40.05	-5.45	34.60	46.00	-11.40
500.45	S	Peak	41.60	-2.68	38.92	46.00	-7.08
597.45	S	Peak	40.78	-0.19	40.59	46.00	-5.41
616.85	S	Peak	39.75	-0.16	39.59	46.00	-6.41

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 50 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document is enproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-resources of this document is unsure in a particular to the fullest evaluated to the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2017/70041 Page 40 of 54



:2017-07-13 **Operation Band** :BLE Test Date Fundamental Frequency :2402 MHz Temp./Humi. :21 deg_C / 61 RH **Operation Mode** :Tx CH LOW Engineer :Mike EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol. 97 Level (dBuV/m) 90 80 70 60 FCC RSE-OP 50 40 Ē 30 20 10 0<mark>____</mark> 224. 418. 612. 806. 1000 Frequency (MHz)

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
250.19	S	Peak	49.35	-7.93	41.42	46.00	-4.58
264.74	S	Peak	43.31	-7.05	36.26	46.00	-9.74
374.35	S	Peak	39.70	-4.54	35.16	46.00	-10.84
479.11	S	Peak	38.02	-2.39	35.63	46.00	-10.37
503.36	S	Peak	37.77	-2.40	35.37	46.00	-10.63
624.61	S	Peak	37.24	0.15	37.39	46.00	-8.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對测试之樣品負責, 同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is underders may up to prove the to the fulleet evtent of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pagarance of this document is unlawful and offenders may up prosecuted to the fulleet evtent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2017/70041 Page 41 of 54



:BLE

:2017-07-13 **Operation Band** Fundamental Frequency :2442 MHz Temp./Humi. :21 deg_C / 61 RH **Operation Mode** :Tx CH MID Engineer :Mike EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol. 97 Level (dBuV/m) 90 80 70 60 FCC RSE-OP 50 40 30 20 10 0 30 224. 418. 612. 806. 1000 Frequency (MHz)

Test Date

₋imit Margin ⊉3m
µV/m dB
0.00 -4.20
6.00 -11.28
6.00 -10.83
6.00 -14.67
6.00 -7.76
6.00 -6.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對测试之樣品負責, 同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is underders may up to prove the to the fulleet evtent of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pagarance of this document is unlawful and offenders may up prosecuted to the fulleet evtent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2017/70041 Page 42 of 54

:2017-07-13



:BLE

Operation Band

Fundamental Frequency :2442 MHz Temp./Humi. :21 deg_C / 61 RH **Operation Mode** :Tx CH MID Engineer :Mike EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol. 97 Level (dBuV/m) 90 80 70 60 FCC RSE-OP 50 40 30 20 10 0<mark>____</mark> 224. 418. 612. 806. 1000 Frequency (MHz)

Test Date

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
216.24	S	Peak	41.46	-9.43	32.03	46.00	-13.97
250.19	S	Peak	49.01	-7.93	41.08	46.00	-4.92
288.99	S	Peak	39.37	-6.09	33.28	46.00	-12.72
384.05	S	Peak	38.52	-4.35	34.17	46.00	-11.83
479.11	S	Peak	38.16	-2.39	35.77	46.00	-10.23
624.61	S	Peak	37.61	0.15	37.76	46.00	-8.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此根告結果僅對测试之樣品負責, 同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is underders may up to prove the to the fulleet evtent of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pagarance of this document is unlawful and offenders may up prosecuted to the fulleet evtent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2017/70041 Page 43 of 54

:2017-07-13



:BLE

Operation Band

Fundamental Frequency :2480 MHz Temp./Humi. :21 deg_C / 61 RH **Operation Mode** :Tx CH HIGH Engineer :Mike EUT Pol. :E2 Plane :VERTICAL Measurement Antenna Pol. 97 Level (dBuV/m) 90 80 70 60 FCC RSE-OP 50 40 6 30 20 10 0<mark>____</mark> 224. 418. 612. 806. 1000 Frequency (MHz)

Test Date

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
68.80	S	QP	43.69	-9.98	33.71	40.00	-6.29
264.74	S	Peak	41.75	-7.05	34.70	46.00	-11.30
311.30	S	Peak	40.08	-5.45	34.63	46.00	-11.37
500.45	S	Peak	41.64	-2.68	38.96	46.00	-7.04
599.39	S	Peak	43.20	-0.27	42.93	46.00	-3.07
773.02	S	Peak	31.21	2.77	33.98	46.00	-12.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2017/70041 Page 44 of 54

:2017-07-13



:BLE

Operation Band Fundamental Frequency :2480 MHz Temp./Humi. :21 deg_C / 61 RH **Operation Mode** :Tx CH HIGH Engineer :Mike EUT Pol. :E2 Plane :HORIZONTAL Measurement Antenna Pol. 97 90 80 70 60 FCC RSF-OP 50 2 6 40 5 30

Test Date

20				·	-!		
10							
0 30	224	•	418.	612.	806.	100	D
			Frequency (MHz)			
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
250.19	S	Peak	49.19	-7.93	41.26	46.00	-4.74
264.74	S	Peak	44.82	-7.05	37.77	46.00	-8.23
384.05	S	Peak	39.37	-4.35	35.02	46.00	-10.98
479.11	S	Peak	38.41	-2.39	36.02	46.00	-9.98
599.39	S	Peak	33.75	-0.27	33.48	46.00	-12.52
624.61	S	Peak	38.49	0.15	38.64	46.00	-7.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Radiated Spurious Emission Measurement Result

For Frequency above 1GHz

Operation Band	:BLE	Test Date	:2017-07-13
Fundamental Frequency	:2402 MHz	Temp./Humi.	:21 deg_C / 61 RH
Operation Mode	:Tx CH LOW	Engineer	:Mike
EUT Pol.	:E1 Plane	Measurement Antenna Pol.	:VERTICAL

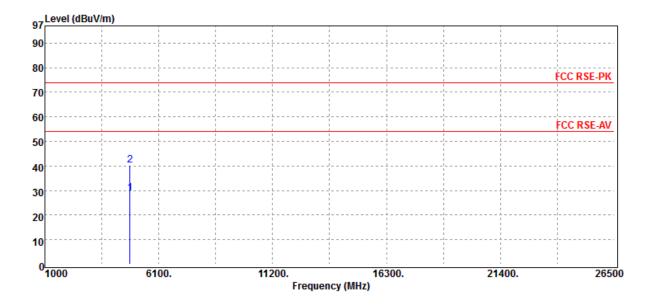

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	н	Average	23.94	4.92	28.86	54.00	-25.14
4804.00	Н	Peak	35.27	4.92	40.19	74.00	-33.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Н

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BLE :2402 MHz :Tx CH LO\ :E1 Plane	N	Test Date Temp./Hu Engineer Measure	umi.	:Mike	07-13 J_C / 61 RH CONTAL
97 Level (d	BuV/m)						1
90				·			
80				·		FCC RSE-PK	
70							
60				· · · · · · · · · · · · · · · · · · ·		FCC RSE-AV	
50				· · · · · · · · · · · · · · · · · · ·		·	
40	2			· · · · · · · · · · · · · · · · · · ·			
30	·····	 				 	
20		 		· · · · · · · · · · · · · · · · · · ·		 	
10		 		1 1 1 1		 	
0 <mark></mark> 1000	610)0.	11200. Frequency (MH	16300. z)	21400.	2650	0
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Н	Average	23.90	4.92	28.82	54.00	-25.18

Peak

34.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> JNo.134 WuKungRoad. NewTaipeildustrialPark WukuDistrict NewTaipeiCity Taiwan24803/新 t. 市 5. Big 新 t. & 業 聞 展 5. - X & 134 w

4.92

39.05

74.00

-34.95



Н

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:BLE :2442 MHz :Tx CH MID :E1 Plane)	Test Date:2017-0Temp./Humi.:21 degEngineer:MikeMeasurement Antenna Pol.:VERTI			_C / 61 RH
97	IBuV/m)						
90				· · · · · · · · · · · · · · · · · · ·			
80						FCC RSE-PK	
70							
60		·				FCC RSE-AV	
50		·					
40	2			· · · · · · · · · · · · · · · · · · ·			
30		·	·····	· · · · · · · · · · · · · · · · · · ·		 	
20						 	
10		 		1 1 1 1		 	
0 <mark></mark> 1000	610) 0.	11200. Frequency (MH	16300. z)	21400.	2650	0
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4884.00	Н	Average	24.15	5.20	29.35	54.00	-24.65

Peak

35.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> JNo.134 WuKungRoad. NewTaipeildustrialPark WukuDistrict NewTaipeiCity Taiwan24803/新 t. 市 5. Big 新 t. & 業 聞 展 5. - X & 134 w

5.20

40.51

74.00

-33.49



Н

Operation Ba Fundamental Operation Mo EUT Pol.	Frequency	:BLE :2442 MHz :Tx CH MID :E1 Plane)	Test Date Temp./Hu Engineer Measure	umi.	:Mike	_C / 61 RH
97 Level (d	BuV/m)						
90	·			·			
80	·			 		FCC RSE-PK	
70		 		1 			
60						FCC RSE-AV	
50				·			
40	2			·			
30		 	·····	·			
20							
10							
0 <mark>.</mark> 1000	610	00.	11200. Frequency (MH	16300. z)	21400.	2650	D
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4884.00	Н	Average	24.18	5.20	29.38	54.00	-24.62

Peak

34.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> JNo.134 WuKungRoad. NewTaipeildustrialPark WukuDistrict NewTaipeiCity Taiwan24803/新 t. 市 5. Big 新 t. & 業 聞 展 5. - X & 134 w

5.20

39.41

74.00

-34.59



Н

Operation Ba Fundamental Operation Mo EUT Pol.	I Frequency	:BLE :2480 MHz :Tx CH HIG :E1 Plane	iΗ	Test Date Temp./Hu Engineer Measure	umi.	:Mike	_C / 61 RH
97 Level (d	BuV/m)						
90							
80	·					FCC RSE-PK	
70	· · · · · · · · · · · · · · · · · · ·						
60	· J	 				FCC RSE-AV	
50							
40	2						
30						,	
20						 	
10						 	
0 <mark>0</mark>	610	0.	11200. Frequency (MH	16300. z)	21400.	2650	D
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Average	24.76	5.29	30.05	54.00	-23.95

Peak

35.86

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> JNo.134 WuKungRoad. NewTaipeildustrialPark WukuDistrict NewTaipeiCity Taiwan24803/新 t. 市 5. Big 新 t. & 業 聞 展 5. - X & 134 w

5.29

41.15

74.00

-32.85



4960.00

Н

Operation Ba Fundamental Operation Mo EUT Pol.	I Frequency	:BLE :2480 MHz :Tx CH HIG :E1 Plane	Ή	Test Date Temp./Hu Engineer Measure	umi.	:Mike	07-13 J_C / 61 RH CONTAL
97 Level (d	BuV/m)						
90							
80						FCC RSE-PK	
70				1 1 1			
60		 		1 1 1 1		FCC RSE-AV	
50							
40	2						
30							
20	·····			· · · · · · · · · · · · · · · · · · ·		 	
10		 				 	
0 <mark>0</mark> 0	610	0.	11200. Frequency (MH	16300. z)	21400.	2650	0
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Average	24.79	5.29	30.08	54.00	-23.92

Peak

34.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuckungRoad,NewTaipeilndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

5.29

39.99

74.00

-34.01



11 PEAK POWER SPECTRAL DENSITY


Standard Applicable: 11.1

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
					/ /			
EXA Spectrum Analyzer	Agilent	N9030A	MY53120760	03/21/2017	03/20/2018			
DC Block	Mini-Circuits	BLK-18-S+	1	01/05/2017	01/04/2018			
Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	23670/2	01/05/2017	01/04/2018			

11.3 Test Set-up:



11.4 Measurement Procedure:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



11.5 **Measurement Result:**

RF Power Density (dBm)	Maximum Limit (dBm)	Result
-13.42	8	PASS
-13.10	8	PASS
-13.26	8	PASS
	Density (dBm) -13.42 -13.10	Density (dBm) (dBm) -13.42 8 -13.10 8

NOTE: cable loss as 2dB that offsets in the spectrum

Power Spectral Density Test Plot (CH-Low)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days unity. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Power Spectral Density Test Plot (CH-Mid)



Power Spectral Density Test Plot (CH-High)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined to so days unity. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



12 ANTENNA REQUIREMENT

12.1 **Standard Applicable:**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

In case of point-to-point operation, the power shall be reduced by the one dB for every 3 dB that the directional gain of antenna exceeds 6dBi.

12.2 **Antenna Connected Construction:**

An embedded-in antenna design is used.

The antenna is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90元。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law