


### D450V3-SN:1113; 450Head

Calibrated impedance:  $55.7\Omega + 5.3j\Omega$ ; Measurement impedance:  $55.1\Omega - 5.7j\Omega$  (within  $5\Omega$ )



Calibrated return loss: -22.6dB; Measurement return loss: -22.3 dB (within 20%)

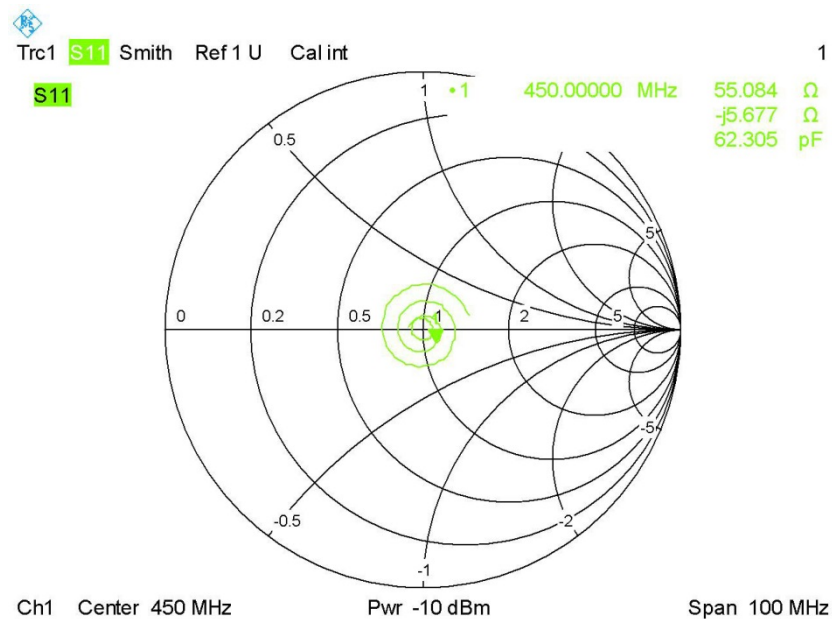