



Transponder DISC TAG Patch D25x0.6mm, with customised Logo

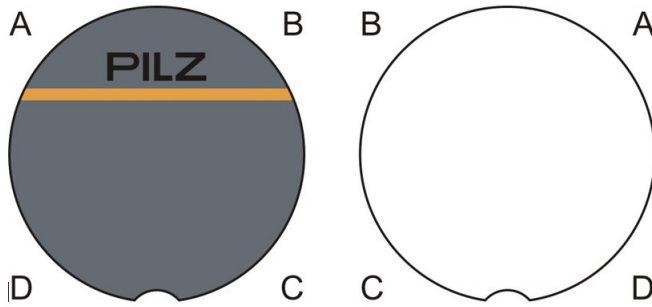

Functional Specifications	
Frequency	13.56MHz
Memory	UID 7 Byte, 2k Usermemory
Chip	MIFARE PLUS® EV1 2K, 7 byte UID
RFID Protocol	ISO / IEC14443-3
Dataretention	100000 Cycles
Physical Specifications	
Size	Diameter 25mm ± 0.05mm
Thickness	0.60mm ± 0.10mm without adhesive
Hole	No Hole
Weight	0.92g ± 0.05g
Notch	R2.5mm
Material	PVC
Colour	White
Mounting Methods	Adhesive Luxking D501
Options	Formatting, encoding
Environmental Specifications	
IP Rating	No
Storage Temperature	-35°C to 50°C
Operation Temperature	-35°C to 50°C
Vibration/Shock	IEC 68.2.6 (10g, 10 to 2000Hz, 3axis 2.5h) IEC 68.2.29 (40g, 18ms, 6axis, 2000 times)
Certifications	REACH Approved, RoHS 2011/65/EU Approved, CE Approved
Packaging	100pcs/Bag
Order Code	3515-01-276-00

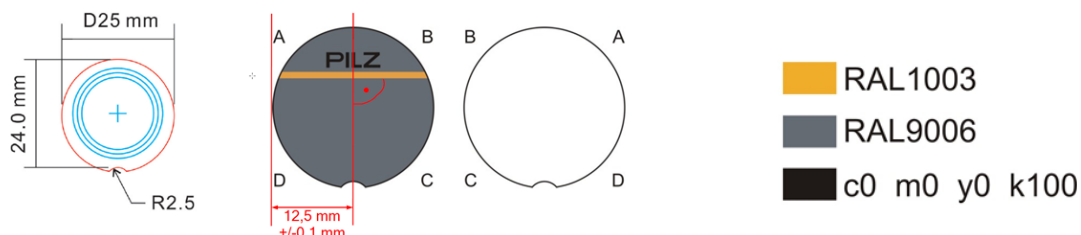

V22_1.2

®TECTUS reserves the right to change any information or data in this document without prior notice. The distribution and the update of this document is not controlled. TECTUS declines all responsibility for the use of products with any other specifications but the ones mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility.

Where application information is given, it is only advisory and does not form part of the specification.

18.03.2022 Version: 1.2