

# FCC PART 15.249

## MEASUREMENT AND TEST REPORT

### FOR

**Shenzhen Voxtech Co., Ltd.**

**The 4th floor, No. 1 building, Baodazhou District, Shancheng Industrial Park,  
Shiyan Town, Shenzhen, PR China.**

**FCC ID: VU8ZZW**

<b>Report Concerns:</b> Original Report	<b>Equipment Type:</b> Wireless PTT
<b>Model:</b>	<u>ZZW50</u>
<b>Report No.:</b>	<u>STR10058092I</u>
<b>Test Date:</b>	<u>2010-05-14 to 2010-05-20</u>
<b>Issue Date:</b>	<u>2010-05-24</u>
<b>Test Engineer:</b>	Susan Su <i>Susan Su</i>
<b>Reviewed By:</b>	Lahm Peng <i>Lahm peng</i>
<b>Approved &amp; Authorized By:</b>	Jandy so/PSQ Manager <i>Jandyso</i>
<b>Prepared By:</b>	
<b>SEM.Test Compliance Service Co., Ltd</b> 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: <a href="http://www.semtest.com.cn">www.semtest.com.cn</a>	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	3
1.3 RELATED SUBMITTAL(S)/GRANT(S) .....	3
1.4 TEST METHODOLOGY .....	4
1.5 TEST FACILITY .....	4
1.6 EUT EXERCISE SOFTWARE .....	4
1.7 ACCESSORIES EQUIPMENT LIST AND DETAILS .....	4
1.8 EUT CABLE LIST AND DETAILS .....	4
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
<b>3. §15.203 - ANTENNA REQUIREMENT .....</b>	<b>6</b>
3.1 STANDARD APPLICABLE.....	6
3.2 TEST RESULT.....	6
<b>4. §15.205, §15.209, §15.249 (A)- RADIATED EMISSION.....</b>	<b>7</b>
4.1 MEASUREMENT UNCERTAINTY .....	7
4.2 STANDARD APPLICABLE.....	7
4.3 TEST EQUIPMENT LIST AND DETAILS .....	8
4.4 TEST PROCEDURE.....	8
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	9
4.6 ENVIRONMENTAL CONDITIONS .....	9
4.7 SUMMARY OF TEST RESULTS/PLOTS .....	9
<b>5. §15.249(B) OUT OF BAND EMISSIONS .....</b>	<b>13</b>
5.1 STANDARD APPLICABLE.....	13
5.2 TEST EQUIPMENT LIST AND DETAILS .....	13
5.3 TEST PROCEDURE.....	13
5.4 ENVIRONMENTAL CONDITIONS .....	13
5.5 SUMMARY OF TEST RESULTS/PLOTS .....	14

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen Voxtech Co., Ltd.  
Address of applicant: The 4th floor, No. 1 building, Baodazhou District, Shancheng Industrial Park, Shiyan Town, Shenzhen, PR China

Manufacturer: Shenzhen Voxtech Co., Ltd.  
Address of manufacturer: The 4th floor, No. 1 building, Baodazhou District, Shancheng Industrial Park, Shiyan Town, Shenzhen, PR China

#### General Description of E.U.T

Items	Description
EUT Description:	Wireless PTT
Trade Name:	/
Model No.:	ZZW50
Rated Voltage:	DC 3V
Output Power:	10mW
Frequency Range:	915 MHz
No. of Channel:	/
Antenna Type:	Integral Antenna
Size:	2.8X2.2X1.4cm
For more information refer to the circuit diagram form and the user's manual.	

*The test data is gathered from a production sample, provided by the manufacturer.*

### 1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Voxtech Co., Ltd. in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107,15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

### 1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

## 1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the Operating Instructions and let the EUT keep transmitting.

## 1.5 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

## 1.6 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the whole system is on.

## 1.7 Accessories Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

## 1.8 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

## 2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emission	N/A
§15.205	Restricted Band of Operation	Compliant
§15.209	Radiated Emission	Compliant
§15.249(a)	Field Strength	Compliant
§15.249(d)	Out of Band Emission	Compliant

### **3. §15.203 - ANTENNA REQUIREMENT**

---

#### **3.1 Standard Applicable**

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has an integral antenna, fulfill the requirement of this section.

## 4. §15.205, §15.209, §15.249 (a)- RADIATED EMISSION

---

### 4.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of fundamental (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 20 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209,WHICHEVER IS THE LESSER ATTENUATION.

Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

### 4.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEA20	DE25181	2009-08-12	2010-08-11
Positioning Controller	C&C	CC-C-1F	N/A	2009-08-12	2010-08-11
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2009-07-21	2010-07-20
Horn Antenna	SCHWARZBECK	BBHX 9120	9120-426	2009-07-21	2010-07-20
RF Switch	EM	EMSW18	SW060023	2009-08-12	2010-08-11
Amplifier	Agilent	8447F	3113A06717	2009-08-12	2010-08-11
Coaxial Cable	SCHWARZBECK	AK9513	9513-10	2009-08-12	2010-08-11
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	25498514	2009-08-12	2010-08-11


**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 4.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

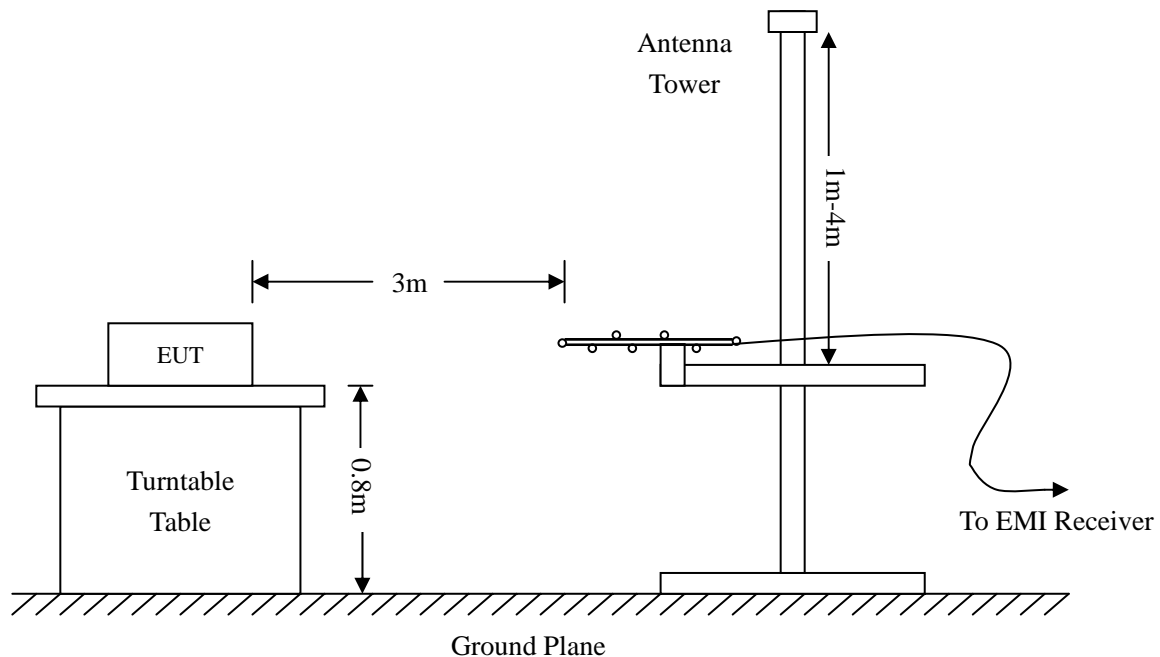



#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

#### 4.6 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	50 %
ATM Pressure:	1012 mbar

#### 4.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst margin of:


**-1.60 dBμV at 1830.0 MHz in the Horizontal polarization, 30 MHz to 25 GHz, 3Meters**

***Note:** this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

Plot of Radiation Emissions Test


Radiated Disturbance  
EUT: Wireless PTT  
M/N: ZZW50  
Operating Condition: Transmitting below 1GHz  
Test Specification: Horizontal & Vertical

Horizontal:

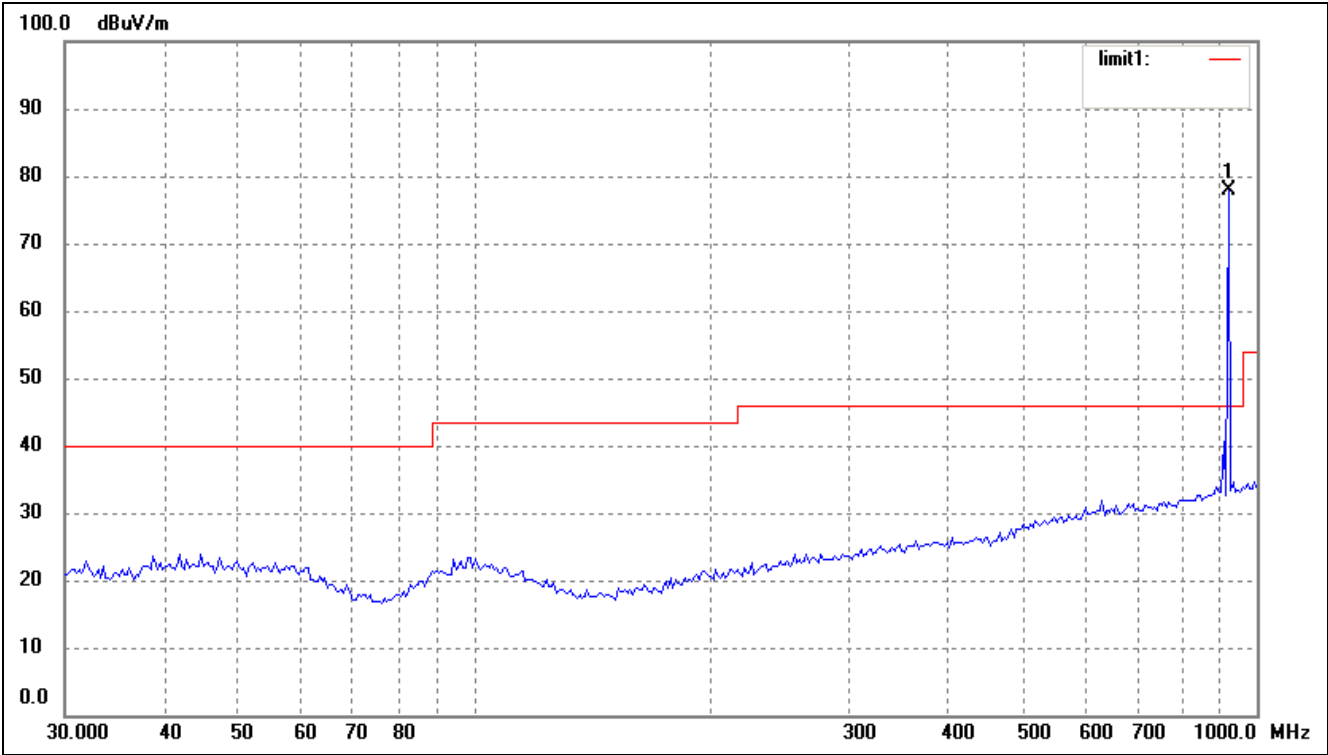

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	915.0	60.74	17.16	77.90	114.00	-36.10	125	100	peak
	915.0	56.29	17.16	73.45	94.00	-20.55	125	100	Ave

Vertical:

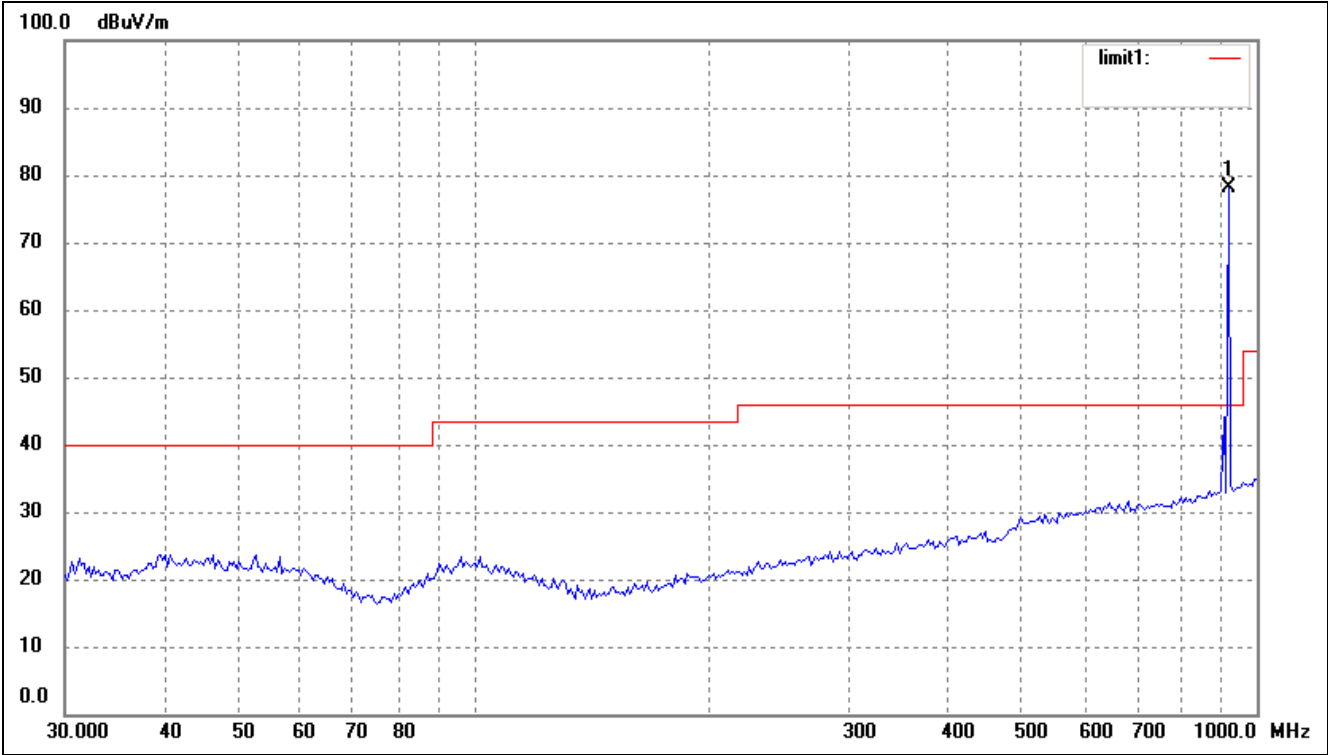

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	915.0	60.91	17.16	78.07	114.00	-35.93	244	100	peak
	915.0	58.46	17.16	73.62	94.00	-20.38	244	100	Ave

*Spurious Emission Above 1GHz*

Frequency MHz	Detector	Meter Reading dBuV	Direction Degree	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Amplitude dBuV/m	Limit dBuV/m	Margin dB
1830.0	AV	46.8	114	V	32.2	5.8	33	51.8	54	-2.2
1830.0	AV	47.4	204	H	32.2	5.8	33	52.4	54	-1.6
1830.0	PK	50.3	235	V	32.2	5.8	33	55.3	74	-18.7
1830.0	PK	41.9	89	H	32.2	5.8	33	46.9	74	-27.1
2745.0	AV	41.1	53	V	35.4	7.1	33.5	50.1	54	-3.9
2745.0	AV	40.3	123	H	35.4	7.1	33.5	49.3	54	-4.7
2745.0	PK	45.6	74	V	35.4	7.1	33.5	54.6	74	-19.4
2745.0	PK	44.8	122	H	35.4	7.1	33.5	53.8	74	-20.2
3660.0	AV	36.8	56	V	38.3	8.2	34	49.3	54	-4.7
3660.0	AV	35.2	185	H	38.3	8.2	34	47.7	54	-6.3
3660.0	PK	41.3	190	V	38.3	8.2	34	53.8	74	-20.2
3660.0	PK	39.7	243	H	38.3	8.2	34	52.2	74	-21.8

*Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4. Emissions 20dB lower than the limit are not reported.*

## 5. §15.249(b) OUT OF BAND EMISSIONS

### 5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	ROHDE&SCHWARZ	FSEA20	DE25181	2009-08-12	2010-08-11
Positioning Controller	C&C	CC-C-1F	N/A	2009-08-12	2010-08-11
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2009-07-21	2010-07-20
Horn Antenna	SCHWARZBECK	BBHX 9120	9120-426	2009-07-21	2010-07-20
RF Switch	EM	EMSW18	SW060023	2009-08-12	2010-08-11
Amplifier	Agilent	8447F	3113A06717	2009-08-12	2010-08-11
Coaxial Cable	SCHWARZBECK	AK9513	9513-10	2009-08-12	2010-08-11
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	25498514	2009-08-12	2010-08-11
Agilent	Spectrum Analyzer	E4402B	US41192821	2009-08-12	2010-08-11

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 5.3 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, than mark the higher-level emission for comparing with the FCC rules.

### 5.4 Environmental Conditions


Temperature:	23 °C
Relative Humidity:	52 %
ATM Pressure:	1012 mbar

## 5.5 Summary of Test Results/Plots


Frequency MHz	Limit dBuV	Result
902.0	<46	Pass
928.0	<46	Pass

The edge emissions are below the FCC 15.209 Limits. Please refer to the test plots below.

Lowest Bandedge

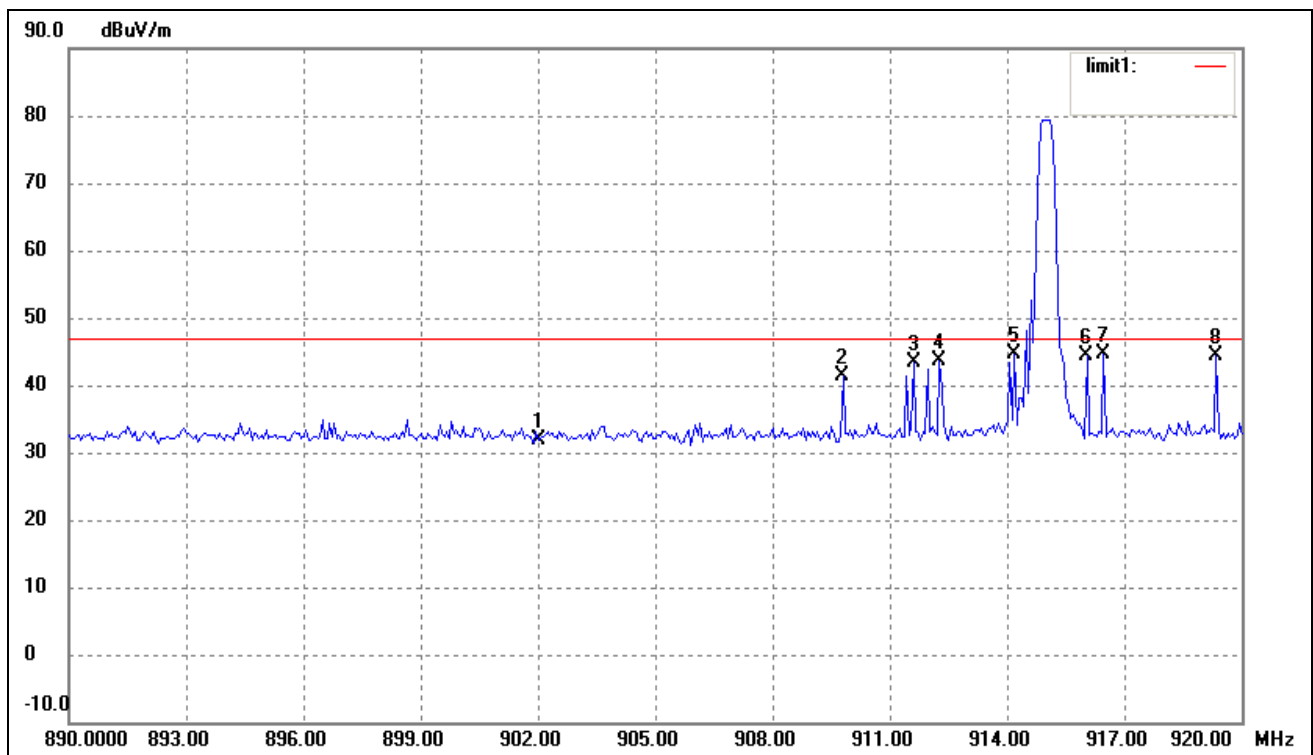

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	902.0000	14.92	16.93	31.85	46.00	-14.15	peak
2	909.7998	24.32	17.03	41.35	46.00	-4.65	peak
3	911.6000	26.44	17.05	43.49	46.00	-2.51	peak
4	912.2599	26.50	17.07	43.57	46.00	-2.43	peak
5	914.1798	27.45	17.09	44.54	46.00	-1.46	peak
6	916.0398	27.18	17.12	44.30	46.00	-1.70	peak
7	916.4600	27.49	17.12	44.61	46.00	-1.39	peak
8	919.3400	27.19	17.16	44.35	46.00	-1.65	peak

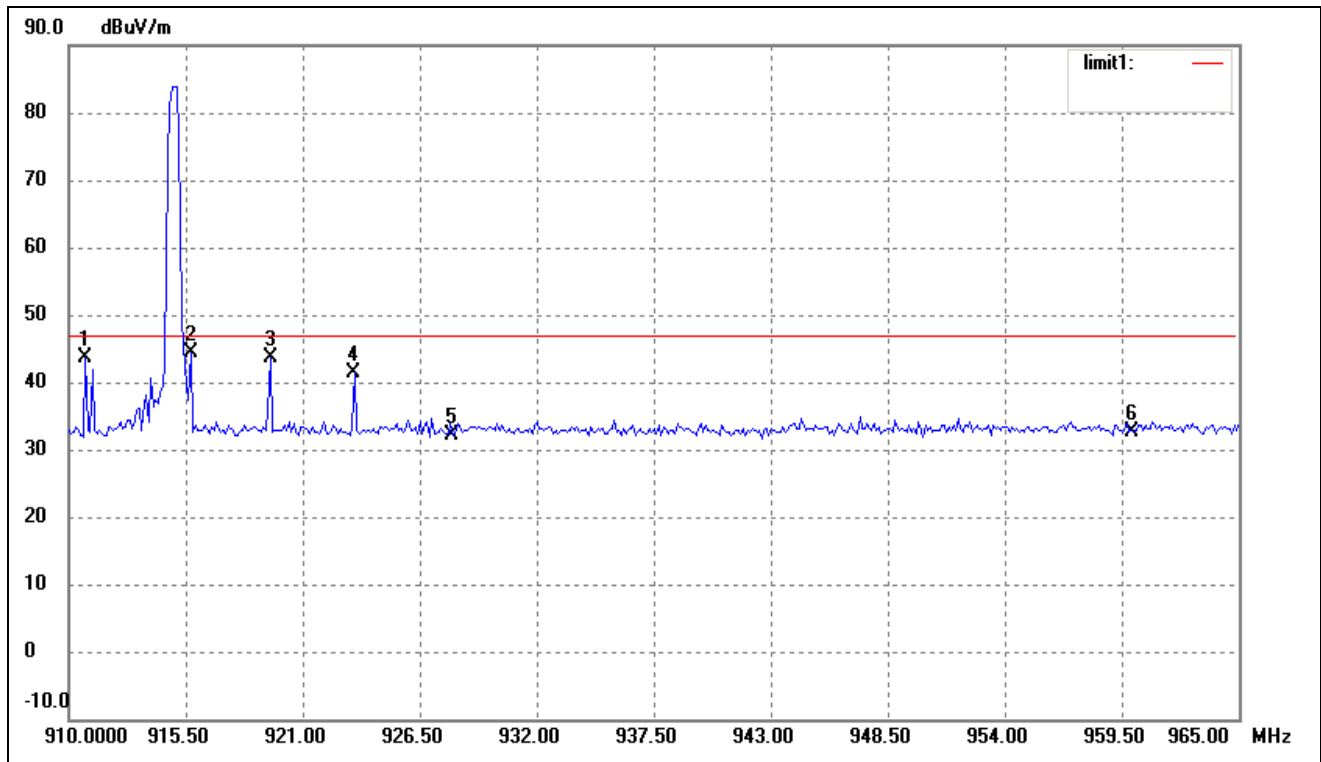

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	910.7699	26.66	17.05	43.71	46.00	-2.29	peak
2	915.7200	27.32	17.11	44.43	46.00	-1.57	peak
3	919.4600	26.41	17.16	43.57	46.00	-2.43	peak
4	923.4199	24.23	17.22	41.45	46.00	-4.55	peak
5	928.0000	14.90	17.27	32.17	46.00	-13.83	peak
6	960.0000	15.00	17.70	32.70	46.00	-13.30	peak

\*\*\*\*\* END OF REPORT \*\*\*\*\*