

FCC Test Report

Report No.: RFBDTL-WTW-P21060470 R1

FCC ID: VUI-CFWM

Test Model: 84911790C

Received Date: Feb. 15, 2022

Test Date: Mar. 11 ~ Mar. 27, 2022

Issued Date: Nov. 22, 2022

Applicant: PEGATRON CORPORATION

Address: 5F, NO. 76, LIGONG ST., BEITOU DISTRICT, TAIPEI CITY 112, TAIWAN

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal.....	10
3.4 Description of Support Units.....	11
3.4.1 Configuration of System under Test.....	11
3.5 General Description of Applied Standards and References.....	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement.....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	13
4.1.2 Test Instruments.....	14
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard.....	15
4.1.5 Test Setup.....	16
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results.....	18
4.2 6dB Bandwidth Measurement.....	32
4.2.1 Limits of 6dB Bandwidth Measurement.....	32
4.2.2 Test Setup.....	32
4.2.3 Test Instruments.....	32
4.2.4 Test Procedure.....	32
4.2.5 Deviation from Test Standard.....	32
4.2.6 EUT Operating Conditions.....	32
4.2.7 Test Result.....	33
4.3 Conducted Output Power Measurement.....	35
4.3.1 Limits of Conducted Output Power Measurement.....	35
4.3.2 Test Setup.....	35
4.3.3 Test Instruments.....	35
4.3.4 Test Procedures.....	35
4.3.5 Deviation from Test Standard.....	35
4.3.6 EUT Operating Conditions.....	35
4.3.7 Test Results.....	36
4.4 Power Spectral Density Measurement.....	37
4.4.1 Limits of Power Spectral Density Measurement.....	37
4.4.2 Test Setup.....	37
4.4.3 Test Instruments.....	37
4.4.4 Test Procedure.....	37
4.4.5 Deviation from Test Standard.....	37
4.4.6 EUT Operating Condition.....	37
4.4.7 Test Results.....	38
4.5 Conducted Out of Band Emission Measurement.....	40
4.5.1 Limits of Conducted Out of Band Emission Measurement.....	40
4.5.2 Test Setup.....	40
4.5.3 Test Instruments.....	40
4.5.4 Test Procedure.....	40
4.5.5 Deviation from Test Standard.....	40
4.5.6 EUT Operating Condition.....	40

4.5.7 Test Results	40
5 Pictures of Test Arrangements.....	49
Annex A- Band Edge Measurement.....	50
Appendix – Information of the Testing Laboratories	54

Release Control Record

Issue No.	Description	Date Issued
RFBDTL-WTW-P21060470	Original release.	May 18, 2022
RFBDTL-WTW-P21060470 R1	Revised antenna gain	Nov. 22, 2022

1 Certificate of Conformity

Product: Customer Facing Wi-Fi Module (CFWM)

Brand: 

Test Model: 84911790C

Sample Status: DV


Applicant: PEGATRON CORPORATION

Test Date: Mar. 11 ~ Mar. 27, 2022

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Nov. 22, 2022
Polly Chien / Specialist

Approved by :  , **Date:** Nov. 22, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	NA	EUT is powered from DC
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -2.8dB at 187.14MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is Fakra not a standard connector.

Note:

- For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:


Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Customer Facing Wi-Fi Module (CFWM)
Brand	
Test Model	84911790C
Sample Status	DV
Power Supply Rating	12Vdc
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDMA
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 144.4Mbps VHT20: up to 173.3Mbps 802.11ax: up to 286.8Mbps
Operating Frequency	2412~2462MHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11
Output Power	35.161mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Cable Supplied	NA

Note:

- The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function
802.11b	2TX
802.11g	2TX
802.11n (HT20)	2TX
VHT20	2TX
802.11ax (HE20)	2TX

* The bandwidth and modulation are similar for HT20 on 802.11n mode and HE20 on 802.11ax mode. Therefore the investigated worst case is the representative mode in test report. (Final test mode refer section 3.2.1)

- The EUT with follow antennas gain is listed as table below.

Type	Dipole				
Connector	Fakra				
Model	84623918				
Frequency (GHz)	2.4~2.4835	5.15~5.25	5.25~5.35	5.47~5.725	5.725~5.85
Gain (dBi)	2.70	2.49	2.63	2.88	3.43

*Detail antenna specification please refer to antenna photos/or drawings, including antenna dimensions.

- The EUT contains certified LTE module (Brand: Quectel, Model: AG521R-NA (FCC ID: VUI-DAV001)).

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	Note 2	√	-

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Note:

1. The EUT was positioned on the X-plane (antenna) during testing.
2. No need to concern of PLC due to the EUT is powered from DC.
3. For radiated emission (below 1GHz) test items chosen the worst maximum fundamental emission level channel.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Remark
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	-
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	-
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	-
	802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0	-

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Remark
-	802.11g	1 to 11	1	OFDM	BPSK	6.0	-

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Remark
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	-
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	-
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	-
	802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0	-

Test Condition:

Applicable to	Environmental Conditions	Input Power (System)	Tested by
RE≥1G	23 deg. C, 66% RH	12Vdc	Luis Lee
RE<1G	23 deg. C, 66% RH	12Vdc	Titan Hsu
APCM	25 deg. C, 60% RH	12Vdc	Chris Lin

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is ≥ 98%, duty factor is not required.


Duty cycle of test signal is < 98%, duty factor is required.

802.11b: Duty cycle of test signal is 100 %, duty factor is not required.

802.11g: Duty cycle = 1.390ms/1.426ms = 0.975, Duty factor = $10 * \log(1/0.975) = 0.11$

802.11n (HT20): Duty cycle = 1.296ms/1.333ms = 0.972, Duty factor = $10 * \log(1/0.972) = 0.12$

802.11ax (HE20): Duty cycle = 1.012ms/1.048ms = 0.966, Duty factor = $10 * \log(1/0.966) = 0.15$

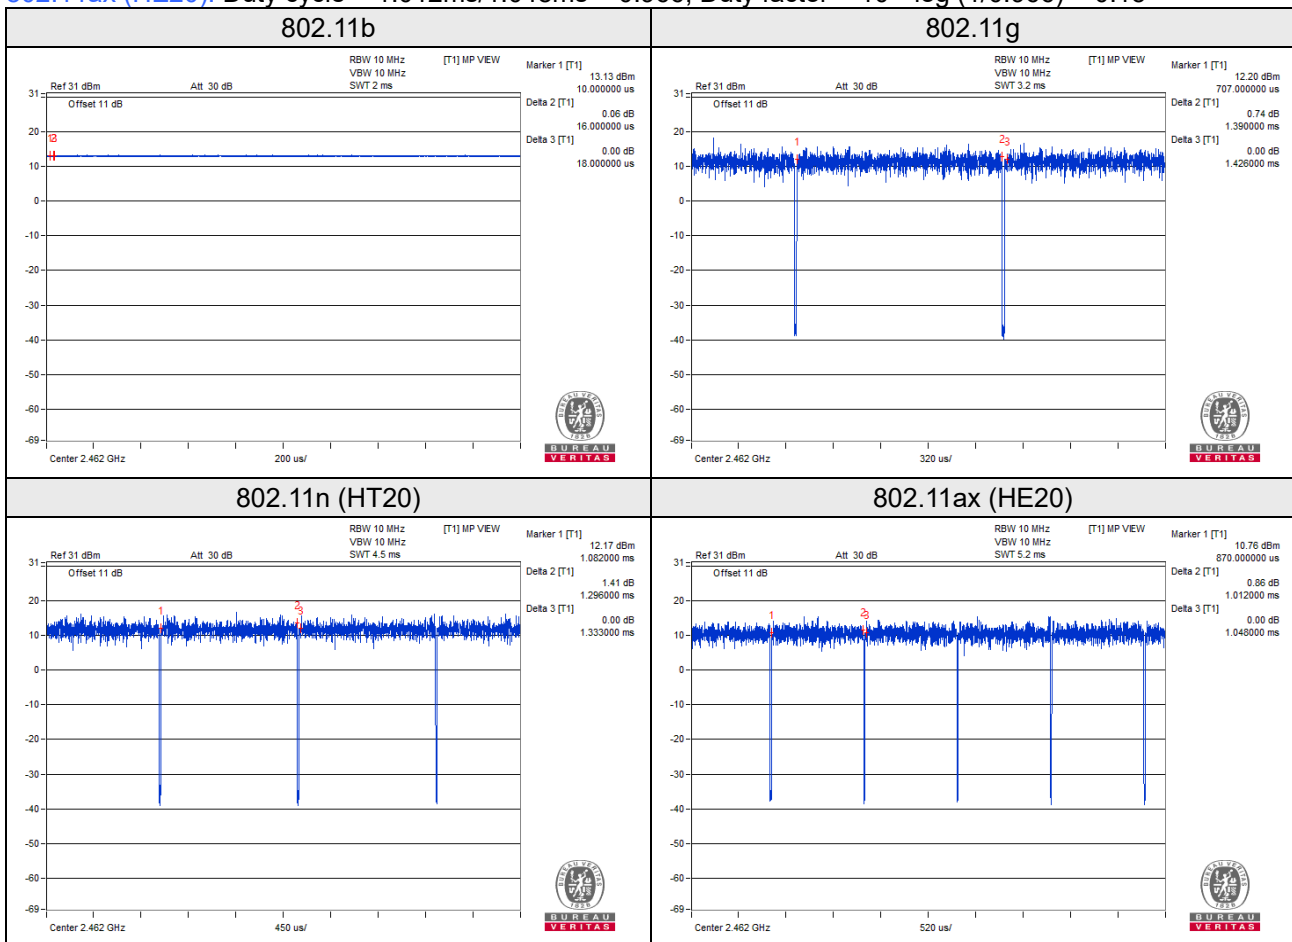

3.4 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Battery	YUASA	75D23R-CMF II	NA	NA	-
B.	Antenna	TE	84623918	NA	NA	Provided by client
C.	Antenna	Continental	85004261	NA	NA	Provided by client
D.	Metal Plate	NA	NA	NA	NA	Provided by client

Note: All power cords of the above support units are non-shielded (1.8m).

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Power cable	1	2	N	0	Provided by client 2M (With Power Supply 0.85M Cable, 0.3M Cable, 1.8M Cable)
2.	Combo B cable	1	5.2	N	0	Provided by client
3.	Combo A cable	1	5.2	N	0	Provided by client
4.	Rosenberger Harness CFWM WiFi	1	0.15	N	0	Provided by client
5.	Rosenberger Harness CFWM LTE	1	2.35	N	0	Provided by client
6.	Power cable	1	2	N	0	-

3.4.1 Configuration of System under Test

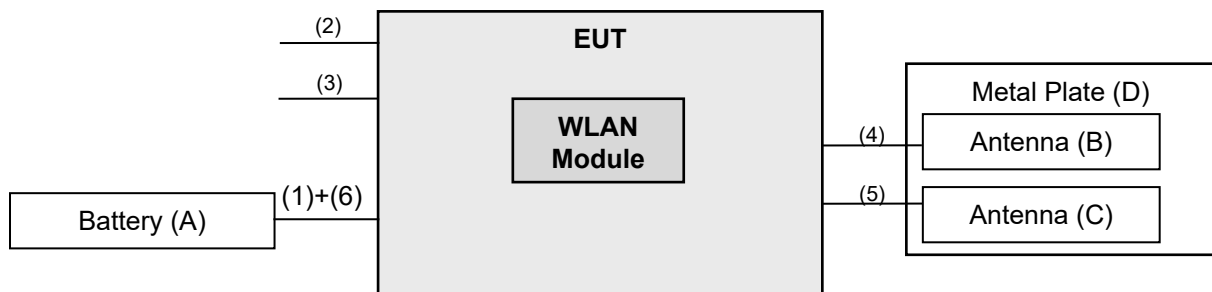

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Dec. 30, 2021	Dec. 29, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 15, 2021	Sep. 14, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Nov. 01, 2021	Oct. 31, 2022
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Oct. 26, 2021	Oct. 35, 2022
Loop Antenna TESEQ	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier Agilent (Below 1GHz)	8447D	2944A10631	Jun. 05, 2021	Jun. 04, 2022
Preamplifier KEYSIGHT (Above 1GHz)	83017A	MY53270295	Jun. 05, 2021	Jun. 04, 2022
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH4-01	Jul. 24, 2021	Jul. 23, 2022
RF Coaxial Cable EMCI	EMC102-KM-KM-3000	150929	Jul. 24, 2021	Jul. 23, 2022
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	Jul. 24, 2021	Jul. 23, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Jun. 05, 2021	Jun. 04, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Jun. 05, 2021	Jun. 04, 2022
Software BV ADT	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	Jan. 18, 2022	Jan. 17, 2023
Wideband Power Sensor KEYSIGHT	N1923A	MY58020002	Jan. 17, 2022	Jan. 16, 2023

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz. (802.11b: RBW = 1MHz, VBW = 10Hz; 802.11g, 802.11n (HT20), 802.11ax (HE20): RBW = 1MHz, VBW = 1kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

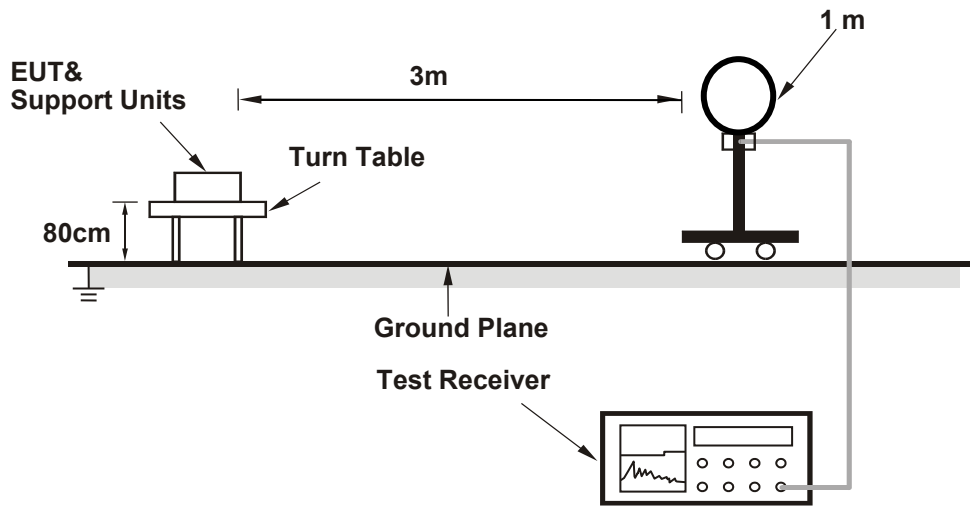

For Radiated emission 30MHz to 1GHz

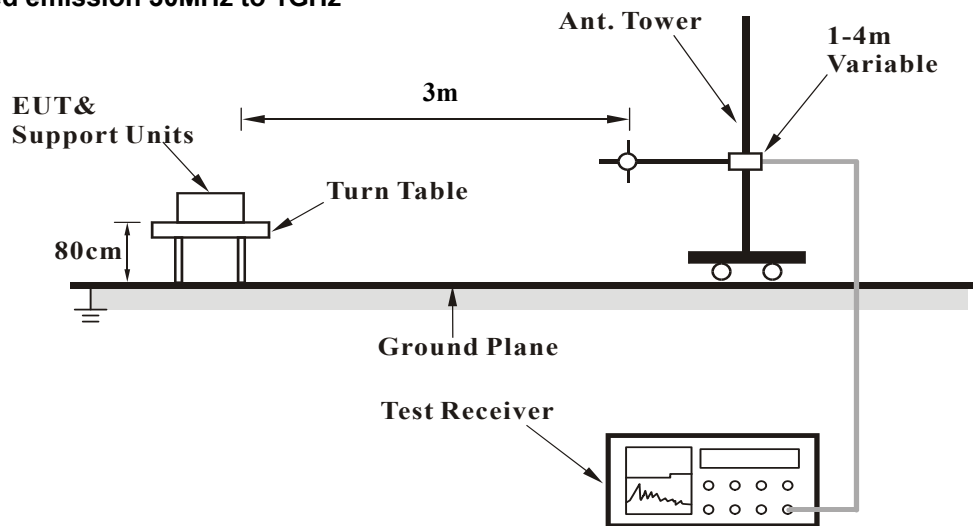

For Radiated emission above 1GHz

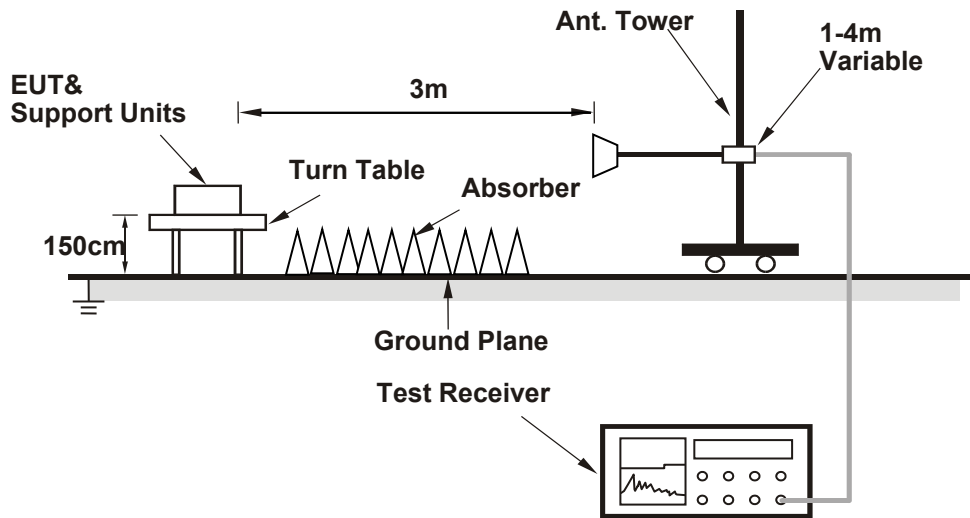

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. The EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz worst-Case data:

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.76 H	171	24.5	34.1
2	2390.00	45.4 AV	54.0	-8.6	1.76 H	171	11.3	34.1
3	*2412.00	96.3 PK			1.76 H	171	62.2	34.1
4	*2412.00	94.0 AV			1.76 H	171	59.9	34.1
5	4824.00	50.6 PK	74.0	-23.4	2.48 H	155	37.0	13.6
6	4824.00	38.9 AV	54.0	-15.1	2.48 H	155	25.3	13.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.9 PK	74.0	-15.1	1.00 V	50	24.8	34.1
2	2390.00	45.6 AV	54.0	-8.4	1.00 V	50	11.5	34.1
3	*2412.00	105.2 PK			1.00 V	50	71.1	34.1
4	*2412.00	102.7 AV			1.00 V	50	68.6	34.1
5	4824.00	50.9 PK	74.0	-23.1	1.86 V	239	37.3	13.6
6	4824.00	39.2 AV	54.0	-14.8	1.86 V	239	25.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	97.7 PK			1.79 H	170	63.4	34.3
2	*2437.00	94.8 AV			1.79 H	170	60.5	34.3
3	4874.00	50.6 PK	74.0	-23.4	2.52 H	147	37.0	13.6
4	4874.00	39.0 AV	54.0	-15.0	2.52 H	147	25.4	13.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.8 PK			1.05 V	53	72.5	34.3
2	*2437.00	104.0 AV			1.05 V	53	69.7	34.3
3	4874.00	51.1 PK	74.0	-22.9	1.82 V	245	37.5	13.6
4	4874.00	39.3 AV	54.0	-14.7	1.82 V	245	25.7	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.9 PK			1.80 H	176	64.6	34.3
2	*2462.00	96.3 AV			1.80 H	176	62.0	34.3
3	2483.50	58.5 PK	74.0	-15.5	1.80 H	176	24.2	34.3
4	2483.50	47.5 AV	54.0	-6.5	1.80 H	176	13.2	34.3
5	4924.00	50.4 PK	74.0	-23.6	2.26 H	143	37.0	13.4
6	4924.00	38.5 AV	54.0	-15.5	2.26 H	143	25.1	13.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.9 PK			1.55 V	77	71.6	34.3
2	*2462.00	103.3 AV			1.55 V	77	69.0	34.3
3	2483.50	58.9 PK	74.0	-15.1	1.55 V	77	24.6	34.3
4	2483.50	47.9 AV	54.0	-6.1	1.55 V	77	13.6	34.3
5	4924.00	50.9 PK	74.0	-23.1	1.92 V	236	37.5	13.4
6	4924.00	39.2 AV	54.0	-14.8	1.92 V	236	25.8	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.83 H	179	24.3	34.1
2	2390.00	45.4 AV	54.0	-8.6	1.83 H	179	11.3	34.1
3	*2412.00	101.8 PK			1.83 H	179	67.7	34.1
4	*2412.00	91.0 AV			1.83 H	179	56.9	34.1
5	4824.00	50.4 PK	74.0	-23.6	2.55 H	143	36.8	13.6
6	4824.00	38.7 AV	54.0	-15.3	2.55 H	143	25.1	13.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.11 V	165	32.0	34.1
2	2390.00	46.1 AV	54.0	-7.9	1.11 V	165	12.0	34.1
3	*2412.00	109.0 PK			1.11 V	165	74.9	34.1
4	*2412.00	98.9 AV			1.11 V	165	64.8	34.1
5	4824.00	51.2 PK	74.0	-22.8	1.79 V	230	37.6	13.6
6	4824.00	39.5 AV	54.0	-14.5	1.79 V	230	25.9	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.8 PK			1.78 H	168	68.5	34.3
2	*2437.00	92.1 AV			1.78 H	168	57.8	34.3
3	4874.00	50.3 PK	74.0	-23.7	2.49 H	141	36.7	13.6
4	4874.00	38.6 AV	54.0	-15.4	2.49 H	141	25.0	13.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.3 PK			1.08 V	163	76.0	34.3
2	*2437.00	100.2 AV			1.08 V	163	65.9	34.3
3	4874.00	51.1 PK	74.0	-22.9	1.80 V	224	37.5	13.6
4	4874.00	39.4 AV	54.0	-14.6	1.80 V	224	25.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.9 PK			1.78 H	180	66.6	34.3
2	*2462.00	91.5 AV			1.78 H	180	57.2	34.3
3	2483.50	63.9 PK	74.0	-10.1	1.78 H	180	29.6	34.3
4	2483.50	47.3 AV	54.0	-6.7	1.78 H	180	13.0	34.3
5	4824.00	50.1 PK	74.0	-23.9	2.49 H	155	36.5	13.6
6	4824.00	38.8 AV	54.0	-15.2	2.49 H	155	25.2	13.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.3 PK			1.09 V	161	73.0	34.3
2	*2462.00	98.0 AV			1.09 V	161	63.7	34.3
3	2483.50	68.6 PK	74.0	-5.4	1.09 V	161	34.3	34.3
4	2483.50	49.3 AV	54.0	-4.7	1.09 V	161	15.0	34.3
5	4924.00	51.2 PK	74.0	-22.8	1.75 V	236	37.8	13.4
6	4924.00	39.1 AV	54.0	-14.9	1.75 V	236	25.7	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.79 H	172	24.3	34.1
2	2390.00	45.4 AV	54.0	-8.6	1.79 H	172	11.3	34.1
3	*2412.00	99.1 PK			1.79 H	172	65.0	34.1
4	*2412.00	88.8 AV			1.79 H	172	54.7	34.1
5	4824.00	50.1 PK	74.0	-23.9	2.49 H	142	36.5	13.6
6	4824.00	38.6 AV	54.0	-15.4	2.49 H	142	25.0	13.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.7 PK	74.0	-10.3	1.00 V	168	29.6	34.1
2	2390.00	46.3 AV	54.0	-7.7	1.00 V	168	12.2	34.1
3	*2412.00	106.6 PK			1.00 V	168	72.5	34.1
4	*2412.00	97.0 AV			1.00 V	168	62.9	34.1
5	4824.00	51.5 PK	74.0	-22.5	1.78 V	225	37.9	13.6
6	4824.00	39.4 AV	54.0	-14.6	1.78 V	225	25.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	99.5 PK			1.78 H	173	65.2	34.3
2	*2437.00	90.2 AV			1.78 H	173	55.9	34.3
3	4874.00	50.0 PK	74.0	-24.0	2.38 H	140	36.4	13.6
4	4874.00	38.7 AV	54.0	-15.3	2.38 H	140	25.1	13.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.1 PK			1.03 V	166	73.8	34.3
2	*2437.00	98.5 AV			1.03 V	166	64.2	34.3
3	4874.00	51.1 PK	74.0	-22.9	1.79 V	238	37.5	13.6
4	4874.00	39.2 AV	54.0	-14.8	1.79 V	238	25.6	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.0 PK			1.77 H	170	65.7	34.3
2	*2462.00	90.3 AV			1.77 H	170	56.0	34.3
3	2483.50	60.7 PK	74.0	-13.3	1.77 H	170	26.4	34.3
4	2483.50	47.2 AV	54.0	-6.8	1.77 H	170	12.9	34.3
5	4924.00	50.0 PK	74.0	-24.0	2.39 H	127	36.6	13.4
6	4924.00	38.5 AV	54.0	-15.5	2.39 H	127	25.1	13.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.9 PK			1.03 V	162	72.6	34.3
2	*2462.00	96.9 AV			1.03 V	162	62.6	34.3
3	2483.50	65.7 PK	74.0	-8.3	1.03 V	162	31.4	34.3
4	2483.50	48.9 AV	54.0	-5.1	1.03 V	162	14.6	34.3
5	4924.00	51.0 PK	74.0	-23.0	1.77 V	241	37.6	13.4
6	4924.00	38.9 AV	54.0	-15.1	1.77 V	241	25.5	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.0 PK	74.0	-16.0	1.70 H	183	23.9	34.1
2	2390.00	45.1 AV	54.0	-8.9	1.70 H	183	11.0	34.1
3	*2412.00	100.0 PK			1.70 H	183	65.9	34.1
4	*2412.00	87.5 AV			1.70 H	183	53.4	34.1
5	4824.00	50.1 PK	74.0	-23.9	2.18 H	140	36.5	13.6
6	4824.00	38.9 AV	54.0	-15.1	2.18 H	140	25.3	13.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.2 PK	74.0	-13.8	1.04 V	163	26.1	34.1
2	2390.00	46.0 AV	54.0	-8.0	1.04 V	163	11.9	34.1
3	*2412.00	107.1 PK			1.04 V	163	73.0	34.1
4	*2412.00	94.8 AV			1.04 V	163	60.7	34.1
5	4824.00	51.2 PK	74.0	-22.8	1.79 V	230	37.6	13.6
6	4824.00	39.4 AV	54.0	-14.6	1.79 V	230	25.8	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.2 PK			1.72 H	180	66.9	34.3
2	*2437.00	89.0 AV			1.72 H	180	54.7	34.3
3	4874.00	50.0 PK	74.0	-24.0	2.29 H	137	36.4	13.6
4	4874.00	38.7 AV	54.0	-15.3	2.29 H	137	25.1	13.6

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.9 PK			1.08 V	166	74.6	34.3
2	*2437.00	96.6 AV			1.08 V	166	62.3	34.3
3	4874.00	51.1 PK	74.0	-22.9	1.77 V	234	37.5	13.6
4	4874.00	39.3 AV	54.0	-14.7	1.77 V	234	25.7	13.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.1 PK			1.76 H	178	65.8	34.3
2	*2462.00	88.0 AV			1.76 H	178	53.7	34.3
3	2483.50	58.6 PK	74.0	-15.4	1.76 H	178	24.3	34.3
4	2483.50	47.1 AV	54.0	-6.9	1.76 H	178	12.8	34.3
5	4924.00	49.8 PK	74.0	-24.2	2.27 H	136	36.4	13.4
6	4924.00	38.5 AV	54.0	-15.5	2.27 H	136	25.1	13.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.1 PK			1.13 V	162	72.8	34.3
2	*2462.00	95.2 AV			1.13 V	162	60.9	34.3
3	2483.50	64.0 PK	74.0	-10.0	1.13 V	162	29.7	34.3
4	2483.50	48.2 AV	54.0	-5.8	1.13 V	162	13.9	34.3
5	4924.00	51.2 PK	74.0	-22.8	1.77 V	238	37.8	13.4
6	4924.00	39.0 AV	54.0	-15.0	1.77 V	238	25.6	13.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.


Below 1GHz worst-case data:

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	64.92	30.1 QP	40.0	-9.9	1.00 H	6	40.1	-10.0
2	150.28	28.2 QP	43.5	-15.3	1.50 H	73	36.9	-8.7
3	189.08	34.6 QP	43.5	-8.9	1.50 H	97	45.8	-11.2
4	249.22	30.1 QP	46.0	-15.9	1.50 H	157	39.5	-9.4
5	499.48	36.5 QP	46.0	-9.5	1.00 H	85	40.4	-3.9
6	646.92	41.7 QP	46.0	-4.3	1.50 H	235	42.5	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

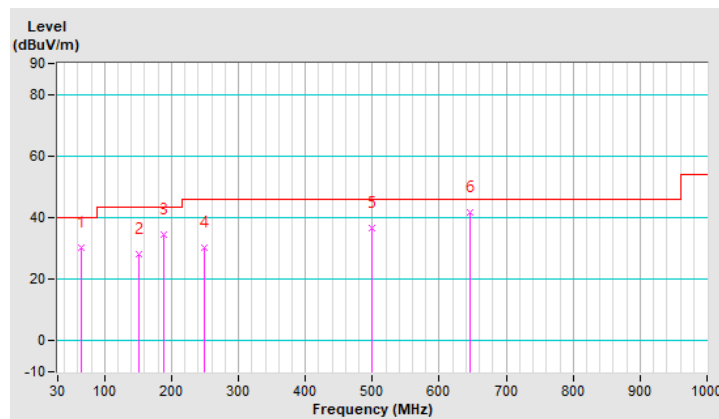


RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.88	36.7 QP	40.0	-3.3	1.00 V	59	46.8	-10.1
2	51.34	33.4 QP	40.0	-6.6	1.00 V	165	41.9	-8.5
3	146.40	36.9 QP	43.5	-6.6	1.00 V	84	45.7	-8.8
4	187.14	40.7 QP	43.5	-2.8	1.00 V	235	51.7	-11.0
5	286.08	29.5 QP	46.0	-16.5	1.00 V	225	37.4	-7.9
6	499.48	37.7 QP	46.0	-8.3	1.00 V	102	41.6	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

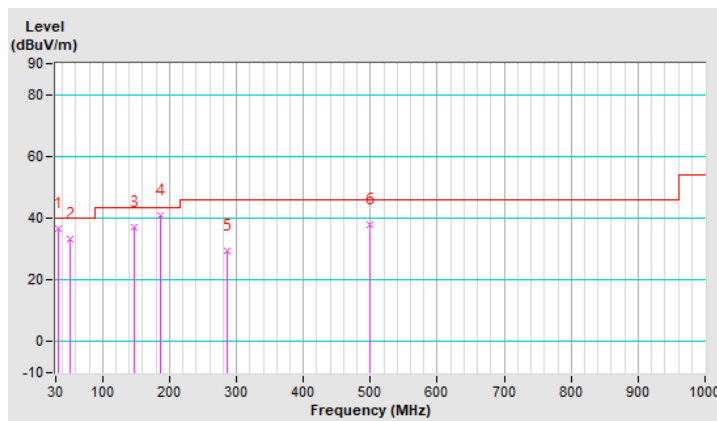


4.2 6dB Bandwidth Measurement

4.2.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 Test Setup

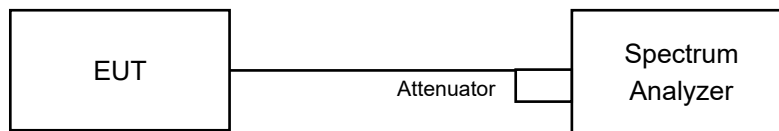

4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.2.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.2.5 Deviation from Test Standard

No deviation.

4.2.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.2.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	10.12	10.09	0.5	Pass
6	2437	10.10	10.11	0.5	Pass
11	2462	10.09	10.12	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.39	16.40	0.5	Pass
6	2437	16.40	16.40	0.5	Pass
11	2462	16.41	16.42	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.44	17.58	0.5	Pass
6	2437	17.56	17.61	0.5	Pass
11	2462	17.59	17.39	0.5	Pass

802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	18.39	18.47	0.5	Pass
6	2437	18.34	18.43	0.5	Pass
11	2462	18.51	18.46	0.5	Pass

Spectrum Plot of Worst Value


802.11b

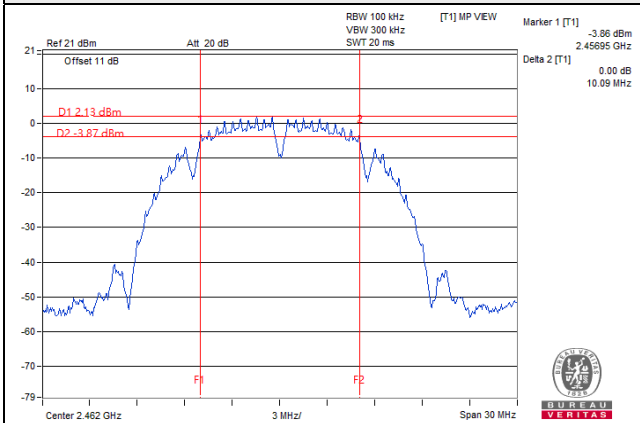


802.11g

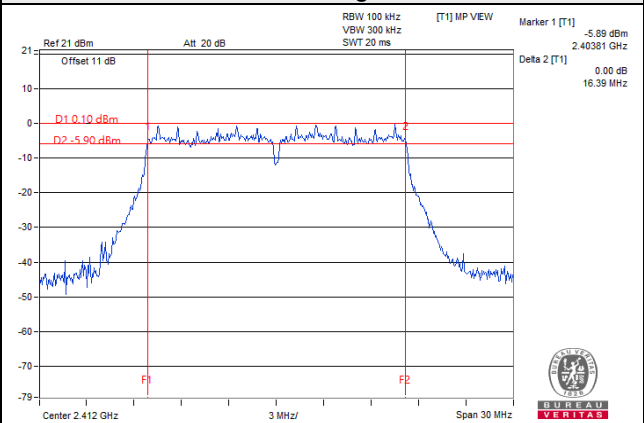

802.11n (HT20)

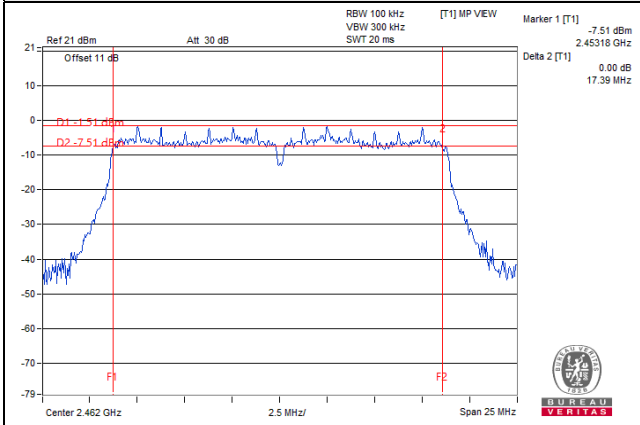

802.11ax (HE20)

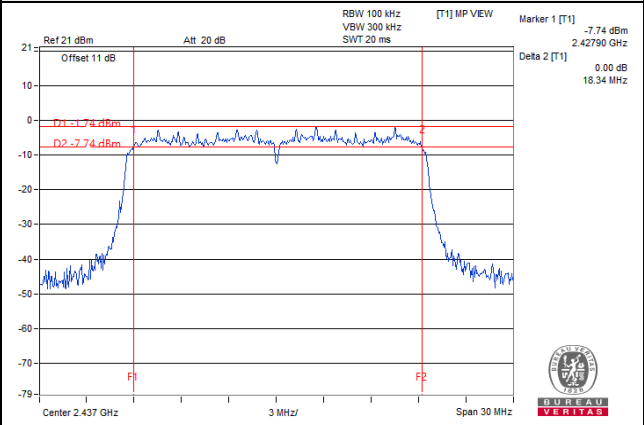

4.3 Conducted Output Power Measurement

4.3.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup

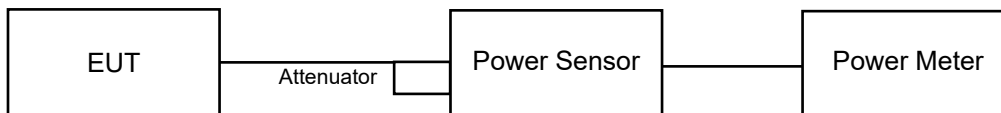

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

Same as item 4.2.6.

4.3.7 Test Results

802.11b

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	12.39	11.72	32.197	15.08	30	Pass
6	2437	12.97	11.86	35.161	15.46	30	Pass
11	2462	12.45	11.24	30.884	14.90	30	Pass

802.11g

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	11.66	10.32	25.420	14.05	30	Pass
6	2437	12.24	11.01	29.368	14.68	30	Pass
11	2462	10.45	9.32	19.642	12.93	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	10.99	10.67	24.228	13.84	30	Pass
6	2437	11.51	10.81	26.208	14.18	30	Pass
11	2462	10.96	9.87	22.179	13.46	30	Pass

802.11ax (HE20)


Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	8.18	8.90	14.339	11.57	30	Pass
6	2437	8.42	8.65	14.278	11.55	30	Pass
11	2462	8.15	8.97	14.420	11.59	30	Pass

4.4 Power Spectral Density Measurement

4.4.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.4.2 Test Setup

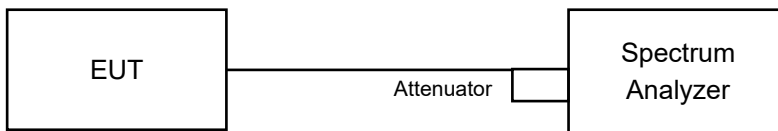

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedure

For AVG. power (duty cycle $\geq 98\%$)

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For Average Power (Duty cycle $< 98\%$)

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Condition

Same as item 4.2.6.

4.4.7 Test Results

802.11b

TX chain	Channel	Frequency (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-19.28	3.01	-16.27	8.00	Pass
	6	2437	-19.21	3.01	-16.20	8.00	Pass
	11	2462	-19.44	3.01	-16.43	8.00	Pass
1	1	2412	-20.08	3.01	-17.07	8.00	Pass
	6	2437	-20.00	3.01	-16.99	8.00	Pass
	11	2462	-20.52	3.01	-17.51	8.00	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = 2.7dBi + 10log(2)=5.71dBi < 6dBi, so the power spectral density limit is not reduced.

802.11g

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-20.09	3.01	0.11	-16.97	8.00	Pass
	6	2437	-21.18	3.01	0.11	-18.06	8.00	Pass
	11	2462	-22.40	3.01	0.11	-19.28	8.00	Pass
1	1	2412	-21.67	3.01	0.11	-18.55	8.00	Pass
	6	2437	-22.29	3.01	0.11	-19.17	8.00	Pass
	11	2462	-23.82	3.01	0.11	-20.70	8.00	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = 2.7dBi + 10log(2)=5.71dBi < 6dBi, so the power spectral density limit is not reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-21.33	3.01	0.12	-18.20	8.00	Pass
	6	2437	-20.99	3.01	0.12	-17.86	8.00	Pass
	11	2462	-21.64	3.01	0.12	-18.51	8.00	Pass
1	1	2412	-21.68	3.01	0.12	-18.55	8.00	Pass
	6	2437	-21.06	3.01	0.12	-17.93	8.00	Pass
	11	2462	-22.66	3.01	0.12	-19.53	8.00	Pass

Note:


1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = 2.7dBi + 10log(2)=5.71dBi < 6dBi, so the power spectral density limit is not reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE20)

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-24.44	3.01	0.15	-21.28	8.00	Pass
	6	2437	-24.14	3.01	0.15	-20.98	8.00	Pass
	11	2462	-24.07	3.01	0.15	-20.91	8.00	Pass
1	1	2412	-24.77	3.01	0.15	-21.61	8.00	Pass
	6	2437	-24.81	3.01	0.15	-21.65	8.00	Pass
	11	2462	-24.43	3.01	0.15	-21.27	8.00	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = 2.7dBi + 10log(2)=5.71dBi < 6dBi, so the power spectral density limit is not reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

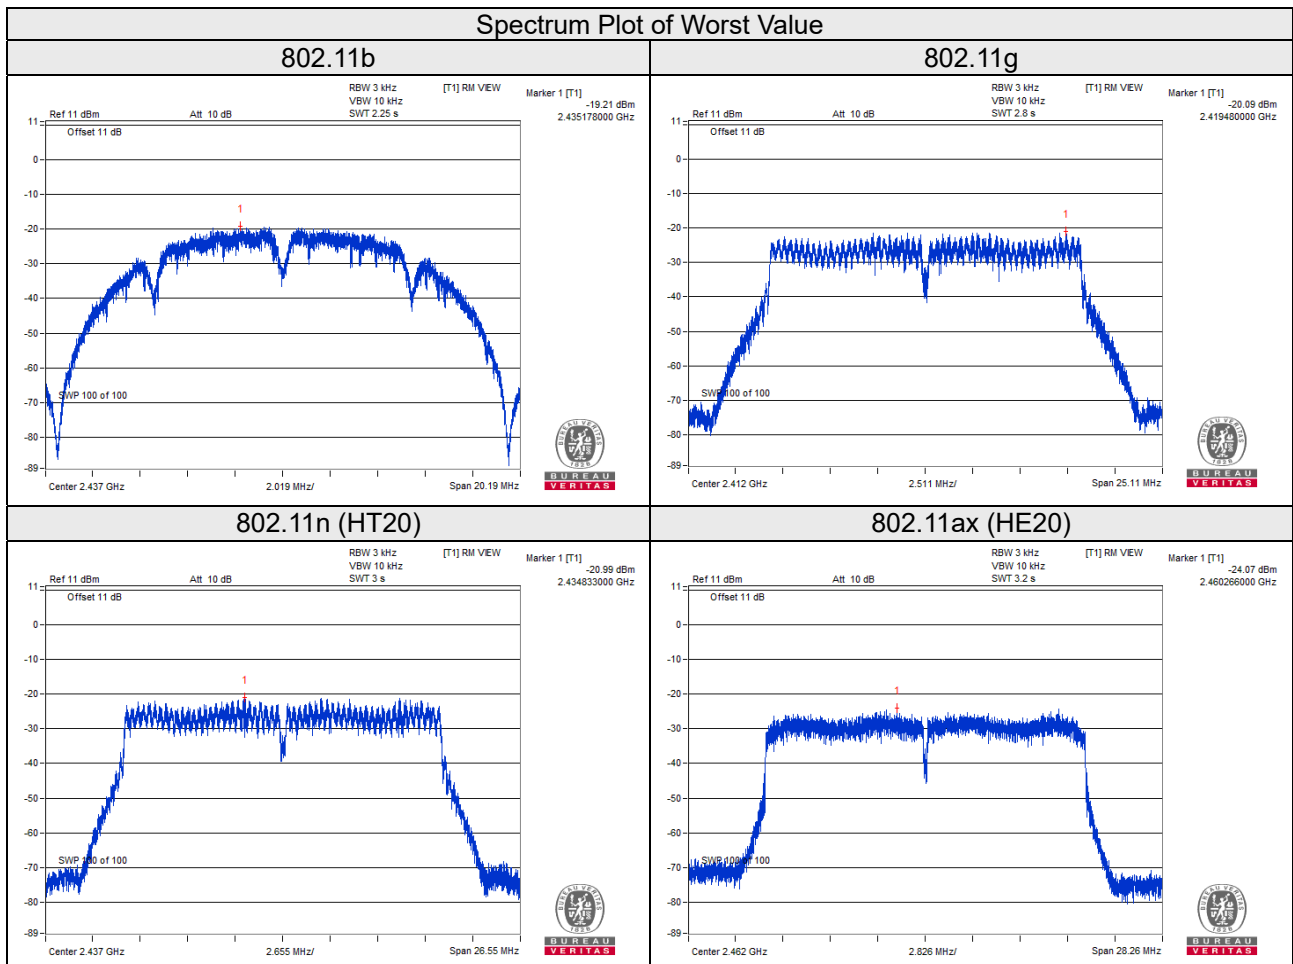


4.5 Conducted Out of Band Emission Measurement

4.5.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 Test Setup

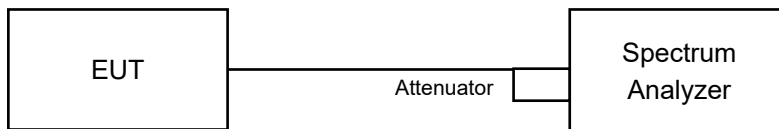

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as item 4.2.6.



4.5.7 Test Results

The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

[802.11b_Chain 0](#)



CH 1

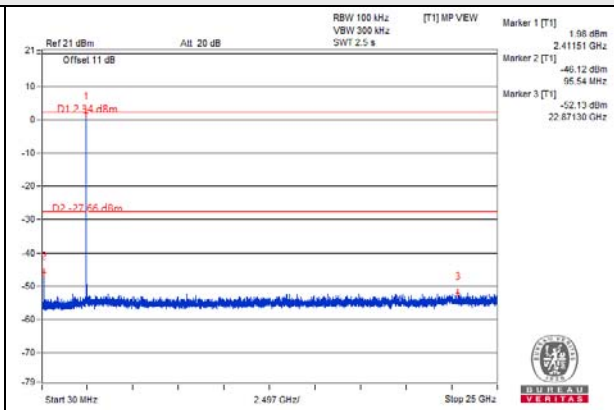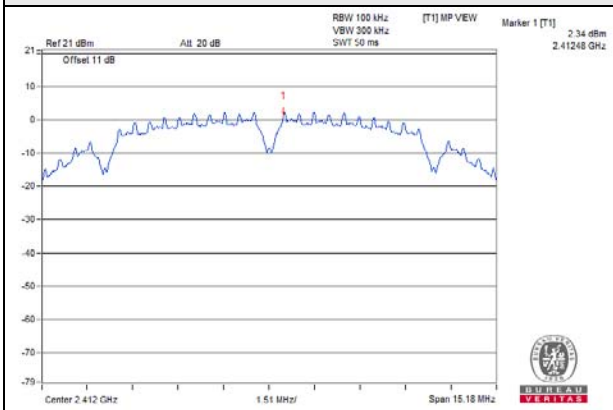


CH 6

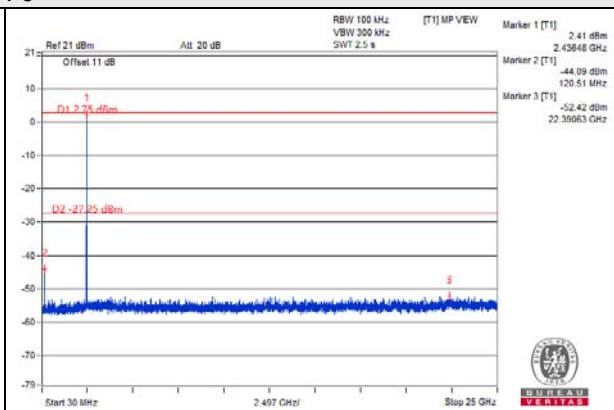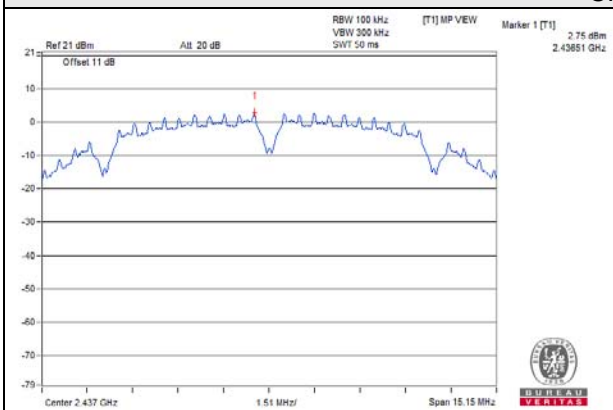


CH 11

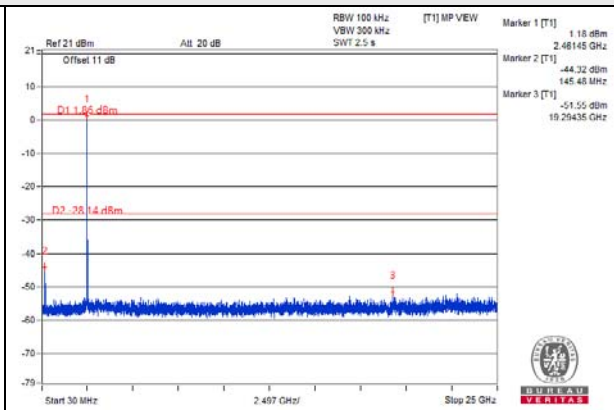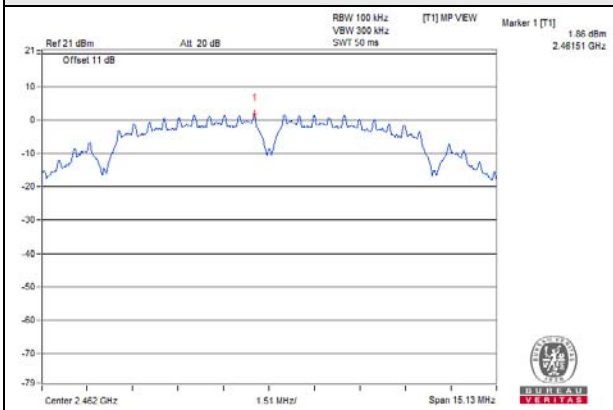

CH 1 Band edge


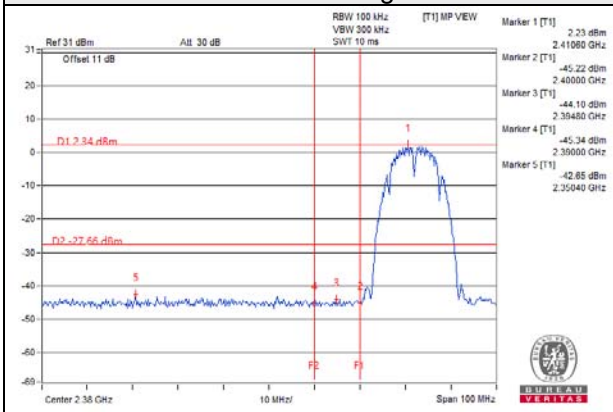


CH 11 Band edge


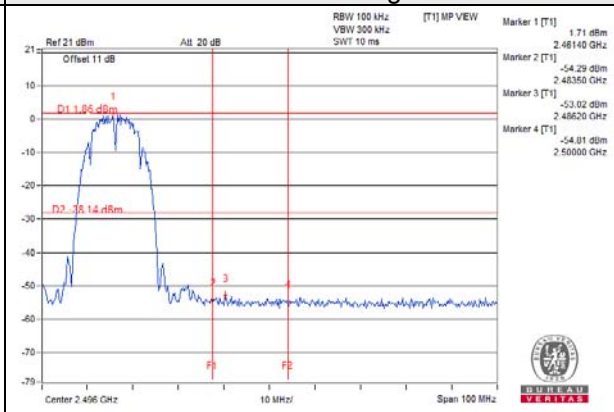


802.11b_Chain 1



CH 1

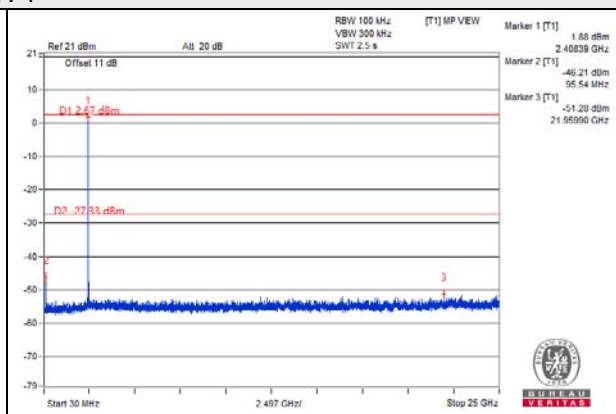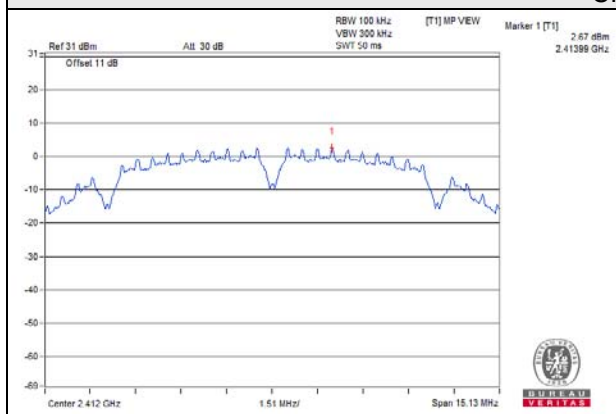


CH 6

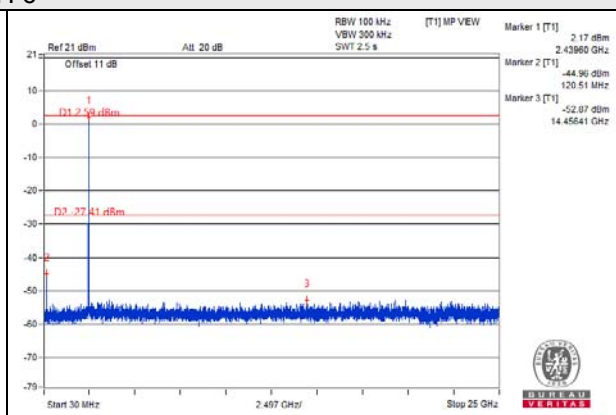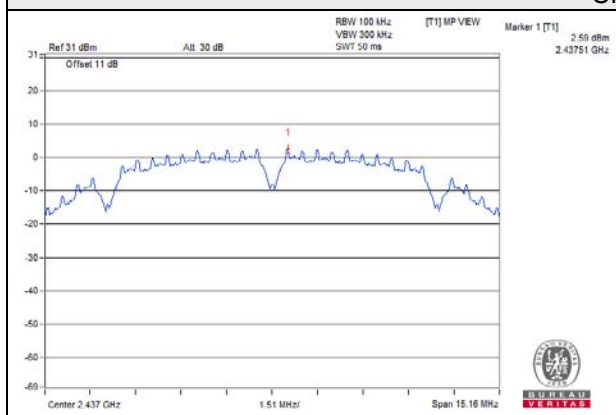


CH 11

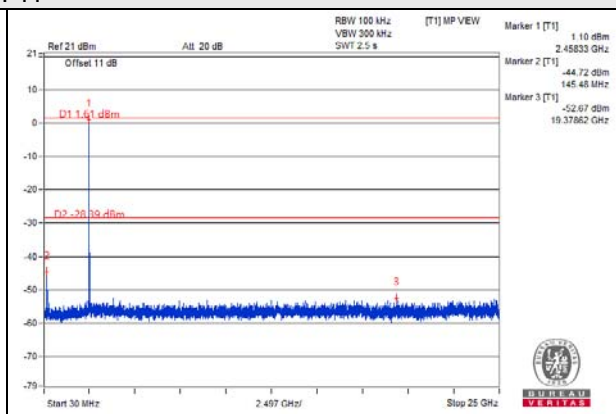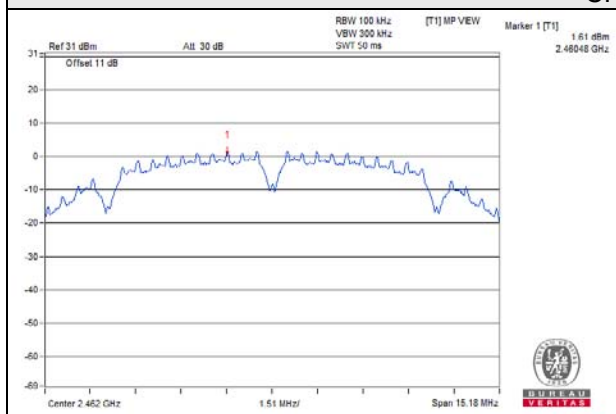

CH 1 Band edge


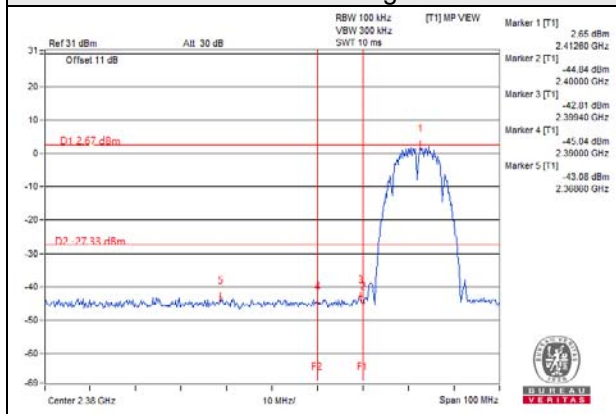


CH 11 Band edge


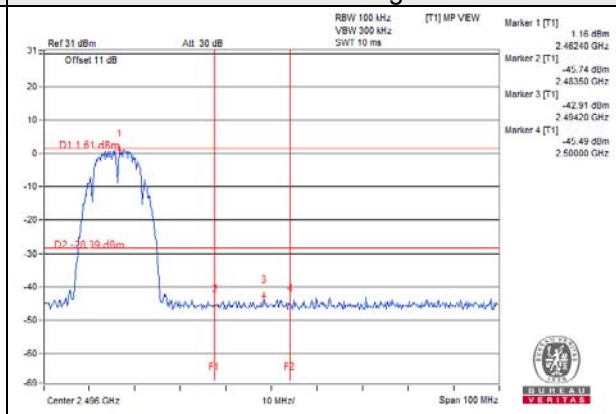


802.11g_Chain 0



CH 1

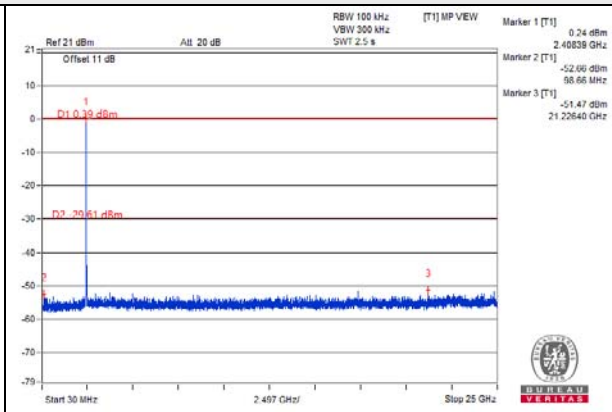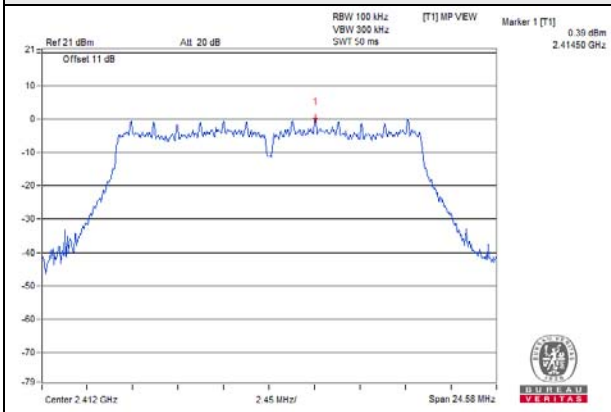


CH 6

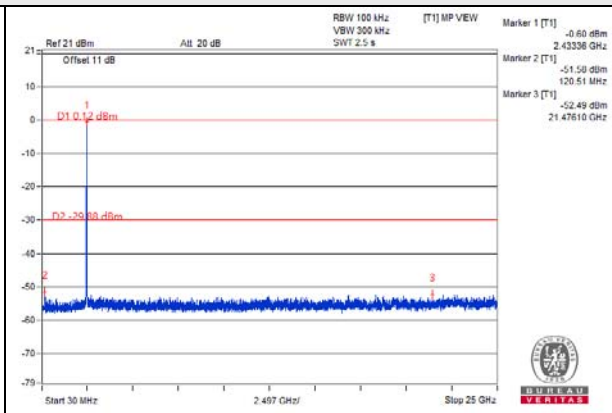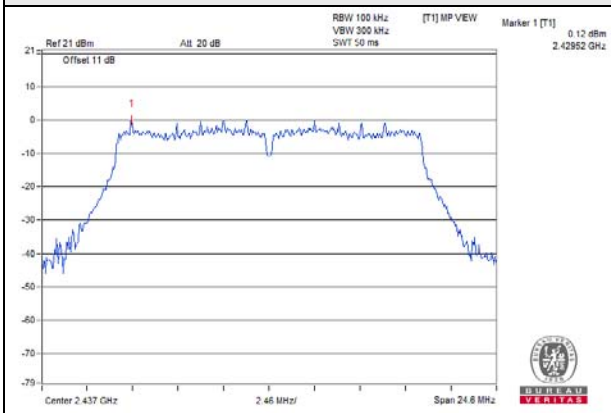


CH 11

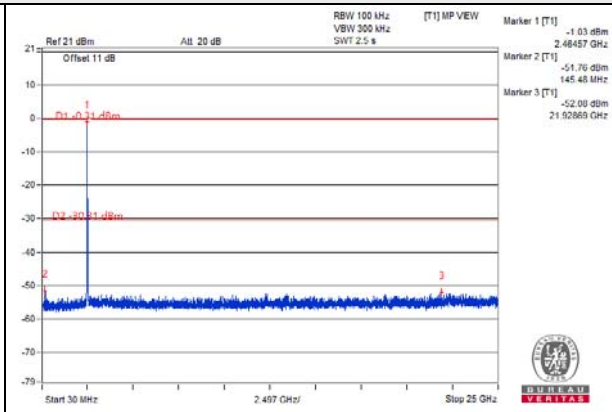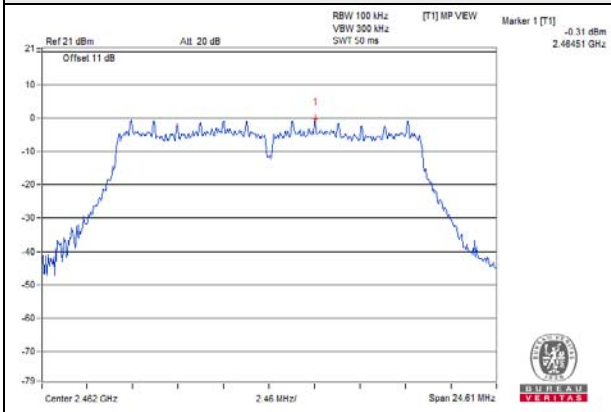


CH 1 Band edge

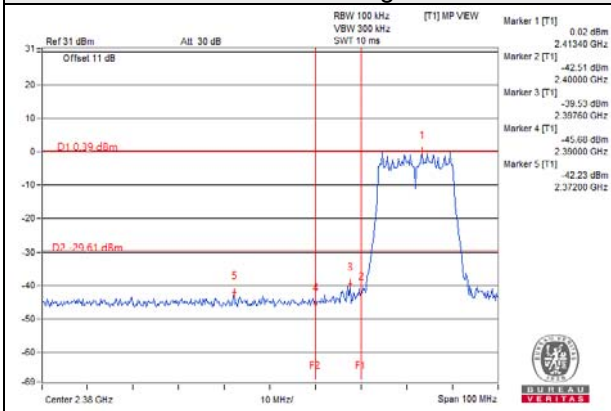

CH 11 Band edge


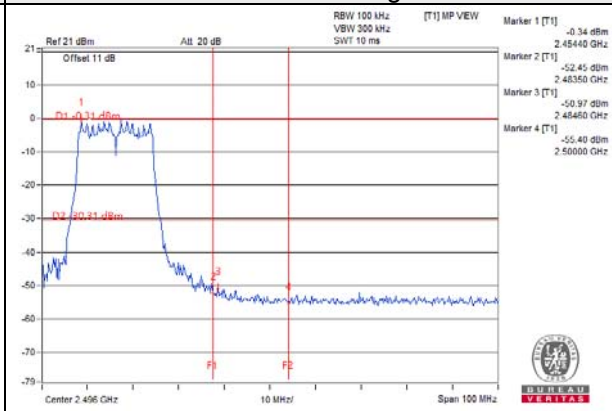


802.11g_Chain 1


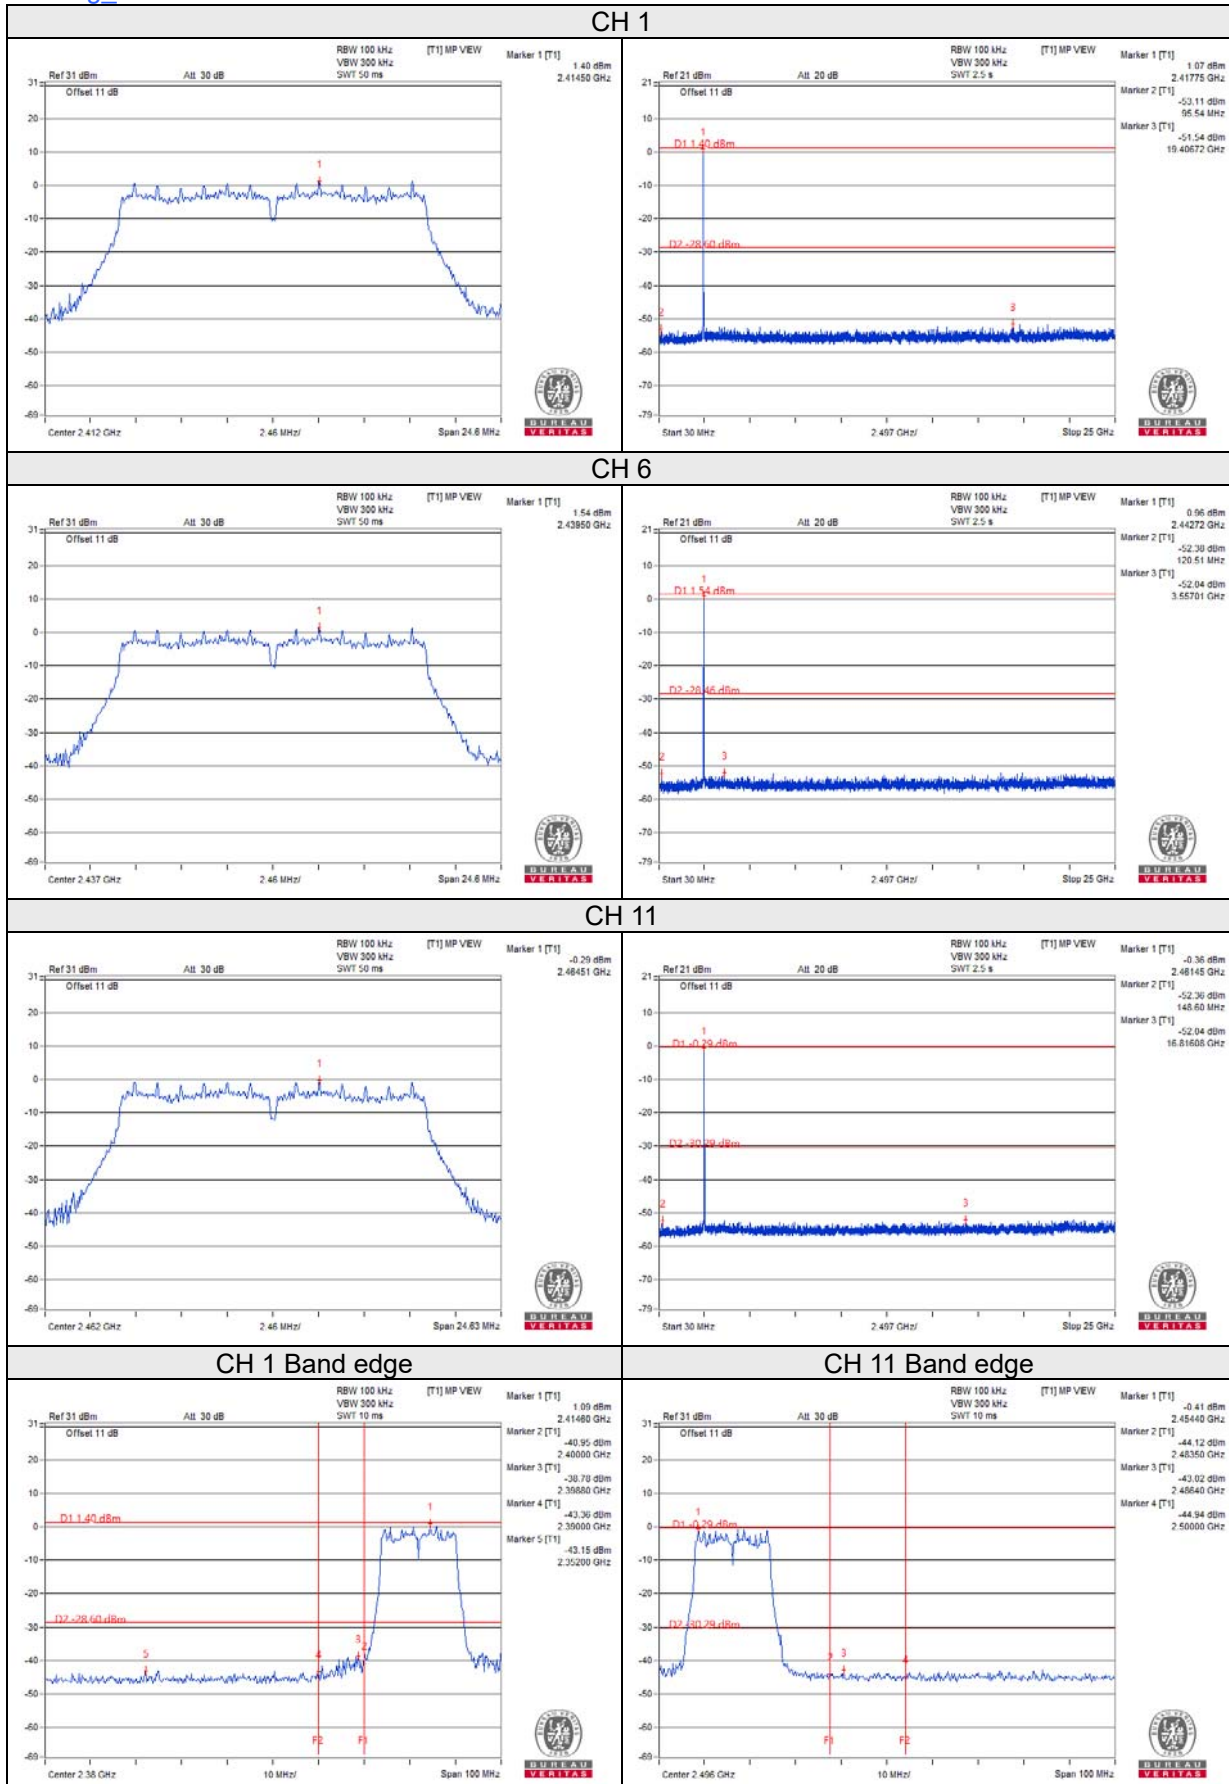


802.11n (HT20)_Chain 0



CH 1

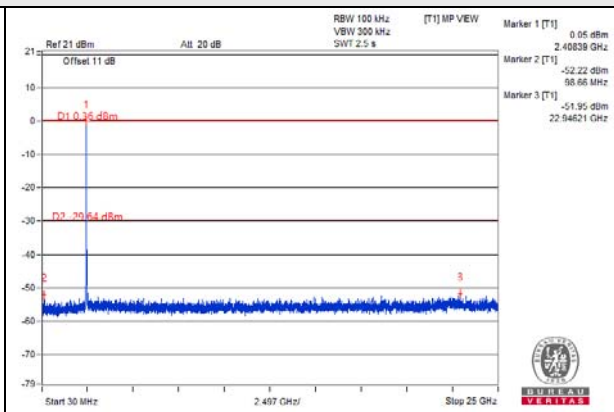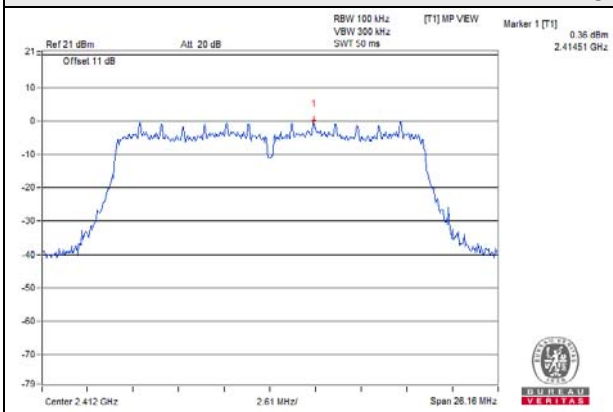


CH 6

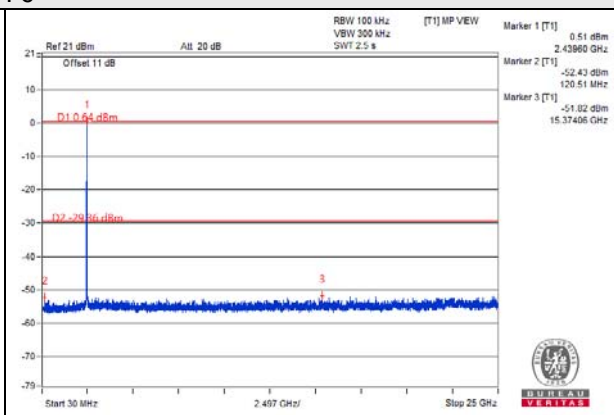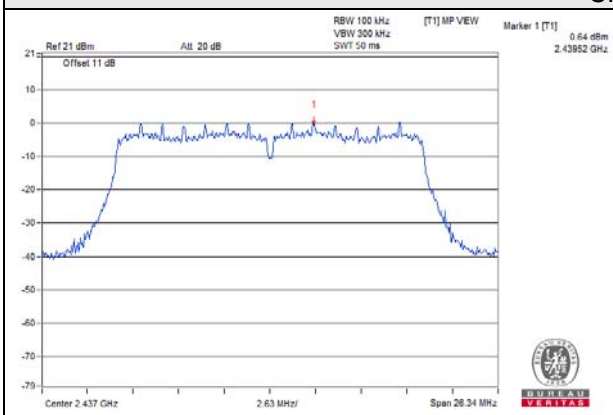


CH 11

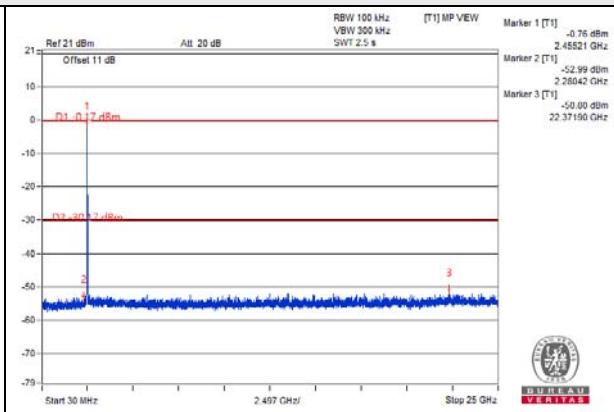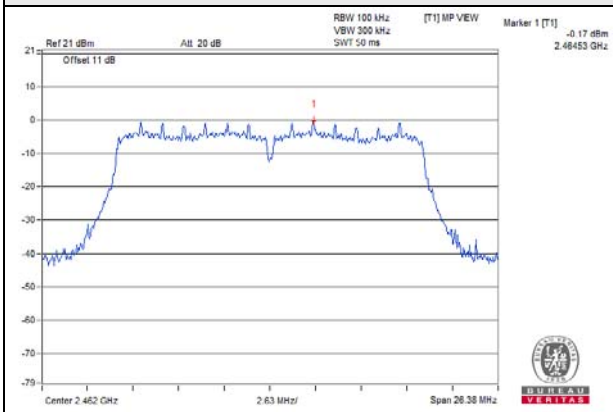


CH 1 Band edge

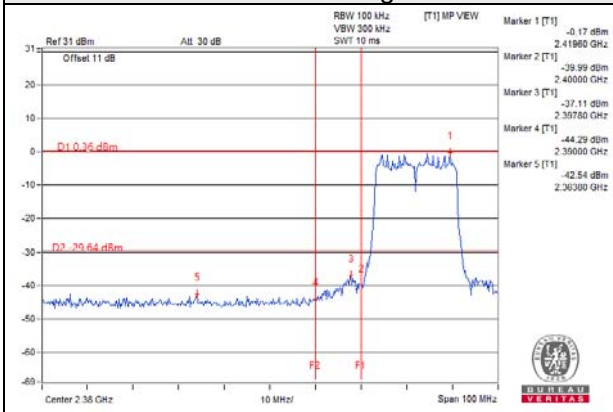

CH 11 Band edge


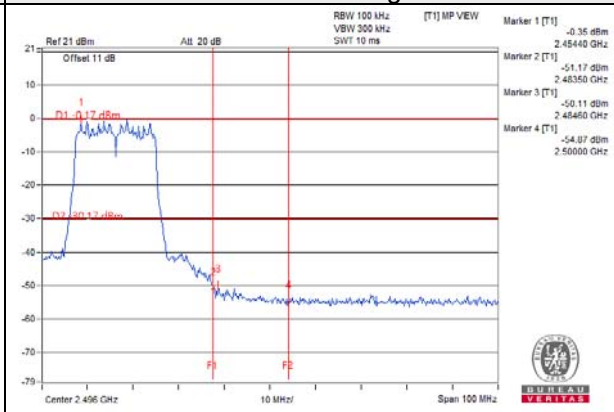


802.11n (HT20)_Chain 1


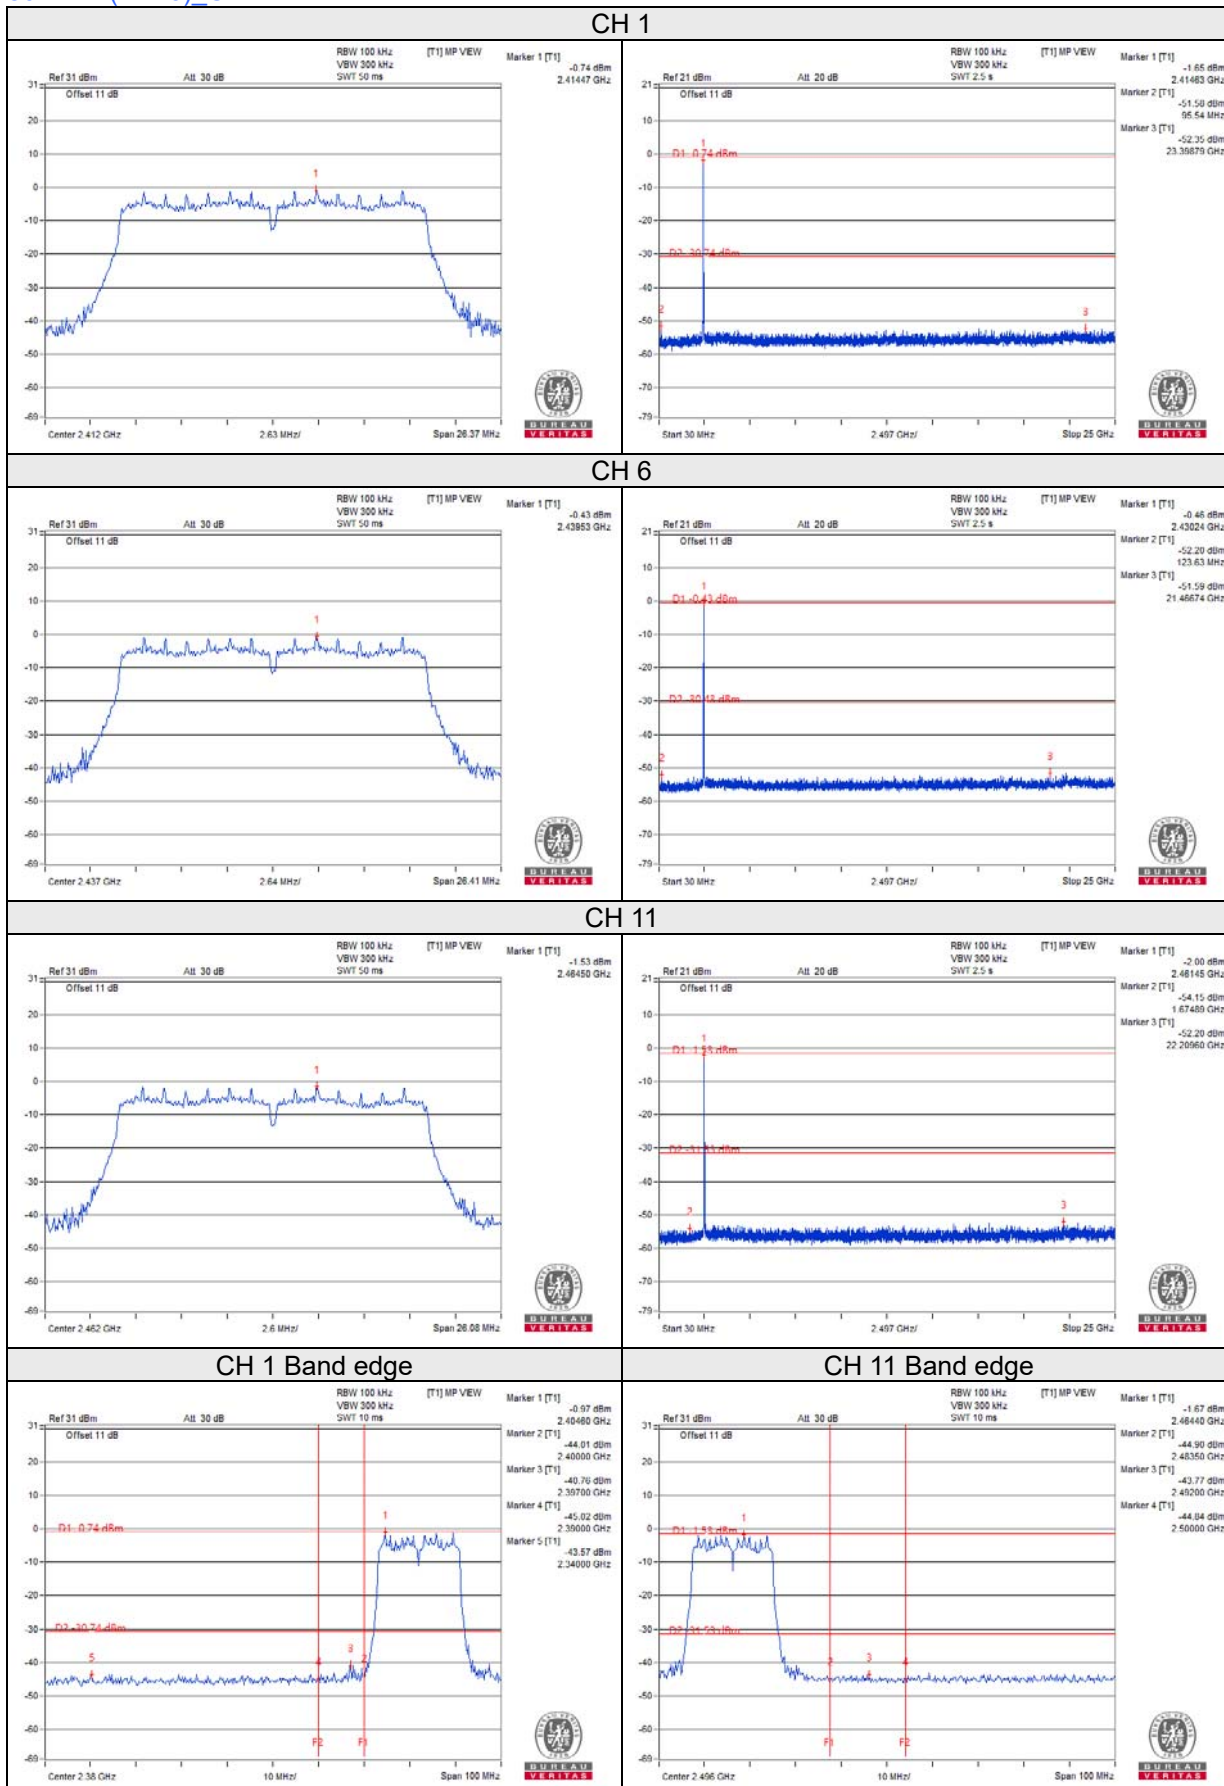


802.11ax (HE20)_Chain 0



CH 1

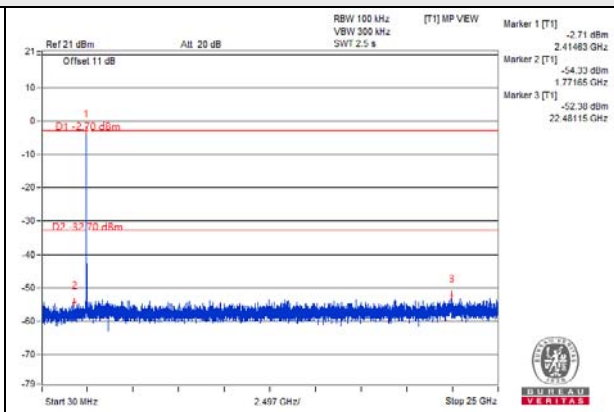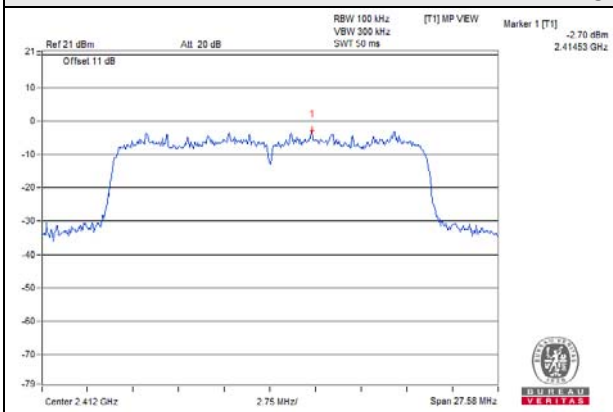


CH 6

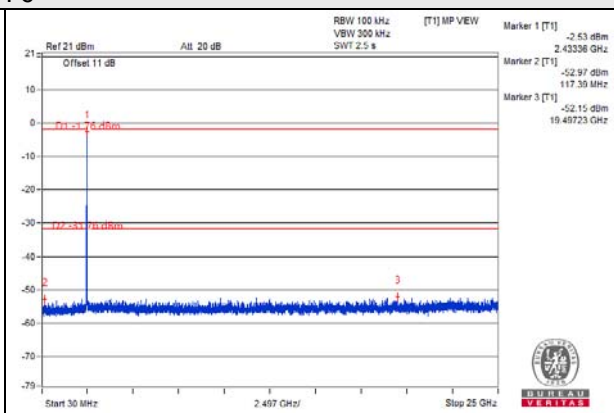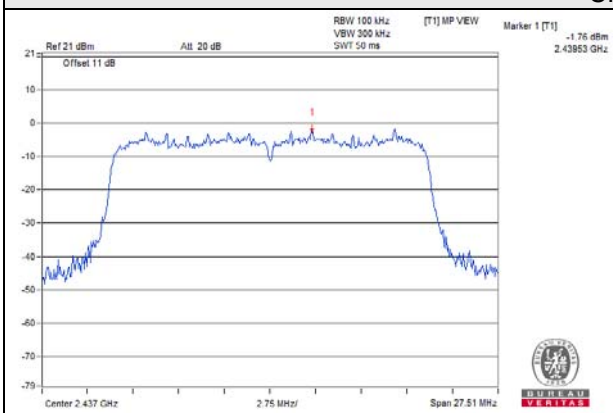


CH 11

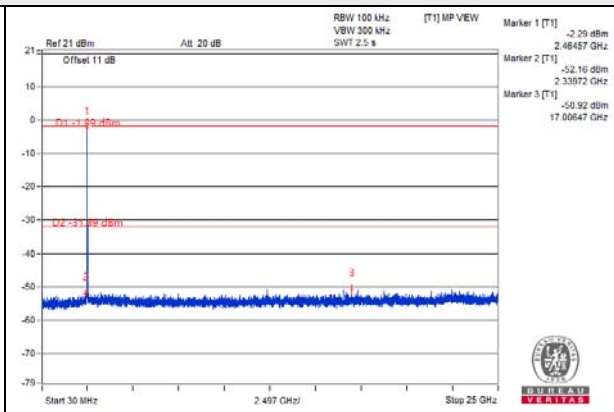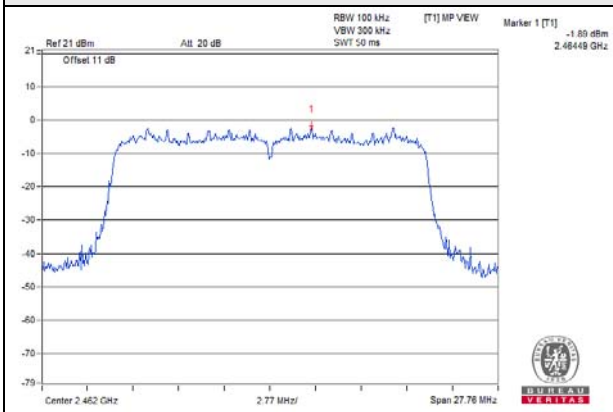

CH 1 Band edge


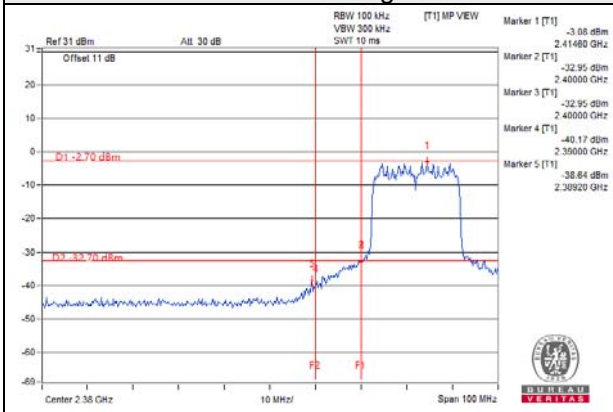


CH 11 Band edge


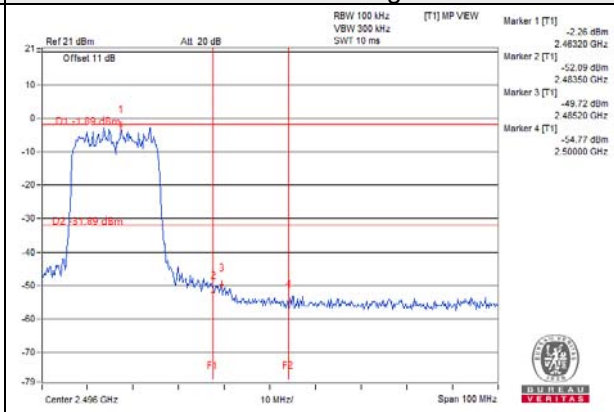


802.11ax (HE20)_Chain 1



CH 1

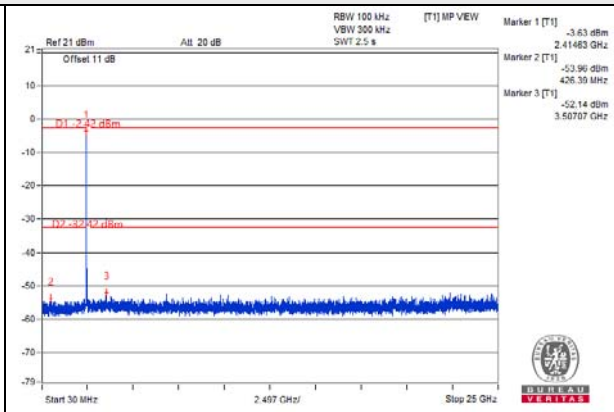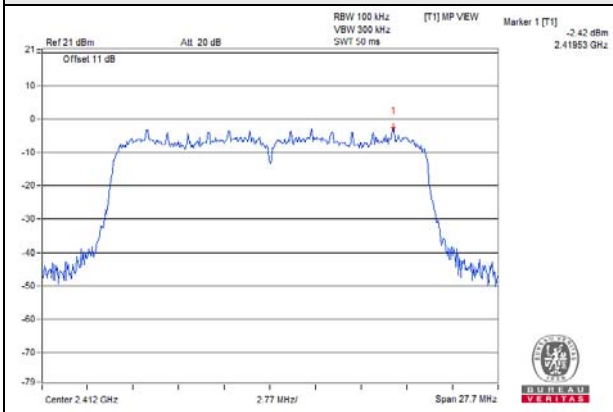


CH 6

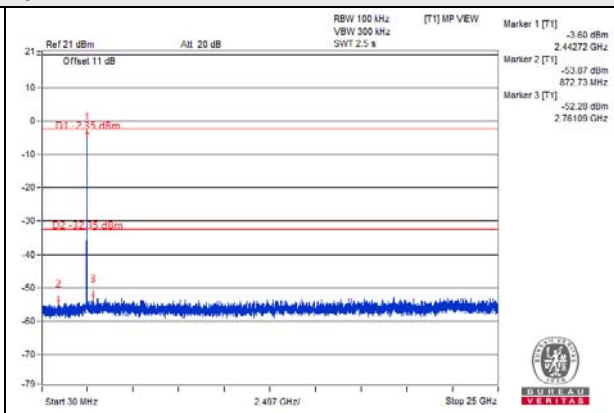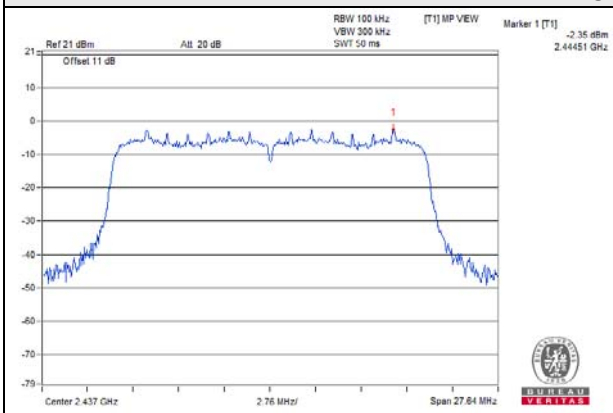


CH 11

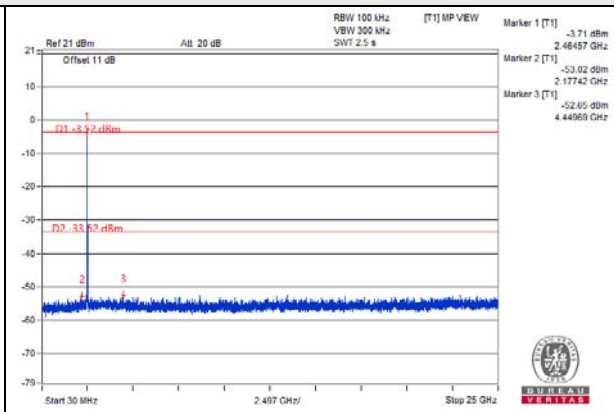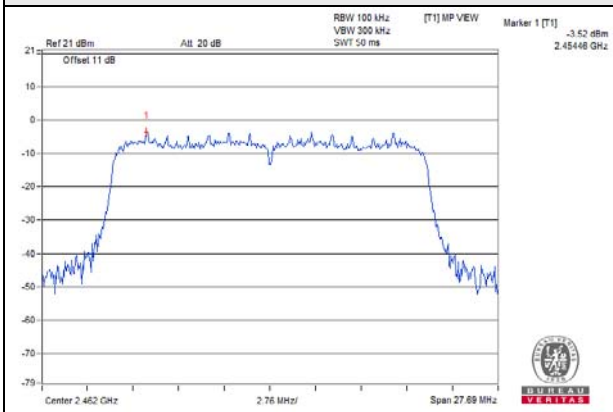

CH 1 Band edge

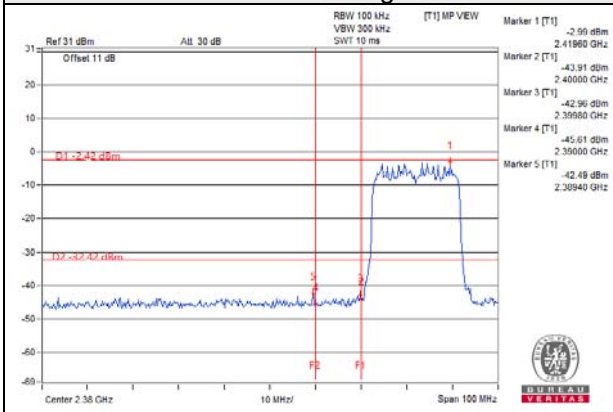


CH 11 Band edge

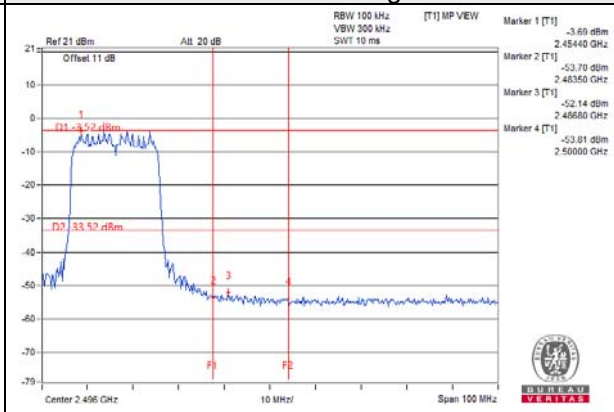


5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Annex A- Band Edge Measurement

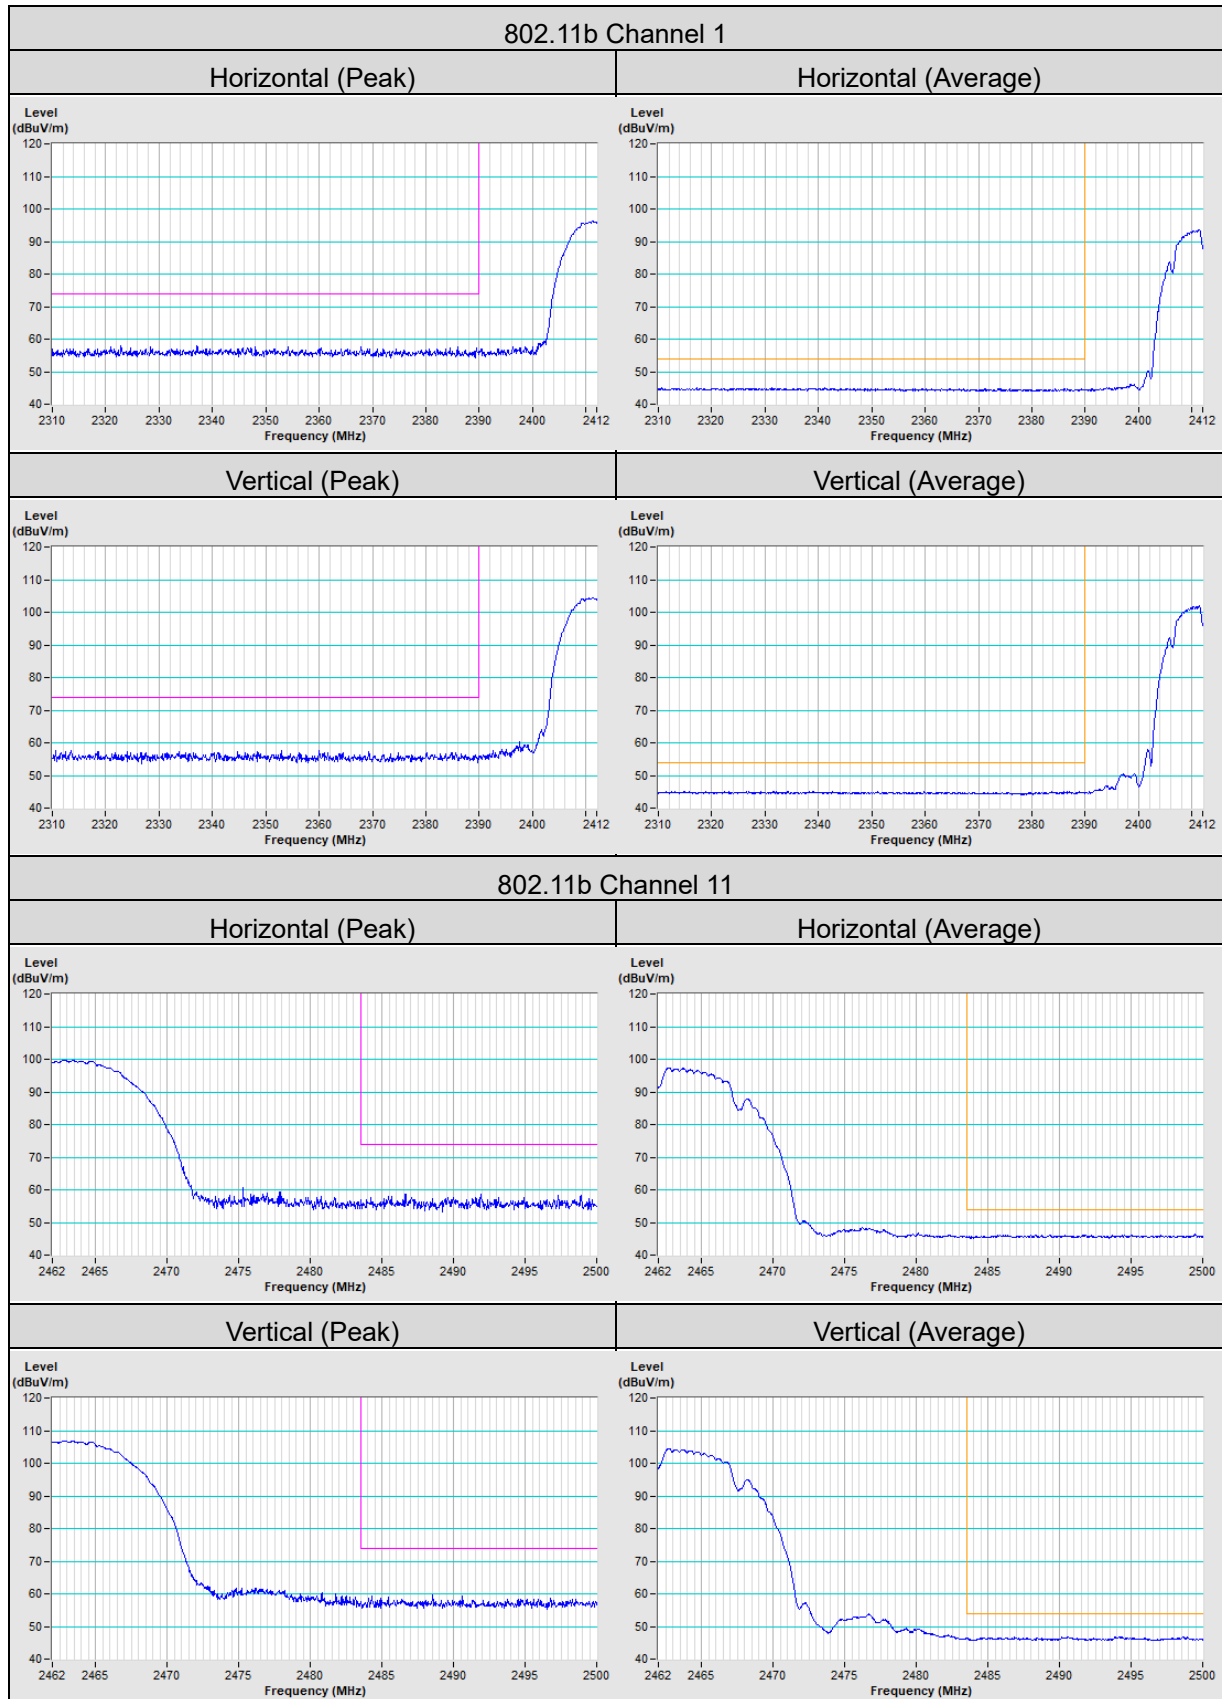

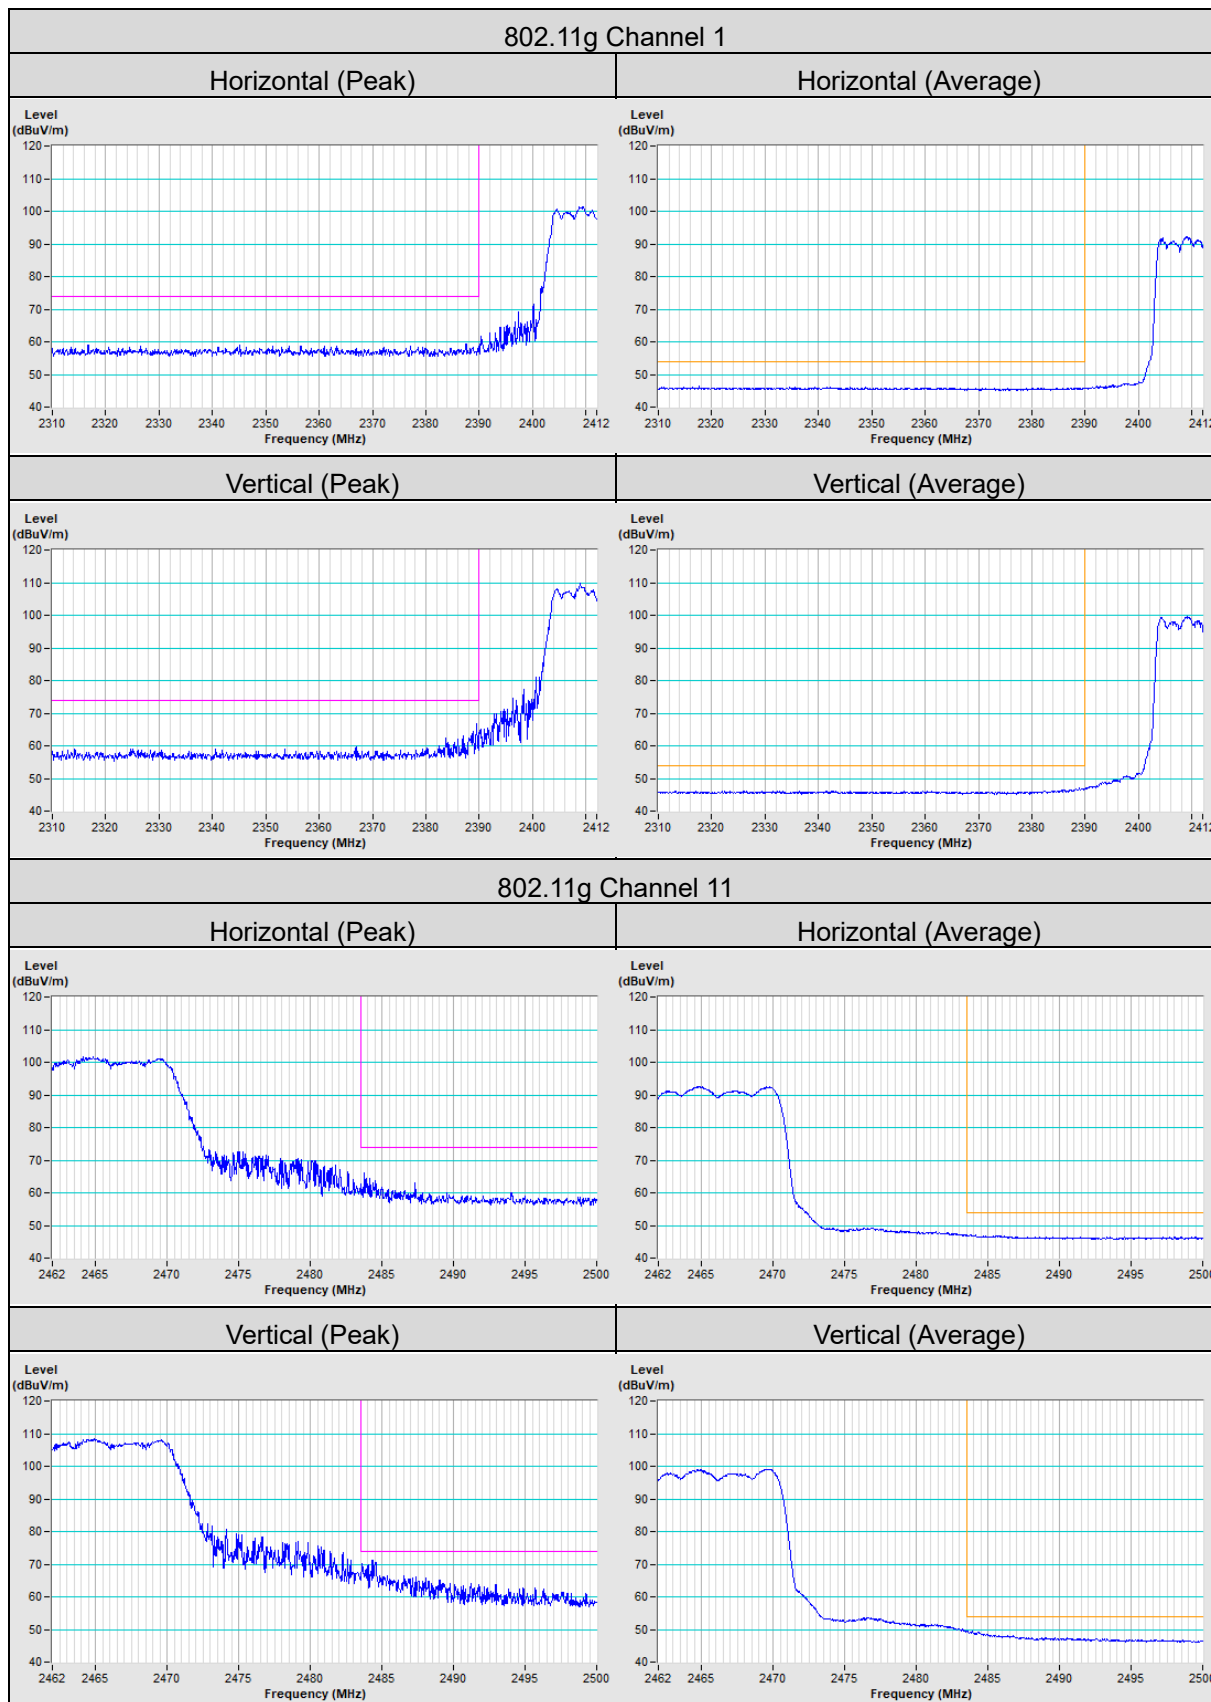

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---