


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	54%
Test Engineer	Alvin Li	Configurations	2.4G + 5G

Horizontal

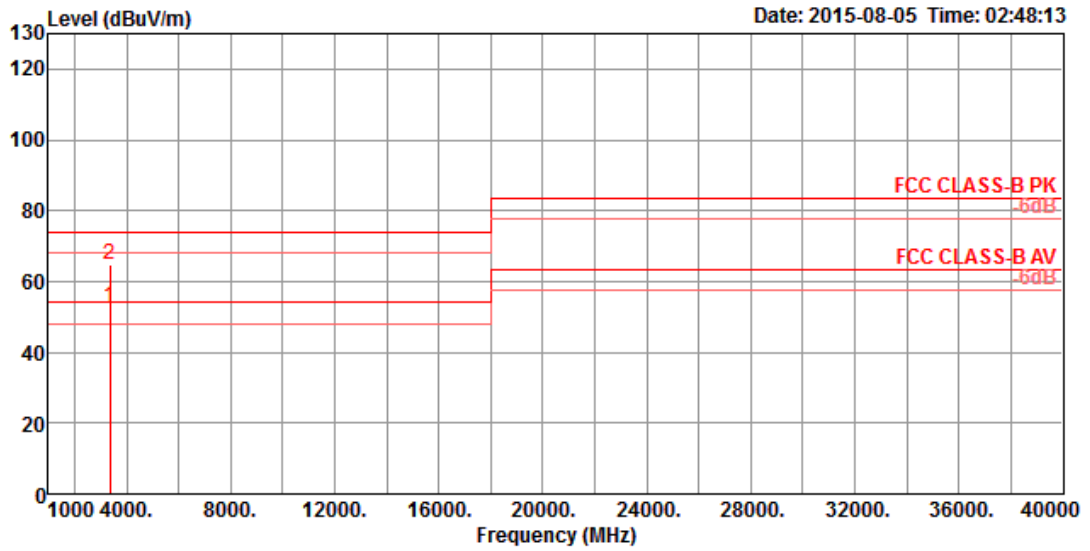

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3346.74	52.89	54.00	-1.11	54.05	4.59	28.67	34.42	132	275	Average	HORIZONTAL
2	3348.11	64.65	74.00	-9.35	65.81	4.59	28.67	34.42	132	275	Peak	HORIZONTAL

Vertical

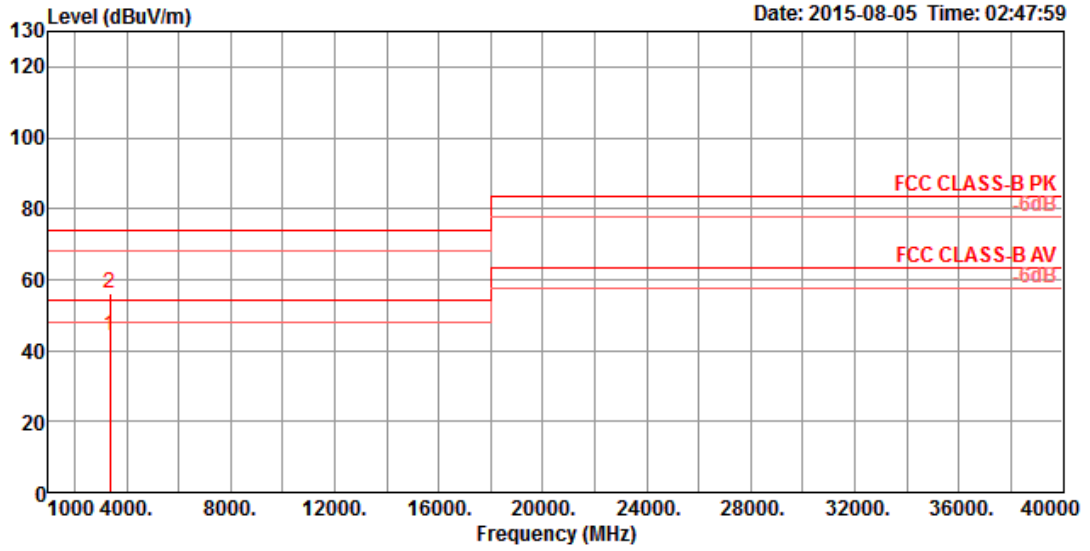

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3349.20	44.35	54.00	-9.65	45.51	4.59	28.67	34.42	153	298	Average	VERTICAL
2	3350.43	56.19	74.00	-17.81	57.35	4.59	28.67	34.42	153	298	Peak	VERTICAL