


## Appendix B. Radiated Emission Co-location Report

### 1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	55%
Test Engineer	Owen Hsu	Configurations	2.4G + 5G

Horizontal

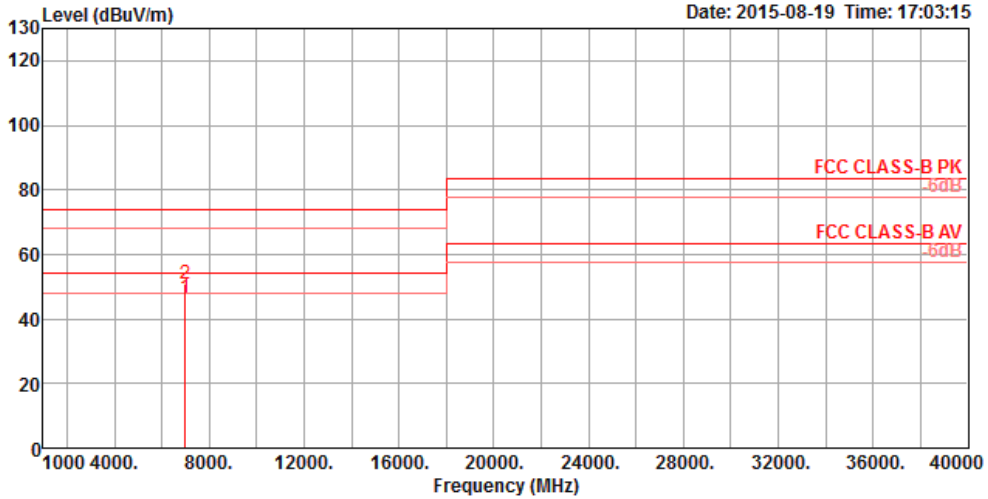

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	6986.60	46.63	54.00	-7.37	38.63	6.69	35.30	33.99	150	360	Average	HORIZONTAL
2	6986.60	50.63	74.00	-23.37	42.63	6.69	35.30	33.99	150	360	Peak	HORIZONTAL

Vertical

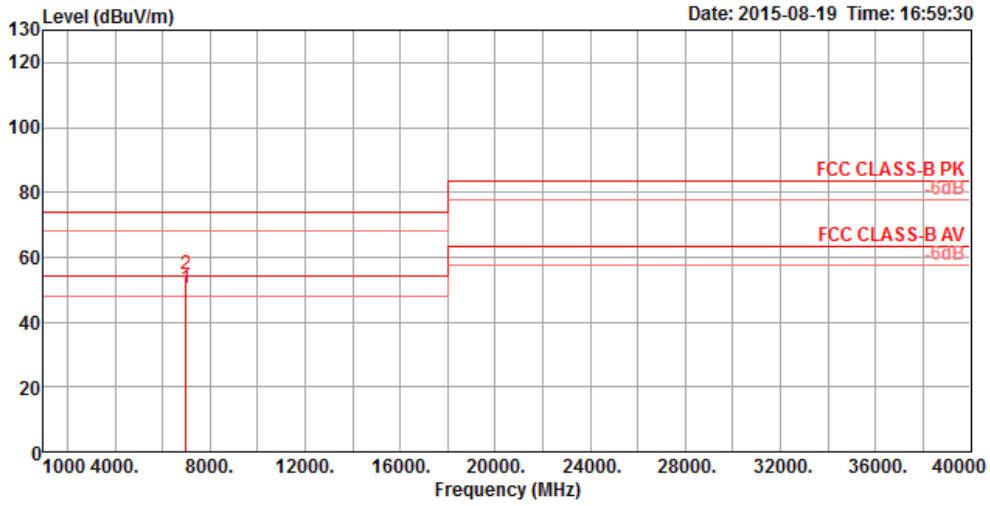

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	6986.60	50.28	54.00	-3.72	42.28	6.69	35.30	33.99	150	360	Average	VERTICAL
2	6986.60	54.83	74.00	-19.17	46.83	6.69	35.30	33.99	150	360	Peak	VERTICAL