

MEASUREMENT REPORT

of

Wireless ADSL 2+

Applicant : PEGATRON CORPORATION
EUT : Wireless ADSL 2+
Model No. : AAM6020VI-T2, AAM6XXXVI-T2,
6388-AX-XXX (X=0~9, A~Z)
FCC ID : VUIAAM6KVIT2

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.


We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.247.

Applicant : PEGATRON CORPORATION
Applicant Address : 5F, NO. 76, LIGONG ST., BEITOU DISTRICT,
TAIPEI CITY, Taiwan
FCC ID : VUIAAM6KVIT2
Model : AAM6020VI-T2, AAM6XXXVI-T2, 6388-AX-XXX
(X=0~9, A~Z)
Report No. : P5515080340
Test Date : October 28, 2008

Prepared by:

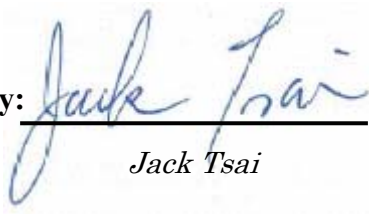
Jack Tsai

Approved by:

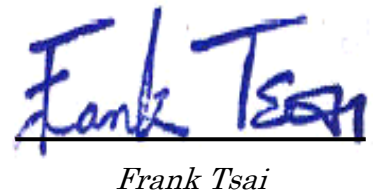
Frank Tsai**Conditions of issue :**

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**



NVLAP LAB CODE 200174-0

Report No.: P5515080340, FCC Part 15.247**Training Research Co., Ltd., TEL: 886-2-26935155, Fax: 886-2-26934440**

Tables of Contents

I.	GENERAL	5
1.1	Introduction	5
1.2	Description of EUT	5
1.3	Test method	6
1.4	Description of Support Equipment	7
1.5	Configuration of System Under Test	9
1.6	Verify the Frequency and Channel	10
1.7	Test Procedure	11
1.8	Location of the Test Site	11
1.9	General Test Condition	11
II.	Section 15.203 : Antenna Requirement	12
III.	Section 15.207 : Power Line Conducted Emissions for AC Powered Units	13
3.1	Test Condition & Setup	13
3.2	List of Test Instruments	14
3.3	Test Result of Conducted Emissions	15
	IEEE 802.11b TX mode	15
	IEEE 802.11g TX mode	17
IV.	Section 15.247(a) : Technical Description of the EUT	19
V.	Section 15.247(a)(2) : Bandwidth for Direct Sequence System	20
5.1	Test Condition & Setup	20
5.2	Test Instruments Configuration	20
5.3	List of Test Instruments	20
5.4	Test Result of Bandwidth	20
	Channel 01	21
	Channel 06	22
	Channel 11	23

VI. Section 15.247(b) : Power Output	24
6.1 Test Condition & Setup	24
6.2 List of Test Instruments	24
6.3 Test Result	24
VII. Section 15.247(c) : Spurious Emissions (Radiated)	25
7.1 Test Condition & Setup	25
7.2 List of Test Instruments	27
7.3 Test Result of Spurious Radiated Emissions	28
IEEE 802.11b TX mode	28
IEEE 802.11g TX mode	34
7.4 Test Result of Bandedge.....	40
IEEE 802.11b TX mode	41
IEEE 802.11g TX mode	43
VIII. Section 15.247(d) : Power Spectral Density	45
8.1 Test Condition & Setup	45
8.2 Test Instruments Configuration	45
8.3 List of Test Instruments.....	45
8.4 Test Result of Power Spectral Density	46
Channel 01	47
Channel 06	48
Channel 11	49

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's Rules and Regulations.

1.2 Description of EUT

FCC ID	:	VUIAAM6KVIT2
Product Name	:	Wireless ADSL 2+
Model Name	:	AAM6020VI-T2, AAM6XXXVI-T2, 6388-AX-XXX (X= 0~9, A~Z)
Frequency Range	:	2.412GHz ~ 2.462GHz
Channel Spacing	:	5MHz
Support Channel	:	11 Channels
Modulation Skill	:	DBPSK, DQPSK, CCK, OFDM
Power Type	:	Powered by the switching adapter, Manufacture: UMEC Model: UP0181B-12PA I/P: 100-240VAC 50/60Hz 0.4A. O/P: 12VDC 1.5A. 18W 180cm length, non-shielded, no ferrite core
Data Cable	:	RJ11 cable (Line) x 1, 30m length, non-shielded, no ferrite core RJ11 cable (Phone) x 1, 7feet length, non-shielded, no ferrite core RJ45 cable x 1, 30m length, non-shielded, no ferrite core RJ45 cable x 1, 1.5m length, non-shielded, no ferrite core RJ45 cable x 2, 2.0m length, non-shielded, no ferrite core

1.3 Test method

- 1.3.1 The DC-In connected to AC mains supply by switching adapter.
- 1.3.2 The RJ11 (Line) port of EUT connected to far ADSL simulator.
- 1.3.3 The RJ11 (Phone) port of EUT connected to telephone.
- 1.3.4 The LAN2 and LAN3 ports are termination by RJ45 cables.
- 1.3.5 The LAN 4 port of EUT connected to far LAN port of PC.
- 1.3.6 Connected the LAN1 port of EUT with the LAN of PC. Using PC and software provided by the manufacturer to control EUT, the test is performed under the specific conditions.
- 1.3.7 Set different data rate and channel (CH01/CH06/CH11) being tested and repeat the procedures above.
 - (a) Conducted test and Radiated:
making EUT to the mode of continuous transmission

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : DELL INC.
 Model No. : DC8M
 Serial No. : 78Y9T1S
 FCC ID : DoC (Declaration of Confirmation) Approved
 BSMI : R33002
 Power type : 100 ~ 127VAC/200 ~ 240VAC, 6A/3A, 50 ~ 60Hz, Switching
 Power cord : Non-shielded, 1.80m length, Plastic hood, No ferrite core

Monitor : HP 15' Color Monitor
 Model No. : D2827A
 Serial No. : KR91161719
 FCC ID : C5F7NFCMC1518X
 BSMI : 3872B039
 Power type : 100 ~ 240 VAC / 50 ~ 60 Hz, Switching
 Power cord : Shielded, 1.83m length, No ferrite core
 Data cable : Shielded, 1.46m length, with two ferrite cores

USB Keyboard : DELL
 Model No. : SK-8115
 Serial No. : MY-0DJ325-71619-7CH-0790
 FCC ID: DoC (Declaration of Confirmation) Approved
 BSMI : T3A002
 Power type : By PC
 Data cable : Shielded, 2.06m length, with ferrite core

USB Mouse : DELL
 Model No. : M056UC
 Serial No. : G19002XP
 FCC ID : DoC (Declaration of Confirmation) Approved
 BSMI : R41108
 Power type : By PC
 Power cord : Shielded, 1.85m length, No ferrite core

Printer : EPSON
Model No. : B241A
Serial No. : FAPY155090
FCC ID : N/A, DoC Approved
BSMI : R33126
Power type : Switching adaptor
Power cord : Non-shielded, 198cm length, No ferrite core
Data cable : Shielded, 1.50m length, No ferrite core

Modem : ACEEX
Model No. : DM-1414
Serial No. : 9010583
FCC ID : IFAXDM1414
Power type : Linear
Power cord : Non-shielded, 1.9m length, No ferrite cord
Data cable : RS232, Shielded, 1.2m length, No ferrite core
RJ11C x 2, 7' length non-shielded, No ferrite core


LAN Card : D-Link
Model No. : DFE-530TX
Serial No. : 0050BAE3158B, 0050BAE32FF3
FCC ID : DoC Approved

Telephone Set : Marcotolo Enterprise (H.K.) Ltd.
Model No. : HTT-213
Serial No. : 2111011508, 2111009515
FCC ID : Verification
DGT : T90-T139-0
Power type : By PSTN
Data Cable : Non-shielded, 2.10m length, Plastic, No ferrite core

ADSL Emulator : PARADYNE
Model No. : 2621-A3-431
Serial No. : 8075634
Power type : 100 ~ 240VAC / 50 ~ 60Hz, 1.0A, Switching

1.5 Configuration of System Under Test

1.5.1 Conducted and Radiated for Unintentional

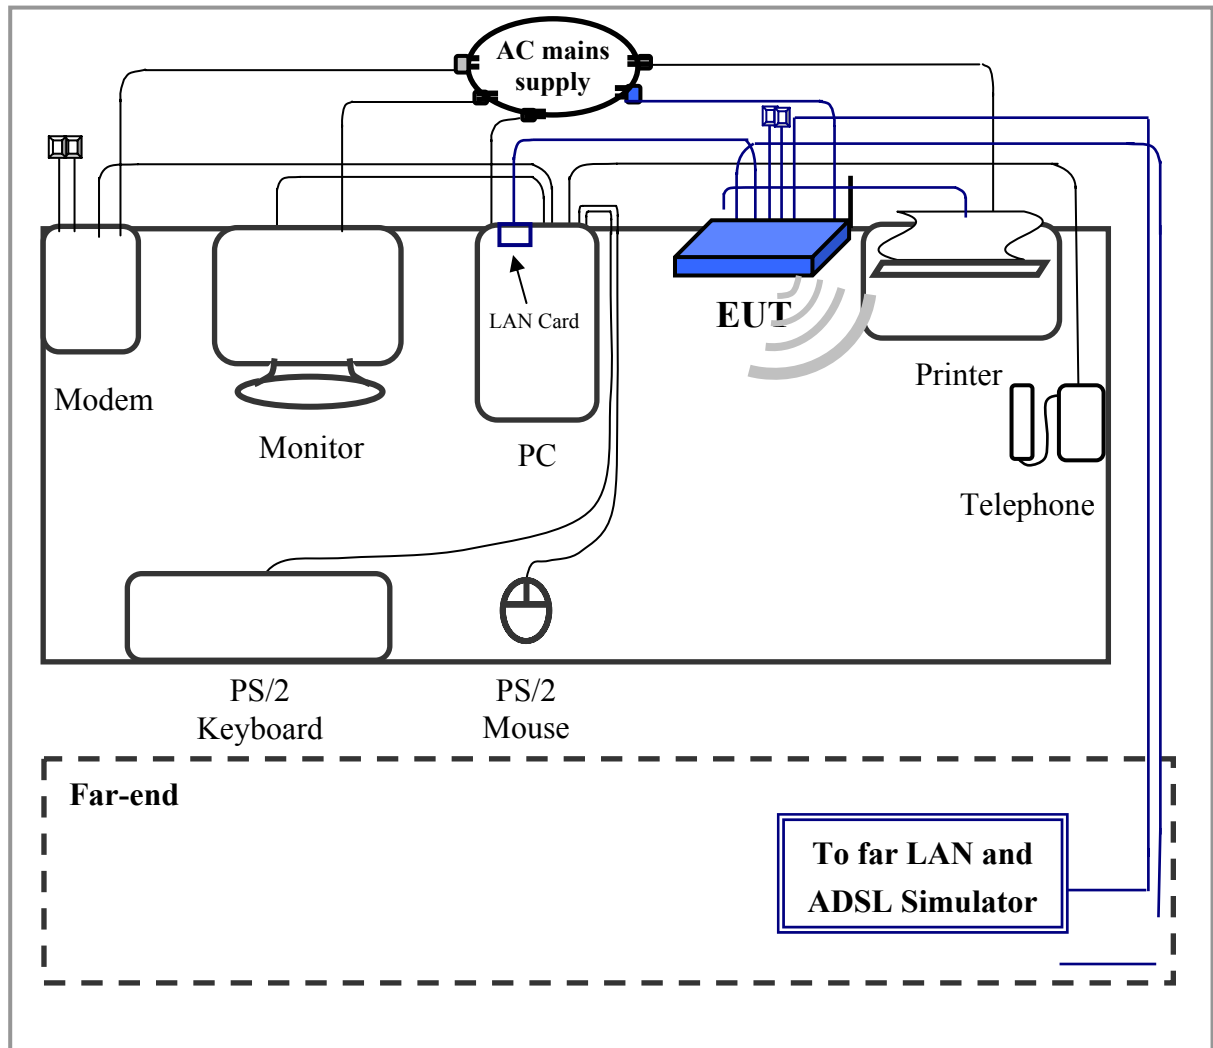

Connections of Equipment

- PC:**
- *Parallel Port a printer
 - *VGA Port a monitor
 - *Serial Port an external modem
 - *PS/2-key Port a PS/2 keyboard
 - *PS/2-mouse Port a PS/2 mouse
 - *LAN Port **EUT**

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by LAN port.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, semi-anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a semi-anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.203: Antenna requirement

The EUT can be equipped with detachable antenna. The external antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but does not use a standard antenna jack or electrical connector. The antenna requirement stated in Section 15.203 is inapplicable to this EUT.

The custom antenna specification of list as below:

Manufacturer	:	Invax
Part No	:	AN2400-37B39GX
Connector	:	SMA Plug Reverse
Antenna Gain	:	2.86Bi (MAX.)

III. Section 15.207: Power Line Conducted Emissions for AC Powered Units

3.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

3.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	04/15/09
RF Filter Section	85460A	HP	3448A00217	04/15/09
LISN (EUT)	LISN-01	TRC	99-05	11/10/08
LISN (Support E.)	LISN-01	TRC	9912-03, 04	12/22/08
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	01/10/09
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	01/10/09
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	01/10/09
Coaxial Cable (2.0 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	01/10/09
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	01/10/09
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	01/10/09
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	01/10/09
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	01/10/09

3.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: IEEE 802.11b Channel 1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	155.000	55.29	---	---	65.86	55.86	-0.57
	195.000	51.61	---	---	64.71	54.71	-3.10
	257.000	46.16	---	---	62.94	52.94	-6.78
	523.000	42.48	---	---	56.00	46.00	-3.52
	767.000	38.15	---	---	56.00	46.00	-7.85
	9420.000	40.93	---	---	60.00	50.00	-9.07
Line 2	193.000	50.93	---	---	64.77	54.77	-3.84
	257.000	44.39	---	---	62.94	52.94	-8.55
	513.000	42.04	---	---	56.00	46.00	-3.96
	1102.000	37.89	---	---	56.00	46.00	-8.11
	10090.000	41.27	---	---	60.00	50.00	-8.73
	24680.000	40.07	---	---	60.00	50.00	-9.93

NOTE:

- (1)Margin = Peak Amplitude – Limit, The reading amplitudes are all under limit.
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit
and "-" sign of means UNDER the Class B limit

Test mode: IEEE 802.11b Channel 6

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	195.000	52.82	---	---	64.71	54.71	-1.89
	259.000	45.73	---	---	62.89	52.89	-7.16
	518.000	43.31	---	---	56.00	46.00	-2.69
	710.000	37.07	---	---	56.00	46.00	-8.93
	9780.000	40.57	---	---	60.00	50.00	-9.43
	23590.000	39.71	---	---	60.00	50.00	-10.29
Line 2	193.000	50.63	---	---	64.77	54.77	-4.14
	262.000	44.00	---	---	62.80	52.80	-8.80
	518.000	42.53	---	---	56.00	46.00	-3.47
	710.000	36.70	---	---	56.00	46.00	-9.30
	10530.000	40.50	---	---	60.00	50.00	-9.50
	24560.000	39.61	---	---	60.00	50.00	-10.39

Test mode: IEEE 802.11b Channel 11

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	172.000	53.76	---	---	65.37	55.37	-1.61
	523.000	42.41	---	---	56.00	46.00	-3.59
	710.000	37.95	---	---	56.00	46.00	-8.05
	1155.000	36.52	---	---	56.00	46.00	-9.48
	9640.000	40.47	---	---	60.00	50.00	-9.53
	23470.000	39.36	---	---	60.00	50.00	-10.64
Line 2	195.000	50.74	---	---	64.71	54.71	-3.97
	259.000	43.69	---	---	62.89	52.89	-9.20
	528.000	42.04	---	---	56.00	46.00	-3.96
	10030.000	40.65	---	---	60.00	50.00	-9.35
	19520.000	39.61	---	---	60.00	50.00	-10.39
	23470.000	40.64	---	---	60.00	50.00	-9.36

Test mode: IEEE 802.11g Channel 1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	197.000	50.62	---	---	64.66	54.66	-4.04
	518.000	42.41	---	---	56.00	46.00	-3.59
	639.000	37.83	---	---	56.00	46.00	-8.17
	703.000	37.55	---	---	56.00	46.00	-8.45
	1155.000	36.95	---	---	56.00	46.00	-9.05
	9600.000	39.96	---	---	60.00	50.00	-10.04
Line 2	197.000	49.05	---	---	64.66	54.66	-5.61
	513.000	42.32	---	---	56.00	46.00	-3.68
	703.000	36.90	---	---	56.00	46.00	-9.10
	10240.000	40.85	---	---	60.00	50.00	-9.15
	19820.000	38.48	---	---	60.00	50.00	-11.52
	24560.000	39.13	---	---	60.00	50.00	-10.87

Test mode: IEEE 802.11g Channel 6

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	197.000	50.71	---	---	64.66	54.66	-3.95
	518.000	43.22	---	---	56.00	46.00	-2.78
	645.000	38.60	---	---	56.00	46.00	-7.40
	832.000	37.13	---	---	56.00	46.00	-8.87
	9420.000	40.62	---	---	60.00	50.00	-9.38
	23470.000	39.83	---	---	60.00	50.00	-10.17
Line 2	187.000	50.29	---	---	64.94	54.94	-4.65
	513.000	42.44	---	---	56.00	46.00	-3.56
	639.000	35.19	---	---	56.00	46.00	-10.81
	710.000	36.61	---	---	56.00	46.00	-9.39
	9880.000	41.16	---	---	60.00	50.00	-8.84
	24200.000	39.43	---	---	60.00	50.00	-10.57

Test mode: IEEE 802.11g Channel 11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	195.000	50.56	---	---	64.71	54.71	-4.15
	513.000	43.08	---	---	56.00	46.00	-2.92
	703.000	37.79	---	---	56.00	46.00	-8.21
	832.000	36.66	---	---	56.00	46.00	-9.34
	10030.000	40.35	---	---	60.00	50.00	-9.65
	24320.000	39.08	---	---	60.00	50.00	-10.92
Line 2	193.000	49.74	---	---	64.77	54.77	-5.03
	513.000	41.95	---	---	56.00	46.00	-4.05
	639.000	35.68	---	---	56.00	46.00	-10.32
	1230.000	37.21	---	---	56.00	46.00	-8.79
	10430.000	40.64	---	---	60.00	50.00	-9.36
	24560.000	40.38	---	---	60.00	50.00	-9.62

IV. Section 15.247 (a): Technical description of the EUT


Direct Sequence System is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the direct sequence spread spectrum system.

V. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

5.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

5.2 Test Instruments Configuration

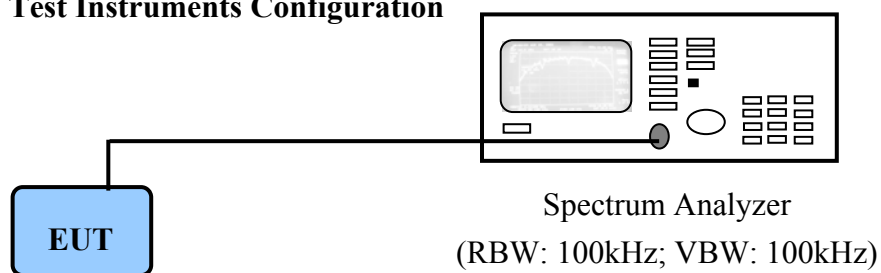

PC to control the EUT at maximal power output and channel number and set antenna kit

5.3 List of Test Instruments


Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/19/08

5.4 Test Result of Bandwidth


Channel	802.11b	802.11g
01	12.80 MHz	16.80 MHz
06	12.76 MHz	16.84 MHz
11	12.80 MHz	16.84 MHz

- Note:
1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth (RBW)=100kHz and set the $span \gg RBW$. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
 2. The attachments show these on the following pages.

6dB Bandwidth of Channel 1 (The minimum 6dB BW at least 500kHz)

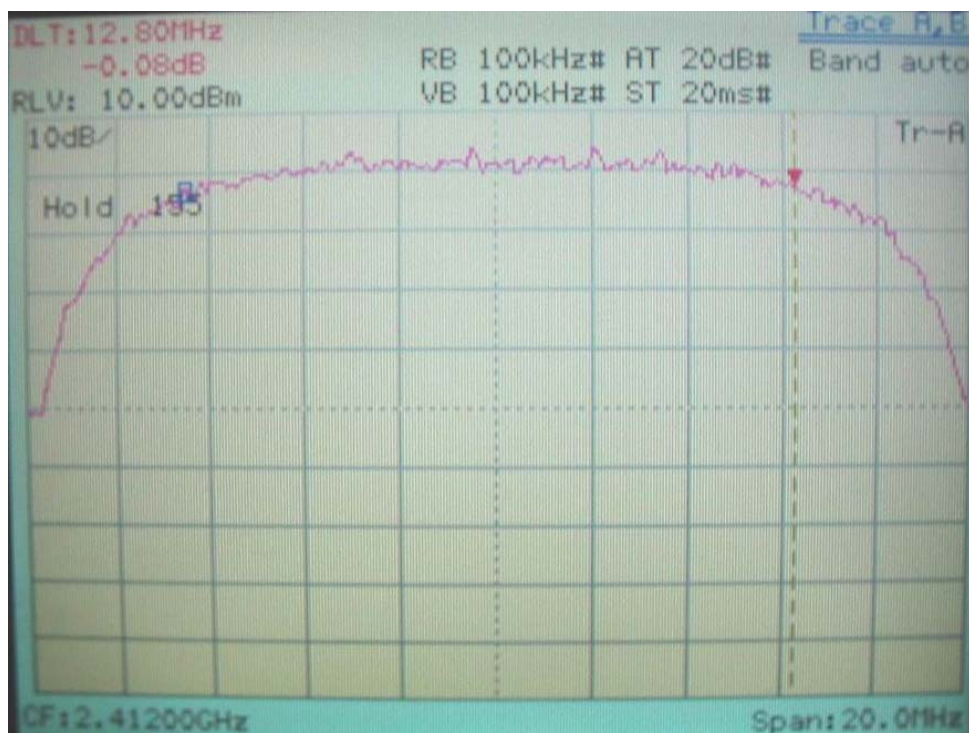


IEEE 802.11b

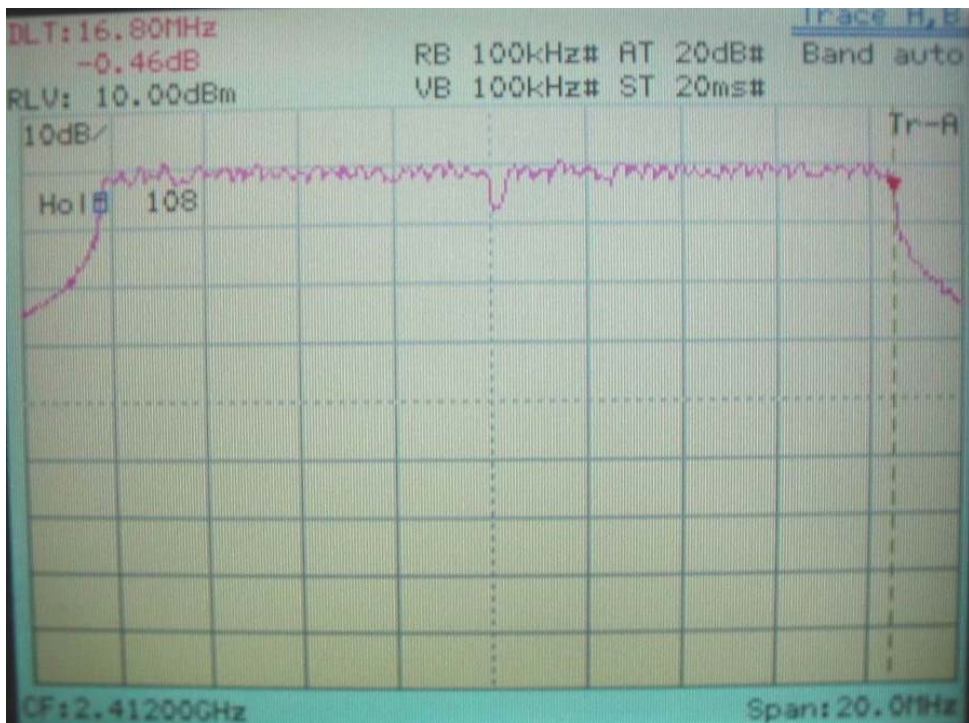


IEEE 802.11g

6dB Bandwidth of Channel 6 (The minimum 6dB BW at least 500kHz)

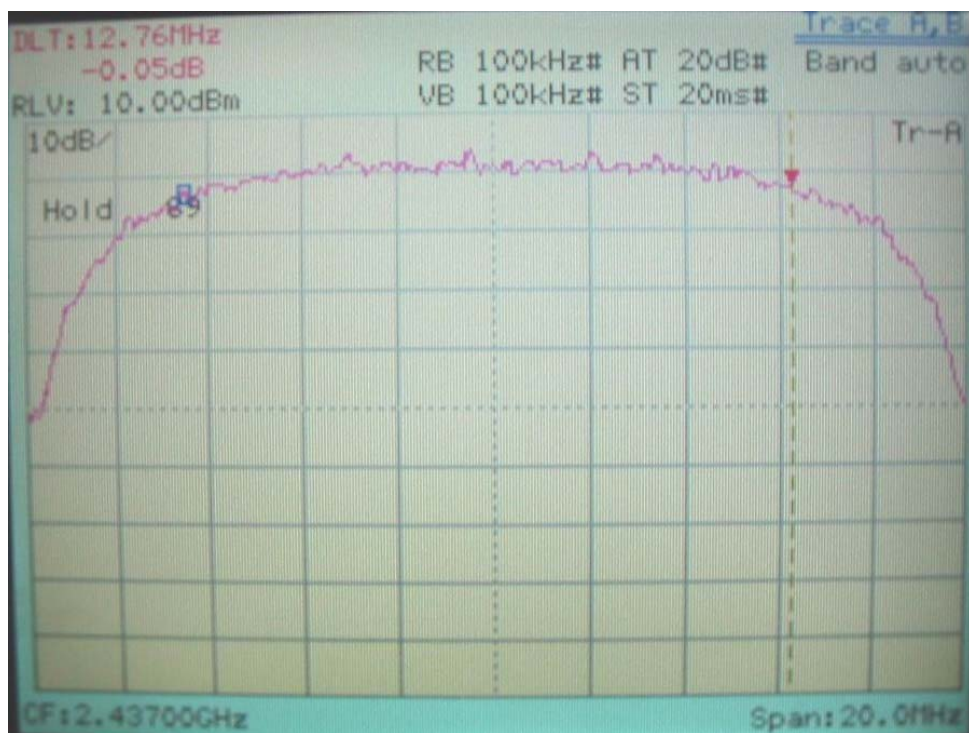


IEEE 802.11b

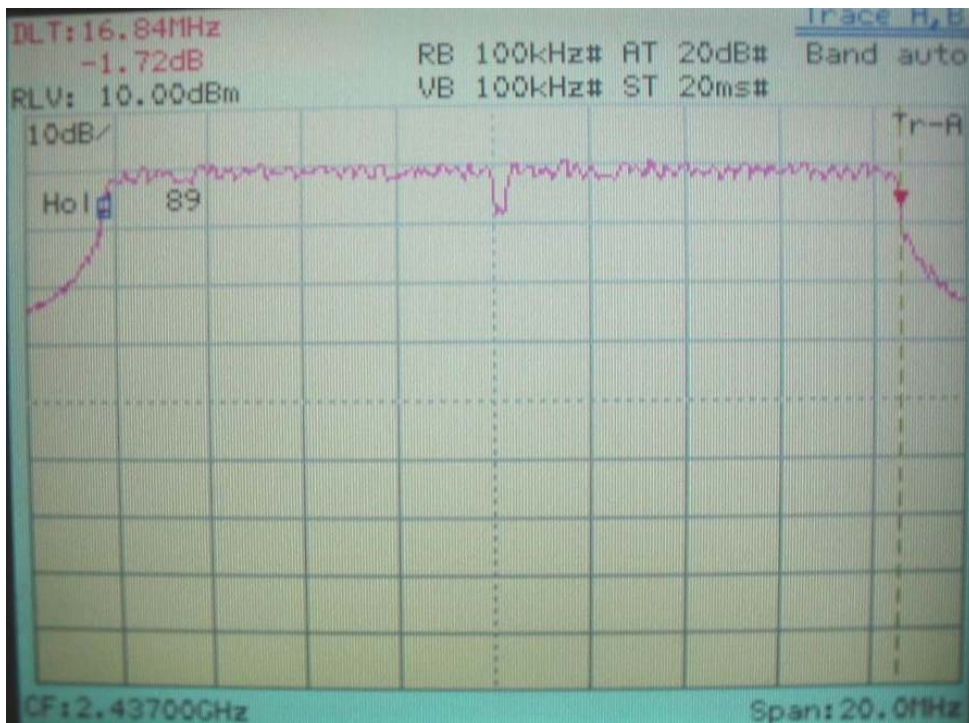


IEEE 802.11g

6dB Bandwidth of Channel 11 (The minimum 6dB BW at least 500kHz)

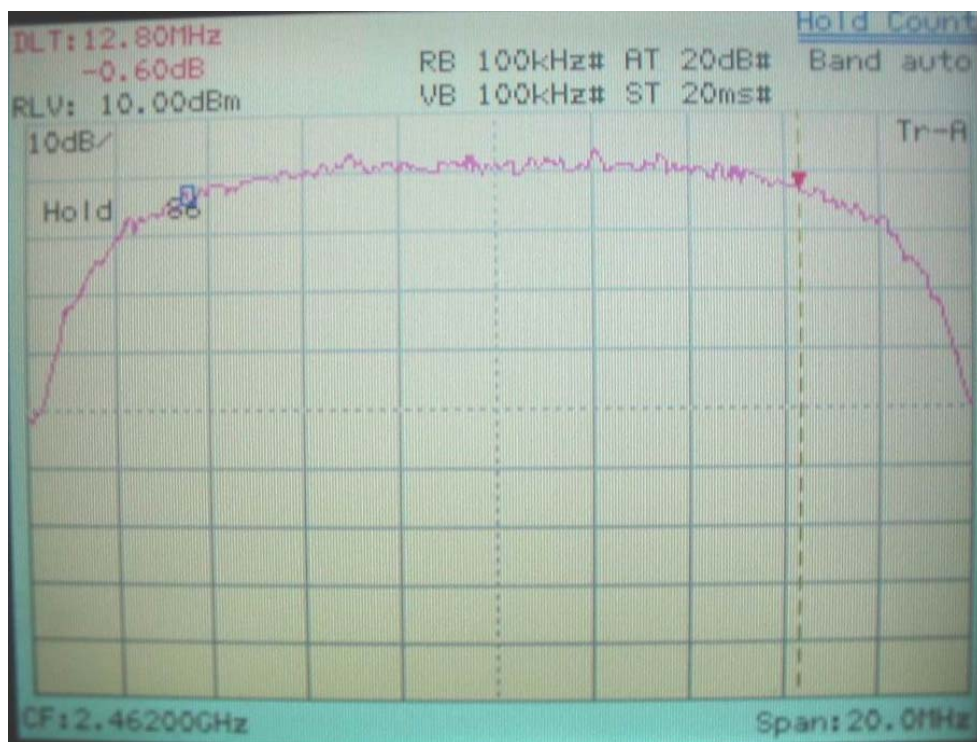


IEEE 802.11b

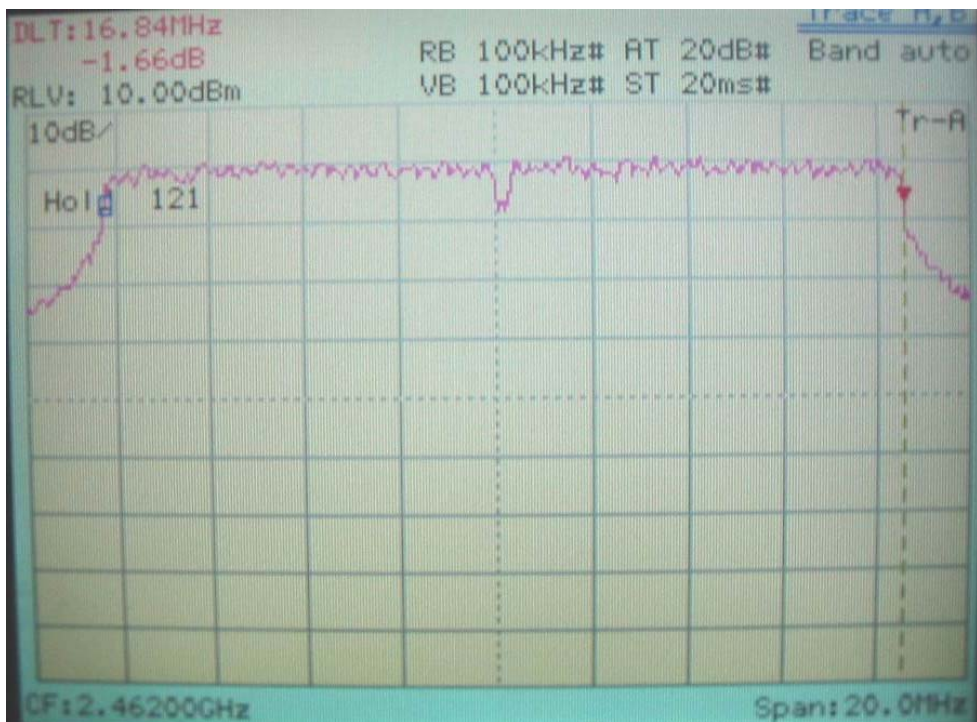

IEEE 802.11g

VI. Section 15.247(b): Power Output

6.1 Test Condition & Setup

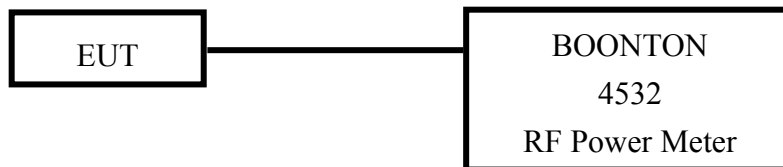

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

6.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	12/11/08
Peak Power Sensor	57340	BOONTON	2696	12/11/08

6.3 Test Result

Formula:

RF Output of EUT + |Cable Loss| = Output Peak Power

Channel	RF Output	Cable Loss	Output Peak Power	
	dBm	dBm	dBm	mW
802.11b CH01	12.37	7.00	19.37	86.50
802.11b CH06	12.23	7.00	19.23	83.75
802.11b CH11	12.11	7.00	19.11	81.47
802.11g CH01	17.65	7.00	24.65	291.74
802.11g CH06	17.76	7.00	24.76	299.23
802.11g CH11	17.79	7.00	24.79	301.30

VII. Section 15.247 (C): Spurious Emissions (Radiated)

7.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an semi-anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, semi-anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30MHz to 1000MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplifier Gain) + Switching Box Loss

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplifier Gain) + Switching Box Loss

7.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	04/15/09
RF Filter Section	85460A	HP	3448A00217	04/15/09
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	01/10/09
Pre-amplifier	PA1F	TRC	1FAC	01/10/09
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	01/10/09
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	01/10/09
Spectrum Analyzer	8564E	HP	3720A00840	03/17/09
Microwave Preamplifier	84125C	HP	US36433002	11/05/08
Horn Antenna	3115	EMCO	9104-3668	08/06/09
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	12/14/08
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	11/12/08
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	08/13/09
Pre-amplifier	PA2F	TRC	2F1GZ	01/10/09
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	01/10/09
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	01/10/09

7.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 25 ° C Humidity : 73 % RH

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
140.34	33.00	1.00	109	-3.49	29.51	43.50	-13.99
251.89	42.78	1.00	88	-3.29	39.49	46.00	-6.51
301.60	36.81	1.00	112	-2.88	33.93	46.00	-12.07
352.52	40.33	1.00	92	-2.21	38.12	46.00	-7.88
433.76	30.88	1.00	102	0.45	31.33	46.00	-14.67
502.87	31.38	1.00	132	1.93	33.31	46.00	-12.69

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
147.61	36.72	1.00	88	-4.17	32.55	43.50	-10.95
253.10	41.50	1.00	92	-3.38	38.12	46.00	-7.88
321.00	37.19	1.00	119	-2.64	34.55	46.00	-11.45
434.97	29.05	1.00	197	0.51	29.56	46.00	-16.44
501.66	31.09	1.00	163	1.85	32.94	46.00	-13.06
625.34	25.74	1.00	150	7.25	32.99	46.00	-13.01

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: IEEE 802.11b CH01 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2587.50	1.00	4	35.34	---	9.65	44.99	---	73.96	53.96	-8.97
9650.42	1.00	165	35.94	---	11.47	47.41	---	73.96	53.96	-6.55
12061.04	1.00	185	37.77	---	9.81	47.58	---	73.96	53.96	-6.38
19296.25	1.00	245	47.41	---	1.60	49.01	---	73.96	53.96	-4.95
21708.12	1.00	50	45.75	---	2.87	48.62	---	73.96	53.96	-5.34
24120.00	1.00	257	46.40	---	3.40	49.80	---	73.96	53.96	-4.16

Test mode: IEEE 802.11b CH01 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2254.17	1.00	12	39.33	---	8.80	48.13	---	73.96	53.96	-5.83
2537.50	1.00	360	37.33	---	9.56	46.89	---	73.96	53.96	-7.07
12061.04	1.00	46	37.60	---	9.81	47.41	---	73.96	53.96	-6.55
19296.25	1.00	246	47.60	---	1.60	49.20	---	73.96	53.96	-4.76
21708.12	1.00	40	45.83	---	2.87	48.70	---	73.96	53.96	-5.26
24120.00	1.00	262	46.48	---	3.40	49.88	---	73.96	53.96	-4.08

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
251.89	44.53	1.00	84	-3.29	41.24	46.00	-4.76
302.81	38.35	1.00	111	-2.86	35.49	46.00	-10.51
352.52	38.05	1.00	74	-2.21	35.84	46.00	-10.16
436.19	31.10	1.00	128	0.56	31.66	46.00	-14.34
502.87	29.13	1.00	131	1.93	31.06	46.00	-14.94
625.34	26.47	1.00	112	7.25	33.72	46.00	-12.28

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
146.40	36.36	1.00	298	-4.05	32.31	43.50	-11.19
253.10	39.12	1.00	147	-3.38	35.74	46.00	-10.26
319.79	37.30	1.00	113	-2.65	34.65	46.00	-11.35
352.52	39.62	1.00	103	-2.21	37.41	46.00	-8.59
502.87	30.72	1.00	154	1.93	32.65	46.00	-13.35
530.76	30.76	1.00	114	3.78	34.54	46.00	-11.46

Test mode: IEEE 802.11b CH06 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1735.42	1.00	266	34.33	---	12.22	46.55	---	73.96	53.96	-7.41
9747.08	1.00	289	35.10	---	11.89	46.99	---	73.96	53.96	-6.97
12187.92	1.00	351	39.94	---	9.74	49.68	---	73.96	53.96	-4.28
19494.58	1.00	98	46.99	---	1.69	48.68	---	73.96	53.96	-5.28
21934.79	1.00	49	46.16	---	3.09	49.25	---	73.96	53.96	-4.71
24371.46	1.00	309	45.52	---	3.26	48.78	---	73.96	53.96	-5.18

Test mode: IEEE 802.11b CH06 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2275.00	1.00	83	39.83	---	8.86	48.69	---	73.96	53.96	-5.27
9747.08	1.00	174	35.60	---	11.89	47.49	---	73.96	53.96	-6.47
12187.92	1.00	139	40.94	---	9.74	50.68	---	73.96	53.96	-3.28
19494.58	1.00	94	47.07	---	1.69	48.76	---	73.96	53.96	-5.20
21934.79	1.00	54	46.22	---	3.09	49.31	---	73.96	53.96	-4.65
24371.46	1.00	313	45.58	---	3.26	48.84	---	73.96	53.96	-5.12

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
86.99	30.73	1.00	251	0.20	30.93	40.00	-9.07
253.10	40.85	1.00	255	-3.38	37.47	46.00	-8.53
351.31	40.49	1.00	88	-2.24	38.25	46.00	-7.75
434.97	32.00	1.00	115	0.51	32.51	46.00	-13.49
502.87	30.31	1.00	132	1.93	32.24	46.00	-13.76
625.34	26.12	1.00	119	7.25	33.37	46.00	-12.63

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
145.19	37.25	1.00	95	-3.94	33.31	43.50	-10.19
253.10	41.46	1.00	109	-3.38	38.08	46.00	-7.92
321.00	35.83	1.00	98	-2.64	33.19	46.00	-12.81
502.87	31.28	1.00	153	1.93	33.21	46.00	-12.79
530.76	30.19	1.00	84	3.78	33.97	46.00	-12.03
625.34	26.42	1.00	154	7.25	33.67	46.00	-12.33

Test mode: IEEE 802.11b CH11 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2279.17	1.00	228	36.83	---	8.87	45.70	---	73.96	53.96	-8.26
9849.79	1.00	12	34.61	---	11.93	46.54	---	73.96	53.96	-7.42
12308.75	1.00	241	37.27	---	9.56	46.83	---	73.96	53.96	-7.13
19696.46	1.00	68	46.64	---	1.81	48.45	---	73.96	53.96	-5.51
22157.92	1.00	228	45.65	---	3.25	48.90	---	73.96	53.96	-5.06
24619.37	1.00	44	46.50	---	3.01	49.51	---	73.96	53.96	-4.45

Test mode: IEEE 802.11b CH11 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2258.33	1.00	284	37.84	---	8.81	46.65	---	73.96	53.96	-7.31
2693.75	1.00	196	36.84	---	9.85	46.69	---	73.96	53.96	-7.27
9849.79	1.00	137	35.28	---	11.93	47.21	---	73.96	53.96	-6.75
19696.46	1.00	69	46.48	---	1.81	48.29	---	73.96	53.96	-5.67
22157.92	1.00	221	45.74	---	3.25	48.99	---	73.96	53.96	-4.97
24619.37	1.00	48	46.81	---	3.01	49.82	---	73.96	53.96	-4.14

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
202.17	34.05	1.00	265	-3.39	30.66	43.50	-12.84
251.89	41.99	1.00	82	-2.29	39.70	46.00	-6.30
351.31	39.15	1.00	112	-2.24	36.91	46.00	-9.09
434.97	30.98	1.00	112	0.51	31.49	46.00	-14.51
502.87	30.79	1.00	129	1.93	32.72	46.00	-13.28
625.34	26.70	1.00	112	7.25	33.95	46.00	-12.05

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
142.76	36.93	1.00	139	-3.72	33.21	43.50	-10.29
236.12	36.76	1.00	129	-3.77	32.99	46.00	-13.01
253.10	40.26	1.00	75	-3.38	36.88	46.00	-9.12
321.00	36.98	1.00	115	-2.64	34.34	46.00	-11.66
352.52	38.36	1.00	119	-2.21	36.15	46.00	-9.85
501.66	30.45	1.00	160	1.85	32.30	46.00	-13.70

Test mode: IEEE 802.11g CH01 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1602.08	1.00	270	34.00	---	14.30	48.30	---	73.96	53.96	-5.66
2487.50	1.00	360	38.00	---	9.45	47.45	---	73.96	53.96	-6.51
12061.04	1.00	273	37.60	---	9.81	47.41	---	73.96	53.96	-6.55
19296.25	1.00	243	47.78	---	1.60	49.38	---	73.96	53.96	-4.58
21708.12	1.00	59	45.79	---	2.87	48.66	---	73.96	53.96	-5.30
24120.00	1.00	251	46.56	---	3.40	49.96	---	73.96	53.96	-4.00

Test mode: IEEE 802.11g CH01 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2264.58	1.00	165	41.17	---	8.83	50.00	---	73.96	53.96	-3.96
9650.42	1.00	360	36.44	---	11.47	47.91	---	73.96	53.96	-6.05
12061.04	1.00	268	38.94	---	9.81	48.75	---	73.96	53.96	-5.21
19296.25	1.00	247	47.37	---	1.60	48.97	---	73.96	53.96	-4.99
21708.12	1.00	36	45.67	---	2.87	48.54	---	73.96	53.96	-5.42
24120.00	1.00	261	46.52	---	3.40	49.92	---	73.96	53.96	-4.04

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
251.89	42.78	1.00	85	-3.29	39.49	46.00	-6.51
302.81	36.62	1.00	98	-2.86	33.76	46.00	-12.24
351.31	38.80	1.00	115	-2.24	36.56	46.00	-9.44
436.19	31.60	1.00	139	0.56	32.16	46.00	-13.84
502.87	30.93	1.00	129	1.93	32.86	46.00	-13.14
625.34	25.93	1.00	121	7.25	33.18	46.00	-12.82

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
145.19	37.11	1.00	61	-3.94	33.17	43.50	-10.33
236.12	35.40	1.00	129	-3.77	31.63	46.00	-14.37
251.89	40.72	1.00	105	-3.29	37.43	46.00	-8.57
319.79	36.34	1.00	105	-2.65	33.69	46.00	-12.31
352.52	39.59	1.00	95	-2.21	37.38	46.00	-8.62
625.34	26.00	1.00	203	7.25	33.25	46.00	-12.75

Test mode: IEEE 802.11g CH06 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2239.58	1.00	319	36.33	---	8.76	45.09	---	73.96	53.96	-8.87
9747.08	1.00	173	35.77	---	11.89	47.66	---	73.96	53.96	-6.30
12187.92	1.00	60	38.77	---	9.74	48.51	---	73.96	53.96	-5.45
19494.58	1.00	93	47.05	---	1.69	48.74	---	73.96	53.96	-5.22
21934.79	1.00	53	46.28	---	3.09	49.37	---	73.96	53.96	-4.59
24371.46	1.00	311	45.87	---	3.26	49.13	---	73.96	53.96	-4.83

Test mode: IEEE 802.11g CH06 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2268.75	1.00	134	39.84	---	8.84	48.68	---	73.96	53.96	-5.28
9747.08	1.00	29	36.94	---	11.89	48.83	---	73.96	53.96	-5.13
12187.92	1.00	95	40.27	---	9.74	50.01	---	73.96	53.96	-3.95
19494.58	1.00	111	47.03	---	1.69	48.72	---	73.96	53.96	-5.24
21934.79	1.00	51	46.26	---	3.09	49.35	---	73.96	53.96	-4.61
24371.46	1.00	295	45.36	---	3.26	48.62	---	73.96	53.96	-5.34

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
202.17	32.38	1.00	255	-3.39	28.99	43.50	-14.51
253.10	43.45	1.00	98	-3.38	40.07	46.00	-5.93
301.60	35.28	1.00	122	-2.88	32.40	46.00	-13.60
351.31	40.68	1.00	88	-2.24	38.44	46.00	-7.56
434.97	30.76	1.00	139	0.51	31.27	46.00	-14.73
501.66	30.31	1.00	129	1.85	32.16	46.00	-13.84

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
148.82	36.28	1.00	295	-4.28	32.00	43.50	-11.50
234.91	36.09	1.00	136	-3.79	32.30	46.00	-13.70
251.89	41.21	1.00	109	-3.29	37.92	46.00	-8.08
319.79	35.95	1.00	109	-2.65	33.30	46.00	-12.70
352.52	36.40	1.00	139	-2.21	34.19	46.00	-11.81
502.87	30.64	1.00	166	1.93	32.57	46.00	-13.43

Test mode: IEEE 802.11g CH11 for 1GHz to 26.5GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2650.00	1.00	251	35.84	---	9.77	45.61	---	73.96	53.96	-8.35
9849.79	1.00	257	34.61	---	11.93	46.54	---	73.96	53.96	-7.42
12308.75	1.00	238	37.44	---	9.56	47.00	---	73.96	53.96	-6.96
19696.46	1.00	73	46.91	---	1.81	48.72	---	73.96	53.96	-5.24
22157.92	1.00	216	45.55	---	3.25	48.80	---	73.96	53.96	-5.16
24619.37	1.00	48	46.36	---	3.01	49.37	---	73.96	53.96	-4.59

Test mode: IEEE 802.11g CH11 for 1GHz to 26.5GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2262.50	1.00	235	39.67	---	8.82	48.49	---	73.96	53.96	-5.47
7384.79	1.00	165	36.28	---	10.42	46.70	---	73.96	53.96	-7.26
12308.75	1.00	106	38.11	---	9.56	47.67	---	73.96	53.96	-6.29
19696.46	1.00	76	46.85	---	1.81	48.66	---	73.96	53.96	-5.30
22157.92	1.00	229	45.66	---	3.25	48.91	---	73.96	53.96	-5.05
24619.37	1.00	73	46.56	---	3.01	49.57	---	73.96	53.96	-4.39

7.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

Channel 1 of IEEE 802.11b

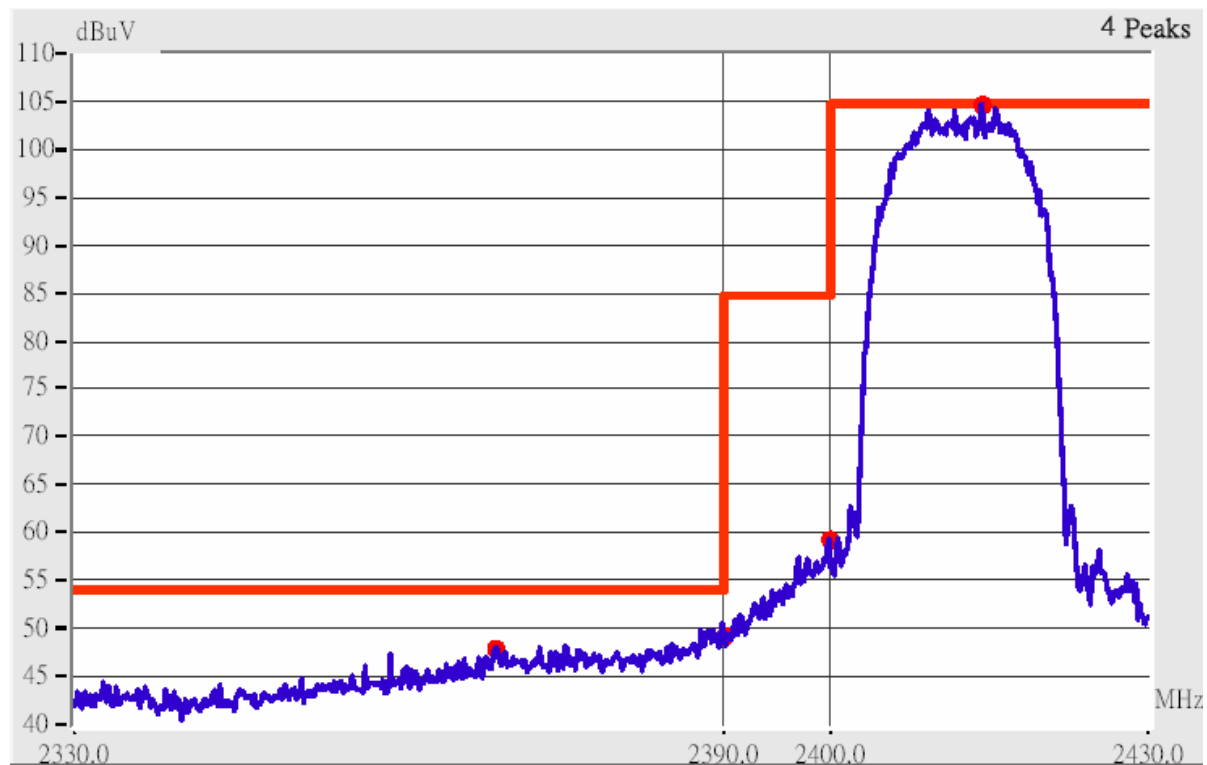


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2386.48	Hor	1.00	191	9.17	59.34	41.17	73.96	53.96	-12.79
2390.14	Hor	1.00	7	9.18	60.35	41.68	73.96	53.96	-12.28
2385.71	Ver	1.00	158	9.17	64.34	46.00	73.96	53.96	-7.96
2390.31	Ver	1.00	218	9.18	65.68	46.68	73.96	53.96	-7.28

Channel 11 of IEEE 802.11b

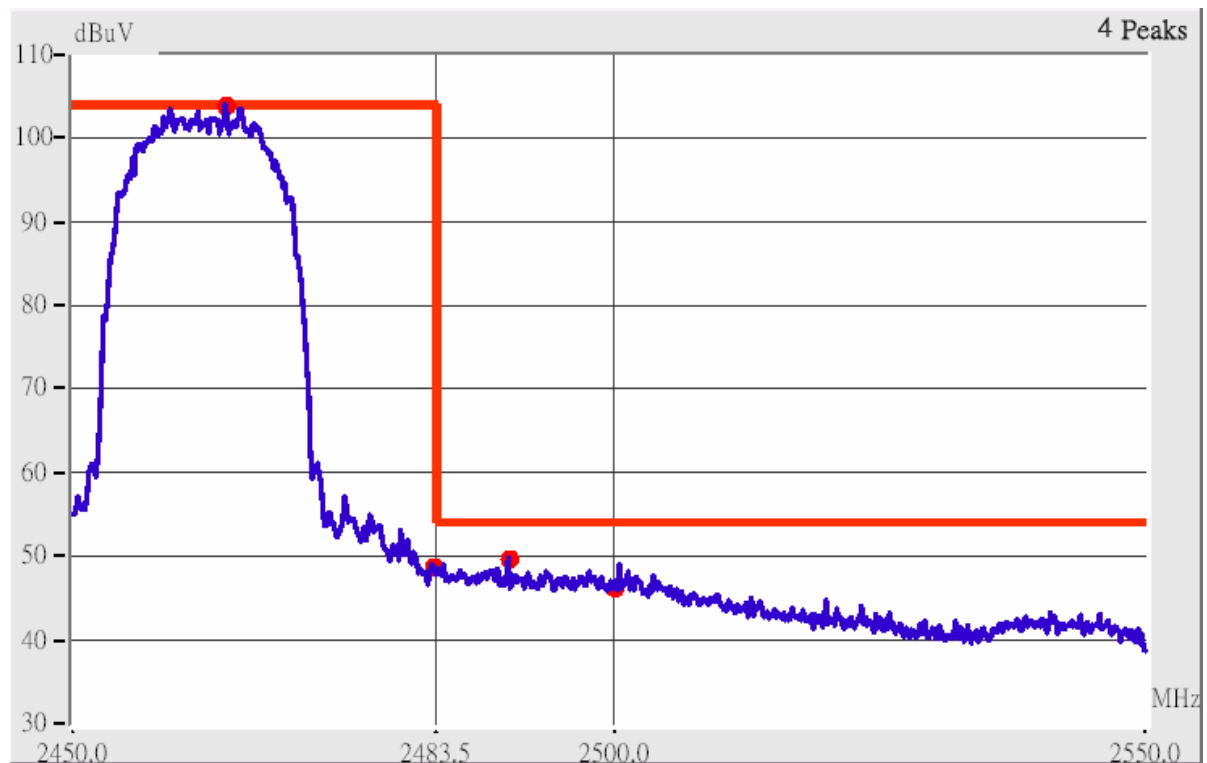


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

3. The lobe right by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table ()	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.50	Hor	1.00	210	9.44	49.94	---	73.96	53.96	-4.02
2487.87	Hor	1.00	313	9.46	49.96	---	73.96	53.96	-4.00
2500.01	Hor	1.00	313	9.49	48.66	---	73.96	53.96	-5.30
2506.07	Hor	1.00	305	9.50	49.67	---	73.96	53.96	-4.29
2484.00	Ver	1.00	298	9.45	59.94	47.45	73.96	53.96	-6.51
2488.28	Ver	1.00	224	9.46	58.96	47.13	73.96	53.96	-6.83
2499.70	Ver	1.00	222	9.49	57.32	46.49	73.96	53.96	-7.47
2511.23	Ver	1.00	328	9.51	55.84	43.51	73.96	53.96	-10.45

Channel 1 of IEEE 802.11g

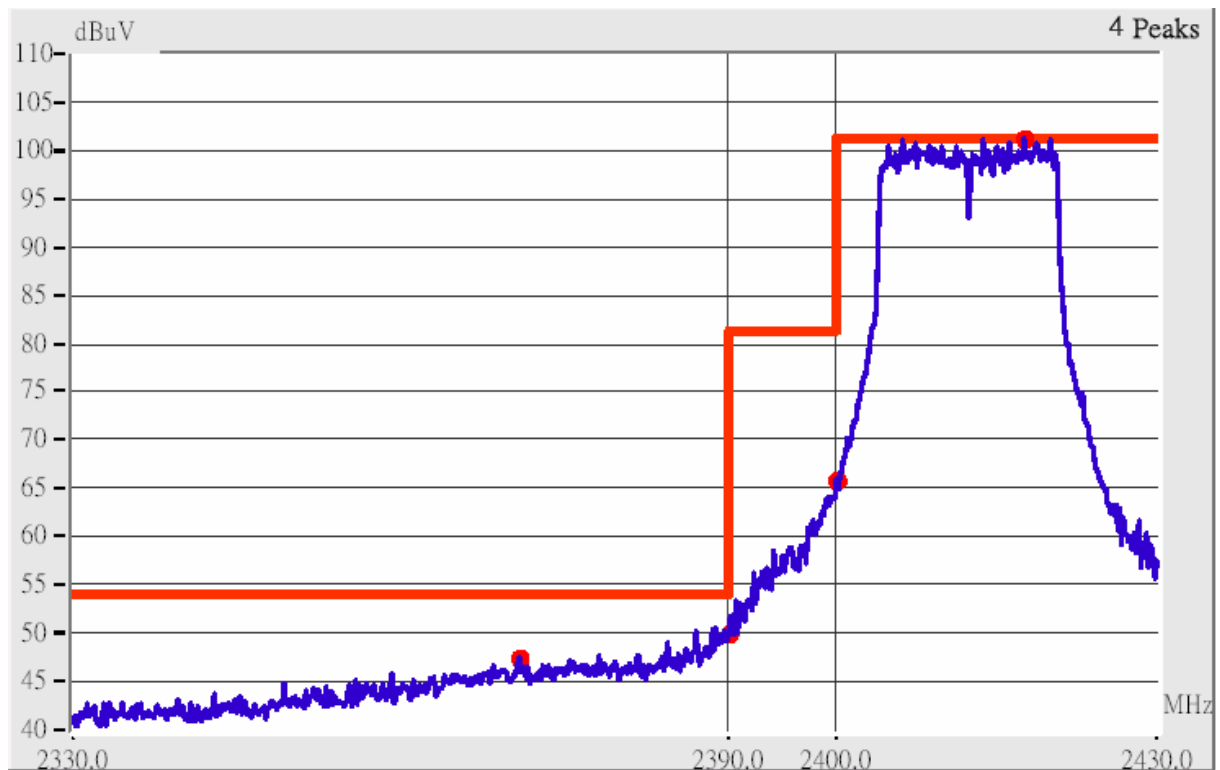


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

5. The lobe left by the fundamental side is already 20dB below the highest emission level.
6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table ()	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2485.87	Hor	1.00	12	9.17	54.50	41.00	73.96	53.96	-12.96
2489.53	Hor	1.00	16	9.18	58.18	42.35	73.96	53.96	-11.61
2386.41	Ver	1.00	22	9.17	62.51	46.67	73.96	53.96	-7.29
2389.53	Ver	1.00	187	9.18	68.18	47.68	73.96	53.96	-5.78

Channel 11 of IEEE 802.11g

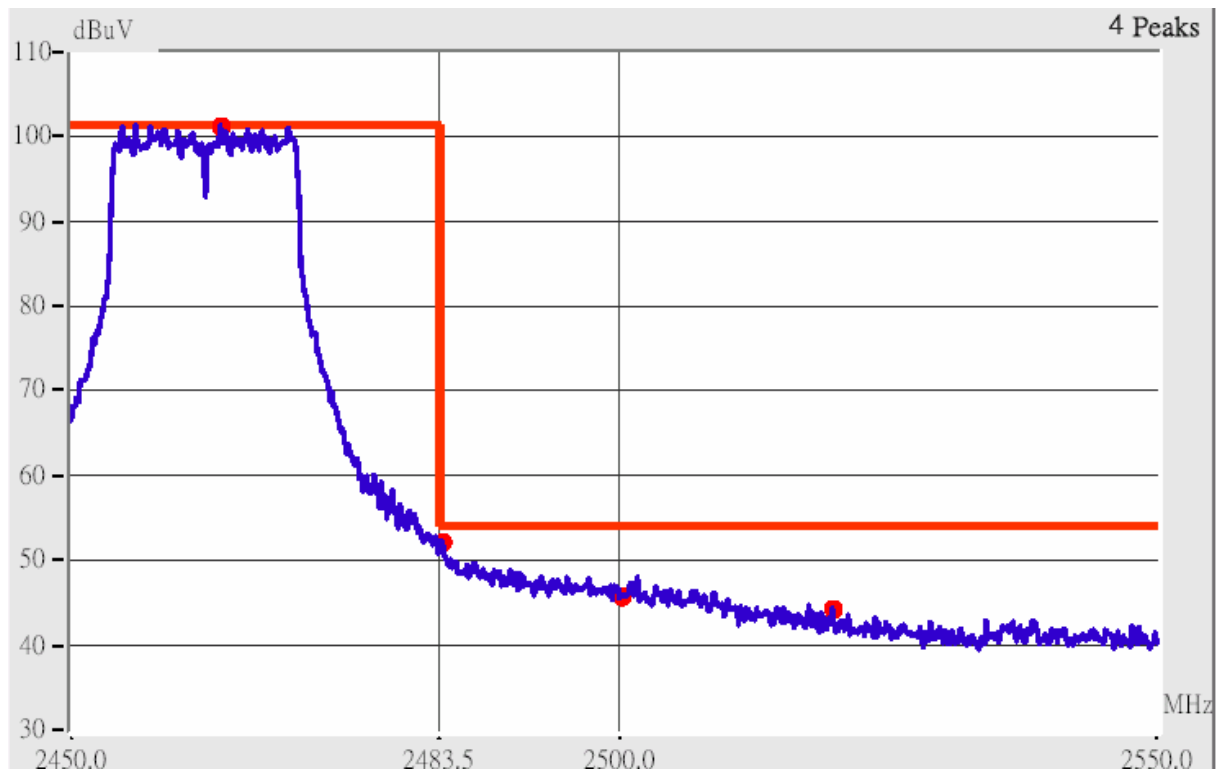

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

7. The lobe right by the fundamental side is already 20dB below the highest emission level.
8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table ()	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2482.96	Hor	1.00	334	9.44	57.11	41.44	73.96	53.96	-12.52
2485.10	Hor	1.00	117	9.45	56.62	40.62	73.96	53.96	-13.34
2500.01	Hor	1.00	335	9.49	47.82	---	73.96	53.96	-6.14
2505.55	Hor	1.00	335	9.50	49.17	---	73.96	53.96	-4.79
2483.19	Ver	1.00	315	9.44	68.11	48.77	73.96	53.96	-5.19
2485.13	Ver	1.00	310	9.45	64.78	47.62	73.96	53.96	-6.34
2500.19	Ver	1.00	200	9.49	57.82	45.66	73.96	53.96	-8.30
2509.66	Ver	1.00	196	9.51	55.68	44.34	73.96	53.96	-9.62

VIII. Section 15.247(d): Power Spectral Density

8.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

8.2 Test Instruments Configuration

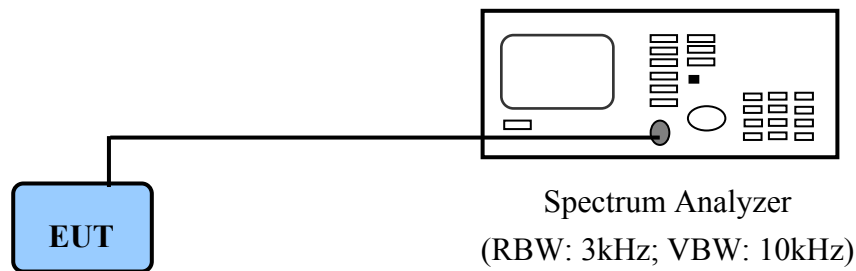

PC to control the EUT at maximal power output and channel number and set antenna kit

8.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/19/08

8.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.

IEEE 802.11b

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-11.93	1.00	-10.93	8.00	-18.93
CH 06	-11.76	1.00	-10.76	8.00	-18.76
CH 11	-11.90	1.00	-10.90	8.00	-18.90


IEEE 802.11g

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-12.57	1.00	-11.57	8.00	-19.57
CH 06	-12.39	1.00	-11.39	8.00	-19.39
CH 11	-12.46	1.00	-11.46	8.00	-19.46


Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |Cable Loss|$

Power Spectral Density for Channel 01

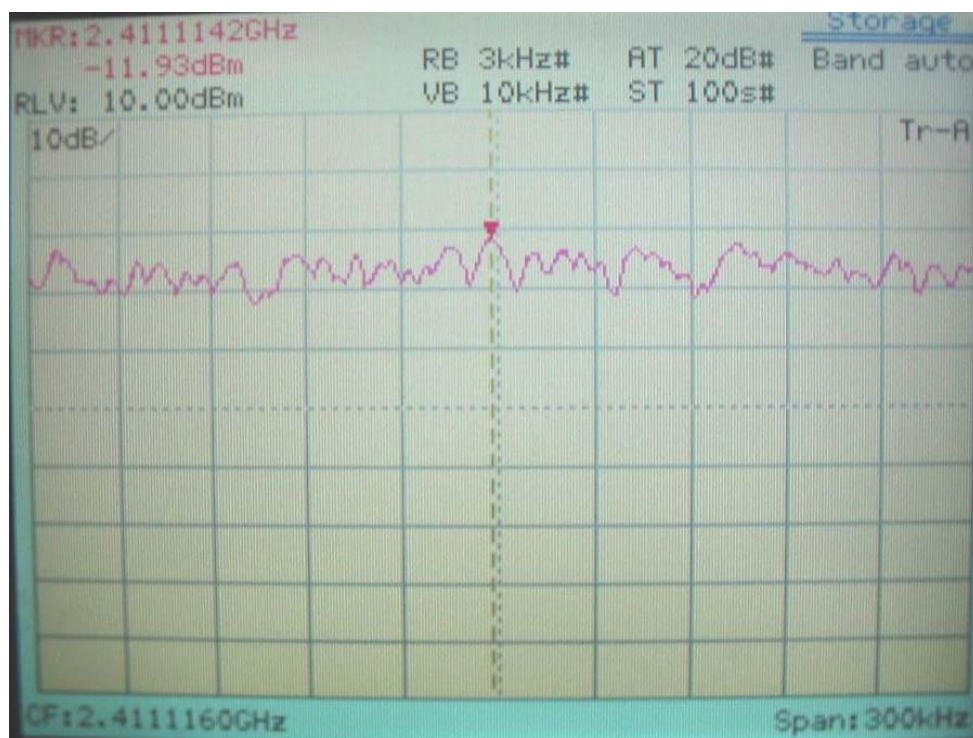


IEEE 802.11b

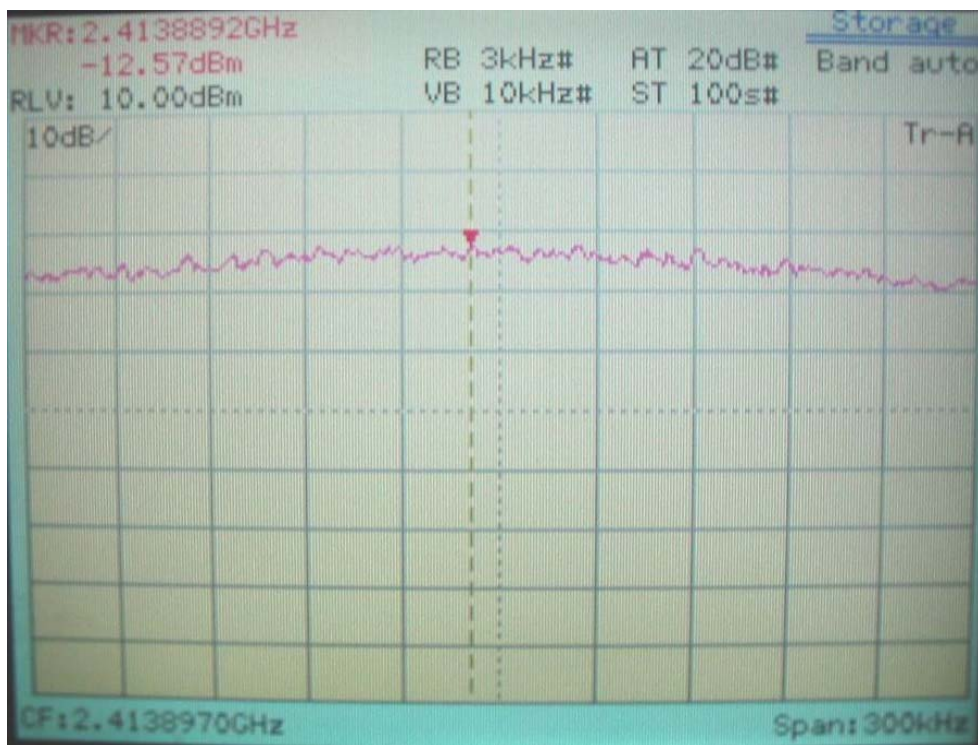


IEEE 802.11g

Power Spectral Density for Channel 06

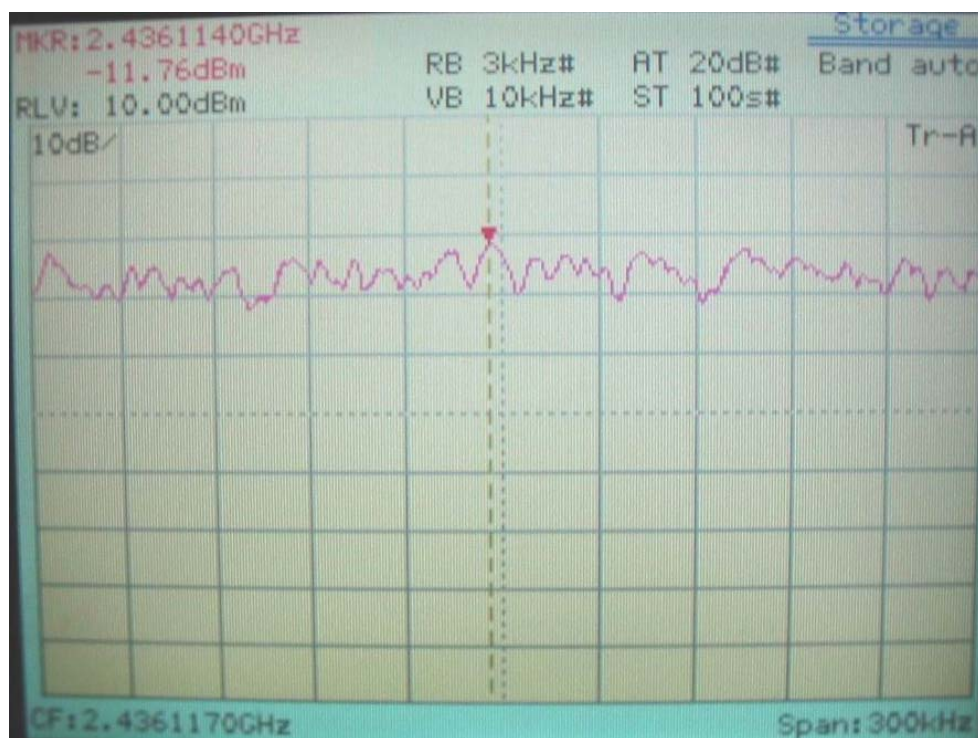


IEEE 802.11b

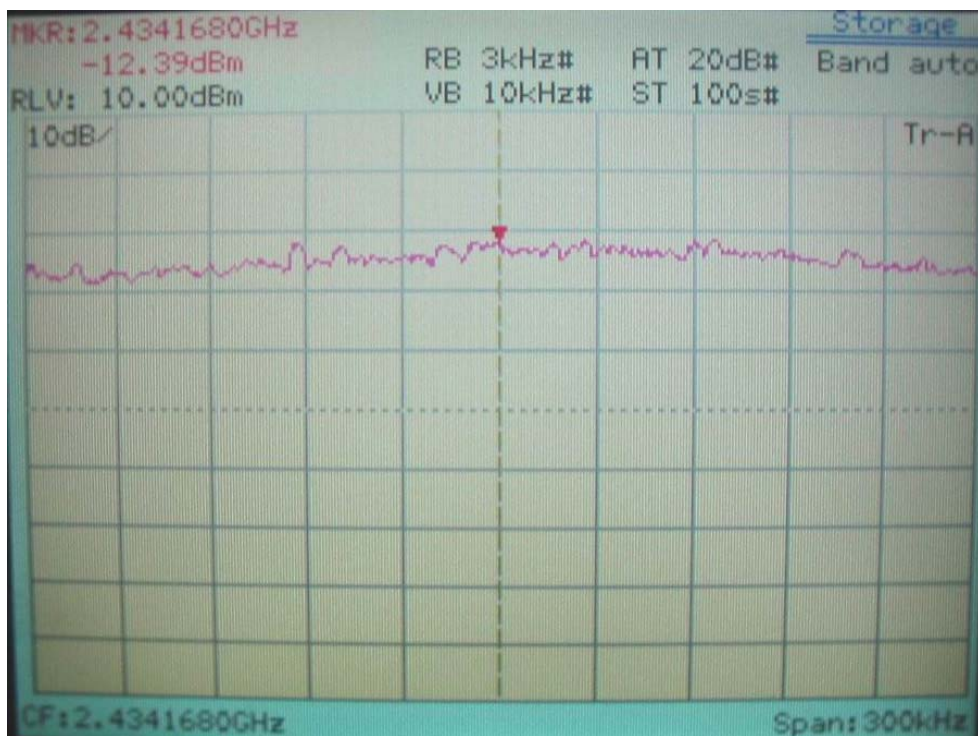


IEEE 802.11g

Power Spectral Density for Channel 11

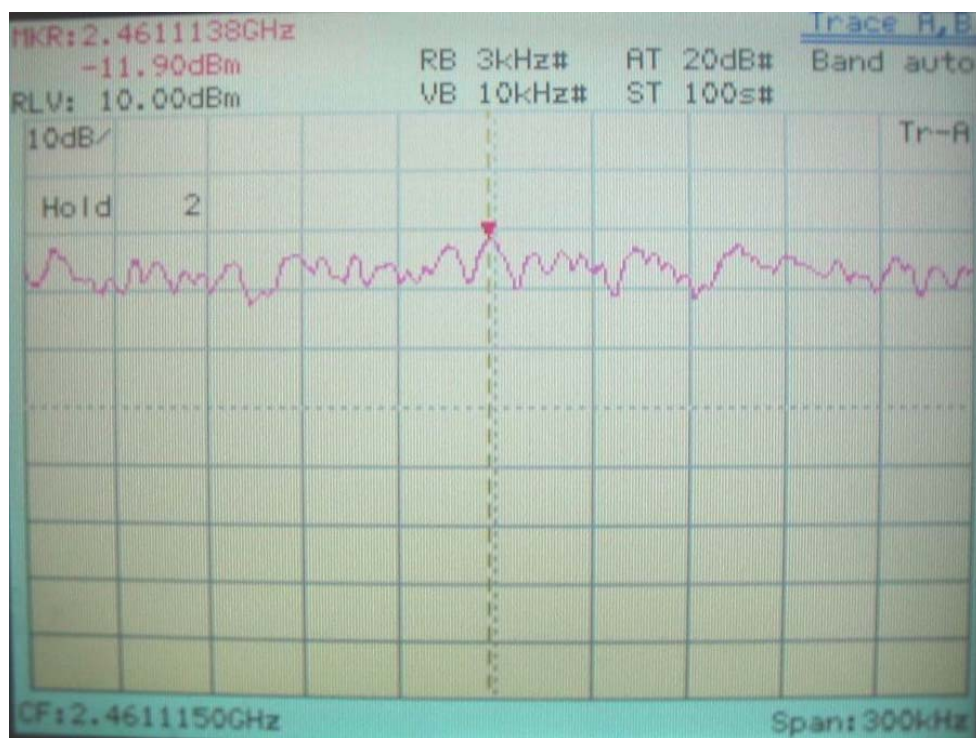

IEEE 802.11b

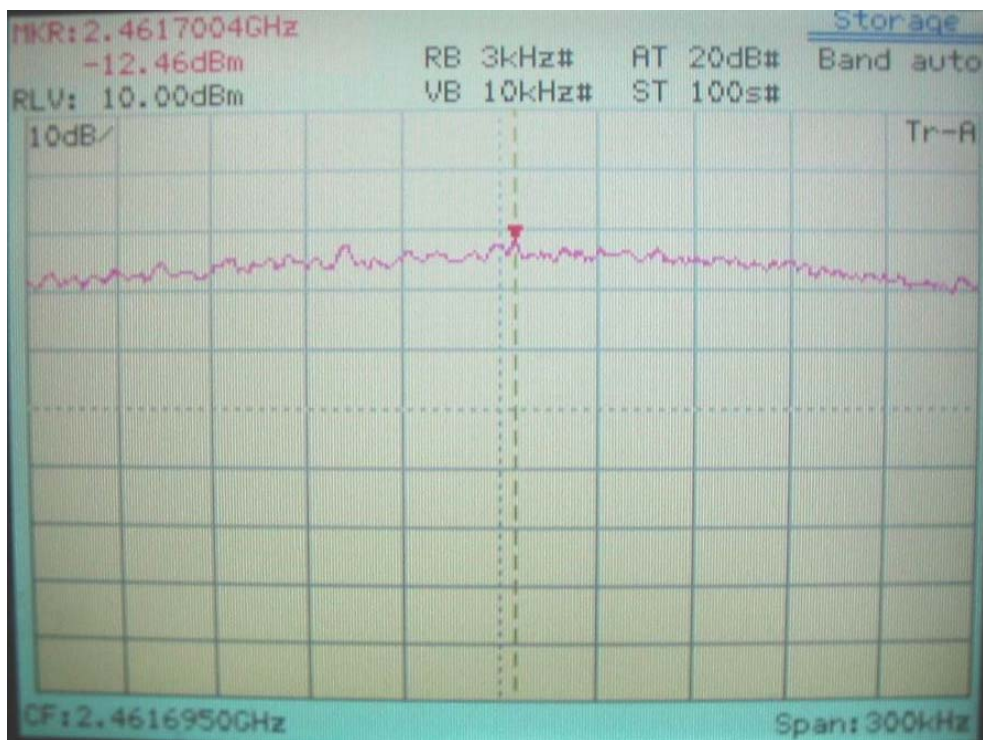

IEEE 802.11g