

MEASUREMENT REPORT
of
Bluetooth Module

Applicant : PEGATRON CORPORATION
EUT : Bluetooth Module
FCC ID : VUIBT185
Model : BT-185

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155

FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by *Training Research Co., Ltd., No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.* Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart C Section 15.247.


Applicant : PEGATRON CORPORATION
Applicant Address : 5F, NO. 76, LIGONG ST., BEITOU DISTRICT,
TAIPEI CITY, Taiwan
FCC ID : VUIBT185
Report No. : P5515080264
Test Date : September 05, 2008

Prepared by:

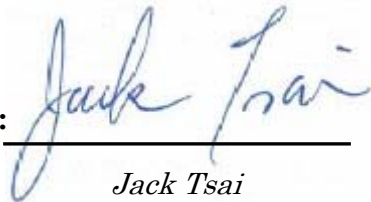

Jack Tsai

Approved by:

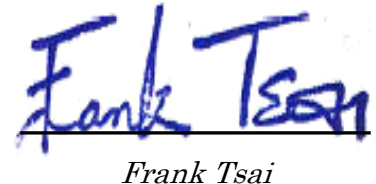

Frank Tsai

Conditions of issue :

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**



NVLAP LAB CODE 200174-0

Tables of Contents

I. GENERAL	5
1.1 Introduction	5
1.2 Description of EUT	5
1.3 Test method	5
1.4 Description of Support Equipment	6
1.5 Configuration of System Under Test	8
1.6 Verify the Frequency and Channel	9
1.7 Test Procedure	10
1.8 Location of the Test Site	10
1.9 General Test Condition	10
II. Section 15.203 : Antenna Requirement.....	11
III. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	12
3.1 Test Condition & Setup	12
3.2 List of Test Instruments	13
3.3 Test Result of Conducted Emissions	14
IV. Section 15.247(a) : Technical Description of the EUT.....	20
V. Section 15.247(a)(1) : Carrier Frequency Separation.....	21
5.1 Test Condition	21
5.2 Test Instruments Configuration	21
5.3 List of Test Instruments	22
5.4 Test Results	22
VI. Section 15.247(a)(1)(ii) : Number of Hopping Frequencies	26
6.1 Test Condition	26
6.2 List of Test Instruments	26
6.3 Test Instruments Configuration	26
6.4 Test Results	27

VII. Section 15.247(a)(1)(ii) : Time of Occupancy (Dwell time)	31
7.1 Test Condition	31
7.2 List of Test Instruments	31
7.3 Test Instruments Configuration	32
7.4 Test Results	32
VIII. Section 15.247(a)(1)(ii) : 20dB Bandwidth	39
8.1 Test Condition	39
8.2 Test Instruments Configuration	39
8.3 List of Test Instruments	40
8.4 Test Results	40
IX. Section 15.247(b) : Peak Output Power	44
9.1 Test Condition & Setup	44
9.2 List of Test Instruments	44
9.3 Test Results	45
X. Section 15.247(c) : Band-edge Compliance	46
10.1 Test Condition & Setup	46
10.2 List of Test Instruments.....	46
10.3 Test Instruments Configuration	47
10.4 Test Results	47
XI. Section 15.247(c) : Spurious Radiated Emissions	52
11.1 Test Condition & Setup.....	52
11.2 List of Test Instruments.....	54
11.3 Test Results of Spurious Radiated Emissions	55
XII. Section 15.247(d) : Power Spectral Density	67
12.1 Test Condition & Setup	67
12.2 Test Instruments Configuration	67
12.3 List of Test Instruments.....	67
12.4 Test Result of Power Spectral Density	68

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A and C of the Commission's Rules and Regulations.

1.2 Description of EUT

FCC ID : VUIBT185

Product Name : Bluetooth Module

Model : BT-185

Frequency Range : 2402MHz to 2480MHz

Support Channel : 79 Channels

Channel Spacing : 1MHz

Modulation Skill : GFSK, Pi/4DQPSK,8DPSK

Product Described: It is Bluetooth 2.1 + EDR

Power Type : Powered by USB to 3P-3V converter by Test fixture of client's device

1.3 Test method

1. Plugged the EUT into USB to 3P-3V converter of the test fixture.
2. Using the computer and software provided by the manufacturer to control EUT. The software is operated under the Windows to control the EUT in the mode of continuous transmission; the test is performed under the specific conditions.
3. Set different channel and data rate being tested and repeat the procedures above.
 - (a) Conduction test and Radiated for Intentional test:
making EUT to the mode of continuous transmission

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : **DELL INC.**
Model No. : DC8M
Serial No. : 78Y9T1S
FCC ID : DoC (Declaration of Confirmation) Approved
BSMI : R33002
Power type : 100 ~ 127VAC/200 ~ 240VAC, 6A/3A, 50 ~ 60Hz, Switching
Power cord : Non-shielded, 1.80m length, Plastic hood, No ferrite core

Monitor : **HP 15' Color Monitor**
Model No. : D2827A
Serial No. : KR91161719
FCC ID : C5F7NFCMC1518X
BSMI : 3872B039
Power type : 100 ~ 240 VAC / 50 ~ 60 Hz, Switching
Power cord : Shielded, 1.83m length, No ferrite core
Data cable : Shielded, 1.46m length, with two ferrite cores

USB Keyboard : **DELL**
Model No. : SK-8115
Serial No. : MY-0DJ325-71619-7CH-0790
FCC ID: DoC (Declaration of Confirmation) Approved
BSMI : T3A002
Power type : By PC
Data cable : Shielded, 2.06m length, with ferrite core

USB Mouse : **DELL**
Model No. : M056UC
Serial No. : G19002XP
FCC ID : DoC (Declaration of Confirmation) Approved
BSMI : R41108
Power type : By PC
Power cord : Shielded, 1.85m length, No ferrite core

Test fixture

(USB to 3P-3V converter):PEGATRON CORPORATION


Model No. : 219AU020700

Serial No. : N/A

Data cable : Shielded, 44 cm length, plastic hood, ferrite core

Power type : By PC

1.5 Configuration of System Under Test

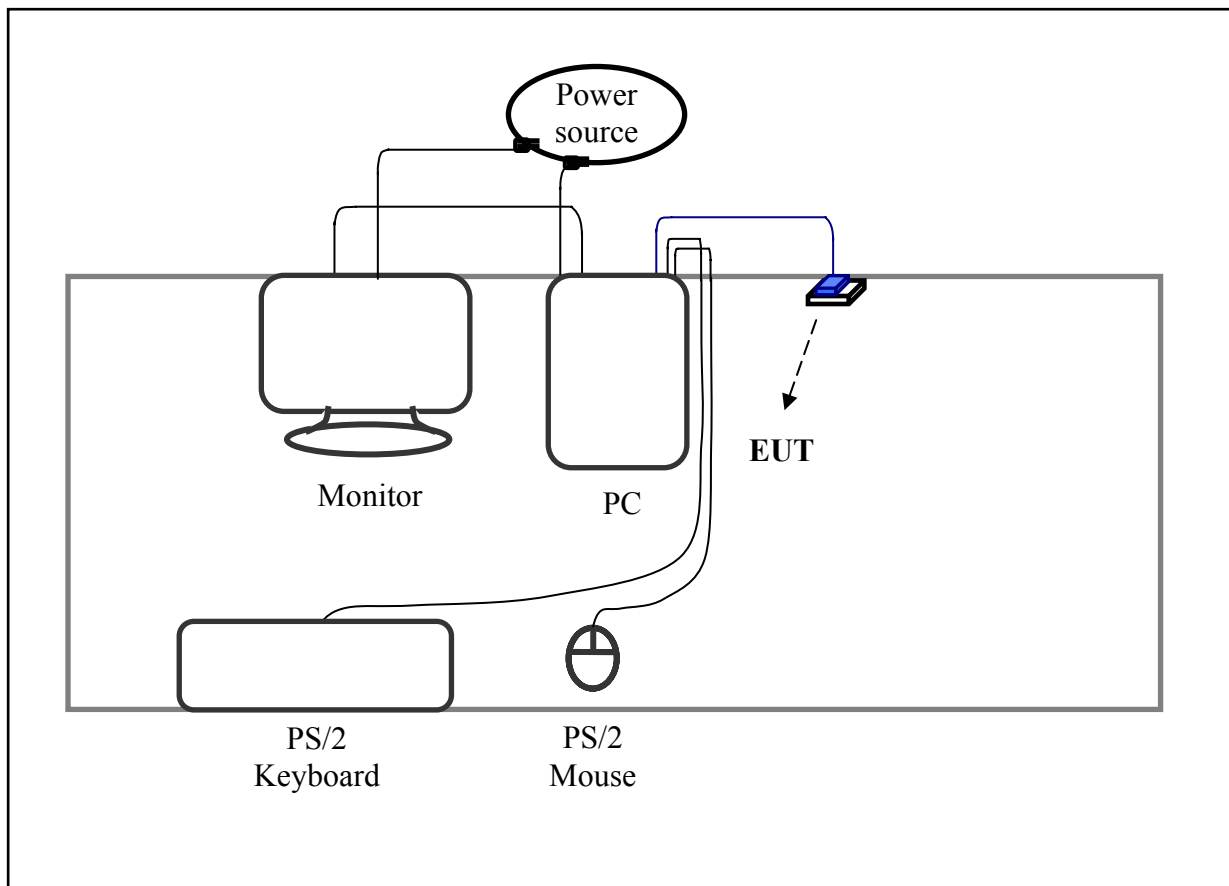

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by USB interface of PC.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency (MHz) and Channel

CH	0	1	2	3	4	5	6	7	8	9
0		2402	2403	2404	2405	2406	2407	2408	2409	2410
1	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420
2	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430
3	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440
4	2441	2442	2443	2444	2445	2446	2447	2448	2449	2450
5	2451	2452	2453	2454	2455	2456	2457	2458	2459	2460
6	2461	2462	2463	2464	2465	2466	2467	2468	2469	2470
7	2471	2472	2473	2474	2475	2476	2477	2478	2479	2480

Note:

1. This is for confirming that all frequencies are in 2.402GHz to 2.480GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.402GHz to 2.480GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 01; Middle: Channel – 40; Bottom: Channel – 79.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

There is a test condition apply in this test item, the test procedure description as <1.3 test method>. Three channels were tested, one in the top (CH1), one in the middle (CH40) and the other in bottom (CH79).

II. Section 15.203: Antenna requirement

The EUT has an integrated antenna permanently attached on the PCB, which inside the housing. In addition, there is no external antenna or connector employed. The antenna requirement stated in Sect.15.203 is inapplicable to this EUT.

III. Section 15.207: Power Line Conducted Emissions for AC Powered Units

3.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150KHz to 30MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3

There is a test condition apply in this test item, the test procedure description as <1.3 test method>. Three channels were tested, one in the top (CH1), one in the middle (CH40) and the other in bottom (CH79).

3.2 List of Test Instruments

				<u>Calibration Date</u>
Instrument Name	Model	Brand	Serial No.	Next time
EMI Receiver	8546A	HP	3520A00242	12/05/08
RF Filter Section	85460A	HP	3448A00217	12/05/08
LISN (EUT)	LISN-01	TRC	99-05	11/10/08
LISN (Support E.)	LISN-01	TRC	9912-03, 04	09/22/08
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	11/04/08
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	10/10/08
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	10/10/08
Coaxial Cable (2 meter)	A30A30-0058-5 0FS-2M	Jyebao	SMA-08	10/10/08
Coaxial Cable (1.1 meter)	A30A30-0058-5 0FS-1M	Jyebao	SMA-09	10/10/08
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	10/10/08
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	10/10/08
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	10/10/08

3.3 Test Result of Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. The test data only recorded worst case in report.

Test Conditions: Temperature : 25.0 °C Humidity : 73.0 % RH

Test Mode: Normal Mode for BT CH01

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBµV)</i>	<i>QP (dBµV)</i>	<i>Average (dBµV)</i>	<i>QP-limit (dBµV)</i>	<i>AVG-limit (dBµV)</i>	<i>Margin (dB)</i>
Line 1	155.000	42.10	---	---	65.86	55.86	-13.76
	255.000	39.96	---	---	63.00	53.00	-13.04
	380.000	35.95	---	---	59.43	49.43	-13.48
	633.000	34.98	---	---	56.00	46.00	-11.02
	817.000	38.82	---	---	56.00	46.00	-7.18
	998.000	33.43	---	---	56.00	46.00	-12.57
	1385.000	31.50	---	---	56.00	46.00	-14.50
	3542.000	34.66	---	---	56.00	46.00	-11.34
	9370.000	34.69	---	---	60.00	50.00	-15.31
	21070.000	38.55	---	---	60.00	50.00	-11.45
Line 2	255.000	40.44	---	---	63.00	53.00	-12.56
	380.000	36.64	---	---	59.43	49.43	-12.79
	633.000	34.22	---	---	56.00	46.00	-11.78
	759.000	33.11	---	---	56.00	46.00	-12.89
	1269.000	32.74	---	---	56.00	46.00	-13.26
	1766.000	31.19	---	---	56.00	46.00	-14.81
	2415.000	28.20	---	---	56.00	46.00	-17.80
	9510.000	27.21	---	---	60.00	50.00	-22.79
	15570.000	31.14	---	---	60.00	50.00	-18.86
	21410.000	38.62	---	---	60.00	50.00	-11.38

NOTE:

- (1)Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit

Test Mode: Normal Mode for BT CH40

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	159.000	41.44	---	---	65.74	55.74	-14.30
	255.000	40.22	---	---	63.00	53.00	-12.78
	380.000	36.13	---	---	59.43	49.43	-13.30
	633.000	34.04	---	---	56.00	46.00	-11.96
	759.000	32.92	---	---	56.00	46.00	-13.08
	884.000	31.73	---	---	56.00	46.00	-14.27
	1269.000	32.33	---	---	56.00	46.00	-13.67
	1906.000	30.88	---	---	56.00	46.00	-15.12
	2532.000	30.98	---	---	56.00	46.00	-15.02
	2925.000	31.85	---	---	56.00	46.00	-14.15
Line 2	197.000	40.29	---	---	64.66	54.66	-14.37
	255.000	40.63	---	---	63.00	53.00	-12.37
	380.000	37.79	---	---	59.43	49.43	-11.64
	633.000	32.63	---	---	56.00	46.00	-13.37
	759.000	33.13	---	---	56.00	46.00	-12.87
	884.000	32.06	---	---	56.00	46.00	-13.94
	1269.000	33.16	---	---	56.00	46.00	-12.84
	1398.000	31.36	---	---	56.00	46.00	-14.64
	1766.000	30.92	---	---	56.00	46.00	-15.08
	20300.000	38.24	---	---	60.00	50.00	-11.76

Test Mode: Normal Mode for BT CH79

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	177.000	41.46	---	---	65.23	55.23	-13.77
	252.000	40.81	---	---	63.09	53.09	-12.28
	380.000	36.04	---	---	59.43	49.43	-13.39
	587.000	33.37	---	---	56.00	46.00	-12.63
	759.000	33.77	---	---	56.00	46.00	-12.23
	884.000	31.55	---	---	56.00	46.00	-14.45
	1269.000	32.33	---	---	56.00	46.00	-13.67
	1398.000	31.48	---	---	56.00	46.00	-14.52
	1906.000	30.83	---	---	56.00	46.00	-15.17
	2532.000	32.63	---	---	56.00	46.00	-13.37
Line 2	174.000	40.24	---	---	65.31	55.31	-15.07
	203.000	39.49	---	---	64.49	54.49	-15.00
	255.000	40.42	---	---	63.00	53.00	-12.58
	380.000	37.09	---	---	59.43	49.43	-12.34
	633.000	33.26	---	---	56.00	46.00	-12.74
	759.000	34.13	---	---	56.00	46.00	-11.87
	1269.000	32.95	---	---	56.00	46.00	-13.05
	1398.000	31.26	---	---	56.00	46.00	-14.74
	1766.000	31.40	---	---	56.00	46.00	-14.60
	2286.000	29.79	---	---	56.00	46.00	-16.21

Test Mode: E.D.R. Mode for BT CH01

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	252.000	40.71	---	---	63.09	53.09	-12.38
	380.000	35.25	---	---	59.43	49.43	-14.18
	598.000	33.84	---	---	56.00	46.00	-12.16
	759.000	32.64	---	---	56.00	46.00	-13.36
	884.000	32.26	---	---	56.00	46.00	-13.74
	1269.000	32.40	---	---	56.00	46.00	-13.60
	1398.000	31.57	---	---	56.00	46.00	-14.43
	1906.000	30.76	---	---	56.00	46.00	-15.24
	2158.000	29.09	---	---	56.00	46.00	-16.91
	2532.000	32.10	---	---	56.00	46.00	-13.90
Line 2	195.000	39.90	---	---	64.71	54.71	-14.81
	252.000	40.01	---	---	63.09	53.09	-13.08
	380.000	36.75	---	---	59.43	49.43	-12.68
	610.000	32.75	---	---	56.00	46.00	-13.25
	759.000	33.72	---	---	56.00	46.00	-12.28
	884.000	31.14	---	---	56.00	46.00	-14.86
	1269.000	33.37	---	---	56.00	46.00	-12.63
	1398.000	31.47	---	---	56.00	46.00	-14.53
	1766.000	31.11	---	---	56.00	46.00	-14.89
	1906.000	29.74	---	---	56.00	46.00	-16.26

Test Mode: E.D.R. Mode for BT CH40

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	255.000	39.70	---	---	63.00	53.00	-13.30
	380.000	35.23	---	---	59.43	49.43	-14.20
	401.000	34.08	---	---	58.83	48.83	-14.75
	633.000	33.90	---	---	56.00	46.00	-12.10
	759.000	32.78	---	---	56.00	46.00	-13.22
	884.000	32.53	---	---	56.00	46.00	-13.47
	1269.000	31.07	---	---	56.00	46.00	-14.93
	1398.000	30.40	---	---	56.00	46.00	-15.60
	1906.000	30.18	---	---	56.00	46.00	-15.82
	2925.000	32.56	---	---	56.00	46.00	-13.44
Line 2	255.000	40.07	---	---	63.00	53.00	-12.93
	384.000	36.72	---	---	59.31	49.31	-12.59
	604.000	32.70	---	---	56.00	46.00	-13.30
	759.000	33.55	---	---	56.00	46.00	-12.45
	1269.000	32.76	---	---	56.00	46.00	-13.24
	1398.000	31.50	---	---	56.00	46.00	-14.50
	1645.000	30.47	---	---	56.00	46.00	-15.53
	1766.000	30.71	---	---	56.00	46.00	-15.29
	1906.000	30.02	---	---	56.00	46.00	-15.98
	2415.000	28.29	---	---	56.00	46.00	-17.71

Test Mode: E.D.R. Mode for BT CH79

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	255.000	41.76	---	---	63.00	53.00	-11.24
	380.000	36.90	---	---	59.43	49.43	-12.53
	581.000	32.46	---	---	56.00	46.00	-13.54
	633.000	32.83	---	---	56.00	46.00	-13.17
	759.000	32.96	---	---	56.00	46.00	-13.04
	884.000	31.48	---	---	56.00	46.00	-14.52
	1269.000	30.49	---	---	56.00	46.00	-15.51
	1398.000	31.66	---	---	56.00	46.00	-14.34
	1906.000	29.79	---	---	56.00	46.00	-16.21
	2663.000	31.93	---	---	56.00	46.00	-14.07
Line 2	166.000	41.27	---	---	65.54	55.54	-14.27
	252.000	40.41	---	---	63.09	53.09	-12.68
	326.000	34.41	---	---	60.97	50.97	-16.56
	380.000	37.51	---	---	59.43	49.43	-11.92
	627.000	32.03	---	---	56.00	46.00	-13.97
	759.000	32.97	---	---	56.00	46.00	-13.03
	1269.000	33.04	---	---	56.00	46.00	-12.96
	1385.000	31.68	---	---	56.00	46.00	-14.32
	1766.000	31.38	---	---	56.00	46.00	-14.62
	1906.000	29.33	---	---	56.00	46.00	-16.67

IV. Section 15.247 (a): Technical description of the EUT

Based on the Section 2.1, *Frequency Hopping Spectrum System* is a spread spectrum system in which the carrier has been modulated by a *high speed spreading code* and an *information data stream* with its *known hopping algorithm* and *avoidance method*. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the *operational description* demonstrates the operation principles of the base-band processor employed by the EUT, shows that which is a complete FHSS base-band processor and meets the definition of the *Frequency Hopping Spectrum System*.

V. Section 15.247(a)(1): Carrier Frequency Separation

5.1 Test Condition

The EUT must have its hopping function enabled. Use the following spectrum analyzer setting

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = Auto


Detector Function = peak

Trace = max hold

Setting up procedure is written on 1.3 test method.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channel. The limit is specified in one of the subparagraphs of this section. Submit this plot.

5.2 Test Instruments Configuration

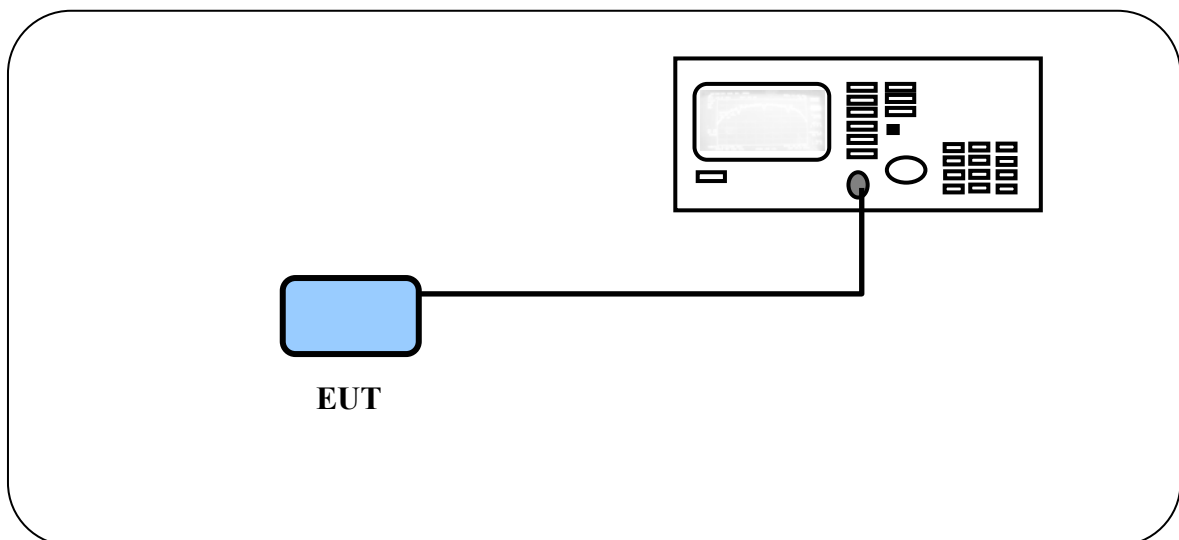

Test Configuration of carrier frequency separation

5.3 List of Test Instruments

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Calibration Date</u> Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/19/08

5.4 Test Results

Channel	Normal mode	E.D.R mode
01	990 kHz	990 kHz
40	996 kHz	990 kHz
79	996 kHz	990 kHz

Carrier Frequency Separation for CH01



Normal mode



E.D.R. mode

Carrier Frequency Separation for CH40




Normal mode




E.D.R. mode

Carrier Frequency Separation for CH79

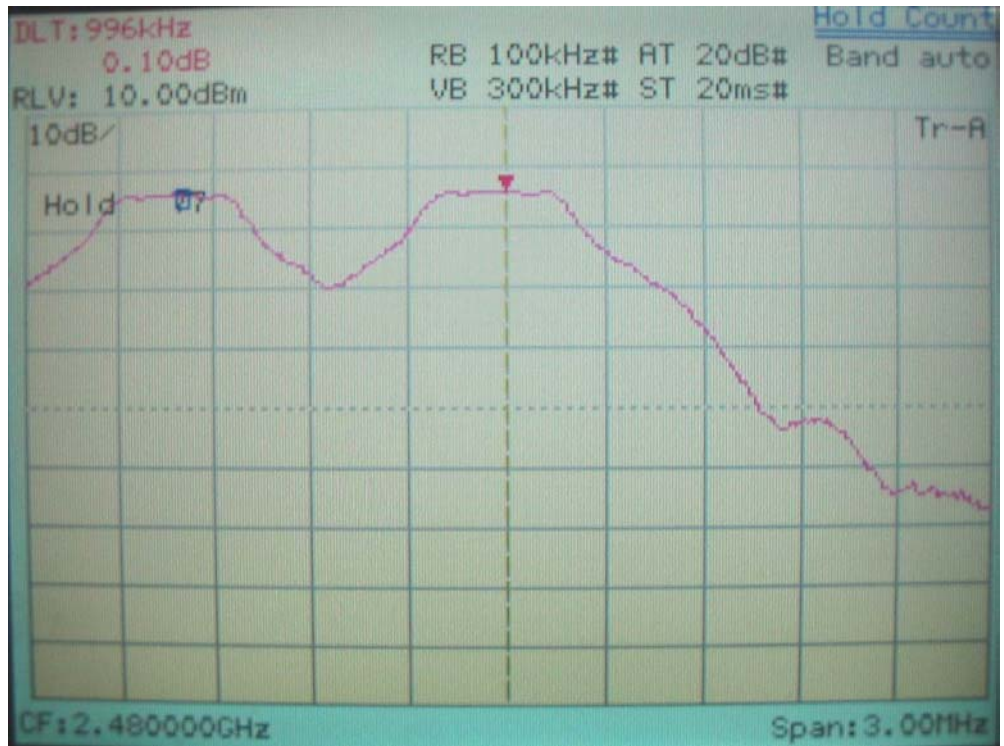

Normal mode

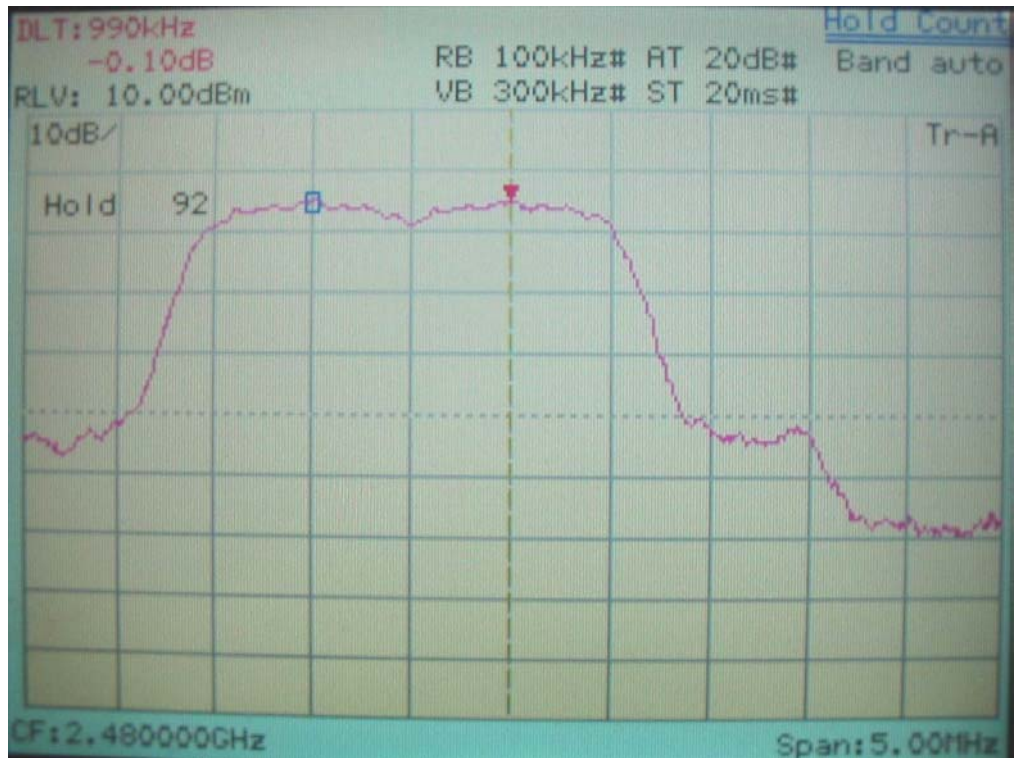

E.D.R. mode

VI. Section 15.247(a)(1)(ii) Number of Hopping Frequencies

6.1 Test Condition

The EUT must have its Hopping function enabled. Use the following spectrum analyzer setting:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections. In order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this section.

6.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Calibration Date
				Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/19/08



6.3 Test Instruments Configuration


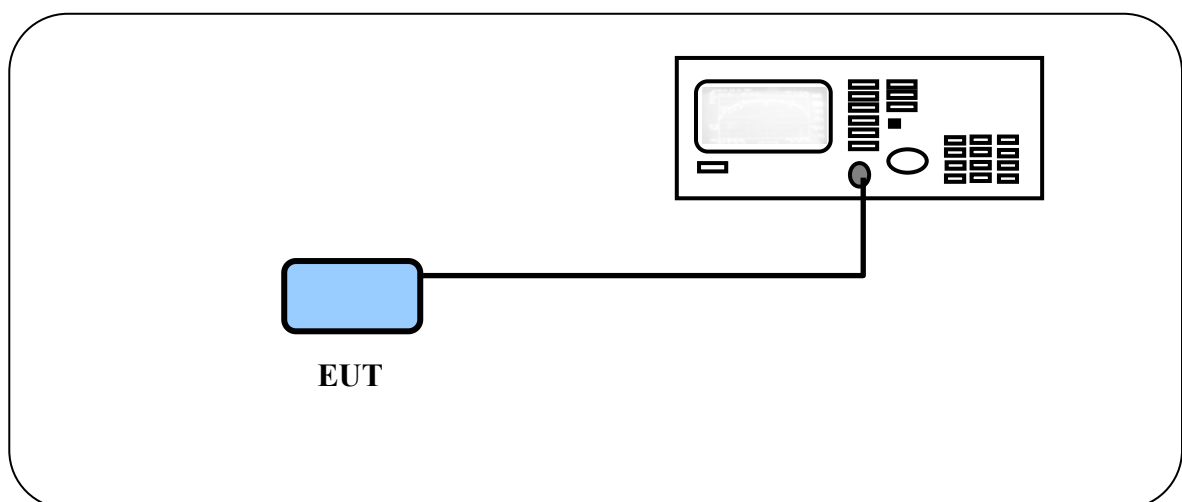


Test Configuration for number of hopping frequencies


6.4 Test Results



Normal mode

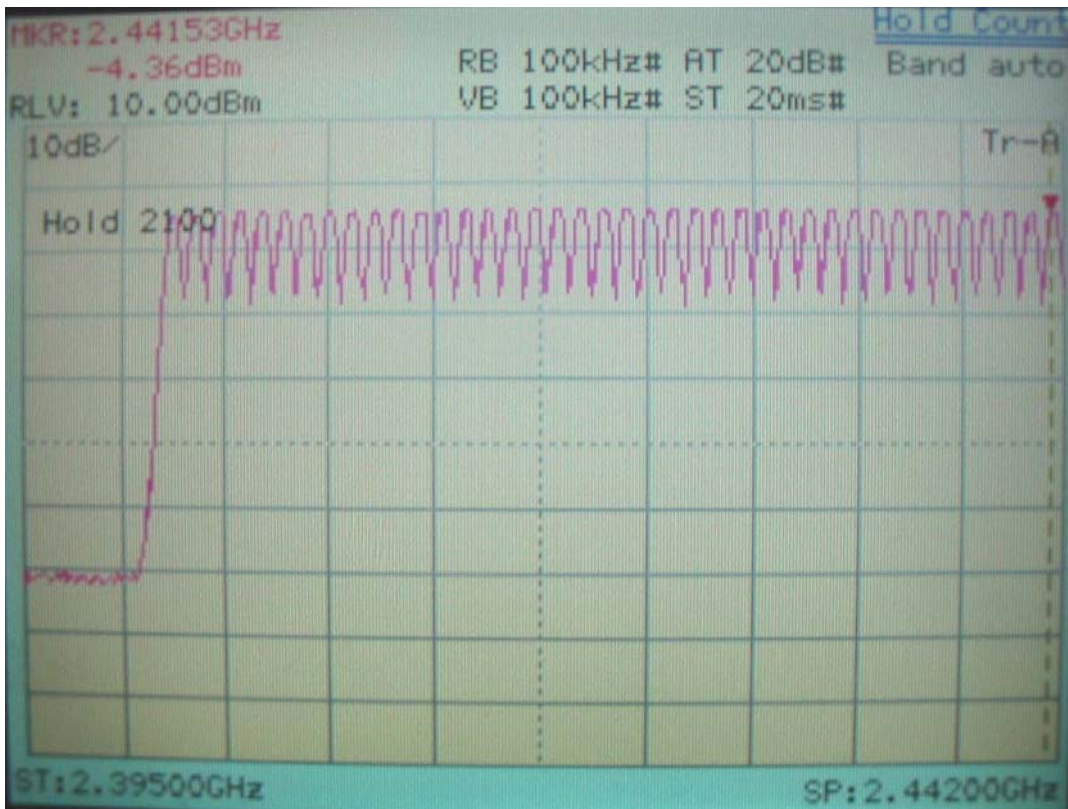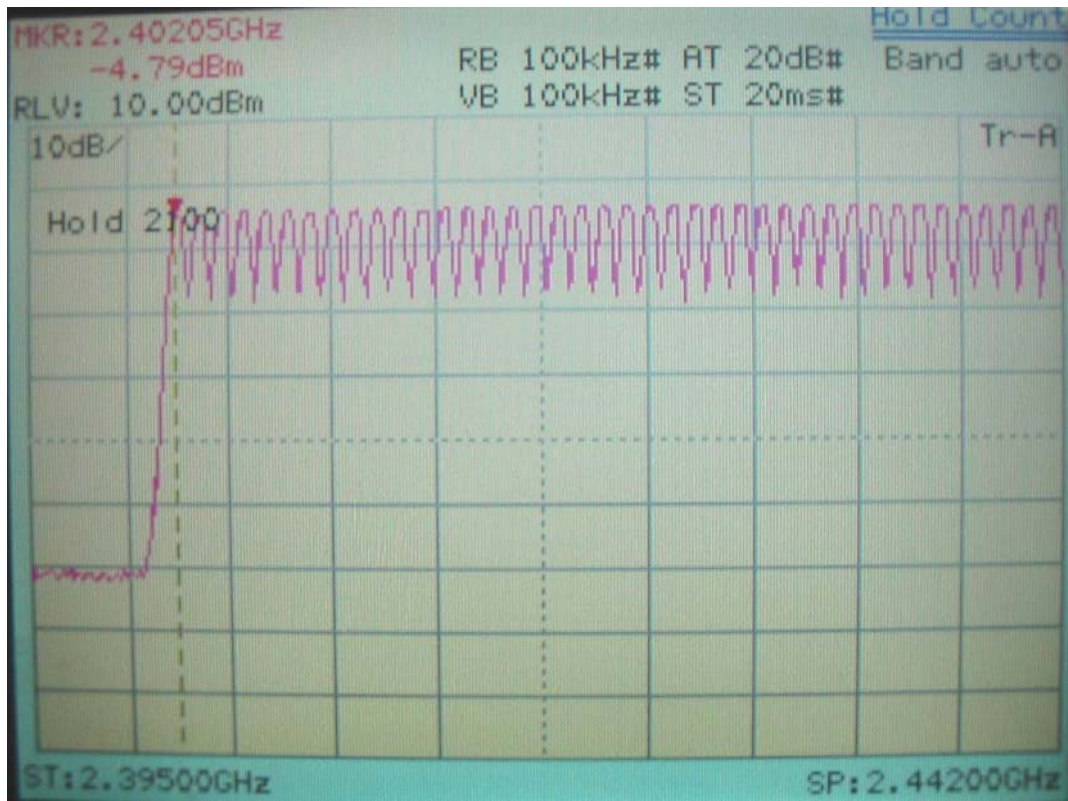

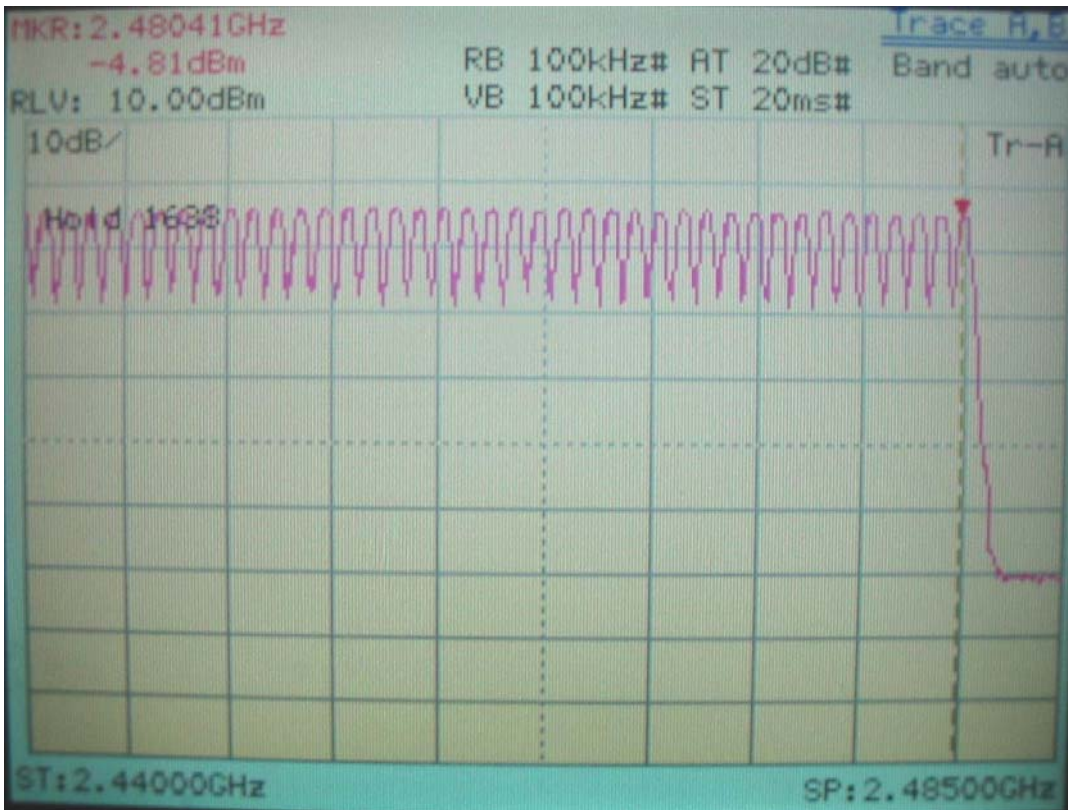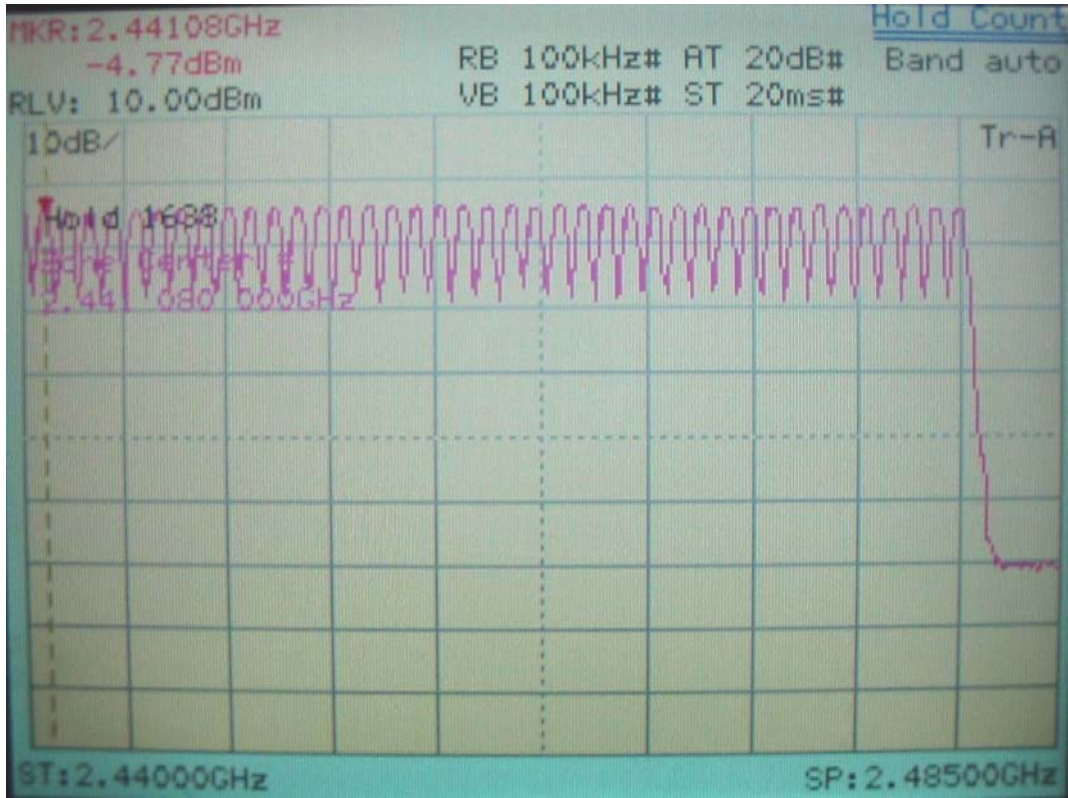

E.D.R. mode

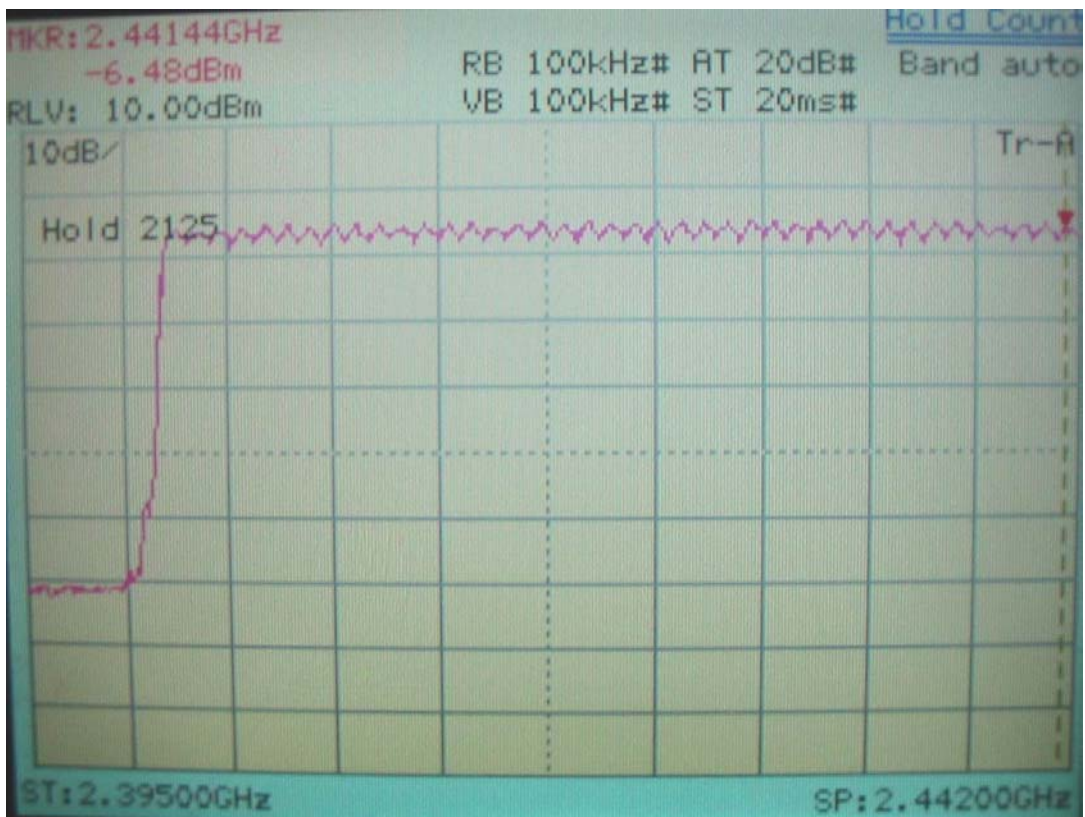

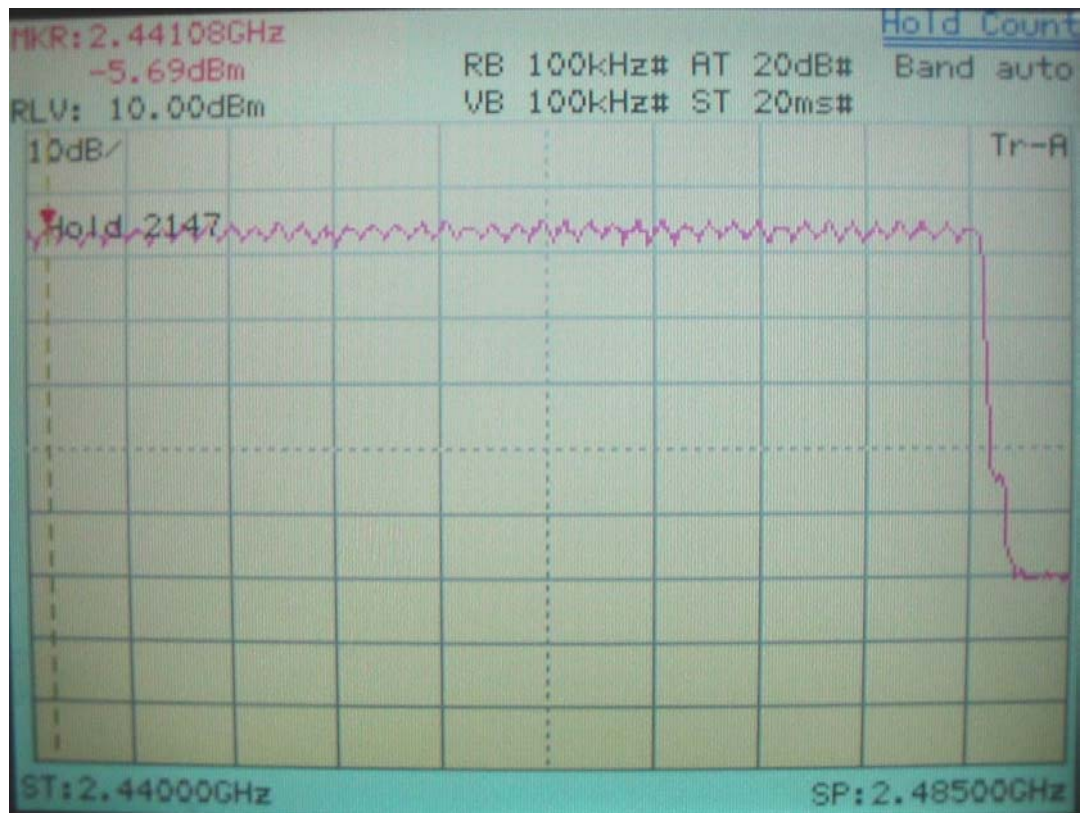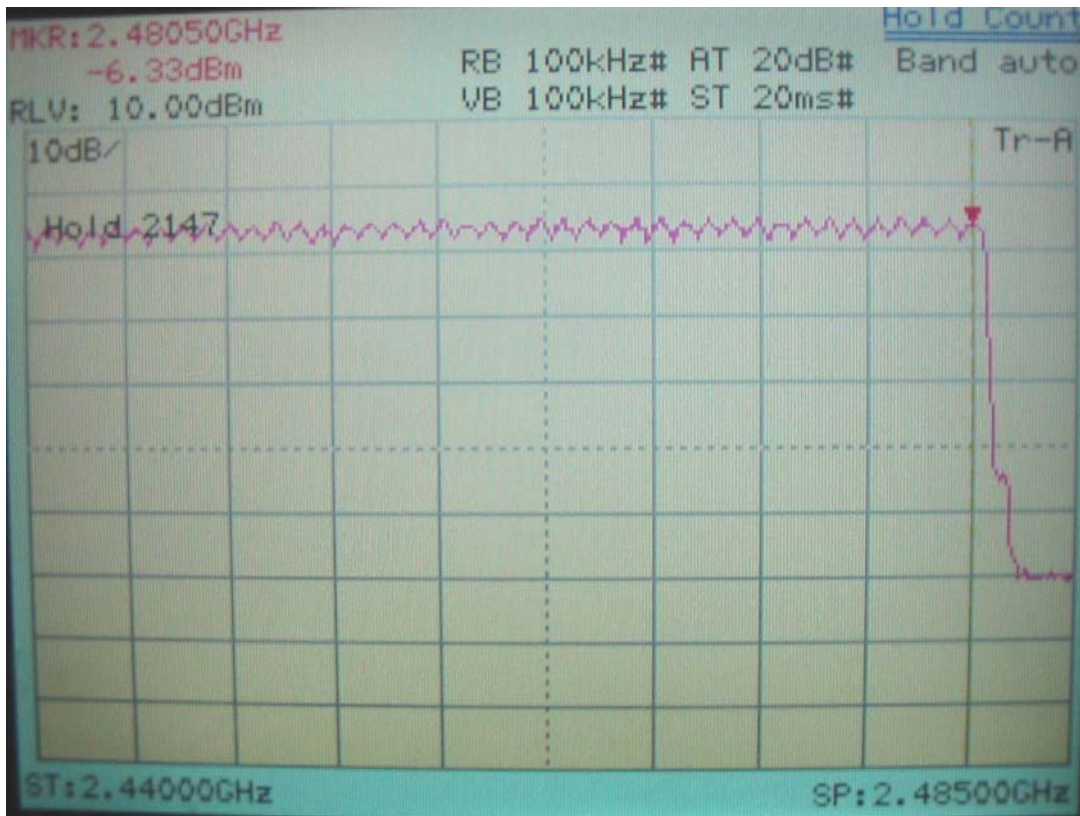

VII. Section 15.247(a)(1)(ii) Time of Occupancy (Dwell Time)

7.1 Test Condition

The EUT must have its hopping function enabled. Use the following spectrum analyzer setting:

Span = zero span, centered on a hopping channel

RBW = 3M

VBW \geq RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak


Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

7.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u> Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/19/08

7.3 Test Instruments Configuration

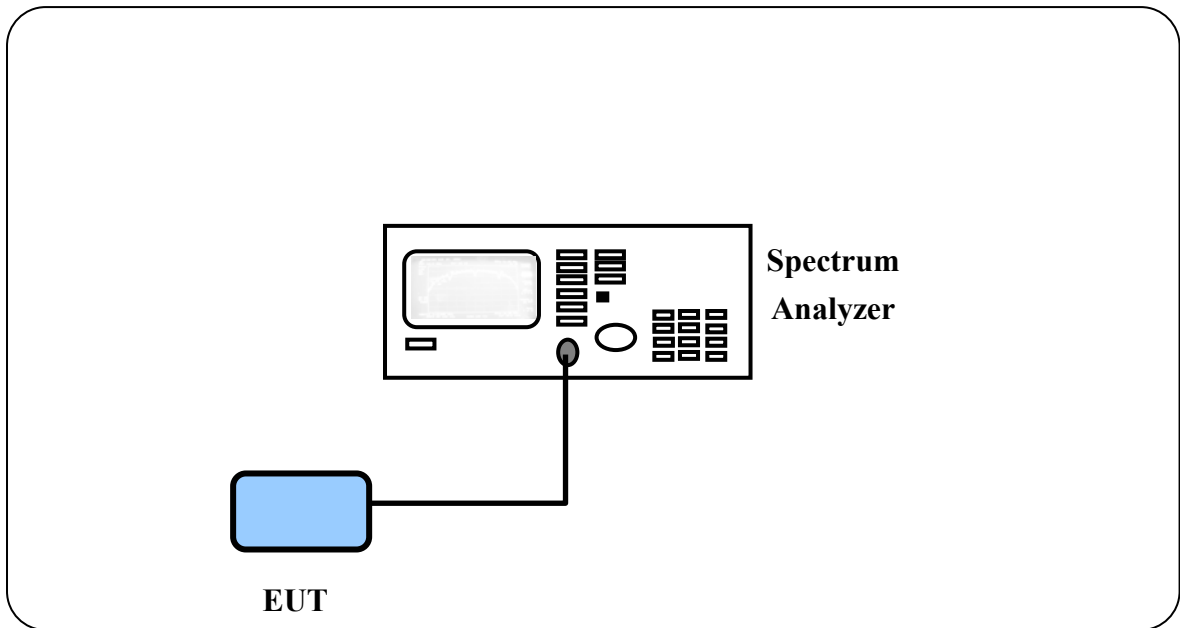

Note:

1. Running Bluetooth test set for Test mode.
2. Spectrum Analyzer record test results.

7.4 Test Results

Normal mode

CH	DH1-Packet (ms)	DH3-Packet (ms)	DH5-Packet (ms)
01	$0.480 \times 31.6 \times 10.12 = 153.50$	$1.748 \times 31.6 \times 5.06 = 279.50$	$3.00 \times 31.6 \times 3.37 = 319.48$
40	$0.486 \times 31.6 \times 10.12 = 155.42$	$1.752 \times 31.6 \times 5.06 = 280.14$	$3.01 \times 31.6 \times 3.37 = 320.54$
79	$0.488 \times 31.6 \times 10.12 = 156.06$	$1.752 \times 31.6 \times 5.06 = 280.14$	$3.00 \times 31.6 \times 3.37 = 319.48$

E.D.R. mode

CH	DH1-Packet (ms)	DH3-Packet (ms)	DH5-Packet (ms)
01	$0.490 \times 31.6 \times 10.12 = 156.70$	$1.756 \times 31.6 \times 5.06 = 280.78$	$3.02 \times 31.6 \times 3.37 = 321.61$
40	$0.494 \times 31.6 \times 10.12 = 157.98$	$1.756 \times 31.6 \times 5.06 = 280.78$	$3.02 \times 31.6 \times 3.37 = 321.61$
79	$0.490 \times 31.6 \times 10.12 = 156.70$	$1.752 \times 31.6 \times 5.06 = 280.14$	$3.01 \times 31.6 \times 3.37 = 320.54$

備註：1. $0.4 \times 79 = 31.6$ s



2. DH1: $1600 \div 79 \div 2 = 10.12$ ms

3. DH3: $1600 \div 79 \div 4 = 5.06$ ms




4. DH5: $1600 \div 79 \div 6 = 3.37$ ms

5. Show as following page.




DH1-Packet : (Normal mode)

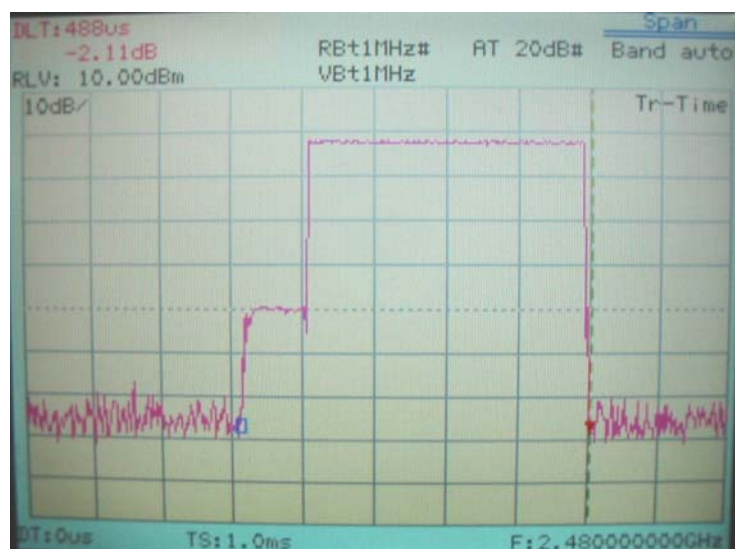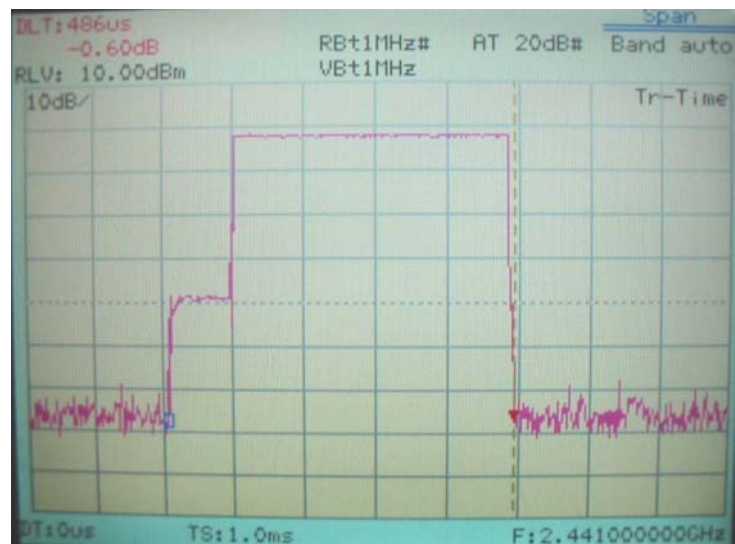



DH1-Packet : (E.D.R. mode)

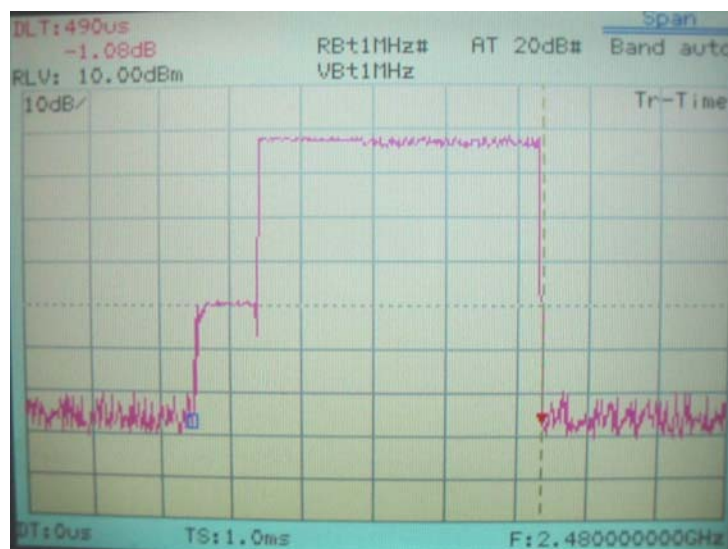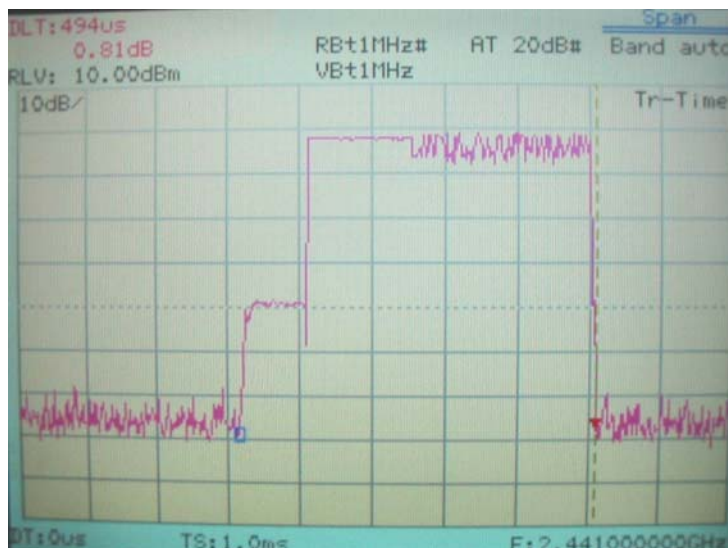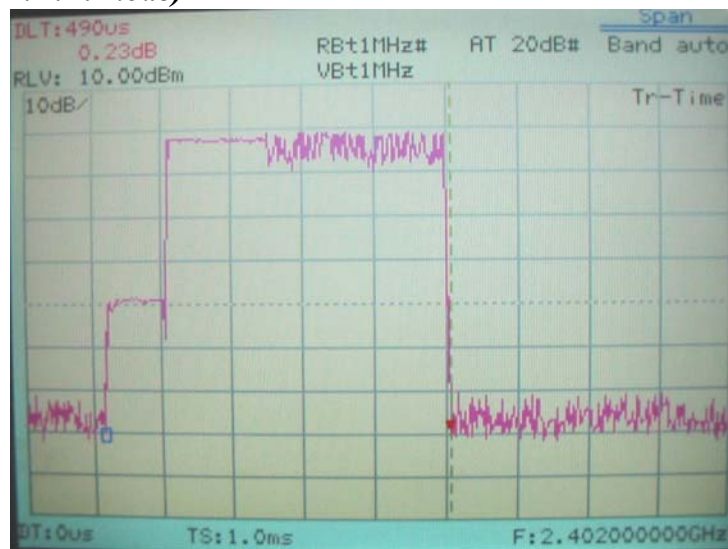




DH3-Packet : (Normal mode)

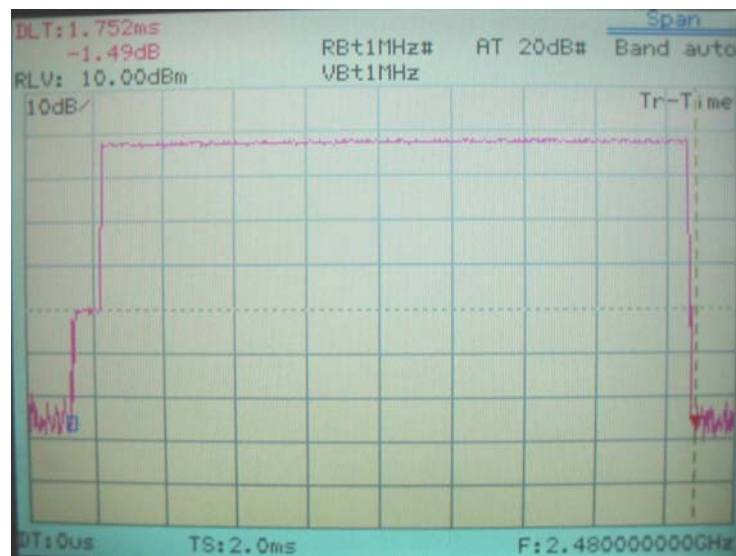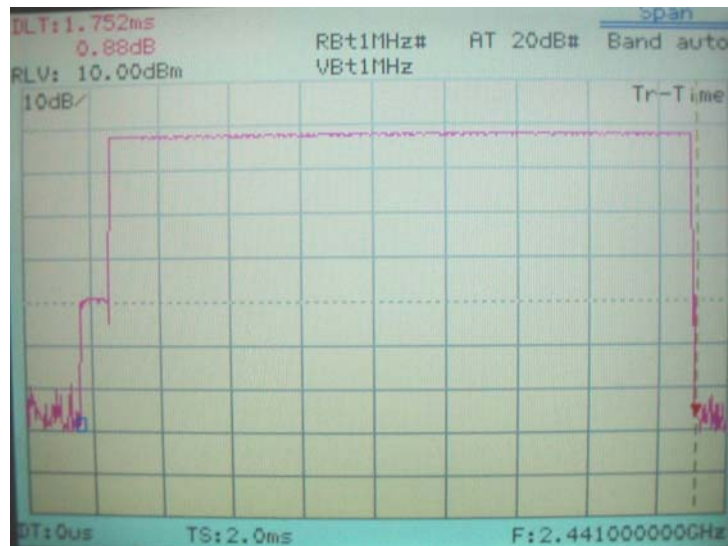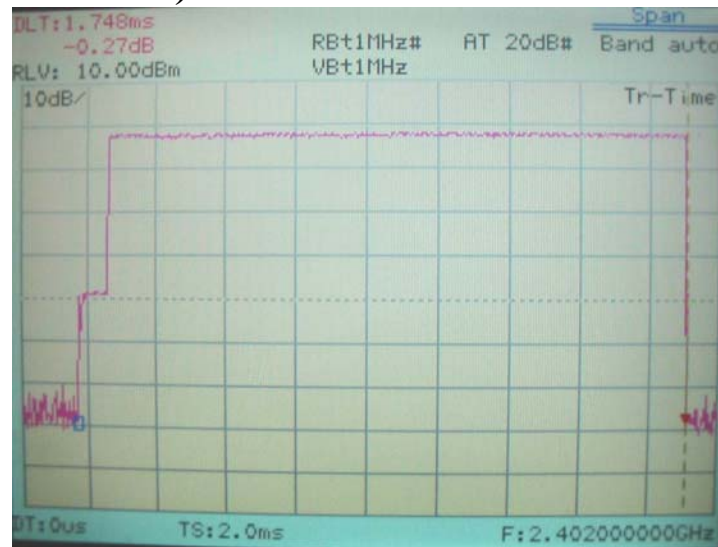




DH3-Packet : (E.D.R. mode)

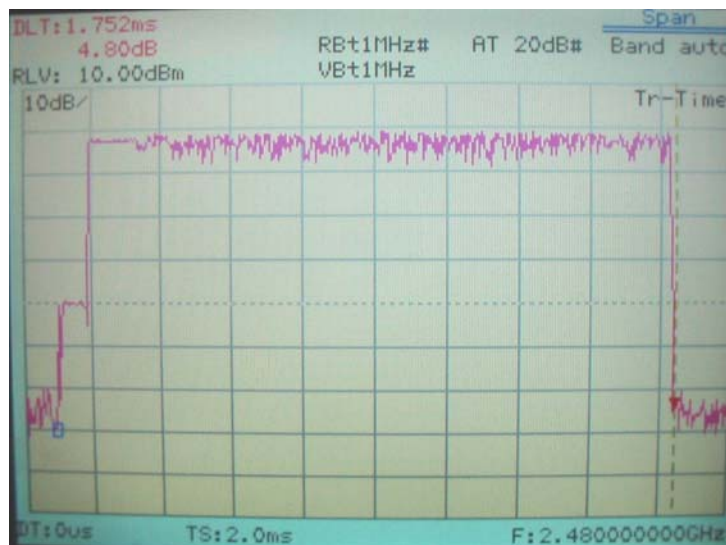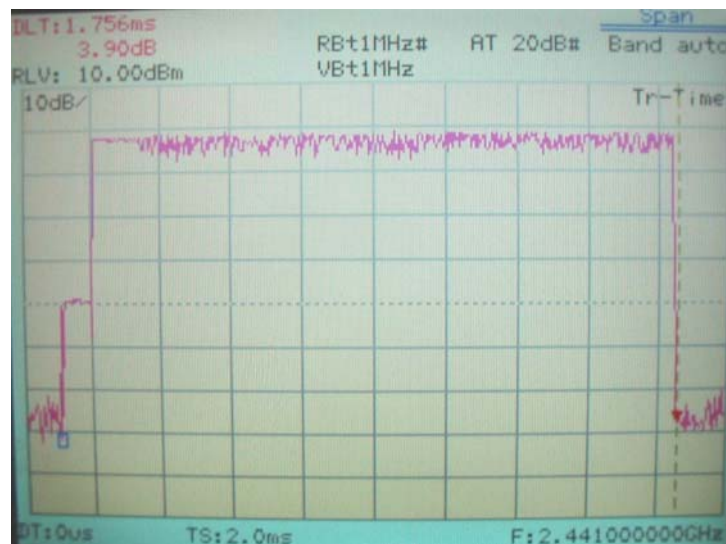

DH5-Packet : (Normal mode)

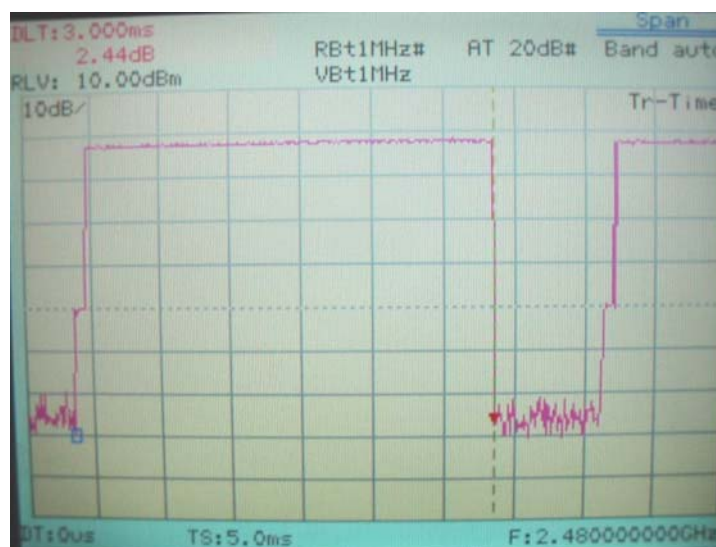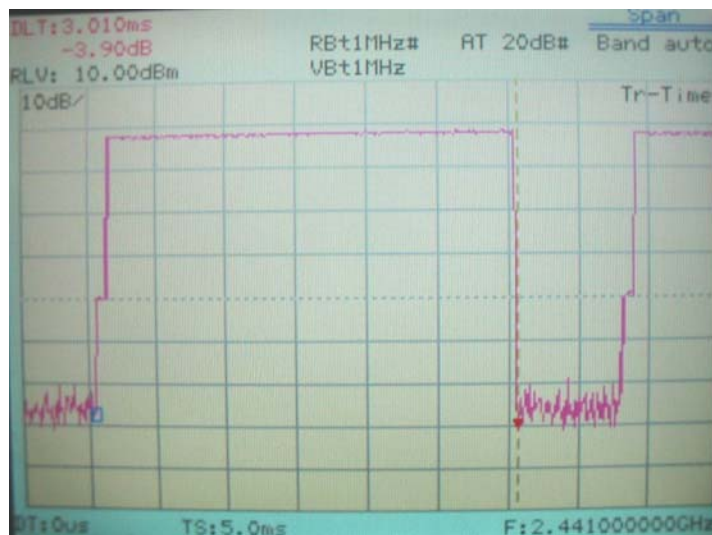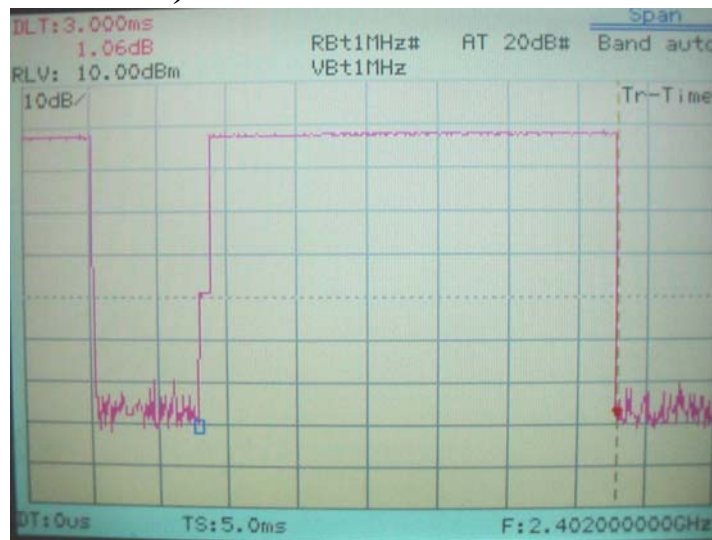

DH5-Packet : (E.D.R. mode)

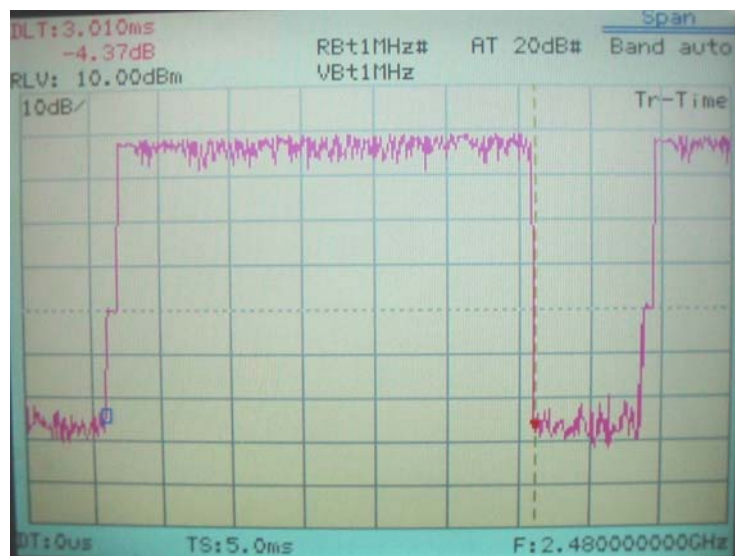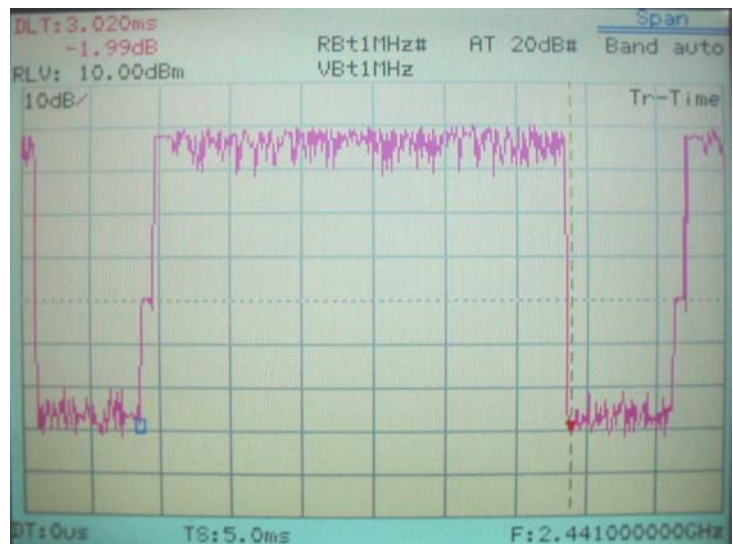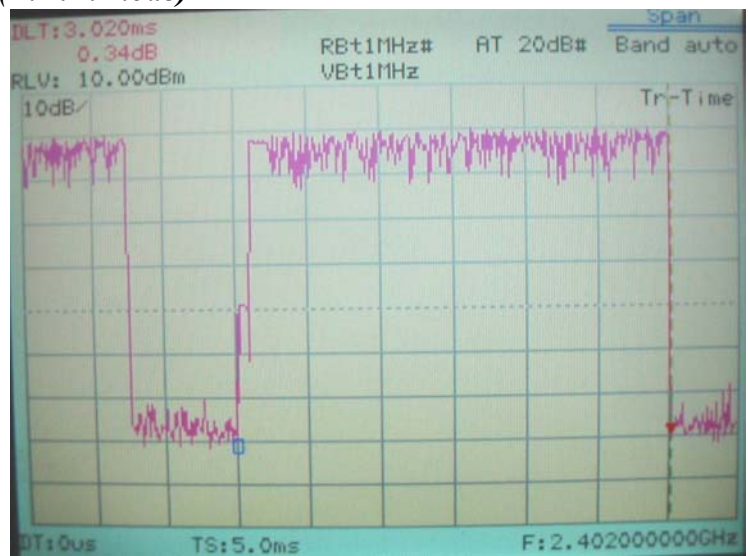

VIII. Section 15.247(a)(1)(ii) 20dB Bandwidth

8.1 Test Condition

Use the following spectrum analyzer setting:

Span = the frequency band of operation

RBW \geq 1% of the emission bandwidth

VBW \geq RBW


Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this section. Submit this plot(s).

8.2 Test Instruments Configuration

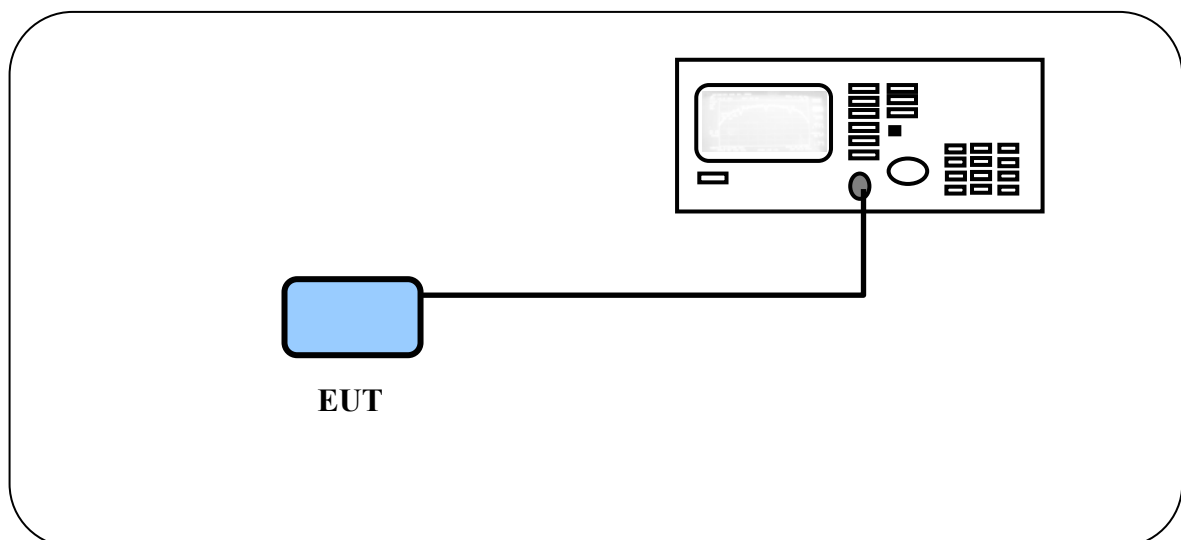

Test Configuration of Bandwidth for Frequency Hopping Spread Spectrum System

8.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u> Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/19/08


8.4 Test Results

Channel	Normal mode	E.D.R mode
01	990 kHz	1.386 MHz
40	996 kHz	1.386 MHz
79	990 kHz	1.386 MHz

Note:

The data in the above table are summarizing the following attachment spectrum analyzer.

Bandwidth of Channel 1:

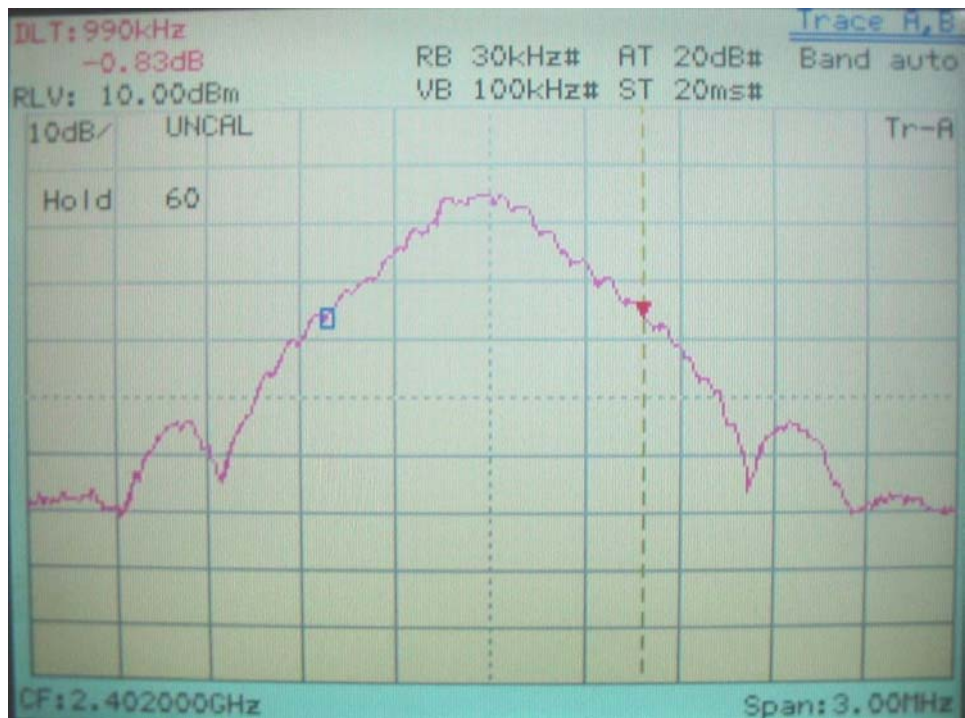


Normal mode




E.D.R mode

Bandwidth of Channel 40:

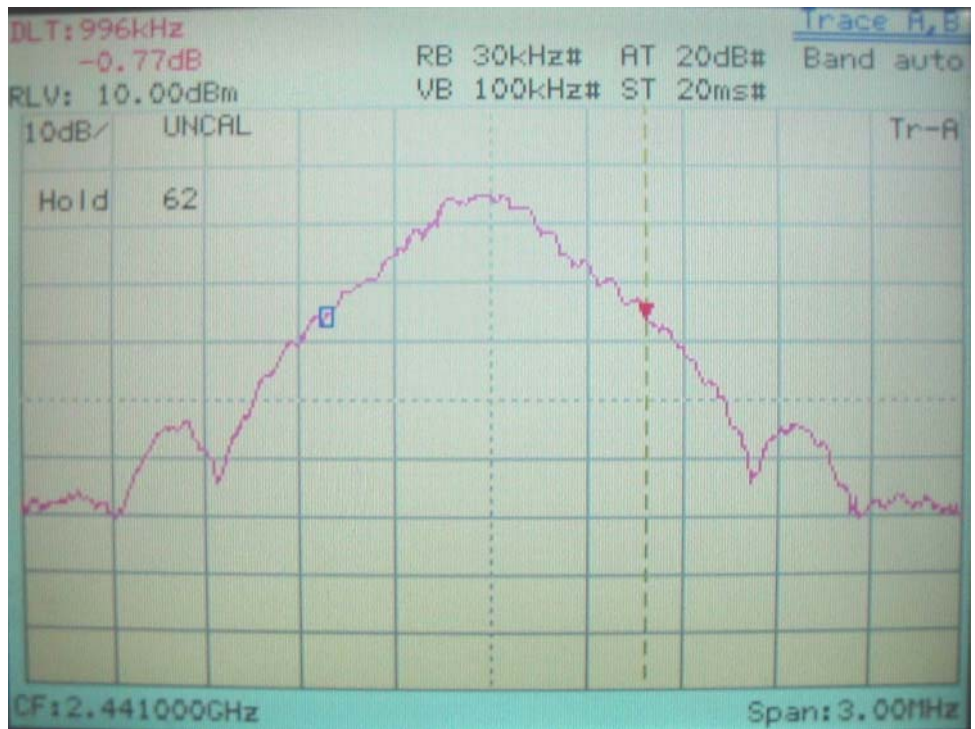


Normal mode

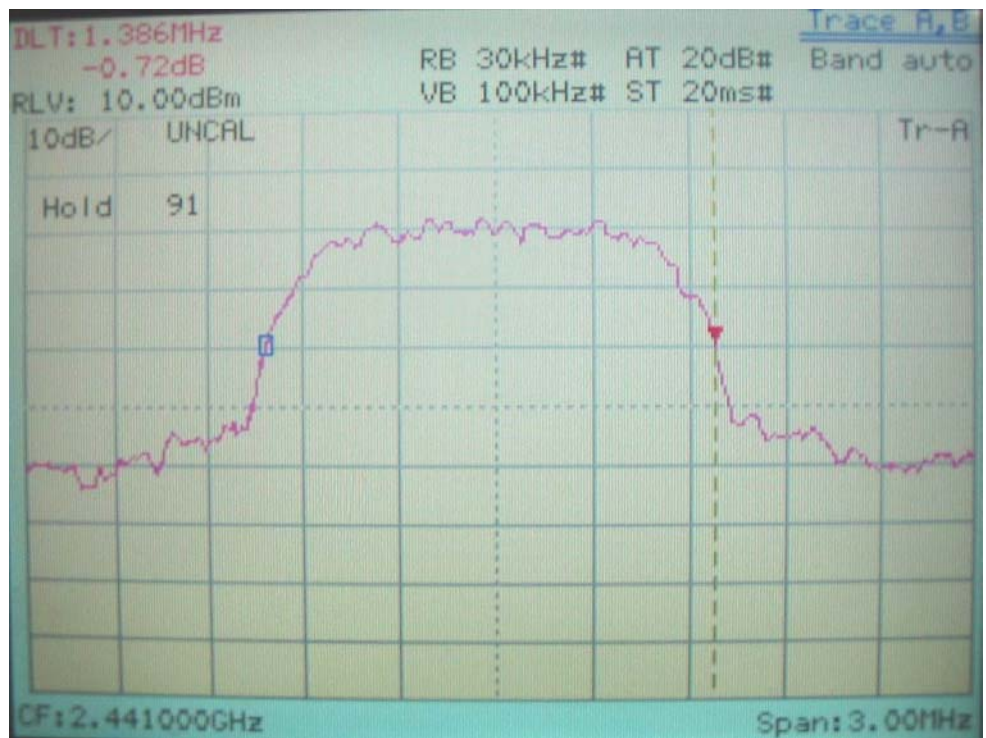

E.D.R mode

Bandwidth of Channel 79:

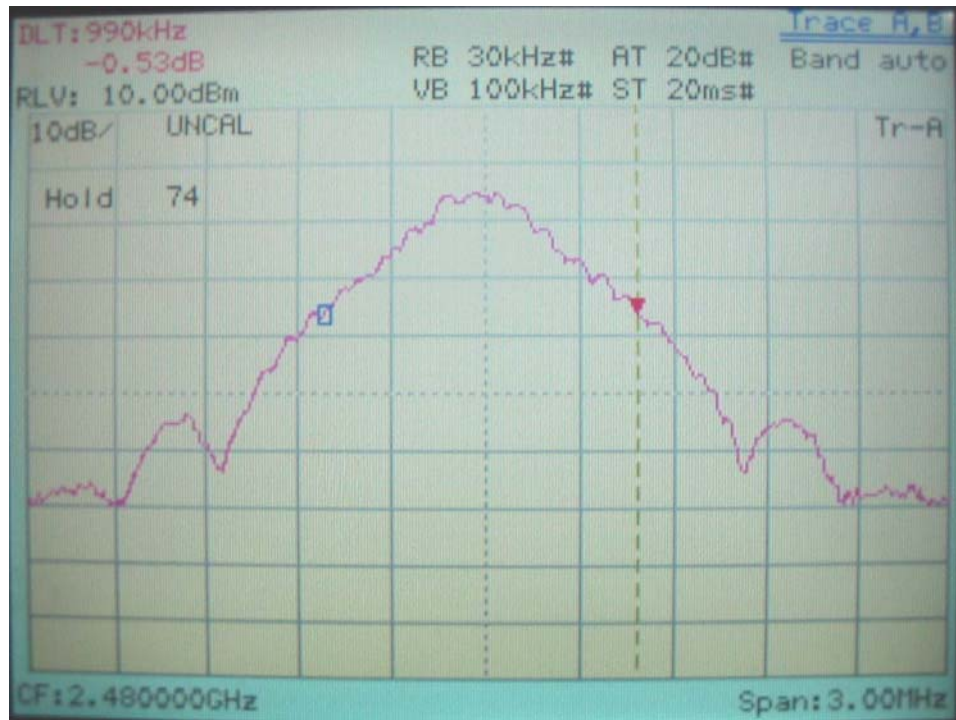


Normal mode



E.D.R mode

IX. Section 15.247(b) Peak Output Power

9.1 Test Condition & Setup

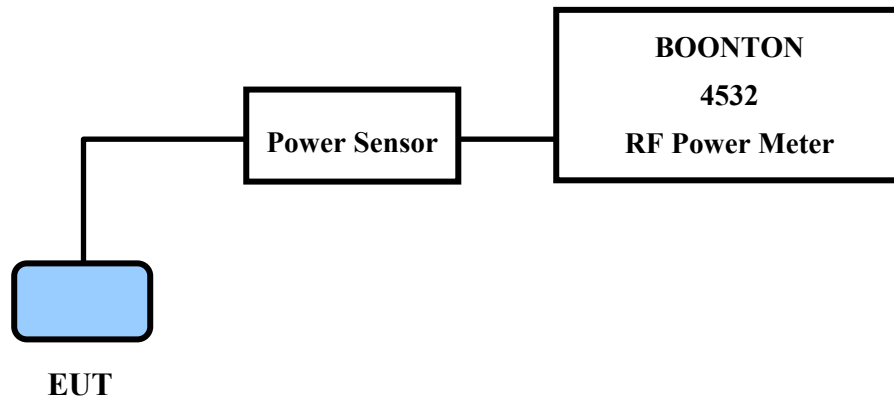

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

9.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>
				Next time
RF Power Meter	4532	BOONTON	117501	09/11/08
Peak Power Sensor	57340	BOONTON	2696	09/11/08

9.3 Test Result

Formula:
 RF output power of EUT + |Cable loss| = Output peak power

Channel	RF Output	Cable Loss	Output Peak Power	
	dBm	dBm	dBm	mW
Normal mode CH01	0.46	0.50	0.96	1.247
Normal mode CH40	0.29	0.50	0.79	1.199
Normal mode CH79	-0.08	0.50	0.42	1.102
E.D.R. mode CH01	2.79	0.50	3.29	2.133
E.D.R mode CH40	2.72	0.50	3.22	2.099
E.D.R. mode CH79	2.30	0.50	2.80	1.905

X. Section 15.247(c) Band-edge Compliance

10.1 Test Condition


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (Peak mode: RBW=1MHz; VBW=10Hz, Average mode: RBW=1MHz; VBW=10Hz)

10.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	<u>Calibration Date</u>
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/19/08
Spectrum Analyzer	8564E	HP	3720A00840	11/08/08
Microwave Preamplifier	84125C	HP	US36433002	03/17/09
Horn Antenna	3115	EMCO	9104-3668	12/14/08


10.3 Test Instruments Configuration

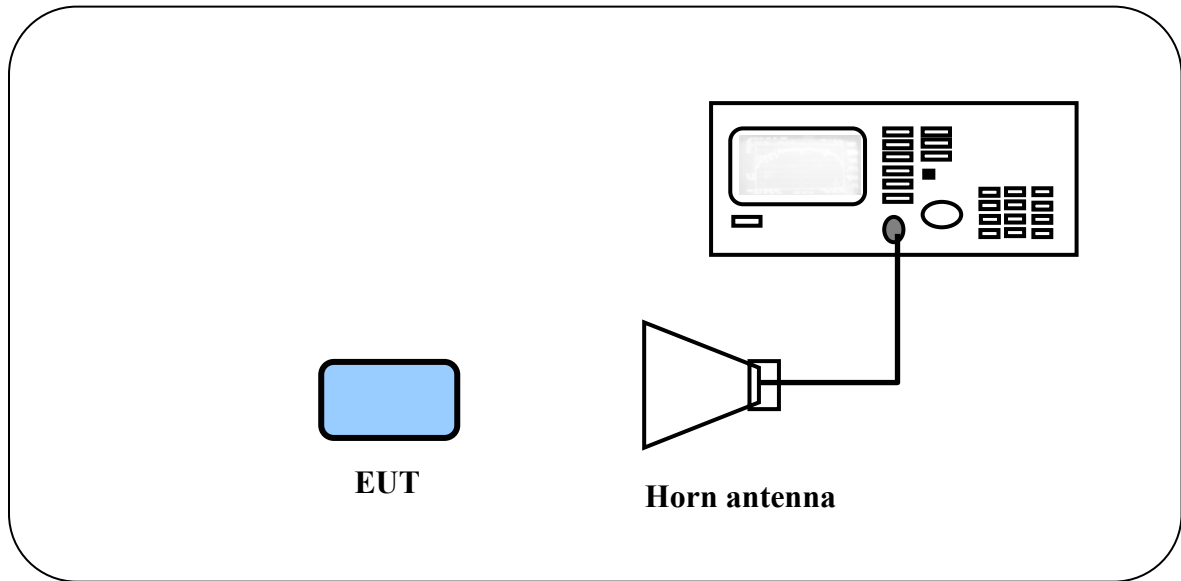

10.4 Test Result of the Bandedge

The following pages show our observations referring to the channel 1 and 79 respectively.

Normal mode Channel 1

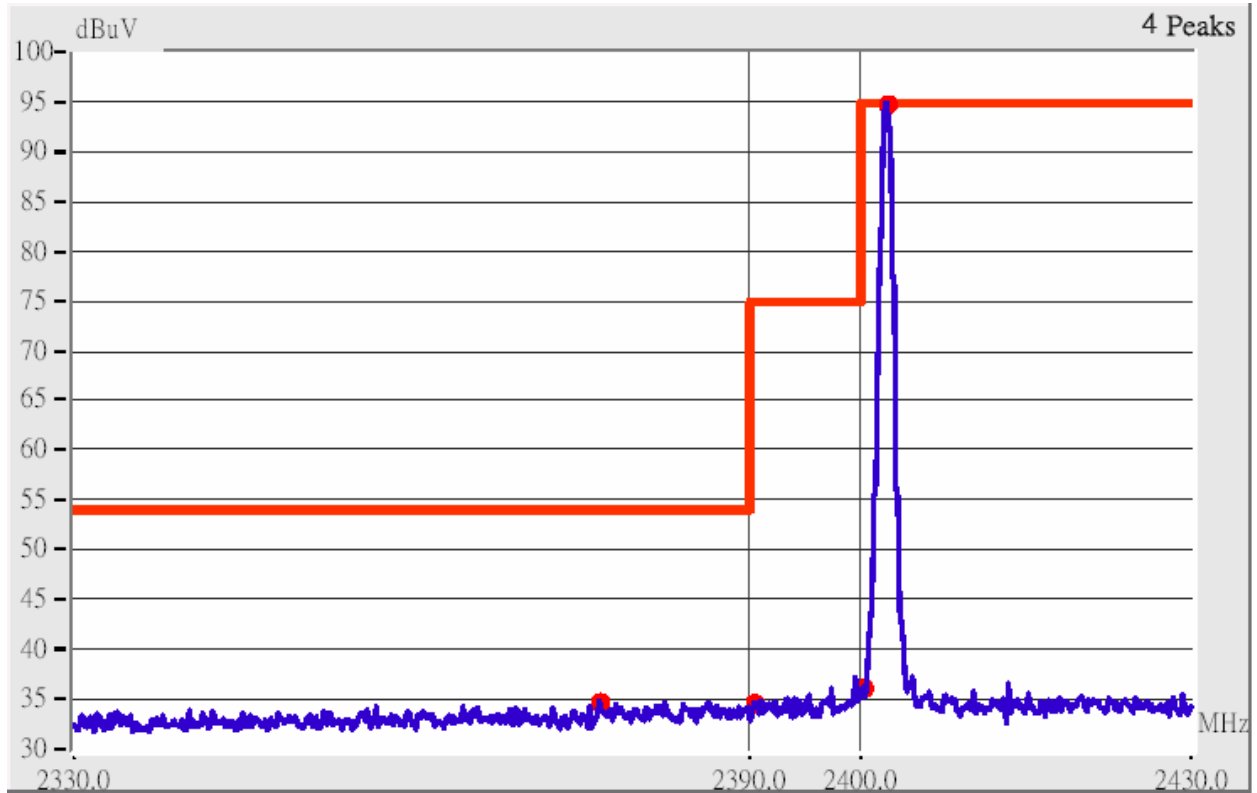


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude (dBμV/m)</i>		<i>Class B</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2368.84	Hor	1.00	142	9.12	45.29	---	74.00	53.96	-8.67
2390.02	Hor	1.00	206	9.18	44.68	---	74.00	53.96	-9.28
2372.25	Ver	1.00	94	9.13	44.80	---	74.00	53.96	-9.16
2390.02	Ver	1.00	360	9.18	42.85	---	74.00	53.96	-11.11

Normal mode Channel 79

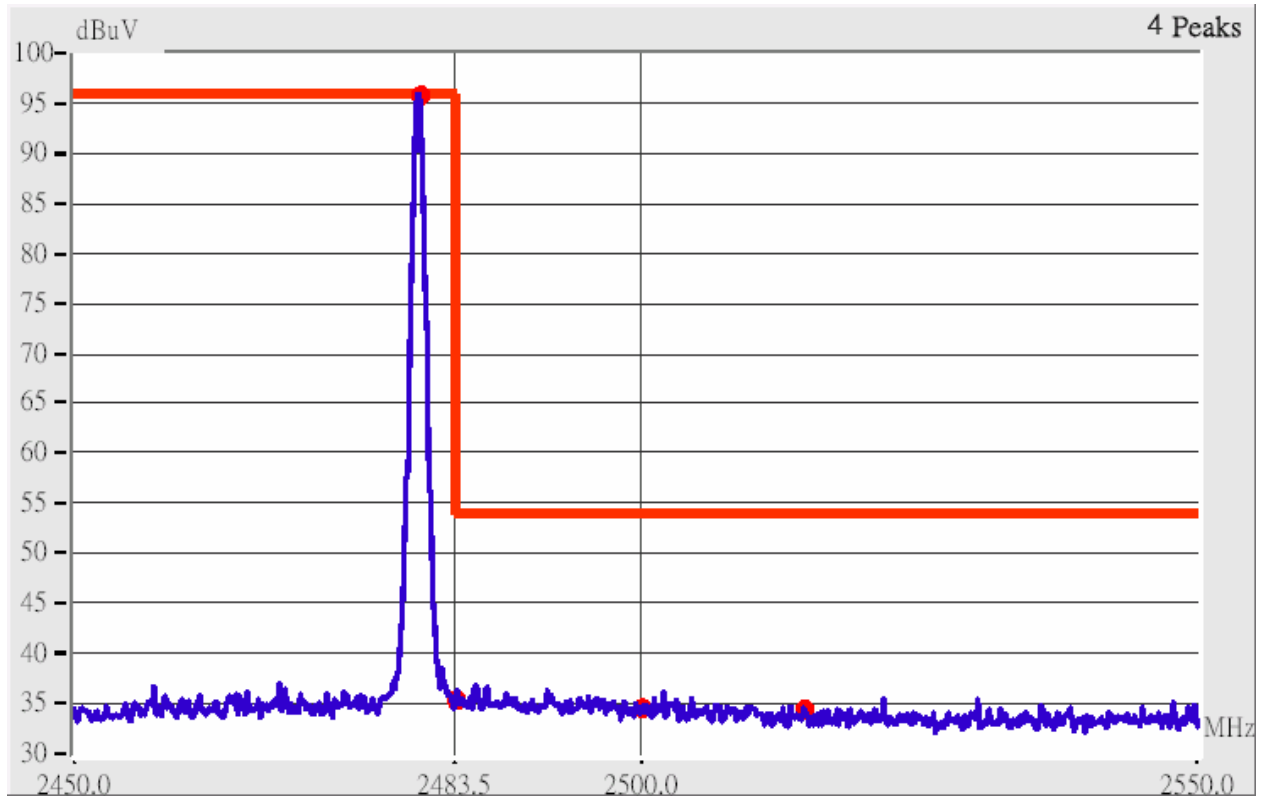


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 79.

3. The lobe left by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude (dBµV/m)		Class B		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	Peak	Average	Limit (dBµV/m)		Margin (dB)
							Peak	Ave.	
2483.50	Hor	1.00	0	9.44	49.44	---	74.00	53.96	-4.52
2485.89	Hor	1.00	184	9.45	46.45	---	74.00	53.96	-7.51
2500.01	Hor	1.00	285	9.49	44.49	---	74.00	53.96	-9.47
2515.99	Hor	1.00	196	9.52	45.52	---	74.00	53.96	-8.44
2483.50	Ver	1.00	324	9.44	44.44	---	74.00	53.96	-9.52
2495.89	Ver	1.00	168	9.45	45.45	---	74.00	53.96	-8.51
2500.01	Ver	1.00	303	9.49	42.49	---	74.00	53.96	-11.47
2511.73	Ver	1.00	180	9.51	44.35	---	74.00	53.96	-9.61

E.D.R. mode Channel 1

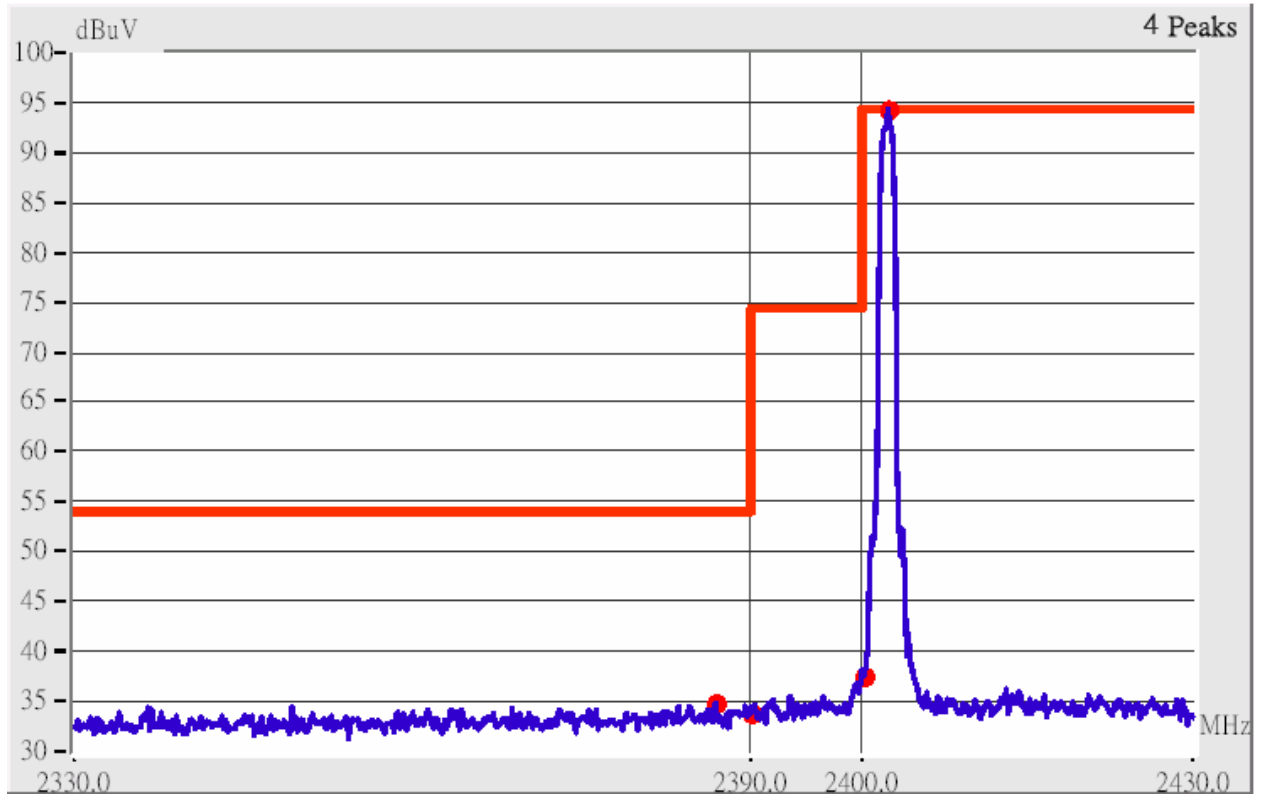


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

- 5. The lobe left by the fundamental side is already 20dB below the highest emission level.
- 6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude (dBμV/m)</i>		<i>Class B</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>	<i>Corrected Amplitude (dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2382.12	Hor	1.00	8	9.16	45.49	---	74.00	53.96	-8.47
2390.02	Hor	1.00	96	9.18	43.85	---	74.00	53.96	-10.11
2374.25	Ver	1.00	156	9.14	43.97	---	74.00	53.96	-9.99
2390.02	Ver	1.00	68	9.18	42.85	---	74.00	53.96	-11.11

E.D.R. mode Channel 79

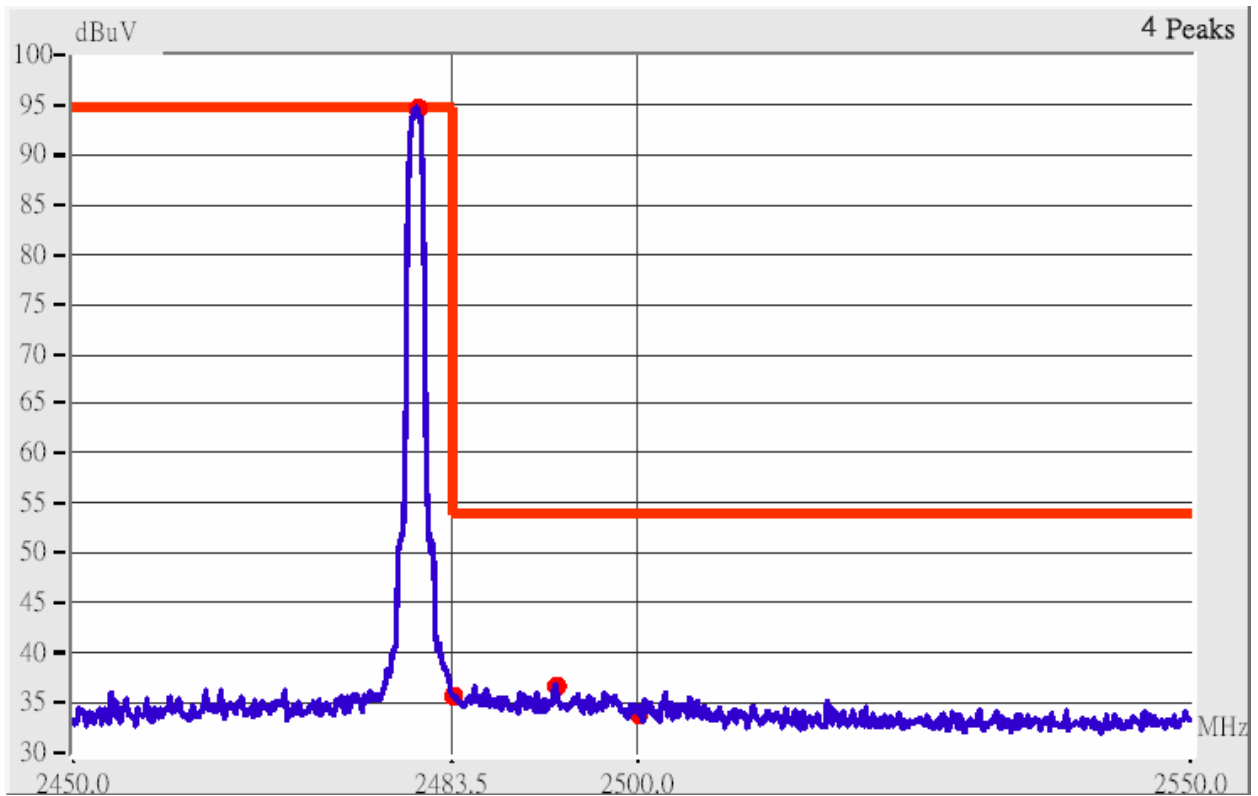

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 79.

- 7. The lobe left by the fundamental side is already 20dB below the highest emission level.
- 8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude (dBµV/m)</i>		<i>Class B</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>	<i>Factors (dB)</i>			<i>Limit (dBµV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2483.56	Hor	1.00	345	9.44	52.61	---	74.00	53.96	-1.35
2485.89	Hor	1.00	222	9.45	47.95	---	74.00	53.96	-6.01
2500.01	Hor	1.00	350	9.49	44.16	---	74.00	53.96	-9.80
2508.18	Hor	1.00	77	9.51	46.01	---	74.00	53.96	-7.95
2483.50	Ver	1.00	196	9.44	44.11	---	74.00	53.96	-9.85
2487.12	Ver	1.00	206	9.45	44.79	---	74.00	53.96	-9.17
2500.01	Ver	1.00	261	9.49	43.49	---	74.00	53.96	-10.47
2516.28	Ver	1.00	78	9.52	43.02	---	74.00	53.96	-10.94

XI. Section 15.247(c) Spurious Radiated Emissions

11.1 Test Condition and Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT. Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G to 25GHz.

At each frequency, the EUT was rotated 360 degrees, stand on **three orthogonal** planes respectively and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH1), one in the middle (CH40) and the other in bottom (CH79). The setting up procedure is recorded on <1.3 test method>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dBuV/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + (\text{Cable Loss} - \text{Amplifier Gain}) + \text{Switching Box Loss}$$

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + (\text{Cable Loss} - \text{Amplifier Gain}) + \text{Switching Box Loss}$$

11.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	<u>Calibration Date</u>
				Next time
EMI Receiver	8546A	HP	3520A00242	12/05/08
RF Filter Section	85460A	HP	3448A00217	12/05/08
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	12/07/08
Pre-amplifier	PA1F	TRC	1FAC	11/08/08
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	11/08/08
Coaxial Cable (Double shielded, 15 Meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	11/08/08
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	03/17/09
Spectrum Analyzer	8564E	HP	3720A00840	11/07/08
Microwave Preamplifier	84125C	HP	US36433002	11/05/08
Horn Antenna	3115	EMCO	9104-3668	12/14/08
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	12/14/08
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	11/12/08
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	10/10/08
Pre-amplifier	PA2F	TRC	2F1GZ	10/10/08
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	10/10/08
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	10/10/08

11.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following. (worst case)

Test Conditions: Temperature : 25° C Humidity : 73% RH

Test mode: BT (normal mode) CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
110.02	37.10	1.00	262	-1.86	35.24	43.50	-8.26
134.27	44.50	1.00	91	-3.21	41.29	43.50	-2.21
146.40	38.29	1.00	81	-4.05	34.24	43.50	-9.26
239.76	33.20	1.00	172	-3.74	29.46	46.00	-16.54
273.71	42.89	1.00	94	-3.81	39.08	46.00	-6.92
434.97	36.14	1.00	286	0.51	36.65	46.00	-9.35

Test mode: BT (normal mode) CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
108.81	38.03	1.00	75	-1.70	36.33	43.50	-7.17
133.06	45.53	1.00	115	-3.16	42.37	43.50	-1.13
146.40	38.94	1.00	136	-4.05	34.89	43.50	-8.61
273.71	34.15	1.00	139	-3.81	30.34	46.00	-15.66
408.30	30.34	1.00	333	-0.70	29.64	46.00	-16.36
481.05	29.12	1.00	0	1.53	30.65	46.00	-15.35

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: BT (normal mode) CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
2666.67	1.00	310	35.00	---	9.80	44.80	---	73.96	53.96	-9.16
9608.12	1.00	10	34.11	---	11.47	45.58	---	73.96	53.96	-8.38
12012.71	1.00	310	36.77	---	10.01	46.78	---	73.96	53.96	-7.18
19214.79	1.00	235	48.09	---	1.60	49.69	---	73.96	53.96	-4.27
21619.58	1.00	51	46.47	---	2.79	49.26	---	73.96	53.96	-4.70
24020.83	1.00	119	46.77	---	3.14	49.91	---	73.96	53.96	-4.05

Test mode: BT (normal mode) CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBµV		dB/m	dBµV/m		dBµV/m		dB
2639.58	1.00	112	35.00	---	9.75	44.75	---	73.96	53.96	-9.21
9608.12	1.00	95	35.11	---	11.47	46.58	---	73.96	53.96	-7.38
12012.71	1.00	179	37.94	---	10.01	47.95	---	73.96	53.96	-6.01
19214.79	1.00	250	48.01	---	1.60	49.61	---	73.96	53.96	-4.35
21619.58	1.00	41	46.62	---	2.79	49.41	---	73.96	53.96	-4.55
24020.83	1.00	127	47.20	---	3.14	50.34	---	73.96	53.96	-3.62

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: BT (normal mode) CH40 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
108.81	37.98	1.00	105	-1.70	36.28	43.50	-7.22
122.15	42.71	1.00	248	-2.53	40.18	43.50	-3.32
134.27	44.27	1.00	116	-3.21	41.06	43.50	-2.44
146.40	39.80	1.00	240	-4.05	35.75	43.50	-7.75
274.92	41.21	1.00	120	-3.78	37.43	46.00	-8.57
481.05	35.83	1.00	154	1.53	37.36	46.00	-8.64

Test mode: BT (normal mode) CH40 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
108.81	37.96	1.00	75	-1.70	36.26	43.50	-7.24
120.94	40.80	1.00	105	-2.45	38.35	43.50	-5.15
134.27	43.71	1.00	126	-3.21	40.50	43.50	-3.00
146.40	40.70	1.00	126	-4.05	36.65	43.50	-6.85
409.51	30.89	1.00	343	-0.65	30.24	46.00	-15.76
478.62	28.80	1.00	306	1.50	30.30	46.00	-15.70

Test mode: BT (normal mode) CH40 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2620.83	1.00	360	35.16	---	9.72	44.88	---	73.96	53.96	-9.08
9765.21	1.00	232	34.61	---	11.90	46.51	---	73.96	53.96	-7.45
12206.04	1.00	230	37.94	---	9.79	47.73	---	73.96	53.96	-6.23
19526.46	1.00	187	47.16	---	1.70	48.86	---	73.96	53.96	-5.10
21970.21	1.00	56	47.78	---	2.95	50.73	---	73.96	53.96	-3.23
24410.42	1.00	178	46.83	---	3.10	49.93	---	73.96	53.96	-4.03

Test mode: BT (normal mode) CH40 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2889.58	1.00	258	35.34	---	10.22	45.56	---	73.96	53.96	-8.40
9765.21	1.00	192	34.78	---	11.90	46.68	---	73.96	53.96	-7.28
12206.04	1.00	82	38.61	---	9.79	48.40	---	73.96	53.96	-5.56
19526.46	1.00	175	47.88	---	1.70	49.58	---	73.96	53.96	-4.38
21970.21	1.00	127	47.91	---	2.95	50.86	---	73.96	53.96	-3.10
24410.42	1.00	131	46.91	---	3.10	50.01	---	73.96	53.96	-3.95

Test mode: BT (normal mode) CH79 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
110.02	37.25	1.00	104	-1.86	35.39	43.50	-8.11
120.94	42.98	1.00	236	-2.45	40.53	43.50	-2.97
133.06	44.49	1.89	94	-3.16	41.33	43.50	-2.17
145.19	39.03	1.00	236	-3.94	35.09	43.50	-8.41
273.71	41.73	1.00	209	-3.81	37.92	46.00	-8.08
641.10	27.93	1.00	343	7.73	35.66	46.00	-10.34

Test mode: BT (normal mode) CH79 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
110.02	43.30	1.00	192	-1.86	41.44	43.50	-2.06
122.15	40.37	1.00	101	-2.53	37.84	43.50	-5.66
133.06	44.35	1.00	111	-3.16	41.19	43.50	-2.31
145.19	39.77	1.00	131	-3.94	35.83	43.50	-7.67
482.26	38.12	1.00	165	1.54	39.66	46.00	-6.34
949.08	27.09	1.00	332	15.58	42.67	46.00	-3.33

Test mode: BT (normal mode) CH79 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2695.83	1.00	234	34.33	---	9.86	44.19	---	73.96	53.96	-9.77
9922.29	1.00	181	34.11	---	11.66	45.77	---	73.96	53.96	-8.19
12399.37	1.00	317	37.60	---	9.02	46.62	---	73.96	53.96	-7.34
19799.17	1.00	270	46.94	---	1.90	48.84	---	73.96	53.96	-5.12
22320.83	1.00	211	46.91	---	3.33	50.24	---	73.96	53.96	-3.72
24800.00	1.00	104	49.83	---	2.22	52.05	---	73.96	53.96	-1.91

Test mode: BT (normal mode) CH79 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2214.58	1.00	347	35.33	---	8.69	44.02	---	73.96	53.96	-9.94
9922.29	1.00	74	33.28	---	11.66	44.94	---	73.96	53.96	-9.02
12399.37	1.00	347	37.10	---	9.02	46.12	---	73.96	53.96	-7.84
19799.17	1.00	259	48.81	---	1.90	50.71	---	73.96	53.96	-3.25
22320.83	1.00	335	45.80	---	3.33	49.13	---	73.96	53.96	-4.83
24800.00	1.00	254	47.68	---	2.22	49.90	---	73.96	53.96	-4.06

Test mode: BT (E.D.R. mode) CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
108.81	37.94	1.00	110	-1.70	36.24	43.50	-7.26
120.94	43.61	1.00	121	-2.45	41.16	43.50	-2.34
133.06	46.11	1.00	110	-3.16	42.95	43.50	-0.55
141.55	42.43	1.00	0	-3.60	38.83	43.50	-4.67
145.19	39.00	1.00	250	-3.94	35.06	43.50	-8.44
481.05	34.88	1.00	146	1.53	36.41	46.00	-9.59

Test mode: BT (E.D.R. mode) CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
110.02	38.27	1.00	78	-1.86	36.41	43.50	-7.09
120.94	40.22	1.00	92	-2.45	37.77	43.50	-5.73
133.06	42.65	1.00	92	-3.16	39.49	43.50	-4.01
145.19	39.68	1.00	115	-3.94	35.74	43.50	-7.76
217.94	34.29	1.00	214	-3.72	30.57	46.00	-15.43
482.26	35.28	1.00	353	1.54	36.82	46.00	-9.18

Test mode: BT (E.D.R. mode) CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2920.83	1.00	156	34.33	---	10.28	44.61	---	73.96	53.96	-9.35
9608.12	1.00	96	35.27	---	11.47	46.74	---	73.96	53.96	-7.22
12012.71	1.00	271	36.60	---	10.01	46.61	---	73.96	53.96	-7.35
19214.79	1.00	232	47.89	---	1.60	49.49	---	73.96	53.96	-4.47
21619.58	1.00	52	46.19	---	2.79	48.98	---	73.96	53.96	-4.98
24020.83	1.00	136	46.97	---	3.14	50.11	---	73.96	53.96	-3.85

Test mode: BT (E.D.R. mode) CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2727.08	1.00	80	34.83	---	9.92	44.75	---	73.96	53.96	-9.21
9608.12	1.00	137	33.61	---	11.47	45.08	---	73.96	53.96	-8.88
12012.71	1.00	244	37.27	---	10.01	47.28	---	73.96	53.96	-6.68
19214.79	1.00	257	47.83	---	1.60	49.43	---	73.96	53.96	-4.53
21619.58	1.00	46	46.74	---	2.79	49.53	---	73.96	53.96	-4.43
24020.83	1.00	141	47.22	---	3.14	50.36	---	73.96	53.96	-3.60

Test mode: BT (E.D.R. mode) CH40 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
84.56	30.23	1.00	262	0.35	30.58	40.00	-9.42
108.81	37.75	1.00	238	-1.70	36.05	43.50	-7.45
120.94	44.05	1.00	105	-2.45	41.60	43.50	-1.90
133.06	44.71	1.00	105	-2.16	42.55	43.50	-0.95
145.19	37.62	1.00	105	-3.94	33.68	43.50	-9.82
273.71	37.41	1.00	95	-3.81	33.60	46.00	-12.40

Test mode: BT (E.D.R. mode) CH40 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table ()			Limit (dBμV/m)	Margin (dB)
108.81	36.71	1.00	56	-1.70	35.01	43.50	-8.49
120.94	43.66	1.00	100	-2.45	41.21	43.50	-2.29
133.06	43.89	1.00	115	-3.16	40.73	43.50	-2.77
146.40	39.92	1.00	122	-4.05	35.87	43.50	-7.63
481.05	35.26	1.00	15	1.53	36.79	46.00	-9.21
641.10	27.91	1.00	322	7.73	35.64	46.00	-10.36

Test mode: BT (E.D.R. mode) CH40 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2620.83	1.00	61	33.66	---	9.72	43.38	---	73.96	53.96	-10.58
9765.21	1.00	15	34.61	---	11.90	46.51	---	73.96	53.96	-7.45
12206.04	1.00	76	38.28	---	9.79	48.07	---	73.96	53.96	-5.89
19526.46	1.00	198	48.33	---	1.70	50.03	---	73.96	53.96	-3.93
21970.21	1.00	131	47.66	---	2.95	50.61	---	73.96	53.96	-3.35
24410.42	1.00	109	47.38	---	3.10	50.48	---	73.96	53.96	-3.48

Test mode: BT (E.D.R. mode) CH40 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2225.00	1.00	265	36.67	---	8.72	45.39	---	73.96	53.96	-8.57
9765.21	1.00	150	35.11	---	11.90	47.01	---	73.96	53.96	-6.95
12206.04	1.00	288	39.61	---	9.79	49.40	---	73.96	53.96	-4.56
19526.46	1.00	199	48.17	---	1.70	49.87	---	73.96	53.96	-4.09
21970.21	1.00	135	47.54	---	2.95	50.49	---	73.96	53.96	-3.47
24410.42	1.00	121	47.18	---	3.10	50.28	---	73.96	53.96	-3.68

Test mode: BT (E.D.R. mode) CH79 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
110.02	38.39	1.00	251	-1.86	36.53	43.50	-6.97
120.94	42.95	1.00	119	-2.45	40.50	43.50	-3.00
134.27	44.46	1.89	105	-3.21	41.25	43.50	-2.25
146.40	38.57	1.00	228	-4.05	34.52	43.50	-8.98
481.05	39.50	1.00	126	1.53	41.03	46.00	-4.97
641.10	25.75	1.00	308	7.73	33.48	46.00	-12.52

Test mode: BT (E.D.R. mode) CH79 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
84.56	32.24	1.00	64	0.35	32.59	40.00	-7.41
110.02	36.67	1.00	77	-1.86	34.81	43.50	-8.69
120.94	41.36	1.00	114	-2.45	38.91	43.50	-4.59
133.06	44.12	1.00	114	-3.16	40.96	43.50	-2.54
145.19	39.63	1.00	101	-3.94	35.69	43.50	-7.81
408.30	30.76	1.00	10	-0.70	30.06	46.00	-15.94

Test mode: BT (E.D.R. mode) CH79 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2695.83	1.00	193	34.50	---	9.86	44.36	---	73.96	53.96	-9.60
9922.29	1.00	279	33.94	---	11.66	45.60	---	73.96	53.96	-8.36
12399.37	1.00	275	37.10	---	9.02	46.12	---	73.96	53.96	-7.84
19799.17	1.00	256	47.02	---	1.90	48.92	---	73.96	53.96	-5.04
22320.83	1.00	206	47.09	---	3.33	50.42	---	73.96	53.96	-3.54
24800.00	1.00	108	49.73	---	2.22	51.95	---	73.96	53.96	-2.01

Test mode: BT (E.D.R. mode) CH79 for 1GHz to 25GHz [Vertical]


<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2947.92	1.00	263	35.50	---	10.33	45.83	---	73.96	53.96	-8.13
9922.29	1.00	60	35.11	---	11.66	46.77	---	73.96	53.96	-7.19
12399.37	1.00	181	37.77	---	9.02	46.79	---	73.96	53.96	-7.17
19799.17	1.00	248	49.04	---	1.90	50.94	---	73.96	53.96	-3.02
22320.83	1.00	356	45.64	---	3.33	48.97	---	73.96	53.96	-4.99
24800.00	1.00	270	47.57	---	2.22	49.79	---	73.96	53.96	-4.17

XII. Section 15.247(d): Power Spectral Density

12.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

12.2 Test Instruments Configuration

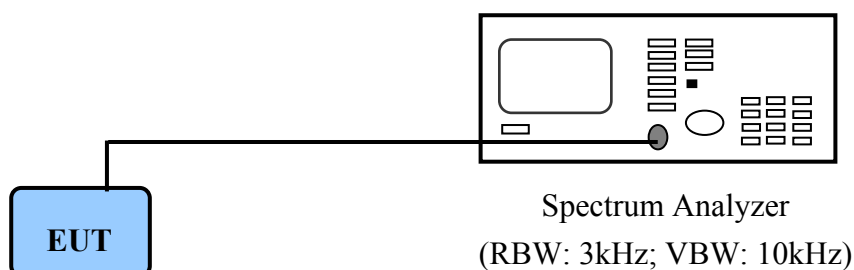

PC to control the EUT at maximal power output and channel number and set antenna kit

12.3 List of Test Instruments

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Calibration Date</u>
				<u>Next time</u>
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/19/08

12.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.

Normal mode

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-13.33	1.50	-11.83	8.00	-19.83
CH 40	-13.21	1.50	-11.71	8.00	-19.71
CH 79	-13.37	1.50	-11.87	8.00	-19.87


E.D.R. mode

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-18.01	1.50	-16.51	8.00	-24.51
CH 40	-17.91	1.50	-16.41	8.00	-24.41
CH 79	-18.08	1.50	-16.58	8.00	-24.58


Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |Cable Loss|$

Power Spectral Density for CH01

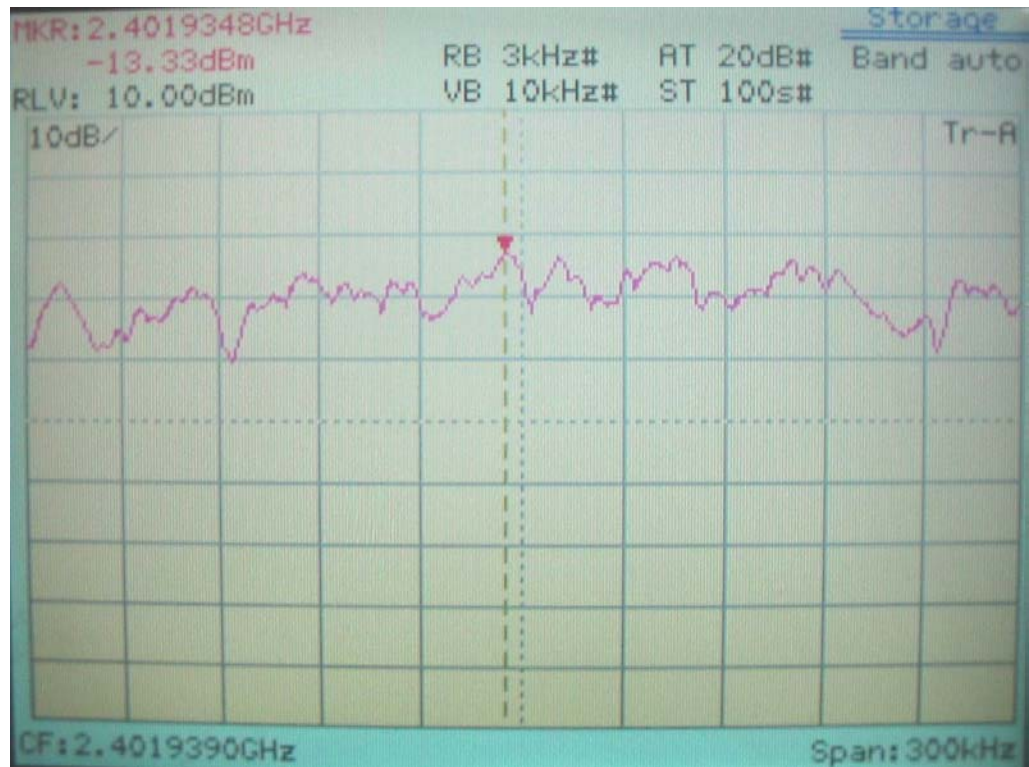


Normal mode

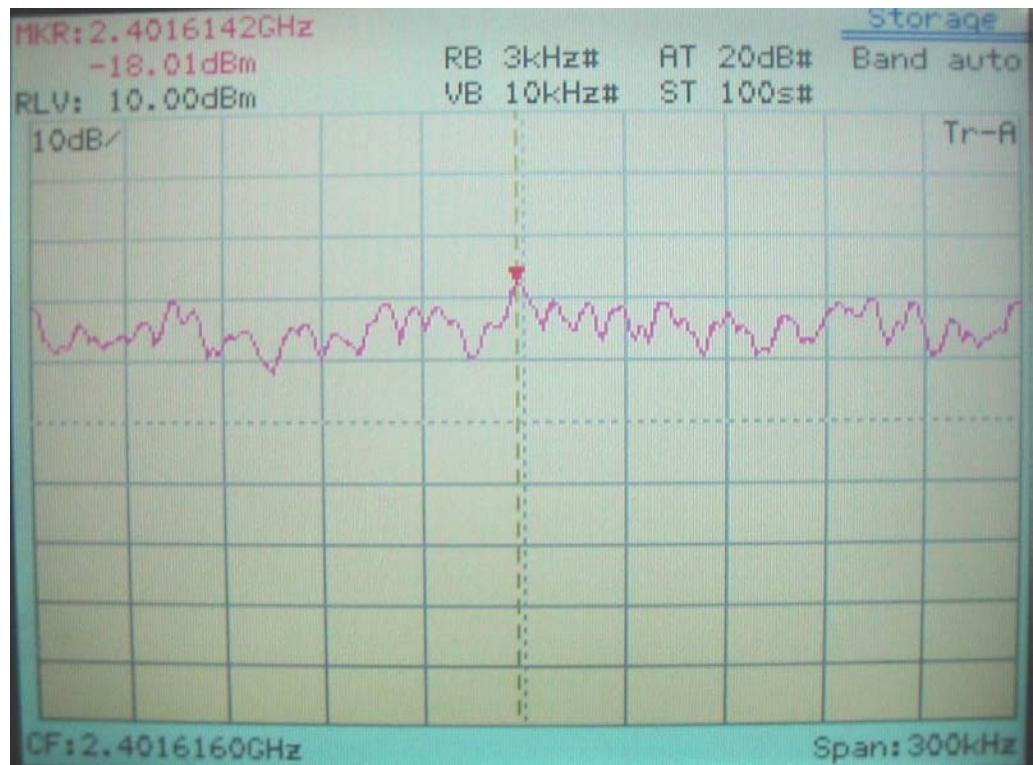


E.D.R. mode

Power Spectral Density for CH40

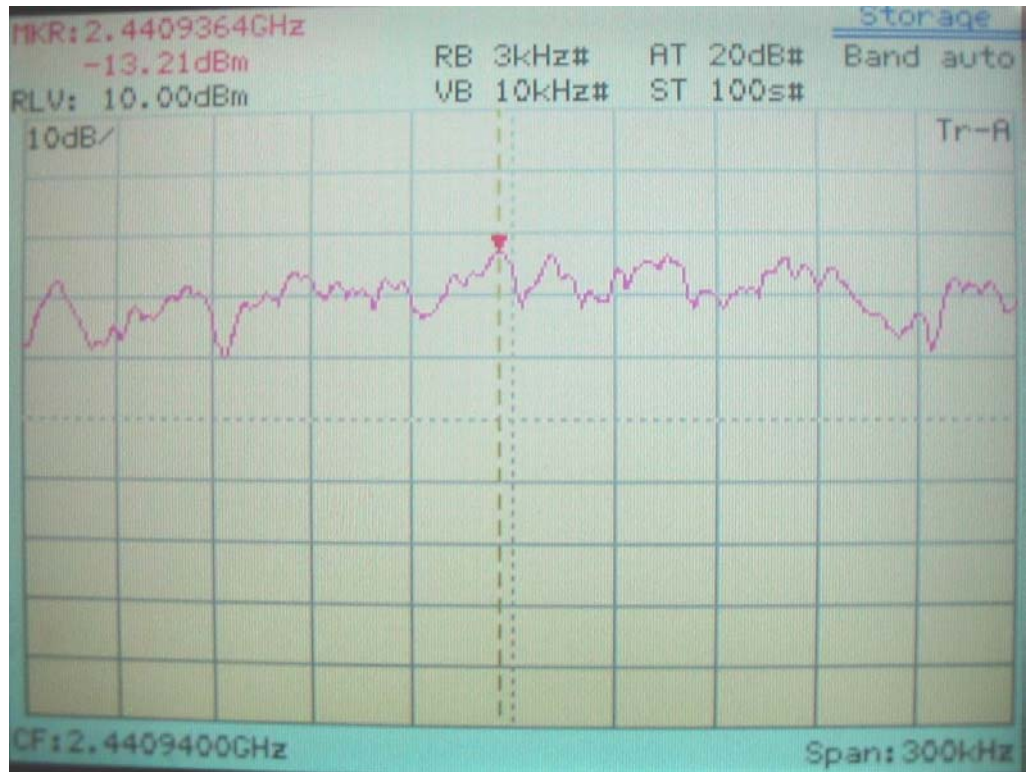


Normal mode

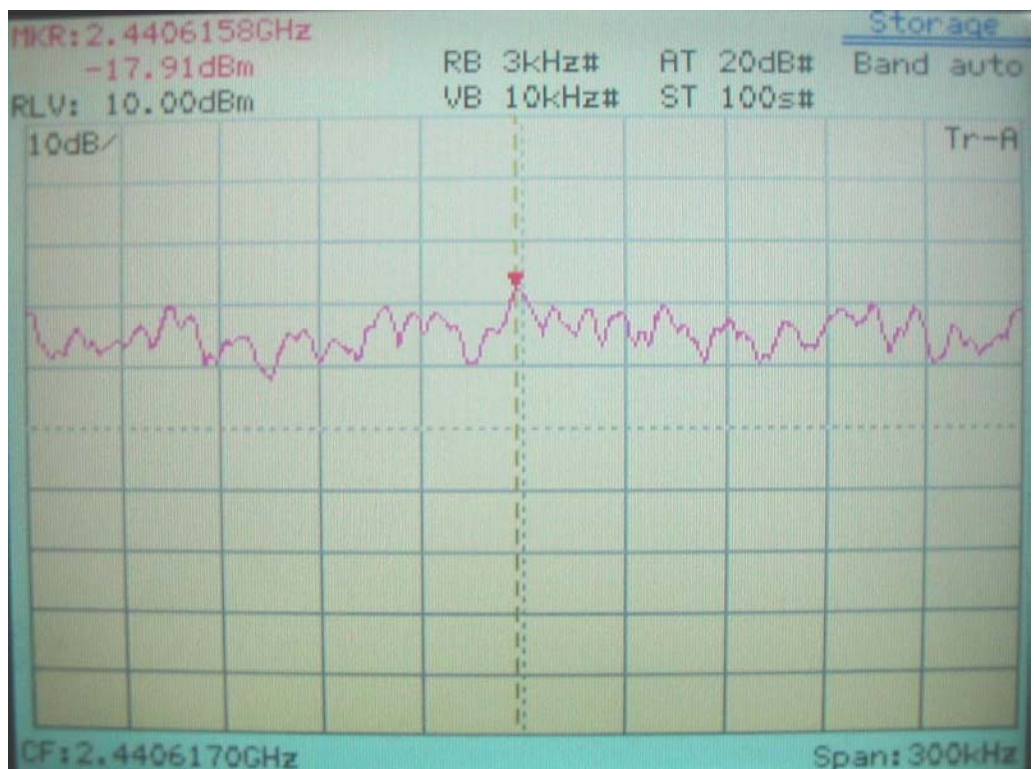


E.D.R. mode

Power Spectral Density for CH79

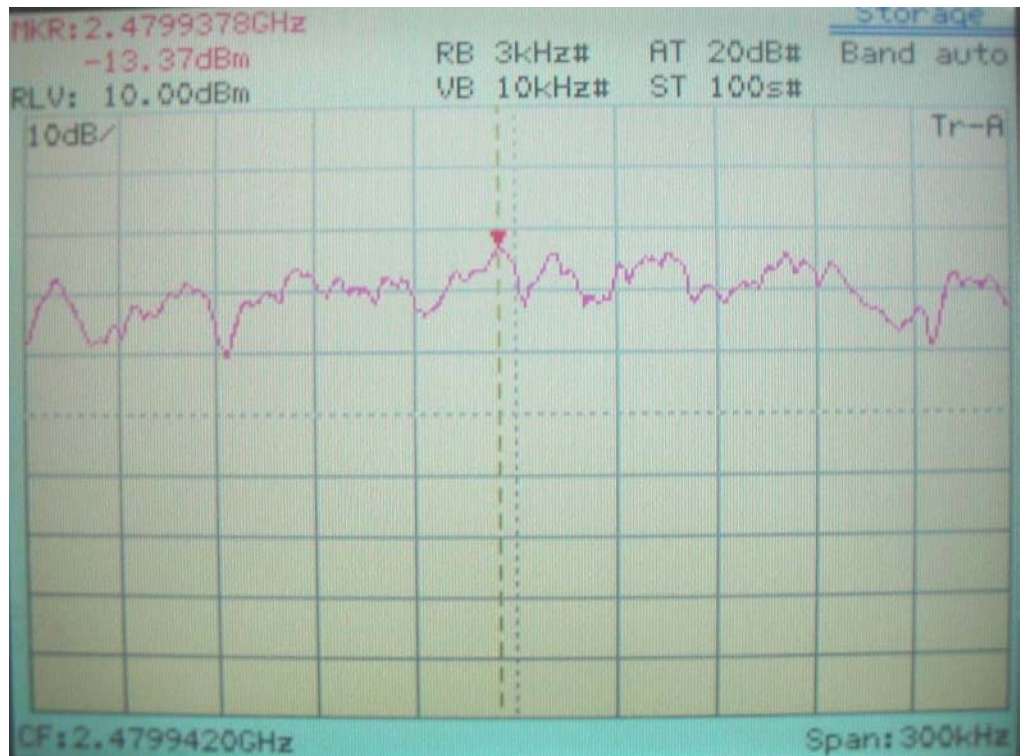

Normal mode

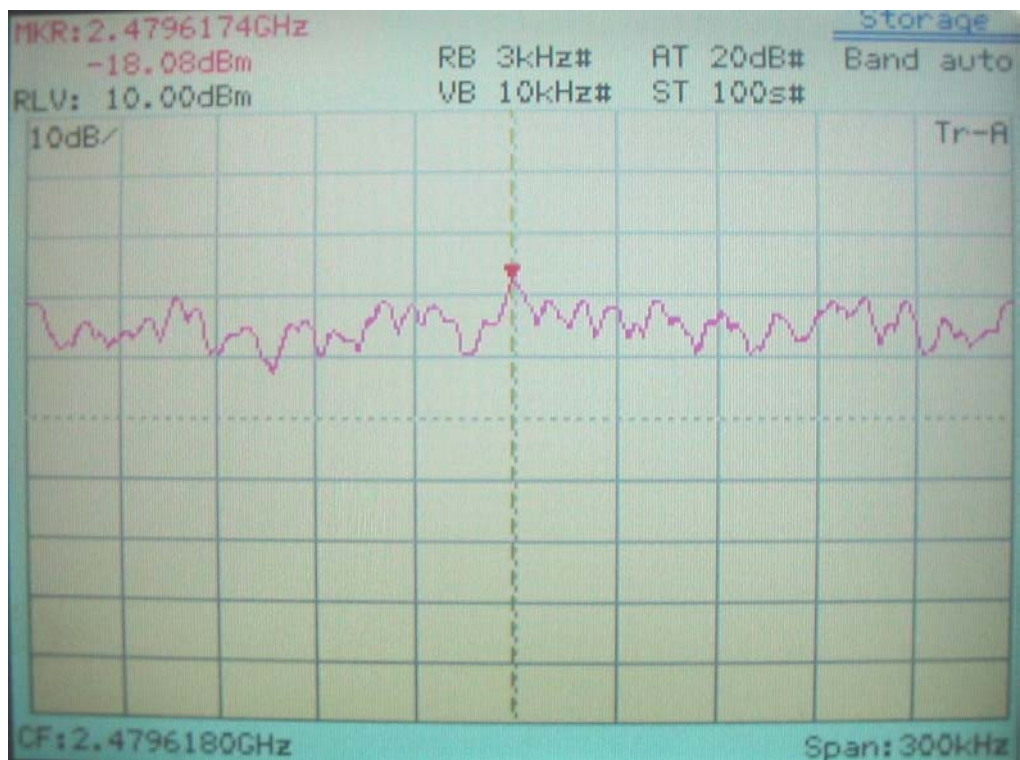

E.D.R. mode