


## Appendix B. Co-location

# 1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	62%
Test Engineer	Magic Lai	Configurations	Normal Link

## Horizontal

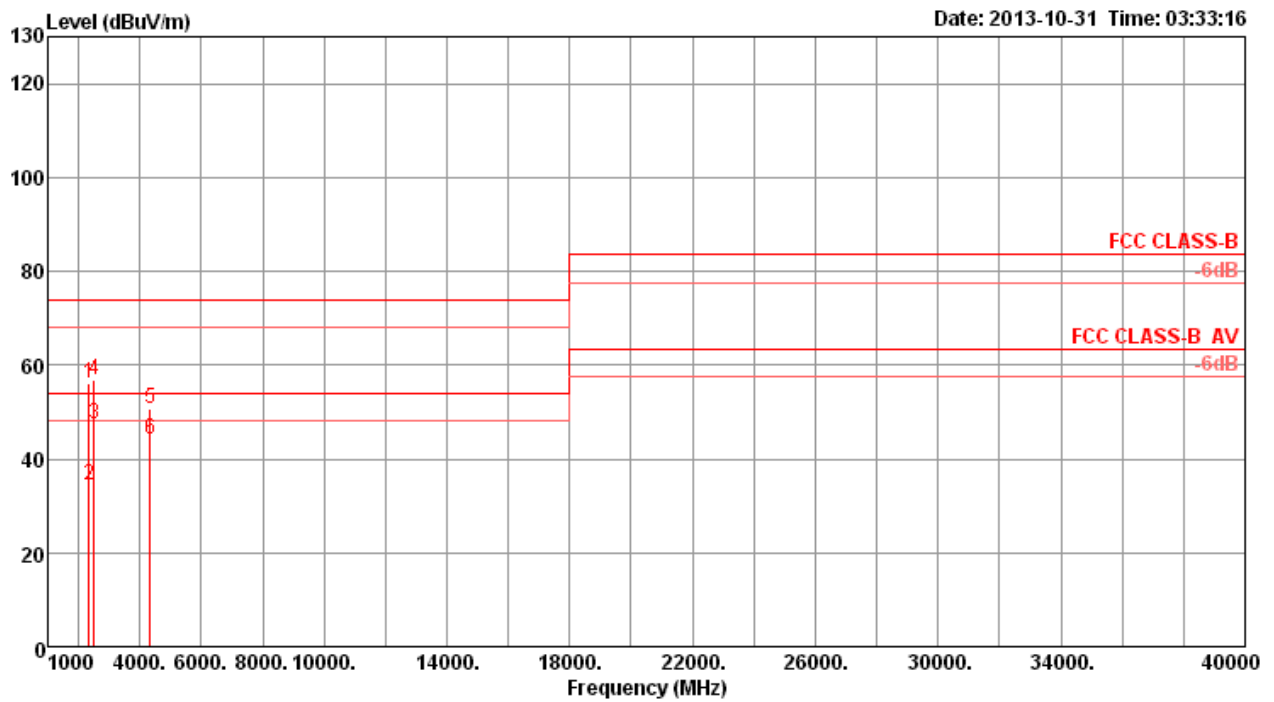

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2331.69	56.22	74.00	-17.78	59.26	4.04	27.89	34.97	Peak	100	217	HORIZONTAL
2	2331.99	34.48	54.00	-19.52	37.48	4.04	27.93	34.97	Average	100	217	HORIZONTAL
3	2500.05	47.27	54.00	-6.73	49.80	4.17	28.30	35.00	Average	148	283	HORIZONTAL
4	2500.44	56.82	74.00	-17.18	59.35	4.17	28.30	35.00	Peak	148	283	HORIZONTAL
5	4319.95	50.76	74.00	-23.24	47.69	5.51	32.76	35.20	Peak	128	313	HORIZONTAL
6	4320.01	44.35	54.00	-9.65	41.28	5.51	32.76	35.20	Average	128	313	HORIZONTAL

Vertical

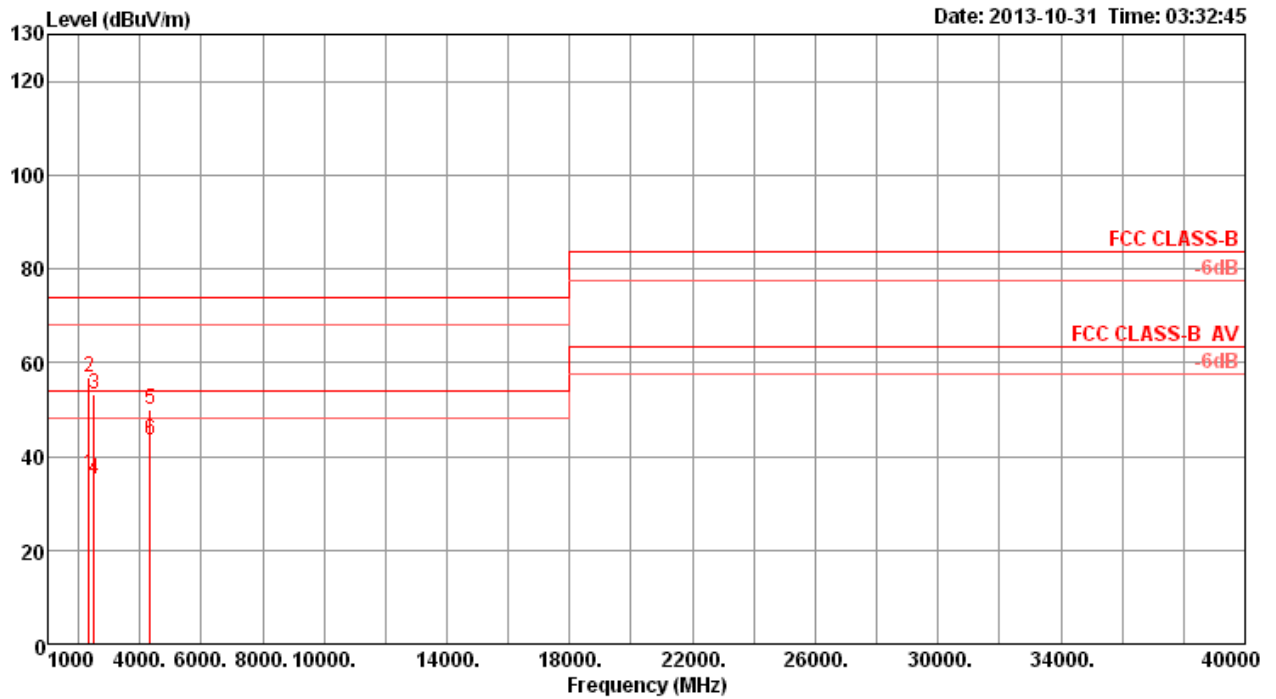

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2331.28	36.36	54.00	-17.64	39.40	4.04	27.89	34.97	Average	100	138	VERTICAL
2	2331.92	56.70	74.00	-17.30	59.70	4.04	27.93	34.97	Peak	100	138	VERTICAL
3	2499.48	53.07	74.00	-20.93	55.60	4.17	28.30	35.00	Peak	129	72	VERTICAL
4	2500.09	35.02	54.00	-18.98	37.55	4.17	28.30	35.00	Average	129	72	VERTICAL
5	4320.14	50.01	74.00	-23.99	46.94	5.51	32.76	35.20	Peak	100	103	VERTICAL
6	4320.15	43.59	54.00	-10.41	40.52	5.51	32.76	35.20	Average	100	103	VERTICAL