



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	PEGATRON CORPORATION
Applicant Address	5F., NO. 76, LIGONG ST., BEITOU DISTRICT, TAIPEI CITY 112 Taiwan
FCC ID	VUIDPC3941
Manufacturer's company	MAINTEK COMPUTER
Manufacturer Address	233 Jinfeng Rd., Suzhou, Jiangsu, PRC

Product Name	Wireless Residential Voice Gateway
Brand Name	Cisco
Model No.	DPC3941, DPC3941T
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Dec. 16, 2013
Final Test Date	Apr. 29, 2014
Submission Type	Class II Change

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03, KDB 662911 D01 v02r01, KDB644545 D01v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes.....	6
3.6. Table for Testing Locations.....	6
3.7. Table for Multiple List.....	7
3.8. Table for Class II Change .....	7
3.9. Table for Supporting Units .....	7
3.10. Table for Parameters of Test Software Setting .....	8
3.11. EUT Operation during Test .....	8
3.12. Duty Cycle.....	9
3.13. Test Configurations .....	11
<b>4. TEST RESULT .....</b>	<b>12</b>
4.1. Maximum Conducted Output Power Measurement.....	12
4.2. Radiated Emissions Measurement .....	15
4.3. Antenna Requirements .....	21
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>22</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>23</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A3</b>



## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3D1632-01AB	Rev. 01	Initial issue of report	May 05, 2014



## 1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless Residential Voice Gateway  
Brand Name : Cisco  
Model No. : DPC3941, DPC3941T  
Applicant : PEGATRON CORPORATION  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Dec. 16, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read 'Sam Chen', is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.407(a)	Maximum Conducted Output Power	Complies	0.05 dB
4.2	15.407(b)	Radiated Emissions	Complies	0.10 dB
4.3	15.203	Antenna Requirements	Complies	-

Note: Test result of maximum conducted output power is based on original test report.

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	Internal power supply
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Maximum Conducted Output Power	802.11ac MCS0/Nss1 (VHT20): 16.62 dBm ; 802.11ac MCS0/Nss1 (VHT40): 16.95 dBm ; 802.11ac MCS0/Nss1 (VHT80): 16.67 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

##### IEEE 802.11a

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	Internal power supply
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	4
Maximum Conducted Output Power	16.72 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming

### Antenna and Bandwidth

Antenna	Three (TX)		
	20 MHz	40 MHz	80 MHz
Band width Mode			
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

### IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:  
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

## 3.2. Accessories

Power line\*1, Non-shielded, 2m

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	P/N	Antenna Type	Connector	Gain (dBi)	
						2.4GHz	5GHz
1	Wanshih	WPB263	UC3WFI0087	PCB Antenna	MHF	2.03	-
2	Wanshih	WPB264	UC3WFI0088	PCB Antenna	MHF	2.11	-
3	Wanshih	WPB265	UC3WFI0089	PCB Antenna	MHF	1.73	-
4	Wanshih	WPB266	UC3WFI0090	PCB Antenna	MHF	-	2.08
5	Wanshih	WPB268	UC3WFI0092	PCB Antenna	MHF	-	2.03
6	Wanshih	WPB267	UC3WFI0091	PCB Antenna	MHF	-	1.99
7	ACON	Cisco_DPC_3941	APP6P-701222	PCB Antenna	MHF	-	1.95
8	ACON	Cisco_DPC_3941	APP6P-701220	PCB Antenna	MHF	-	2.03
9	ACON	Cisco_DPC_3941	APP6P-701221	PCB Antenna	MHF	-	1.34

Note: The EUT has nine antennas.

Chain 1: Connect to Ant. 1, Chain 2: Connect to Ant. 2, Chain 3: Connect to Ant. 3,


Chain 4: Connect to Ant. 4 or Ant. 7, Chain 5: Connect to Ant. 5 or Ant. 8, Chain 6: Connect to Ant. 6. or Ant. 9.

**For 2.4GHz Band (3TX/3RX):**

Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

**For 5 GHz Band (3TX/3RX):**

Chain 4, Chain 5 and Chain 6 could transmit/receive simultaneously.

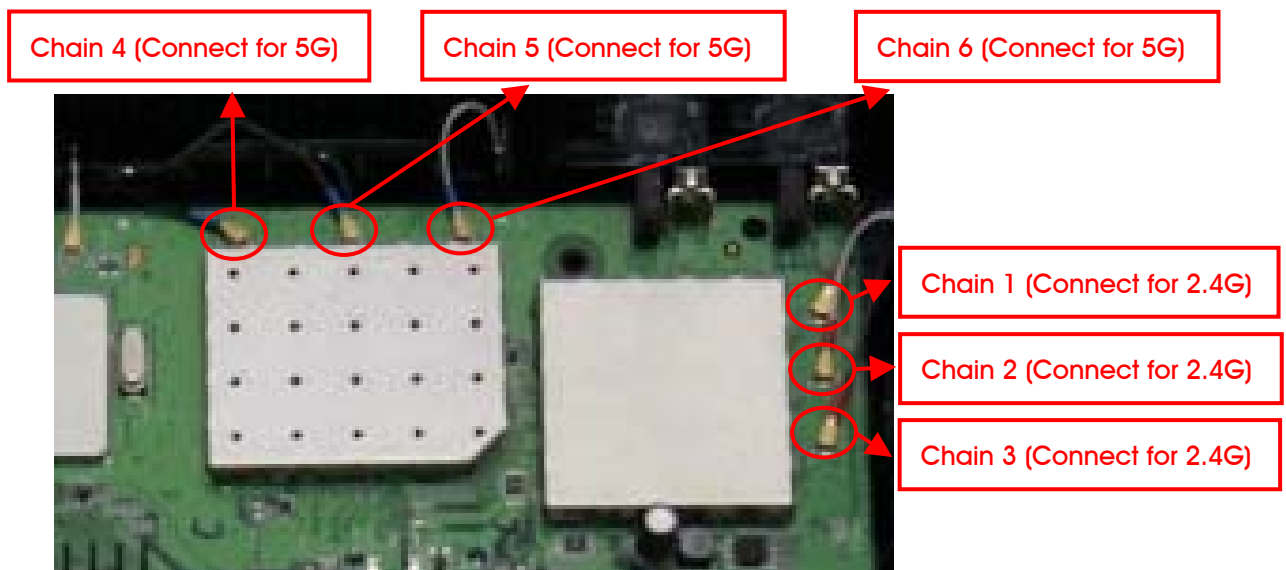



### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
Max. Conducted Output Power	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	4+5+6
	11ac VHT40	Band 1	MCS0/Nss1	38/46	4+5+6
	11ac VHT80	Band 1	MCS0/Nss1	42	4+5+6
	11a/BPSK	Band 1	6Mbps	36/40/48	4+5+6
Radiated Emission Below 1GHz	CTX		-	-	-

Note: Test result of maximum conducted output power is based on original test report.

The following test modes were performed for all tests:

**For Radiated Emissions Below 1GHz test:**

Mode 1. CTX- EUT 2.4G

Mode 2. CTX- EUT 5G

Mode 2 is the worst case, so it was selected to record in this test report.

### 3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Multiple List

The model numbers in the following table are all refer to the identical product.

Model No.	Information of Tuner Chip
DPC3941	1. Mxl267, Upstream channels (24 x 8) 2. Mxl265, Upstream channels (16 x 8)
DPC3941T	Mxl267, Upstream channels (24 x 8)

From the above models, model: DPC3941 was selected as representative model for the test and its data was recorded in this report.

### 3.8. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR3D1632AB

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking						
1. Adding a new tuner chip Mxl265 (Upstream channels 16 x 8), only for model number DPC3941. 2. Adding a new model number DPC3941T. The difference between original model number and new model number as below: <table border="1" data-bbox="252 1115 997 1361"> <thead> <tr> <th>Model No.</th> <th>Information of Tuner Chip</th> </tr> </thead> <tbody> <tr> <td>DPC3941 (original)</td> <td>1. Mxl267, Upstream channels (24 x 8) 2. Mxl265, Upstream channels (16 x 8)</td> </tr> <tr> <td>DPC3941T (new)</td> <td>Mxl267, Upstream channels (24 x 8)</td> </tr> </tbody> </table> 3. Adding 3 5GHz antennas. The antenna type is same as original certified antennas, but the antenna gain is lower than original certified antennas.	Model No.	Information of Tuner Chip	DPC3941 (original)	1. Mxl267, Upstream channels (24 x 8) 2. Mxl265, Upstream channels (16 x 8)	DPC3941T (new)	Mxl267, Upstream channels (24 x 8)	Radiated Emissions Below 1GHz.
Model No.	Information of Tuner Chip						
DPC3941 (original)	1. Mxl267, Upstream channels (24 x 8) 2. Mxl265, Upstream channels (16 x 8)						
DPC3941T (new)	Mxl267, Upstream channels (24 x 8)						

Note: Test result of maximum conducted output power is based on original test report.

### 3.9. Table for Supporting Units

Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	M1330	DoC

### 3.10. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0/Nss1 VHT20	12.5	12.5	12.5

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS	
Frequency	5190 MHz	5230 MHz
MCS0/Nss1 VHT40	13	13

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS
Frequency	5210 MHz
MCS0/Nss1 VHT80	13

#### Power Parameters of IEEE 802.11a


Test Software Version	DOS		
Frequency	5180 MHz	5200 MHz	5240 MHz
802.11a	12.5	12.5	12.5

### 3.11. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


### 3.12. Duty Cycle

#### IEEE 802.11ac MCS0/Nss1 VHT20

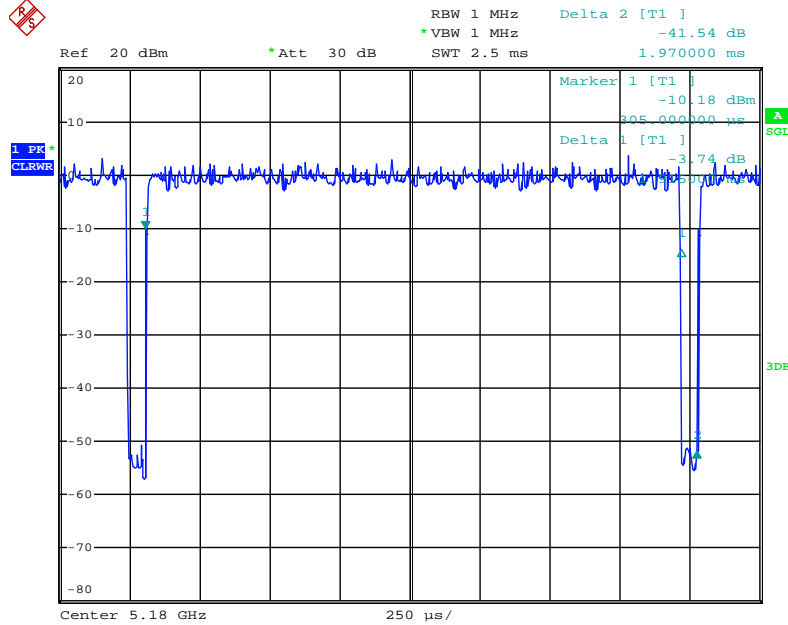


Date: 20.FEB.2014 02:33:54

#### IEEE 802.11ac MCS0/Nss1 VHT40

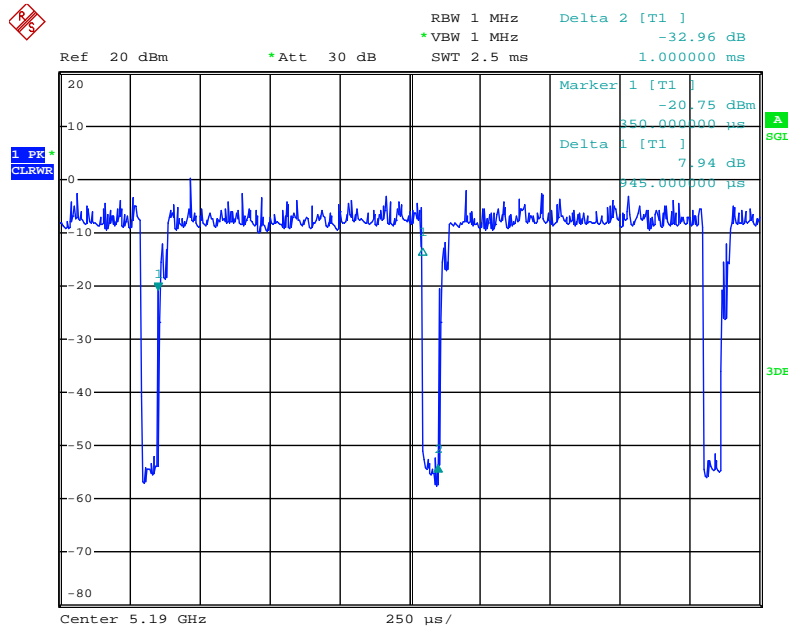


Date: 20.FEB.2014 02:35:17

IEEE 802.11ac MCS0/Nss1 VHT80

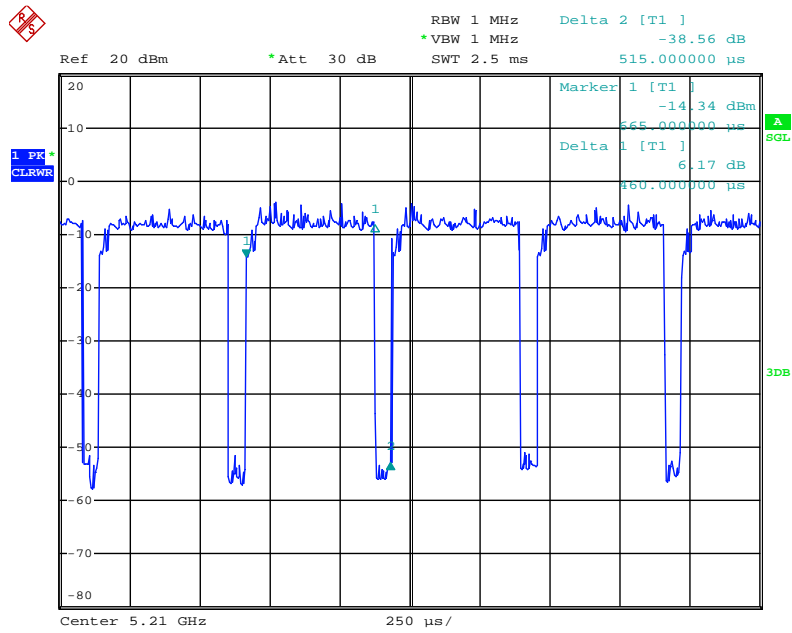

Date: 20.FEB.2014 02:36:25


IEEE 802.11a

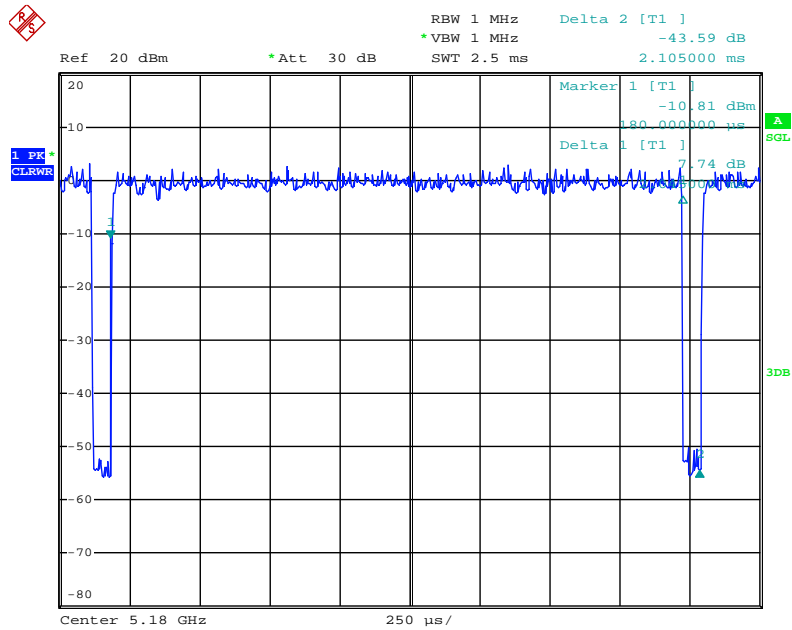

Date: 20.FEB.2014 02:32:09

### 3.13. Test Configurations

#### 3.13.1. Radiation Emissions Test Configuration

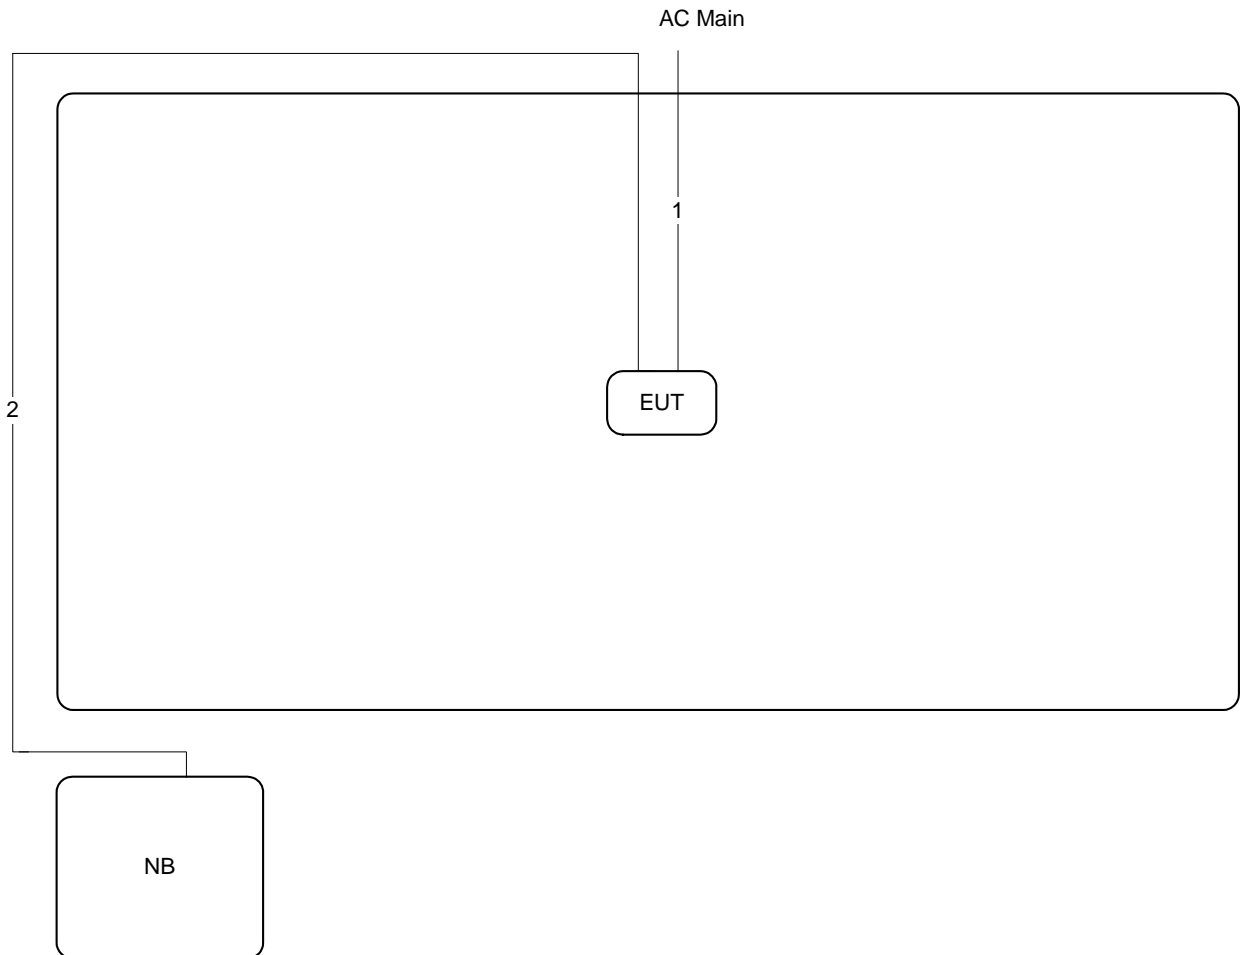

Item	Connection	Shielded	Length
1	Power cable	No	2m
2	RJ-45 cable	No	10m

## 4. TEST RESULT

### 4.1. Maximum Conducted Output Power Measurement

#### 4.1.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or  $4 \text{ dBm} + 10\log B$ , where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

#### 4.1.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power =>(3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.1.4. Test Setup Layout



#### 4.1.5. Test Deviation

There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.1.7. Test Result of Maximum Conducted Output Power

Temperature	22°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac
Test Date	Feb. 20, 2014		

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
36	5180 MHz	11.99	12.26	11.24	16.62	17.00	Complies
40	5200 MHz	11.93	12.01	11.56	16.61	17.00	Complies
48	5240 MHz	11.84	12.06	11.49	16.57	17.00	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 5	Chain 6	Total		
38	5190 MHz	12.14	12.72	11.59	16.95	17.00	Complies
46	5230 MHz	12.04	12.46	11.81	16.88	17.00	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 5	Chain 6	Total		
42	5210 MHz	11.87	12.13	11.69	16.67	17.00	Complies



<b>Temperature</b>	22°C	<b>Humidity</b>	57%
<b>Test Engineer</b>	Wen Chao	<b>Configurations</b>	IEEE 802.11a
<b>Test Date</b>	Feb. 20, 2014		

**Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6**

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
36	5180 MHz	12.01	12.12	11.28	16.59	17.00	<b>Complies</b>
40	5200 MHz	11.56	12.13	12.13	16.72	17.00	<b>Complies</b>
48	5240 MHz	11.96	12.18	11.43	16.64	17.00	<b>Complies</b>

## 4.2. Radiated Emissions Measurement

### 4.2.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, in case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

### 4.2.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.2.4. Test Setup Layout

For Radiated Emissions: 9kHz ~30MHz

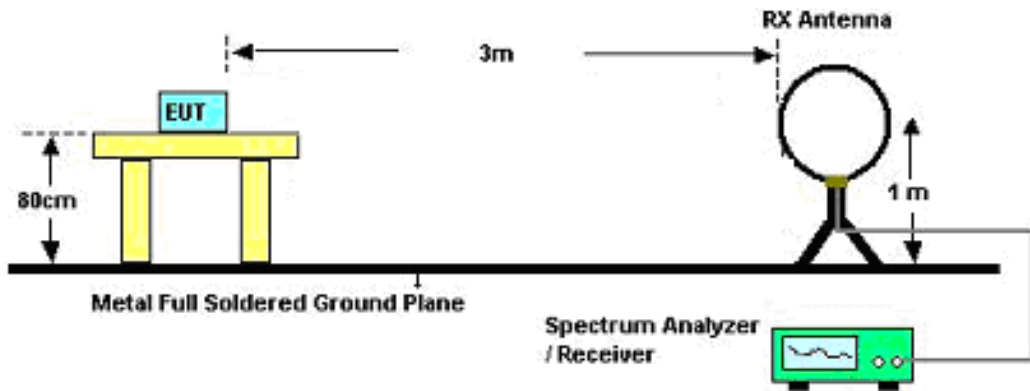

For Radiated Emissions: 30MHz~1GHz

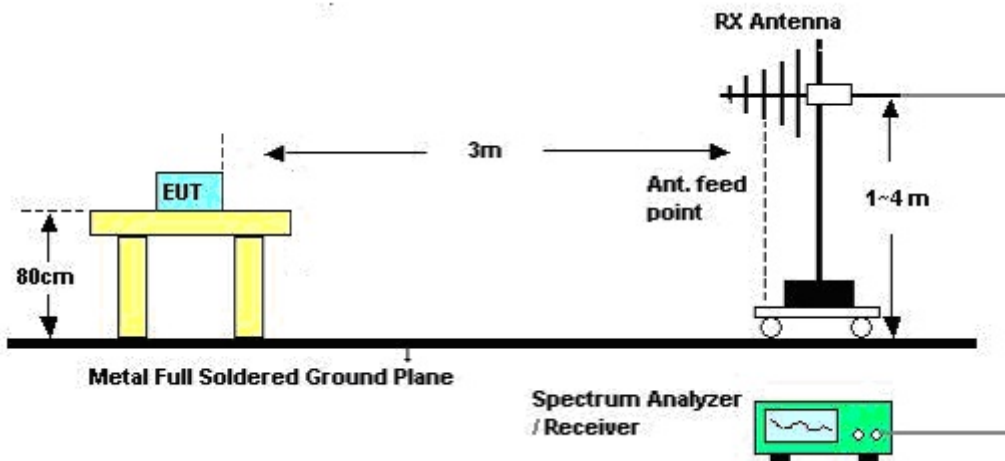

#### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	21°C	<b>Humidity</b>	58%
<b>Test Engineer</b>	Magic Lai	<b>Configurations</b>	CTX
<b>Test Date</b>	Apr. 29, 2014	<b>Test Mode</b>	Mode 2

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	21°C	Humidity	58%
Test Engineer	Magic Lai	Configurations	CTX
Test Mode	Mode 2		

Horizontal

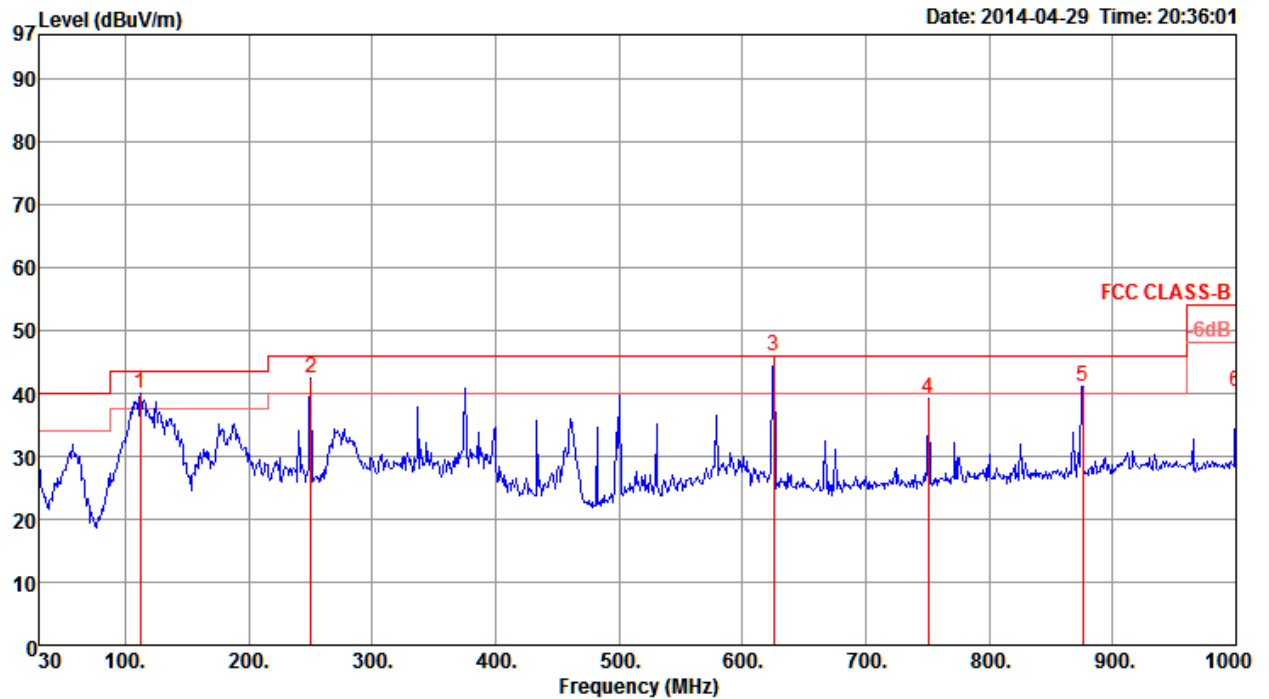

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	112.45	39.97	43.50	-3.53	53.51	1.58	12.60	27.72 Peak	0	100	HORIZONTAL
2	250.19	42.41	46.00	-3.59	53.78	2.38	13.20	26.95 Peak	0	100	HORIZONTAL
3	625.58	45.90	46.00	-0.10	49.86	3.82	19.80	27.58 QP	297	126	HORIZONTAL
4	750.71	39.09	46.00	-6.91	41.39	4.21	20.61	27.12 Peak	0	100	HORIZONTAL
5	875.84	41.17	46.00	-4.83	41.76	4.51	21.76	26.86 Peak	0	100	HORIZONTAL
6	1000.00	40.30	54.00	-13.70	39.18	4.84	22.50	26.22 Peak	0	100	HORIZONTAL

**Vertical**

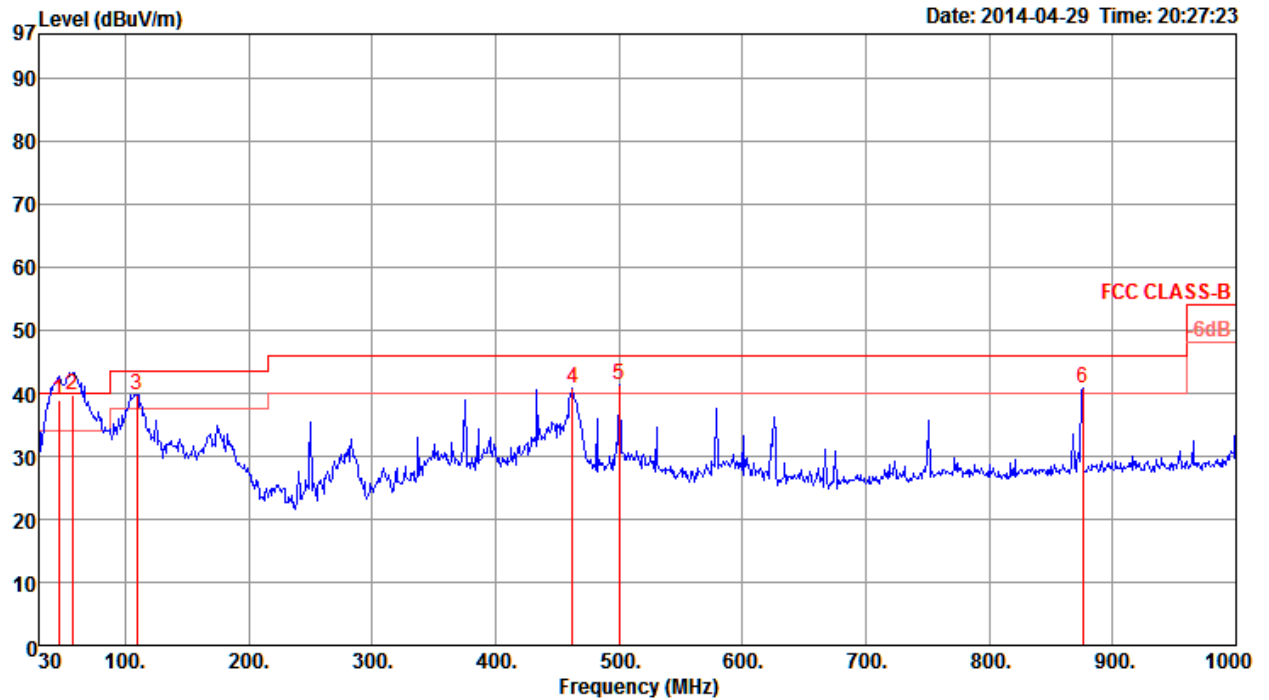

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	46.49	38.92	40.00	-1.08	55.57	1.01	10.27	27.93	15	100	VERTICAL
2	57.16	39.70	40.00	-0.30	59.08	1.15	7.40	27.93	18	100	VERTICAL
3	109.54	39.73	43.50	-3.77	53.29	1.57	12.60	27.73	0	400	VERTICAL
4	462.62	40.68	46.00	-5.32	47.98	3.28	17.27	27.85	0	400	VERTICAL
5	500.45	41.34	46.00	-4.66	48.09	3.38	17.80	27.93	0	400	VERTICAL
6	875.84	40.90	46.00	-5.10	41.49	4.51	21.76	26.86	0	400	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### **4.3. Antenna Requirements**

#### **4.3.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### **4.3.2. Antenna Connector Construction**

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.



## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
BILOG ANTENNA	Teseq GmbH	CBL 6112D	35236	30MHz ~ 2GHz	Nov. 29, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.173	dB	k=1	0.086
Cable loss	±0.174	dB	k=2	0.087
Antenna gain	±0.169	dB	k=2	0.084
Site imperfection	±0.433	dB	Triangular	0.214
Pre-amplifier gain	±0.366	dB	k=2	0.183
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $Uc(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2Uc(y)$				3.555

### Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	±0.038	dB	k=2	0.019
Attenuator	±0.047	dB	k=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $Uc(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2Uc(y)$				1.726