

Label location:




T15749

NOTES:

1. Material: 50u Top-coated Polyester Film, Thickness: 0.052 ± 0.002 mm
Glue Type: Embossed white glassine liner, Thickness: 0.033 ± 0.003 mm
材質: 表面處理50番白色特多龍商標紙+格子膠
2. Dimension: 64.4*74.4mm
3. Graphic color Pantone Black C
文字印刷黑色
4. The materials are compliant with the limits of
ROHS Directive 2002/95/EC and its subsequent amendments
5. In duplicate, Roll up
一式一份, 整捲進料
6. Font: min 5.5pt Arial font
7. Barcode: must not be smaller than 1/8inch high

REV.	LTR	DATE	UPDATE DESCRIPTION	REMARK	SIGN	APPROVER
▲		2014/03/25	增加UL/FCC & 警語			

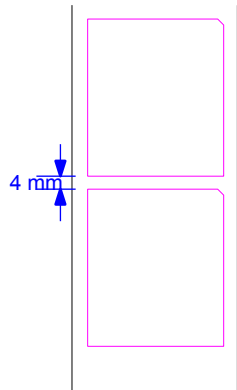


廠內列印示意圖
虛線部分為廠內列印區域

Device Type: XB3V3 FCC ID: VUIDPC3941
Model: DPC3941T
DOCSIS 3.0
VOICE GATEWAY Rating: 100-120 Vac, 50-60 Hz, 1.1A

P/N DPC3941-TMC14-K9
S/N 267763034


CM MAC 68EE96D70046
Network Name (SSID 1):
 HOME-0046-2.4
Network Name (SSID 2):
 HOME-0046-5
Network Key (Password):
 CCHWD7AATTAHH94R
Encryption: WPAWPA2-PSK(TKIP/AES)

WPS Pin: 00702157
RFPI: 026BEABF58
URL: http://10.0.0.1
SW Ver.: dpc3941-P20-18-v303r204216-140109a-CMCST
HW Ver.: 1.0
Date of Mfg: 01/14 Factory ID: F2 Made in China

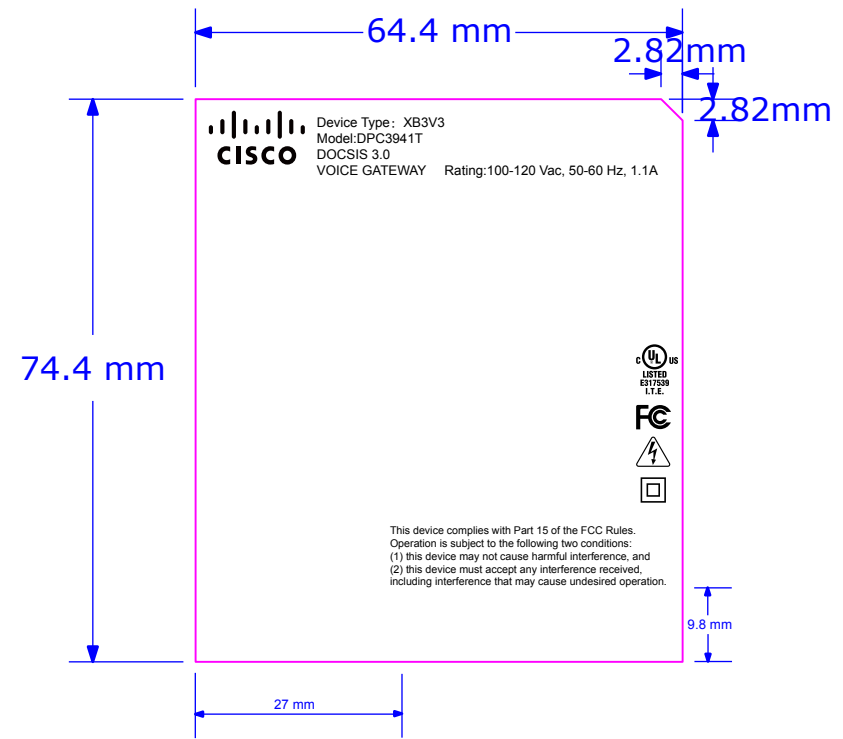


SCALE 1:1

Material Made



Roll Up



Example Of Factory Printing Location:

虛線部分為廠內列印區域

ITEM	PART NAME	PART NO.	QTY /SET	MATERIAL (SPEC.)	REMARK
MATERIAL (SPEC.)	參照Notes標示	QUANTITY /SET	1/1		
FINISH		SCALE	1:1		
SELECT v		UNIT	MM	SIZE	A4
DIM.	TOL.	A	B	C	V EXTRA
~50	± 0.05	0.10	0.20		
50~100	± 0.10	0.20	0.30		± 0.20
100~150	± 0.20	0.30	0.40		
150~	± 0.20	0.40	0.50		
		DATE	2014/03/25		
		DESIGNED	Anna		
		CHECKED	Sujing Tsai		
		APPROVED	Sujing Tsai		
		MODEL NO.	DPC3941T		
		DRAWING NO.	1510-1HEW000		
		PARTS NO.	1510-1HEW000		

UNIHAN CORPORATION

DESCRIPTION: DEVICE LABEL DPC3941T