



FCC RADIO TEST REPORT

FCC ID : VUIMD100
Equipment : Module
Brand Name : PEGATRON
Model Name : MD100-Q62
Applicant : PEGATRON CORPORATION
5F., NO. 76, LIGONG ST., BEITOU
DISTRICT, TAIPEI CITY, Taiwan
Manufacturer : PEGATRON CORPORATION
5F., NO. 76, LIGONG ST., BEITOU
DISTRICT, TAIPEI CITY, Taiwan
Standard : FCC 47 CFR Part 2, 27

The product was received on Mar. 16, 2023 and testing was performed from Mar. 28, 2023 to May 11, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Modification of EUT 5

 1.3 Testing Location 6

 1.4 Applicable Standards..... 6

2 Test Configuration of Equipment Under Test 7

 2.1 Test Mode..... 7

 2.2 Connection Diagram of Test System..... 7

 2.3 Support Unit used in test configuration and system 8

 2.4 Frequency List of Low/Middle/High Channels 8

3 Conducted Test Items..... 9

 3.1 Measuring Instruments 9

 3.2 Conducted Output Power and EIRP..... 10

4 Radiated Test Items 11

 4.1 Measuring Instruments 11

 4.2 Radiated Spurious Emission Measurement 13

5 List of Measuring Equipment..... 14

6 Uncertainty of Evaluation..... 15

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of Radiated Test

Appendix C. Test Setup Photographs



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§27.50 (k)(3)	Equivalent Isotropic Radiated Power (n77)	Pass	
-	§27.50 (k)(4)	Peak-to-Average Ratio	-	See Note
-	§2.1049	Occupied Bandwidth	-	See Note
-	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement (n77)	-	See Note
-	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission (n77)	-	See Note
-	§2.1055 §27.54	Frequency Stability Temperature & Voltage	-	See Note
4.2	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission (n77)	Pass	13.14 dB Under limit at 7024.000 MHz

Note:

1. The certified module (model: VUIMD100).
2. The conducted power has been verified to be consistent with the original modular certification, therefore, the conducted signal test will be re-used.
3. To perform a spot check on the radiated spurious emission of the host.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo

Report Producer: Lucy Wu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs LTE/5G NR.	
Antenna Type WWAN: PIFA Antenna	
Installed into Host	Equipment Name: 5G Dongle Brand Name: PEGATRON Model Name: MD100-Q62
Antenna Gain	<Ant. 0> 5G NR n77: -0.42 dBi <Ant. 3> 5G NR n77: 1.43 dBi

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY
Test Engineer	Luffy Lin
Temperature	23.5~24.1
Relative Humidity	48~52

Test Site	Sporton International Inc. Wensan Laboratory.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH12-HY (TAF Code: 3786)
Test Engineer	Tim Lee and Wilson Wu
Temperature	20~25
Relative Humidity	50~60
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..

Test Items	NR Band	Bandwidth (MHz)												Modulation					RB #			Test Channel					
		10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H			
Max. Output Power	n77	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
E.I.R.P	n77	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	Max. Power								
Radiated Spurious Emission	n77				-		v												v						v	v	v
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report. 																										

2.2 Connection Diagram of Test System

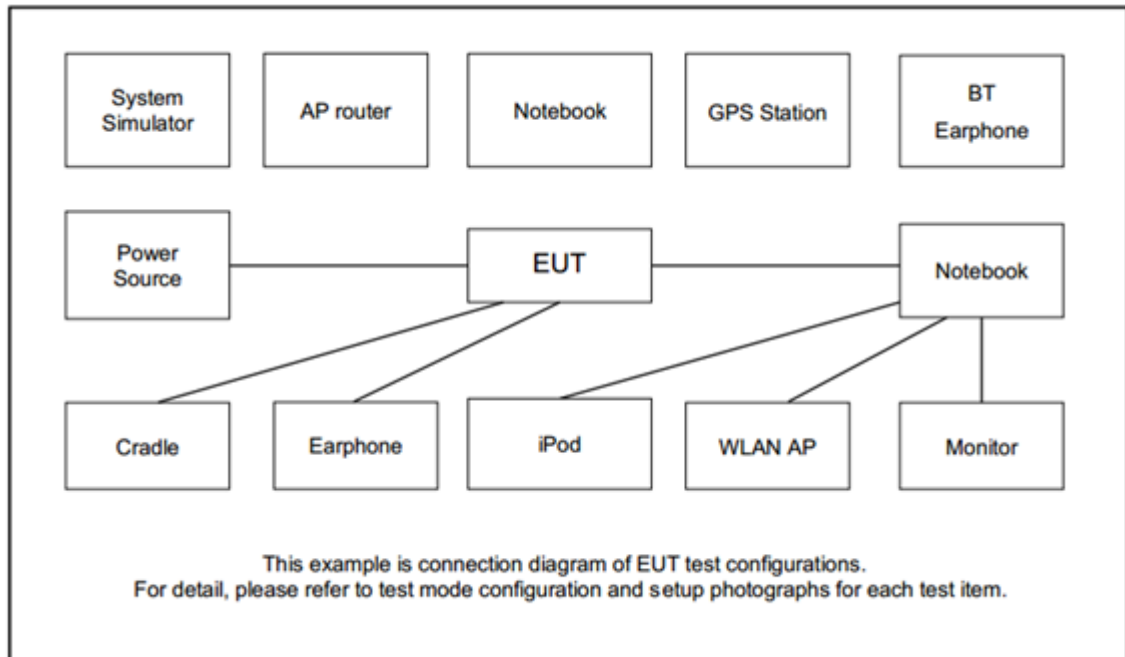



2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
3.	Adapter	Samsung	GT-N7000	N/A	N/A	N/A

2.4 Frequency List of Low/Middle/High Channels

5G NR Band n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power

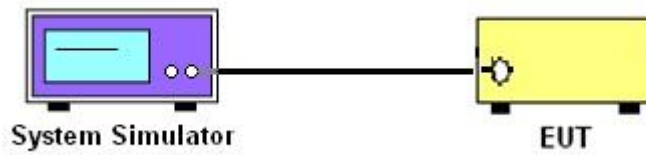

3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and EIRP

3.2.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.
5. The MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

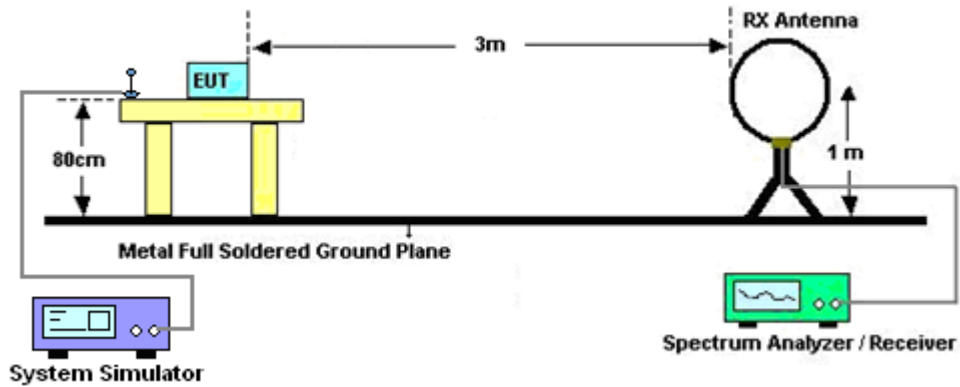


For radiated test from 30MHz to 1GHz

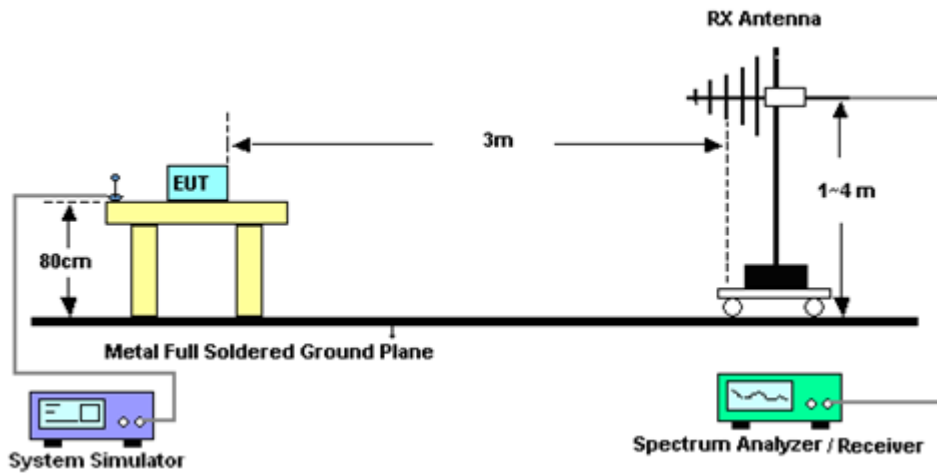

For radiated test from 1GHz to 18GHz

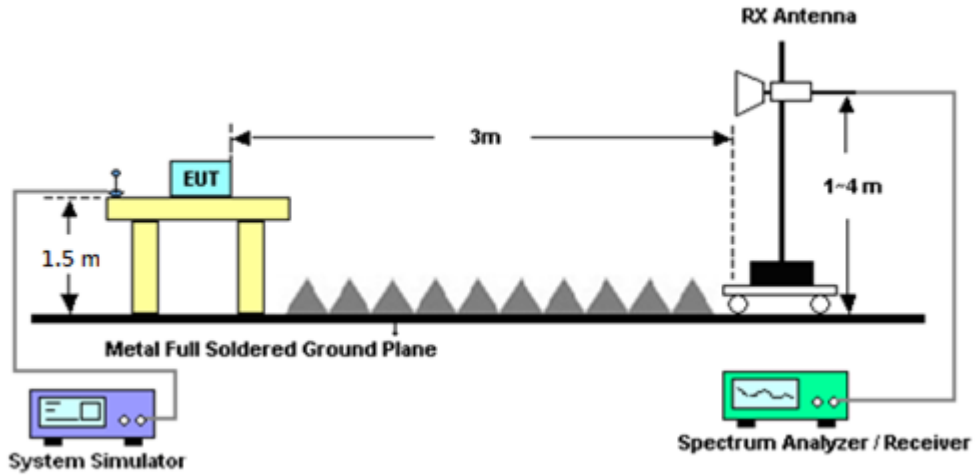

For radiated test above 18GHz

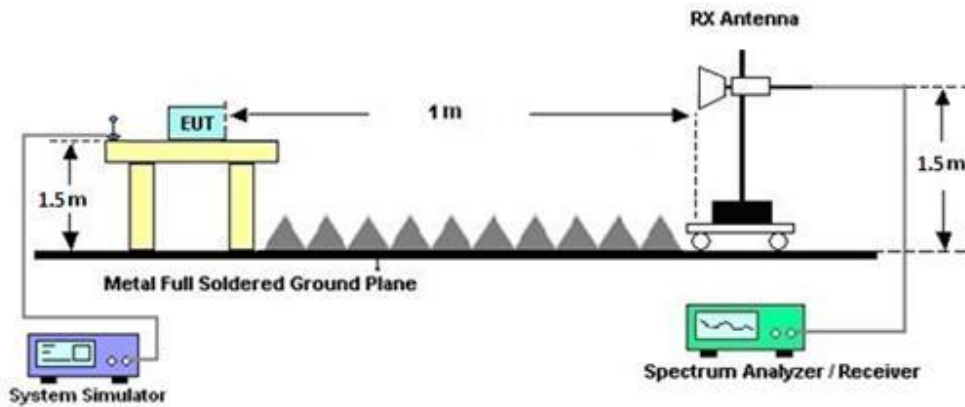

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$

$ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Apr. 20, 2023~ May 11, 2023	Sep. 19, 2023	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	37059 & 01	30MHz~1GHz	Nov. 10, 2022	Apr. 20, 2023~ May 11, 2023	Nov. 09, 2023	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02114	1GHz~18GHz	Aug. 09, 2022	Apr. 20, 2023~ May 11, 2023	Aug. 08, 2023	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	00993	18GHz~40GHz	Nov. 24, 2022	Apr. 20, 2023~ May 11, 2023	Nov. 23, 2023	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 03, 2022	Apr. 20, 2023~ May 11, 2023	Oct. 02, 2023	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 24, 2022	Apr. 20, 2023~ May 11, 2023	May 23, 2023	Radiation (03CH12-HY)
Preamplifier	E-INSTRUME NT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900249	1GHz-18GHz	Dec. 21, 2022	Apr. 20, 2023~ May 11, 2023	Dec. 20, 2023	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 07, 2022	Apr. 20, 2023~ May 11, 2023	Dec. 06, 2023	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Jan. 10, 2023	Apr. 20, 2023~ May 11, 2023	Jan. 09, 2024	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN2	6.75GHz High Pass Filter	Mar. 14, 2023	Apr. 20, 2023~ May 11, 2023	Mar. 13, 2024	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 07, 2023	Apr. 20, 2023~ May 11, 2023	Mar. 06, 2024	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 20, 2022	Apr. 20, 2023~ May 11, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Dec. 20, 2022	Apr. 20, 2023~ May 11, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803953/2	30MHz~40GHz	Dec. 20, 2022	Apr. 20, 2023~ May 11, 2023	Dec. 19, 2023	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP210090	N/A	Oct. 03, 2022	Apr. 20, 2023~ May 11, 2023	Oct. 02, 2023	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 20, 2023~ May 11, 2023	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Apr. 20, 2023~ May 11, 2023	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Apr. 20, 2023~ May 11, 2023	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Apr. 20, 2023~ May 11, 2023	N/A	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	NA	Nov. 17, 2022	Mar. 28, 2023~ Apr. 13, 2023	Nov. 16, 2023	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8821C	6262116730	LTE	Jun. 15, 2022	Mar. 28, 2023~ Apr. 13, 2023	Jun. 14, 2023	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6262134933	FR1	Jun. 13, 2022	Mar. 28, 2023~ Apr. 13, 2023	Jun. 12, 2023	Conducted (TH03-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.25 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.81 dB
---	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and ERP/EIRP

<SISO Mode>

NR n77 Maximum Average Power [dBm] (GT - LC = -0.42 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.92	24.87	24.95	24.64	0.2911		
10	1	22		24.93	24.89	25.02				
10	12	6		25.01	24.92	25.06				
10	1	0		21.45	21.35	21.49				
10	1	23		21.39	21.29	21.43				
10	24	0		24.52	24.42	24.51				
10	1	1	QPSK	25.01	24.83	24.86			24.64	0.2911
10	1	22		24.95	24.81	24.89				
10	12	6		25.03	25.01	24.98				
10	1	0		21.45	21.35	21.42				
10	1	23		21.42	21.32	21.38				
10	24	0		24.02	24.02	24.05				
10	1	1	16-QAM	23.82	23.67	23.75	23.40	0.2188		
10	1	1	64-QAM	22.38	22.35	22.41				
10	1	1	256-QAM	20.45	20.42	20.44				
Limit	EIRP < 1W			Result			Pass			

NR n77 Maximum Average Power [dBm] (GT - LC = -0.42 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	25.09	25.04	25.02	24.71	0.2958		
15	1	36		25.02	25.03	25.04				
15	18	9		25.13	25.06	25.09				
15	1	0		21.62	21.53	21.49				
15	1	37		21.56	21.49	21.57				
15	36	0		24.65	24.51	24.57				
15	1	1	QPSK	25.10	25.01	24.98			24.71	0.2958
15	1	36		25.04	24.93	25.04				
15	18	9		25.13	25.03	25.05				
15	1	0		21.65	21.45	21.54				
15	1	37		21.52	21.49	21.49				
15	36	0		24.12	24.06	24.05				
15	1	1	16-QAM	23.85	23.87	24.02	23.60	0.2292		
15	1	1	64-QAM	22.67	22.57	22.65				
15	1	1	256-QAM	20.53	20.49	20.56				
Limit	EIRP < 1W			Result			Pass			



NR n77 Maximum Average Power [dBm] (GT - LC = -0.42 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	25.17	25.07	25.03	24.75	0.2985		
20	1	49		25.05	25.02	25.03				
20	25	12		25.11	25.12	25.07				
20	1	0		21.59	21.54	21.51				
20	1	50		21.59	21.46	21.57				
20	50	0		24.56	24.57	24.56				
20	1	1	QPSK	25.16	25.05	25.06			23.71	0.2350
20	1	49		25.09	24.98	25.05				
20	25	12		25.07	25.02	25.07				
20	1	0		21.63	21.36	21.54				
20	1	50		21.57	21.34	21.48				
20	50	0		24.03	23.95	24.07				
20	1	1	16-QAM	24.13	23.71	23.84	23.71	0.2350		
20	1	1	64-QAM	22.65	22.48	22.49				
20	1	1	256-QAM	20.67	20.40	20.49				
Limit	EIRP < 1W			Result			Pass			

NR n77 Maximum Average Power [dBm] (GT - LC = -0.42 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.12	25.02	25.07	24.72	0.2965		
30	1	76		24.98	25.06	25.08				
30	36	18		25.03	24.98	25.04				
30	1	0		21.59	21.55	21.56				
30	1	77		21.45	21.48	21.63				
30	75	0		24.57	24.54	24.57				
30	1	1	QPSK	25.14	25.04	25.03			23.59	0.2286
30	1	76		24.98	24.95	25.06				
30	36	18		25.01	25.01	25.02				
30	1	0		21.62	21.68	21.56				
30	1	77		21.45	21.47	21.57				
30	75	0		24.05	24.15	24.11				
30	1	1	16-QAM	24.01	23.89	23.92	23.59	0.2286		
30	1	1	64-QAM	22.68	22.57	22.67				
30	1	1	256-QAM	20.65	20.54	20.65				
Limit	EIRP < 1W			Result			Pass			



NR n77 Maximum Average Power [dBm] (GT - LC = -0.42 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	25.22	25.15	25.08	24.80	0.3020		
40	1	104		25.11	25.06	25.13				
40	50	25		25.18	25.02	25.01				
40	1	0		21.76	21.54	21.54				
40	1	105		21.56	21.57	21.57				
40	100	0		24.67	24.54	24.52				
40	1	1	QPSK	25.17	25.06	25.01			23.90	0.2455
40	1	104		25.06	25.03	25.07				
40	50	25		25.09	24.99	24.95				
40	1	0		21.70	21.57	21.56				
40	1	105		21.52	21.53	21.56				
40	100	0		24.21	24.07	24.03				
40	1	1	16-QAM	24.32	23.92	23.86	23.90	0.2455		
40	1	1	64-QAM	22.89	22.68	22.59				
40	1	1	256-QAM	20.74	20.55	20.54				
Limit	EIRP < 1W			Result			Pass			

NR n77 Maximum Average Power [dBm] (GT - LC = -0.42 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	25.01	24.93	24.83	24.59	0.2877		
50	1	131		24.71	24.68	24.67				
50	64	32		24.92	24.84	24.76				
50	1	0		21.48	21.36	21.35				
50	1	132		21.23	21.19	21.18				
50	128	0		24.37	24.34	24.29				
50	1	1	QPSK	24.95	24.84	24.85			23.33	0.2154
50	1	131		24.67	24.68	24.65				
50	64	32		24.85	24.87	24.71				
50	1	0		21.45	21.45	21.30				
50	1	132		21.16	21.19	21.11				
50	128	0		23.83	23.84	23.77				
50	1	1	16-QAM	23.75	23.73	23.64	23.33	0.2154		
50	1	1	64-QAM	22.46	22.45	22.34				
50	1	1	256-QAM	20.46	20.41	20.35				
Limit	EIRP < 1W			Result			Pass			



NR n77 Maximum Average Power [dBm] (GT - LC = -0.42 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	24.97	24.89	24.87	24.55	0.2851		
60	1	160		24.75	24.77	24.81				
60	81	40		24.94	24.86	24.87				
60	1	0		21.42	21.38	21.32				
60	1	161		21.26	21.26	21.30				
60	162	0		24.45	24.38	24.41				
60	1	1	QPSK	24.93	24.93	24.83			23.51	0.2244
60	1	160		24.76	24.75	24.74				
60	81	40		24.91	24.86	24.84				
60	1	0		21.45	21.38	21.28				
60	1	161		21.23	21.22	21.21				
60	162	0		23.98	24.01	23.89				
60	1	1	16-QAM	23.93	23.86	23.67	23.51	0.2244		
60	1	1	64-QAM	22.47	22.46	22.32				
60	1	1	256-QAM	20.53	20.32	20.34				
Limit	EIRP < 1W			Result			Pass			

NR n77 Maximum Average Power [dBm] (GT - LC = -0.42 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
70	1	1	PI/2 BPSK	24.87	24.89	24.78	24.48	0.2805		
70	1	187		24.57	24.66	24.73				
70	90	45		24.71	24.78	24.82				
70	1	0		21.45	21.35	21.25				
70	1	188		21.06	21.17	21.18				
70	180	0		24.26	24.25	24.38				
70	1	1	QPSK	24.90	24.86	24.72			23.39	0.2183
70	1	187		24.56	24.67	24.71				
70	90	45		24.72	24.86	24.72				
70	1	0		21.35	21.32	21.35				
70	1	188		21.03	21.18	21.19				
70	180	0		23.75	23.86	23.78				
70	1	1	16-QAM	23.70	23.81	23.65	23.39	0.2183		
70	1	1	64-QAM	22.35	22.45	22.21				
70	1	1	256-QAM	20.37	20.42	20.25				
Limit	EIRP < 1W			Result			Pass			



NR n77 Maximum Average Power [dBm] (GT - LC = -0.42 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
80	1	1	PI/2 BPSK	24.93	24.87	24.81	24.51	0.2825
80	1	215		24.60	24.68	24.62		
80	108	54		24.72	24.80	24.76		
80	1	0		21.32	21.32	21.31		
80	1	216		21.11	21.18	21.15		
80	216	0		24.21	24.28	24.31		
80	1	1	QPSK	24.83	24.82	24.78	23.46	0.2218
80	1	215		24.69	24.63	24.65		
80	108	54		24.74	24.78	24.75		
80	1	0		21.39	21.30	21.29		
80	1	216		21.18	21.12	21.18		
80	216	0		23.74	23.78	23.75		
80	1	1	16-QAM	23.88	23.54	23.66	23.46	0.2218
80	1	1	64-QAM	22.49	22.28	22.43		
80	1	1	256-QAM	20.34	20.35	20.36		
Limit	EIRP < 1W			Result			Pass	

NR n77 Maximum Average Power [dBm] (GT - LC = -0.42 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
90	1	1	PI/2 BPSK	24.87	24.85	24.89	24.53	0.2838
90	1	243		24.71	24.72	24.83		
90	120	60		24.76	24.81	24.88		
90	1	0		21.38	21.32	21.21		
90	1	244		21.18	21.25	21.35		
90	243	0		24.26	24.29	24.36		
90	1	1	QPSK	24.85	24.81	24.85	23.39	0.2183
90	1	243		24.69	24.75	24.85		
90	120	60		24.76	24.95	24.89		
90	1	0		21.36	21.32	21.23		
90	1	244		21.24	21.29	21.30		
90	243	0		23.76	23.83	23.78		
90	1	1	16-QAM	23.81	23.68	23.55	23.39	0.2183
90	1	1	64-QAM	22.49	22.35	22.31		
90	1	1	256-QAM	20.45	20.29	20.15		
Limit	EIRP < 1W			Result			Pass	



NR n77 Maximum Average Power [dBm] (GT - LC = -0.42 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
100	1	1	PI/2 BPSK	-	24.77	-	24.40	0.2754
100	1	271		-	24.69	-		
100	135	67		-	24.69	-		
100	1	0		-	21.39	-		
100	1	272		-	21.25	-		
100	270	0		-	24.23	-		
100	1	1	QPSK	-	24.82	-	24.40	0.2754
100	1	271		-	24.72	-		
100	135	67		-	24.74	-		
100	1	0		-	22.23	-		
100	1	272		-	22.19	-		
100	270	0		-	23.75	-		
100	1	1	16-QAM	-	23.86	-	23.44	0.2208
100	1	1	64-QAM	-	22.95	-		
100	1	1	256-QAM	-	20.35	-		
Limit	EIRP < 1W			Result			Pass	



<MIMO Mode>

Part27Q NR n77 Maximum Average Power [dBm], DG = 1.43 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 3			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
10	1	1	QPSK	20.62	20.63	20.58	20.83	20.82	20.77	23.74	23.74	23.69	25.20	0.3311
10	1	22		20.73	20.65	20.64	20.74	20.85	20.87	23.75	23.76	23.77		
10	12	6		20.58	20.62	20.63	20.81	20.78	20.81	23.71	23.71	23.73		
10	1	0		18.65	18.61	18.63	18.81	18.82	18.75	21.74	21.73	21.70		
10	1	23		18.62	18.64	18.67	18.72	18.72	18.74	21.68	21.69	21.72		
10	24	0		19.14	19.08	19.19	19.29	19.23	19.24	22.23	22.17	22.23		
10	1	1	16-QAM	20.03	20.01	20.17	20.42	20.45	20.35	23.24	23.25	23.27	24.70	0.2951
10	1	1	64-QAM	18.48	18.43	18.54	18.57	18.63	18.52	21.54	21.54	21.54		
10	1	1	256-QAM	15.80	15.75	15.82	16.06	16.01	16.10	18.94	18.89	18.97		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1.43 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 3			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
15	1	1	QPSK	20.81	20.65	20.81	21.07	20.90	20.90	23.95	23.79	23.87	25.38	0.3451
15	1	36		20.82	20.82	20.78	20.95	20.87	20.93	23.90	23.86	23.87		
15	19	9		20.75	20.68	20.75	20.96	20.82	20.81	23.87	23.76	23.79		
15	1	0		18.79	18.73	18.72	18.99	18.82	18.86	21.90	21.79	21.80		
15	1	37		20.86	20.64	18.77	21.01	20.91	18.96	23.95	23.79	21.88		
15	38	0		19.21	19.20	19.22	19.44	19.32	19.30	22.34	22.27	22.27		
15	1	1	16-QAM	20.30	20.19	20.24	20.61	20.48	20.47	23.47	23.35	23.37	24.90	0.3090
15	1	1	64-QAM	18.67	18.54	18.57	18.75	18.64	18.66	21.72	21.60	21.63		
15	1	1	256-QAM	16.01	15.88	15.92	16.26	16.08	16.02	19.15	18.99	18.98		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1.43 dBi														
BW (MHz)	RB Size	RB Offset	Mod	Antenna 0			Antenna 3			Combine			EIRP (dBm)	EIRP (W)
				Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest		
20	1	1	QPSK	20.99	20.67	20.88	21.05	20.85	20.78	24.03	23.77	23.84	25.46	0.3516
20	1	49		20.92	20.86	20.69	21.03	20.81	20.82	23.99	23.85	23.77		
20	25	12		20.77	20.68	20.74	20.98	20.80	20.85	23.89	23.75	23.81		
20	1	0		18.76	18.69	18.69	19.06	18.83	18.75	21.92	21.77	21.73		
20	1	50		18.79	18.82	18.76	18.99	18.78	18.82	21.90	21.81	21.80		
20	51	0		19.24	19.21	19.18	19.49	19.29	19.26	22.38	22.26	22.23		
20	1	1	16-QAM	20.32	20.25	20.19	20.69	20.54	20.48	23.52	23.41	23.35	24.95	0.3126
20	1	1	64-QAM	18.69	18.59	18.57	18.83	18.63	18.60	21.77	21.62	21.60		
20	1	1	256-QAM	16.01	15.92	15.86	16.23	16.09	15.95	19.13	19.02	18.92		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 Maximum Average Power [dBm], DG = 1.43 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 3			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
30	1	1	QPSK	20.91	20.81	20.83	21.11	21.02	21.09	24.02	23.93	23.97	25.49	0.3540
30	1	76		20.83	20.96	20.94	21.19	20.90	21.16	24.02	23.94	24.06		
30	39	19		20.75	20.74	20.80	20.91	20.85	20.93	23.84	23.81	23.88		
30	1	0		18.85	18.76	18.76	19.08	19.02	19.08	21.98	21.90	21.93		
30	1	77		18.74	18.77	18.97	18.98	18.92	19.01	21.87	21.86	22.00		
30	78	0		19.29	18.31	19.38	19.43	19.38	19.46	22.37	21.89	22.43		
30	1	1	16-QAM	20.42	20.41	20.45	20.64	20.65	20.69	23.54	23.54	23.58	25.01	0.3170
30	1	1	64-QAM	18.73	18.72	18.72	18.88	18.76	18.89	21.82	21.75	21.82		
30	1	1	256-QAM	16.05	16.02	16.11	16.31	16.32	16.29	19.19	19.18	19.21		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1.43 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 3			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
40	1	1	QPSK	21.05	20.85	20.84	21.24	21.11	21.05	24.16	23.99	23.96	25.59	0.3622
40	1	104		20.82	20.85	20.96	21.09	20.96	21.06	23.97	23.92	24.02		
40	53	26		20.83	20.78	20.76	20.97	20.83	20.81	23.91	23.82	23.80		
40	1	0		19.01	18.83	18.79	19.25	19.04	18.98	22.14	21.95	21.90		
40	1	105		18.98	18.84	18.90	19.08	18.88	18.98	22.04	21.87	21.95		
40	106	0		19.35	19.32	19.32	19.52	19.38	19.36	22.45	22.36	22.35		
40	1	1	16-QAM	20.45	20.41	20.41	20.88	20.66	20.60	23.68	23.55	23.52	25.11	0.3243
40	1	1	64-QAM	18.83	18.74	18.71	19.01	18.79	18.74	21.93	21.78	21.74		
40	1	1	256-QAM	16.12	16.04	16.05	16.42	16.34	16.17	19.28	19.20	19.12		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1.43 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 3			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
50	1	1	QPSK	20.64	20.67	20.75	20.94	20.89	20.74	23.80	23.79	23.76	25.23	0.3334
50	1	131		20.68	20.61	20.49	20.58	20.63	20.51	23.64	23.63	23.51		
50	67	33		20.56	20.55	20.53	20.71	20.65	20.41	23.65	23.61	23.48		
50	1	0		18.66	18.64	18.56	18.95	18.88	18.64	21.82	21.77	21.61		
50	1	132		18.51	18.47	18.44	18.57	18.57	18.47	21.55	21.53	21.47		
50	133	0		19.09	19.07	19.04	19.25	19.20	18.98	22.18	22.15	22.02		
50	1	1	16-QAM	20.23	20.24	20.10	20.65	20.45	20.35	23.46	23.36	23.24	24.89	0.3083
50	1	1	64-QAM	18.65	18.54	18.52	18.73	18.68	18.53	21.70	21.62	21.54		
50	1	1	256-QAM	15.81	15.82	18.84	16.14	16.05	15.90	18.99	18.95	20.62		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1.43 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 3			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
60	1	1	QPSK	20.54	20.62	20.64	20.87	20.92	20.86	23.72	23.78	23.76	25.21	0.3319
60	1	160		20.54	20.69	20.57	20.69	20.67	20.63	23.63	23.69	23.61		
60	81	40		20.52	20.63	20.64	20.75	20.76	20.70	23.65	23.71	23.68		
60	1	0		18.65	18.63	18.37	18.85	18.85	18.87	21.76	21.75	21.64		
60	1	161		18.43	18.54	18.53	18.70	18.65	15.57	21.58	21.61	20.31		
60	162	0		19.05	19.12	19.14	19.28	19.23	19.21	22.18	22.19	22.19		
60	1	1	16-QAM	20.08	20.15	20.18	20.45	20.52	20.63	23.28	23.35	23.42	24.85	0.3055
60	1	1	64-QAM	18.41	18.54	18.49	18.69	18.64	18.76	21.56	21.60	21.64		
60	1	1	256-QAM	15.85	15.83	15.88	16.02	16.13	16.17	18.95	18.99	19.04		
Limit	EIRP < 1W			Result									Pass	



Part27Q NR n77 Maximum Average Power [dBm], DG = 1.43 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 3			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
70	1	1	QPSK	20.75	20.47	20.79	20.85	20.75	20.75	23.81	23.62	23.78	25.24	0.3342
70	1	187		20.29	20.46	20.57	20.51	20.55	20.57	23.41	23.52	23.58		
70	95	47		20.46	20.48	20.52	20.49	20.56	20.58	23.49	23.53	23.56		
70	1	0		18.62	18.45	18.45	18.83	18.75	18.78	21.74	21.61	21.63		
70	1	188		18.24	18.26	18.52	18.32	18.42	18.54	21.29	21.35	21.54		
70	189	0		18.98	18.87	19.06	19.01	19.06	19.08	22.01	21.98	22.08		
70	1	1	16-QAM	20.08	20.02	20.02	20.34	20.35	20.43	23.22	23.20	23.24	24.67	0.2931
70	1	1	64-QAM	18.34	18.35	18.41	18.56	18.49	18.58	21.46	21.43	21.51		
70	1	1	256-QAM	15.65	15.65	15.74	15.97	15.98	16.05	18.82	18.83	18.91		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1.43 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 3			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
80	1	1	QPSK	20.45	20.38	20.69	20.78	20.66	20.57	23.63	23.53	23.64	25.07	0.3214
80	1	215		20.54	20.48	20.42	20.50	20.53	20.58	23.53	23.52	23.51		
80	109	54		20.34	20.38	20.39	20.48	20.41	20.51	23.42	23.41	23.46		
80	1	0		18.45	18.36	18.42	18.70	18.60	18.59	21.59	21.49	21.52		
80	1	216		18.25	18.25	18.35	18.48	18.42	18.54	21.38	21.35	21.46		
80	217	0		18.88	18.84	18.82	19.01	18.95	19.01	21.96	21.91	21.93		
80	1	1	16-QAM	20.01	20.02	19.92	20.23	20.09	20.19	23.13	23.07	23.07	24.56	0.2858
80	1	1	64-QAM	18.37	18.28	18.20	18.54	18.41	18.40	21.47	21.36	21.31		
80	1	1	256-QAM	15.69	15.63	15.63	15.94	15.80	15.82	18.83	18.73	18.74		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1.43 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 3			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
90	1	1	QPSK	20.65	20.54	20.42	20.60	20.72	20.68	23.64	23.64	23.56	25.07	0.3214
90	1	243		20.30	20.37	20.42	20.58	20.56	20.56	23.45	23.48	23.50		
90	123	61		20.27	20.28	20.38	20.36	20.42	20.65	23.33	23.36	23.53		
90	1	0		18.45	18.40	18.41	18.62	18.65	18.62	21.55	21.54	21.53		
90	1	244		18.29	18.34	18.30	18.51	18.51	18.57	21.41	21.44	21.45		
90	245	0		18.83	18.92	18.96	18.96	19.02	19.12	21.91	21.98	22.05		
90	1	1	16-QAM	20.08	19.90	19.96	20.31	20.24	20.30	23.21	23.08	23.14	24.64	0.2911
90	1	1	64-QAM	18.41	18.25	18.32	18.46	18.43	18.43	21.45	21.35	21.39		
90	1	1	256-QAM	15.69	15.65	15.64	15.92	15.85	15.86	18.82	18.76	18.76		
Limit	EIRP < 1W			Result									Pass	

Part27Q NR n77 Maximum Average Power [dBm], DG = 1.43 dBi														
BW	RB	RB	Mod	Antenna 0			Antenna 3			Combine			EIRP	EIRP
(MHz)	Size	Offset		Lowest	Middle	Highest	Lowest	Middle	Highest	Lowest	Middle	Highest	(dBm)	(W)
100	1	1	QPSK	-	20.95	-	-	21.18	-	-	24.08	-	25.56	0.3597
100	1	271		-	21.18	-	-	21.05	-	-	24.13	-		
100	137	68		-	20.81	-	-	20.95	-	-	23.89	-		
100	1	0		-	18.41	-	-	18.65	-	-	21.54	-		
100	1	272		-	18.48	-	-	18.65	-	-	21.58	-		
100	273	0		-	18.86	-	-	18.98	-	-	21.93	-		
100	1	1	16-QAM	-	19.99	-	-	20.35	-	-	23.18	-	24.61	0.2891
100	1	1	64-QAM	-	18.32	-	-	18.45	-	-	21.40	-		
100	1	1	256-QAM	-	15.68	-	-	15.92	-	-	18.81	-		
Limit	EIRP < 1W			Result									Pass	



Appendix B. Test Results of Radiated Test

MIMO <Ant. 0+3>

5G NR n77

5G NR n77 / 40MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	6904	-31.52	-13	-18.52	-59.86	-39.71	1.84	12.18	H
	10356	-37.42	-13	-24.42	-72	-43.89	2.26	10.89	H
	13809	-30.64	-13	-17.64	-73.36	-38.41	2.64	12.55	H
	20713	-59.15	-13	-46.15	-71.85	-71.69	3.22	17.91	H
	24165	-57.60	-13	-44.60	-74.4	-70.17	3.78	18.50	H
	27618	-56.02	-13	-43.02	-75.69	-69.47	3.95	19.55	H
	6904	-28.51	-13	-15.51	-57.34	-36.70	1.84	12.18	V
	10356	-37.83	-13	-24.83	-71.62	-44.30	2.26	10.89	V
	13809	-30.90	-13	-17.90	-72.6	-38.67	2.64	12.55	V
	20713	-58.06	-13	-45.06	-70.52	-70.60	3.22	17.91	V
	24165	-58.68	-13	-45.68	-75.12	-71.25	3.78	18.50	V
	27618	-55.16	-13	-42.16	-74.51	-68.61	3.95	19.55	V
Middle	6964	-29.54	-13	-16.54	-57.98	-37.49	1.84	11.94	H
	10446	-37.30	-13	-24.30	-71.99	-43.73	2.25	10.83	H
	13929	-30.90	-13	-17.90	-73.14	-38.55	2.66	12.46	H
	20893	-56.89	-13	-43.89	-69.6	-69.35	3.23	17.84	H
	24375	-56.91	-13	-43.91	-74.12	-69.62	3.76	18.63	H
	27858	-57.12	-13	-44.12	-76.65	-70.65	3.96	19.64	H
	6964	-26.88	-13	-13.88	-55.56	-34.83	1.84	11.94	V
	10446	-37.57	-13	-24.57	-71.62	-44.00	2.25	10.83	V
	13929	-31.92	-13	-18.92	-73.42	-39.57	2.66	12.46	V
	20893	-54.62	-13	-41.62	-67.06	-67.08	3.23	17.84	V
	24375	-57.79	-13	-44.79	-74.67	-70.50	3.76	18.63	V
	27858	-55.31	-13	-42.31	-74.47	-68.84	3.96	19.64	V



Highest	7024	-27.28	-13	-14.28	-55.84	-35.03	1.84	11.74	H
	10536	-37.37	-13	-24.37	-72.2	-43.75	2.25	10.78	H
	14049	-31.33	-13	-18.33	-73.28	-38.89	2.67	12.37	H
	21073	-54.92	-13	-41.92	-67.83	-67.40	3.26	17.89	H
	24585	-55.47	-13	-42.47	-72.94	-68.23	3.74	18.65	H
	28098	-54.69	-13	-41.69	-74.14	-68.21	3.97	19.64	H
	7024	-26.14	-13	-13.14	-54.82	-33.89	1.84	11.74	V
	10536	-38.01	-13	-25.01	-72.32	-44.39	2.25	10.78	V
	14049	-31.75	-13	-18.75	-73.24	-39.31	2.67	12.37	V
	21073	-53.78	-13	-40.78	-66.39	-66.26	3.26	17.89	V
	24585	-46.77	-13	-33.77	-63.93	-59.53	3.74	18.65	V
	28098	-56.19	-13	-43.19	-75.24	-69.71	3.97	19.64	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.