

Report No. : FR350924

FCC Test Report

Equipment

: Wireless module

Brand Name

: PEGATRON

Model No.

: UPWL6017SH2

FCC ID

: VUIUPWL6017SH2

Standard

: 47 CFR FCC Part 15.247

Operating Band

: 2400 MHz - 2483.5 MHz

Equipment Class

: DTS

Applicant Manufacturer

: PEGATRON CORPORATION

5F., NO. 76, LIGONG ST., BEITOU DISTRICT, TAIPEI CITY 112 Taiwan

The product sample received on May 09, 2013 and completely tested on Jun. 18, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Wayne\Hsu / Assistant Manager

Testing Laboratory 1190

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No.

: 1 of 63

Report Version

: Rev. 01



FCC Test Report

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Accessories and Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration	9
2.3	The Worst Case Power Setting Parameter	9
2.4	The Worst Case Measurement Configuration	10
2.5	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	6dB Bandwidth	15
3.3	RF Output Power	17
3.4	Power Spectral Density	21
3.5	Transmitter Radiated Bandedge Emissions	24
3.6	Transmitter Radiated Unwanted Emissions	33
4	TEST EQUIPMENT AND CALIBRATION DATA	62
APPE	ENDIX A. TEST PHOTOS	A1-A4

Report No.: FR350924



Summary of Test Result

Report No. : FR350924

		Conforr	mance Test Specifications		
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.152MHz 49.05 (Margin 16.82dB) - QP 36.50 (Margin 19.37dB) - AV	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth Unit [MHz] 20M: 17.62 / 40M: 35.59	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Conducted (Average) Output Power)	Power [dBm]: 26.39	Power [dBm]: 30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/30kHz]: 1.92	PSD [dBm/3kHz]: 8	Complied
3.5	15.247(d)	Emissions in non-restricted frequency bands	Out-of -band emissions are 30dB below the highest power	Non-Restricted Bands: > 30 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 2390.00MHz 73.50 (Margin 0.50dB) – PK 53.28 (Margin 0.72dB) - AV	Non-Restricted Bands: > 30 dBc Restricted Bands: FCC 15.209	Complied

SPORTON INTERNATIONAL INC. Page No. : 3 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



Revision History

Report No.: FR350924

Report No.	Version	Description	Issued Date
FR350924	Rev. 01	Initial issue of report	Jun. 19, 2013

SPORTON INTERNATIONAL INC. Page No. : 4 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



1 General Description

1.1 Information

1.1.1 RF General Information

	RF General Information								
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location			
2400-2483.5	b	2412-2462	1-11 [11]	1	23.08	N/A			
2400-2483.5	g	2412-2462	1-11 [11]	2	26.17	N/A			
2400-2483.5	n (HT-20)	2412-2462	1-11 [11]	2	26.39	N/A			
2400-2483.5	n (HT-40)	2422-2452	3-9 [7]	2	22.86	N/A			

Report No.: FR350924

- Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.
- Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

		Antenna Category					
	Equ	ipment placed on the market without antennas					
	Integral antenna (antenna permanently attached)						
		Temporary RF connector provided					
		No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.					
\boxtimes	Exte	ernal antenna (dedicated antennas)					
		Single power level with corresponding antenna(s).					
		Multiple power level and corresponding antenna(s).					
	\boxtimes	RF connector provided					
		☐ Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type)					
		Standard antenna connector. (e.g., SMA, N, BNC, and TNC type)					

	Antenna General Information							
No.	No. Ant. Cat. Ant. Type Connector Gain (dBi)							
1	Integral	PCB	UFL	2.58				
2	Integral	PCB	UFL	2.7				

SPORTON INTERNATIONAL INC. : 5 of 63
TEL: 886-3-327-3456 : Report Version : Rev. 01



FCC Test Report

1.1.3 Type of EUT

	Identify EUT				
EU	Γ Serial Number	N/A			
Pre	Presentation of Equipment ☐ Production; ☐ Pre-Production; ☐ Prototype				
		Туре	of EUT		
\boxtimes	Stand-alone				
	Combined (EUT where the	e radio part is fully integ	rated within another device)		
	Combined Equipment - B	rand Name / Model No.			
	Plug-in radio (EUT intend	ed for a variety of host	systems)		
	Host System - Brand Nar	ne / Model No.:			
	Other:				
1.1.	4 Test Signal Duty	Cycle			
		Operated Mode fo	r Worst Duty Cycle		
	Operated normally mode	for worst duty cycle			
\boxtimes	Operated test mode for v	orst duty cycle			
	Test Signal Duty Cycle (x) Power Duty Factor [dB] – (10 log 1/x)				
\boxtimes	☑ 100.00% - IEEE 802.11b 0				
\boxtimes	☑ 99.31% - IEEE 802.11g 0.03				
\boxtimes	99.25% - IEEE 802.11n (HT-20)	0.03		
\boxtimes	98.19% - IEEE 802.11n (HT-40)	0.08		

Report No.: FR350924

1.1.5 EUT Operational Condition

Supply Voltage	☐ AC mains	⊠ DC	
Type of DC Source	☐ Internal DC supply	☐ External DC adapter	

SPORTON INTERNATIONAL INC. Page No. : 6 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR350924

1.2 Support Equipment

	Support Equipment							
No.	No. Equipment Brand Name Model Name Serial No.							
1	Notebook	DELL	E6430	DoC				
2	Power Supply							

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC KDB 558074
- FCC KDB 662911
- FCC KDB 412172

1.4 Testing Location Information

	Testing Location						
\boxtimes	Sporton ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.						
		TEL	: :	886-3-327-34	56 FAX : 8	386-3-327-0973	
\boxtimes	ICC Lab	ADD	-	No.3-1, Lane Taiwan (R.O.0		Kwei Shan Hsiang, T	ao Yuan Hsein 333,
		TEL	:	886-3-327-34	56 FAX : 8	386-3-327-0973	
T	est Condition	n	Tes	st Site No.	Test Engineer	Test Environment	Test Date
F	RF Conducte	d	Т	H01-HY	lan Du	21°C / 62%	Jun. 17 ~ Jun. 18, 2013
Α	C Conductio	n	C	O01-WS*	Peter Lin	23°C / 67%	Jun. 18, 2013
Rad	Radiated Emission 03CH01-WS* Haru Yang 22-25°C / 64-67% Jun. 11 ~ Jun. 13, 2013						
	Test site registered number [657002] with FCC. Test site registered number [10807A-1] with IC.						

Note: * Sporton Lab subcontracts this test item to ICC lab (TAF:2732). ICC lab is a TAF accreditation test firm and also is an approved provider of Sporton Lab.

SPORTON INTERNATIONAL INC. Page No. : 7 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Report No.: FR350924

Measurement Uncertainty					
Test Item		Uncertainty	Limit		
AC power-line conducted emissions		±2.80 dB	N/A		
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A		
RF output power, conducted		±0.63 dB	N/A		
Power density, conducted		±0.81 dB	N/A		
All emissions, radiated	30 – 1000 MHz	±3.9 dB	N/A		
	Above 1GHz	±4.2 dB	N/A		
Temperature		±0.8 °C	N/A		
Humidity		±3 %	N/A		
DC and low frequency voltages	±3 %	N/A			
Time		±1.42 %	N/A		
Duty Cycle		±1.42 %	N/A		

SPORTON INTERNATIONAL INC. Page No. : 8 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing							
Modulation Mode	Transmit Chains (N _{TX})	Worst Data Rate / MCS	RF Output Power (dBm)				
11b,1-11Mbps	1	1-11 Mbps	1 Mbps	23.08			
11g,6-54Mbps	2	6-54 Mbps	6 Mbps	26.17			
HT20,M0-15	2	MCS 0-15	MCS 0	26.39			
HT40,M0-15	2	MCS 0-15	MCS 0	22.86			

Report No.: FR350924

2.2 Test Channel Frequencies Configuration

Test Channel Freque	encies Configuration
IEEE Std. 802.11	Test Channel Frequencies (MHz)
b, g, n (HT-20)	2412-(F1), 2437-(F2), 2462-(F3)
n (HT-40)	2422-(F4), 2437-(F5), 2452-(F6)

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (2400-2483.5MHz band)							
Test Software	Mtoo	d.					
Test Software Version	2.0.0	0.8					
				Test Frequ	ency (MHz)		
Modulation Mode	N _{TX}	NCB: 20MHz			NCB: 40MHz		
		2412	2437	2462	2422	2437	2452
11b,1-11Mbps	1	17	15	17	-	-	-
11g,6-54Mbps	2	12	23	12	-	-	-
HT20,M0-15	2	11/13	22/24	11/13	-	-	-
HT40,M0-15	2	-	-	-	0D/0F	14/16	0F/11

SPORTON INTERNATIONAL INC. : 9 of 63
TEL: 886-3-327-3456 : Report Version : Rev. 01

The Worst Case Measurement Configuration 2.4

The Worst Case Mode for Following Conformance Tests					
Tests Item AC power-line conducted emissions					
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz				
Operating Mode	Operating Mode Description				
1	Radio link (WLAN)				

Report No.: FR350924

The Worst Case Mode for Following Conformance Tests					
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth				
Test Condition	Conducted measurement at transmit chains				
Modulation Mode	11b, 11g, HT-20, HT-40				

Th	The Worst Case Mode for Following Conformance Tests						
Tests Item	Transcrittor readiated entre	ransmitter Radiated Unwanted Emissions ransmitter Radiated Bandedge Emissions					
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.						
	⊠ EUT will be placed in □ □	fixed position.					
User Position	EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is Y.						
	EUT will be operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Y.						
Operating Mode							
Modulation Mode	11b, 11g, HT-20, HT-40						
	X Plane	Y Plane	Z Plane				
Orthogonal Planes of EUT							


NOTE:

- Antenna 2 with highest gain (2.7dBi) was chosen for final test.
 Antenna has been evaluated at X, Y and Z axis and found the worst case was Y Axis and was selected for final test.

SPORTON INTERNATIONAL INC. Page No. : 10 of 63 Report Version TEL: 886-3-327-3456 : Rev. 01



2.5 Test Setup Diagram

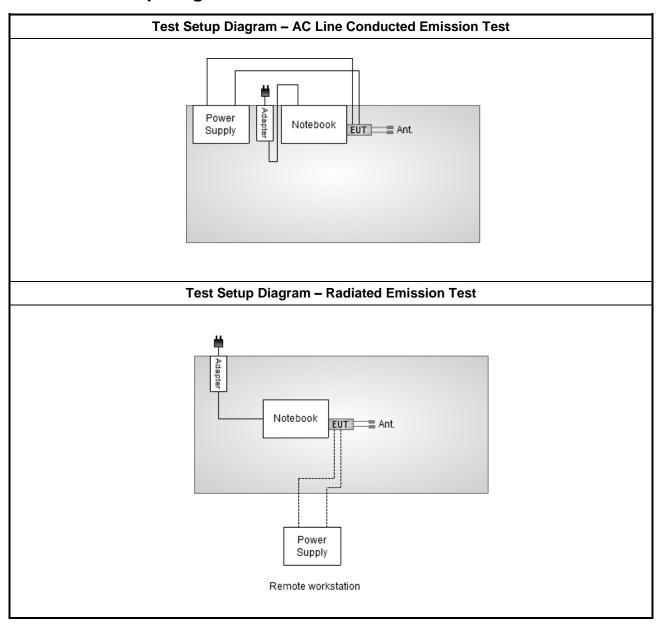

Report No.: FR350924

SPORTON INTERNATIONAL INC. Page No. : 11 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Pow	er-line Conducted Emissions L	imit
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Report No.: FR350924


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

	Test Method
\boxtimes	Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.


3.1.4 Test Setup

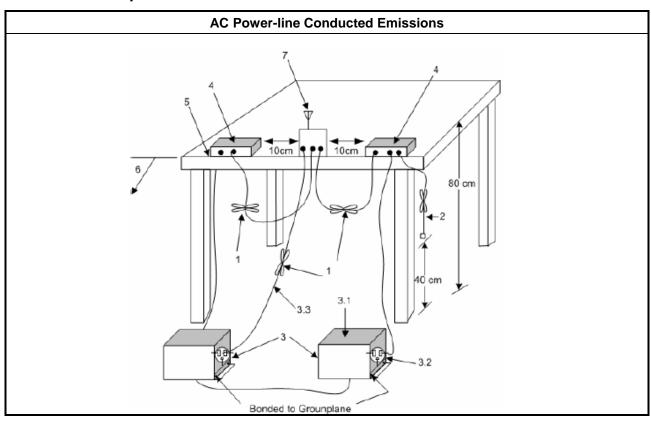

SPORTON INTERNATIONAL INC. Page No. : 12 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report Report No.: FR350924

3.1.5 Test Result of AC Power-line Conducted Emissions

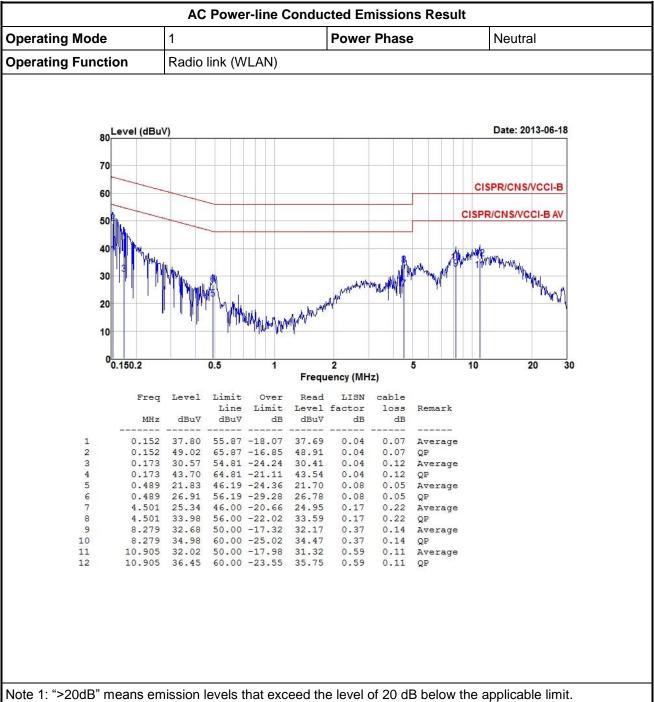

Note 1. -2-2000 Theaths emission levels that exceed the level of 20 0D below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 13 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report

Report No.: FR350924

AC Power-line Conducted Emissions Result Operating Mode 1 **Power Phase** Line **Operating Function** Radio link (WLAN) 80 Level (dBuV) Date: 2013-06-18 70 CISPR/CNS/VCCI-B 60 CISPR/CNS/VCCI-B AV 50 40 30 20 10 0.150.2 0.5 10 20 30 Frequency (MHz) LISN Freq Level Limit Read cable Over Limit Level factor Line loss Remark MHz dBuV dBuV dB dBuV dB dB 55.87 -19.37 0.152 36.50 36.38 0.05 0.07 Average 49.05 65.87 -16.82 48.93 0.05 0.07 0.152 QP 0.176 18.51 54.68 -36.17 18.33 0.05 0.13 Average 0.176 42.97 64.68 -21.71 0.05 QP 0.499 20.81 46.01 -25.20 20.68 0.08 0.05 Average 0.499 27.36 56.01 -28.65 27.23 0.08 0.05 4.525 20.61 46.00 -25.39 20.20 0.19 0.22 Average 4.525 32.70 56.00 -23.30 32.29 0.19 0.22 QP 9 8.279 30.71 50.00 -19.29 30.18 0.39 0.14 Average 36.04 60.00 -23.96 10 8.279 35.51 0.39 0.14 QP 10.905 32.49 50.00 -17.51 31.77 10.905 37.46 60.00 -22.54 36.74 11 0.61 0.11 Average 12 0.61 0.11 QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 14 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR350924

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit				
Systems using digital modulation techniques:				
6 dB bandwidth ≥ 500 kHz.				


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

			Test Method
\boxtimes	For	the e	emission bandwidth shall be measured using one of the options below:
	\boxtimes	Ref	er as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
		Ref	er as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
		Ref	er as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
\boxtimes	For	cond	lucted measurement.
	\boxtimes	The	EUT supports single transmit chain and measurements performed on this transmit chain.
		The	EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
	\boxtimes	The	EUT supports multiple transmit chains using options given below:
			Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
		\boxtimes	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

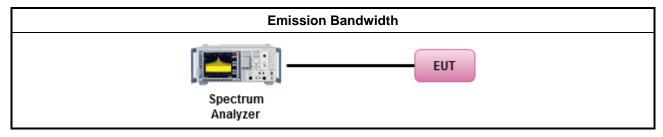


SPORTON INTERNATIONAL INC. Page No. : 15 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



3.2.5 Test Result of Emission Bandwidth

			Em	ission Ba	andwidth	Result				
Condi	Emission Bandwidth (MHz)									
Modulation		Freq. (MHz)	99% Bandwidth				6dB Bandwidth			
Mode Mode	N _{TX}		Chain- Port 1	Chain- Port 2	-	-	Chain- Port 1	Chain- Port 2	-	-
11b	1	2412	10.13	-	-	-	8.12	-	-	-
11b	1	2437	10.13	-	-	-	8.06	-	-	-
11b	1	2462	10.13	-	-	-	8.06	-	-	-
11g	2	2412	17.02	16.90	-	-	16.35	16.35	-	-
11g	2	2437	17.19	17.02	-	-	16.29	16.35	-	-
11g	2	2462	16.96	16.79	-	-	16.35	16.35	-	-
HT-20	2	2412	17.89	17.83	-	-	17.57	17.62	-	-
HT-20	2	2437	18.12	17.95	-	-	17.57	17.62	-	-
HT-20	2	2462	17.95	17.83	-	-	17.57	17.62	-	-
HT-40	2	2422	36.58	36.47	-	-	35.13	35.59	-	-
HT-40	2	2437	36.58	36.35	-	-	35.36	35.59	-	-
HT-40	2	2452	36.47	36.58	-	-	35.13	35.36	-	-
Lim	Limit			N/A ≥500 kHz						
Resu	ılt			Complied						
Note 1: N _{TX} = Nur	nber c	of Transm	it Chains							

Report No.: FR350924

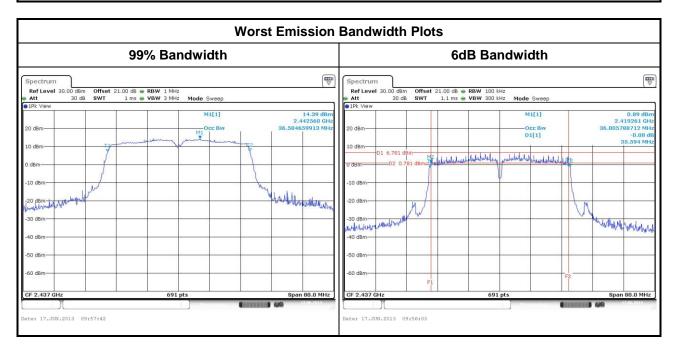

SPORTON INTERNATIONAL INC. Page No. : 16 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

3.3 RF Output Power

3.3.1 RF Output Power Limit

	RF Output Power Limit					
Мах	Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit					
\boxtimes	240	0-2483.5 MHz Band:				
	\boxtimes	If $G_{TX} \le 6$ dBi, then $P_{Out} \le 30$ dBm (1 W)				
	\boxtimes	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm				
		Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm				
		Smart antenna system (SAS):				
		☐ Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm				
		Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm				
		\square Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm				
e.i.r	.p. P	ower Limit:				
\boxtimes	240	0-2483.5 MHz Band				
		Point-to-multipoint systems (P2M): P _{eirp} ≤ 36 dBm (4 W)				
		Point-to-point systems (P2P): $P_{eirp} \le MAX(36, [P_{Out} + G_{TX}]) dBm$				
		Smart antenna system (SAS)				
		☐ Single beam: $P_{eirp} \le MAX(36, P_{Out} + G_{TX}) dBm$				
		☐ Overlap beam: $P_{eirp} \le MAX(36, P_{Out} + G_{TX}) dBm$				
	☐ Aggregate power on all beams: P _{eirp} ≤ MAX(36, [P _{Out} + G _{TX} + 8]) dBm					
G_{TX}	= the	aximum peak conducted output power or maximum conducted output power in dBm, e maximum transmitting antenna directional gain in dBi. i.r.p. Power in dBm.				

Report No.: FR350924

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


SPORTON INTERNATIONAL INC. Page No. : 17 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

3.3.3 Test Procedures

		Test Method					
	Max	imum Peak Conducted Output Power					
		Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).					
		Refer as FCC KDB 558074, clause 9.1.2 Option 2 (integrated band power method).					
		Refer as FCC KDB 558074, clause 9.1.3 Option 2 (peak power meter for VBW ≥ DTS BW)					
\boxtimes	Max	imum Conducted (Average) Output Power					
		Refer as FCC KDB 558074, clause 9.2.1.2 Method AVGSA-1 (spectral trace averaging).					
		Refer as FCC KDB 558074, clause 9.2.1.3 Method AVGSA-1 Alt. (slow sweep speed)					
		Refer as FCC KDB 558074, clause 9.2.1.4 Method AVGSA-2 (spectral trace averaging).					
		Refer as FCC KDB 558074, clause 9.2.1.5 Method AVGSA-2 Alt. (slow sweep speed)					
	RF power meter and average over on/off periods with duty factor or gated trigger						
	\boxtimes	Refer as FCC KDB 558074, clause 9.2.2 Method AVGPM-G (using a gated RF average power meter)					
\boxtimes	For	conducted measurement.					
	\boxtimes	The EUT supports single transmit chain and measurements performed on this transmit chain.					
		The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.					
		The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.					
		If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$					

Report No.: FR350924

3.3.4 Test Setup

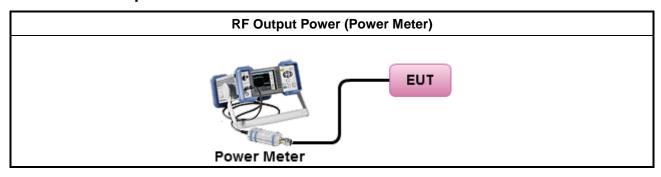

SPORTON INTERNATIONAL INC. Page No. : 18 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report

3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result								
Transmit Chains No.	Transmit Chains No.			-	-			
Maximum G _{ANT} (dBi)	Maximum G _{ANT} (dBi)			-	-			
Modulation Mode	DG (dBi)	N _{TX}	N _{ss}	STBC	Array Gain (dB)			
11b,1-11Mbps	2.7	1	1	-	-			
11g,6-54Mbps	2.7	2	1	-	-			
HT-20,M0-M15	2.7	2	1	-	-			
HT-40,M0-M15	2.7	2	1	-	-			

Report No.: FR350924

- Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain = G_{ANT} + 10 log(N_{TX}) All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}
- All transmit signals are completely uncorrelated, Directional Gain = G_{ANT} Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:

 Any transmit signals are correlated, Directional Gain = $10 \log[(10^{G1/20} + ... + 10^{GN/20})^2 / N_{TX}]$ All transmit signals are completely uncorrelated, Directional Gain = $10 \log[(10^{G1/10} + ... + 10^{GN/10})^2 / N_{TX}]$
- Note 3: For Spatial Multiplexing, Directional Gain (DG) = G_{ANT} + 10 log(N_{TX}/N_{SS}), where Nss = the number of independent spatial streams data.
- Note 4: For CDD transmissions, directional gain is calculated as power measurements: Directional Gain (DG) = G_{ANT} + Array Gain, where Array Gain is as follows: Array Gain = 0 dB (i.e., no array gain) for $N_{TX} \le 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX};

SPORTON INTERNATIONAL INC. Page No. : 19 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

3.3.6 Test Result of Maximum Average Conducted Output Power

Maximum Average Conducted Output Power Result																
Condi		RF Output Power (dBm)														
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit					
11b	1	2412	21.64	-	-	-	21.64	30.00	2.7	24.34	36.00					
11b	1	2437	23.08	-	-	-	23.08	30.00	2.7	25.78	36.00					
11b	1	2462	22.39	-	-	-	22.39	30.00	2.7	25.09	36.00					
11g	2	2412	18.96	19.04	-	-	22.01	30.00	2.7	24.71	36.00					
11g	2	2437	23.26	23.05	-	-	26.17	30.00	2.7	28.87	36.00					
11g	2	2462	18.15	18.17	-	-	21.17	30.00	2.7	23.87	36.00					
HT-20	2	2412	19.03	19.23	-	-	22.14	30.00	2.7	24.84	36.00					
HT-20	2	2437	23.34	23.41	-	-	26.39	30.00	2.7	29.09	36.00					
HT-20	2	2462	18.25	18.39	-	-	21.33	30.00	2.7	24.03	36.00					
HT-40	2	2422	17.43	17.96	-	-	20.71	30.00	2.7	23.41	36.00					
HT-40	2	2437	19.67	20.03	-	-	22.86	30.00	2.7	25.56	36.00					
HT-40	2	2452	17.06	17.64	-	-	20.37	30.00	2.7	23.07	36.00					
Res	Result			•	•	(Complie	d	•	•	Complied					

Report No. : FR350924

SPORTON INTERNATIONAL INC. Page No. : 20 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report No.: FR350924

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

	Power Spectral Density Limit
\boxtimes	Power Spectral Density (PSD) ≤ 8 dBm/3kHz

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.4.3 Test Procedures

		Test Method							
	Power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the power spectral density. In addition, the use of a peak PSI procedure will always result in a "worst-case" measured level for comparison to the limit. Therefore whenever the DTS bandwidth exceeds 500 kHz, it is acceptable to utilize the peak PSD procedure to demonstrate compliance to the PSD limit, regardless of how the fundamental output power was measured. For the power spectral density shall be measured using below options:								
		Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3kHz; detector=peak)							
	\boxtimes	Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging).							
		Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed)							
		Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-2 (spectral trace averaging).							
		Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)							
\boxtimes	For conducted measurement.								
	☐ The EUT supports single transmit chain and measurements performed on this transmit chain.								
	☐ The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst cas								
	\boxtimes	The EUT supports multiple transmit chains using options given below:							
		Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.							
		Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.							

SPORTON INTERNATIONAL INC. Page No. : 21 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report Report No.: FR350924

3.4.4 Test Setup




SPORTON INTERNATIONAL INC. Page No. : 22 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01




3.4.5 Test Result of Power Spectral Density

Cond	ition		Power Spectral Density (dBm/30kHz)				
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	Power Limit			
11b	1	2412	-0.30	8			
11b	1	2437	1.92	8			
11b	1	2462	0.92	8			
11g	2	2412	-3.03	8			
11g	2	2437	1.74	8			
11g	2	2462	-3.30	8			
HT-20	2	2412	-2.33	8			
HT-20	2	2437	1.82	8			
HT-20	2	2462	-3.76	8			
HT-40	2	2422	-6.43	8			
HT-40	2	2437	-4.38	8			
HT-40	2	2452	-7.15	8			
Res	ult		Com	nplied			

Report No.: FR350924



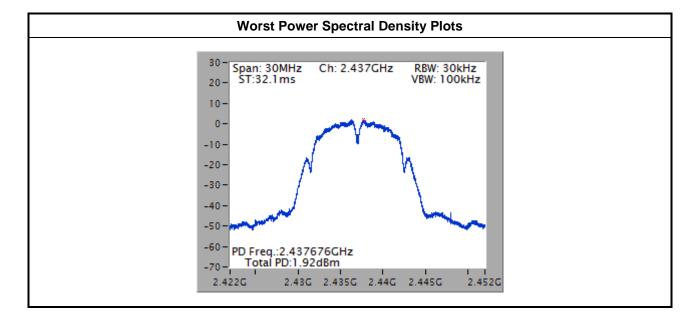

SPORTON INTERNATIONAL INC. Page No. : 23 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



3.5 Emissions in non-restricted frequency bands

3.5.1 Emissions in non-restricted frequency bands limit

Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

		Test Method							
\boxtimes	The	The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].							
		Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.							
\boxtimes	For	the transmitter unwanted emissions shall be measured using following options below:							
	\boxtimes	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands							
		Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.							
		Refer as FCC KDB 558074, clause 12.2.4.1 Option 1 (trace averaging for duty cycle ≥98%)							
	Refer as FCC KDB 558074, clause 12.2.4.2 Option 2 (trace averaging + duty factor).								
		Refer as FCC KDB 558074, clause 12.2.4.3 Option 3 (Reduced VBW≥1/T).							
		Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.							
		Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.							
		Refer as FCC KDB 558074, clause 12.2.3 measurement procedure peak limit.							
	For	the transmitter bandedge emissions shall be measured using following options below:							
		Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth using the band power and summing the spectral levels (i.e., 100 kHz or 1 MHz).							
		Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.							
		Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.							
	For	radiated measurement, refer as FCC KDB 558074, clause 12.2.6							
\boxtimes	For	conducted measurement, refer as FCC KDB 558074, clause 12.2							

3.5.4 Test Setup

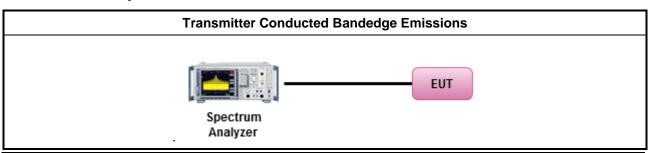

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 24 of 63

Report No.: FR350924


Report Version : Rev. 01



3.5.5 Test Result of Emissions in non-restricted frequency bands

This test item is performed on each TX output individually without summing or adding $10 \log(N_{ANT})$ since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.

Report No.: FR350924

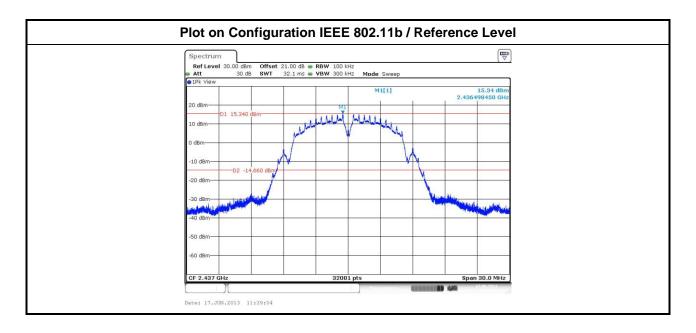

SPORTON INTERNATIONAL INC. Page No. : 25 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

Plot on Configuration IEEE802.11b / CH 1 / 30MHz~26.5GHz (down 30dBc) Ref Level 30.00 Ref Level 30.00 M1[1] -36.48 dBr 2.3998150 GH -28.41 dBr 16.522690 GH 01 15.34 nte: 17.JUN.2013 11:40:36 Plot on Configuration IEEE802.11b / CH 6 / 30MHz~26.5GHz (down 30dBc) Offset 21.00 dB • RBW 100 kHz SWT 32.1 ms • VBW 300 kHz Ref Level 30.00 dBm Ref Level 30.00 dBm -37.62 dBr 2.1123130 GH -28.95 dBr 18.192130 GH 01 15.34 D1 15.34 Plot on Configuration IEEE802.11b / CH 11 / 30MHz~26.5GHz (down 30dBc) Offset 21.00 dB • RBW 100 kHz SWT 32.1 ms • VBW 300 kHz Mode Swee Offset 21.00 dB • RBW 100 kHz SWT 240 ms • VBW 300 kHz Ref Level 30.00 dBm Ref Level 30.00 dBm SWT 01 15.34 D1 15,340


Page No.

Report Version


: 26 of 63

: Rev. 01

Report No.: FR350924

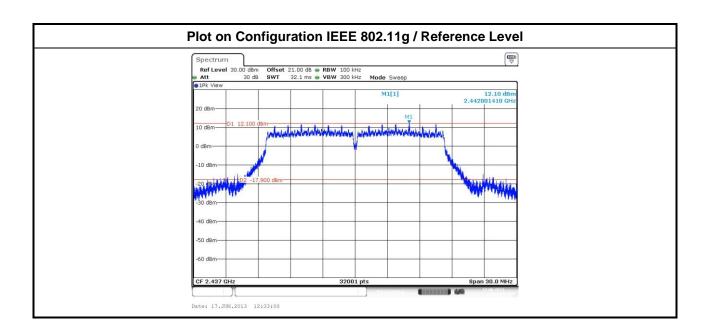


Report No.: FR350924

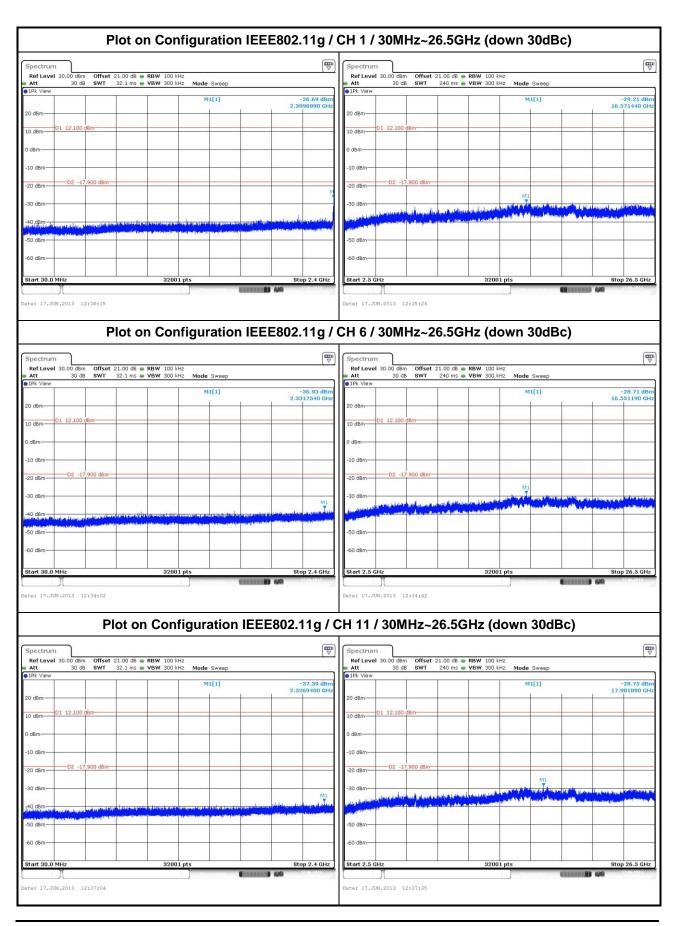


TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 28 of 63 Report Version : Rev. 01

Report No.: FR350924

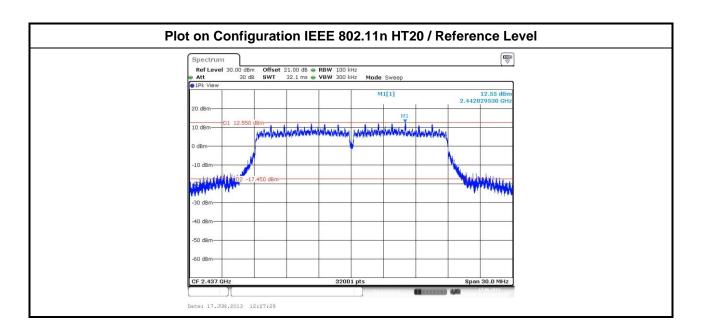

Report No.: FR350924

SPORTON INTERNATIONAL INC. 29 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

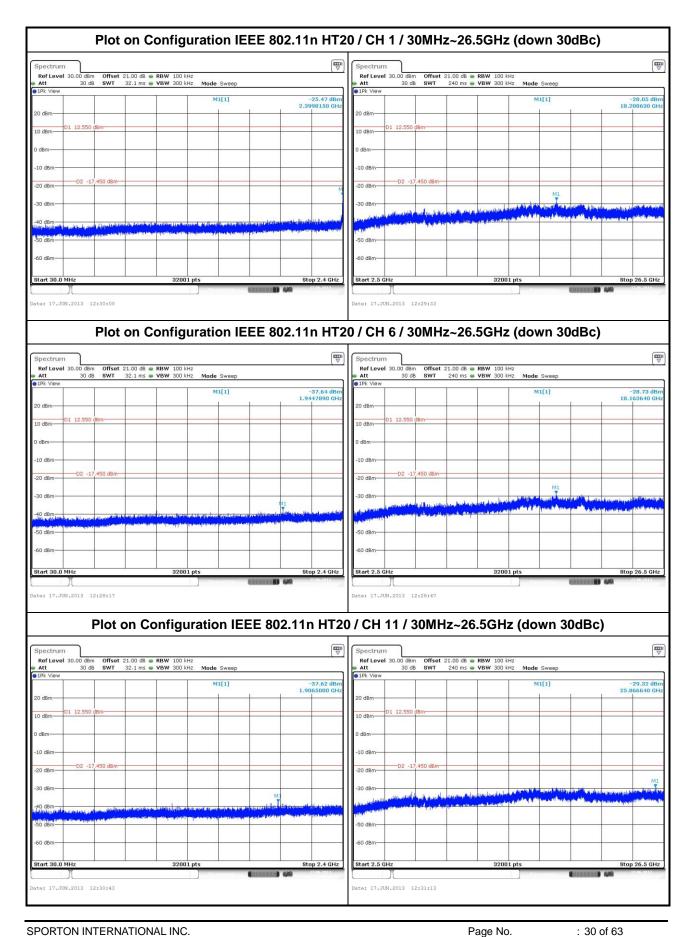


Report Version

: Rev. 01


Report No.: FR350924

FCC Test Report No.: FR350924

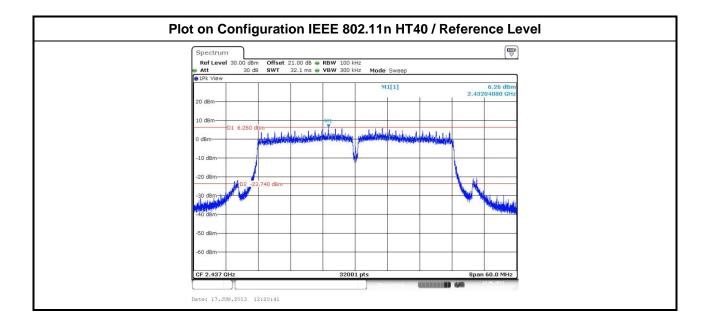

FAX: 886-3-327-0973

Page No. : 31 of 63
Report Version : Rev. 01

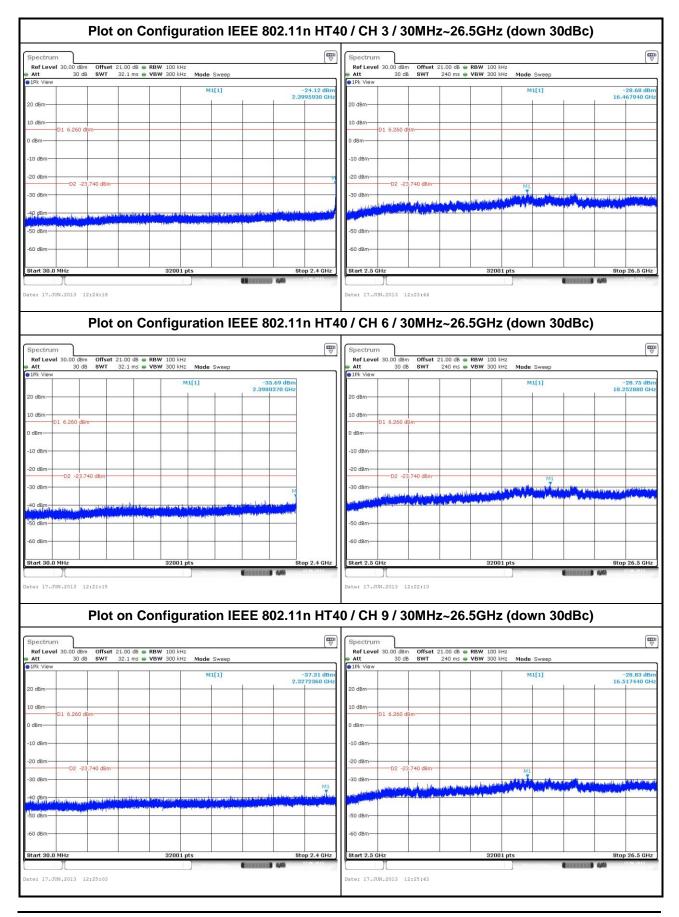

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 32 of 63
Report Version : Rev. 01

Report No.: FR350924



3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit							
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)				
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300				
0.490~1.705	24000/F(kHz)	33.8 - 23	30				
1.705~30.0	30	29	30				
30~88	100	40	3				
88~216	150	43.5	3				
216~960	200	46	3				
Above 960	500	54	3				

Report No.: FR350924

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit							
RF output power procedure	Limit (dB)						
Peak output power procedure	20						
Average output power procedure	30						

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

SPORTON INTERNATIONAL INC. Page No. : 33 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report No.: FR350924


3.6.3 Test Procedures

	Test Method								
perfo equi extra dista	easurements may be performed at a distance other than the limit distance provided they are not rformed in the near field and the emissions to be measured can be detected by the measurement uipment. When performing measurements at a distance other than that specified, the results shall be trappolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear tance for field-strength measurements, inverse of linear distance-squared for power-density easurements).								
	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.								
	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.								
The	average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].								
For t	the transmitter unwanted emissions shall be measured using following options below:								
\boxtimes	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.								
\boxtimes	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.								
	Refer as FCC KDB 558074, clause 12.2.4.1 Option 1 (trace averaging for duty cycle ≥98%)								
	Refer as FCC KDB 558074, clause 12.2.4.2 Option 2 (trace averaging + duty factor).								
	Refer as FCC KDB 558074, clause 12.2.4.3 Option 3 (Reduced VBW≥1/T).								
	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.								
	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.								
	Refer as FCC KDB 558074, 12.2.3 measurement procedure peak limit.								
	Refer as FCC KDB 558074, clause 12.2.2 measurement procedure Quasi-Peak limit.								
For	radiated measurement, refer as FCC KDB 558074, clause 12.2.6.								
\boxtimes	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.								
\boxtimes	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.								
\boxtimes	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.								
For	conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.								
	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.								
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB								

SPORTON INTERNATIONAL INC. Page No. : 34 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR350924

3.6.4 Test Setup

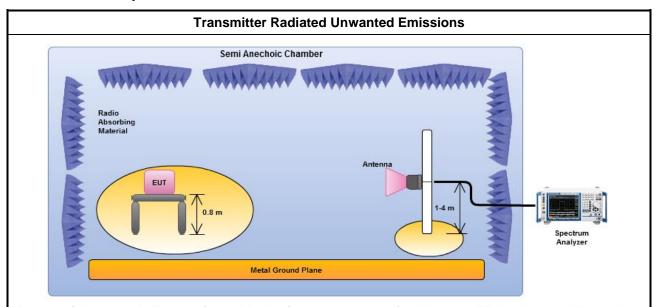

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.


3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

SPORTON INTERNATIONAL INC. Page No. : 35 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report Report No.: FR350924

3.6.6 Radiated Emissions (Below 1GHz)

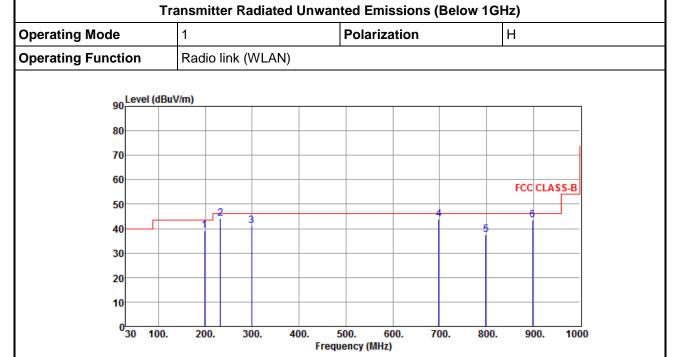

	Freq. MHz	Emission level dBuV/m		Ū	SA reading dBuV		Remark	ANT High cm	Turn Table deg
1	198.78	39.09	43.50	-4.41	58.32	-19.23	Peak		
2	231.76	44.32	46.00	-1.68	63.04	-18.72	QP		
3	298.69	41.16	46.00	-4.84	57.42	-16.26	Peak		
4	698.33	43.89	46.00	-2.11	52.16	-8.27	QP		
5	798.27	37.40	46.00	-8.60	44.17	-6.77	QP		
6	898.15	43.63	46.00	-2.37	49.17	-5.54	Peak		


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

SPORTON INTERNATIONAL INC. Page No. : 36 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR350924

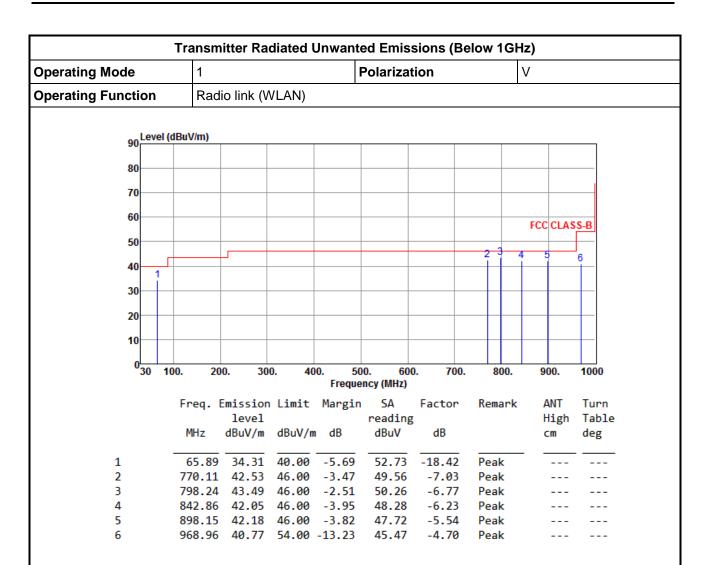

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

SPORTON INTERNATIONAL INC. Page No. : 37 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

Transmitter Radiated Unwanted Emissions (Above 1GHz)										
Modulation Mode 11b Test Freq. (MHz) 2412										
N _{TX}	N _{TX} 1 Polarization H									

Report No.: FR350924

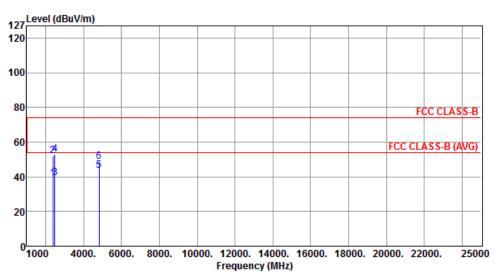

	Freq.	Emission level	Limit	Margin	SA reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	39.03	54.00	-14.97	42.25	-3.22	Average		
2	2390.00	52.22	74.00	-21.78	55.44	-3.22	Peak		
3	2489.20	39.55	54.00	-14.45	42.36	-2.81	Average		
4	2489.20	52.76	74.00	-21.24	55.57	-2.81	Peak		
5	4824.00	43.77	54.00	-10.23	39.46	4.31	Average		
6	4824.00	48.94	74.00	-25.06	44.63	4.31	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 38 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



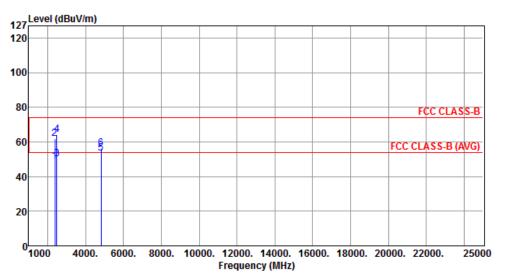

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	48.92	54.00	-5.08	52.14	-3.22	Average		
2	2390.00	61.66	74.00	-12.34	64.88	-3.22	Peak		
3	2489.20	49.92	54.00	-4.08	52.73	-2.81	Average		
4	2489.20	64.20	74.00	-9.80	67.01	-2.81	Peak		
5	4824.00	53.37	54.00	-0.63	49.06	4.31	Average		
6	4824.00	56.28	74.00	-17.72	51.97	4.31	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

Page No. SPORTON INTERNATIONAL INC. : 39 of 63 TEL: 886-3-327-3456 Report Version : Rev. 01

eport Report No. : FR350924



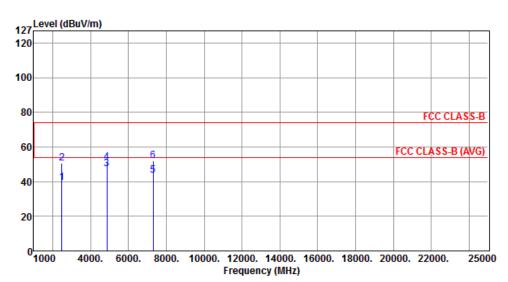

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	J	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.34	54.00	-14.66	42.17	-2.83	Average		
2	2483.50	50.72	74.00	-23.28	53.55	-2.83	Peak		
3	4874.00	47.43	54.00	-6.57	43.04	4.39	Average		
4	4874.00	51.25	74.00	-22.75	46.86	4.39	Peak		
5	7311.00	43.72	54.00	-10.28	34.80	8.92	Average		
6	7311.00	52.04	74.00	-21.96	43.12	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 40 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)							
Modulation Mode11bTest Freq. (MHz)2437							
N _{TX}	V						

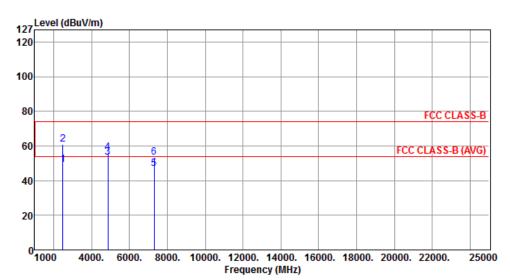

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	49.26	54.00	-4.74	52.09	-2.83	Average		
2	2483.50		74.00		63.59	-2.83	Peak		
3	4874.00	53.45	54.00	-0.55	49.06	4.39	Average		
4	4874.00	56.33	74.00	-17.67	51.94	4.39	Peak		
5	7311.00	46.71	54.00	-7.29	37.79	8.92	Average		
6	7311.00	53.57	74.00	-20.43	44.65	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 41 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode 11b Test Freq. (MHz) 2462									
N _{TX} 1 Polarization H									

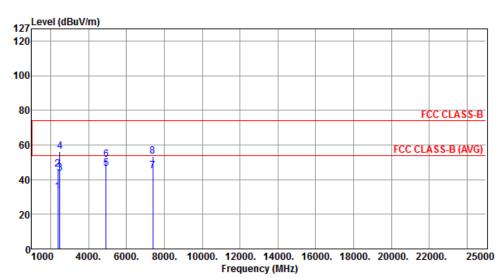

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	32.97	54.00	-21.03	36.19	-3.22	Average		
2	2390.00	45.77	74.00	-28.23	48.99	-3.22	Peak		
3	2483.50	43.46	54.00	-10.54	46.29	-2.83	Average		
4	2483.50	56.11	74.00	-17.89	58.94	-2.83	Peak		
5	4924.00	46.51	54.00	-7.49	42.03	4.48	Average		
6	4924.00	51.42	74.00	-22.58	46.94	4.48	Peak		
7	7386.00	44.76	54.00	-9.24	35.78	8.98	Average		
8	7386.00	53.28	74.00	-20.72	44.30	8.98	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 42 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



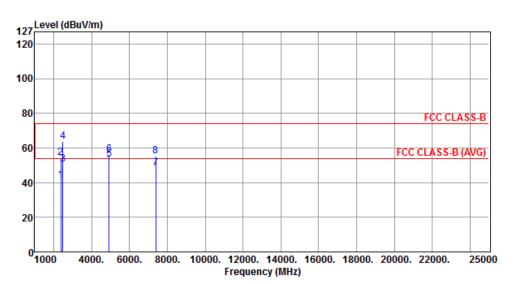

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	41.13	54.00	-12.87	44.35	-3.22	Average		
2	2390.00	54.38	74.00	-19.62	57.60	-3.22	Peak		
3	2483.50	50.55	54.00	-3.45	53.38	-2.83	Average		
4	2483.50	63.86	74.00	-10.14	66.69	-2.83	Peak		
5	4924.00	53.46	54.00	-0.54	48.98	4.48	Average		
6	4924.00	56.33	74.00	-17.67	51.85	4.48	Peak		
7	7386.00	48.08	54.00	-5.92	39.10	8.98	Average		
8	7386.00	55.45	74.00	-18.55	46.47	8.98	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 43 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode 11g Test Freq. (MHz) 2412								
N _{TX} 2 Polarization H								

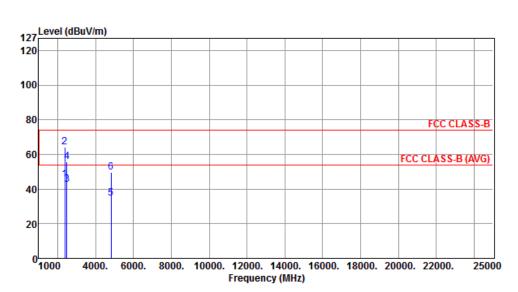

	Freq.	Emission level	Limit	Margin	SA reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	45.64	54.00	-8.36	48.86	-3.22	Average		
2	2390.00	64.25	74.00	-9.75	67.47	-3.22	Peak		
3	2486.80	42.68	54.00	-11.32	45.50	-2.82	Average		
4	2486.80	55.98	74.00	-18.02	58.80	-2.82	Peak		
5	4824.00	34.49	54.00	-19.51	30.18	4.31	Average		
6	4824.00	49.77	74.00	-24.23	45.46	4.31	Peak		

SPORTON INTERNATIONAL INC. Page No. : 44 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

eport Report No. : FR350924



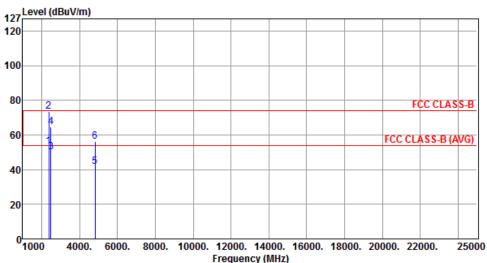

Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level			reading			High	Table
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg

1	2390.00	53.28	54.00	-0.72	56.50	-3.22	Average	
2	2390.00	73.50	74.00	-0.50	76.72	-3.22	Peak	
3	2486.80	50.31	54.00	-3.69	53.13	-2.82	Average	
4	2486.80	64.56	74.00	-9.44	67.38	-2.82	Peak	
5	4824.00	41.70	54.00	-12.30	37.39	4.31	Average	
6	4824.00	56.12	74.00	-17.88	51.81	4.31	Peak	

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 45 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



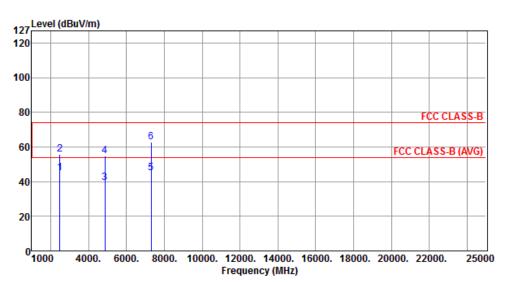

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ü	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	45.02	54.00	-8.98	47.85	-2.83	Average		
2	2483.50	55.72	74.00	-18.28	58.55	-2.83	Peak		
3	4874.00	39.57	54.00	-14.43	35.18	4.39	Average		
4	4874.00	54.66	74.00	-19.34	50.27	4.39	Peak		
5	7311.00	44.93	54.00	-9.07	36.01	8.92	Average		
6	7311.00	62.67	74.00	-11.33	53.75	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 46 of 63 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	Modulation Mode 11g Test Freq. (MHz) 2437								
N _{TX} 2 Polarization V									

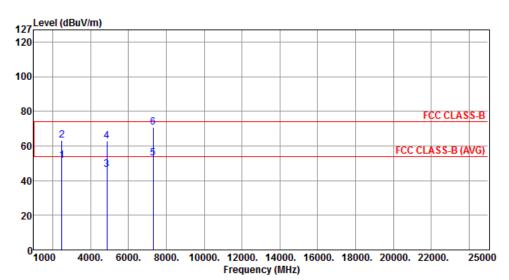

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	51.72	54.00	-2.28	54.55	-2.83	Average		
2		63.18			66.01	-2.83	Peak		
3	4874.00	46.56	54.00	-7.44	42.17	4.39	Average		
4	4874.00	62.98	74.00	-11.02	58.59	4.39	Peak		
5	7311.00	52.87	54.00	-1.13	43.95	8.92	Average		
6	7311.00	70.80	74.00	-3.20	61.88	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 47 of 63 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11g	Test Freq. (MHz)	2462						
N _{TX} 2 Polarization H									

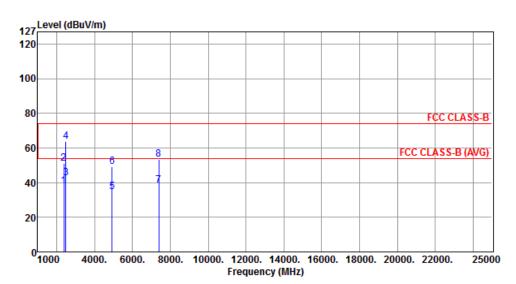

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	38.02	54.00	-15.98	41.24	-3.22	Average		
2	2390.00	51.16	74.00	-22.84	54.38	-3.22	Peak		
3	2483.50	42.49	54.00	-11.51	45.32	-2.83	Average		
4	2483.50	63.84	74.00	-10.16	66.67	-2.83	Peak		
5	4924.00	34.54	54.00	-19.46	30.06	4.48	Average		
6	4924.00	49.35	74.00	-24.65	44.87	4.48	Peak		
7	7386.00	38.20	54.00	-15.80	29.22	8.98	Average		
8	7386.00	53.61	74.00	-20.39	44.63	8.98	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 48 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11g	Test Freq. (MHz)	2462						
N _{TX} 2 Polarization V									

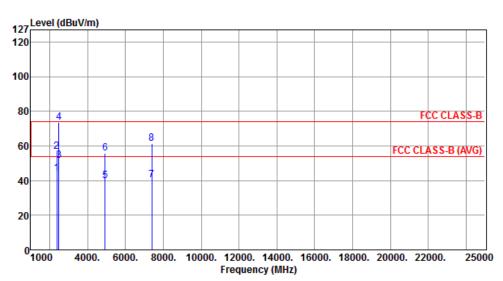

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	44.00	54.00	-10.00	47.22	-3.22	Average		
2	2390.00	56.49	74.00	-17.51	59.71	-3.22	Peak		
3	2483.50	51.39	54.00	-2.61	54.22	-2.83	Average		
4	2483.50	73.35	74.00	-0.65	76.18	-2.83	Peak		
5	4924.00	39.89	54.00	-14.11	35.41	4.48	Average		
6	4924.00	55.74	74.00	-18.26	51.26	4.48	Peak		
7	7386.00	40.26	54.00	-13.74	31.28	8.98	Average		
8	7386.00	61.57	74.00	-12.43	52.59	8.98	Peak		

SPORTON INTERNATIONAL INC. Page No. : 49 of 63 TEL: 886-3-327-3456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT-20

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	Modulation Mode HT20 Test Freq. (MHz) 2412								
N _{TX} 2 Polarization H									

Report No.: FR350924

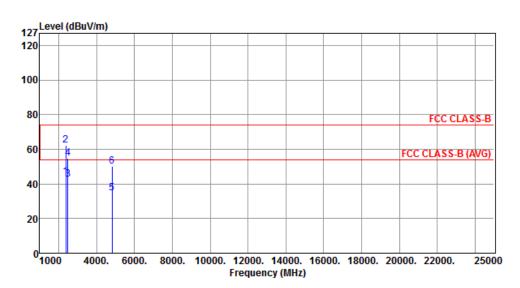

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	43.91	54.00	-10.09	47.13	-3.22	Average		
2	2390.00	62.55	74.00	-11.45	65.77	-3.22	Peak		
3	2486.86	42.41	54.00	-11.59	45.23	-2.82	Average		
4	2486.86	54.70	74.00	-19.30	57.52	-2.82	Peak		
5	4824.00	34.70	54.00	-19.30	30.39	4.31	Average		
6	4824.00	50.02	74.00	-23.98	45.71	4.31	Peak		

SPORTON INTERNATIONAL INC. Page No. : 50 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



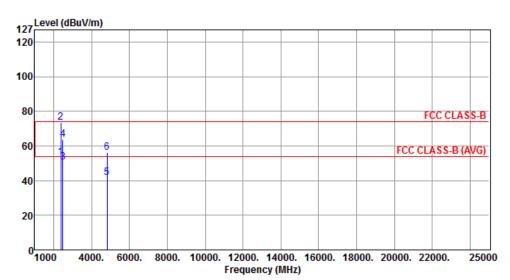

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV		Remark	ANT High cm	Turn Table deg
1	2390.00	53.37	54.00	-0.63	56.59	-3.22	Average		
2	2390.00	73.39		-0.61	76.61	-3.22	Peak		
3	2486.80	50.61	54.00	-3.39	53.43	-2.82	Average		
4	2486.80	63.87	74.00	-10.13	66.69	-2.82	Peak		
5	4824.00	41.89	54.00	-12.11	37.58	4.31	Average		
6	4824.00	56.35	74.00	-17.65	52.04	4.31	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 51 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



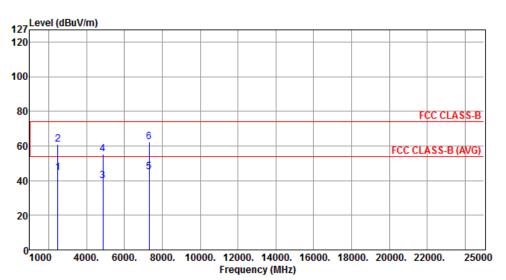

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	44.50	54.00	-9.50	47.33	-2.83	Average		
2	2483.50				63.87	-2.83	Peak		
3	4874.00	39.73	54.00	-14.27	35.34	4.39	Average		
4	4874.00	55.44	74.00	-18.56	51.05	4.39	Peak		
5	7311.00	44.79	54.00	-9.21	35.87	8.92	Average		
6	7311.00	62.54	74.00	-11.46	53.62	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 52 of 63 TEL: 886-3-327-3456 Report Version : Rev. 01

st Report Report No.: FR350924



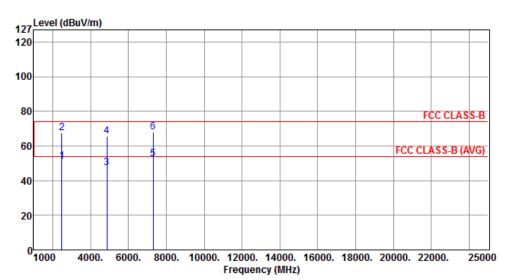

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	51.14	54.00	-2.86	53.97	-2.83	Average		
2	2483.50	67.26	74.00	-6.74	70.09	-2.83	Peak		
3	4874.00	47.23	54.00	-6.77	42.84	4.39	Average		
4	4874.00	65.74	74.00	-8.26	61.35	4.39	Peak		
5	7311.00	52.46	54.00	-1.54	43.54	8.92	Average		
6	7311.00	67.74	74.00	-6.26	58.82	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 53 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT20	Test Freq. (MHz)	2462					
N _{TX}	Н							

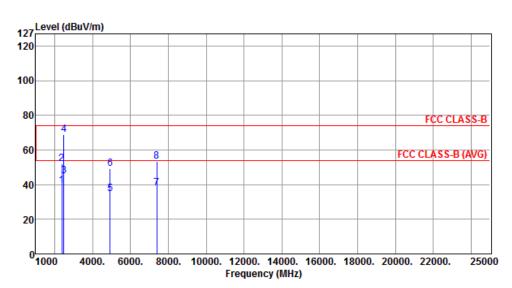

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
		level			reading			High	Table
	MHz	dBuV/m	dBuV/m	ı dB	dBuV	dB		cm	deg
1	2390.00	39.32	54.00	-14.68	42.54	-3.22	Average		
2	2390.00	51.96	74.00	-22.04	55.18	-3.22	Peak		
3	2483.50	44.79	54.00	-9.21	47.62	-2.83	Average		
4	2483.50	69.00	74.00	-5.00	71.83	-2.83	Peak		
5	4924.00	34.66	54.00	-19.34	30.18	4.48	Average		
6	4924.00	49.44	74.00	-24.56	44.96	4.48	Peak		
7	7386.00	38.11	54.00	-15.89	29.13	8.98	Average		
8	7386.00	53.55	74.00	-20.45	44.57	8.98	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 54 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode	HT20	Test Freq. (MHz)	2462								
N _{TX}	N _{TX} 2 Polarization V										

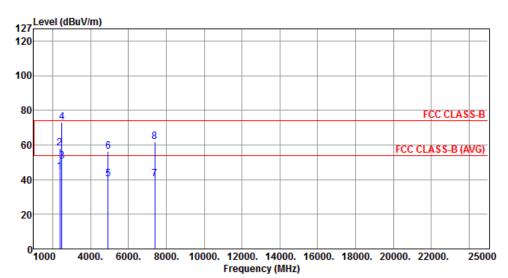

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	44.57	54.00	-9.43	47.79	-3.22	Average		
2	2390.00		74.00		61.39	-3.22	Peak		
3	2483.50	50.74	54.00	-3.26	53.57	-2.83	Average		
4	2483.50	73.34	74.00	-0.66	76.17	-2.83	Peak		
5	4924.00	40.16	54.00	-13.84	35.68	4.48	Average		
6	4924.00	56.40	74.00	-17.60	51.92	4.48	Peak		
7	7386.00	40.53	54.00	-13.47	31.55	8.98	Average		
8	7386.00	61.71	74.00	-12.29	52.73	8.98	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.


SPORTON INTERNATIONAL INC. Page No. : 55 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



3.6.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT-40



Report No.: FR350924

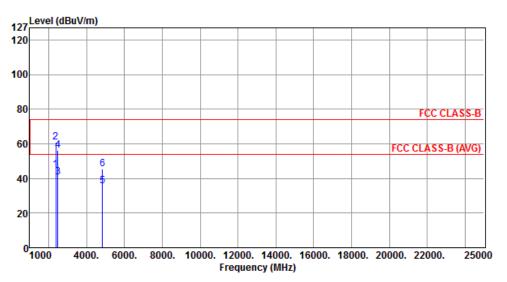

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	45.15	54.00	-8.85	48.37	-3.22	Average		
2	2390.00	61.08	74.00	-12.92	64.30	-3.22	Peak		
3	2485.10	40.92	54.00	-13.08	43.75	-2.83	Average		
4	2485.10	56.13	74.00	-17.87	58.96	-2.83	Peak		
5	4844.00	35.68	54.00	-18.32	31.34	4.34	Average		
6	4844.00	45.52	74.00	-28.48	41.18	4.34	Peak		

SPORTON INTERNATIONAL INC. Page No. : 56 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT40	Test Freq. (MHz)	2422					
N _{TX} 2 Polarization V								

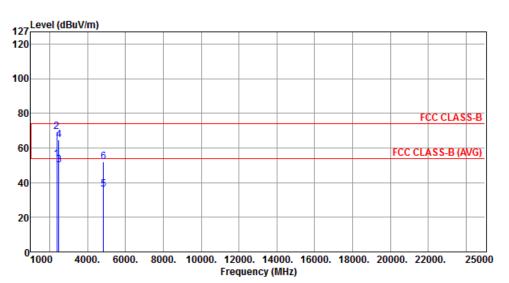

	Freq. MHz	Emission level dBuV/m			SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	53.41	54.00	-0.59	56.63	-3.22	Average		
2	2390.00	69.16	74.00	-4.84	72.38	-3.22	Peak		
3	2485.10	50.02	54.00	-3.98	52.85	-2.83	Average		
4	2485.10	64.49	74.00	-9.51	67.32	-2.83	Peak		
5	4844.00	36.24	54.00	-17.76	31.90	4.34	Average		
6	4844.00	51.94	74.00	-22.06	47.60	4.34	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 57 of 63 TEL: 886-3-327-3456 Report Version : Rev. 01



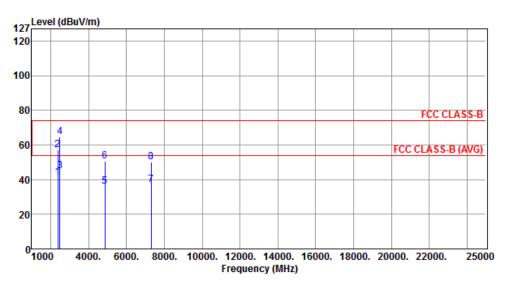

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	41.10	54.00	-12.90	44.32	-3.22	Average		
2	2390.00	57.18	74.00	-16.82	60.40	-3.22	Peak		
3	2483.50	45.09	54.00	-8.91	47.92	-2.83	Average		
4	2483.50	64.62	74.00	-9.38	67.45	-2.83	Peak		
5	4874.00	35.97	54.00	-18.03	31.58	4.39	Average		
6	4874.00	50.64	74.00	-23.36	46.25	4.39	Peak		
7	7311.00	36.95	54.00	-17.05	28.03	8.92	Average		
8	7311.00	50.22	74.00	-23.78	41.30	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 58 of 63 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT40	Test Freq. (MHz)	2437					
N _{TX} 2 Polarization V								

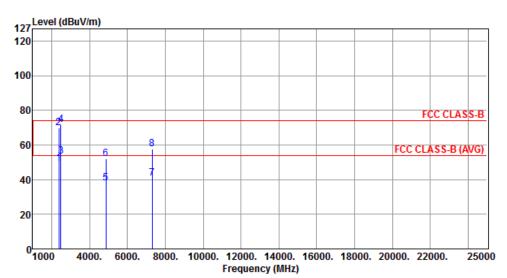

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	49.35	54.00	-4.65	52.57	-3.22	Average		
2	2390.00	69.68	74.00	-4.32	72.90	-3.22	Peak		
3	2483.50	53.39	54.00	-0.61	56.22	-2.83	Average		
4	2483.50	71.61	74.00	-2.39	74.44	-2.83	Peak		
5	4874.00	37.78	54.00	-16.22	33.39	4.39	Average		
6	4874.00	51.90	74.00	-22.10	47.51	4.39	Peak		
7	7311.00	40.73	54.00	-13.27	31.81	8.92	Average		
8	7311.00	57.86	74.00	-16.14	48.94	8.92	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 59 of 63 TEL: 886-3-327-3456 Report Version : Rev. 01



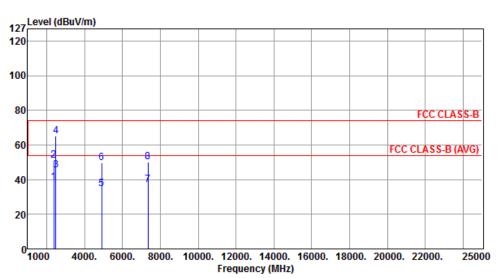

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m		SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	38.40	54.00	-15.60	41.62	-3.22	Average		
2	2390.00	51.07	74.00	-22.93	54.29	-3.22	Peak		
3	2483.50	45.56	54.00	-8.44	48.39	-2.83	Average		
4	2483.50	64.92	74.00	-9.08	67.75	-2.83	Peak		
5	4904.00	34.74	54.00	-19.26	30.29	4.45	Average		
6	4904.00	49.85	74.00	-24.15	45.40	4.45	Peak		
7	7356.00	36.86	54.00	-17.14	27.90	8.96	Average		
8	7356.00	50.10	74.00	-23.90	41.14	8.96	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 60 of 63 TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions (Above 1GHz)						
Modulation ModeHT40Test Freq. (MHz)2452						
N _{TX}	Polarization	V				

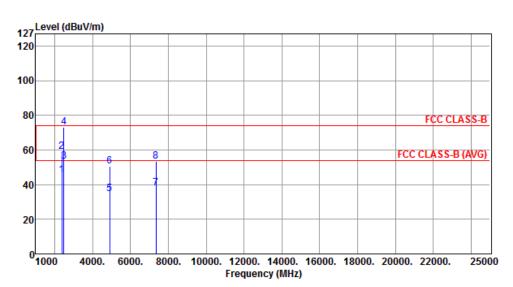

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	45.56	54.00	-8.44	48.78	-3.22	Average		
2	2390.00	59.13	74.00	-14.87	62.35	-3.22	Peak		
3	2483.50	53.40	54.00	-0.60	56.23	-2.83	Average		
4	2483.50	73.11	74.00	-0.89	75.94	-2.83	Peak		
5	4904.00	34.54	54.00	-19.46	30.09	4.45	Average		
6	4904.00	50.74	74.00	-23.26	46.29	4.45	Peak		
7	7356.00	37.75	54.00	-16.25	28.79	8.96	Average		
8	7356.00	53.33	74.00	-20.67	44.37	8.96	Peak		

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

SPORTON INTERNATIONAL INC. Page No. : 61 of 63 TEL: 886-3-327-3456 Report Version : Rev. 01



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101063	9KHz~40GHz	Feb. 18, 2013	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Mar. 20, 2013	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20- SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 26, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)

Report No.: FR350924

Note: Calibration Interval of instruments listed above is one year.

Test Item	Conducted Emission							
Test Site	Conduction room 1 / (CO01-WS)							
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
EMC Receiver	R&S	ESCS 30	100169	Dec. 12, 2012	Dec. 11, 2013			
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Dec. 04, 2012	Dec. 03, 2013			
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2012	Dec. 03, 2013			
ISN	TESEQ	ISN T800	34406	Apr. 08, 2013	Apr. 07, 2014			
ISN	TESEQ	ISN T200A	30494	Apr. 09, 2013	Apr. 08, 2014			
ISN	TESEQ	ISN T8-Cat6	27262	Sep. 17, 2012	Sep. 16, 2013			
ISN	TESEQ	ISN ST08	22589	Jan. 24, 2013	Jan. 23, 2014			
RF Current Probe	FCC	F-33-4	121630	Dec. 04, 2012	Dec. 03, 2013			
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 25, 2012	Dec. 24, 2013			
ESH3-Z6 V-Network(+)	R&S	ESH3-Z6	100920	Nov. 21, 2012	Nov. 20, 2013			
ESH3-Z6 V-Network(-)	R&S	ESH3-Z6	100951	Jan. 03, 2013	Jan. 02, 2014			
Two-Line V-Network	R&S	ENV216	101579	Jan. 07, 2013	Jan. 06, 2014			
50 ohm terminal	NA	50	01	Apr. 22, 2013	Apr. 21, 2014			
50 ohm terminal	NA	50	02	Apr. 22, 2013	Apr. 21, 2014			
50 ohm terminal	NA	50	03	Apr. 22, 2013	Apr. 21, 2014			
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014			

SPORTON INTERNATIONAL INC. Page No. : 62 of 63
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

Test Item	Radiated Emission above 1GHz							
Test Site	966 chamber1 / (03CH01-WS)							
Instrument	Manufacturer Model No. Serial No. Calibration Date Calibratio							
3m semi-anechoic chamber	CHAMPRO	SAC-03	03CH01-WS	Jan. 04, 2013	Jan. 03, 2014			
Amplifier	Burgeon	BPA-530	100219	Nov. 28, 2012	Nov. 27, 2013			
Amplifier	Agilent	83017A	MY39501308	Dec. 18, 2012	Dec. 17, 2013			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 11, 2013	Jan. 10, 2014			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 18, 2013	Feb. 17, 2014			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 25, 2012	Dec. 24, 2013			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 25, 2012	Dec. 24, 2013			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 25, 2012	Dec. 24, 2013			
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-001	Dec. 25, 2012	Dec. 24, 2013			
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-002	Dec. 25, 2012	Dec. 24, 2013			
Spectrum Analyzer	R&S	FSV40	101498	Jan. 24, 2013	Jan. 23, 2014			
Receiver	ROHDE&SCHWAR Z	ESR3	101658	Jan. 28, 2013	Jan. 27, 2014			
control	EM Electronics	EM1000	60612	N/A	N/A			

Report No.: FR350924

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014		
Amplifier	MITEQ	AMF-6F-260400	9121372	Apr. 19, 2013	Apr. 18, 2015		
Note: Calibration Interval of instruments listed above is two year.							

SPORTON INTERNATIONAL INC. Page No. : 63 of 63 TEL: 886-3-327-3456 Report Version : Rev. 01