



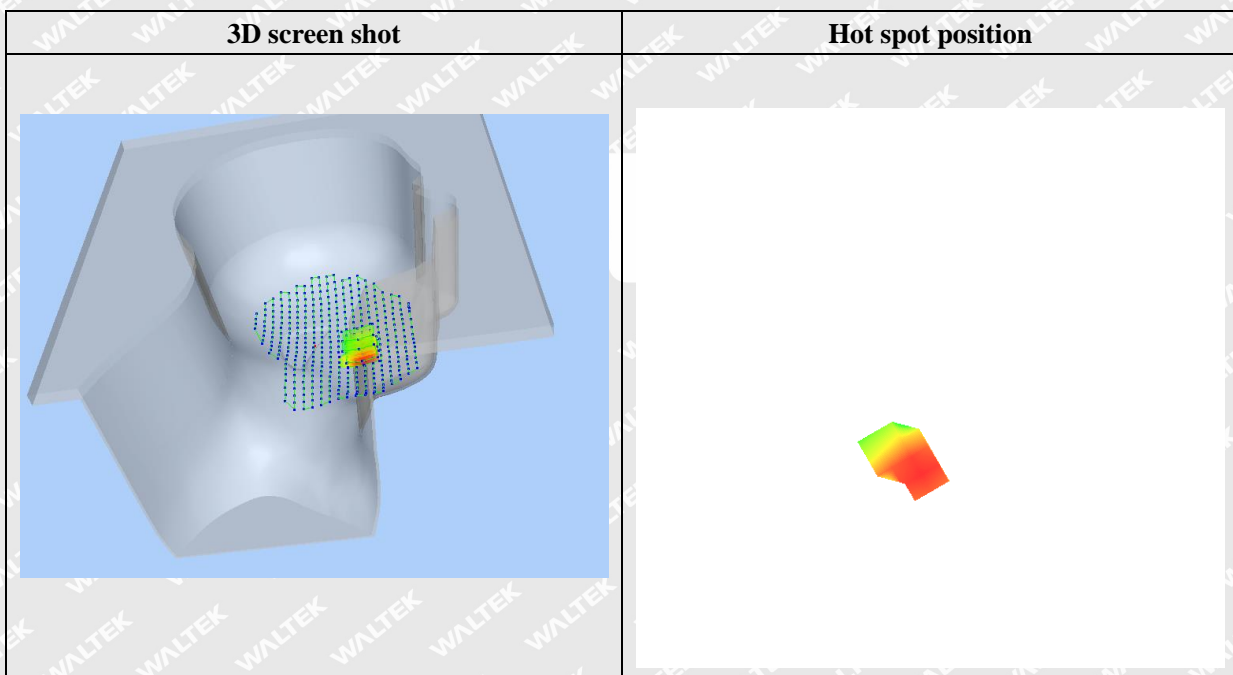

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.063052
SAR 1g (W/Kg)	0.090506

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1219	0.0954	0.0703	0.0524	0.0396

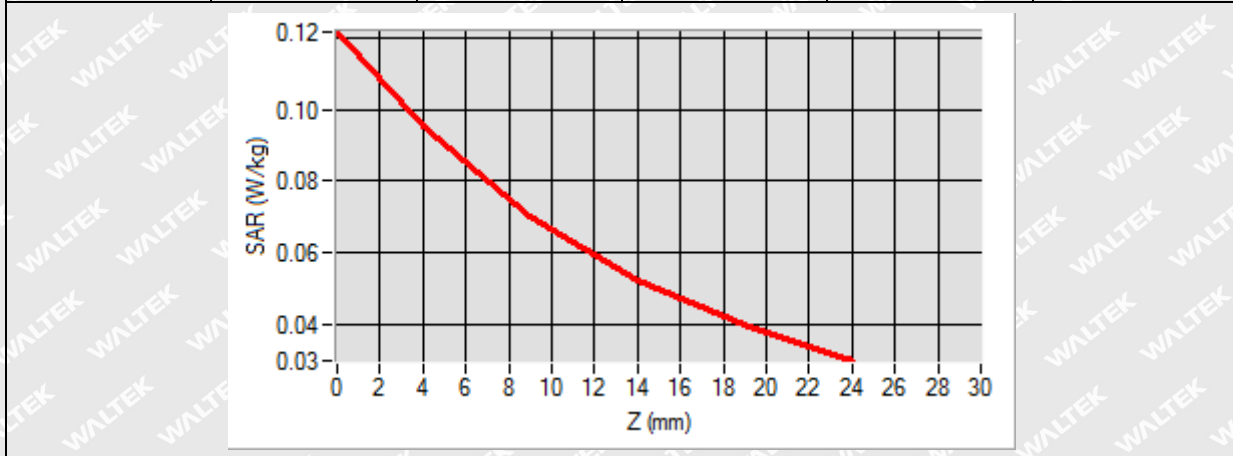



MEASUREMENT 14

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GPRS1900_2TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1909.800000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.536272
Ambient Temperature	21.1
Liquid Temperature	21.3

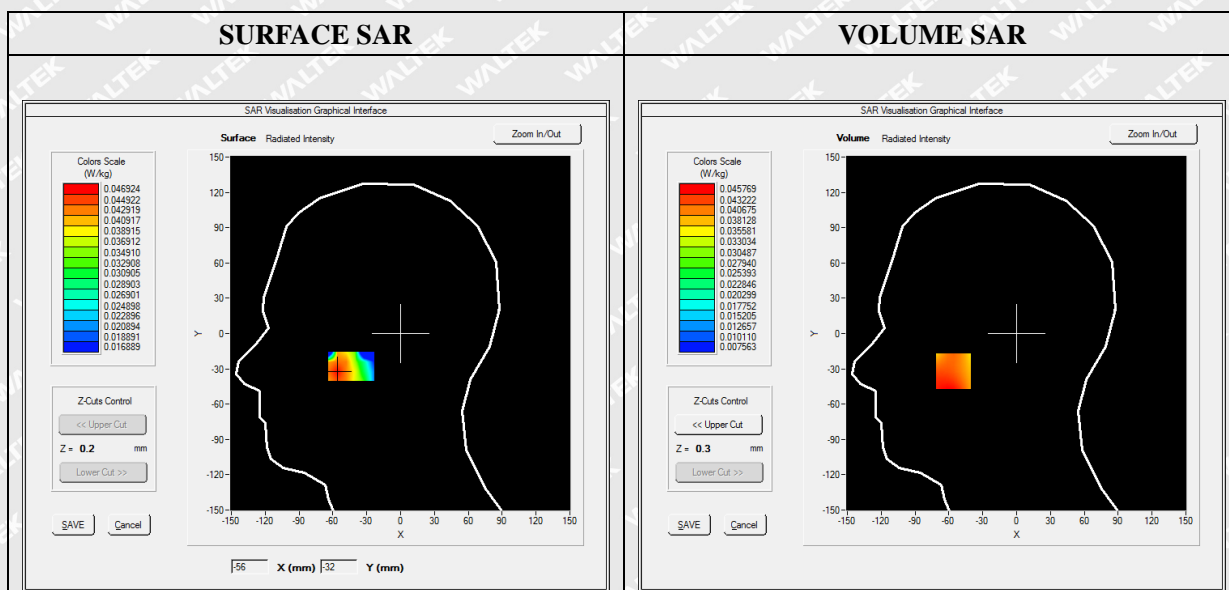




Maximum location: X=-56.00, Y=-32.00

SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)	0.032664
SAR 1g (W/Kg)	0.044644

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1097	0.0458	0.0297	0.0268	0.0143

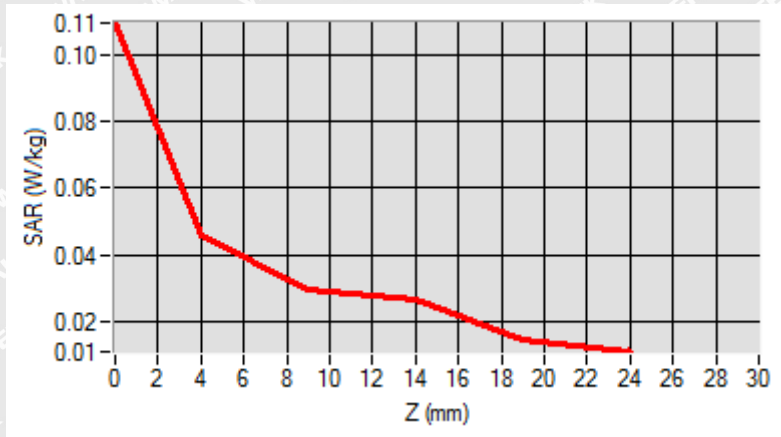

<p>3D screen shot</p>	<p>Hot spot position</p>



MEASUREMENT 19

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.524540
Ambient Temperature	21.1
Liquid Temperature	21.3

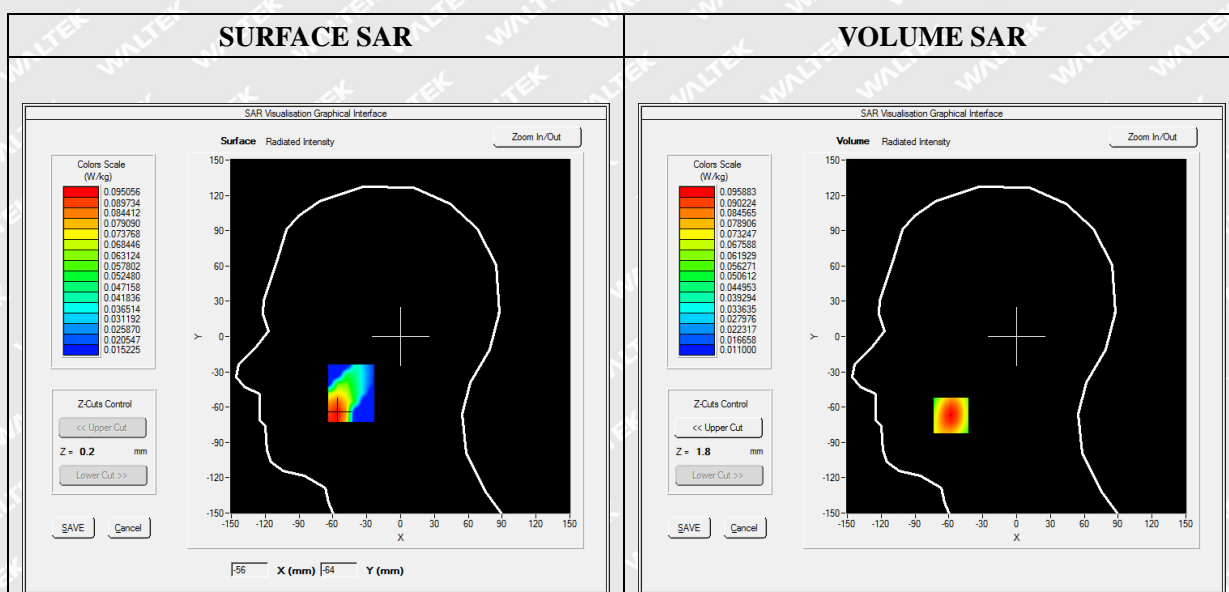


Maximum location: X=-58.00, Y=-67.00



SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.058938
SAR 1g (W/Kg)	0.091330

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1345	0.0959	0.0630	0.0428	0.0307

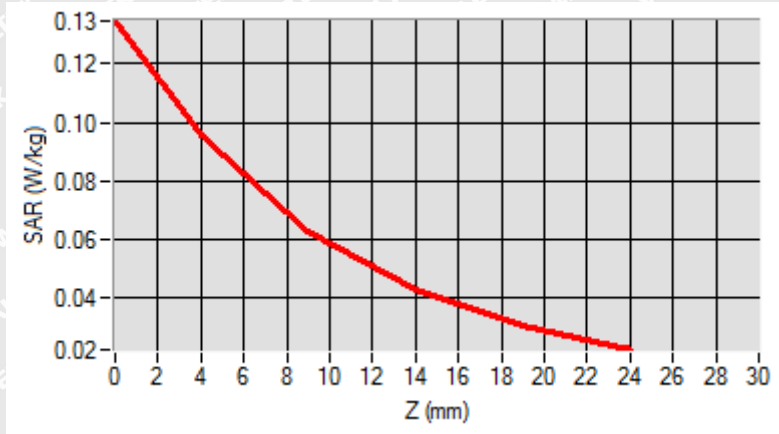

3D screen shot	Hot spot position



MEASUREMENT 23

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.342427
Ambient Temperature	21.1
Liquid Temperature	21.3

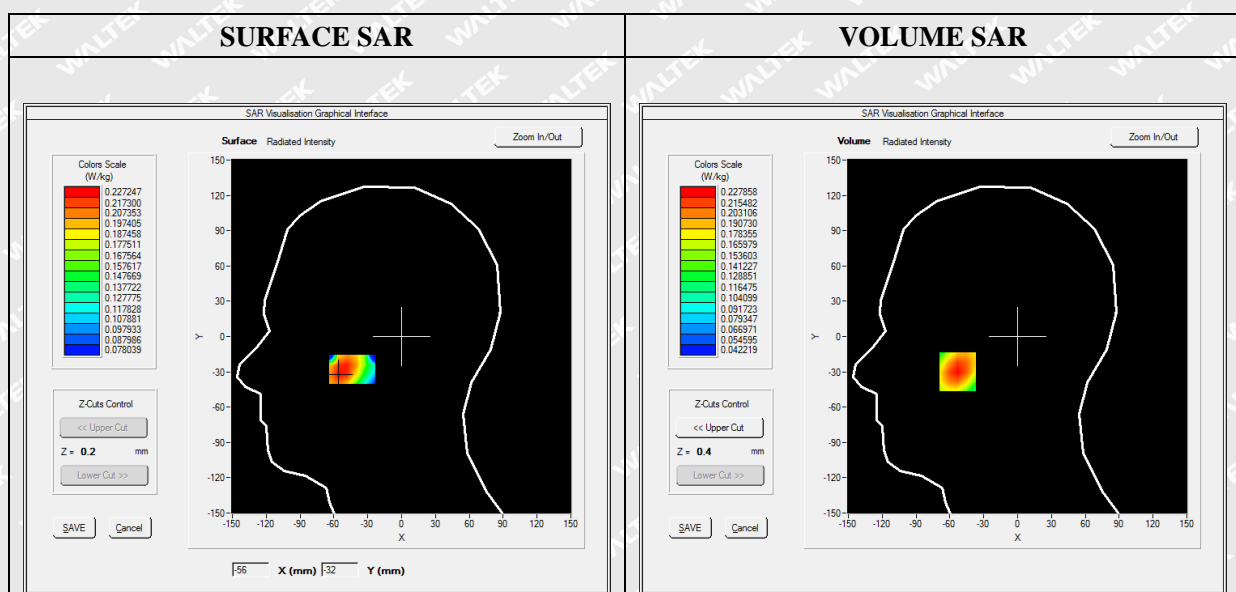


Maximum location: X=-53.00, Y=-30.00



SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.161600
SAR 1g (W/Kg)	0.218899

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2723	0.2279	0.1820	0.1456	0.1165

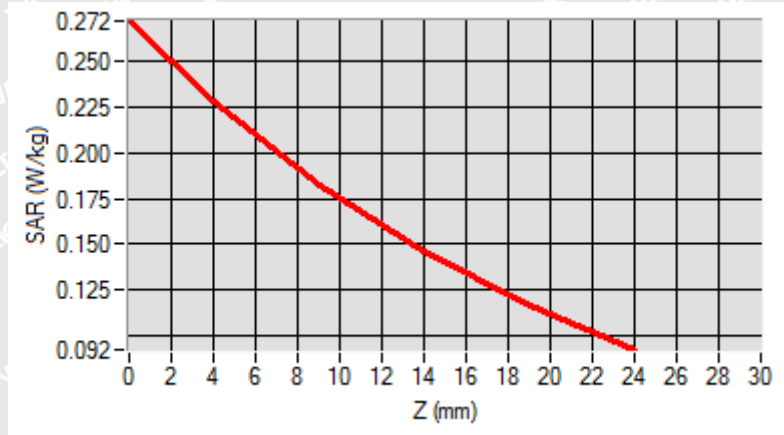

3D screen shot	Hot spot position



MEASUREMENT 31

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	LTE Band 2
Channels	QPSK, 20MHz, 1RB,High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.536272
Ambient Temperature	21.1
Liquid Temperature	21.3

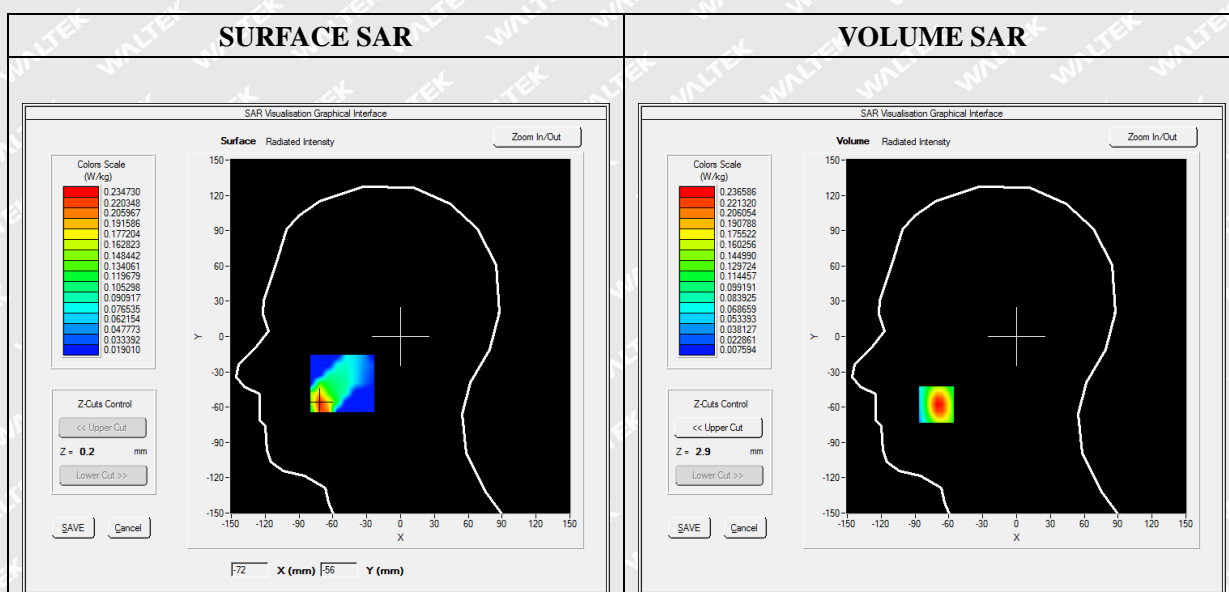


Maximum location: X=-71.00, Y=-58.00



SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)	0.120482
SAR 1g (W/Kg)	0.223278

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4112	0.2366	0.1169	0.0648	0.0467

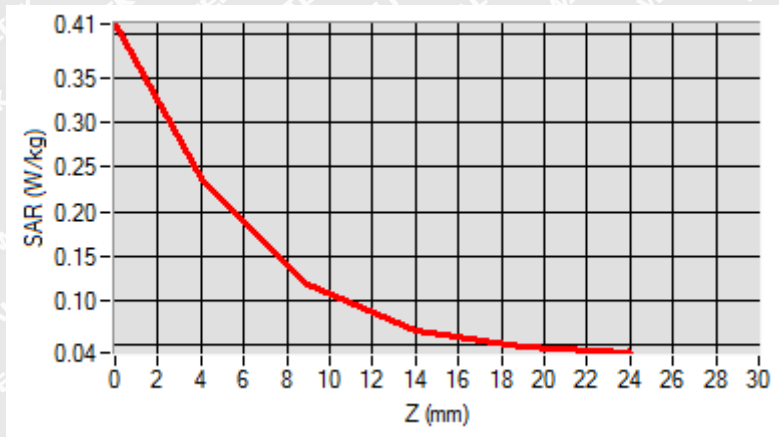

3D screen shot	Hot spot position



MEASUREMENT 35

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.024890
Conductivity (S/m)	1.371250
Power Variation (%)	1.374628
Ambient Temperature	21.1
Liquid Temperature	21.2

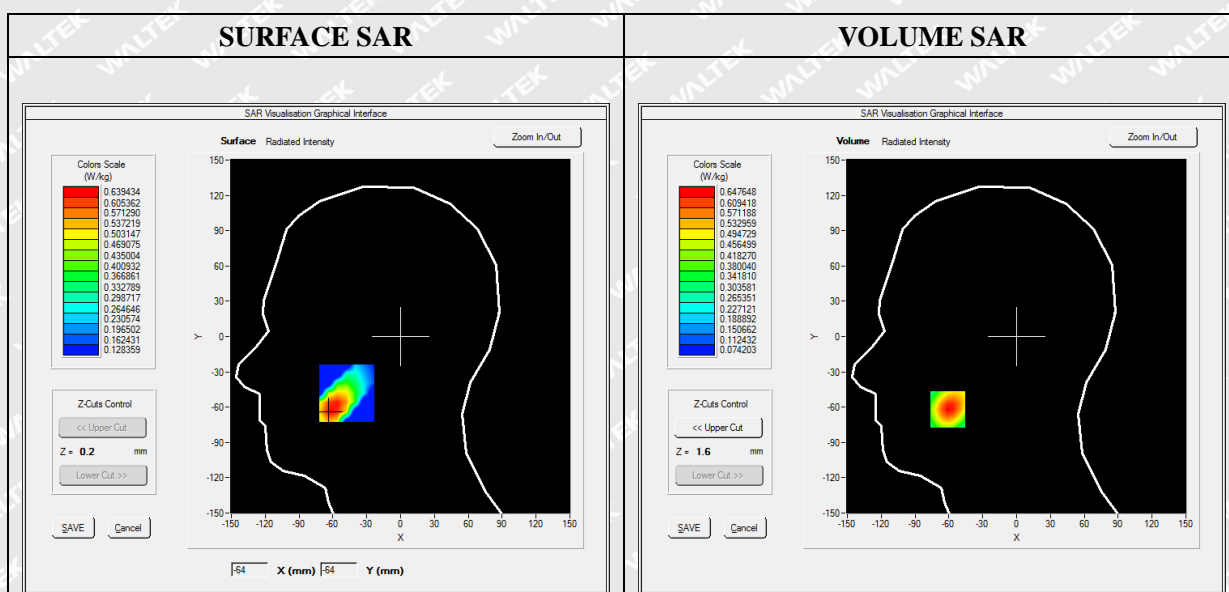


Maximum location: X=-61.00, Y=-62.00



SAR Peak: 0.89 W/kg

SAR 10g (W/Kg)	0.380474
SAR 1g (W/Kg)	0.609368

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8853	0.6476	0.4313	0.2841	0.1849

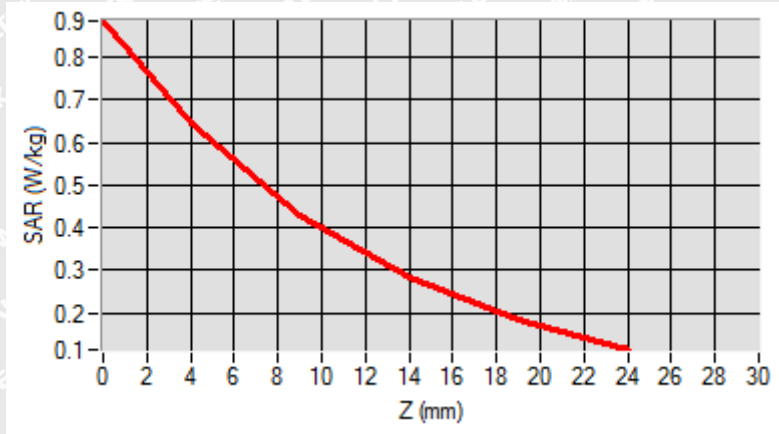

3D screen shot	Hot spot position



MEASUREMENT 41

Type: Phone measurement (Complete)

Date of measurement: 2021-05-29

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2510.000000
Relative Permittivity (real part)	38.631092
Conductivity (S/m)	1.930182
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2

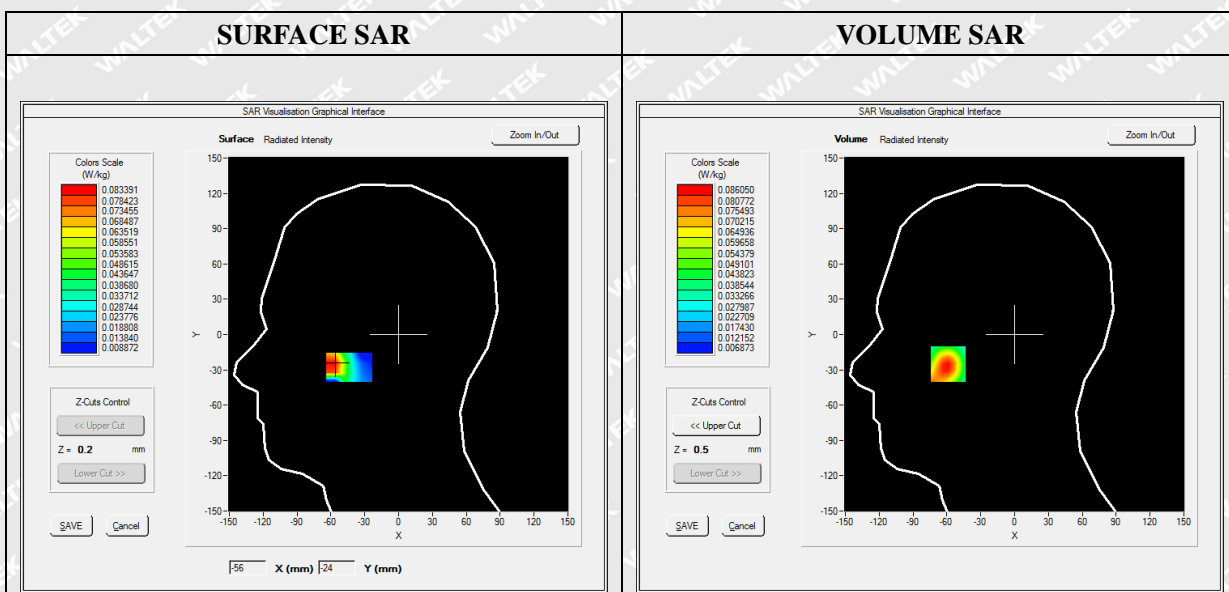


Maximum location: X=-59.00, Y=-25.00



SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.048330
SAR 1g (W/Kg)	0.080320

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1219	0.0861	0.0553	0.0360	0.0241

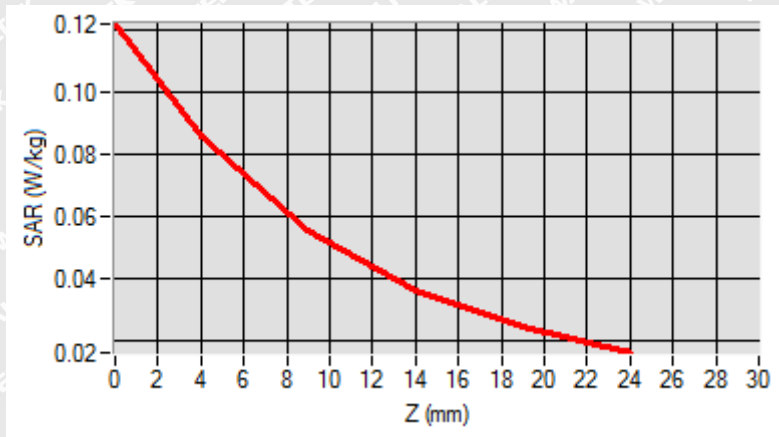

3D screen shot	Hot spot position



MEASUREMENT 49

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE Band 12
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative Permittivity (real part)	42.110245
Conductivity (S/m)	0.861245
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2



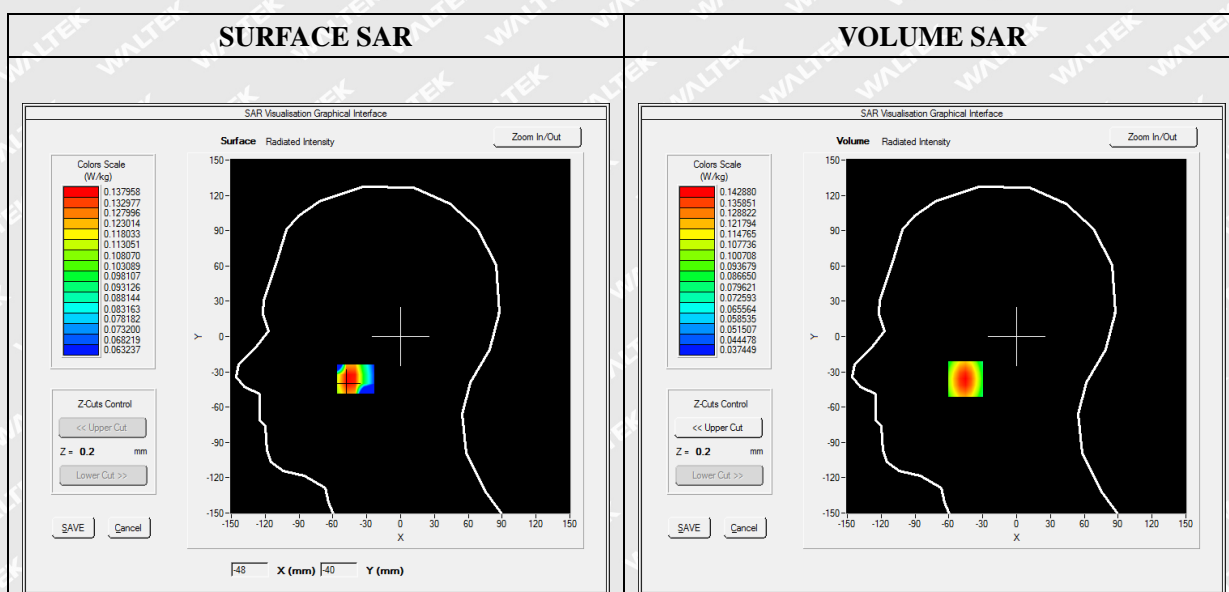


Maximum location: X=-45.00, Y=-36.00

**SAR Peak: 0.17 W/kg**

SAR 10g (W/Kg)	0.102100
SAR 1g (W/Kg)	0.138315

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1736	0.1429	0.1120	0.0883	0.0700

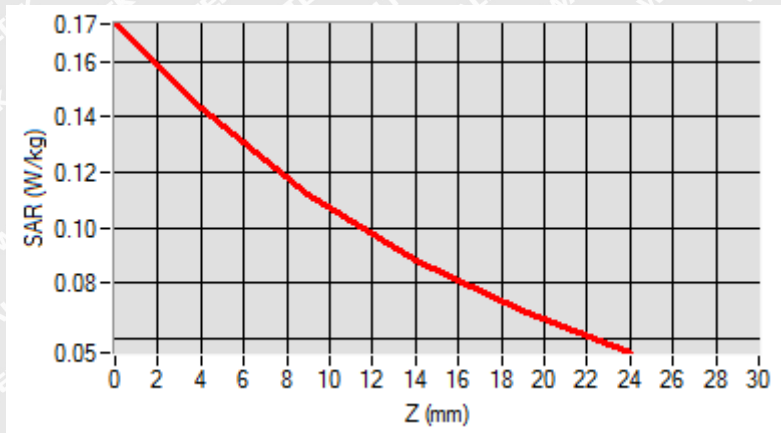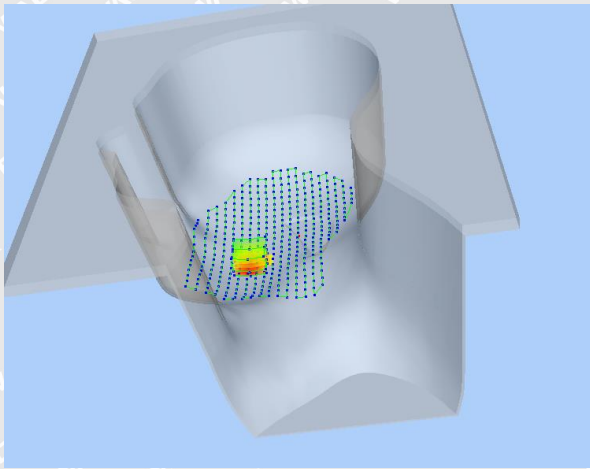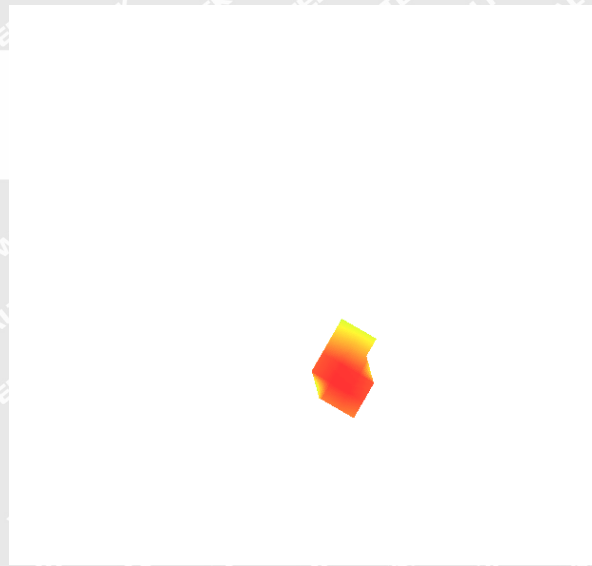**3D screen shot****Hot spot position**



MEASUREMENT 57

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	LTE Band 13
Channels	QPSK, 10MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	782.000000
Relative Permittivity (real part)	41.900245
Conductivity (S/m)	0.866245
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2

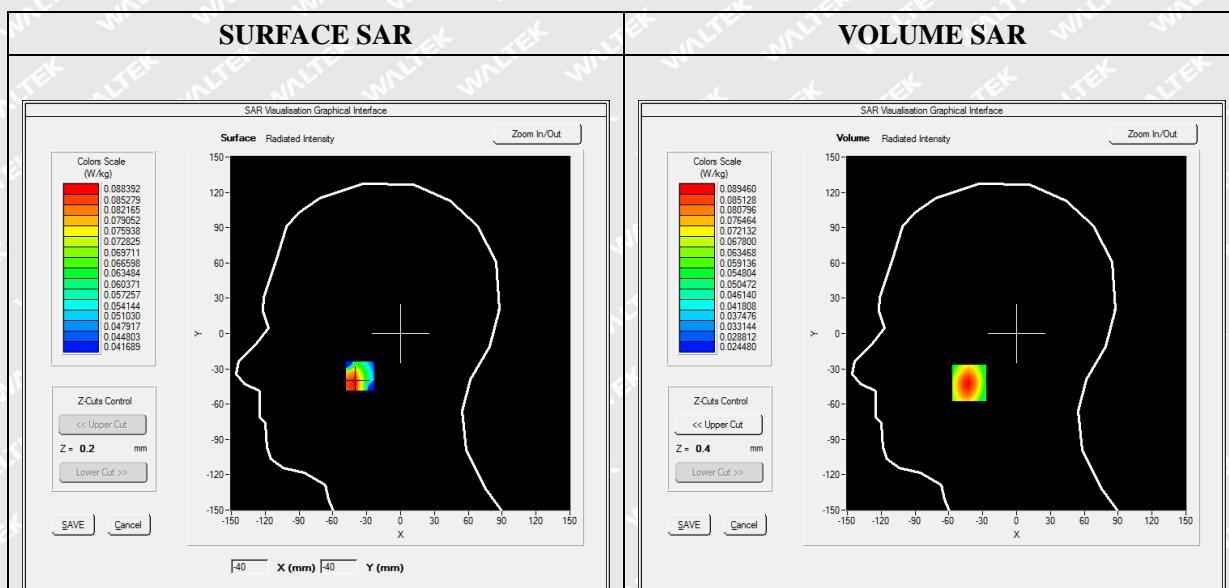




Maximum location: X=-42.00, Y=-42.00


SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.062478
SAR 1g (W/Kg)	0.086564


Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1088	0.0895	0.0698	0.0545	0.0424

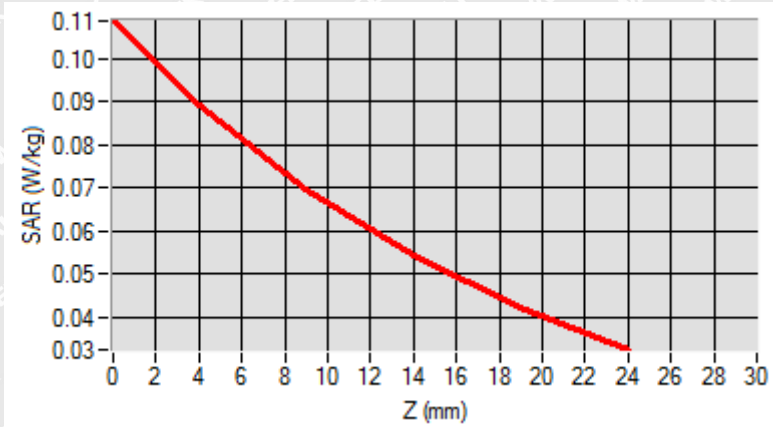

3D screen shot

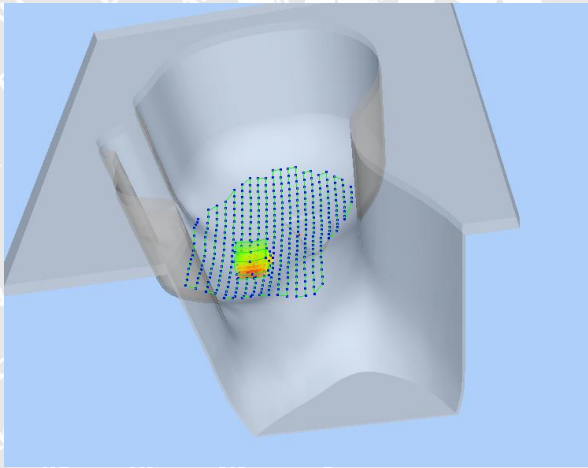

Hot spot position

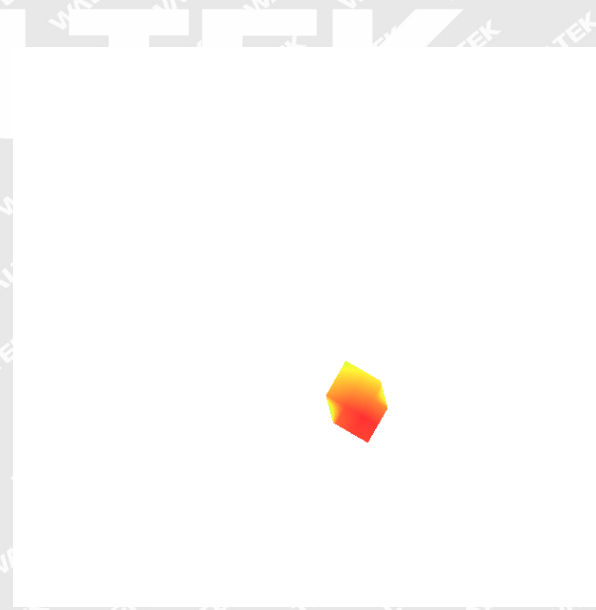



MEASUREMENT 71

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	LTE Band 17
Channels	QPSK, 10MHz, 50%RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	709.000000
Relative Permittivity (real part)	42.118668
Conductivity (S/m)	0.913696
Power Variation (%)	-1.480000
Ambient Temperature	21.1
Liquid Temperature	21.2

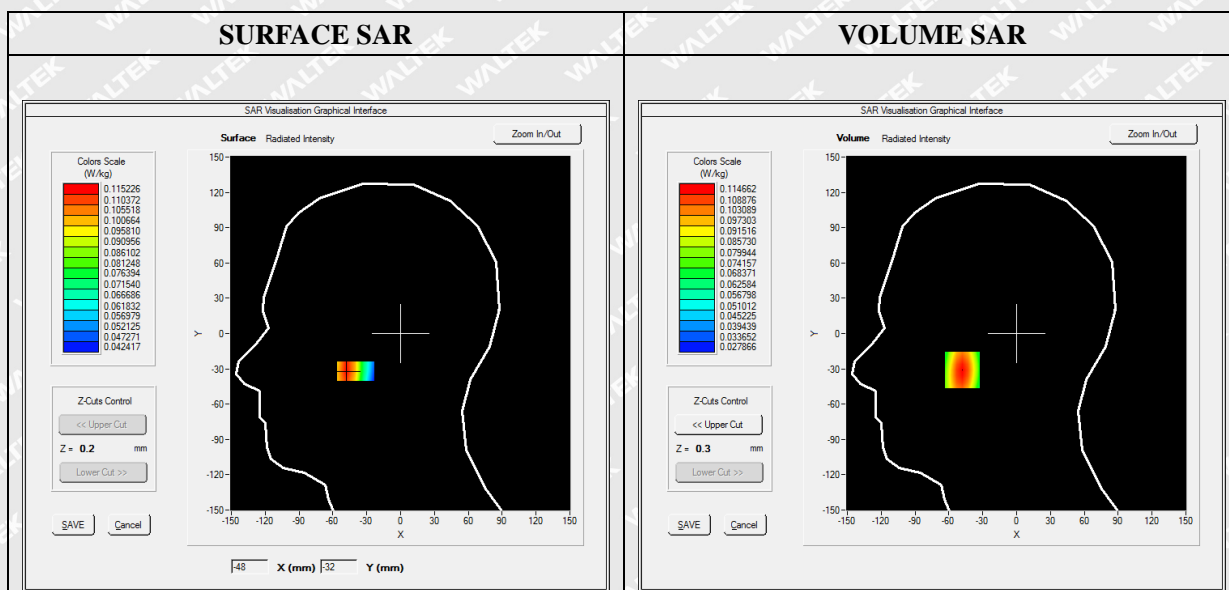




Maximum location: X=-48.00, Y=-31.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.079416
SAR 1g (W/Kg)	0.110848

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1448	0.1147	0.0860	0.0655	0.0508

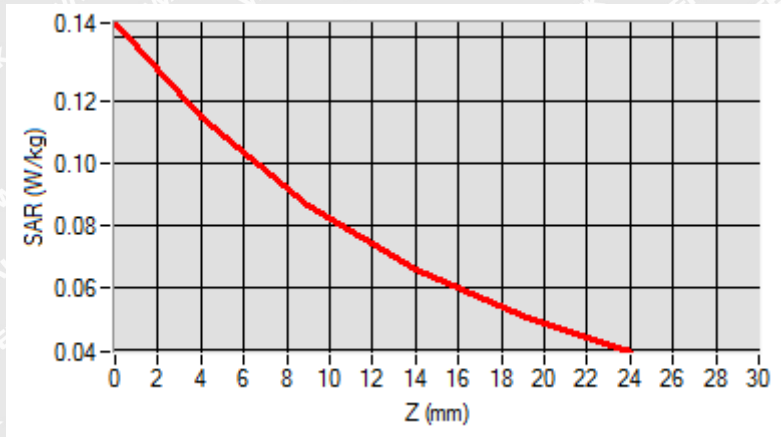

<p>3D screen shot</p>	<p>Hot spot position</p>



MEASUREMENT 75

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	LTE Band 41
Channels	QPSK, 20MHz, 1RB,High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2645.000000
Relative Permittivity (real part)	41.480000
Conductivity (S/m)	0.977301
Power Variation (%)	0.520000
Ambient Temperature	21.1
Liquid Temperature	21.2

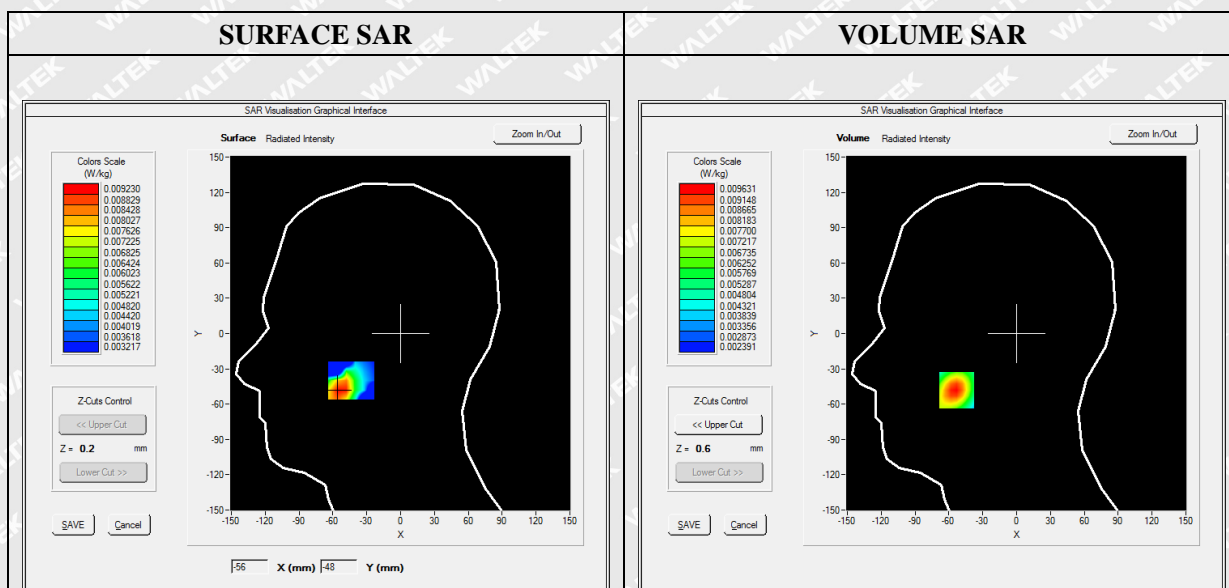




Maximum location: X=-53.00, Y=-48.00

SAR Peak: 0.01 W/kg

SAR 10g (W/Kg)	0.005875
SAR 1g (W/Kg)	0.009054

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0140	0.0096	0.0062	0.0043	0.0034

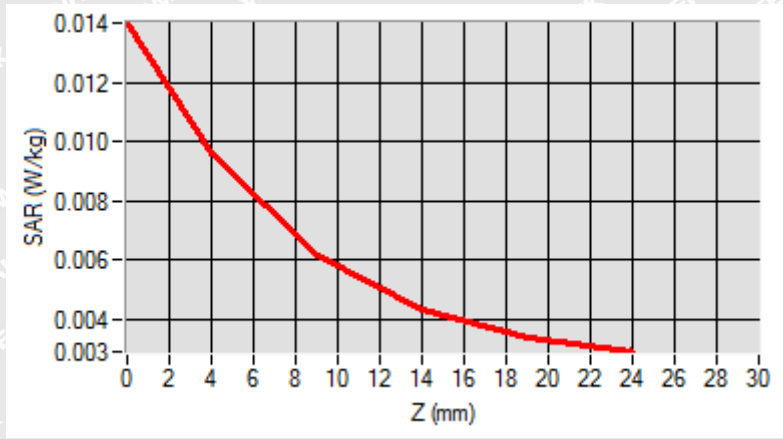

<p>3D screen shot</p>	<p>Hot spot position</p>



MEASUREMENT 83

Type: Phone measurement (Complete)

Date of measurement: 2021-05-29

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi(5.2GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5240.000000
Relative Permittivity (real part)	35.612911
Conductivity (S/m)	4.871483
Power Variation (%)	0.542660
Ambient Temperature	22.0
Liquid Temperature	22.3

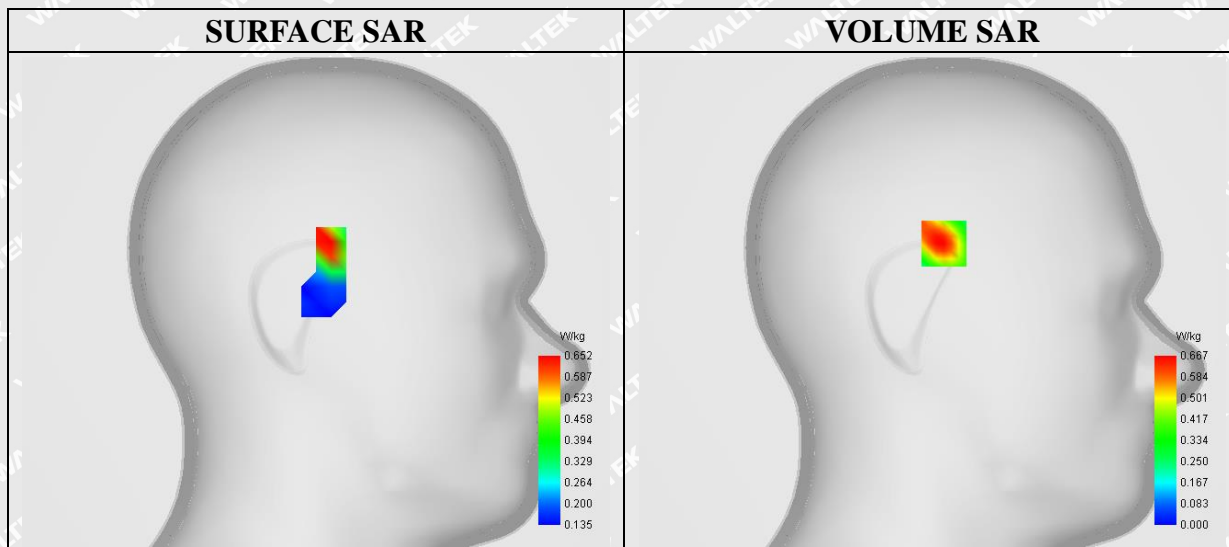

Maximum location: X=-6.00, Y=31.00




D. SAR 1g & 10g


SAR 10g (W/Kg)	0.344529
SAR 1g (W/Kg)	0.638365

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.9250	0.6674	0.4896	0.3654	0.2835	0.2303	0.1961	0.1743	0.1388	0.1388

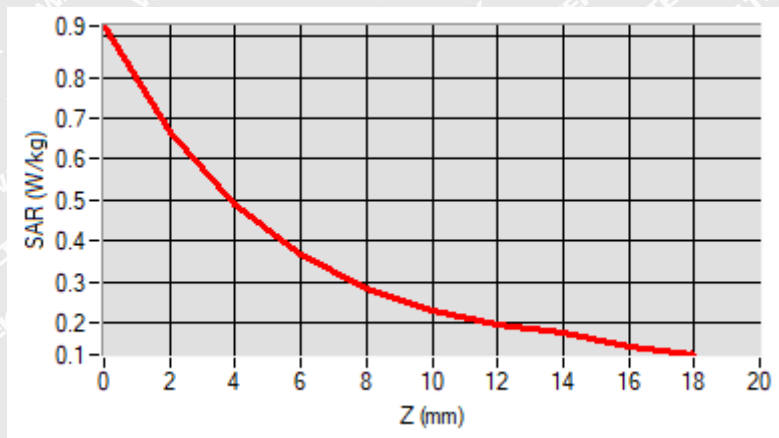

F. 3D Image

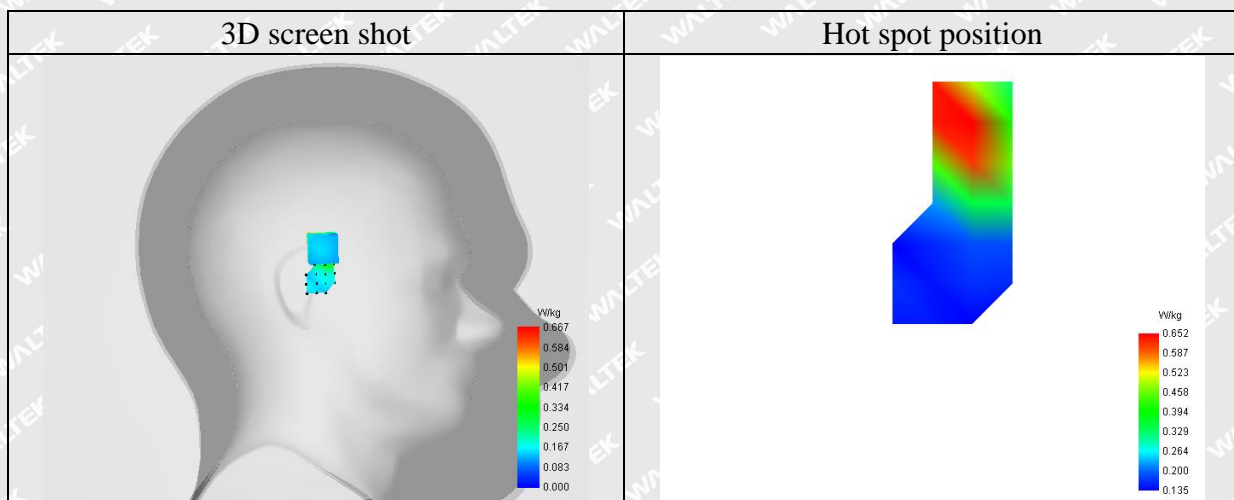



MEASUREMENT 85

Type: Phone measurement (Complete)

Date of measurement: 2021-05-29

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right Head
Device Position	Cheek
Band	WiFi(5.8GHz)_ 802.11n (HT20)
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5745.000000
Relative Permittivity (real part)	35.620839
Conductivity (S/m)	35.301254
Power Variation (%)	5.210512
Ambient Temperature	22.0
Liquid Temperature	22.3

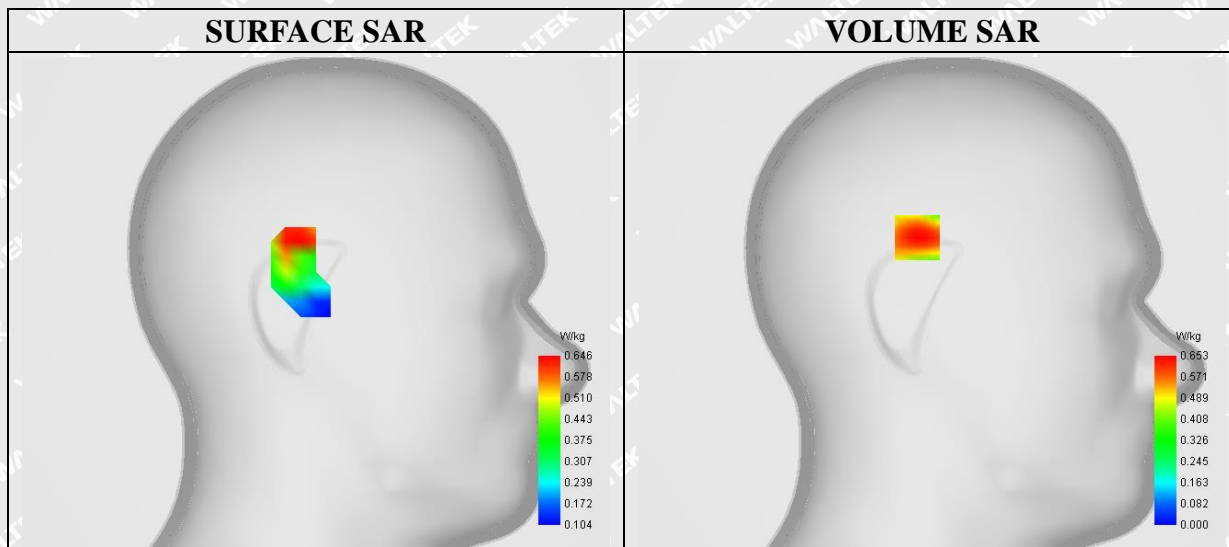

Maximum location: X=8.00, Y=34.00




D. SAR 1g & 10g

SAR 10g (W/Kg)	0.340515
SAR 1g (W/Kg)	0.644261

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.9559	0.6525	0.4386	0.2985	0.2132	0.1626	0.1337	0.1182	0.1203

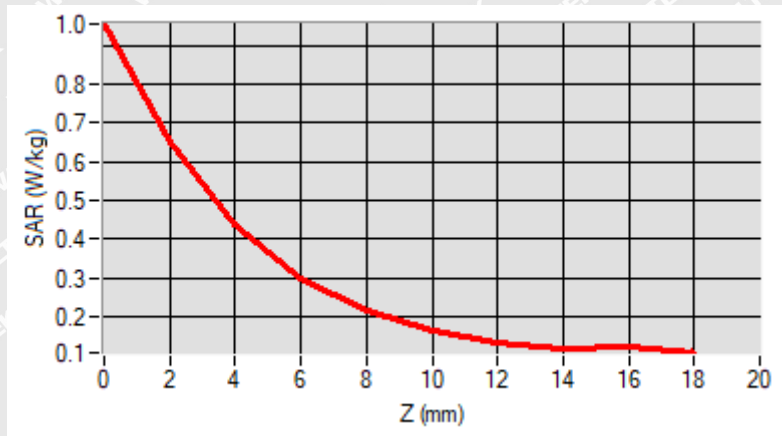

F. 3D Image

3D screen shot	Hot spot position



MEASUREMENT 89

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	836.599976
Relative Permittivity (real part)	55.195076
Conductivity (S/m)	0.971953
Power Variation (%)	1.650000
Ambient Temperature	21.1
Liquid Temperature	21.3

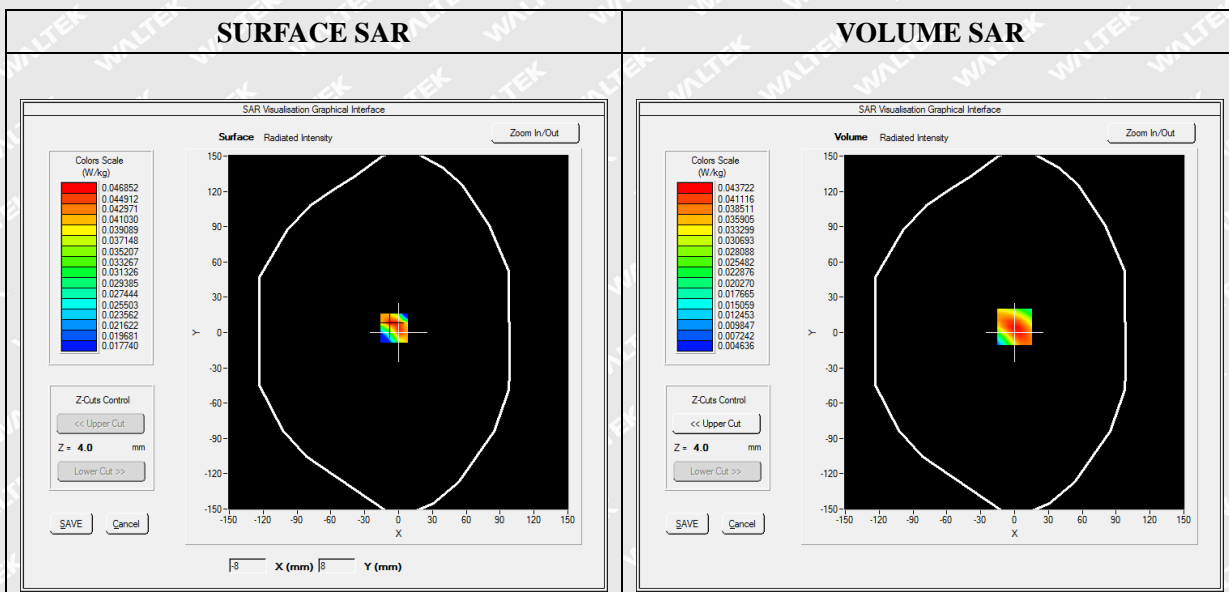


Maximum location: X=0.00, Y=5.00



SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)	0.027184
SAR 1g (W/Kg)	0.041421

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0573	0.0437	0.0308	0.0215	0.0148

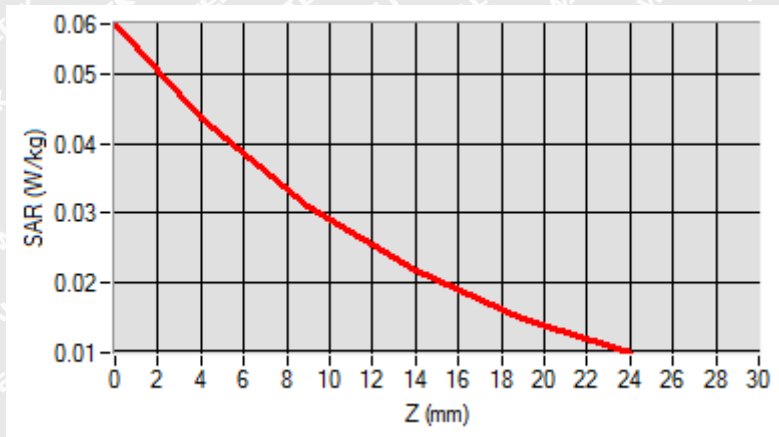

3D screen shot	Hot spot position



MEASUREMENT 92

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	GSM1900
Channels	High
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	1909.800000
Relative Permittivity (real part)	40.00000
Conductivity (S/m)	1.400023
Power Variation (%)	1.130000
Ambient Temperature	21.1
Liquid Temperature	21.3

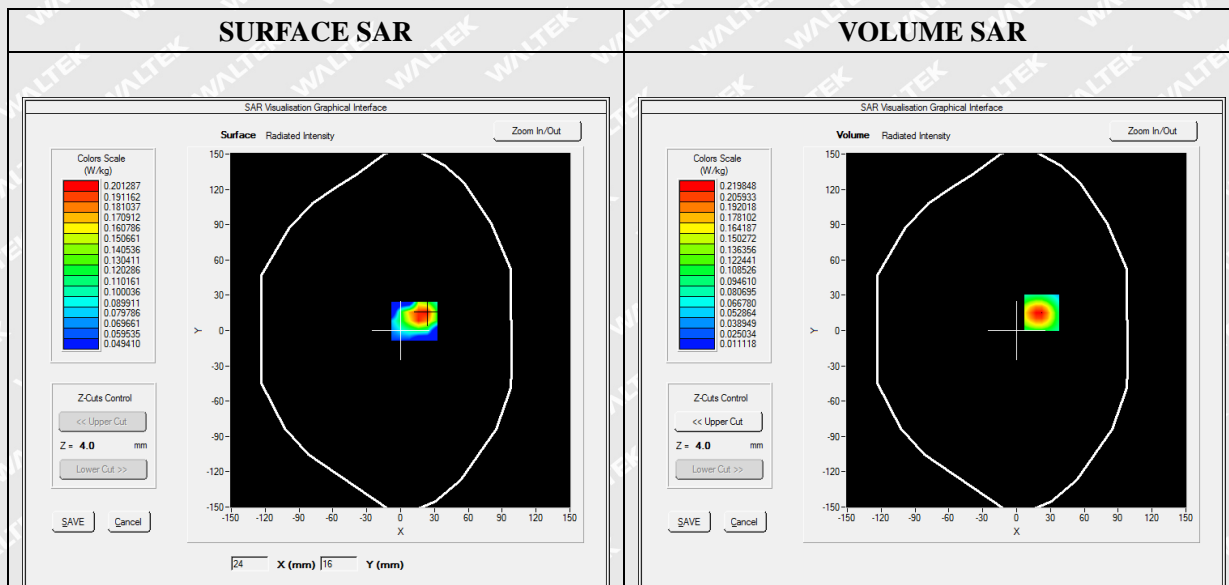


Maximum location: X=22.00, Y=15.00

SAR Peak: 0.36 W/kg



SAR 10g (W/Kg)	0.106288
SAR 1g (W/Kg)	0.203846

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3580	0.2198	0.1160	0.0623	0.0362

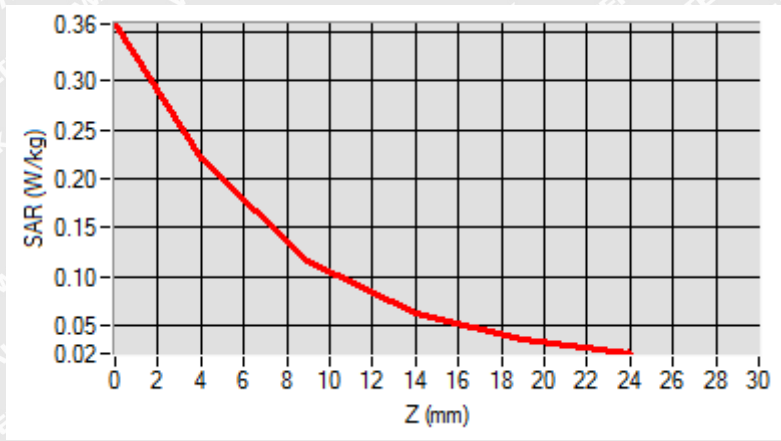

3D screen shot	Hot spot position



MEASUREMENT 94

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.399949
Power Variation (%)	-0.550000
Ambient Temperature	21.1
Liquid Temperature	21.3

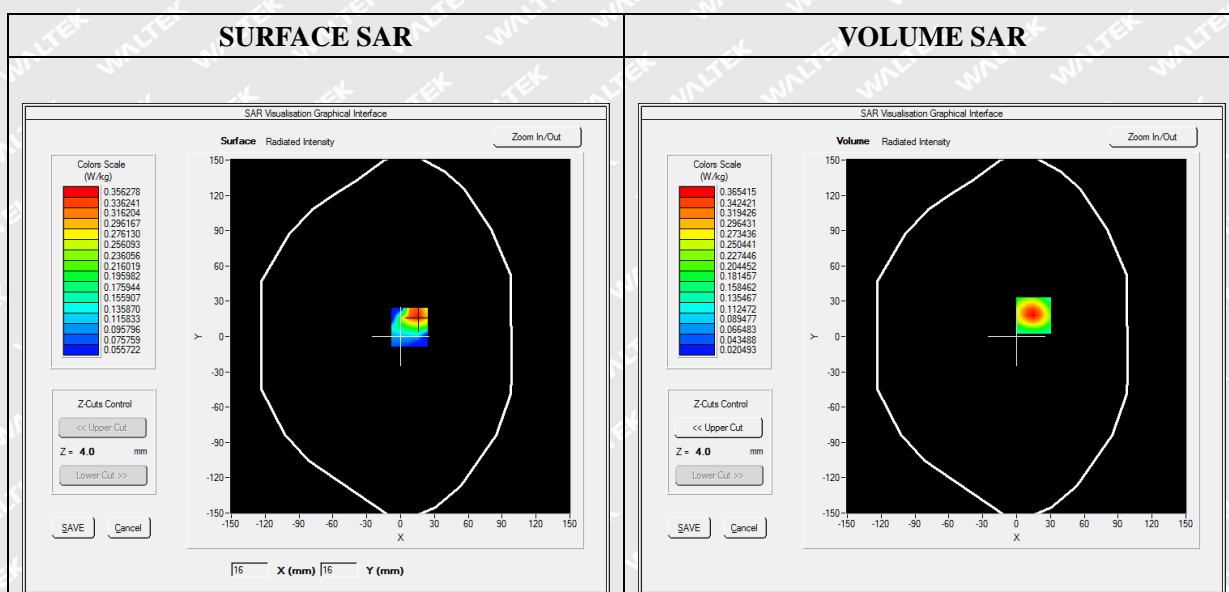


Maximum location: X=15.00, Y=18.00



SAR Peak: 0.58 W/kg

SAR 10g (W/Kg)	0.181293
SAR 1g (W/Kg)	0.337795

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5800	0.3654	0.1995	0.1098	0.0639

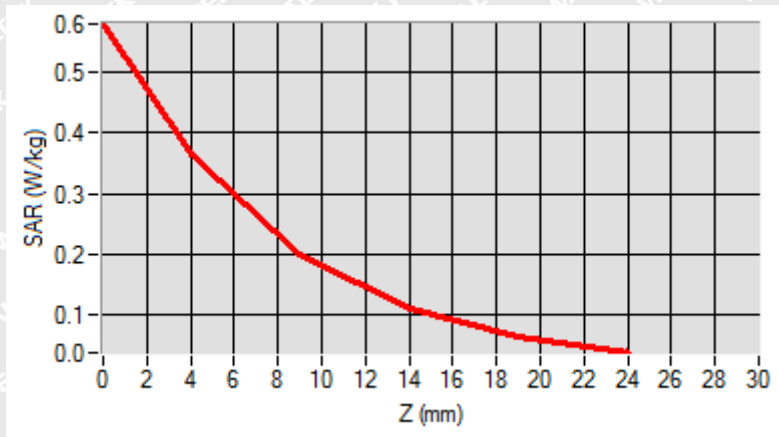

3D screen shot	Hot spot position



MEASUREMENT 96

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative Permittivity (real part)	41.540470
Conductivity (S/m)	0.899780
Power Variation (%)	-0.960000
Ambient Temperature	21.1
Liquid Temperature	21.3

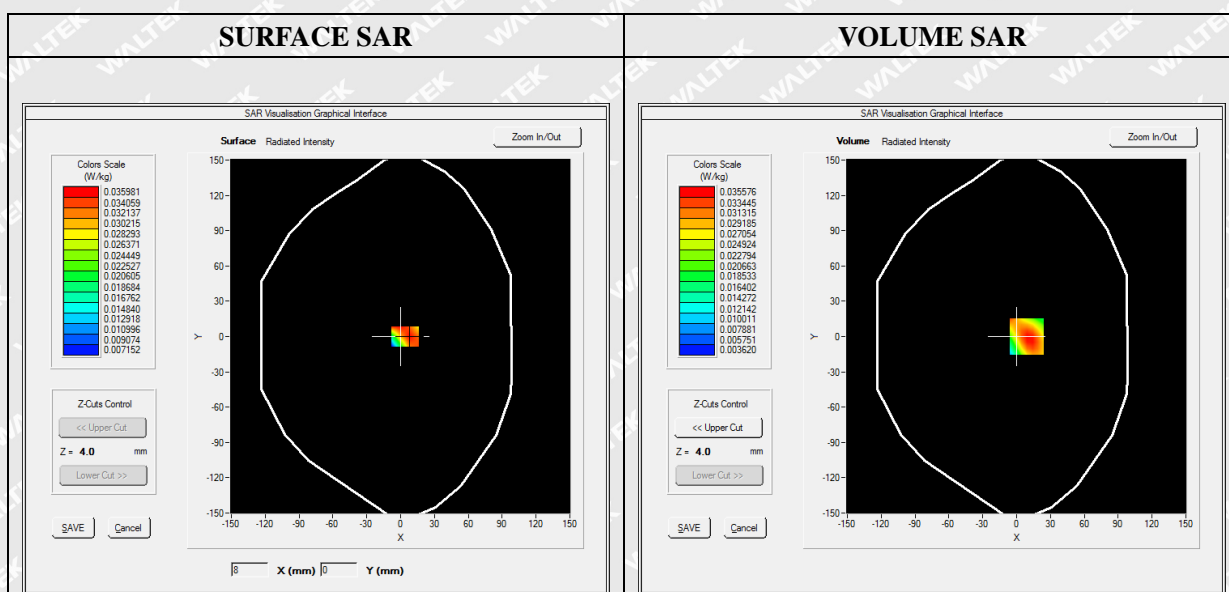


Maximum location: X=9.00, Y=0.00



SAR Peak: 0.05 W/kg

SAR 10g (W/Kg)	0.020784
SAR 1g (W/Kg)	0.033663

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0524	0.0356	0.0219	0.0141	0.0098

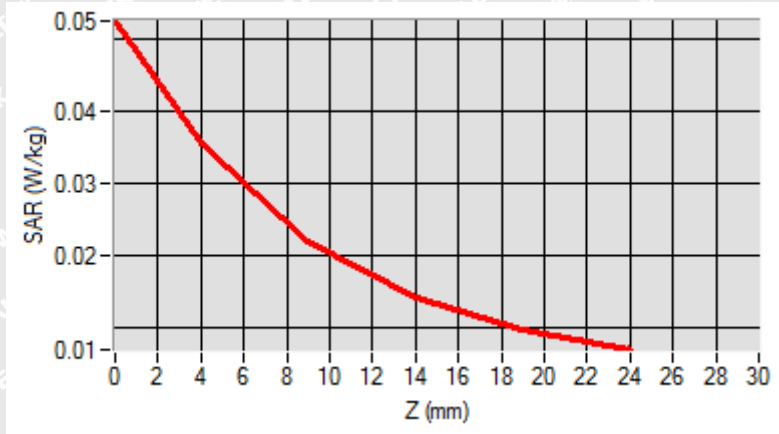

3D screen shot	Hot spot position



MEASUREMENT 97

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 2
Channels	QPSK, 20MHz, 1RB,High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	40.000000
Conductivity (S/m)	1.399839
Power Variation (%)	-0.510000
Ambient Temperature	21.1
Liquid Temperature	21.3

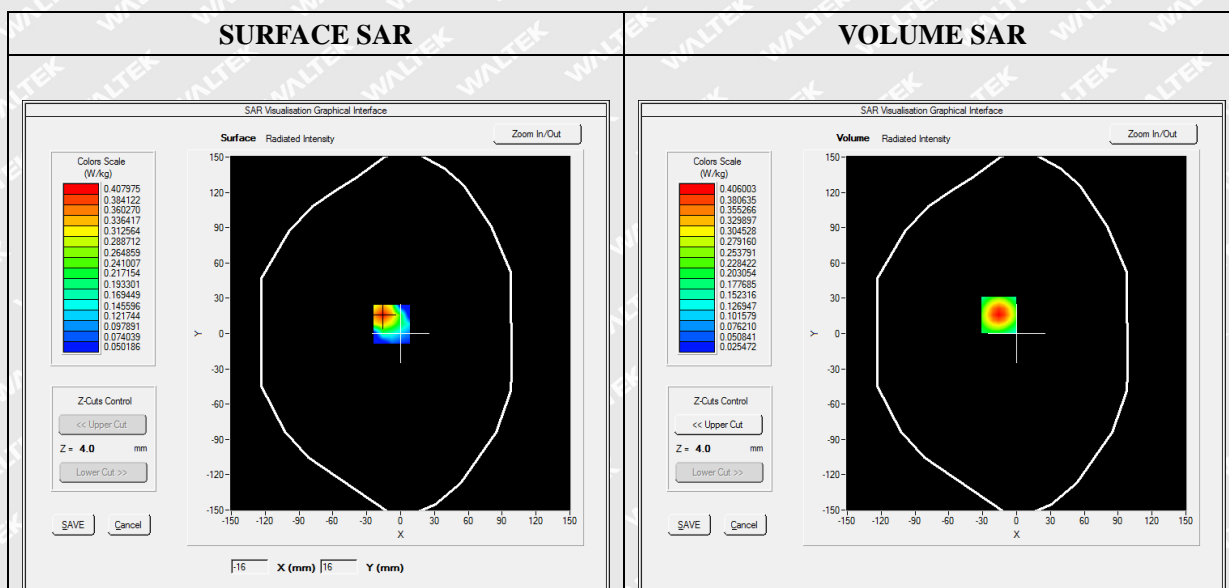




Maximum location: X=-16.00, Y=16.00

SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.201896
SAR 1g (W/Kg)	0.373255

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6411	0.4060	0.2236	0.1247	0.0736

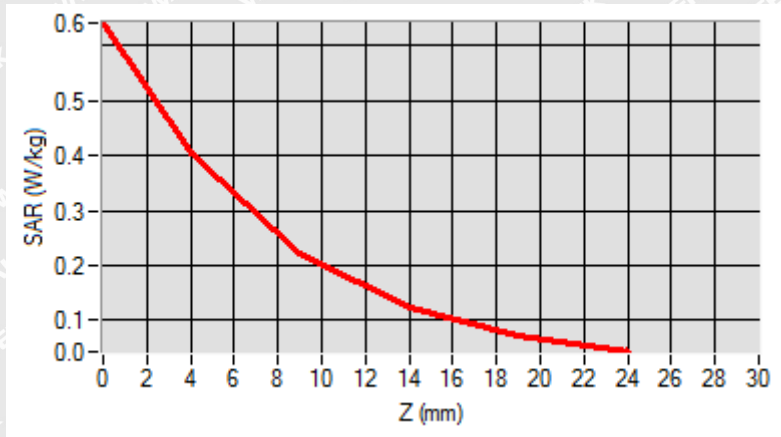

3D screen shot	Hot spot position



MEASUREMENT 102

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.024890
Conductivity (S/m)	1.371250
Power Variation (%)	1.374628
Ambient Temperature	21.1
Liquid Temperature	21.2

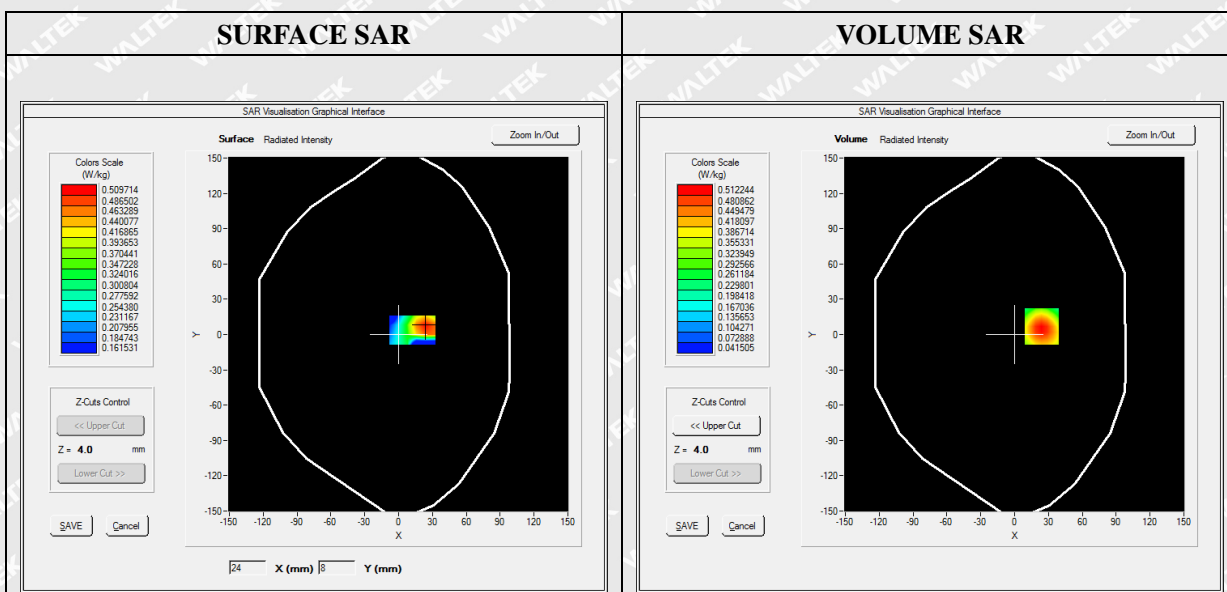


Maximum location: X=24.00, Y=7.00



SAR Peak: 0.75 W/kg

SAR 10g (W/Kg)	0.292874
SAR 1g (W/Kg)	0.482264

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7484	0.5122	0.3149	0.1957	0.1253

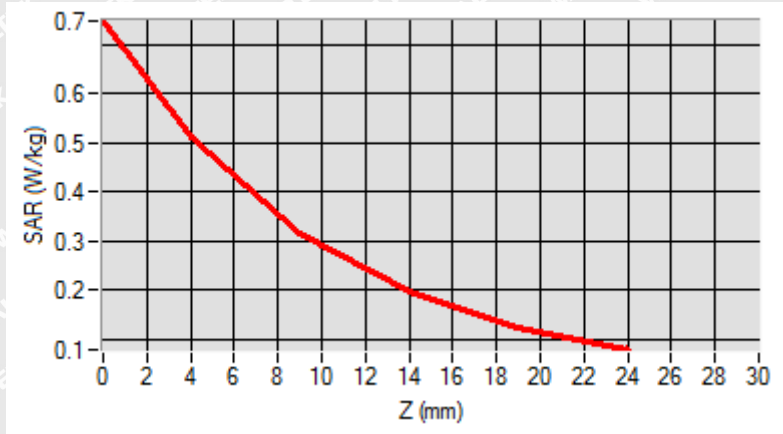

3D screen shot	Hot spot position



MEASUREMENT 105

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2560.000000
Relative Permittivity (real part)	38.631092
Conductivity (S/m)	1.857643
Power Variation (%)	-0.420000
Ambient Temperature	21.1
Liquid Temperature	21.2

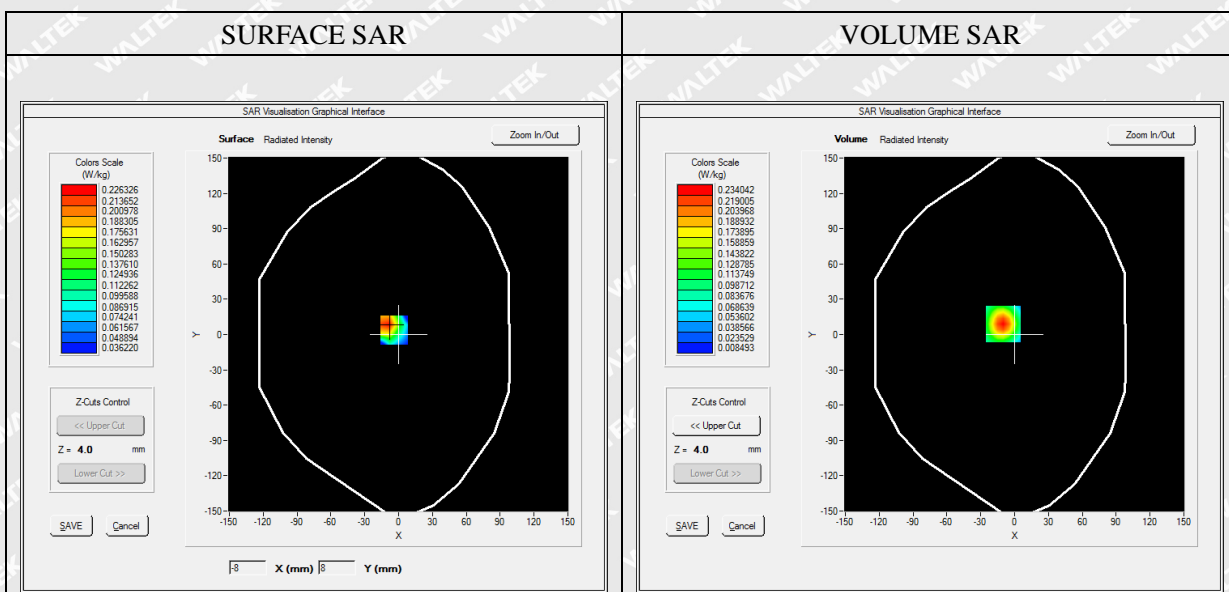


Maximum location: X=-10.00, Y=9.00



SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.104451
SAR 1g (W/Kg)	0.212076

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3983	0.2340	0.1151	0.0570	0.0310

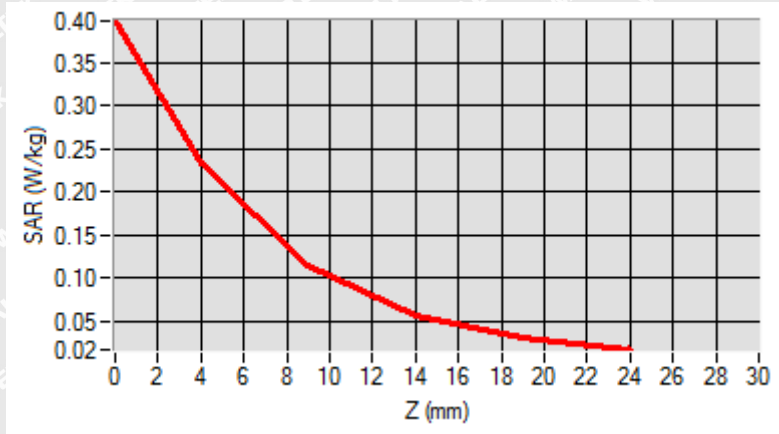

3D screen shot	Hot spot position



MEASUREMENT 109

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 12
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative Permittivity (real part)	42.110245
Conductivity (S/m)	0.861245
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2

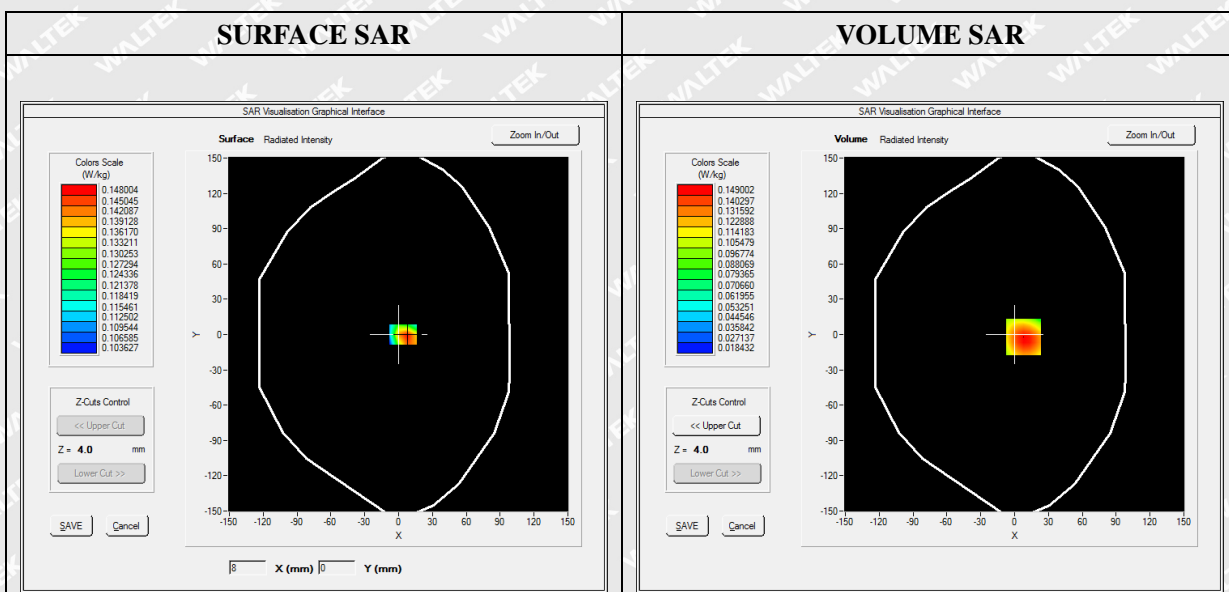


Maximum location: X=8.00, Y=-2.00



SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.101241
SAR 1g (W/Kg)	0.146674

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2046	0.1490	0.1010	0.0710	0.0526

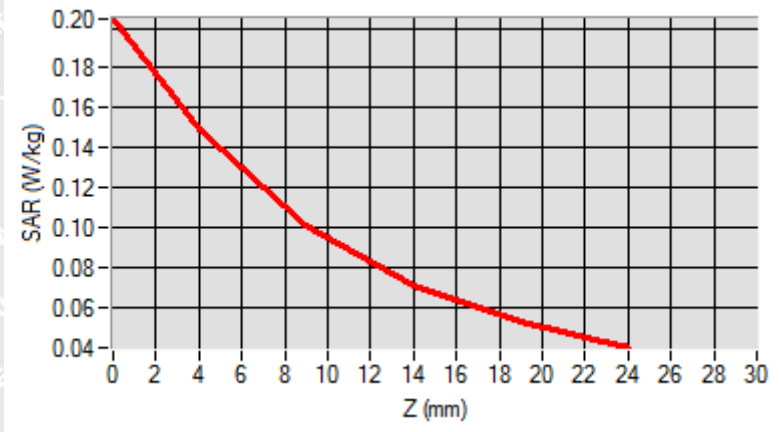

3D screen shot	Hot spot position



MEASUREMENT 114

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 13
Channels	QPSK, 10MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	782.000000
Relative Permittivity (real part)	41.900245
Conductivity (S/m)	0.866245
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2

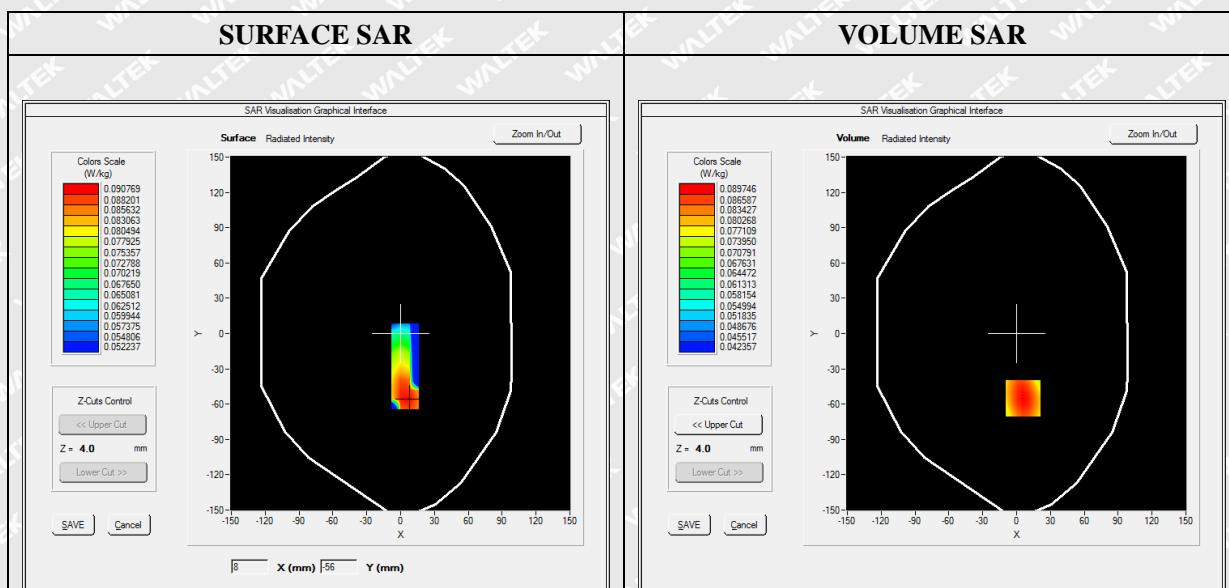




Maximum location: X=6.00, Y=-55.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.076420
SAR 1g (W/Kg)	0.089418

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0962	0.0897	0.0812	0.0724	0.0634

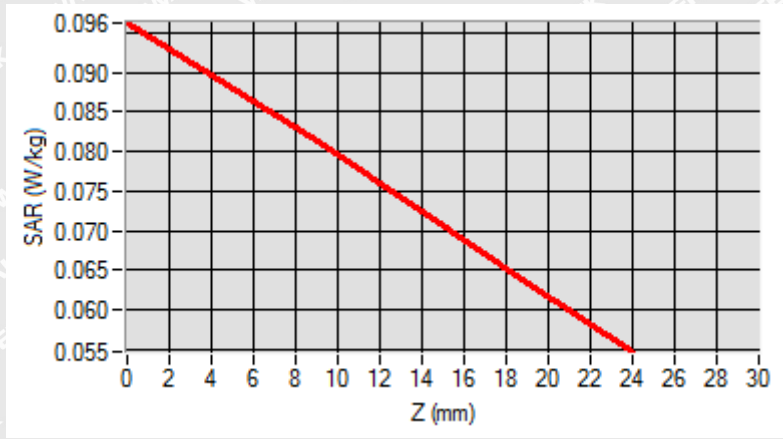

3D screen shot	Hot spot position



MEASUREMENT 118

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 17
Channels	QPSK, 10MHz, 50%RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	709.000000
Relative Permittivity (real part)	42.118668
Conductivity (S/m)	0.913696
Power Variation (%)	-1.480000
Ambient Temperature	21.1
Liquid Temperature	21.2


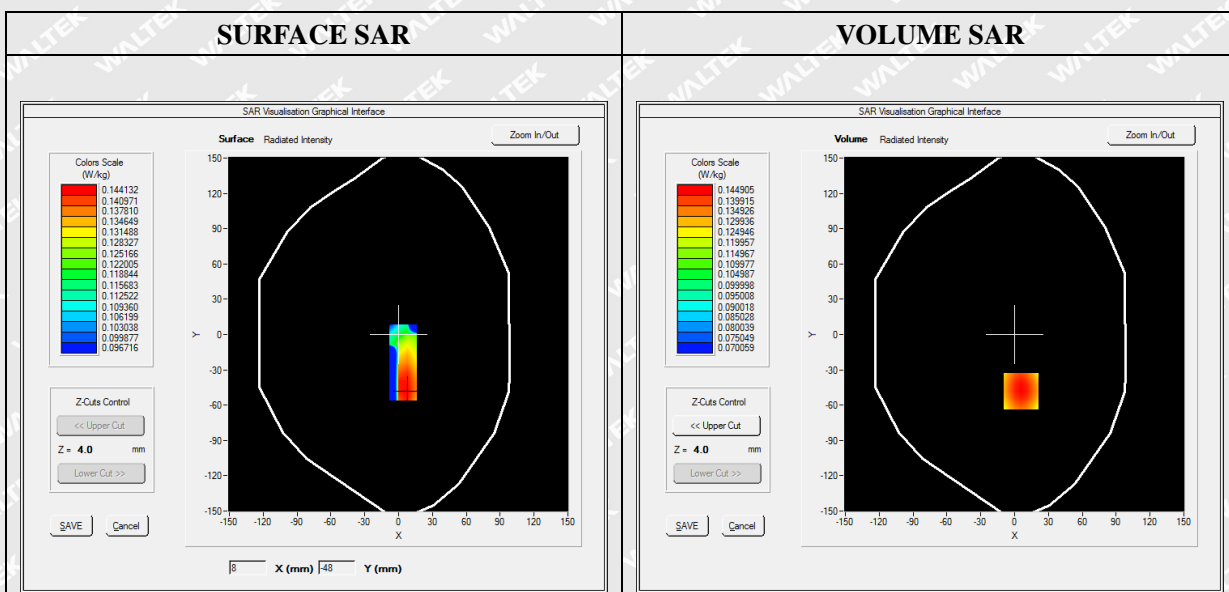


Maximum location: X=6.00, Y=-48.00

**SAR Peak: 0.16 W/kg**

SAR 10g (W/Kg)	0.122265
SAR 1g (W/Kg)	0.144317

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1575	0.1449	0.1291	0.1135	0.0982

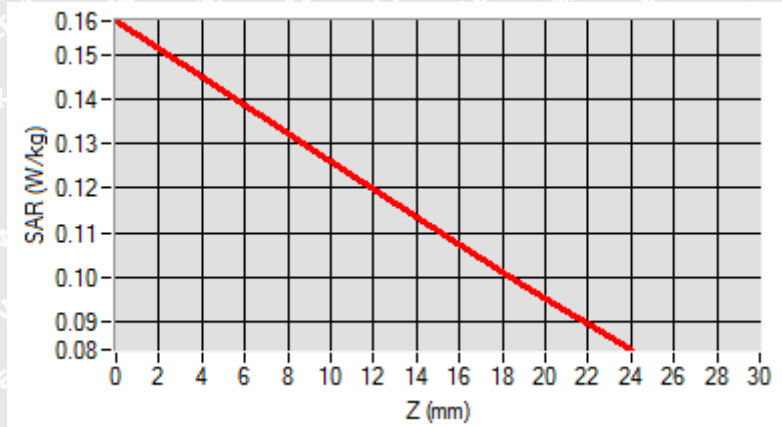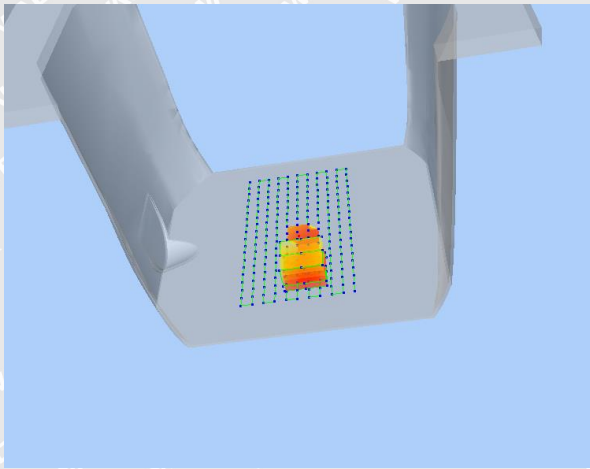**3D screen shot****Hot spot position**



MEASUREMENT 123

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 41
Channels	QPSK, 20MHz, 50%RB,High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2645.000000
Relative Permittivity (real part)	41.480000
Conductivity (S/m)	0.977301
Power Variation (%)	0.520000
Ambient Temperature	21.1
Liquid Temperature	21.2

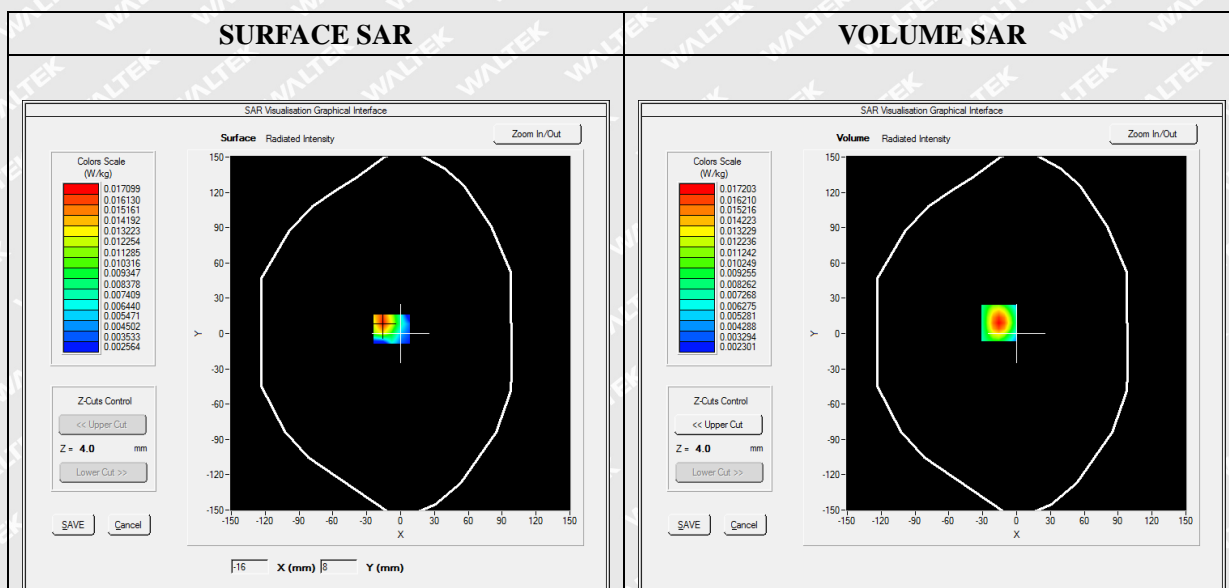




Maximum location: X=-16.00, Y=9.00

SAR Peak: 0.03 W/kg

SAR 10g (W/Kg)	0.008613
SAR 1g (W/Kg)	0.015836

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0282	0.0172	0.0092	0.0053	0.0037

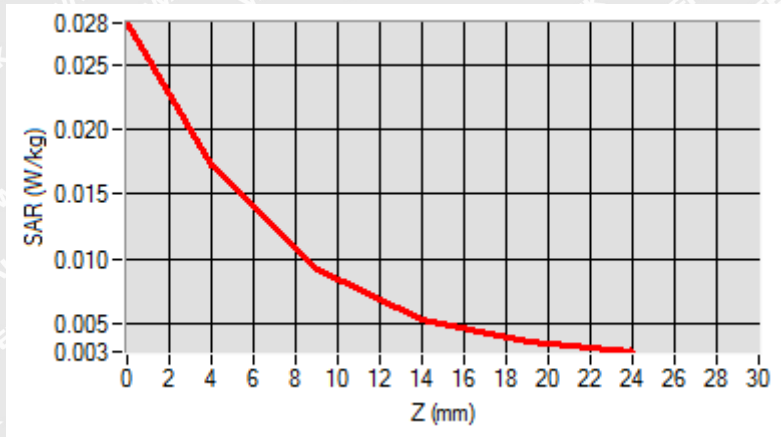

<p>3D screen shot</p>	<p>Hot spot position</p>



MEASUREMENT 125

Type: Phone measurement (Complete)

Date of measurement: 2021-05-29

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.2GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5240.000000
Relative Permittivity (real part)	35.612911
Conductivity (S/m)	4.871483
Power Variation (%)	0.542660
Ambient Temperature	22.0
Liquid Temperature	22.3

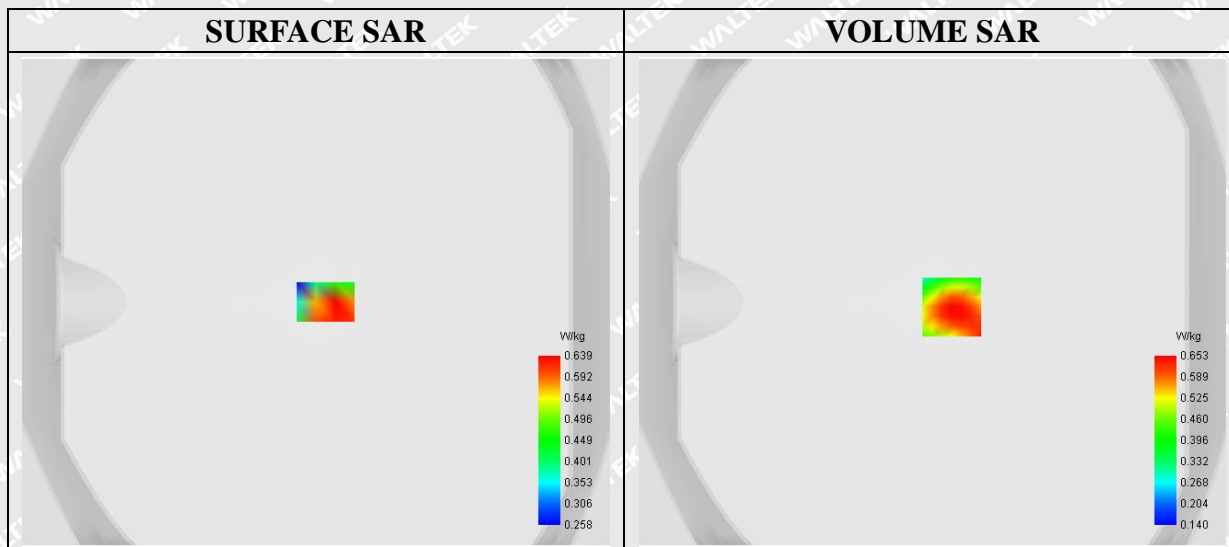

Maximum location: X=8.00, Y=-2.00




D. SAR 1g & 10g


SAR 10g (W/Kg)	0.300280
SAR 1g (W/Kg)	0.490420

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	0.8409	0.6528	0.5113	0.4052	0.3286	0.2731	0.2324	0.2017	0.1775	

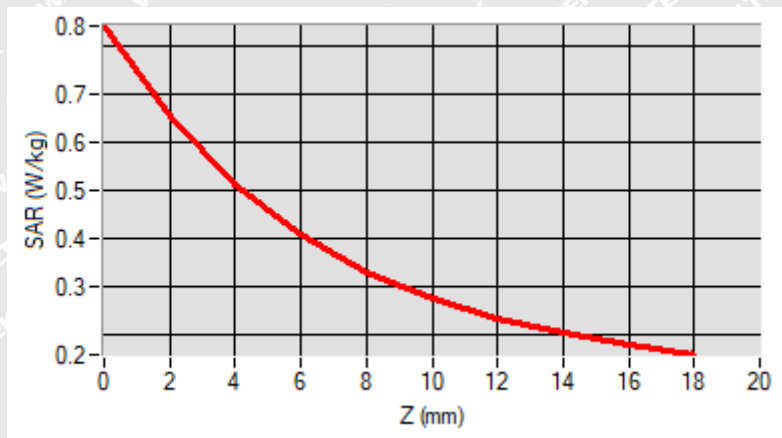

F. 3D Image

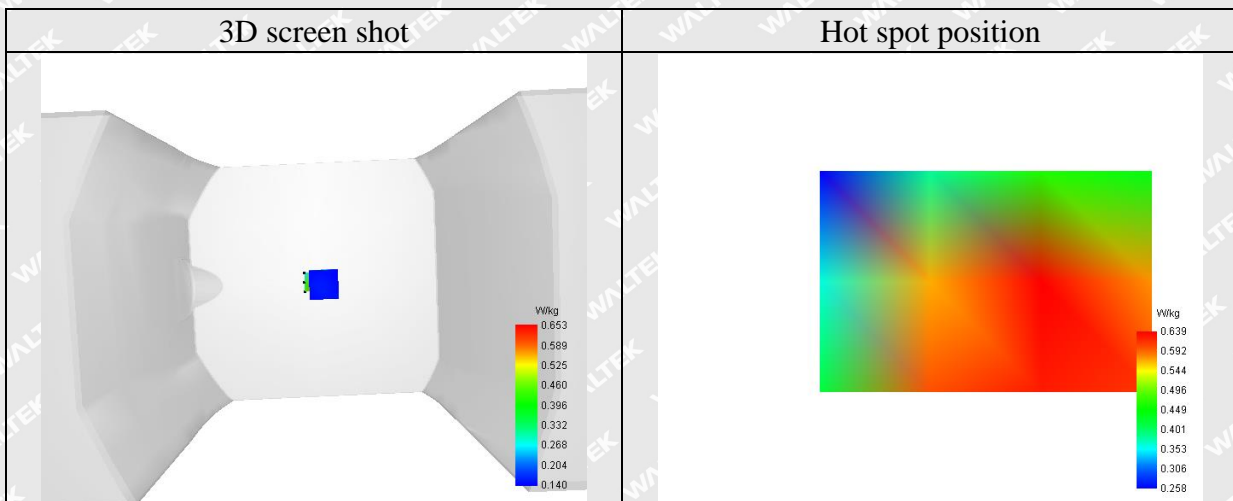



MEASUREMENT 130

Type: Phone measurement (Complete)

Date of measurement: 2021-05-29

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.8GHz)_ 802.11n (HT20)
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5825.000000
Relative Permittivity (real part)	35.275002
Conductivity (S/m)	16.370001
Power Variation (%)	5.297514
Ambient Temperature	22.0
Liquid Temperature	22.3

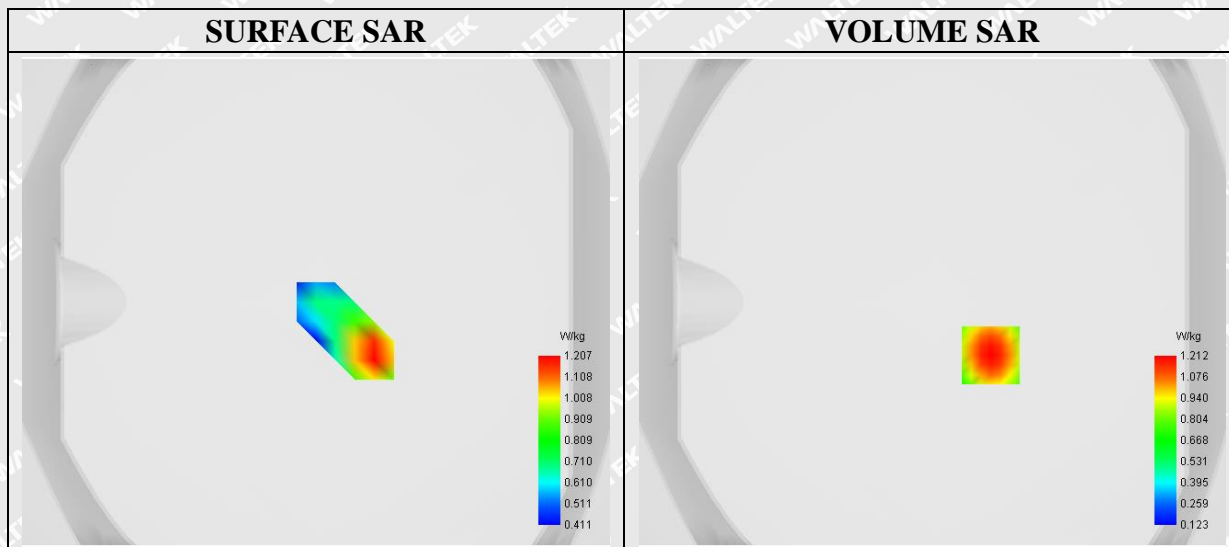

Maximum location: X=24.00, Y=-22.00




D. SAR 1g & 10g


SAR 10g (W/Kg)	0.427674
SAR 1g (W/Kg)	0.827359

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	1.7120	1.2124	0.8562	0.6065	0.4398	0.3288	0.2543	0.2031	0.1660

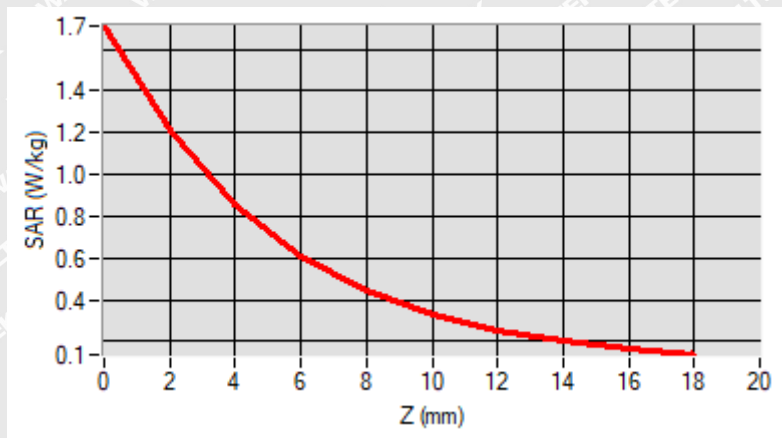

F. 3D Image

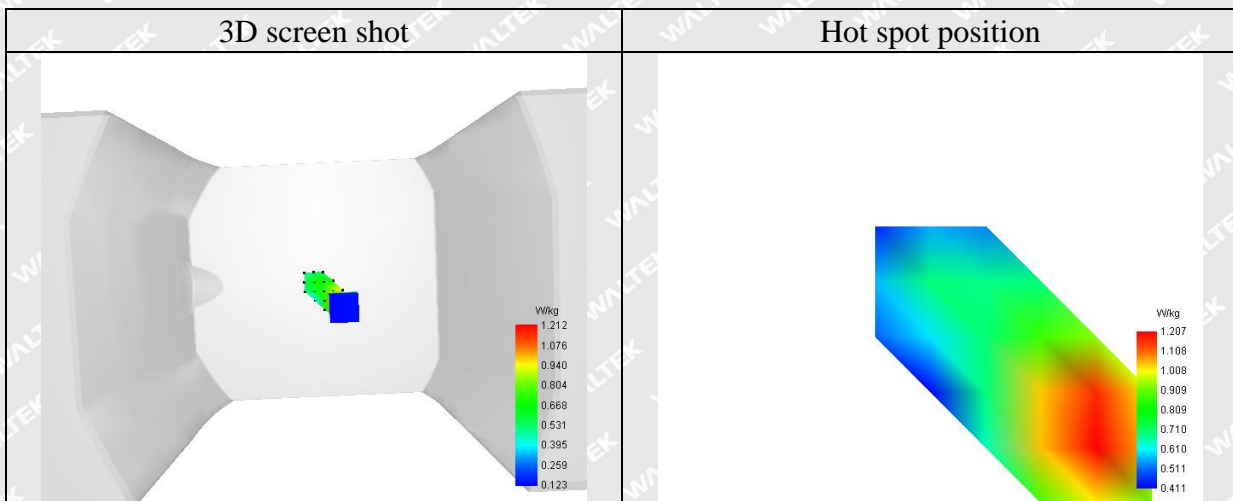



MEASUREMENT 131

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GPRS850_2TX
Channels	Middle
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	836.599976
Relative Permittivity (real part)	41.550823
Conductivity (S/m)	0.899707
Power Variation (%)	-3.720000
Ambient Temperature	21.1
Liquid Temperature	21.3

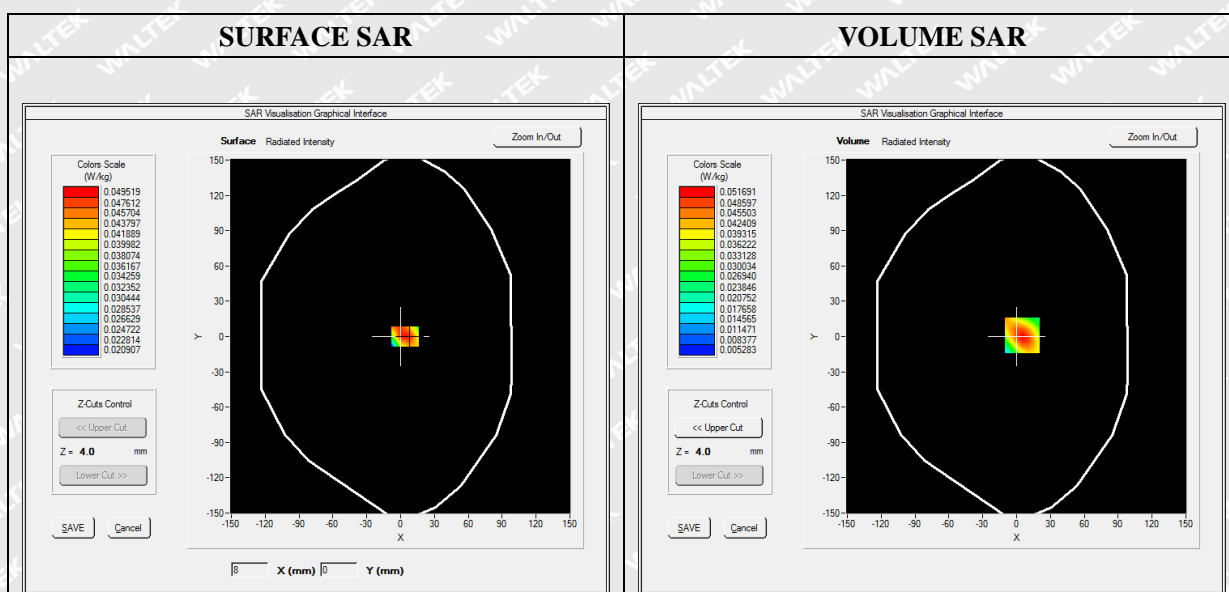


Maximum location: X=5.00, Y=1.00



SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.029299
SAR 1g (W/Kg)	0.048370

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0798	0.0517	0.0300	0.0186	0.0129

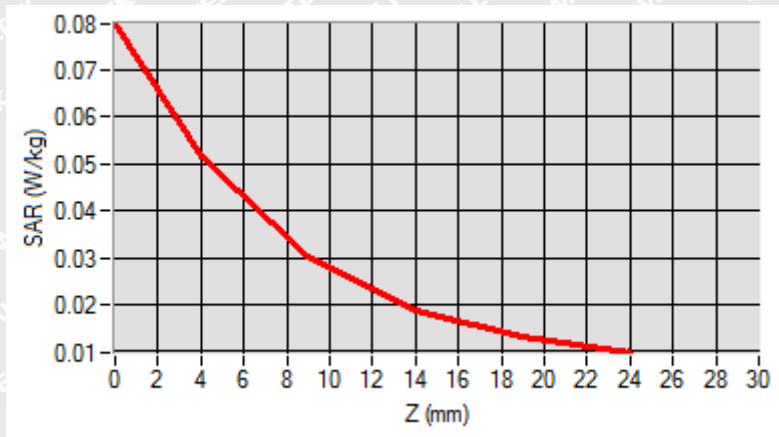

3D screen shot	Hot spot position



MEASUREMENT 140

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 11 minutes 48 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	GPRS1900_2TX
Channels	High
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1909.800000
Relative Permittivity (real part)	40.000000
Conductivity (S/m)	1.400023
Power Variation (%)	-1.080000
Ambient Temperature	21.1
Liquid Temperature	21.3

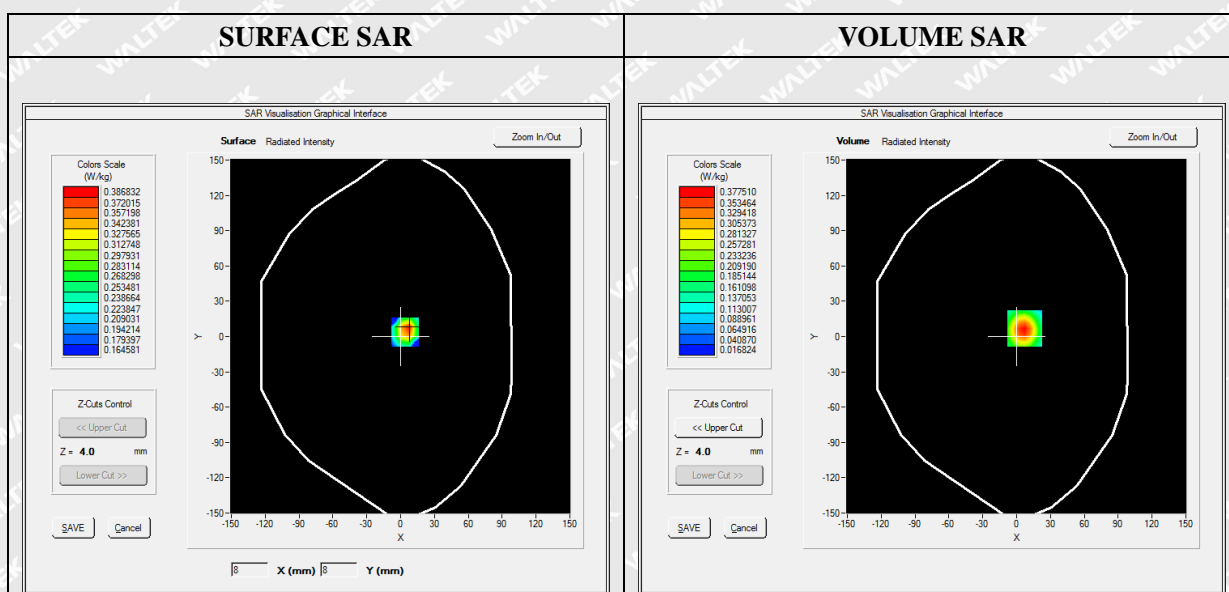


Maximum location: X=7.00, Y=7.00



SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.180915
SAR 1g (W/Kg)	0.346780

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6186	0.3775	0.1978	0.1063	0.0628

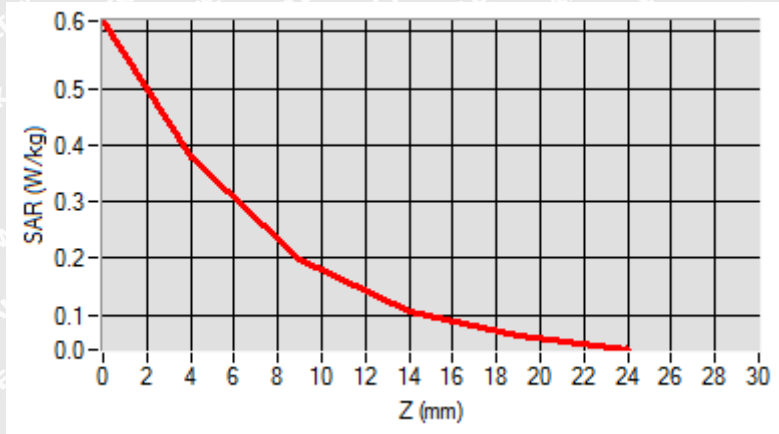

3D screen shot	Hot spot position



MEASUREMENT 142

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1907.600000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.399949
Power Variation (%)	-0.550000
Ambient Temperature	21.1
Liquid Temperature	21.3

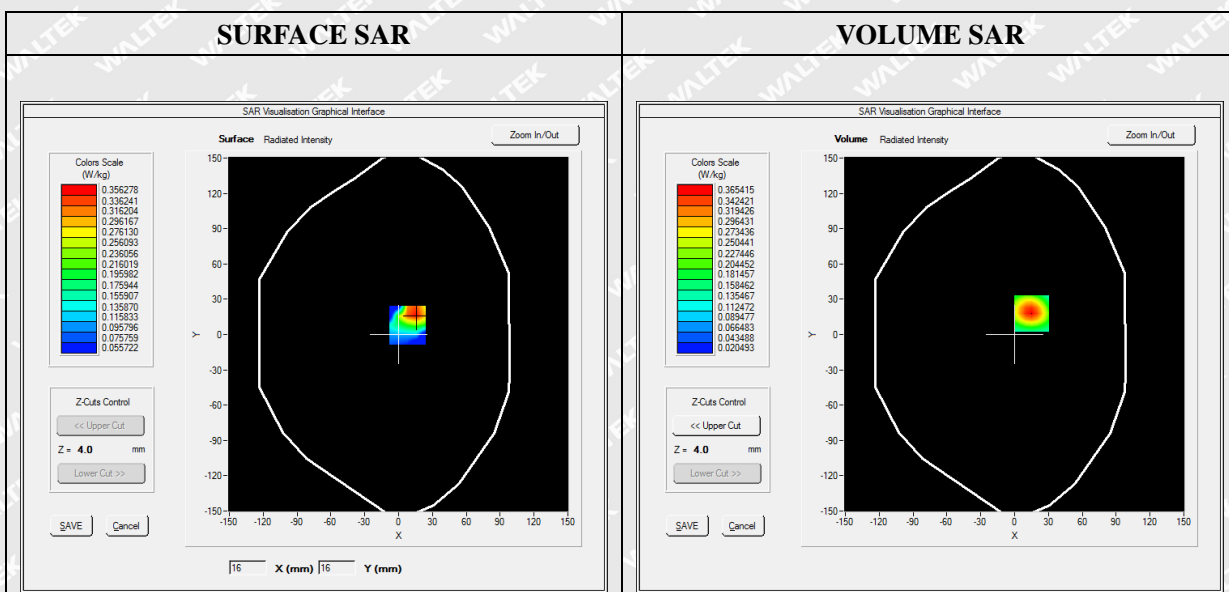


Maximum location: X=15.00, Y=18.00



SAR Peak: 0.58 W/kg

SAR 10g (W/Kg)	0.181293
SAR 1g (W/Kg)	0.337795

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5800	0.3654	0.1995	0.1098	0.0639

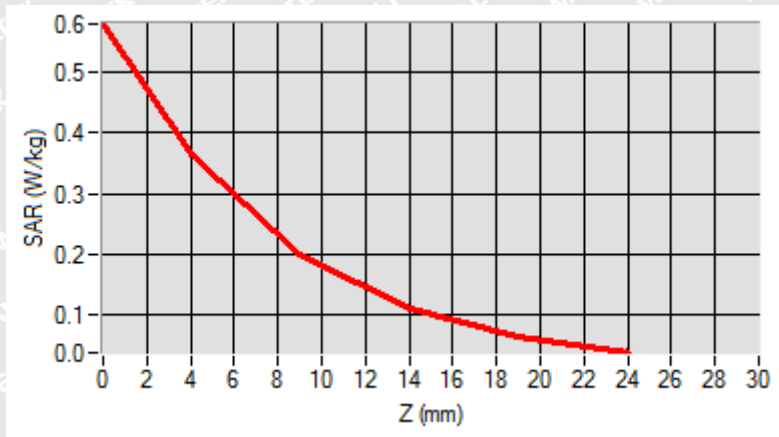

3D screen shot	Hot spot position



MEASUREMENT 146

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative Permittivity (real part)	41.540470
Conductivity (S/m)	0.899780
Power Variation (%)	-0.960000
Ambient Temperature	21.1
Liquid Temperature	21.3

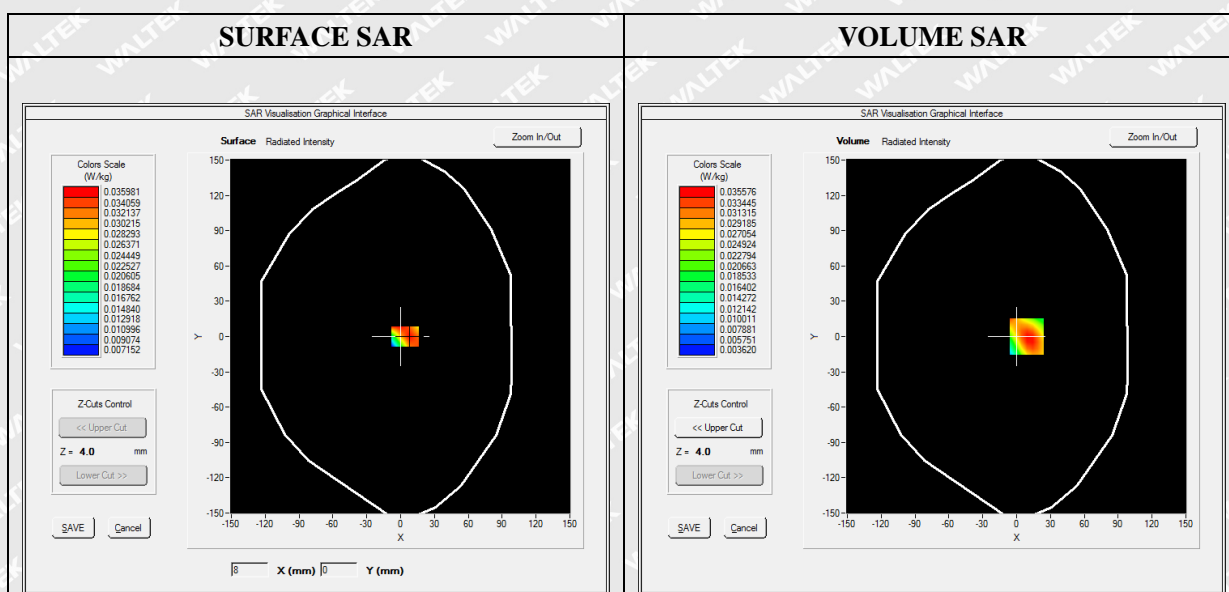


Maximum location: X=9.00, Y=0.00

**SAR Peak: 0.05 W/kg**

SAR 10g (W/Kg)	0.020784
SAR 1g (W/Kg)	0.033663

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0524	0.0356	0.0219	0.0141	0.0098

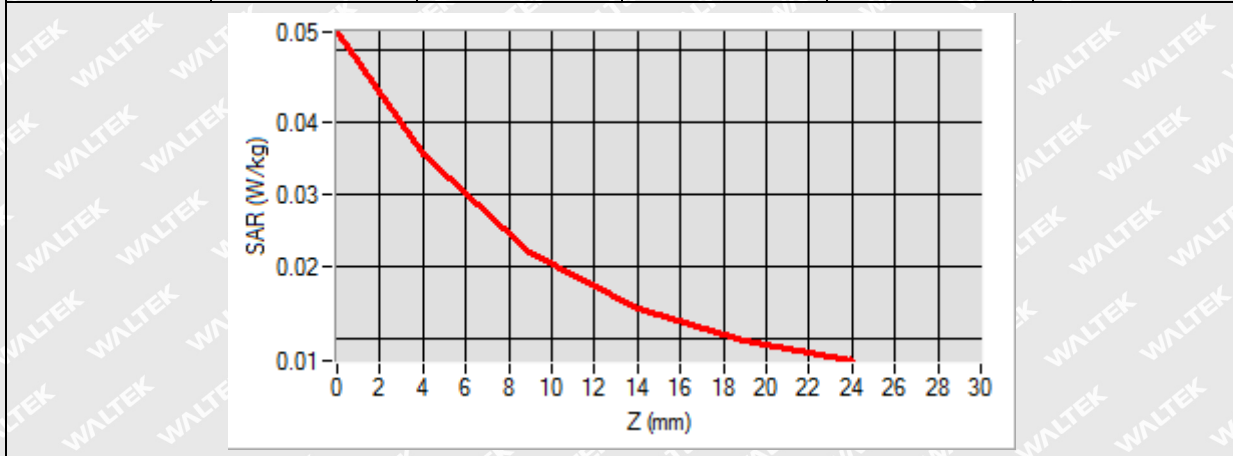

3D screen shot	Hot spot position



MEASUREMENT 155

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 2
Channels	QPSK, 20MHz, 1RB,High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	40.000000
Conductivity (S/m)	1.399839
Power Variation (%)	-0.510000
Ambient Temperature	21.1
Liquid Temperature	21.3

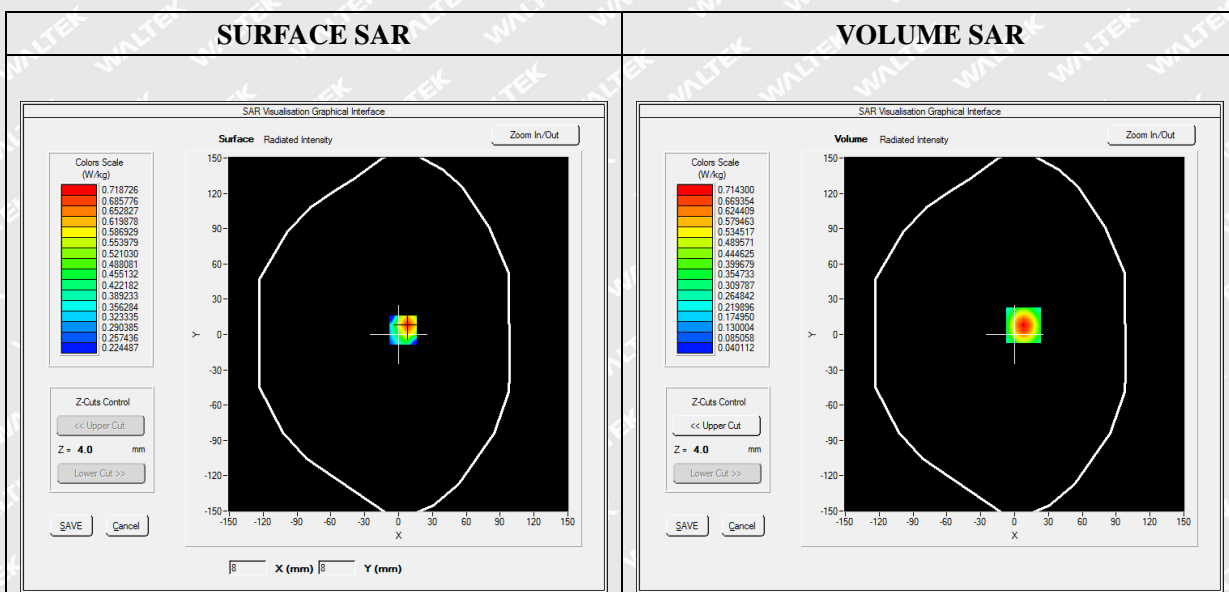


Maximum location: X=8.00, Y=8.00




SAR Peak: 1.11 W/kg

SAR 10g (W/Kg)	0.354435
SAR 1g (W/Kg)	0.652850


Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1123	0.7143	0.4020	0.2296	0.1387

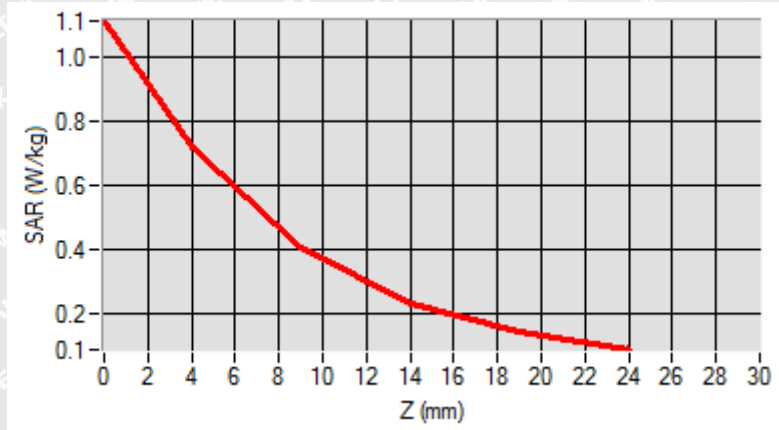

3D screen shot

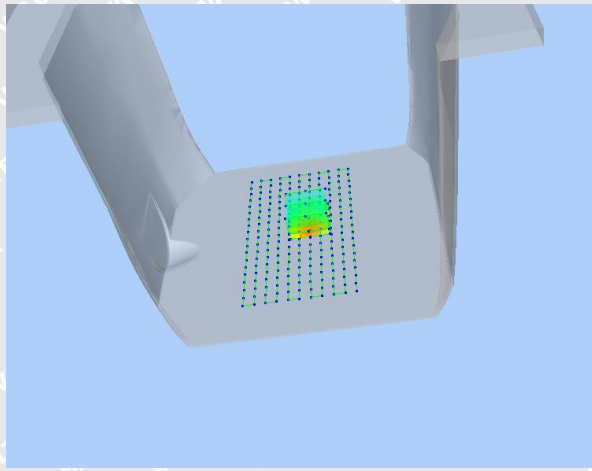

Hot spot position

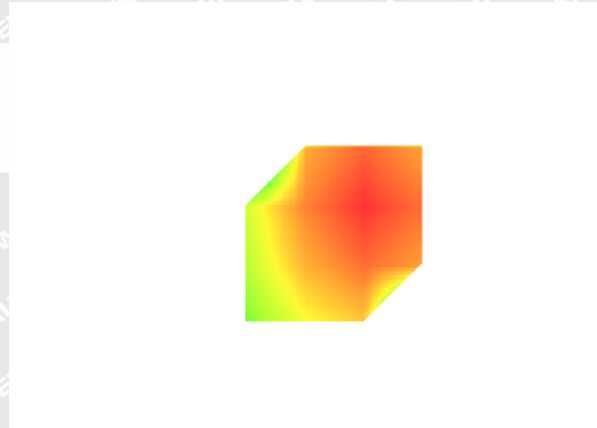



MEASUREMENT 162

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results




Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.024890
Conductivity (S/m)	1.371250
Power Variation (%)	1.374628
Ambient Temperature	21.1
Liquid Temperature	21.2

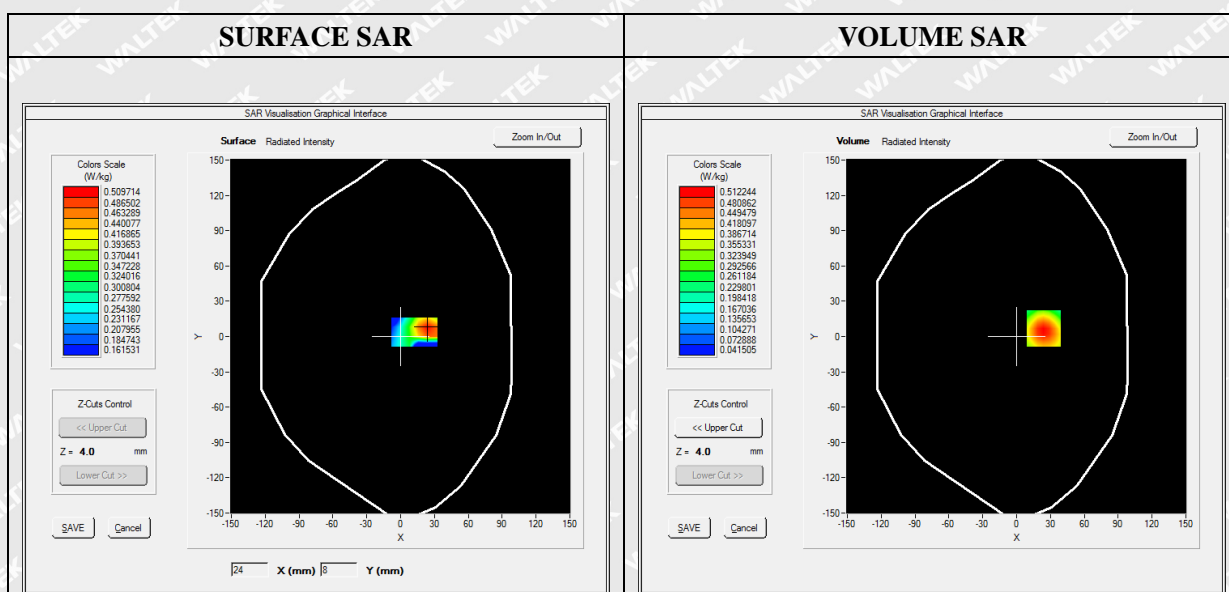

**SAR Peak: 0.75 W/kg**

SAR 10g (W/Kg)	0.292874
SAR 1g (W/Kg)	0.482264

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7484	0.5122	0.3149	0.1957	0.1253

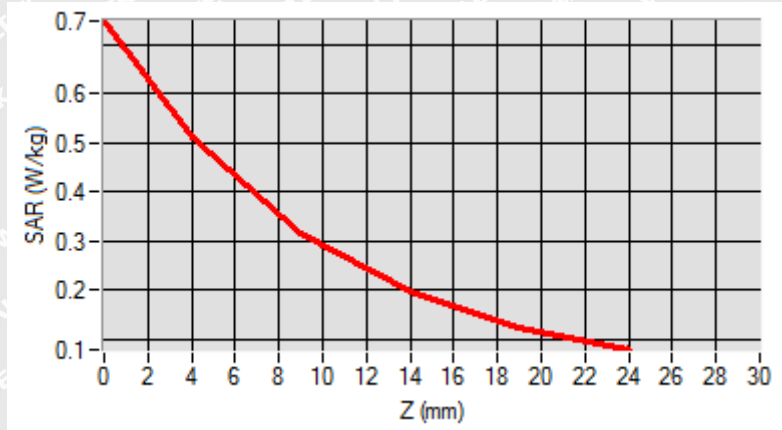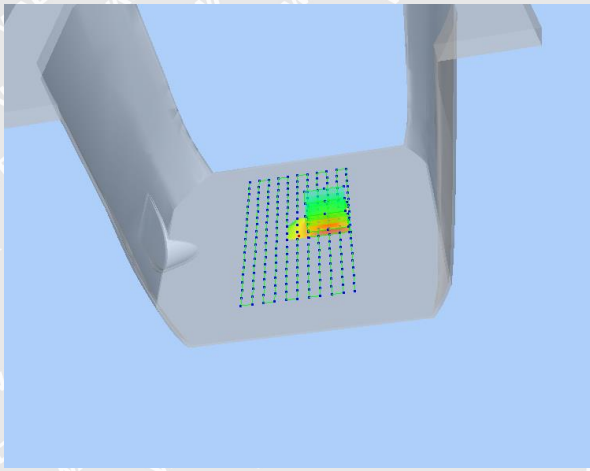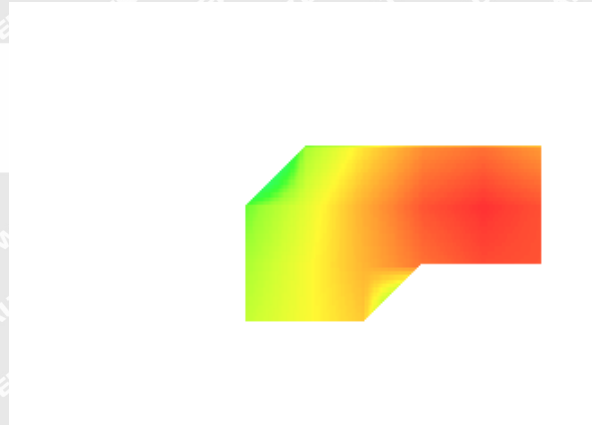**3D screen shot****Hot spot position**



MEASUREMENT 175

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2560.000000
Relative Permittivity (real part)	38.631092
Conductivity (S/m)	1.857643
Power Variation (%)	-0.420000
Ambient Temperature	21.1
Liquid Temperature	21.2



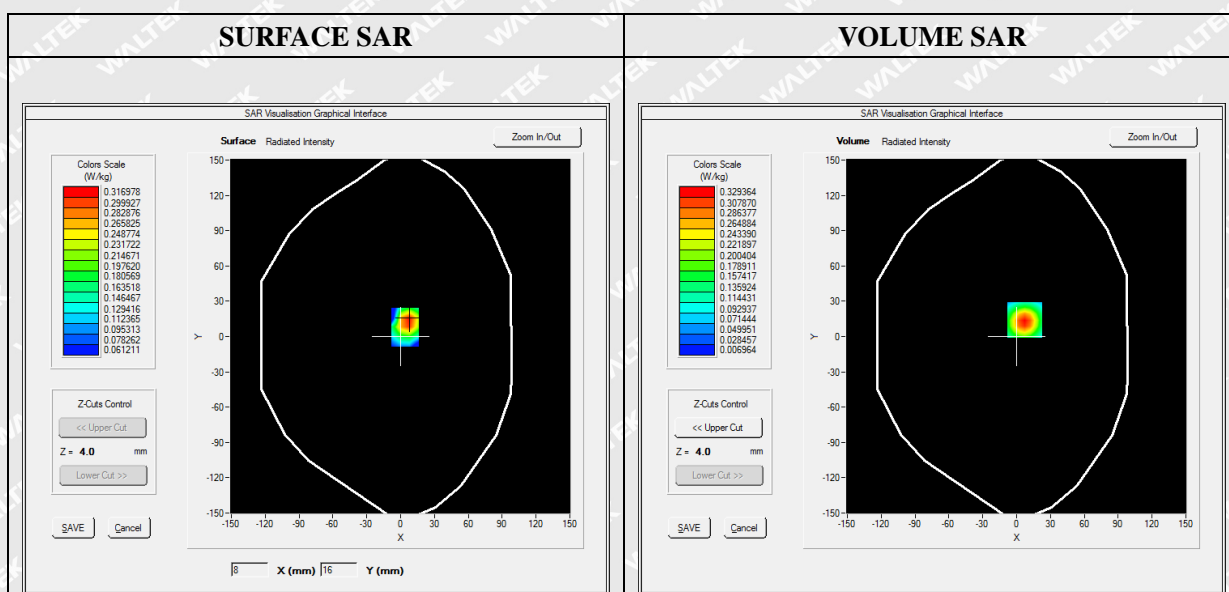


Maximum location: X=7.00, Y=14.00

**SAR Peak: 0.56 W/kg**

SAR 10g (W/Kg)	0.144344
SAR 1g (W/Kg)	0.298611

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5598	0.3294	0.1613	0.0783	0.0404

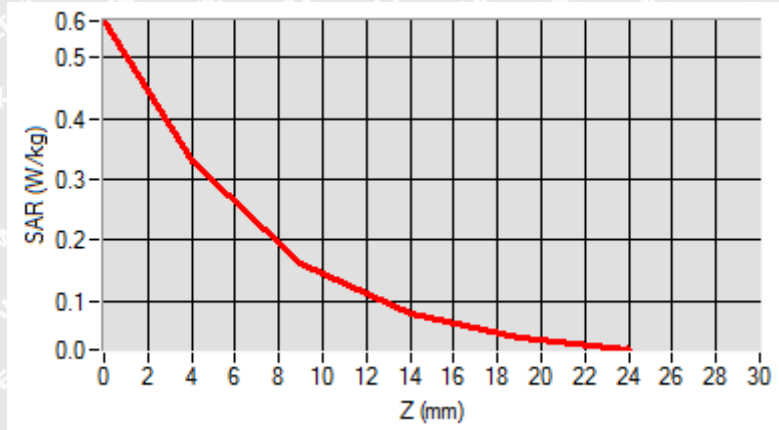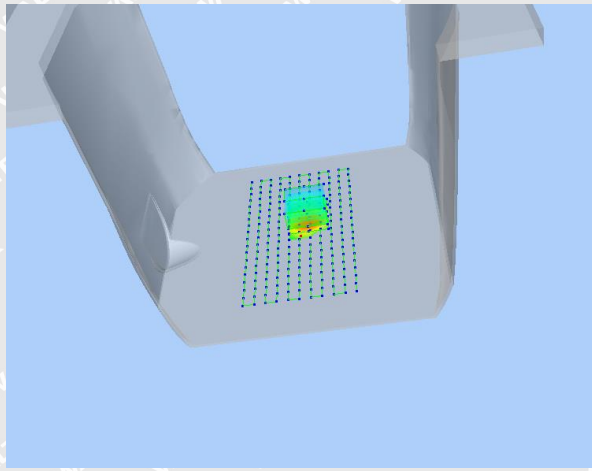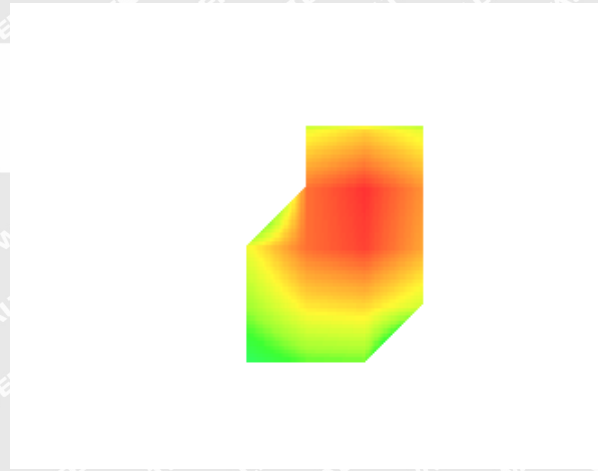**3D screen shot****Hot spot position**



MEASUREMENT 181

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 12
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative Permittivity (real part)	42.110245
Conductivity (S/m)	0.861245
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2

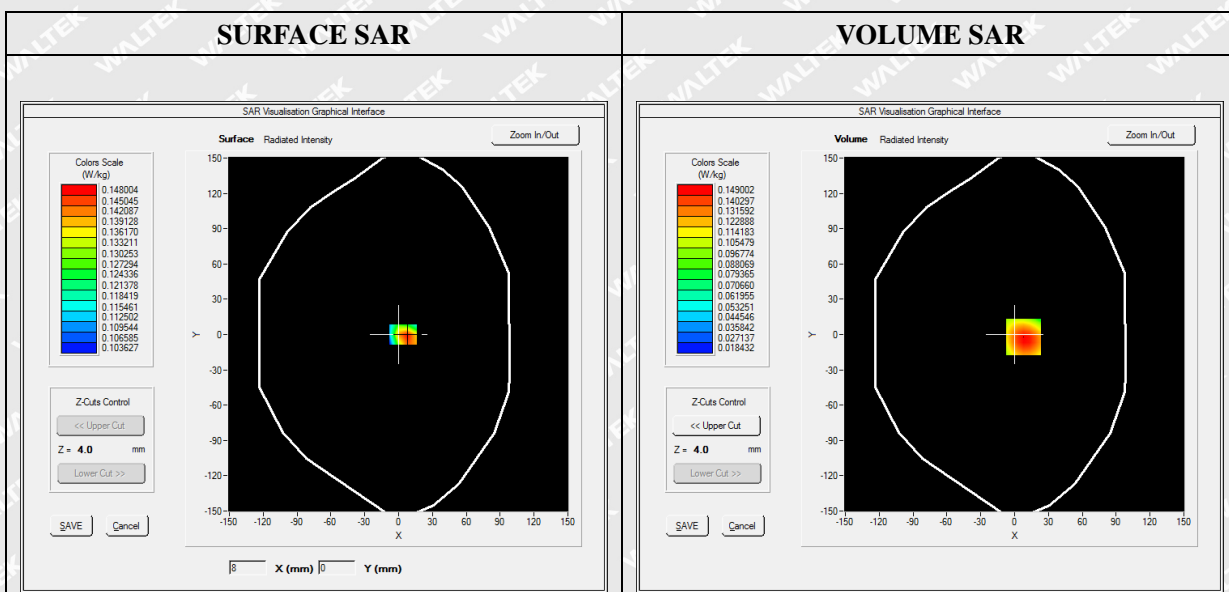


Maximum location: X=8.00, Y=-2.00

**SAR Peak: 0.21 W/kg**

SAR 10g (W/Kg)	0.101241
SAR 1g (W/Kg)	0.146674

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2046	0.1490	0.1010	0.0710	0.0526

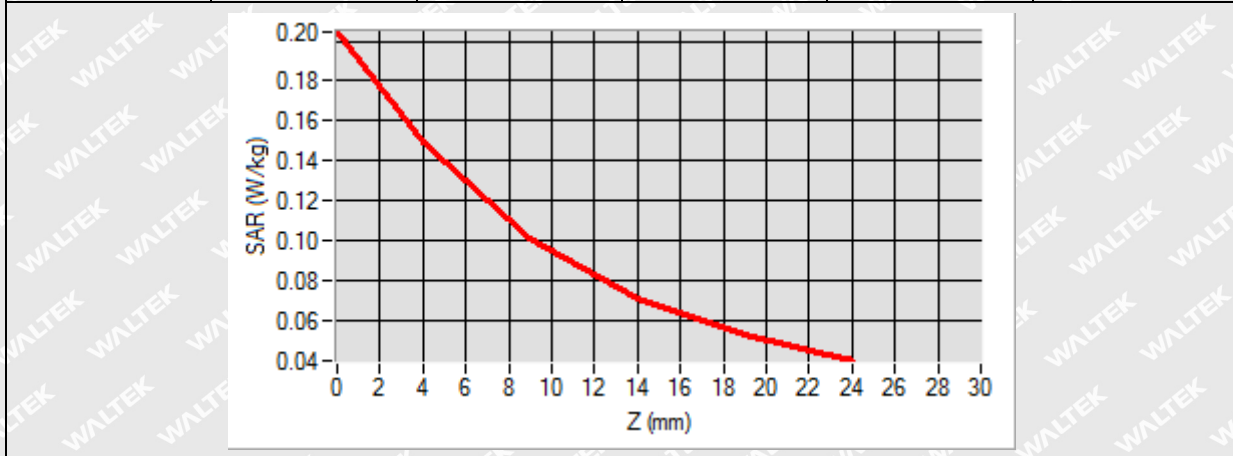

3D screen shot	Hot spot position



MEASUREMENT 191

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 13
Channels	QPSK, 10MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	782.000000
Relative Permittivity (real part)	41.900245
Conductivity (S/m)	0.866245
Power Variation (%)	0.924535
Ambient Temperature	21.1
Liquid Temperature	21.2

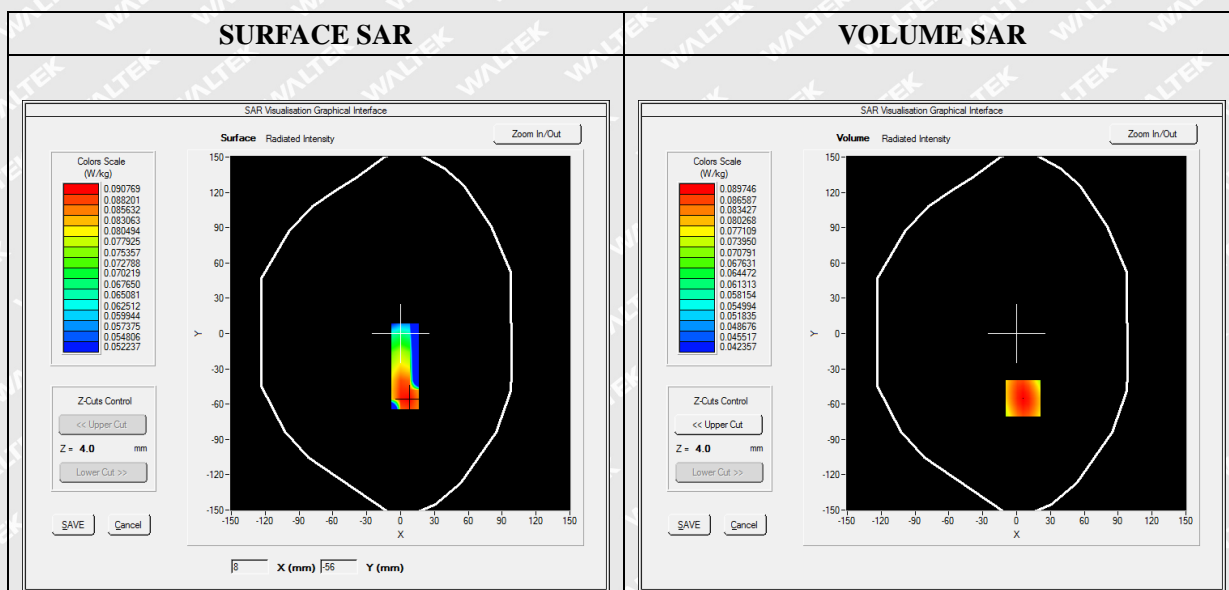




Maximum location: X=6.00, Y=-55.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.076420
SAR 1g (W/Kg)	0.089418

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0962	0.0897	0.0812	0.0724	0.0634

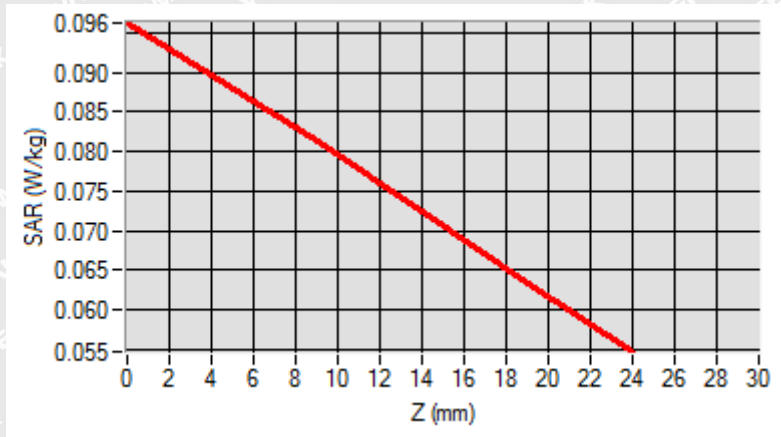

3D screen shot	Hot spot position



MEASUREMENT 201

Type: Phone measurement (Complete)

Date of measurement: 2021-05-26

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 17
Channels	QPSK, 10MHz, 50%RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	709.000000
Relative Permittivity (real part)	42.118668
Conductivity (S/m)	0.913696
Power Variation (%)	-1.480000
Ambient Temperature	21.1
Liquid Temperature	21.2


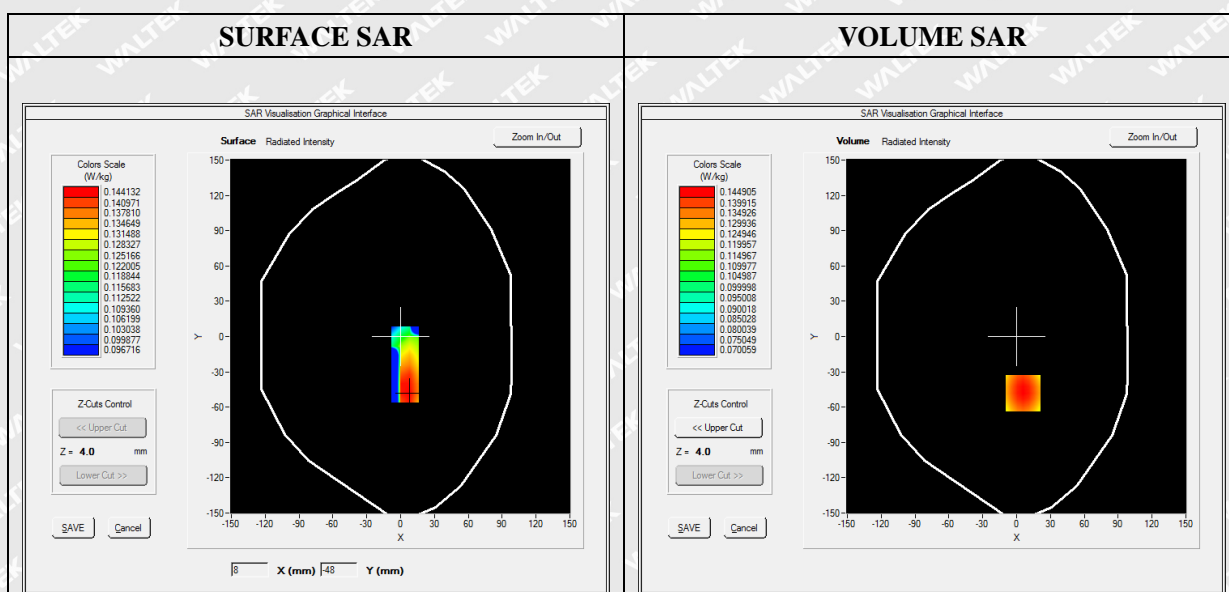


Maximum location: X=6.00, Y=-48.00

**SAR Peak: 0.16 W/kg**

SAR 10g (W/Kg)	0.122265
SAR 1g (W/Kg)	0.144317

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1575	0.1449	0.1291	0.1135	0.0982

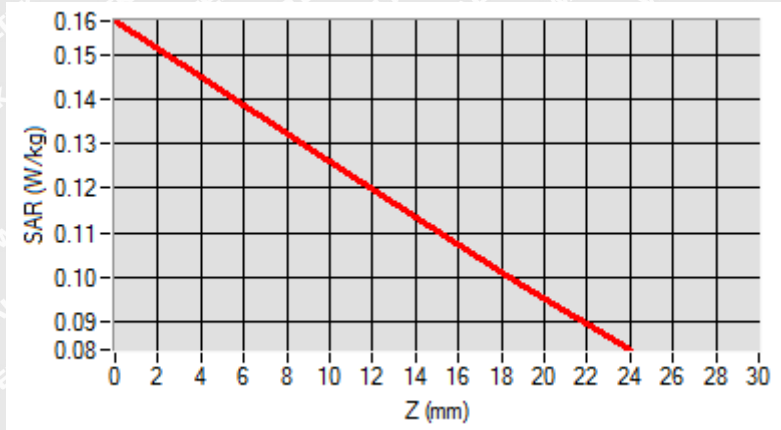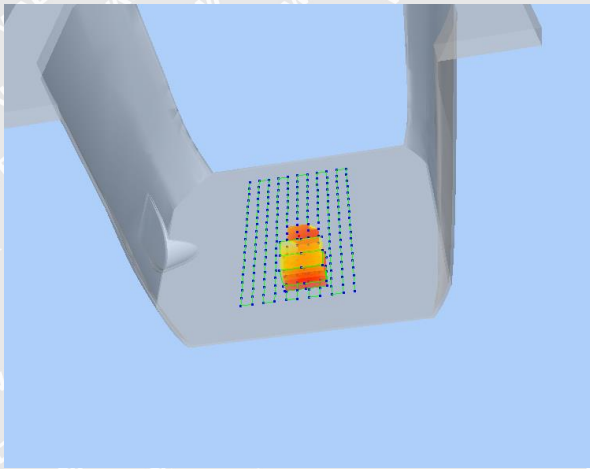**3D screen shot****Hot spot position**



MEASUREMENT 211

Type: Phone measurement (Complete)

Date of measurement: 2021-05-28

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 41
Channels	QPSK, 20MHz, 50%RB,High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2645.000000
Relative Permittivity (real part)	41.480000
Conductivity (S/m)	0.977301
Power Variation (%)	0.520000
Ambient Temperature	21.1
Liquid Temperature	21.2

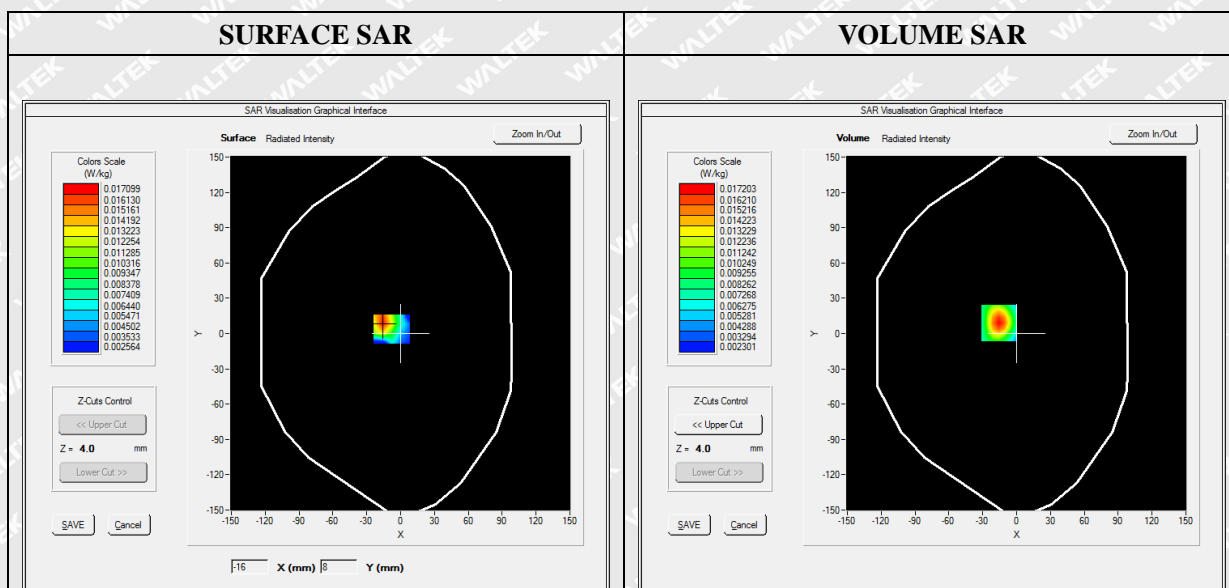




Maximum location: X=-16.00, Y=9.00

SAR Peak: 0.03 W/kg

SAR 10g (W/Kg)	0.008613
SAR 1g (W/Kg)	0.015836

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0282	0.0172	0.0092	0.0053	0.0037

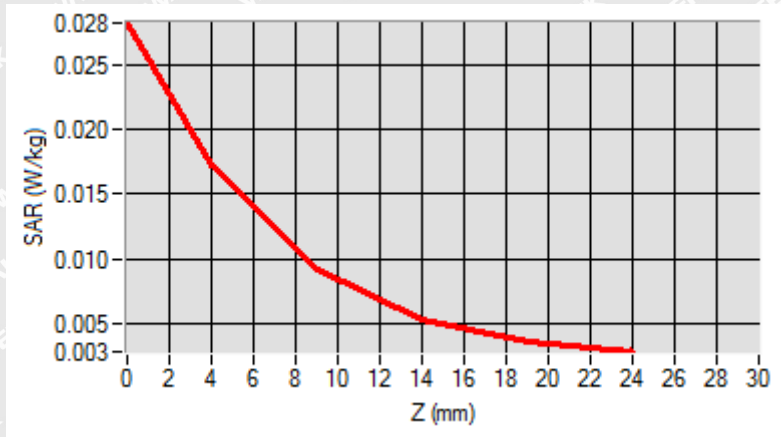

3D screen shot	Hot spot position



MEASUREMENT 224

Type: Phone measurement (Complete)

Date of measurement: 2021-05-29

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.2GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5240.000000
Relative Permittivity (real part)	35.612911
Conductivity (S/m)	4.871483
Power Variation (%)	0.542660
Ambient Temperature	22.0
Liquid Temperature	22.3

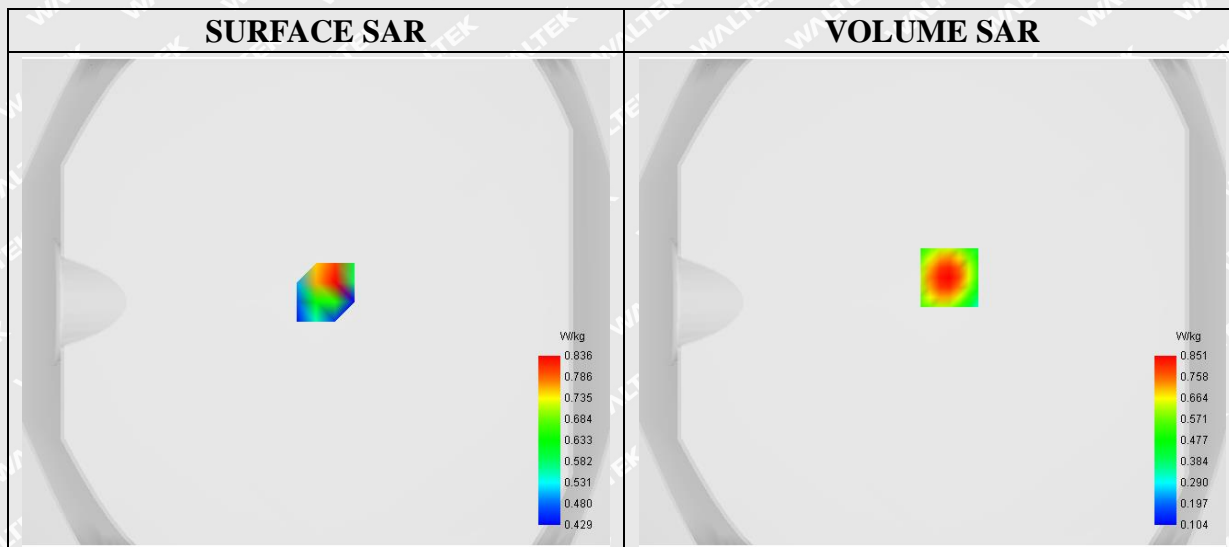

Maximum location: X=7.00, Y=10.00




D. SAR 1g & 10g


SAR 10g (W/Kg)	0.316839
SAR 1g (W/Kg)	0.588385

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	1.1862	0.8513	0.6127	0.4457	0.3349	0.2618	0.2135	0.1812	0.1584

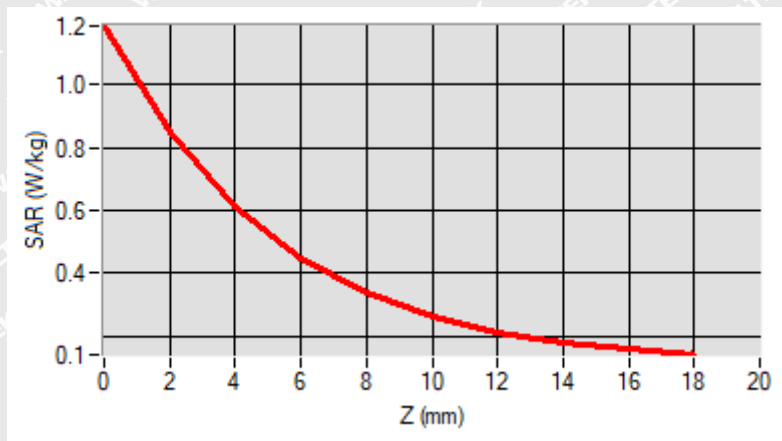

F. 3D Image

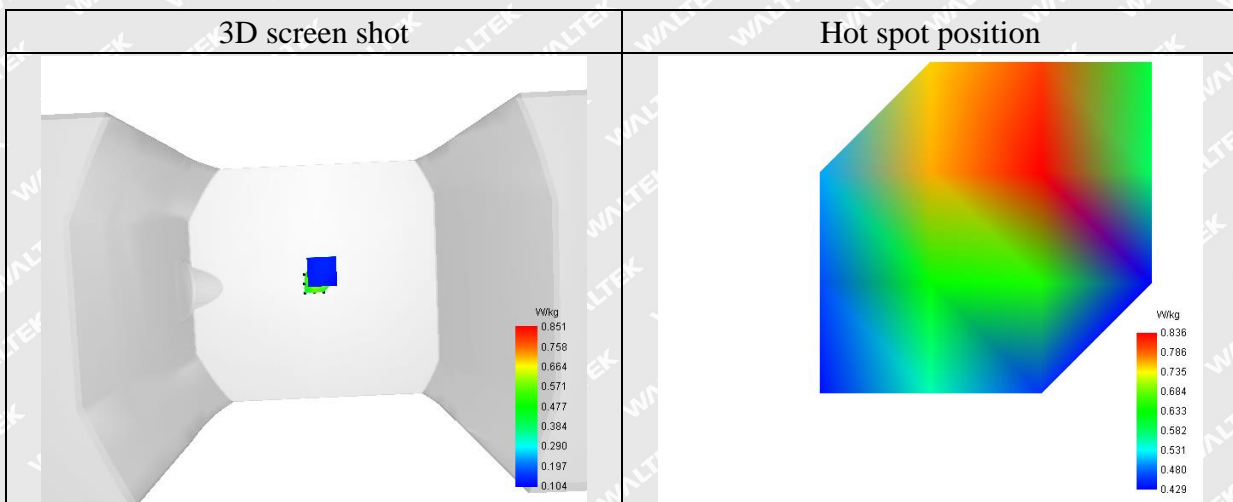



MEASUREMENT 230

Type: Phone measurement (Complete)

Date of measurement: 2021-05-29

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.8GHz)_ 802.11n (HT20)
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5825.000000
Relative Permittivity (real part)	35.275002
Conductivity (S/m)	16.370001
Power Variation (%)	5.297514
Ambient Temperature	22.0
Liquid Temperature	22.3

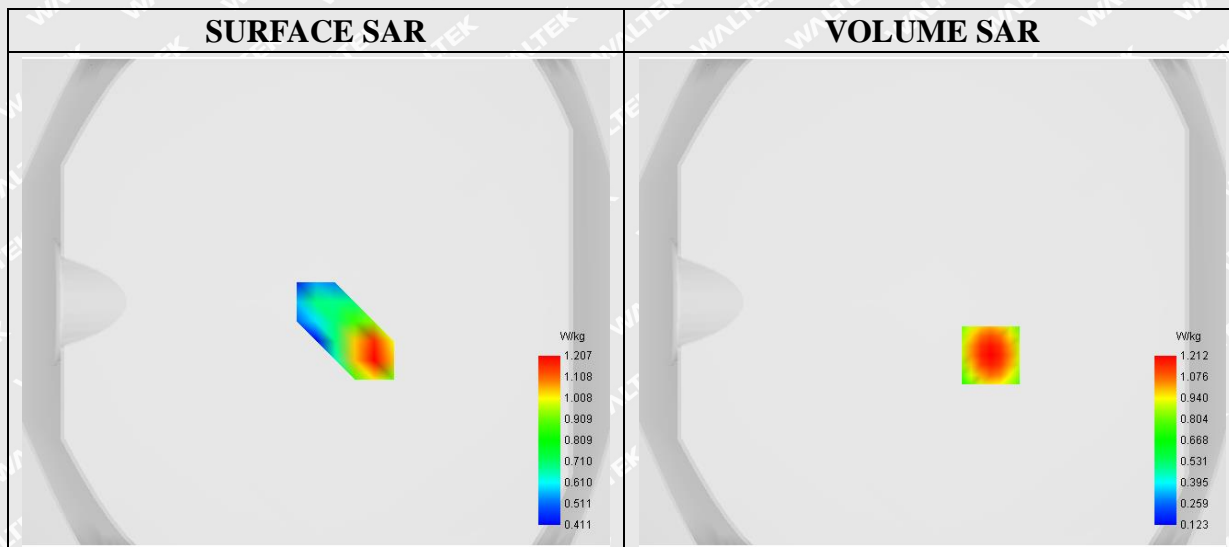

Maximum location: X=24.00, Y=-22.00




D. SAR 1g & 10g


SAR 10g (W/Kg)	0.427674
SAR 1g (W/Kg)	0.827359

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	1.7120	1.2124	0.8562	0.6065	0.4398	0.3288	0.2543	0.2031	0.1660

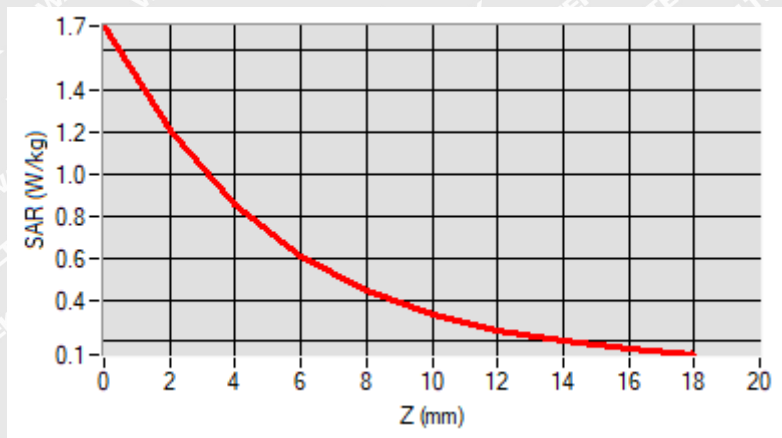

F. 3D Image

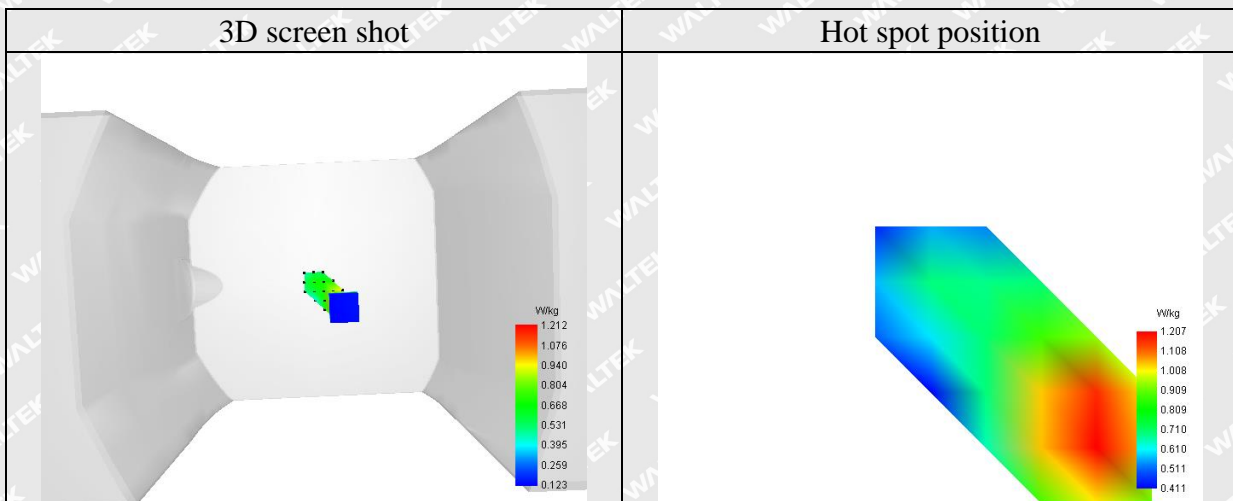



Annex C. EUT Photos

EUT View Front




EUT View Back





Antenna View

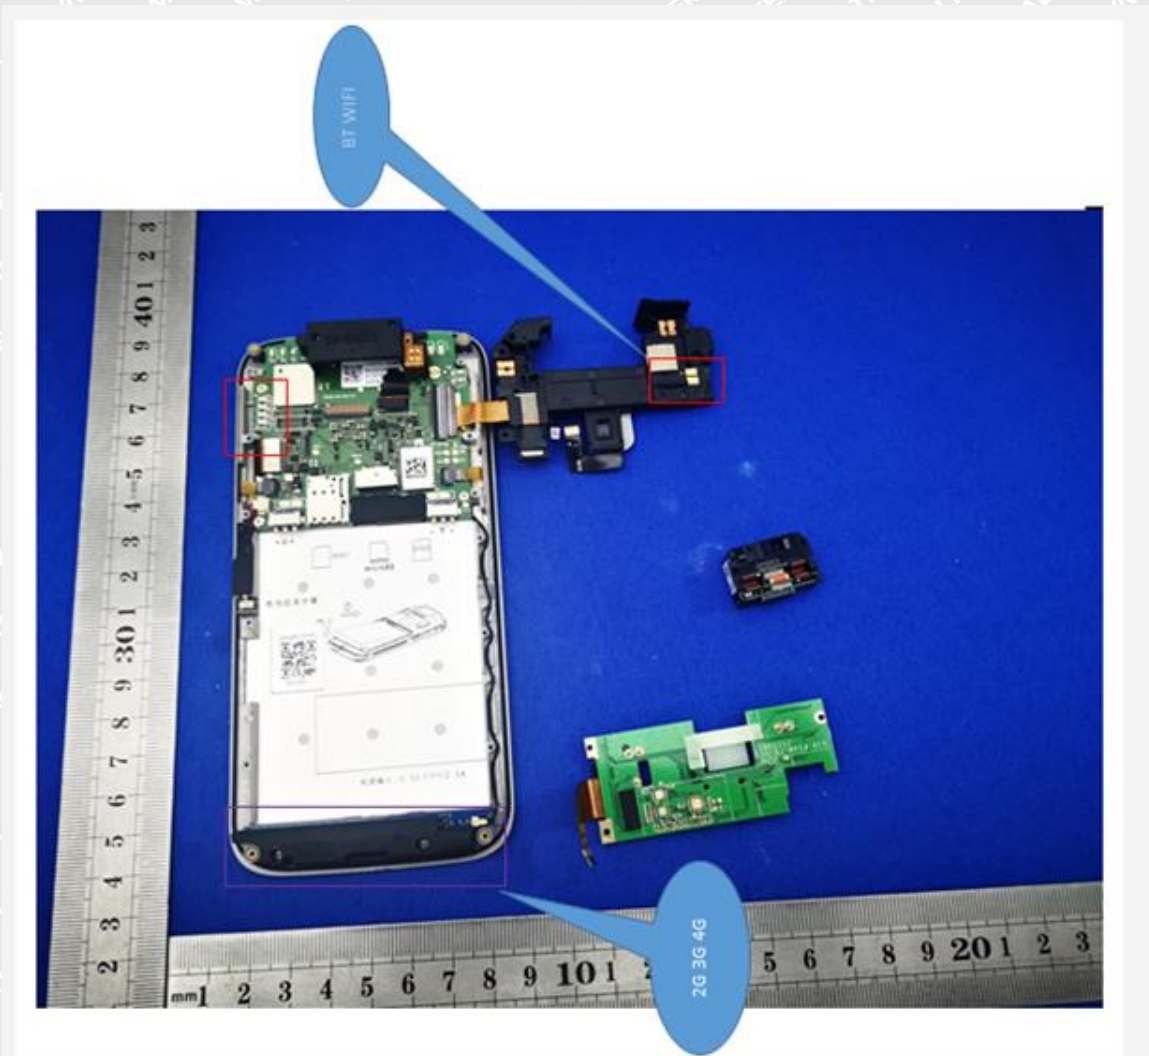





Annex D. Test Setup Photos

Head Exposure Conditions

Right Cheek

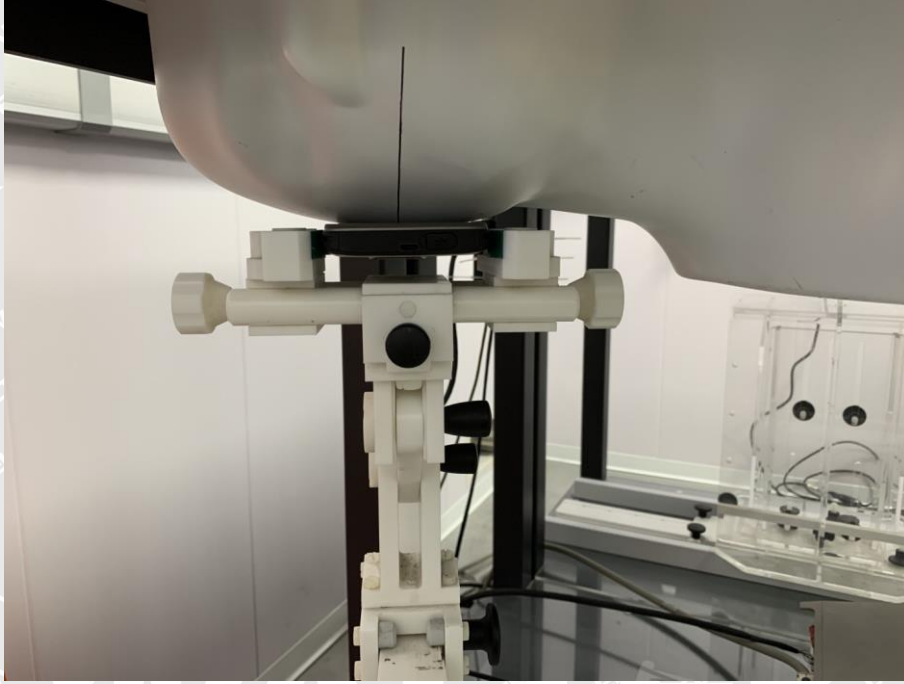


Right Tilt

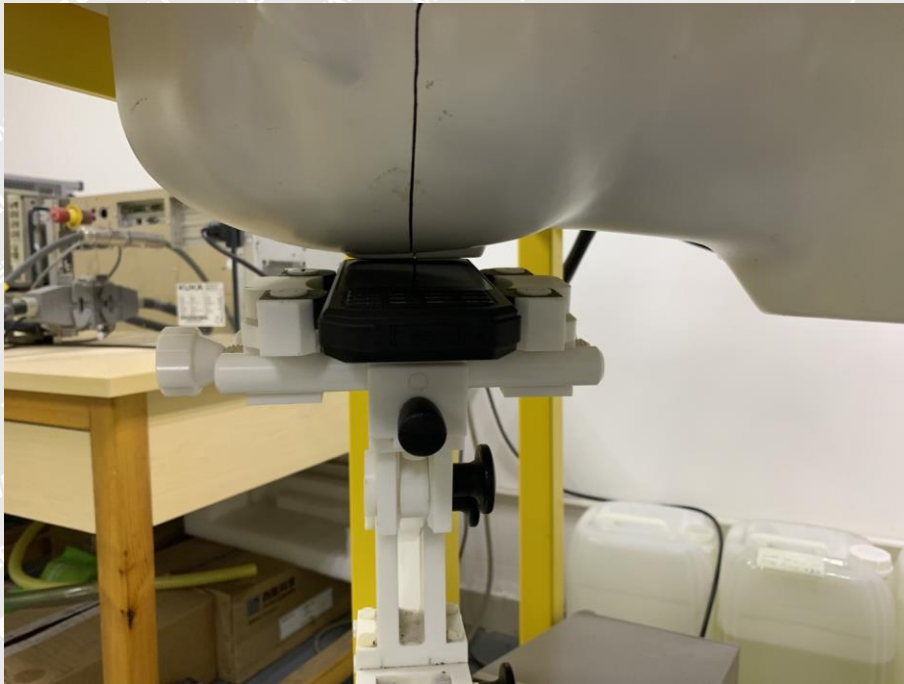




Left Cheek

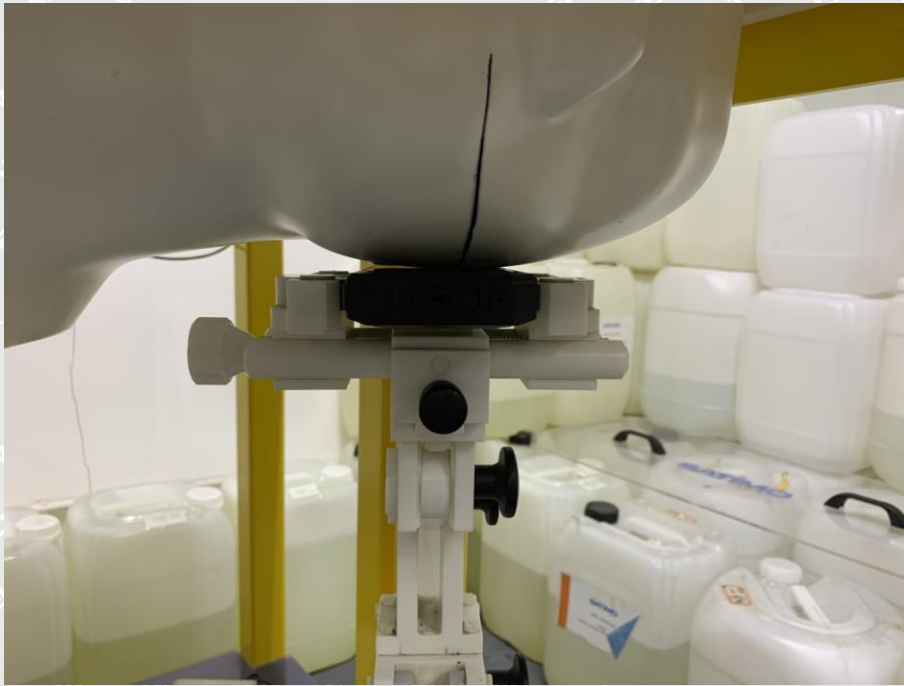


Left Tilt

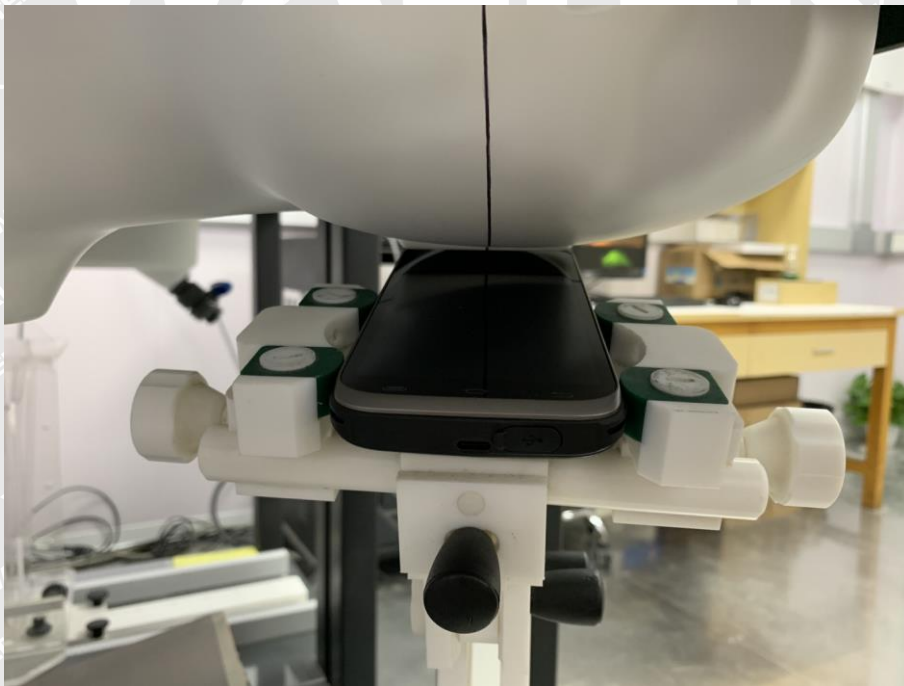




Body mode Exposure Conditions

Body Front

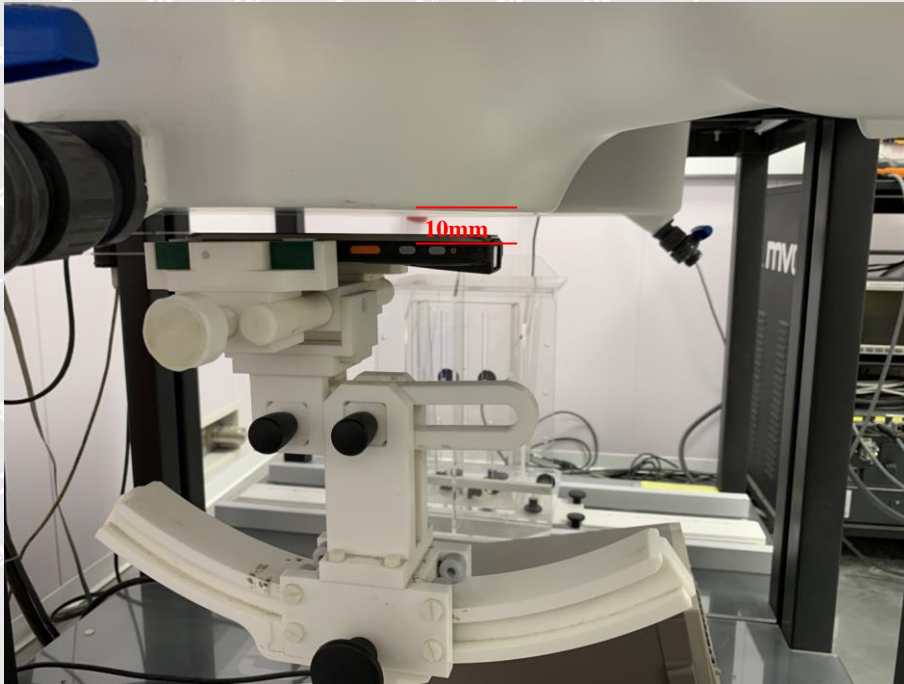

WALTEK

Body Back

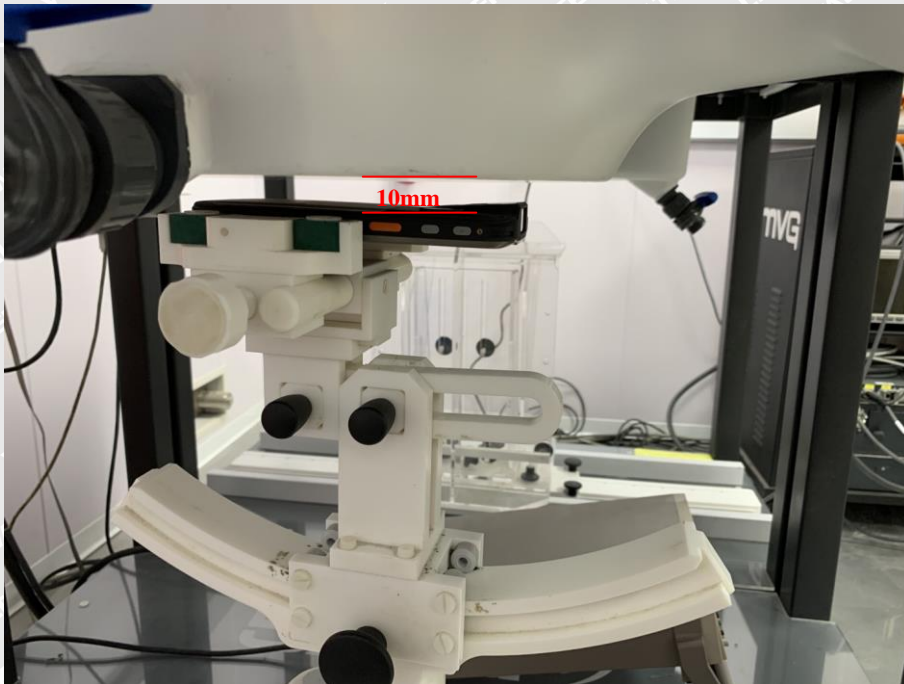




Body Right




Body Left

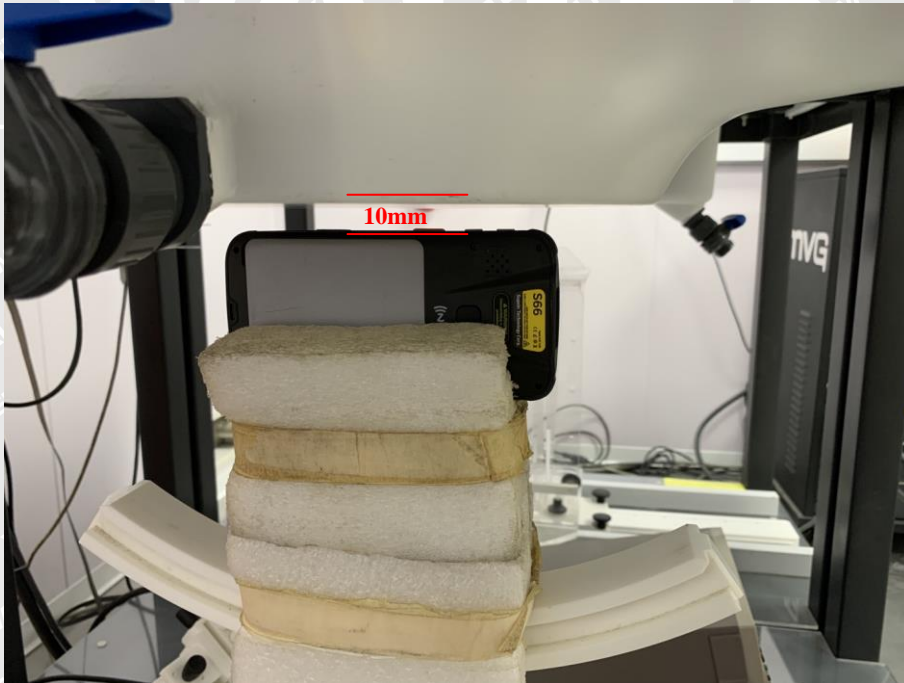




Body Top

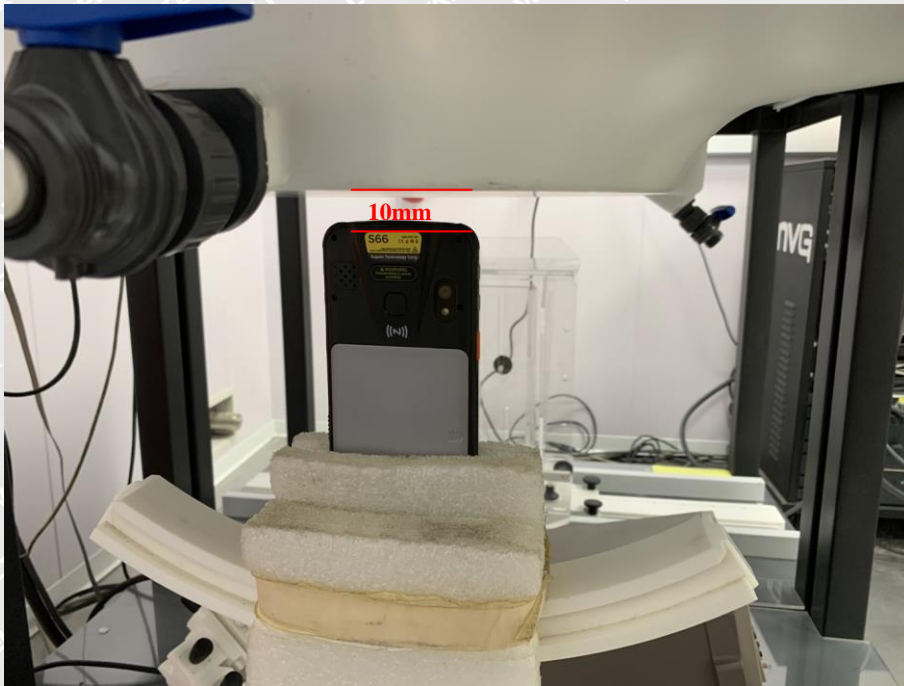

Body Bottom

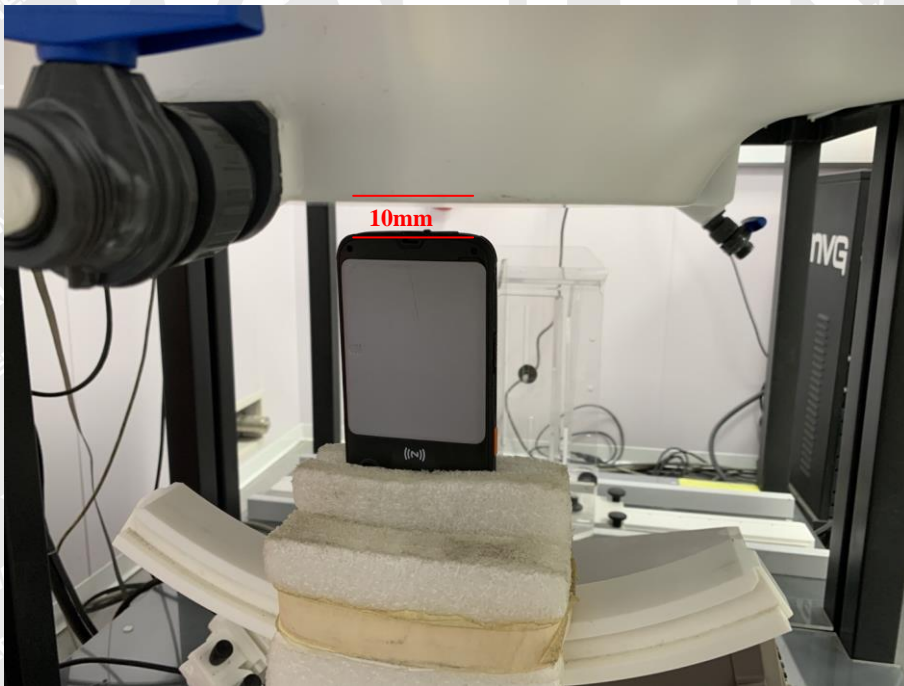



Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

WALTEK

***** END OF REPORT *****