

FCC Part 15C Measurement and Test Report

For

ATID CO., LTD

#1211 Byuksan/Kyungin Digitalvalley 11, 184, Gasan digital 2-ro,

Geumcheon-gu, Seoul, Korea

FCC ID: VUJAT188N-H

FCC Rule(s):	<u>FCC Part 15.225</u>
Product Description:	<u>Bluetooth Reader</u>
Tested Model:	<u>AT188N-HF</u>
Report No.:	<u>STR17028240I-2</u>
Tested Date:	<u>2017-02-27 to 2017-04-06</u>
Issued Date:	<u>2017-04-07</u>
Tested By:	<u>Neil Wong / Engineer</u> <i>Neil Wong</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

1.2 TEST STANDARDS.....4

1.3 TEST METHODOLOGY.....4

1.4 TEST FACILITY.....4

1.5 EUT SETUP AND TEST MODE.....5

1.6 MEASUREMENT UNCERTAINTY.....5

1.7 TEST EQUIPMENT LIST AND DETAILS.....5

2. SUMMARY OF TEST RESULTS.....6

3. ANTENNA REQUIREMENT.....7

3.1 STANDARD APPLICABLE.....7

3.2 TEST RESULT.....7

4. RADIATED EMISSIONS.....8

4.1 STANDARD APPLICABLE.....8

4.2 TEST PROCEDURE.....8

4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....9

4.4 ENVIRONMENTAL CONDITIONS.....9

4.5 SUMMARY OF TEST RESULTS/PLOTS.....10

5. OUT OF BAND EMISSIONS.....13

5.1 STANDARD APPLICABLE.....13

5.2 TEST PROCEDURE.....13

5.3 ENVIRONMENTAL CONDITIONS.....13

5.4 SUMMARY OF TEST RESULTS/PLOTS.....13

6. FREQUENCY STABILITY.....15

6.1 STANDARD APPLICABLE.....15

6.2 TEST PROCEDURE.....15

6.3 ENVIRONMENTAL CONDITIONS.....15

6.4 SUMMARY OF TEST RESULTS/PLOTS.....15

7. CONDUCTED EMISSIONS.....17

7.1 TEST PROCEDURE.....17

7.2 BASIC TEST SETUP BLOCK DIAGRAM.....17

7.3 ENVIRONMENTAL CONDITIONS.....17

7.4 TEST RECEIVER SETUP.....17

7.5 SUMMARY OF TEST RESULTS/PLOTS.....18

7.6 CONDUCTED EMISSIONS TEST DATA.....18

8. EMISSION BANDWIDTH.....21

8.1 APPLICABLE STANDARD.....21

8.2 TEST PROCEDURE.....21

8.3 ENVIRONMENTAL CONDITIONS.....21

8.4 SUMMARY OF TEST RESULTS/PLOTS.....21

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: ATID CO., LTD
Address of applicant: #1211 Byuksan/Kyungin Digitalvalley 11, 184,
Gasan digital 2-ro, Geumcheon-gu, Seoul, Korea

Manufacturer: ATID CO., LTD
Address of manufacturer: #1211 Byuksan/Kyungin Digitalvalley 11, 184,
Gasan digital 2-ro, Geumcheon-gu, Seoul, Korea

General Description of EUT	
Product Name:	Bluetooth Reader
Trade Name:	ATID
Model No.:	AT188N-HF
Adding Model(s):	/
Rated Voltage:	DC 3.7V; USB 5V Charging purpose only
Power Adapter Model:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	NFC
Frequency Range:	13.56MHz
Max. Field Strength:	50.98dBuV/m (at 3m)
Antenna Type:	Circularly Polarized Patch Antenna
Device Category:	Portable Device

1.2 Test Standards

The following report is prepared on behalf of the ATID CO., LTD in accordance with FCC Part 15, Subpart C, and section 15.203,15.205,15.209 and 15.225 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203,15.205,15.209 and 15.225 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in the continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	13.56MHz

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Frequency Deviation	2.3%	± 5%
Transmitter Spurious Emissions	Radiated	± 5.1dB

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.209	Radiated Emission Limit	Compliant
§15.225(a)	Field Strength	Compliant
§15.225(b)(c)	Out of Band Emission	Compliant
§15.225(e)	Frequency Stability	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.215(c)	Emission Bandwidth	Compliant

N/A: not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a Circularly Polarized Patch Antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.225(a), The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

According to §15.225(d) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.


Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.225(d) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

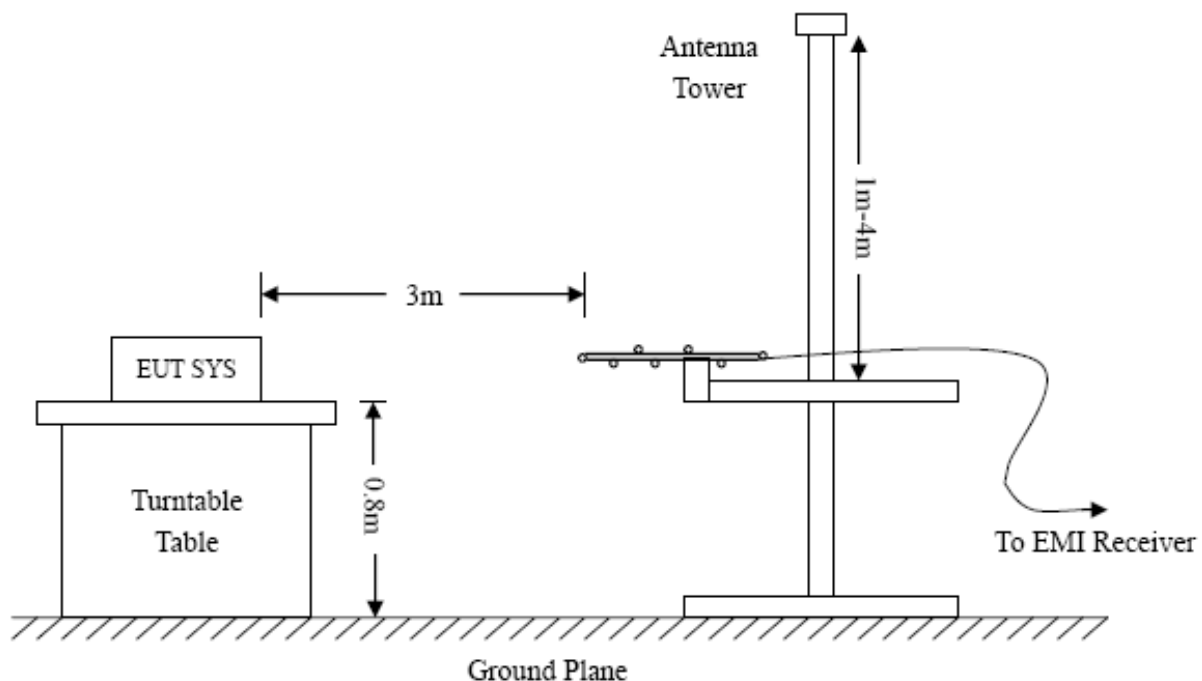

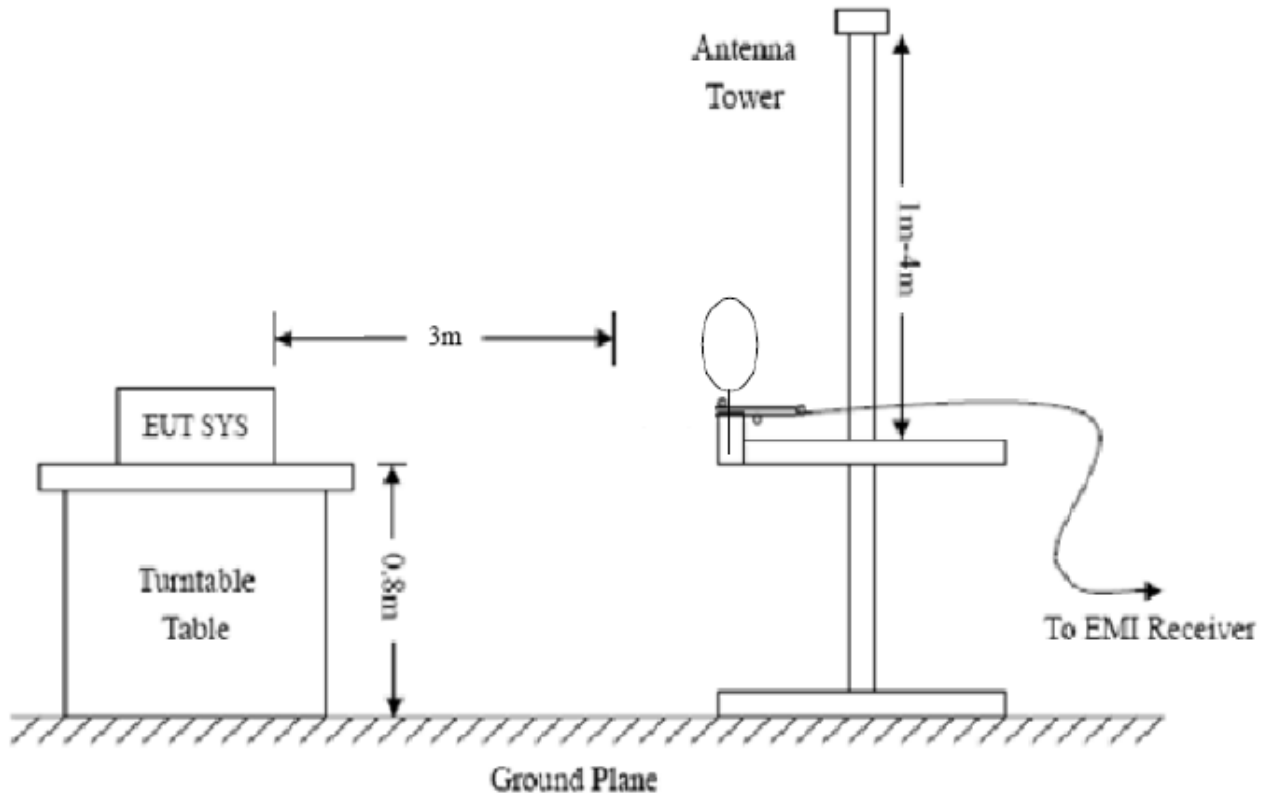

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

4.4 Environmental Conditions

Temperature:	26° C
Relative Humidity:	52%
ATM Pressure:	1022 mbar

4.5 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.225 standards, and had the worst margin of:


-12.34 dB at 663.4729 MHz in the Horizontal polarization, 9 kHz to 1 GHz, 3Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Frequency	Reading	Correction Factor	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	
13.5600	57.27	-6.29	50.98	114.00	-63.02	H	Peak
27.1200	-11.07	-7.03	-18.10	80.5	-98.60	H	Peak


Plot of Radiated Emissions Test Data

EUT: *Bluetooth Reader*
 Tested Model: *AT188N-HF*
 Operating Condition: *Transmitting*
 Comment: *DC 3.7V*
 Test Specification: *Horizontal*

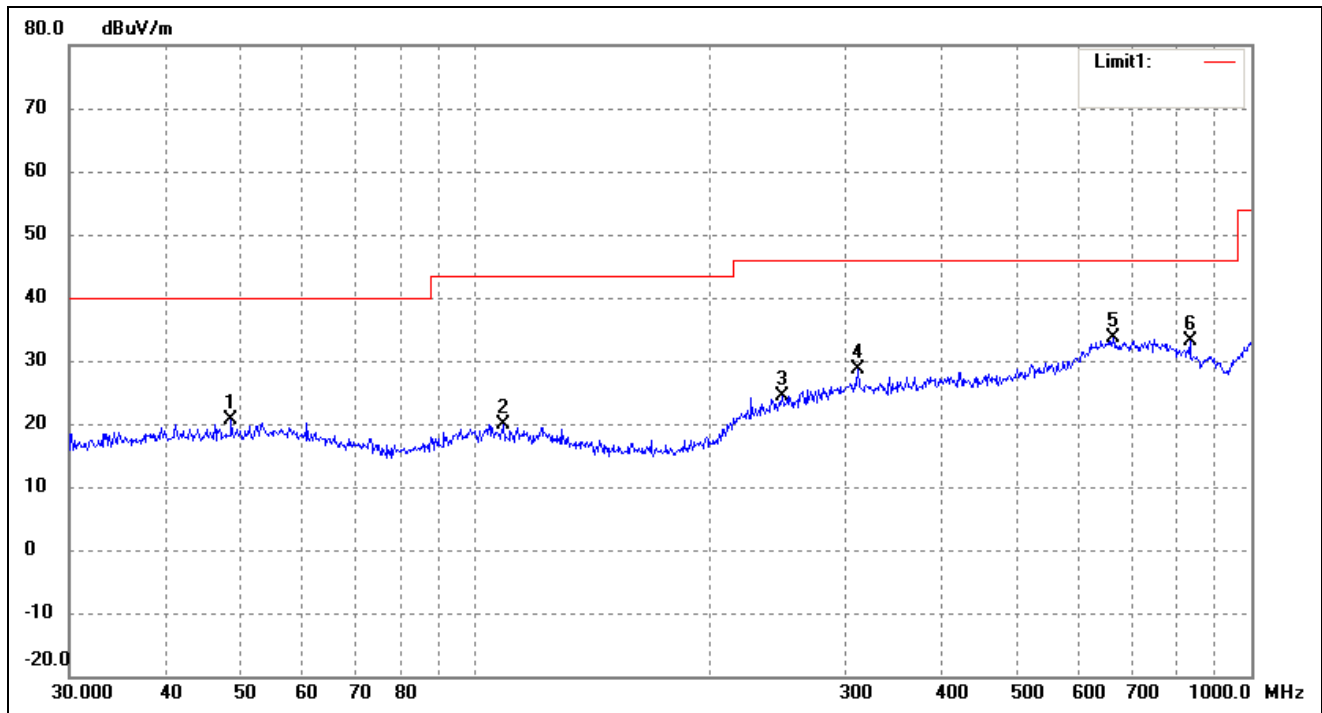

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.5016	15.75	4.97	20.72	40.00	-19.28	81	100	peak
2	108.6470	14.99	4.87	19.86	43.50	-23.64	186	100	peak
3	248.5519	15.04	9.25	24.29	46.00	-21.71	60	100	peak
4	311.0867	16.60	11.95	28.55	46.00	-17.45	134	100	peak
5	663.4729	15.90	17.76	33.66	46.00	-12.34	315	100	peak
6	833.3171	17.27	15.91	33.18	46.00	-12.82	141	100	peak

Test Specification: Vertical

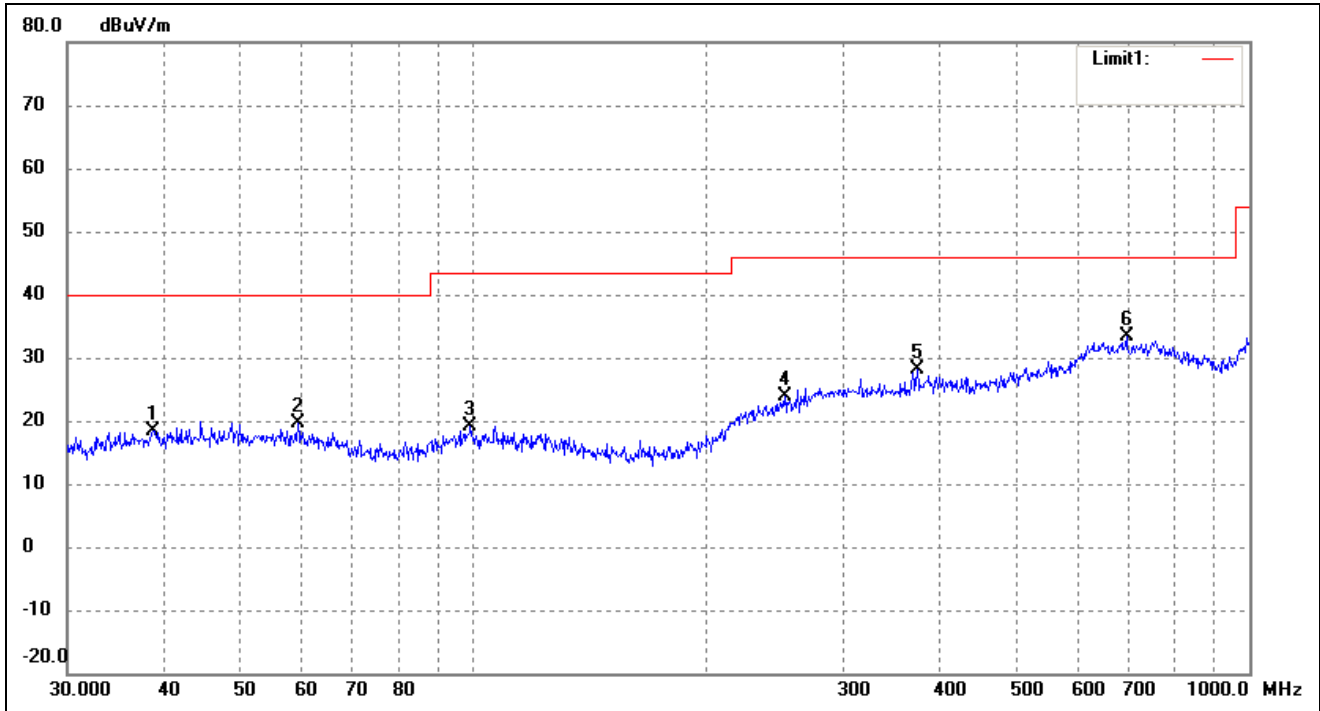

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.6161	13.71	4.72	18.43	40.00	-21.57	43	100	peak
2	59.4405	14.70	5.02	19.72	40.00	-20.28	141	100	peak
3	99.1797	14.37	4.81	19.18	43.50	-24.32	52	100	peak
4	252.0627	14.53	9.38	23.91	46.00	-22.09	131	100	peak
5	373.3112	16.27	11.84	28.11	46.00	-17.89	117	100	peak
6	694.4174	15.72	17.61	33.33	46.00	-12.67	195	100	peak

5. OUT OF BAND EMISSIONS

5.1 Standard Applicable

According to FCC 15.225 (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

5.2 Test Procedure

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 13.11MHz to 14.01MHz, than mark the higher-level emission for comparing with the FCC rules.


5.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1022 mbar

5.4 Summary of Test Results/Plots

Out of band emission

Vertical (Worst case)

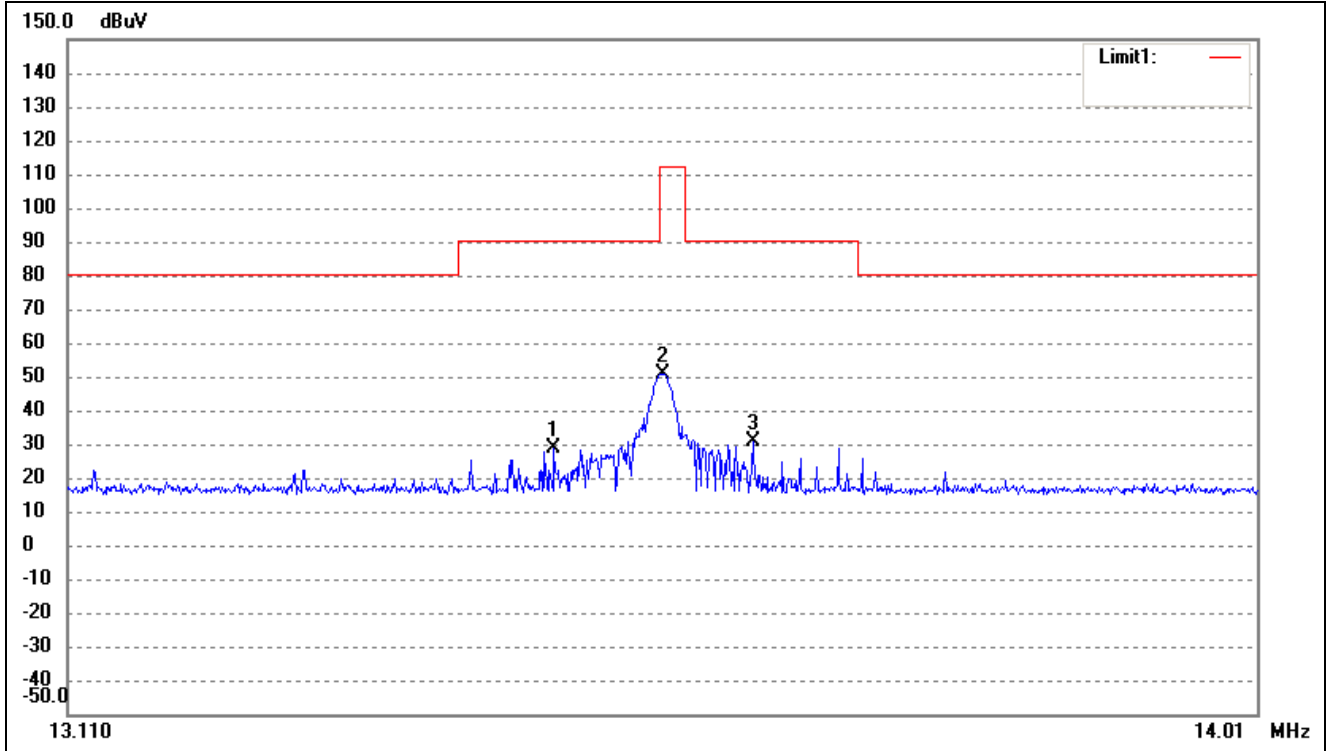

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	13.4709	34.93	-6.29	28.64	90.50	-29.68	66	100	peak
2	13.5525	57.27	-6.29	50.98	112.50	-69.45	289	100	peak
3	13.6211	36.80	-6.29	30.51	90.50	-33.46	88	100	peak

6. Frequency Stability

6.1 Standard Applicable

According to 15.225(e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

6.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure.

6.3 Environmental Conditions

Relative Humidity:	55%
ATM Pressure:	1015 mbar

6.4 Summary of Test Results/Plots

Reference Frequency: 13.56MHz, Limit: 100ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Error	
		Error (Hz)	Error (ppm)
50	3.7	146	10.79
40	3.7	134	9.92
30	3.7	146	10.79
20	3.7	117	8.66
10	3.7	106	7.78
0	3.7	87	6.43
-10	3.7	73	5.38
-20	3.7	70	5.13

Reference Frequency: 13.56MHz, Limit: 100ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Error	
		Error (Hz)	Error (ppm)
20	3.5	150	11.04
	3.7	146	10.77
	4.2	148	10.94


7. Conducted Emissions

7.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

7.2 Basic Test Setup Block Diagram

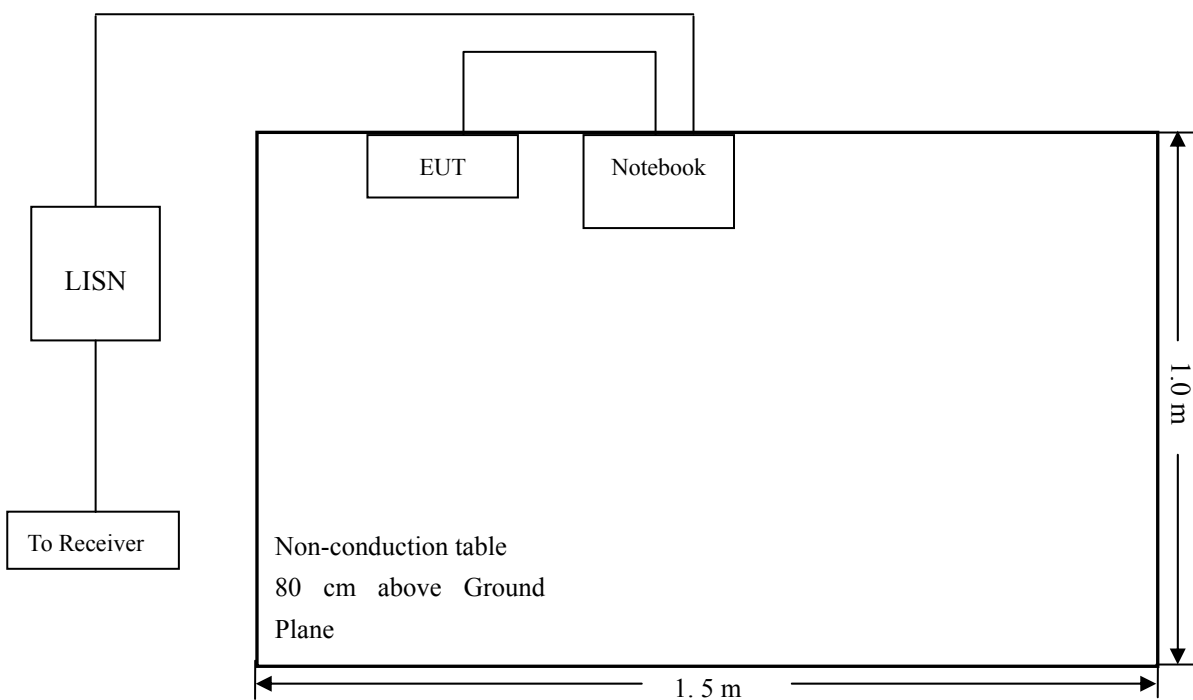

7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

7.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency..... 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal

7.5 Summary of Test Results/Plots

According to the data in section 7.6, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:


-11.34 dB at 2.3140 MHz in the **Neutral, Average** detector, 0.15-30MHz

7.6 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: *Bluetooth Reader*
 Tested Model: *AT188N-HF*
 Operating Condition: *Transmitting*
 Comment: *AC 120V/60Hz; USB 5V*

Test Specification: *Neutral*

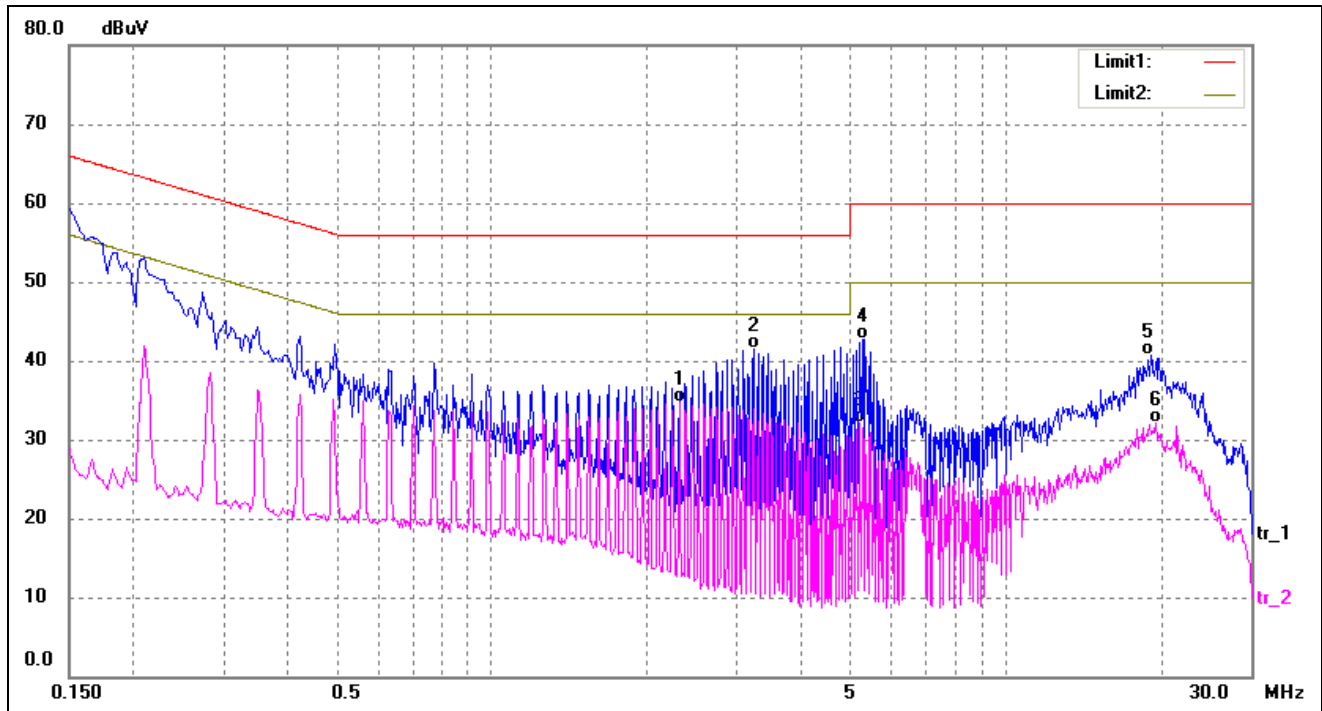

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	2.3140	24.93	9.73	34.66	46.00	-11.34	AVG
2	3.2260	31.82	9.70	41.52	56.00	-14.48	QP
3	5.1900	22.36	9.65	32.01	50.00	-17.99	AVG
4	5.3300	33.15	9.65	42.80	60.00	-17.20	QP
5	19.2140	31.13	9.67	40.80	60.00	-19.20	QP
6	19.6340	22.42	9.67	32.09	50.00	-17.91	AVG

Test Specification: Line

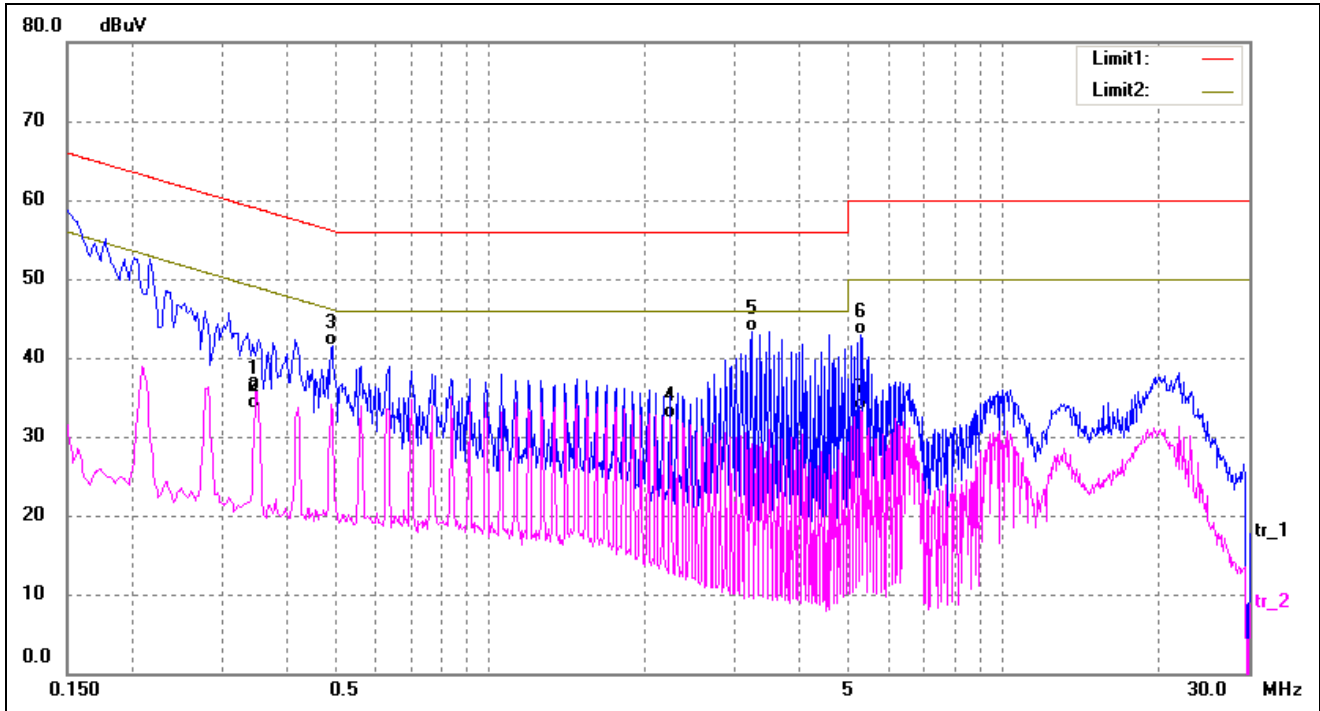

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3500	25.94	9.80	35.74	48.96	-13.22	AVG
2	0.3500	23.78	9.80	33.58	48.96	-15.38	AVG
3	0.4940	31.73	9.80	41.53	56.10	-14.57	QP
4	2.2420	22.49	9.73	32.22	46.00	-13.78	AVG
5*	3.2260	33.55	9.70	43.25	56.00	-12.75	QP
6	5.2580	33.28	9.65	42.93	60.00	-17.07	QP
7	5.2580	23.58	9.65	33.23	50.00	-16.77	AVG

8. EMISSION BANDWIDTH

8.1 Applicable Standard

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Set span = 10kHz, centered on a transmitting channel

RBW \geq 1% 20dB Bandwidth, VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down of the emission.


8.3 Environmental Conditions

Temperature:	26 °C
Relative Humidity:	45%
ATM Pressure:	1019 mbar

8.4 Summary of Test Results/Plots

Tx Frequency	20dB Emission bandwidth
13.56MHz	35.426Hz

Please refer to the test plots as below:

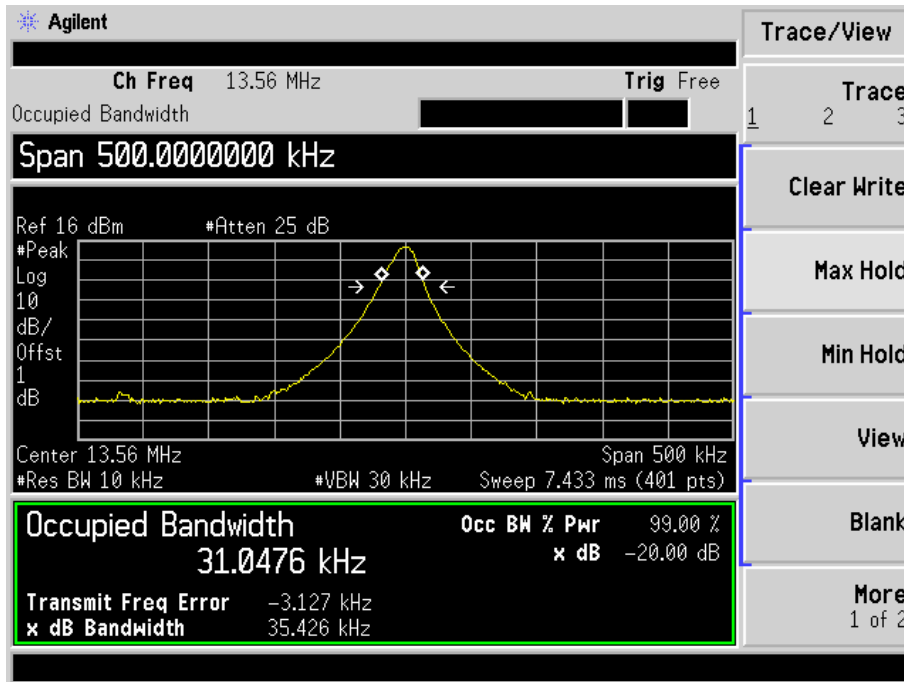

***** END OF REPORT *****