

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - NB 1 mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet NB CH128/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.075 mW/g

GPRS Body Tablet NB CH128/Zoom Scan (7x7x9)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.85 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

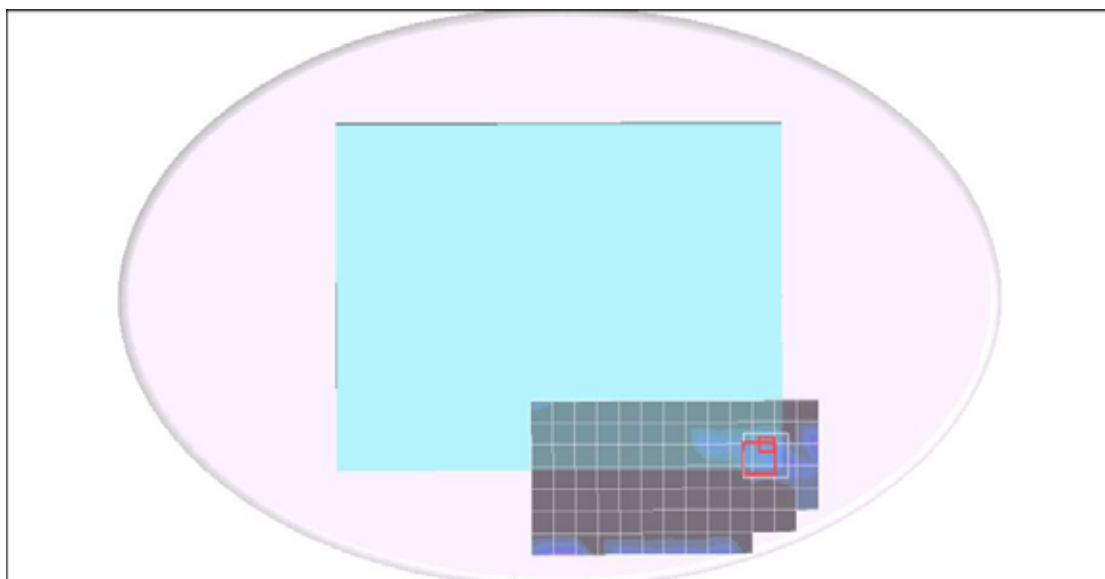

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Lap Held 2 mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


GPRS Body Tablet SL CH128/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.039 mW/g

GPRS Body Tablet SL CH128/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.44 V/m; Power Drift = -0.002 dB
Peak SAR (extrapolated) = 0.047 W/kg
SAR(1 g) = **0.038 mW/g**; SAR(10 g) = **0.034 mW/g**
Maximum value of SAR (measured) = 0.042 mW/g

GPRS Body Tablet SL CH128/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.44 V/m; Power Drift = -0.002 dB
Peak SAR (extrapolated) = 0.053 W/kg
SAR(1 g) = **0.037 mW/g**; SAR(10 g) = **0.034 mW/g**
Maximum value of SAR (measured) = 0.040 mW/g

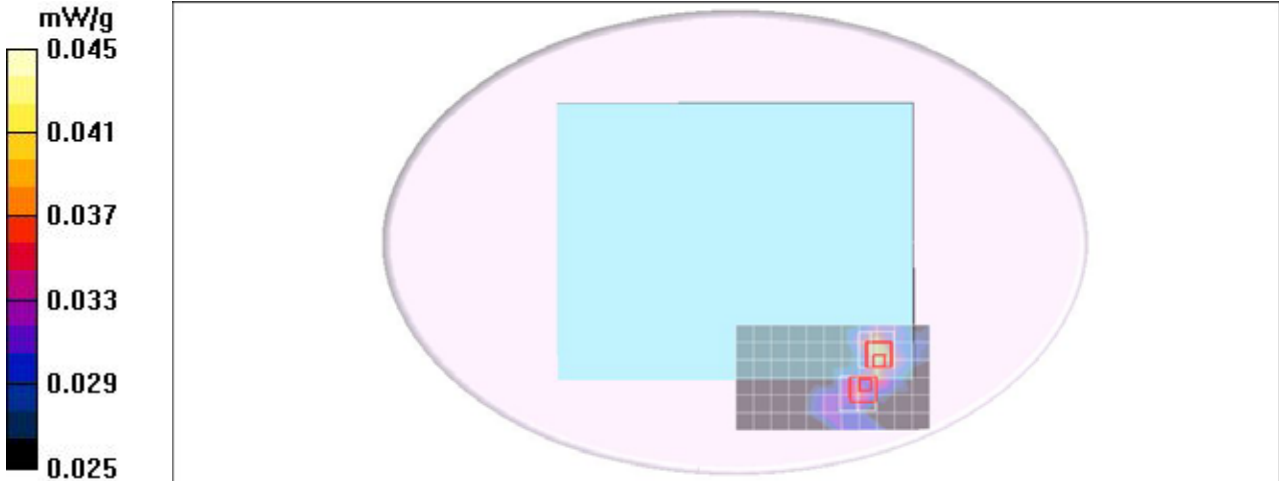

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Tablet 3PL CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet PL CH128/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.033 mW/g

GPRS Body Tablet PL CH128/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 3.49 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.044 W/kg

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.025 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

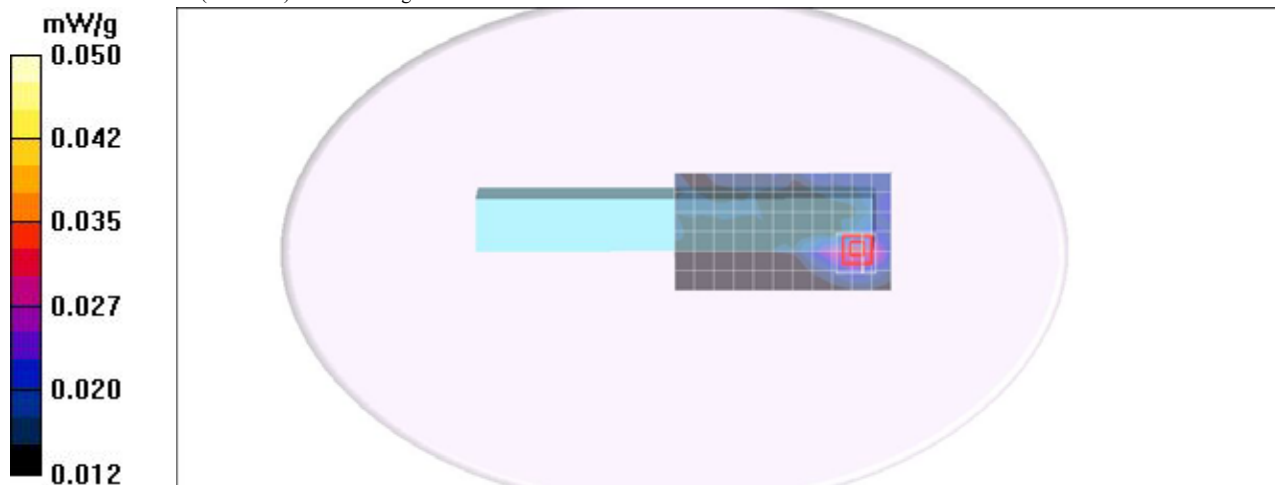

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Tablet 4PP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet PP CH128/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.079 mW/g

GPRS Body Tablet PP CH128/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.50 V/m; Power Drift = -0.059 dB
Peak SAR (extrapolated) = 0.219 W/kg
SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.039 mW/g
Maximum value of SAR (measured) = 0.092 mW/g

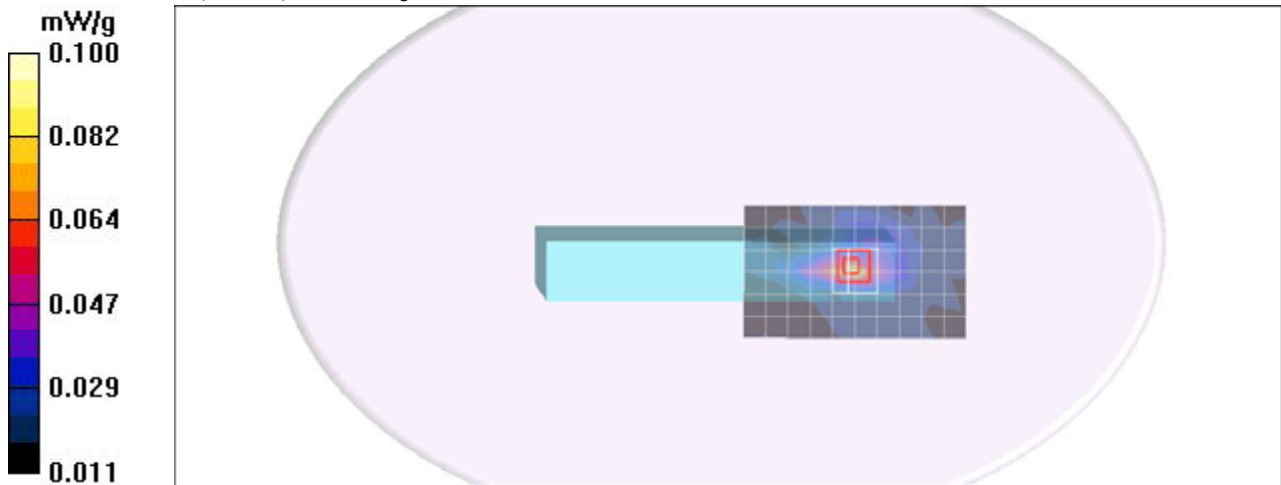

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Tablet 6SP CM Battery2 wh65

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


GPRS Body Tablet SP CH128/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.06 mW/g

GPRS Body Tablet SP CH128/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 19.8 V/m; Power Drift = -0.032 dB
Peak SAR (extrapolated) = 2.10 W/kg
SAR(1 g) = 0.943 mW/g; SAR(10 g) = 0.536 mW/g
Maximum value of SAR (measured) = 1.24 mW/g

GPRS Body Tablet SP CH128/Z Scan (1x1x11): Measurement grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 0.456 mW/g

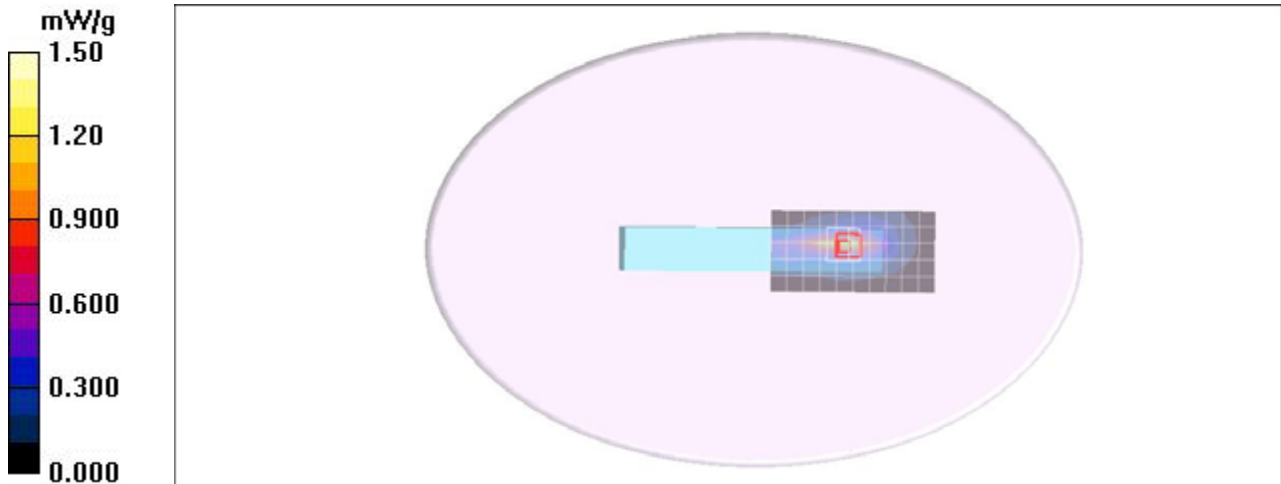

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

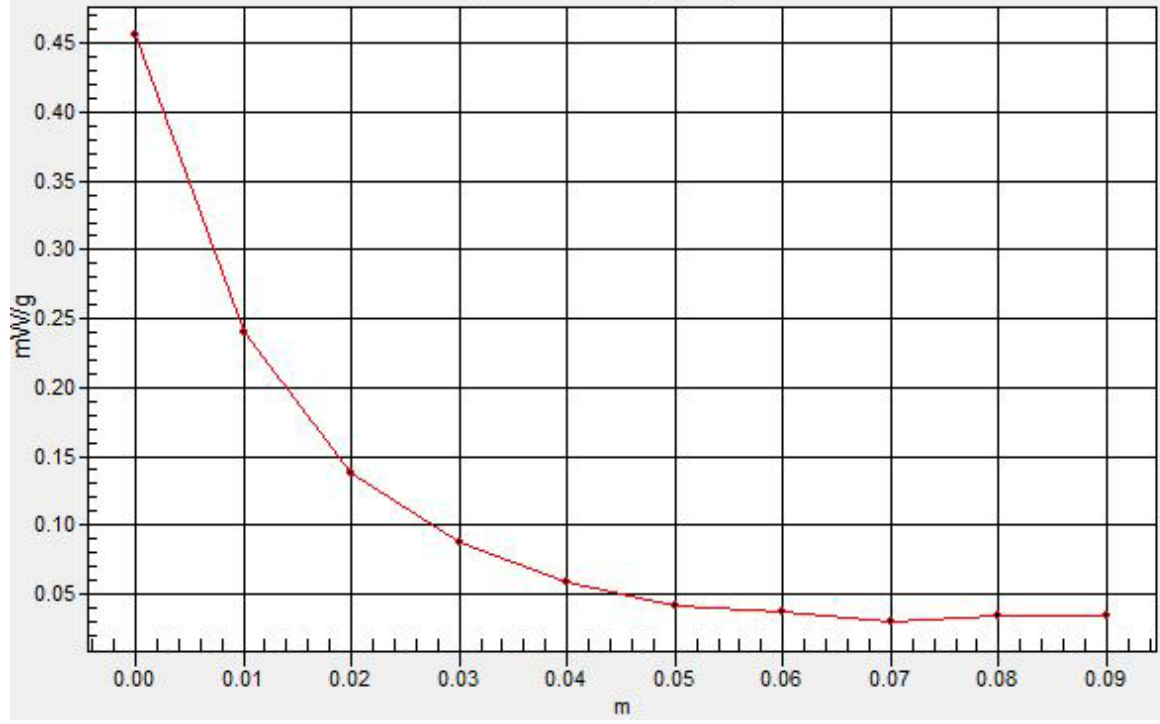

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Tablet 6SP CM Battery2 wh65

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet SP CH190/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.641 mW/g

GPRS Body Tablet SP CH190/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 10.7 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.320 mW/g

Maximum value of SAR (measured) = 0.836 mW/g

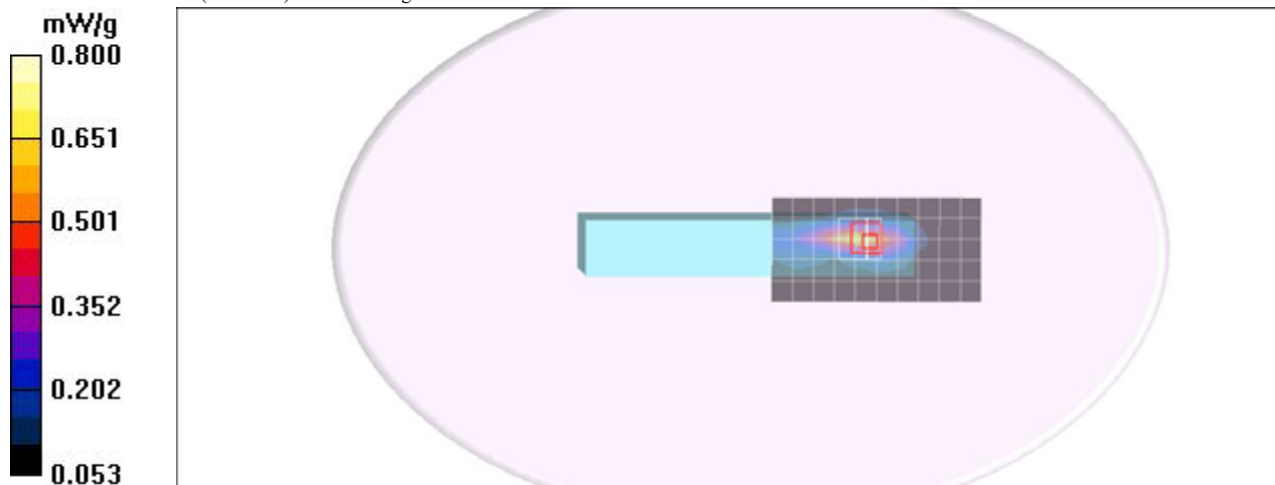

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Tablet 6SP CM Battery2 wh65

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 850; Frequency: 848.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet SP CH251/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.767 mW/g

GPRS Body Tablet SP CH251/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 10.8 V/m; Power Drift = -0.098 dB
Peak SAR (extrapolated) = 1.30 W/kg
SAR(1 g) = 0.587 mW/g; SAR(10 g) = 0.321 mW/g
Maximum value of SAR (measured) = 0.832 mW/g

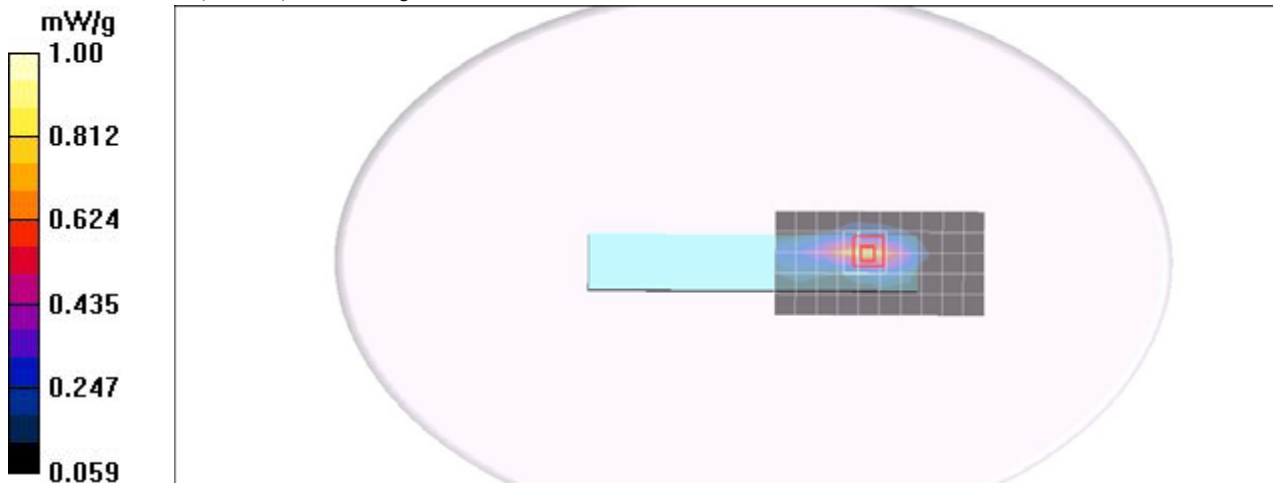

Test Laboratory: Compliance Certification Services Inc.

EGPRS 850 - NB 1 mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: EGPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body Tablet NB CH190/Area Scan (8x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.061 mW/g

EGPRS Body Tablet NB CH190/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.51 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.087 W/kg

SAR(1 g) = 0.032 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.076 mW/g

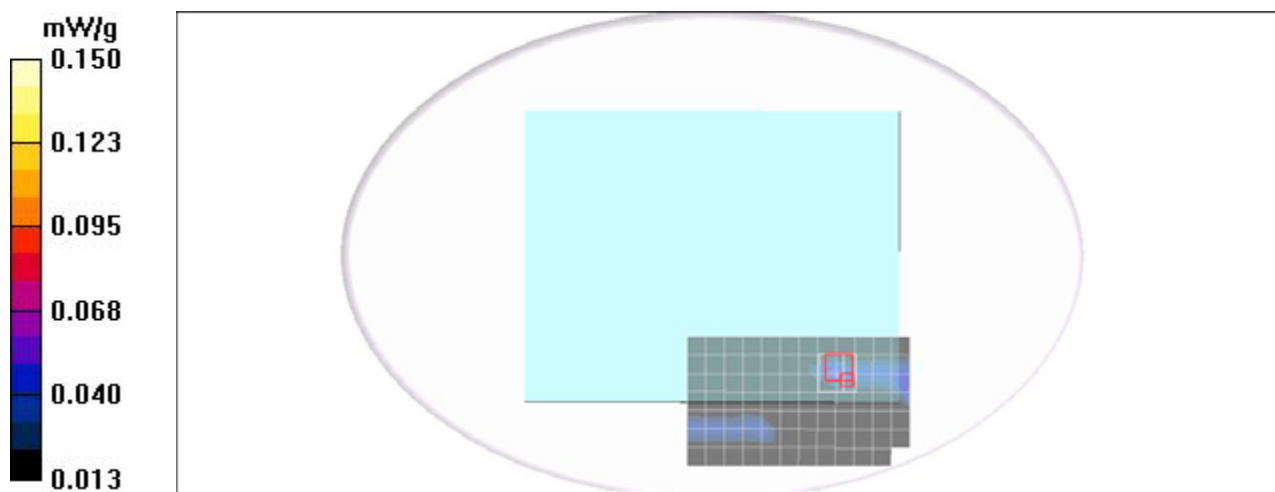

Test Laboratory: Compliance Certification Services Inc.

EGPRS 850 - Lap Held 2 mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: EGPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body Tablet SL CH190/Area Scan (7x12x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.048 mW/g

EGPRS Body Tablet SL CH190/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.70 V/m; Power Drift = -0.114 dB
Peak SAR (extrapolated) = 0.087 W/kg
SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.042 mW/g
Maximum value of SAR (measured) = 0.051 mW/g

EGPRS Body Tablet SL CH190/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.70 V/m; Power Drift = -0.114 dB
Peak SAR (extrapolated) = 0.067 W/kg
SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.040 mW/g
Maximum value of SAR (measured) = 0.051 mW/g

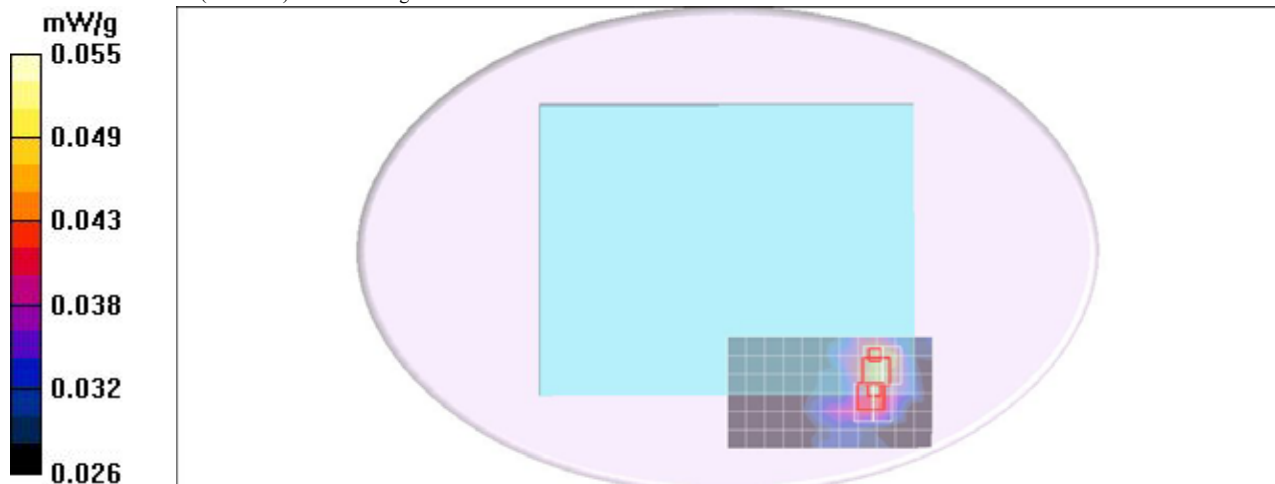

Test Laboratory: Compliance Certification Services Inc.

EGPRS 850 - Tablet 3PL CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: EGPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body Tablet PL CH190/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.020 mW/g

EGPRS Body Tablet PL CH190/Zoom Scan (7x7x9)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 3.36 V/m; Power Drift = -0.093 dB

Peak SAR (extrapolated) = 0.021 W/kg

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.021 mW/g

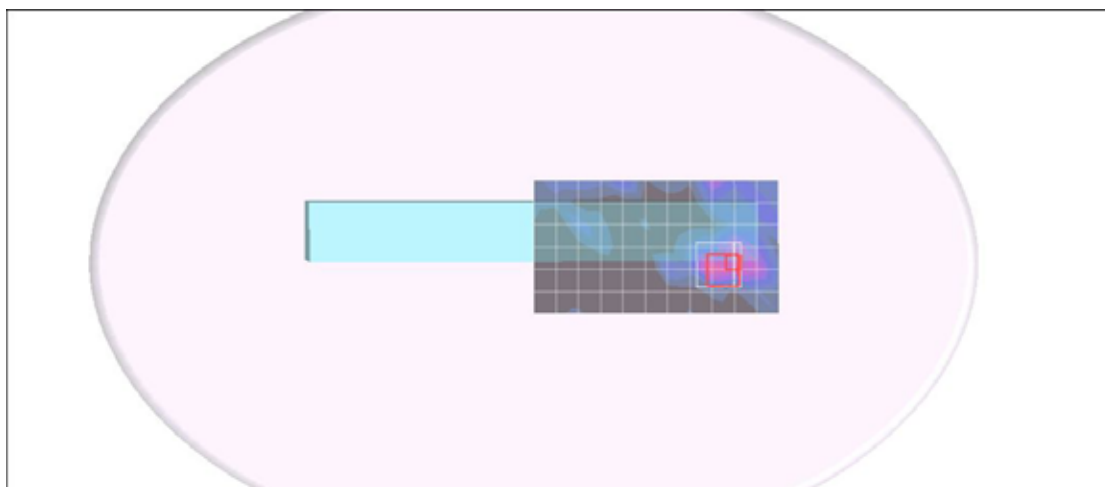

Test Laboratory: Compliance Certification Services Inc.

EGPRS 850 - Tablet 4PP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: EGPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body Tablet PP CH190/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.028 mW/g

EGPRS Body Tablet PP CH190/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.84 V/m; Power Drift = -0.108 dB
Peak SAR (extrapolated) = 0.053 W/kg
SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.019 mW/g
Maximum value of SAR (measured) = 0.034 mW/g

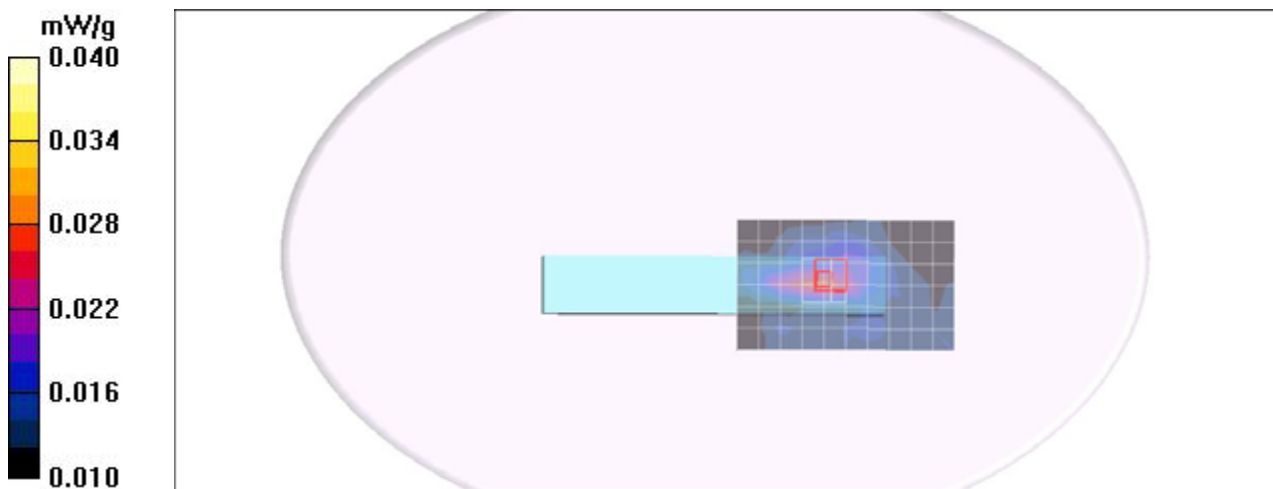

Test Laboratory: Compliance Certification Services Inc.

EGPRS 850 - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: EGPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body Tablet SP CH190/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.320 mW/g

EGPRS Body Tablet SP CH190/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 9.69 V/m; Power Drift = -0.083 dB
Peak SAR (extrapolated) = 0.500 W/kg
SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.154 mW/g
Maximum value of SAR (measured) = 0.348 mW/g

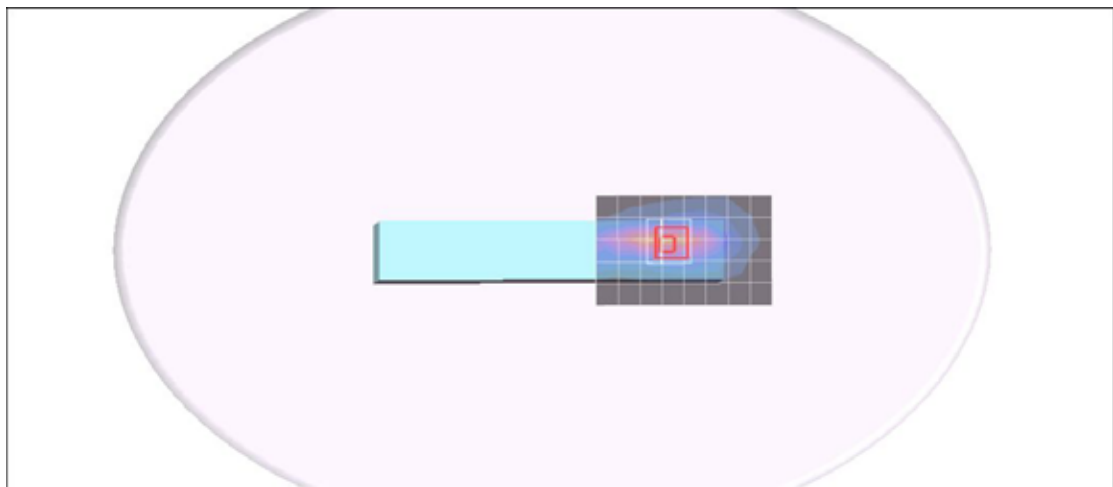

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 - NB 1 mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


GPRS Body NB mode CH810/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.123 mW/g

GPRS Body NB mode CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.33 V/m; Power Drift = -0.112 dB
Peak SAR (extrapolated) = 0.202 W/kg
SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.049 mW/g
Maximum value of SAR (measured) = 0.141 mW/g

GPRS Body NB mode CH810/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.33 V/m; Power Drift = -0.112 dB
Peak SAR (extrapolated) = 0.278 W/kg
SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.055 mW/g
Maximum value of SAR (measured) = 0.145 mW/g

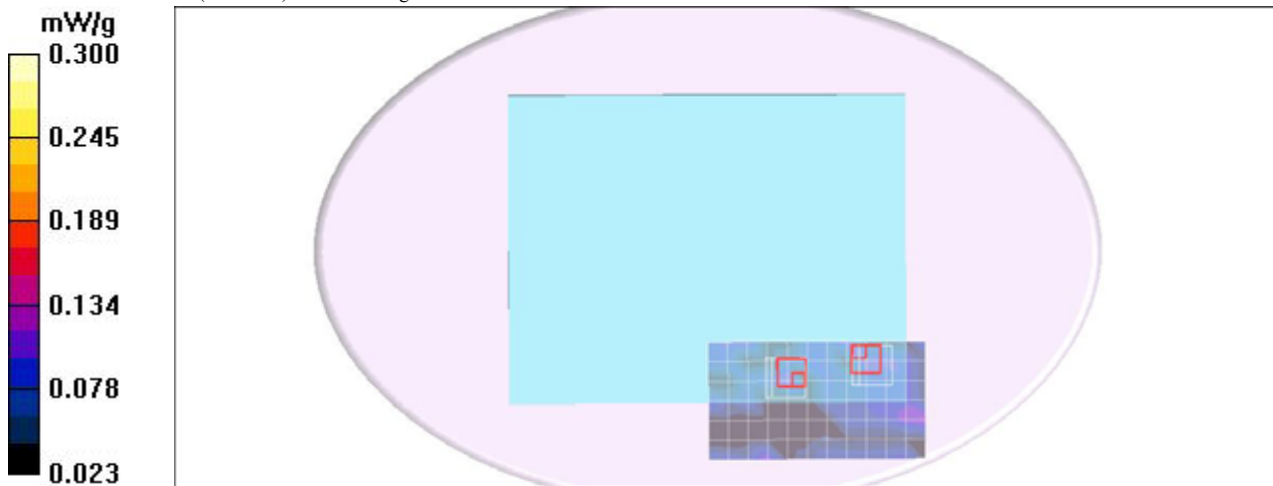

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 - Lap Held 2 mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tap Held mode CH810/Area Scan (7x12x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.076 mW/g

GPRS Body Tap Held mode CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.61 V/m; Power Drift = -0.175 dB
Peak SAR (extrapolated) = 0.105 W/kg
SAR(1 g) = 0.069 mW/g; SAR(10 g) = 0.057 mW/g
Maximum value of SAR (measured) = 0.081 mW/g

GPRS Body Tap Held mode CH810/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.61 V/m; Power Drift = -0.175 dB
Peak SAR (extrapolated) = 0.089 W/kg
SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.049 mW/g
Maximum value of SAR (measured) = 0.065 mW/g

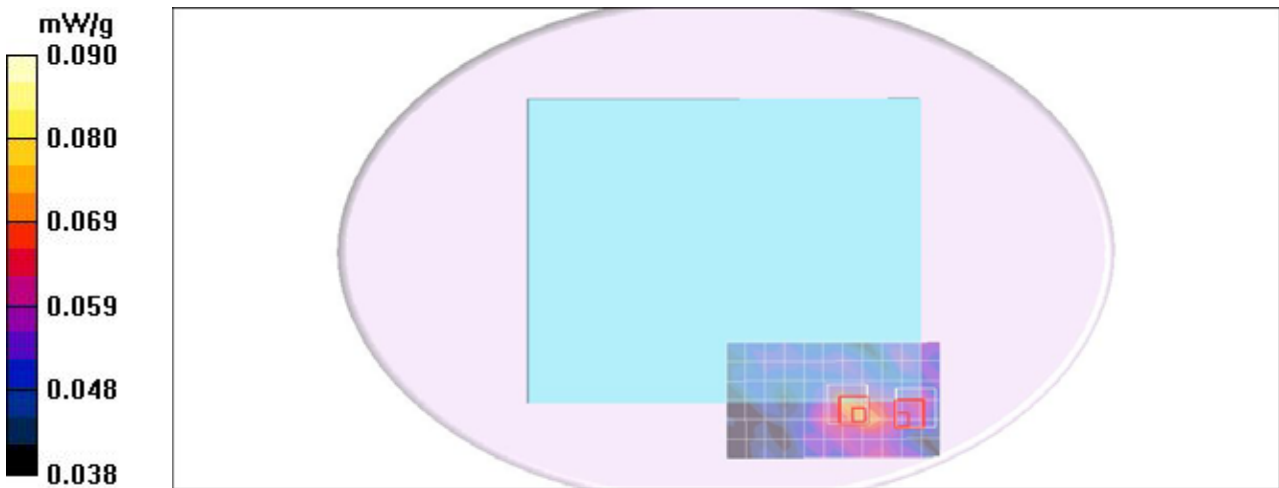

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 - Tablet 3PL CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet PL CH810/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.097 mW/g

GPRS Body Tablet PL CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.20 V/m; Power Drift = -0.129 dB
Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.062 mW/g
Maximum value of SAR (measured) = 0.104 mW/g

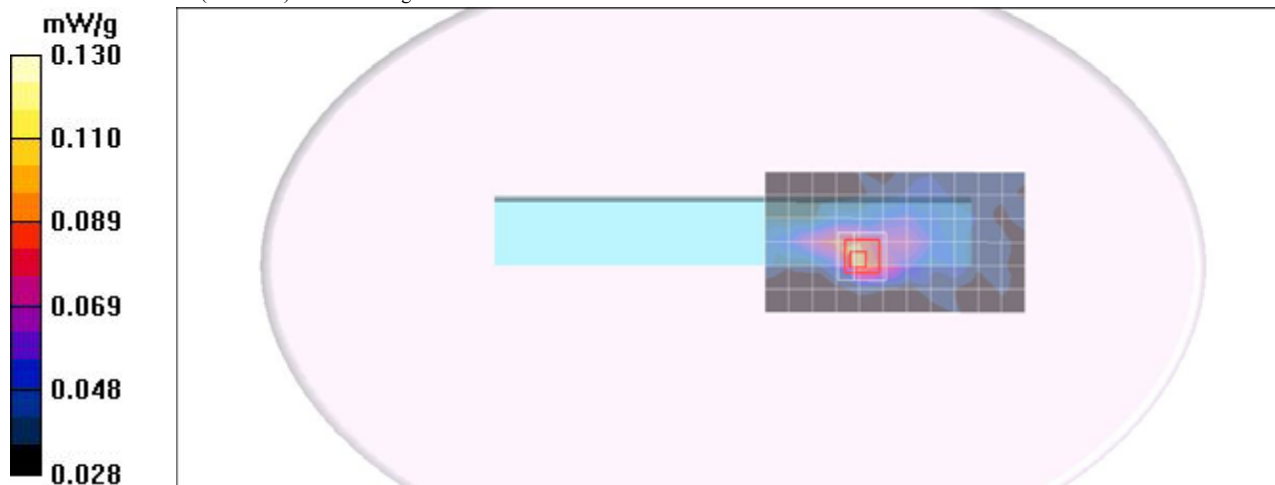

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 - Tablet 4PP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet PP CH810/Area Scan (7x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.071 mW/g

GPRS Body Tablet PP CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.68 V/m; Power Drift = -0.078 dB
Peak SAR (extrapolated) = 0.101 W/kg
SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.049 mW/g
Maximum value of SAR (measured) = 0.079 mW/g

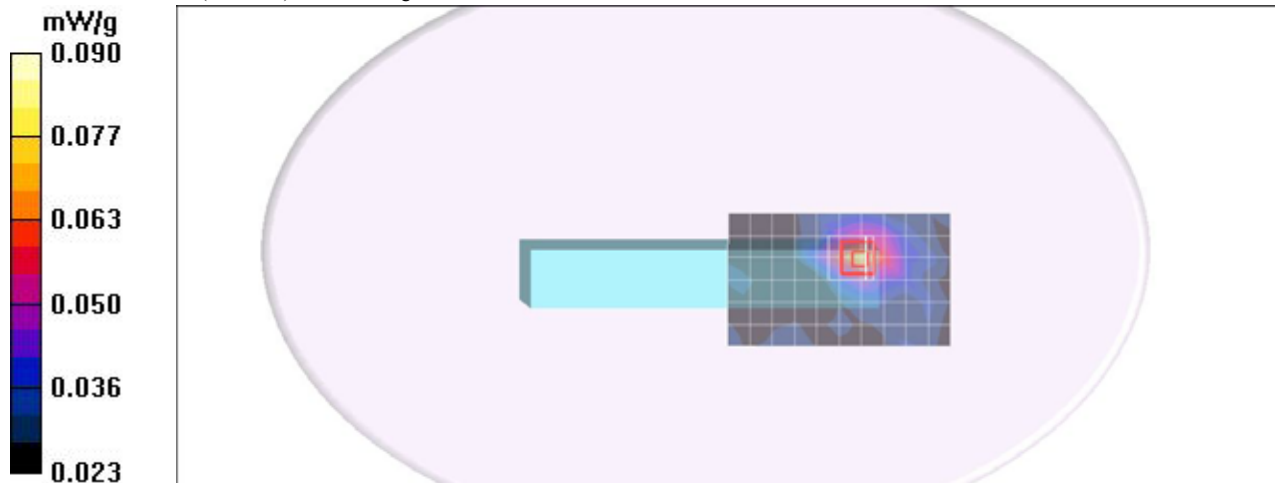

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 - Tablet SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet SP CH512/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.25 mW/g

GPRS Body Tablet SP CH512/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.94 V/m; Power Drift = -0.093 dB
Peak SAR (extrapolated) = 1.99 W/kg
SAR(1 g) = 0.999 mW/g; SAR(10 g) = 0.493 mW/g
Maximum value of SAR (measured) = 1.43 mW/g

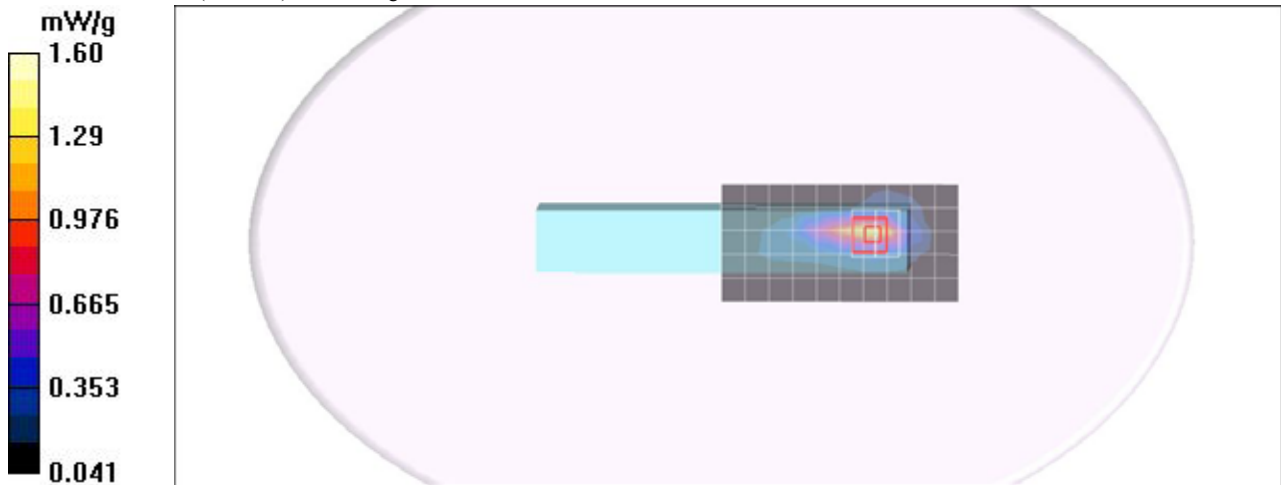

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 - Tablet SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet SP CH661/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.09 mW/g

GPRS Body Tablet SP CH661/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 6.67 V/m; Power Drift = -0.150 dB
Peak SAR (extrapolated) = 1.75 W/kg
SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.436 mW/g
Maximum value of SAR (measured) = 1.26 mW/g

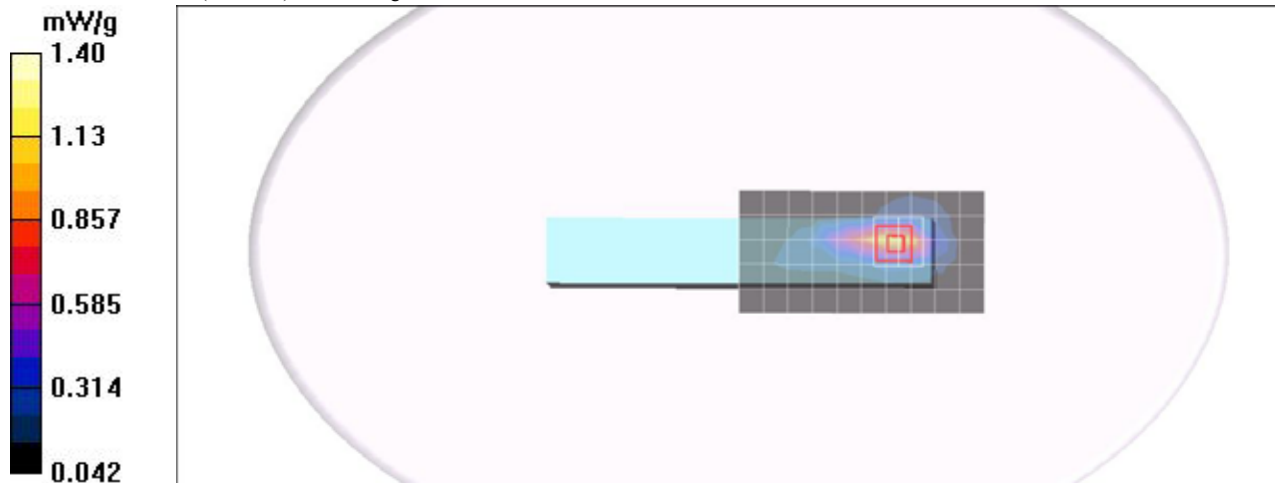

Test Laboratory: Compliance Certification Services Inc.

GPRS 1900 - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet SP CH810/Area Scan (6x11x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.24 mW/g

GPRS Body Tablet SP CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.12 V/m; Power Drift = -0.099 dB
Peak SAR (extrapolated) = 2.17 W/kg
SAR(1 g) = 1.070 mW/g; SAR(10 g) = 0.521 mW/g
Maximum value of SAR (measured) = 1.45 mW/g


GPRS Body Tablet SP CH810/Z Scan (1x1x11):

Measurement grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 0.458 mW/g

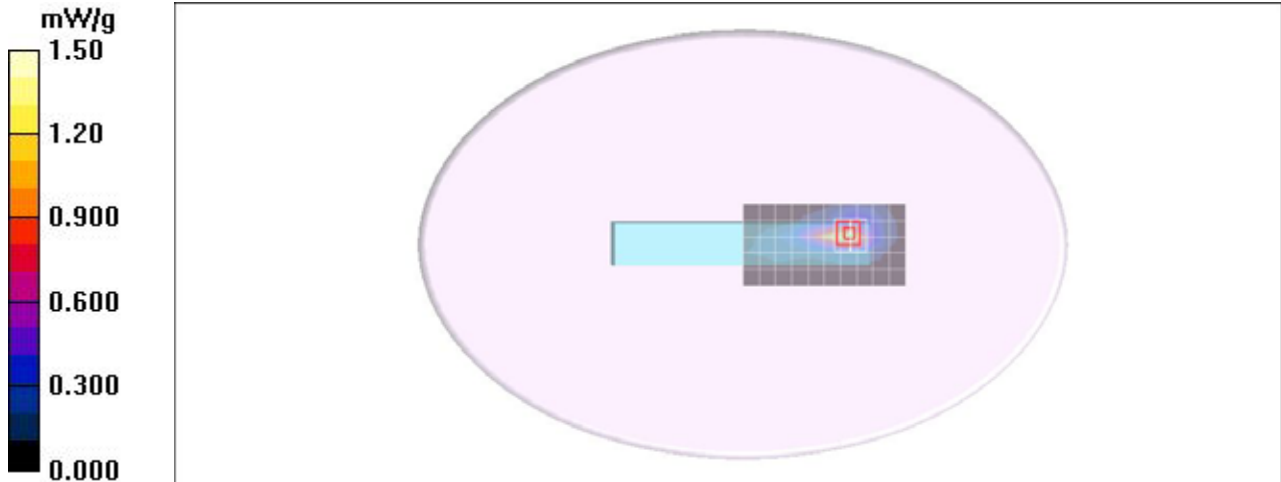

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

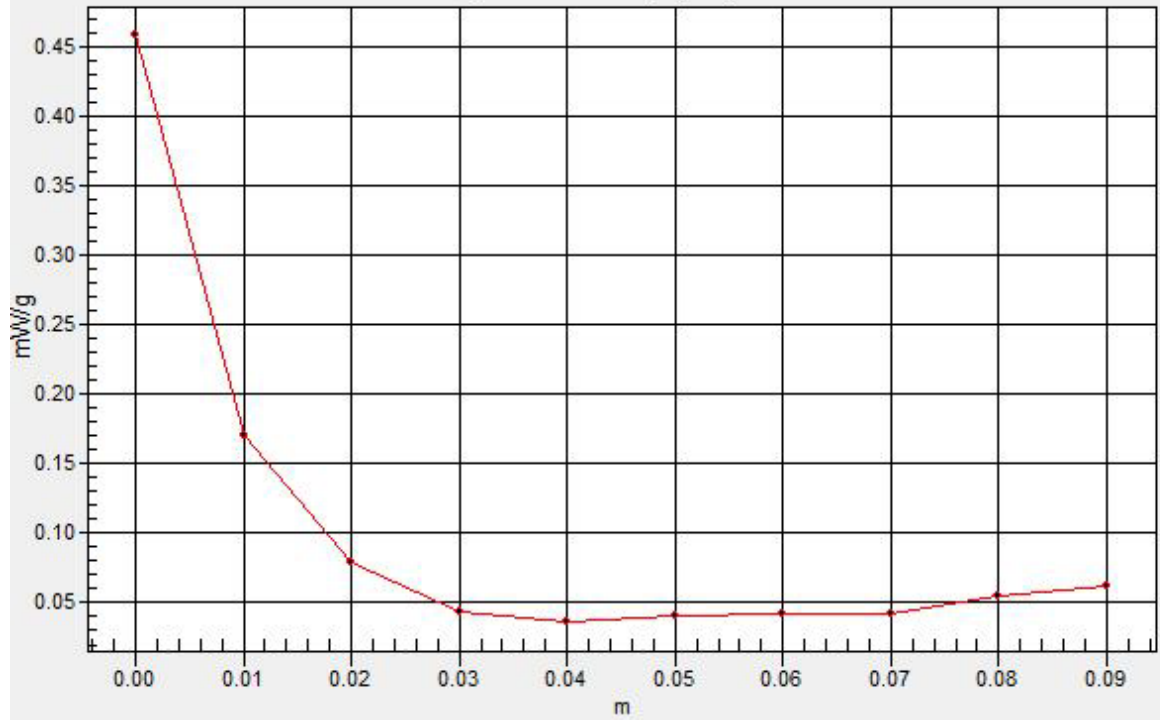

Test Laboratory: Compliance Certification Services Inc.

EGPRS 1900 - NB 1mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: EGPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body NB mode CH810/Area Scan (7x13x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.148 mW/g

EGPRS Body NB mode CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.03 V/m; Power Drift = -0.111 dB
Peak SAR (extrapolated) = 0.245 W/kg
SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.045 mW/g
Maximum value of SAR (measured) = 0.169 mW/g

EGPRS Body NB mode CH810/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.03 V/m; Power Drift = -0.111 dB
Peak SAR (extrapolated) = 0.188 W/kg
SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.061 mW/g
Maximum value of SAR (measured) = 0.159 mW/g

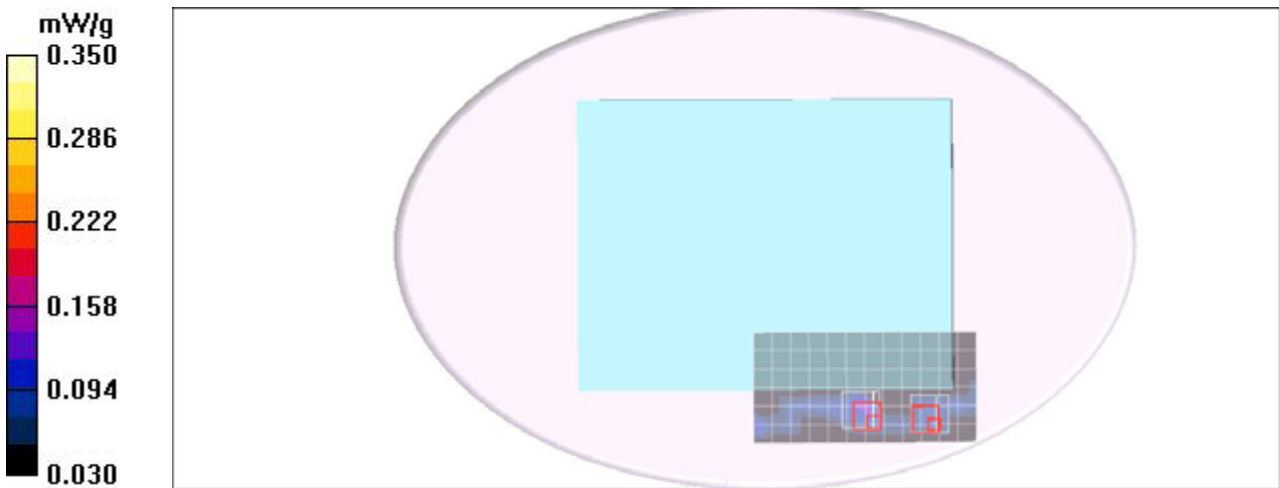

Test Laboratory: Compliance Certification Services Inc.

EGPRS 1900 - Lap Held 2 mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: EGPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body Tap Held mode CH810/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.229 mW/g

EGPRS Body Tap Held mode CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.78 V/m; Power Drift = -0.089 dB
Peak SAR (extrapolated) = 0.127 W/kg
SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.069 mW/g
Maximum value of SAR (measured) = 0.095 mW/g

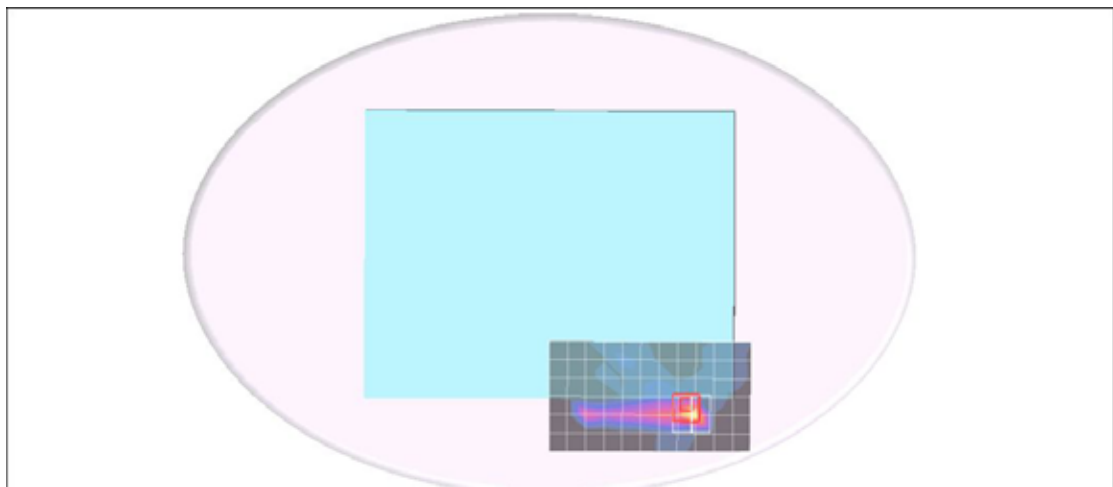

Test Laboratory: Compliance Certification Services Inc.

EGPRS 1900 - Tablet 3PL CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: EGPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


EGPRS Body Tablet PL CH810/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.075 mW/g

EGPRS Body Tablet PL CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.53 V/m; Power Drift = -0.137 dB
Peak SAR (extrapolated) = 0.087 W/kg
SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.050 mW/g
Maximum value of SAR (measured) = 0.076 mW/g

EGPRS Body Tablet PL CH810/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.53 V/m; Power Drift = -0.137 dB
Peak SAR (extrapolated) = 0.090 W/kg
SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.041 mW/g
Maximum value of SAR (measured) = 0.076 mW/g

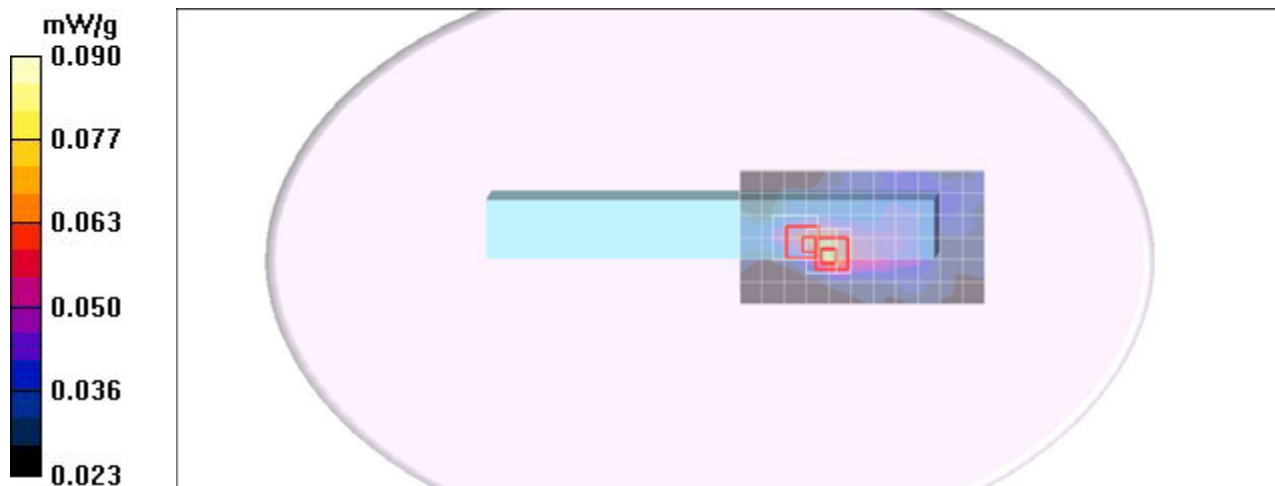

Test Laboratory: Compliance Certification Services Inc.

EGPRS 1900 - Tablet 4PP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A


Communication System: EGPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body Tablet PP CH810/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.065 mW/g

EGPRS Body Tablet PP CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.11 V/m; Power Drift = -0.114 dB
Peak SAR (extrapolated) = 0.086 W/kg
SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.042 mW/g
Maximum value of SAR (measured) = 0.072 mW/g

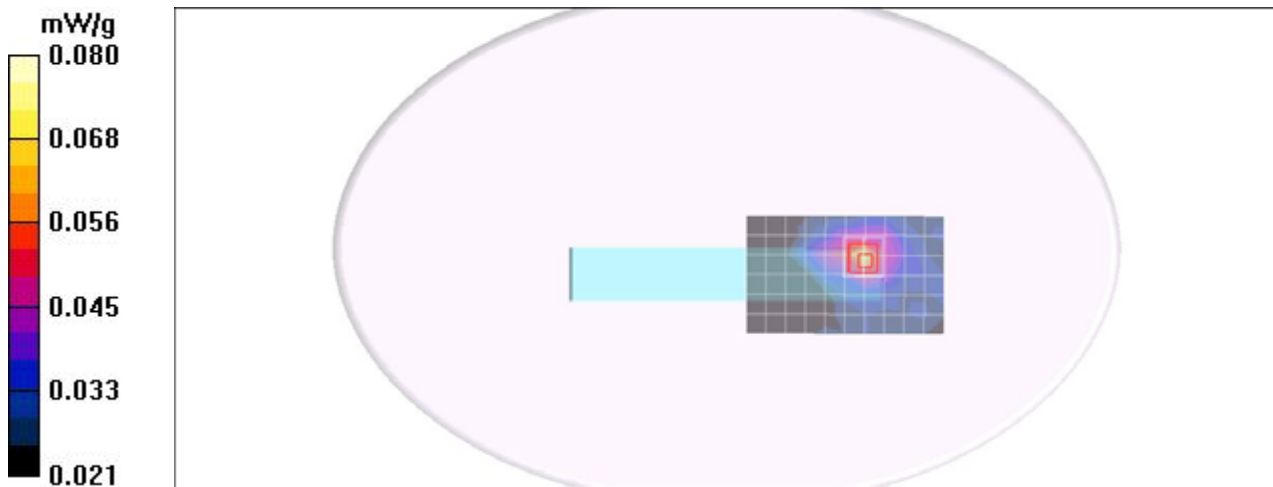

Test Laboratory: Compliance Certification Services Inc.

EGPRS 1900 - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A


Communication System: EGPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(5.97, 5.97, 5.97);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS 1900 Body Tablet SP CH810/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.00 mW/g

EGPRS 1900 Body Tablet SP CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.29 V/m; Power Drift = -0.041 dB
Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.571 mW/g; SAR(10 g) = 0.377 mW/g
Maximum value of SAR (measured) = 1.10 mW/g

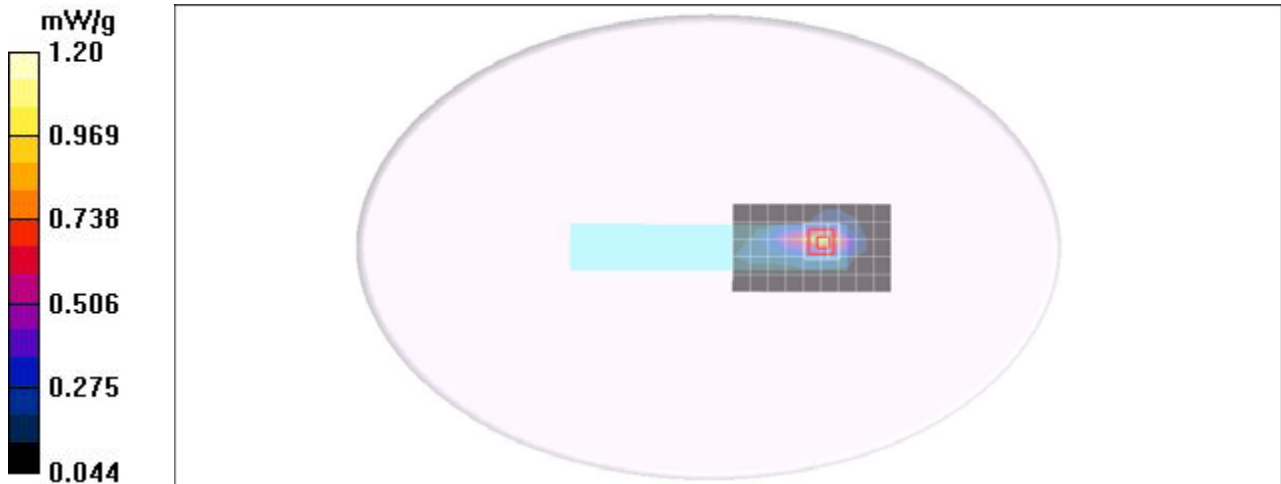

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND V - Notebook mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND V Body Notebook mode CH4182/Area Scan (8x12x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.066 mW/g

WCDMA BAND V Body Notebook mode CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.51 V/m; Power Drift = -0.095 dB
Peak SAR (extrapolated) = 0.089 W/kg
SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.023 mW/g
Maximum value of SAR (measured) = 0.079 mW/g

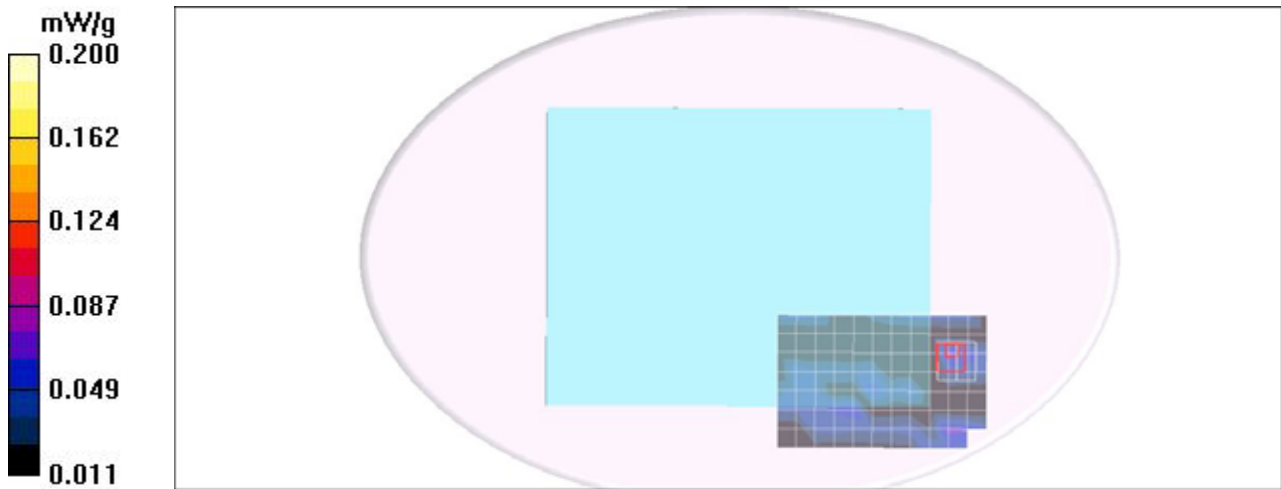

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND V - Lap Held mode CM Battery wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND V Body Tap Held mode CH4182/Area Scan (8x12x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.195 mW/g

WCDMA BAND V Body Tap Held mode CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.30 V/m; Power Drift = -0.164 dB
Peak SAR (extrapolated) = 0.280 W/kg
SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.161 mW/g
Maximum value of SAR (measured) = 0.250 mW/g

WCDMA BAND V Body Tap Held mode CH4182/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.30 V/m; Power Drift = -0.164 dB
Peak SAR (extrapolated) = 0.187 W/kg
SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.099 mW/g
Maximum value of SAR (measured) = 0.163 mW/g

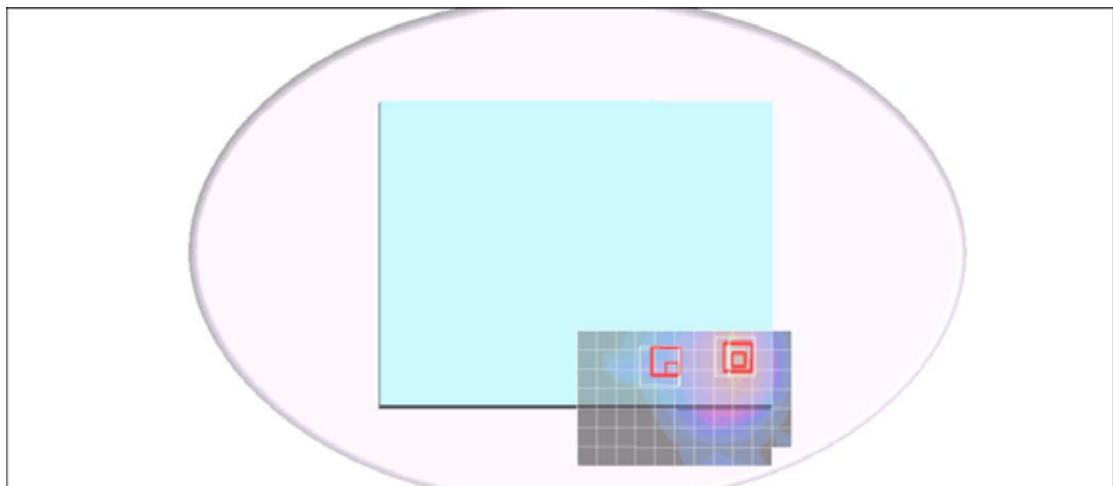

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND V - Tablet 3PL CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND V Body Tablet PL CH4182/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.029 mW/g

WCDMA BAND V Body Tablet PL CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.00 V/m; Power Drift = -0.113 dB
Peak SAR (extrapolated) = 0.049 W/kg
SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.021 mW/g
Maximum value of SAR (measured) = 0.031 mW/g

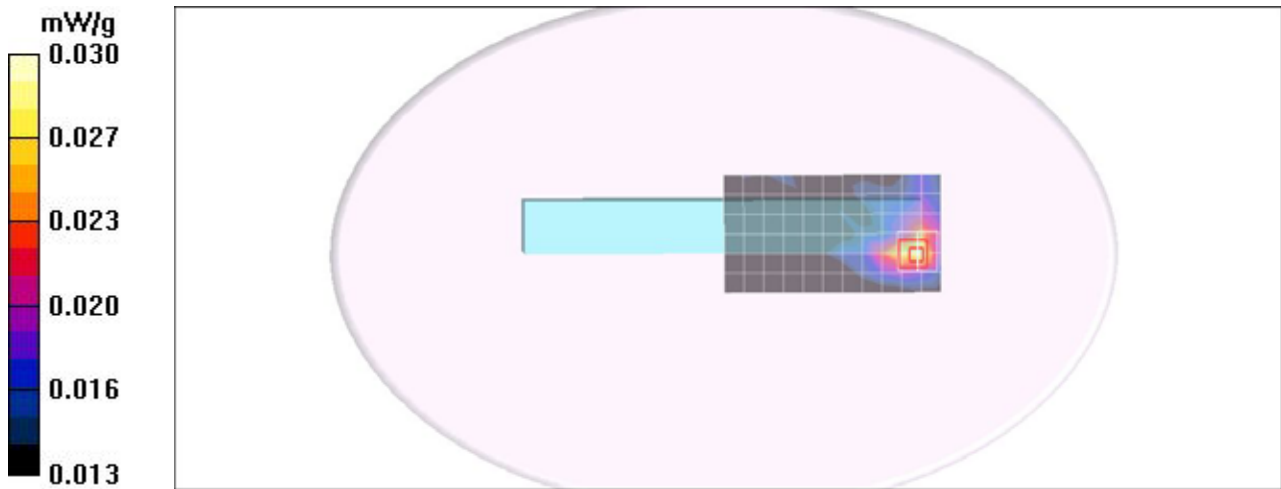

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND V - Tablet 4PP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND V Body Tablet PP CH4182/Area Scan (6x11x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.121 mW/g

WCDMA BAND V Body Tablet PP CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.87 V/m; Power Drift = -0.117 dB
Peak SAR (extrapolated) = 0.154 W/kg
SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.020 mW/g
Maximum value of SAR (measured) = 0.132 mW/g

WCDMA BAND V Body Tablet PP CH4182/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.87 V/m; Power Drift = -0.117 dB
Peak SAR (extrapolated) = 0.180 W/kg
SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.061 mW/g
Maximum value of SAR (measured) = 0.137 mW/g

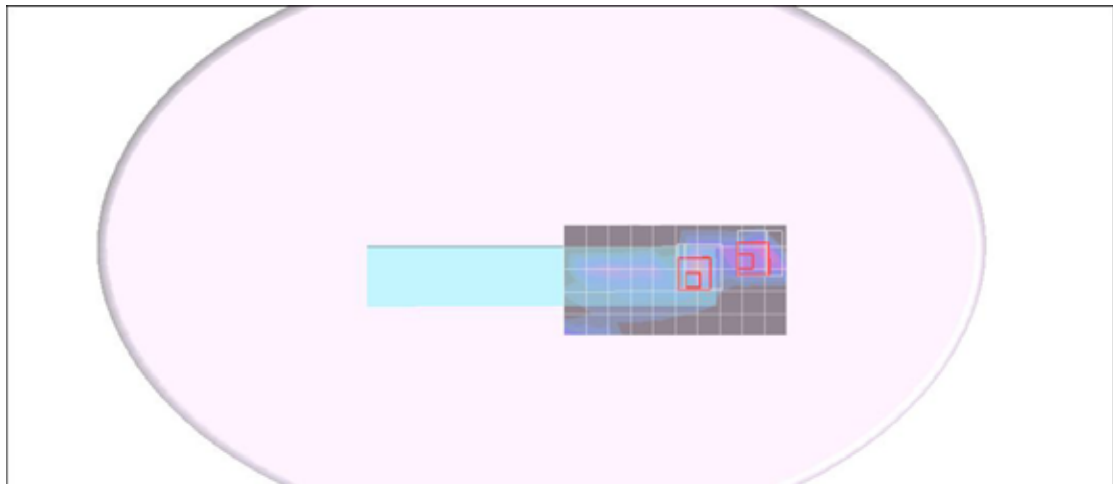

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND V - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND V Body Tablet SP CH4182/Area Scan (6x11x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.559 mW/g

WCDMA BAND V Body Tablet SP CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 16.1 V/m; Power Drift = -0.047 dB
Peak SAR (extrapolated) = 1.55 W/kg
SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.401 mW/g
Maximum value of SAR (measured) = 0.977 mW/g


WCDMA BAND V Body Tablet SP CH4182/Z Scan (1x1x11):

Measurement grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 0.322 mW/g

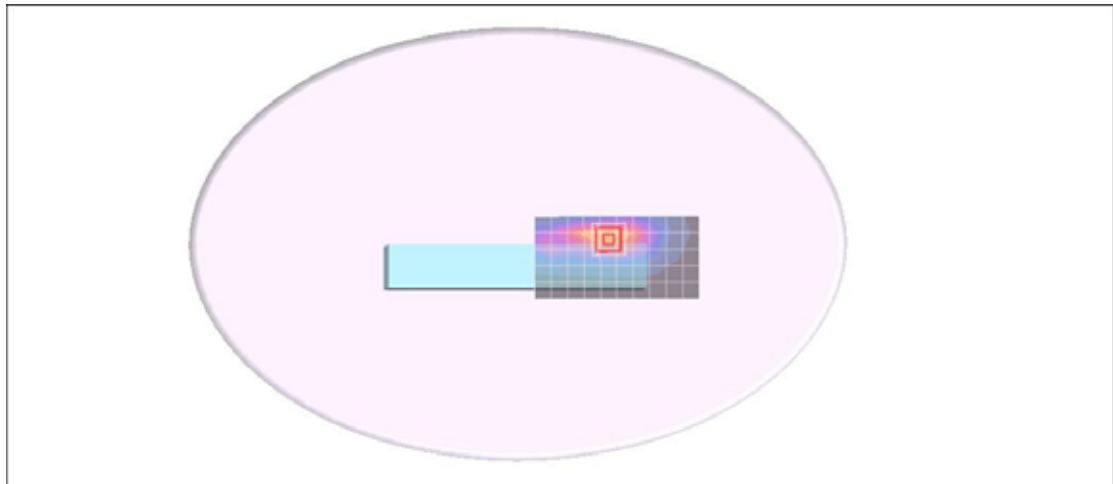

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

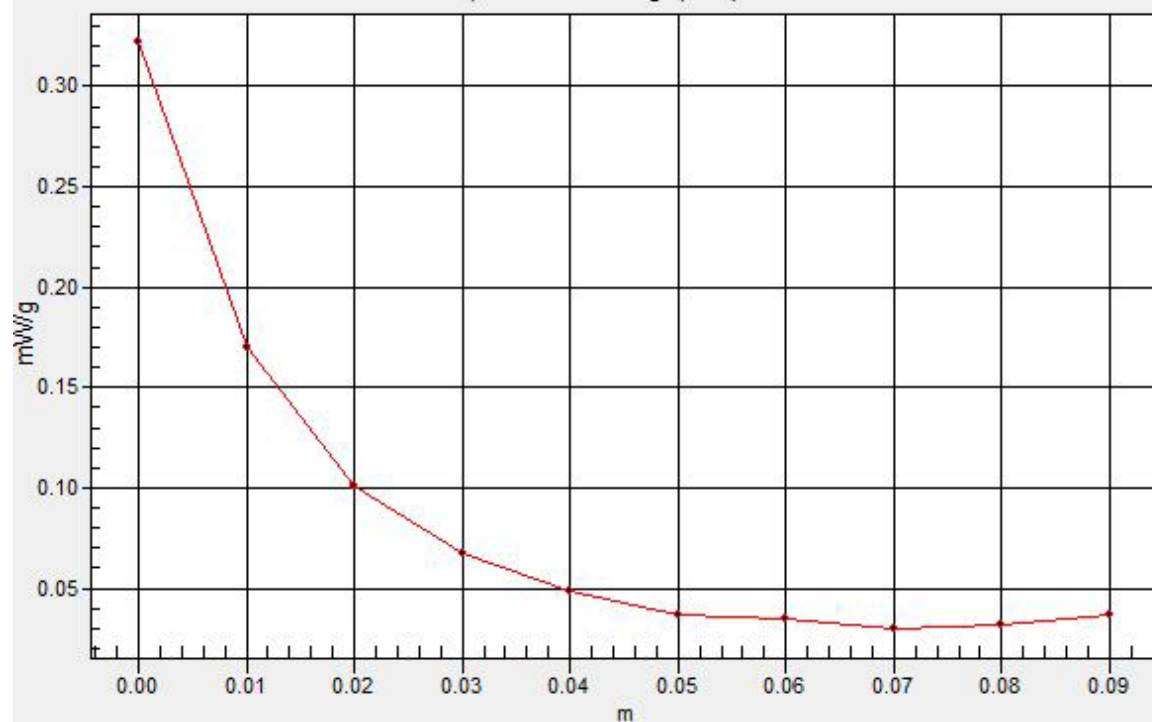

Test Laboratory: Compliance Certification Services Inc.

HSDPA BAND V - Notebook mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSDPA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA BAND V Body Notebook mode CH4182/Area Scan (9x16x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.025 mW/g

HSDPA BAND V Body Notebook mode CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.65 V/m; Power Drift = -0.078 dB
Peak SAR (extrapolated) = 0.027 W/kg
SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.022 mW/g
Maximum value of SAR (measured) = 0.026 mW/g

HSDPA BAND V Body Notebook mode CH4182/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.65 V/m; Power Drift = -0.078 dB
Peak SAR (extrapolated) = 0.028 W/kg
SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.022 mW/g
Maximum value of SAR (measured) = 0.026 mW/g

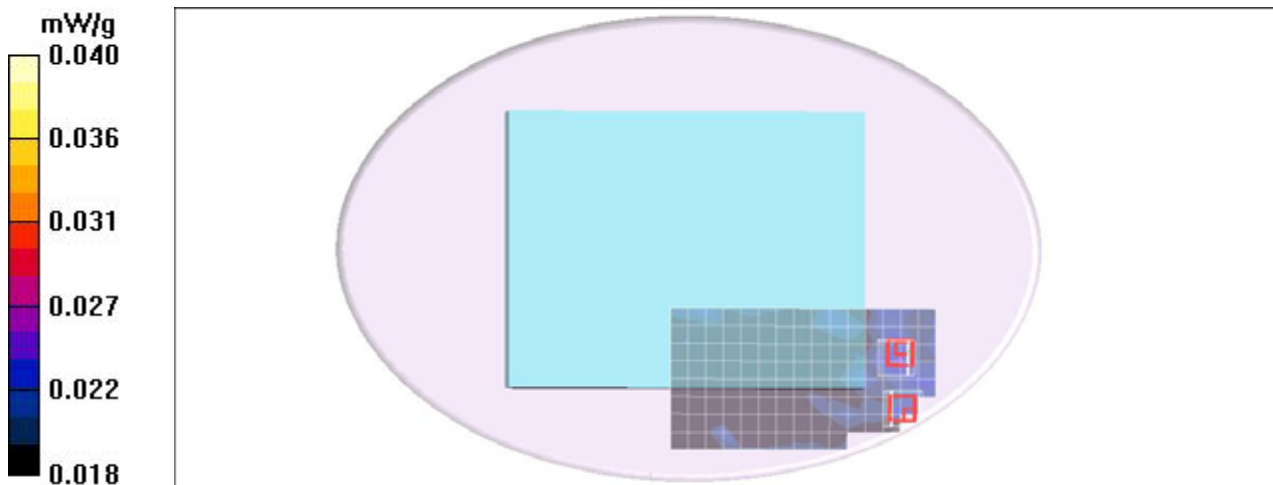

Test Laboratory: Compliance Certification Services Inc.

HSDPA BAND V - Lap Held 2 mode CM Battery wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSDPA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA BAND V Body Tap Held mode CH4182/Area Scan (8x12x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.156 mW/g

HSDPA BAND V Body Tap Held mode CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.15 V/m; Power Drift = -0.145 dB
Peak SAR (extrapolated) = 0.203 W/kg
SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.127 mW/g
Maximum value of SAR (measured) = 0.179 mW/g

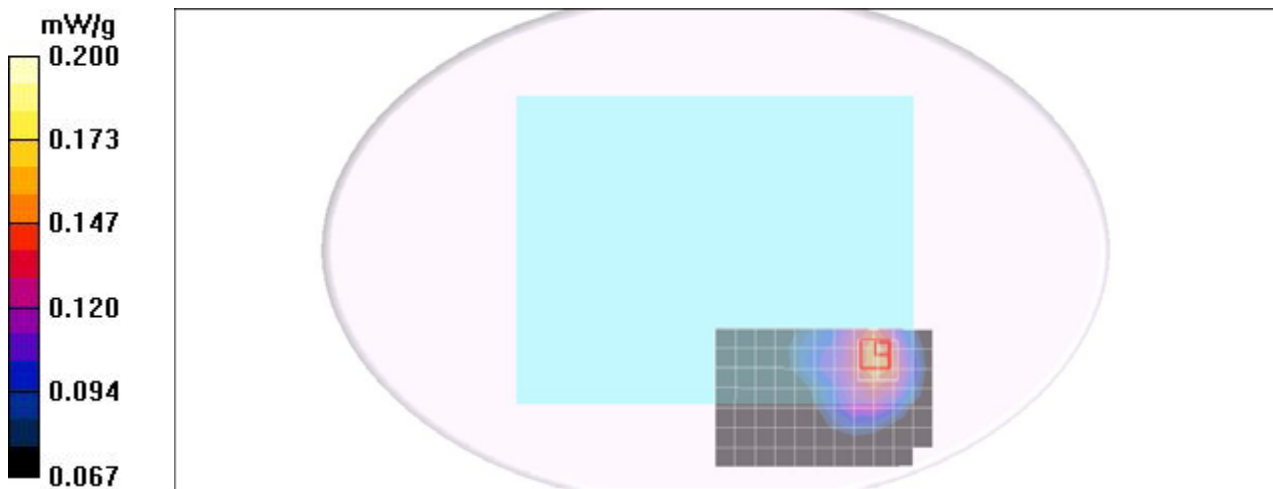

Test Laboratory: Compliance Certification Services Inc.

HSDPA BAND V - Tablet 3PL CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSDPA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA BAND V Body Tablet PL CH4182/Area Scan (8x12x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.017 mW/g

HSDPA BAND V Body Tablet PL CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.04 V/m; Power Drift = -0.110 dB
Peak SAR (extrapolated) = 0.029 W/kg
SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.016 mW/g
Maximum value of SAR (measured) = 0.022 mW/g

HSDPA BAND V Body Tablet PL CH4182/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.04 V/m; Power Drift = -0.110 dB
Peak SAR (extrapolated) = 0.024 W/kg
SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.013 mW/g
Maximum value of SAR (measured) = 0.015 mW/g

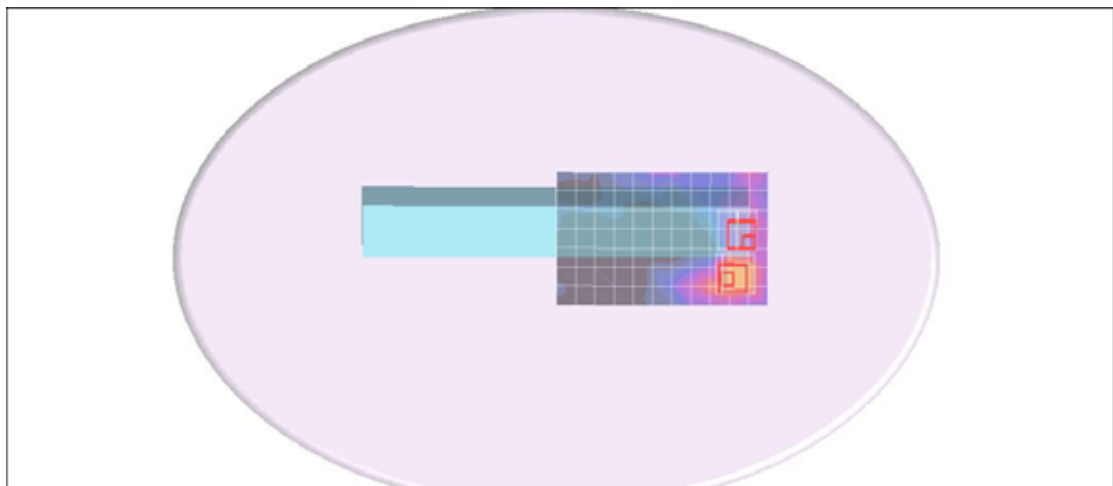

Test Laboratory: Compliance Certification Services Inc.

HSDPA BAND V - Tablet 4PP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSDPA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA BAND V Body Tablet PP CH4182/Area Scan (6x11x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.108 mW/g

HSDPA BAND V Body Tablet PP CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.64 V/m; Power Drift = -0.067 dB
Peak SAR (extrapolated) = 0.251 W/kg
SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.033 mW/g
Maximum value of SAR (measured) = 0.136 mW/g

HSDPA BAND V Body Tablet PP CH4182/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.64 V/m; Power Drift = -0.067 dB
Peak SAR (extrapolated) = 0.163 W/kg
SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.034 mW/g
Maximum value of SAR (measured) = 0.131 mW/g

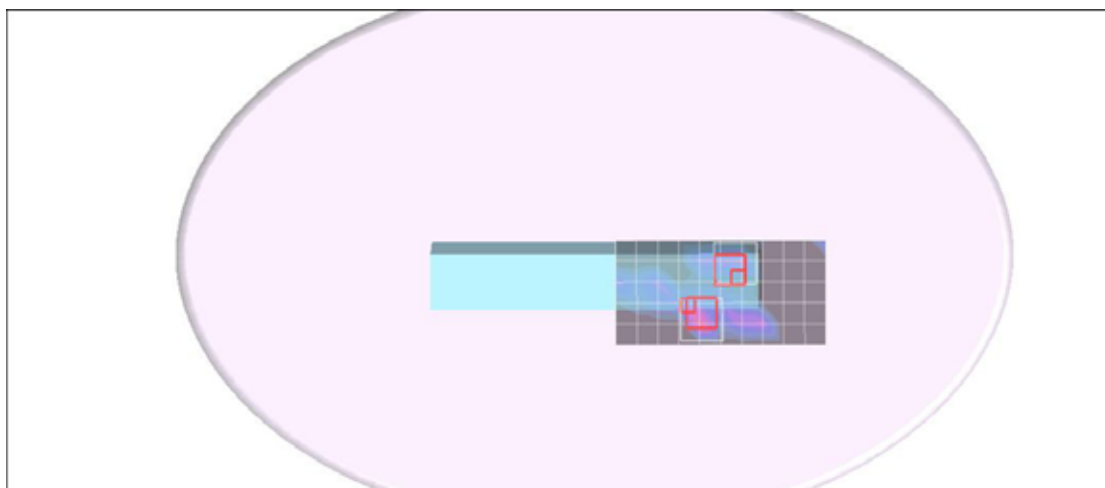

Test Laboratory: Compliance Certification Services Inc.

HSDPA BAND V - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSDPA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA BAND V Body Tablet SP CH4182/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.392 mW/g

HSDPA BAND V Body Tablet SP CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 13.9 V/m; Power Drift = -0.074 dB
Peak SAR (extrapolated) = 1.00 W/kg
SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.273 mW/g
Maximum value of SAR (measured) = 0.643 mW/g

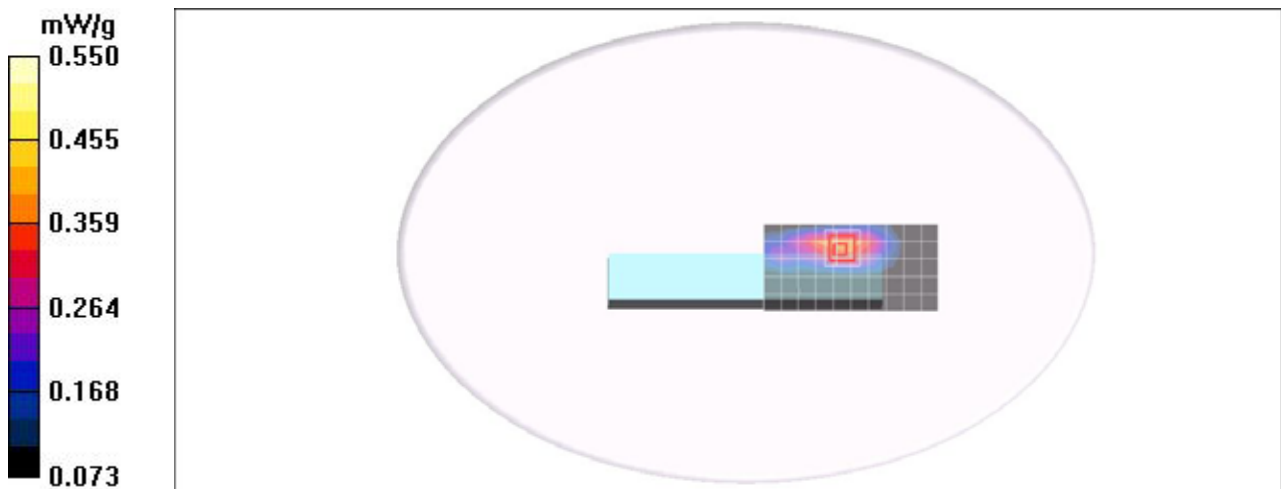

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND V - Notebook mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND V Body Notebook mode CH4182/Area Scan (12x16x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.027 mW/g

HSUPA BAND V Body Notebook mode CH4182/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.09 V/m; Power Drift = -0.030 dB
Peak SAR (extrapolated) = 0.030 W/kg
SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.025 mW/g
Maximum value of SAR (measured) = 0.029 mW/g

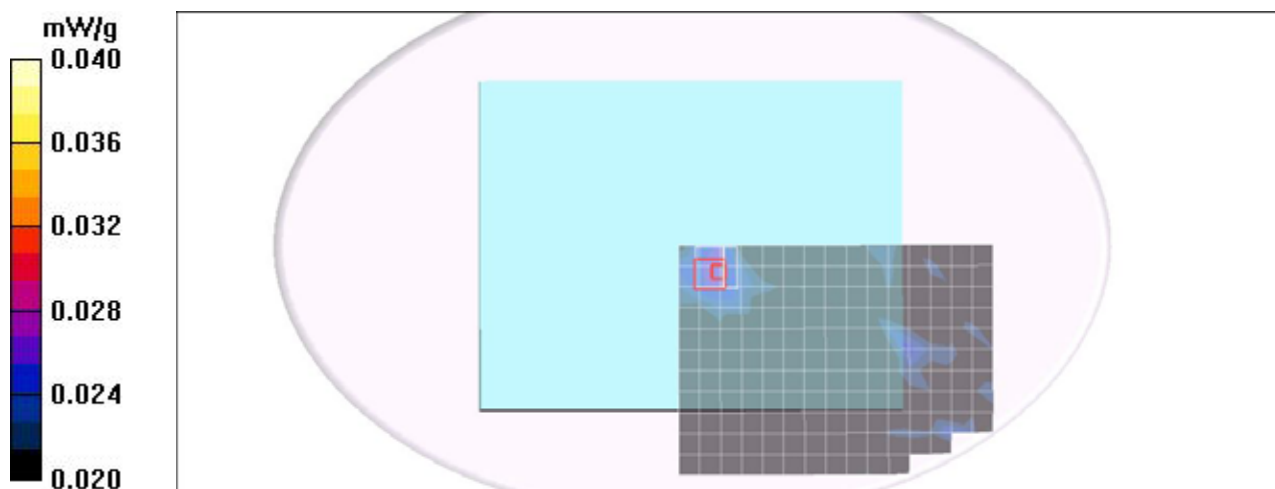

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND V - Lap Held 2 mode CM Battery wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND V Body Tap Held mode CH4182/Area Scan (8x12x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.148 mW/g

HSUPA BAND V Body Tap Held mode CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.20 V/m; Power Drift = -0.087 dB
Peak SAR (extrapolated) = 0.264 W/kg
SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.122 mW/g
Maximum value of SAR (measured) = 0.196 mW/g

HSUPA BAND V Body Tap Held mode CH4182/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.20 V/m; Power Drift = -0.087 dB
Peak SAR (extrapolated) = 0.186 W/kg
SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.097 mW/g
Maximum value of SAR (measured) = 0.182 mW/g

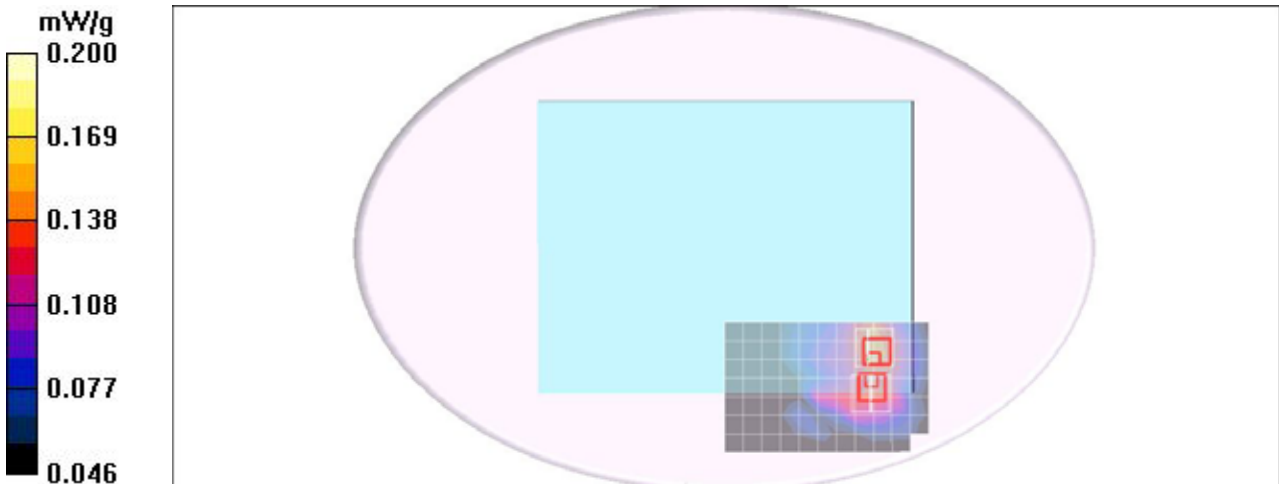

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND V - Tablet 3PL CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND V Body Tablet PL CH4182/Area Scan (8x11x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.067 mW/g

HSUPA BAND V Body Tablet PL CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.91 V/m; Power Drift = -0.118 dB
Peak SAR (extrapolated) = 0.085 W/kg
SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.025 mW/g
Maximum value of SAR (measured) = 0.075 mW/g

HSUPA BAND V Body Tablet PL CH4182/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.91 V/m; Power Drift = -0.118 dB
Peak SAR (extrapolated) = 0.115 W/kg
SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.037 mW/g
Maximum value of SAR (measured) = 0.100 mW/g

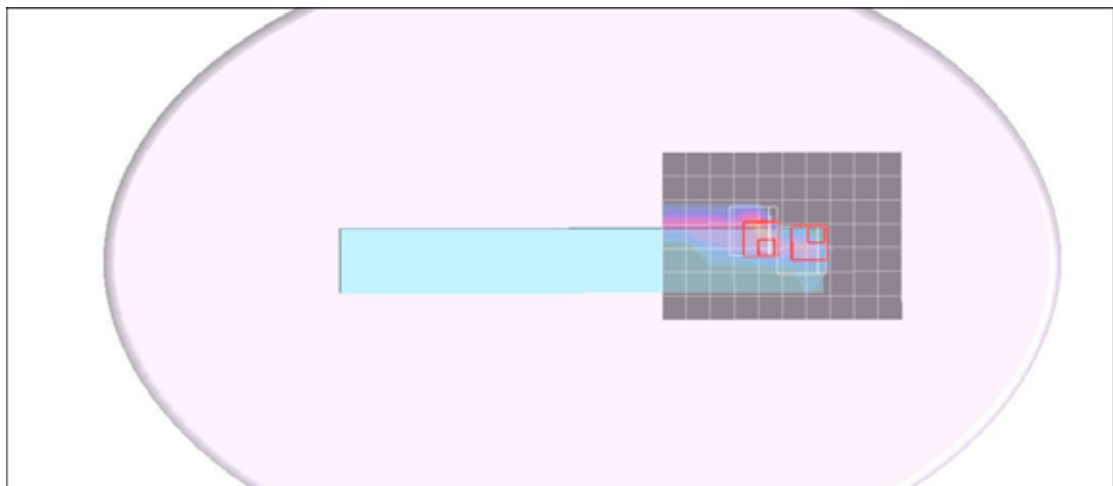

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND V - Tablet 4PP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND V Body Tablet PP CH4182/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.058 mW/g

HSUPA BAND V Body Tablet PP CH4182/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 8.59 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.124 mW/g

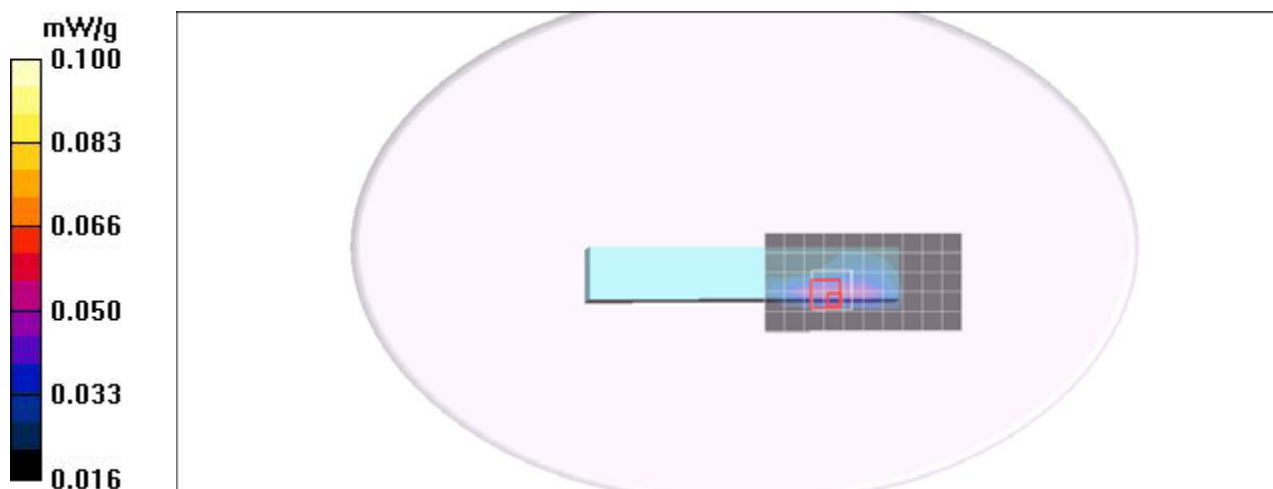

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND V - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND V Body Tablet SP CH4182/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.506 mW/g

HSUPA BAND V Body Tablet SP CH4182/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.4 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.295 mW/g

Maximum value of SAR (measured) = 0.662 mW/g

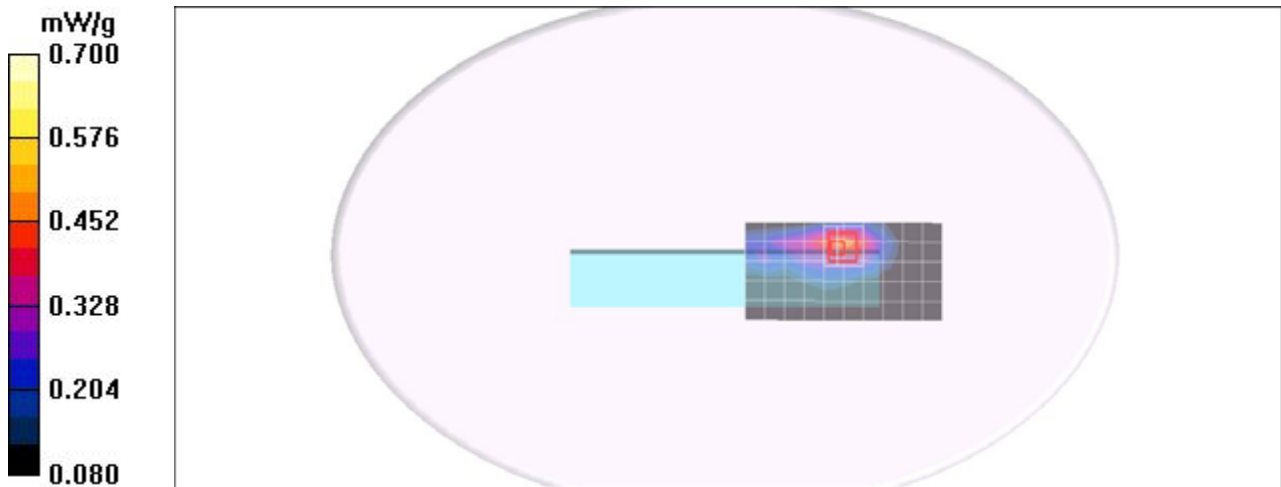

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND II - Notebook mode CM Battery wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND II Body Notebook mode CH9400/Area Scan (10x15x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.046 mW/g

WCDMA BAND II Body Notebook mode CH9400/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.16 V/m; Power Drift = -0.117 dB
Peak SAR (extrapolated) = 0.089 W/kg
SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.038 mW/g
Maximum value of SAR (measured) = 0.048 mW/g

WCDMA BAND II Body Notebook mode CH9400/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.16 V/m; Power Drift = -0.117 dB
Peak SAR (extrapolated) = 0.061 W/kg
SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.039 mW/g
Maximum value of SAR (measured) = 0.050 mW/g

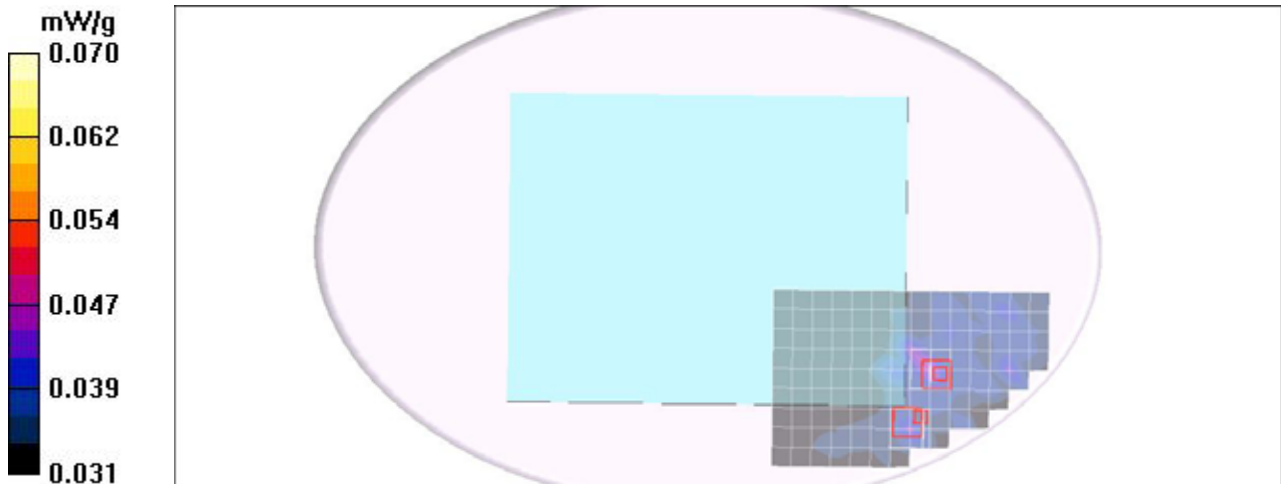

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND II - Lap Held 2 mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND II Body Tap Held mode CH9262/Area Scan (7x12x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.162 mW/g

WCDMA BAND II Body Tap Held mode CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.58 V/m; Power Drift = -0.118 dB
Peak SAR (extrapolated) = 0.405 W/kg
SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.051 mW/g
Maximum value of SAR (measured) = 0.165 mW/g

WCDMA BAND II Body Tap Held mode CH9262/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.58 V/m; Power Drift = -0.118 dB
Peak SAR (extrapolated) = 0.188 W/kg
SAR(1 g) = 0.098 mW/g; SAR(10 g) = 0.067 mW/g
Maximum value of SAR (measured) = 0.187 mW/g

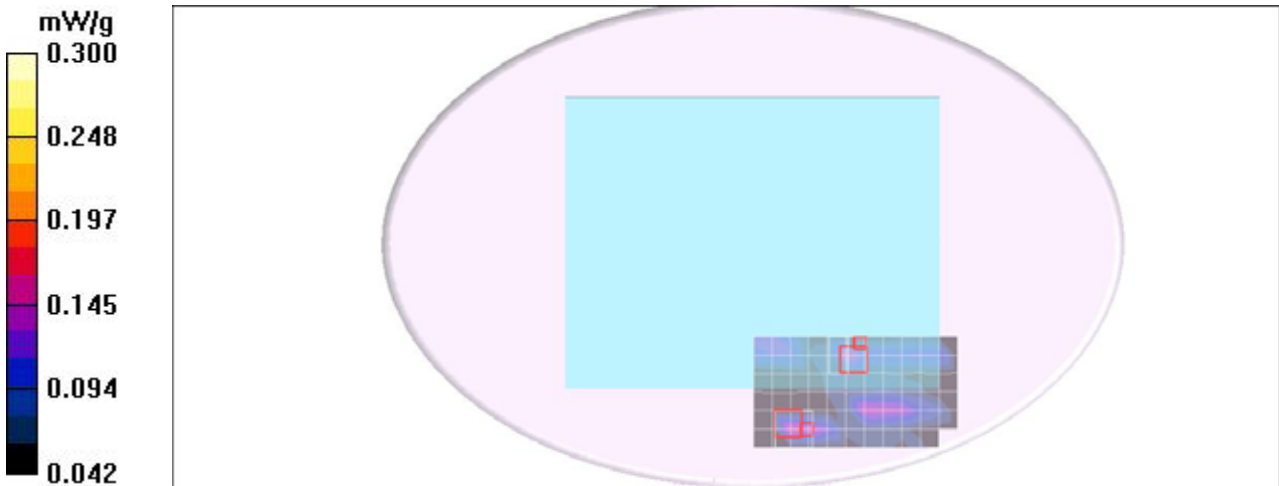

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND II - Tablet 3PL CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND II Body Tablet PL CH9400/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.085 mW/g

WCDMA BAND II Body Tablet PL CH9400/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.34 V/m; Power Drift = -0.149 dB
Peak SAR (extrapolated) = 0.115 W/kg
SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.055 mW/g
Maximum value of SAR (measured) = 0.093 mW/g

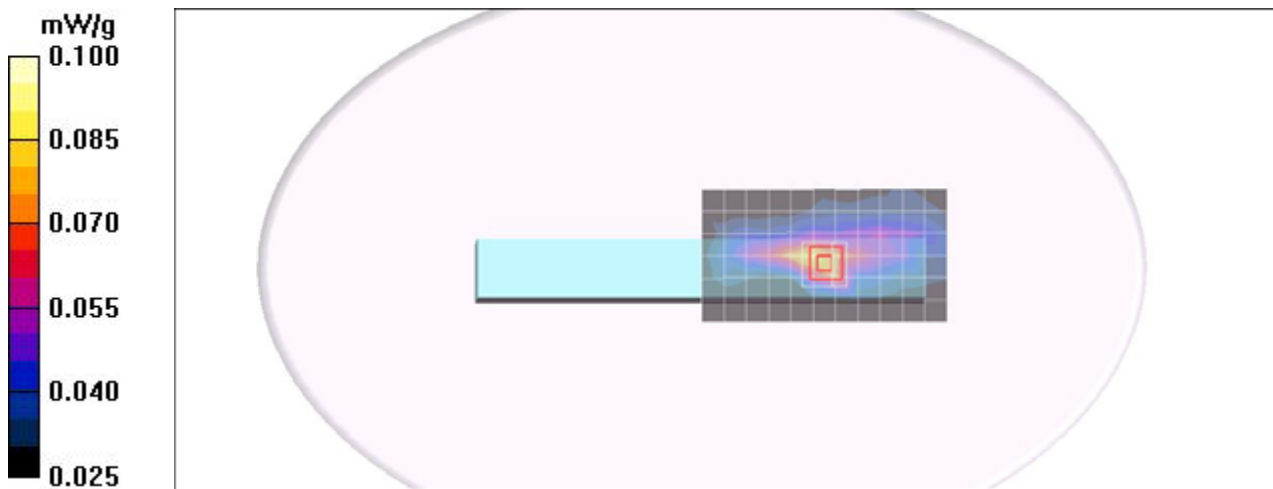

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND II - Tablet 4PP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature:24.6 deg C;Liquid Temperature:23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND II Body Tablet PP CH9400/Area Scan (7x11x1):


Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.187 mW/g

WCDMA BAND II Body Tablet PP CH9400/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.62 V/m; Power Drift = -0.134 dB
Peak SAR (extrapolated) = 0.238 W/kg
SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.045 mW/g
Maximum value of SAR (measured) = 0.195 mW/g

WCDMA BAND II Body Tablet PP CH9400/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 3.62 V/m; Power Drift = -0.134 dB
Peak SAR (extrapolated) = 0.354 W/kg
SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.042 mW/g
Maximum value of SAR (measured) = 0.202 mW/g

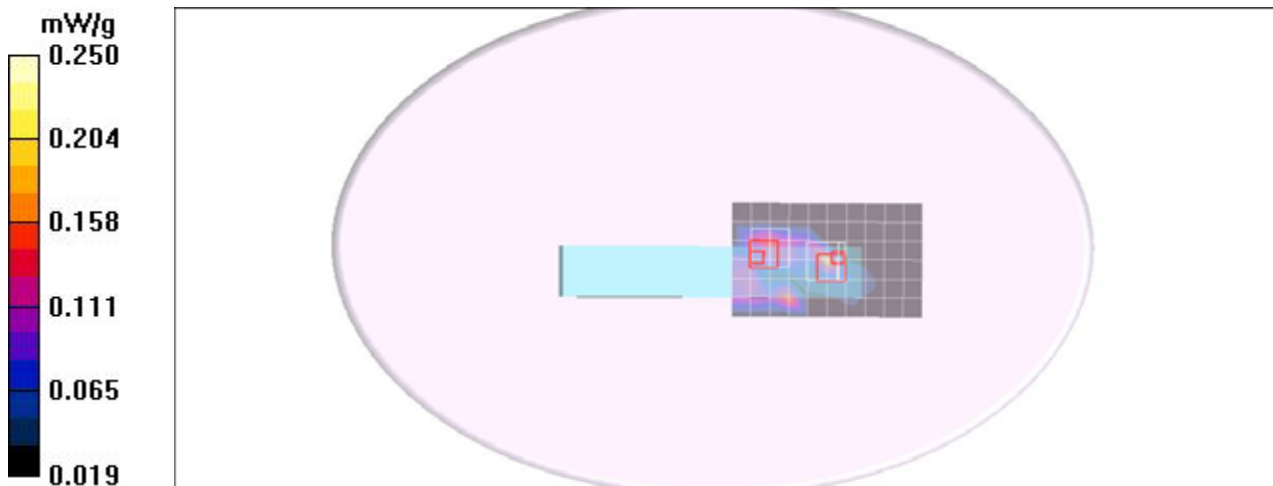

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND II - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND II Body Tablet SP CH9262/Area Scan (6x10x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.67 mW/g

WCDMA BAND II Body Tablet SP CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.35 V/m; Power Drift = -0.074 dB
Peak SAR (extrapolated) = 2.33 W/kg
SAR(1 g) = 1.180 mW/g; SAR(10 g) = 0.583 mW/g
Maximum value of SAR (measured) = 1.65 mW/g


WCDMA BAND II Body Tablet SP CH9262/Z Scan (1x1x11):

Measurement grid: dx=20mm, dy=20mm, dz=10mm
Maximum value of SAR (measured) = 0.516 mW/g

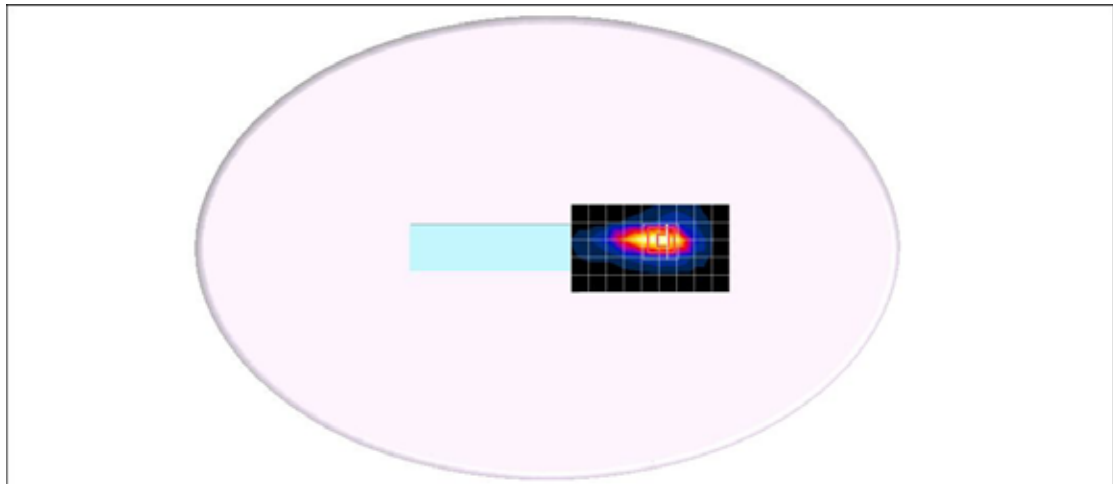

SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

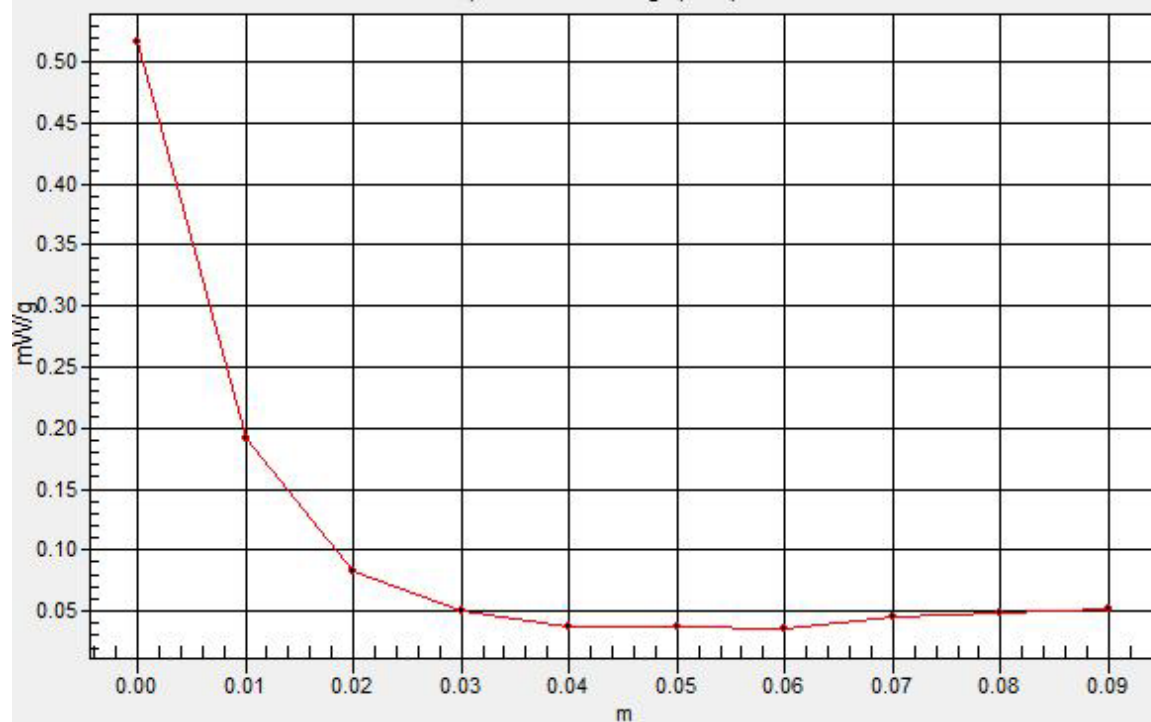

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND II - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND II Body Tablet SP CH9400/Area Scan (6x11x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.774 mW/g

WCDMA BAND II Body Tablet SP CH9400/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm
Reference Value = 5.79 V/m; Power Drift = -0.106 dB
Peak SAR (extrapolated) = 2.05 W/kg
SAR(1 g) = 1.050 mW/g; SAR(10 g) = 0.523 mW/g
Maximum value of SAR (measured) = 1.48 mW/g

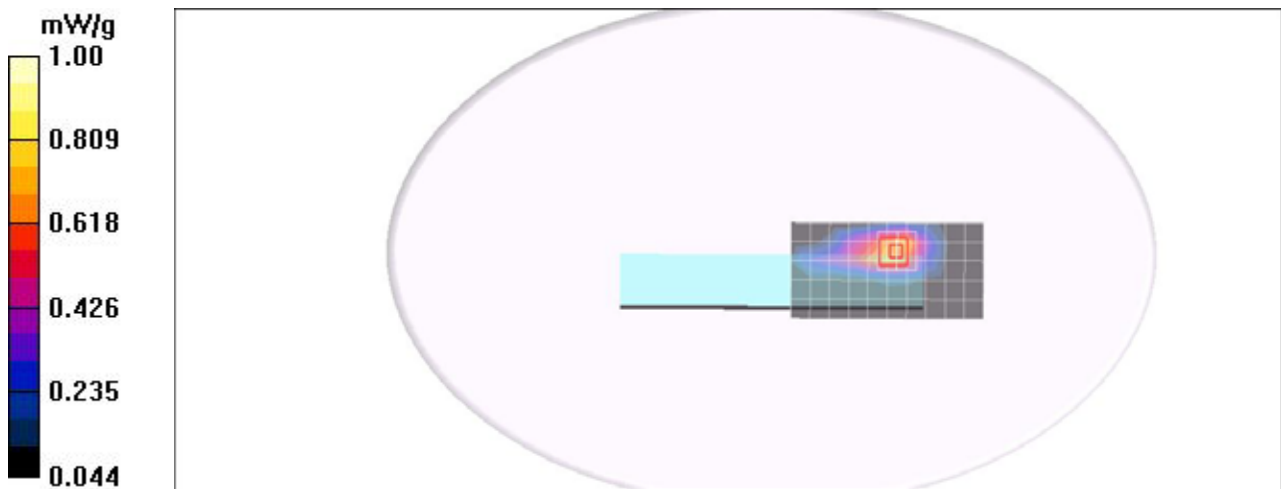

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND II - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND II Body Tablet SP CH9538/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.29 mW/g

WCDMA BAND II Body Tablet SP CH9538/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.90 V/m; Power Drift = -0.149 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1.060 mW/g; SAR(10 g) = 0.513 mW/g

Maximum value of SAR (measured) = 1.41 mW/g

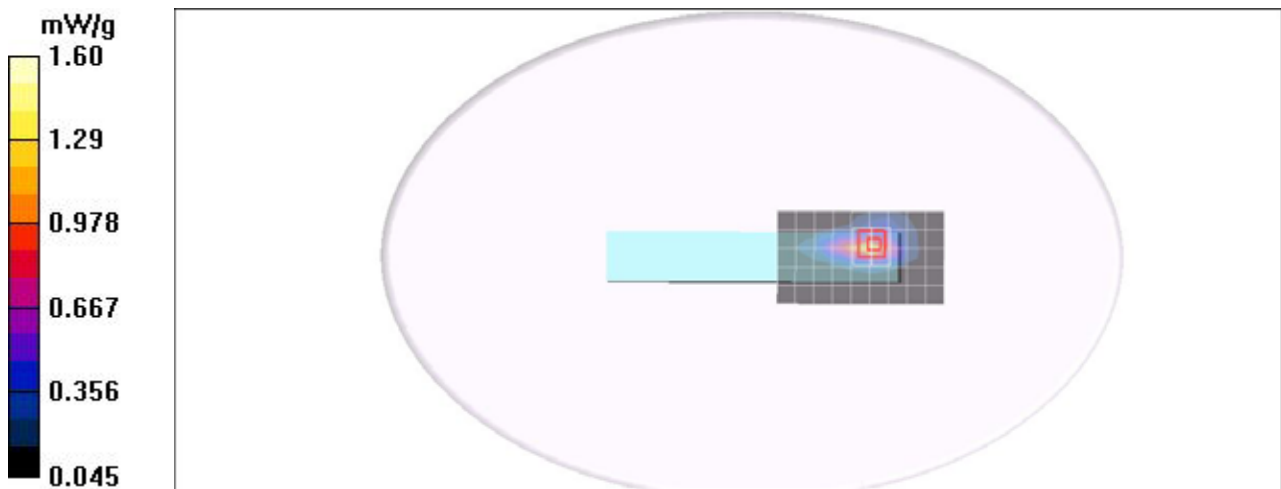

Test Laboratory: Compliance Certification Services Inc.

HSDPA BAND II - Notebook mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSDPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA BAND II Body Notebook mode CH9400/Area Scan (12x16x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.044 mW/g

HSDPA BAND II Body Notebook mode CH9400/Zoom Scan (7x7x9)/Cube 1:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.13 V/m; Power Drift = -0.170 dB

Peak SAR (extrapolated) = 0.058 W/kg

SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.046 mW/g

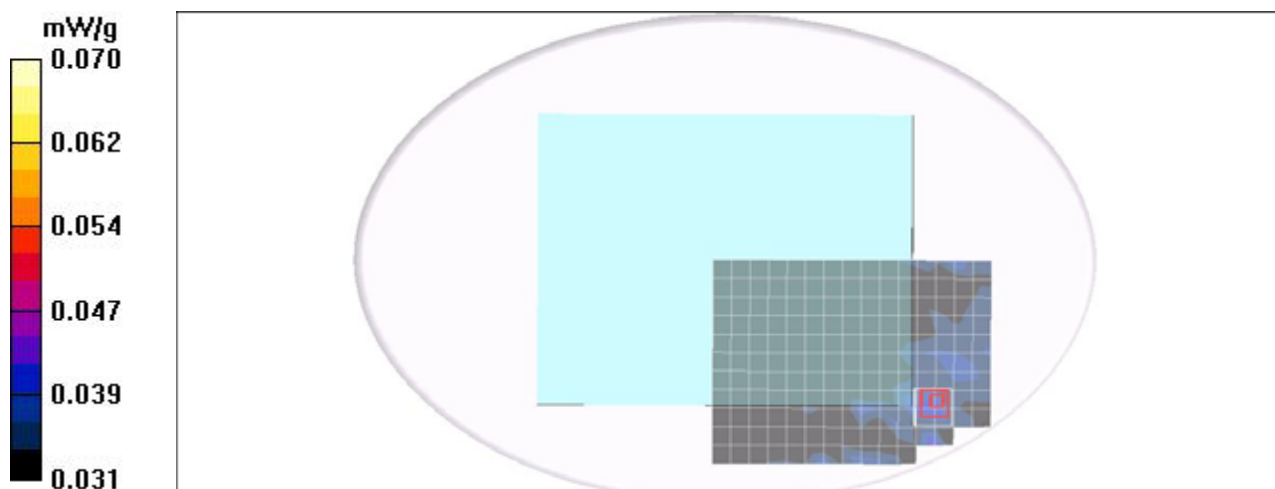

Test Laboratory: Compliance Certification Services Inc.

HSDPA BAND II - Lap Held 2 mode CM Battery 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSDPA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA BAND II Body Tap Held mode CH9262/Area Scan (8x12x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.281 mW/g

HSDPA BAND II Body Tap Held mode CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.54 V/m; Power Drift = -0.121 dB
Peak SAR (extrapolated) = 0.359 W/kg
SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.070 mW/g
Maximum value of SAR (measured) = 0.351 mW/g

HSDPA BAND II Body Tap Held mode CH9262/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.54 V/m; Power Drift = -0.121 dB
Peak SAR (extrapolated) = 0.270 W/kg
SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.061 mW/g
Maximum value of SAR (measured) = 0.266 mW/g

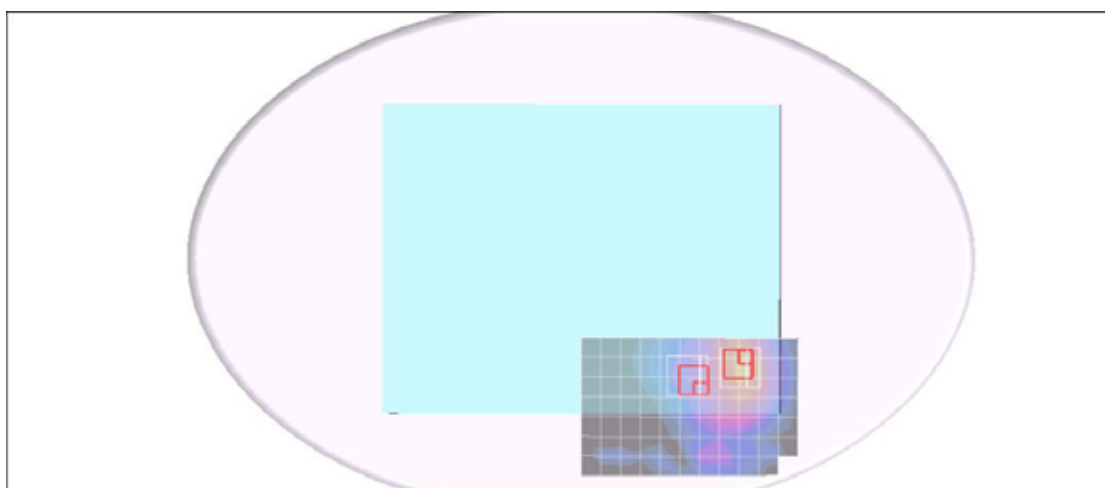

Test Laboratory: Compliance Certification Services Inc.

HSDPA BAND II - Tablet 3PL CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSDPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA BAND II Body Tablet SP CH9400/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.069 mW/g

HSDPA BAND II Body Tablet SP CH9400/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.26 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 0.099 W/kg

SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.078 mW/g

HSDPA BAND II Body Tablet SP CH9400/Zoom Scan (7x7x9)/Cube 1:



Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.26 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 0.078 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.067 mW/g

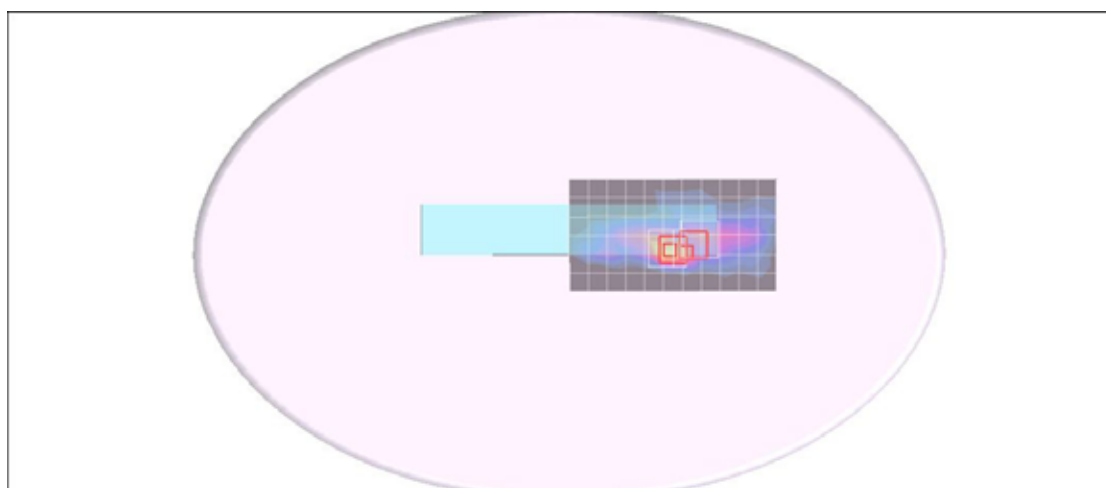

Test Laboratory: Compliance Certification Services Inc.

HSDPA BAND II - Tablet 4PP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSDPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA BAND II Body Tablet PP CH9400/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.209 mW/g

HSDPA BAND II Body Tablet PP CH9400/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.02 V/m; Power Drift = -0.052 dB
Peak SAR (extrapolated) = 0.391 W/kg
SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.067 mW/g
Maximum value of SAR (measured) = 0.231 mW/g

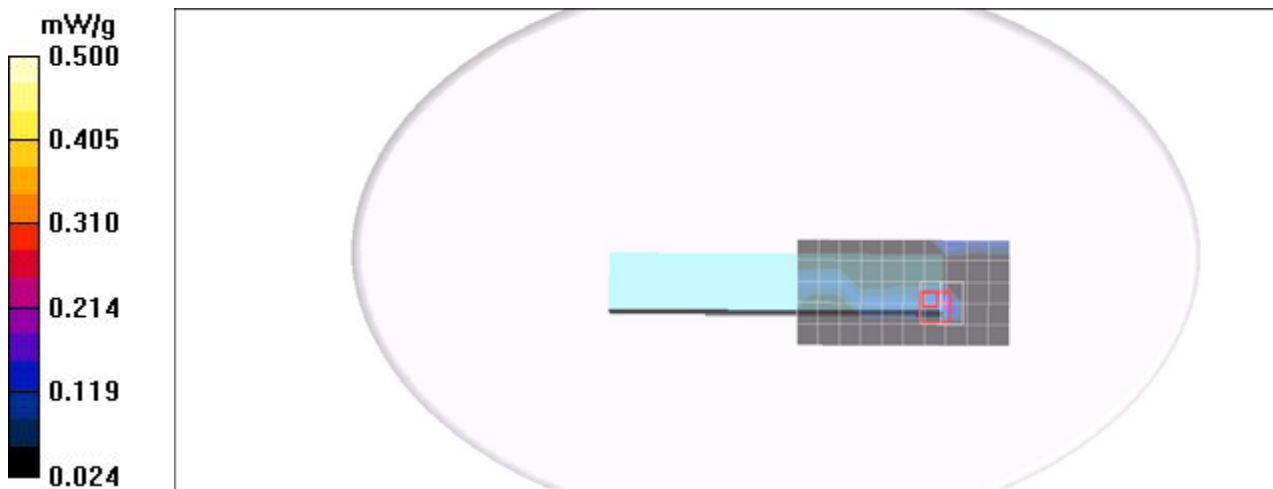

Test Laboratory: Compliance Certification Services Inc.

HSDPA BAND II - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSDPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA BAND II Body Tablet SP CH9400/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.583 mW/g

HSDPA BAND II Body Tablet SP CH9400/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 5.29 V/m; Power Drift = -0.108 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.787 mW/g; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

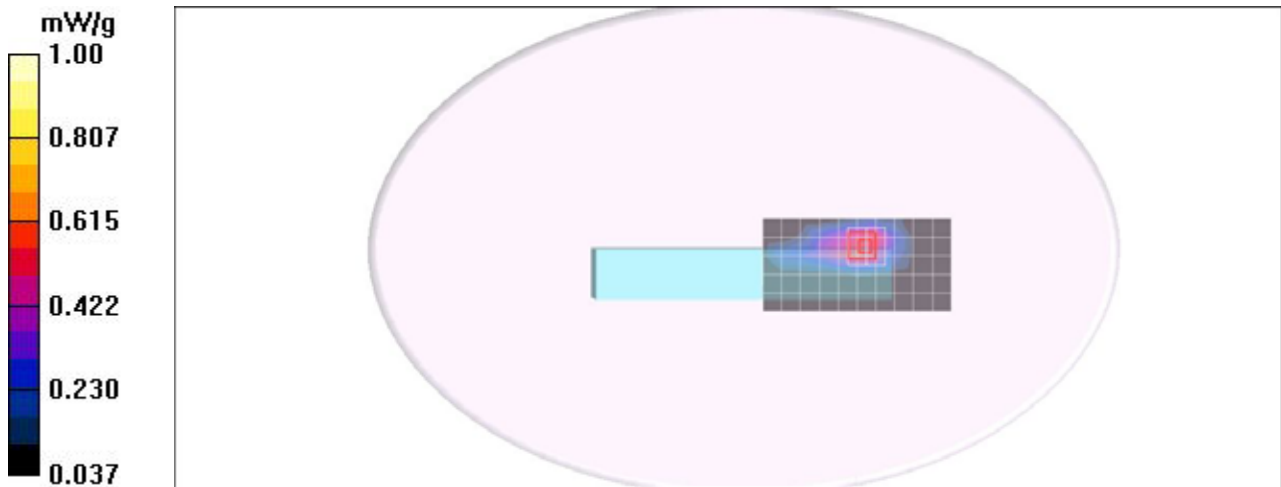

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND II - Notebook mode CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND II Body Notebook mode CH9400/Area Scan (12x16x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.044 mW/g

HSUPA BAND II Body Notebook mode CH9400/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.33 V/m; Power Drift = -0.091 dB
Peak SAR (extrapolated) = 0.092 W/kg
SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.038 mW/g
Maximum value of SAR (measured) = 0.046 mW/g

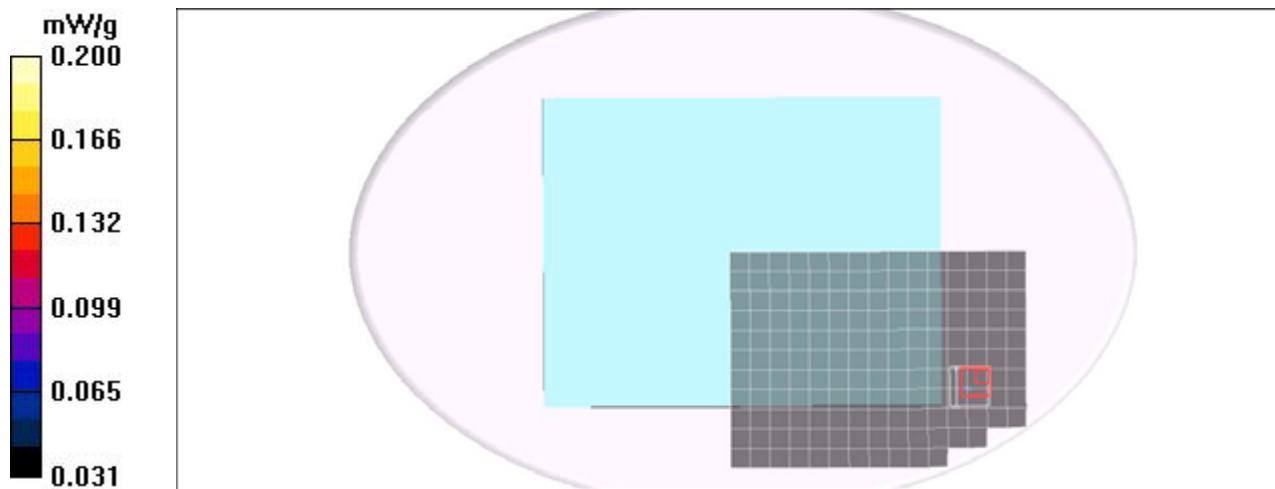

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND II - Lap Held 2 mode CM Battery 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND II Body Tap Held mode CH9400/Area Scan (7x12x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.090 mW/g

HSUPA BAND II Body Tap Held mode CH9400/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.85 V/m; Power Drift = -0.107 dB
Peak SAR (extrapolated) = 0.198 W/kg
SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.064 mW/g
Maximum value of SAR (measured) = 0.168 mW/g

HSUPA BAND II Body Tap Held mode CH9400/Zoom Scan (7x7x9)/Cube 1:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.85 V/m; Power Drift = -0.107 dB
Peak SAR (extrapolated) = 0.244 W/kg
SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.074 mW/g
Maximum value of SAR (measured) = 0.230 mW/g

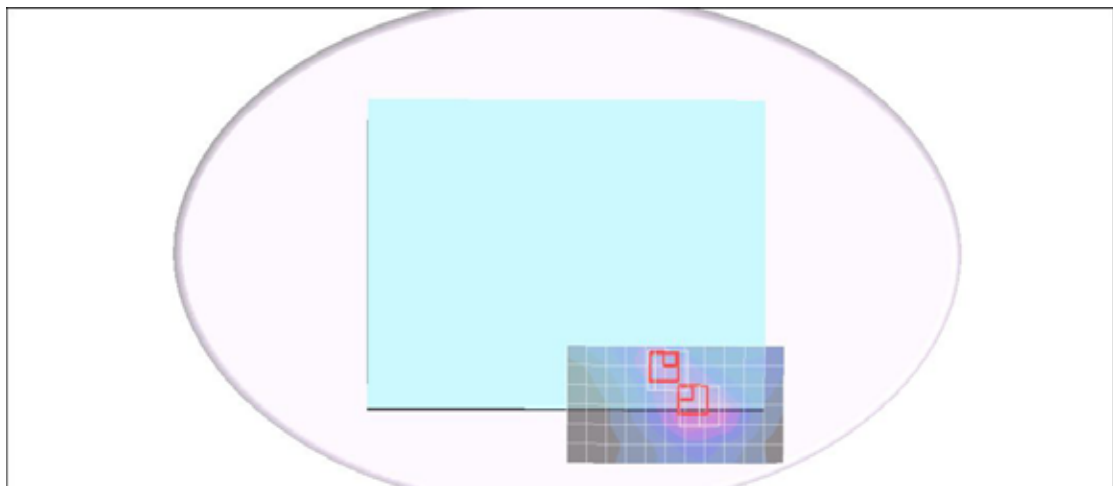

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND II - Tablet 3PL CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND II Body Tablet PL CH9400/Area Scan (8x11x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.149 mW/g

HSUPA BAND II Body Tablet PL CH9400/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 4.40 V/m; Power Drift = -0.180 dB
Peak SAR (extrapolated) = 0.180 W/kg
SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.034 mW/g
Maximum value of SAR (measured) = 0.168 mW/g

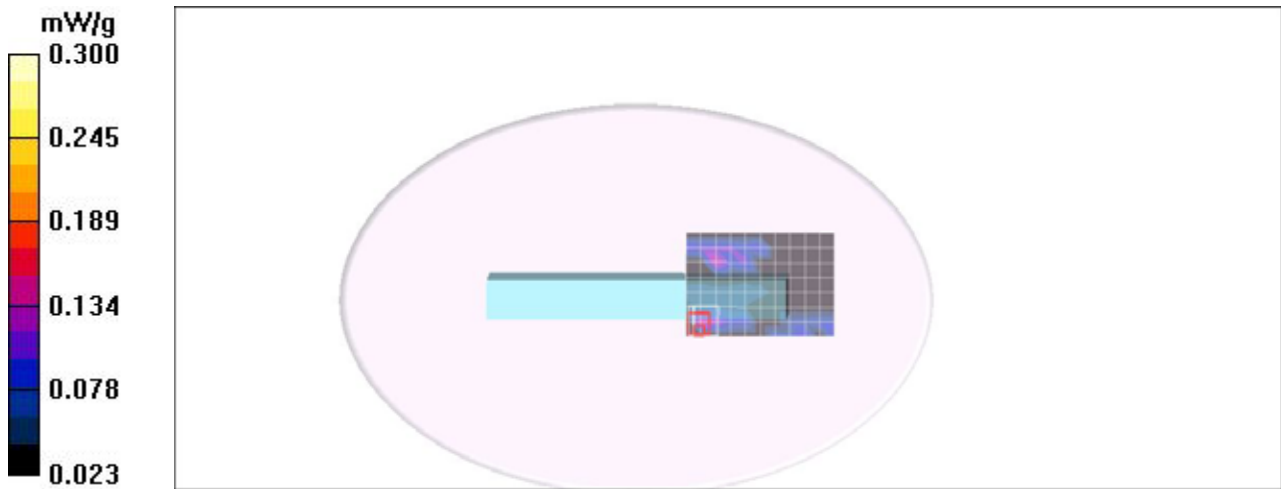

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND II - Tablet 4PP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND II Body Tablet SP CH9400/Area Scan (8x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.044 mW/g

HSUPA BAND II Body Tablet SP CH9400/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 3.76 V/m; Power Drift = -0.094 dB

Peak SAR (extrapolated) = 0.432 W/kg

SAR(1 g) = **0.128 mW/g**; SAR(10 g) = **0.068 mW/g**

Maximum value of SAR (measured) = 0.219 mW/g

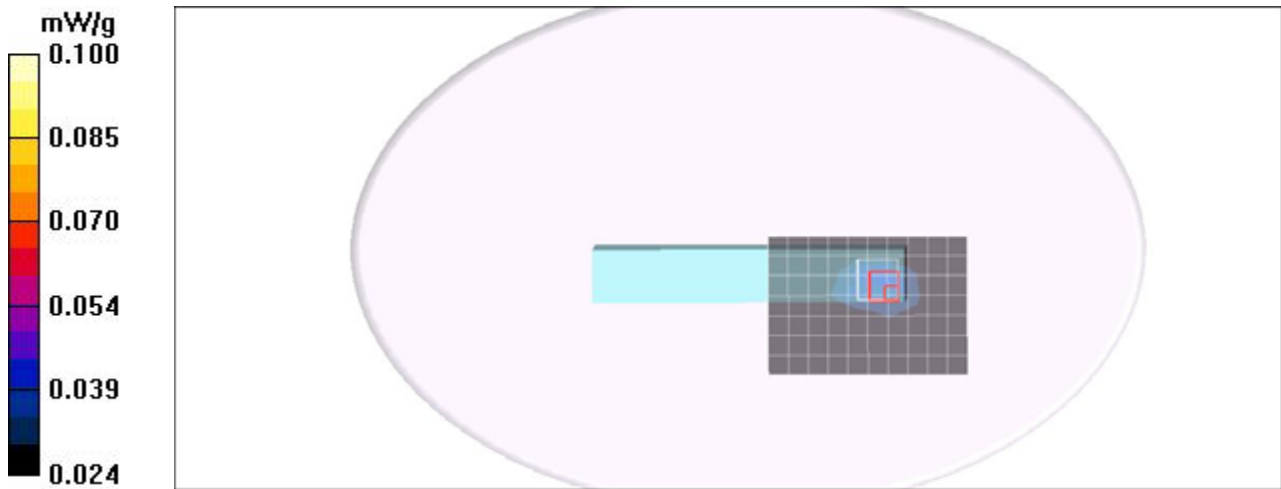

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND II - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND II Body Tablet SP CH9262/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.10 mW/g

HSUPA BAND II Body Tablet SP CH9262/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.09 V/m; Power Drift = -0.112 dB
Peak SAR (extrapolated) = 1.67 W/kg
SAR(1 g) = 0.849 mW/g; SAR(10 g) = 0.421 mW/g
Maximum value of SAR (measured) = 1.18 mW/g

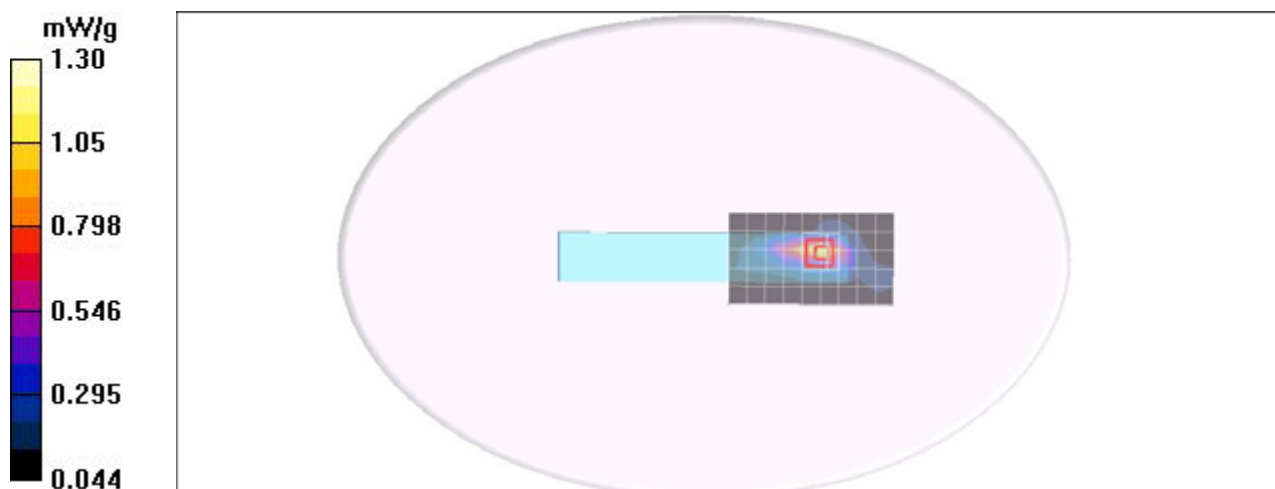

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND II - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND II Body Tablet SP CH9400/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.651 mW/g

HSUPA BAND II Body Tablet SP CH9400/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 5.22 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.887 mW/g; SAR(10 g) = 0.443 mW/g

Maximum value of SAR (measured) = 1.25 mW/g

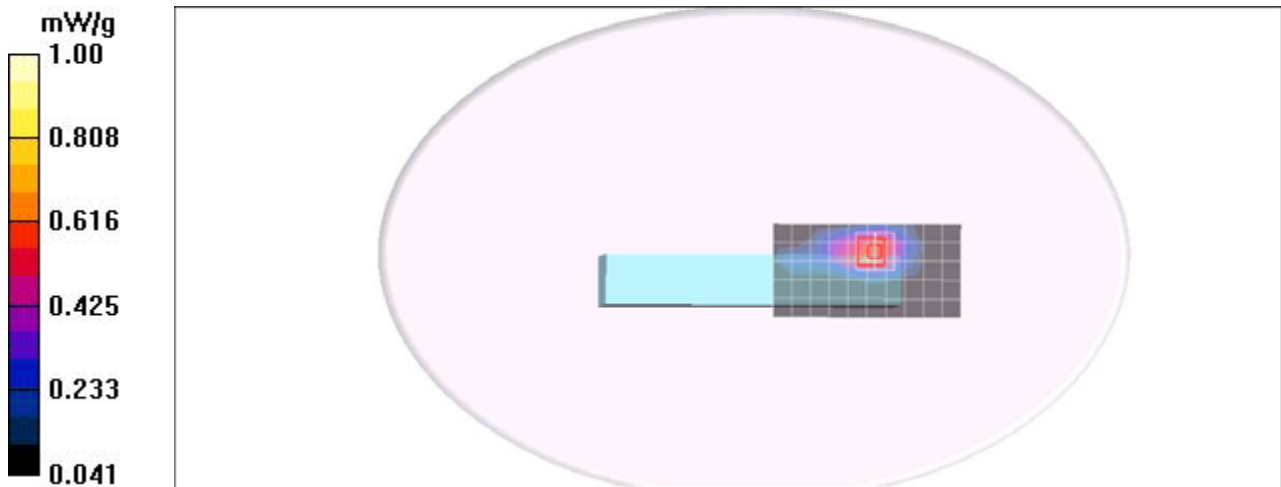

Test Laboratory: Compliance Certification Services Inc.

HSUPA BAND II - Tablet 6SP CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSUPA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1908$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSUPA BAND II Body Tablet SP CH9538/Area Scan (6x10x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.961 mW/g

HSUPA BAND II Body Tablet SP CH9538/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.29 V/m; Power Drift = -0.140 dB
Peak SAR (extrapolated) = 1.47 W/kg
SAR(1 g) = 0.746 mW/g; SAR(10 g) = 0.369 mW/g
Maximum value of SAR (measured) = 1.05 mW/g

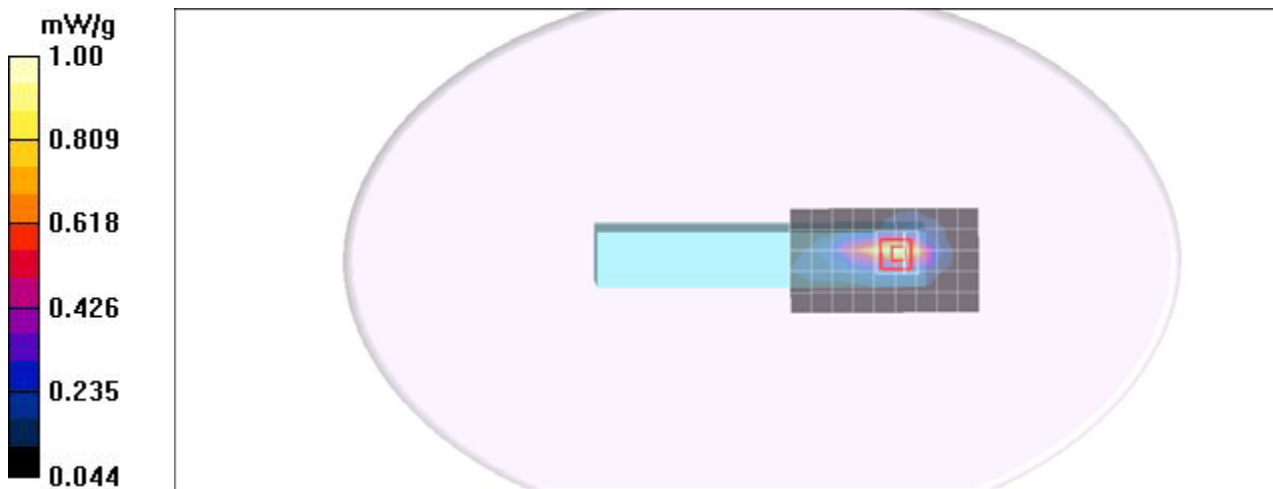

Test Laboratory: Compliance Certification Services Inc.

GPRS 850 - Tablet 5SL 25mm CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: GPRS 850; Frequency: 824.2 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.941$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

GPRS Body Tablet SL CH128/Area Scan (6x12x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.399 mW/g

GPRS Body Tablet SL CH128/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.13 V/m; Power Drift = -0.025 dB
Peak SAR (extrapolated) = 0.480 W/kg
SAR(1 g) = 0.368 mW/g; SAR(10 g) = 0.275 mW/g
Maximum value of SAR (measured) = 0.424 mW/g

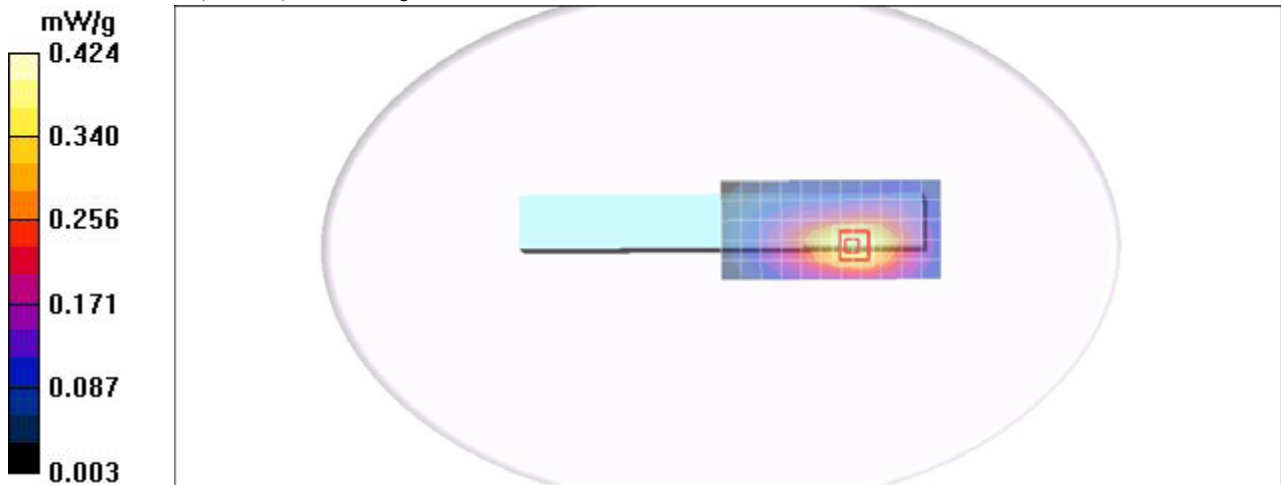

Test Laboratory: Compliance Certification Services Inc.

EGPRS 1900 - Tablet 5SL 25mm CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: EGPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:



- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

EGPRS Body Tablet SL CH810/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.267 mW/g

EGPRS Body Tablet SL CH810/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.93 V/m; Power Drift = -0.051 dB
Peak SAR (extrapolated) = 0.349 W/kg
SAR(1 g) = **0.229 mW/g**; SAR(10 g) = **0.138 mW/g**
Maximum value of SAR (measured) = 0.288 mW/g

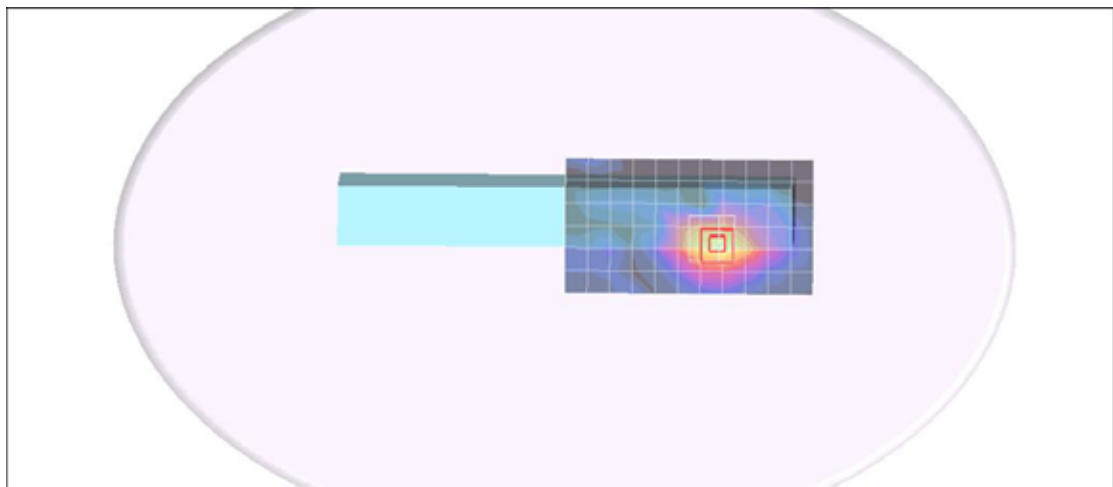

Test Laboratory: Compliance Certification Services Inc.

WCDMA BAND V - Tablet 5SL 25mm CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(7.57, 7.57, 7.57);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

WCDMA BAND V Body Tablet SL CH4182/Area Scan (6x12x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.206 mW/g

WCDMA BAND V Body Tablet SL CH4182/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 5.58 V/m; Power Drift = -0.200 dB
Peak SAR (extrapolated) = 0.243 W/kg
SAR(1 g) = **0.185 mW/g**; SAR(10 g) = **0.139 mW/g**
Maximum value of SAR (measured) = 0.211 mW/g

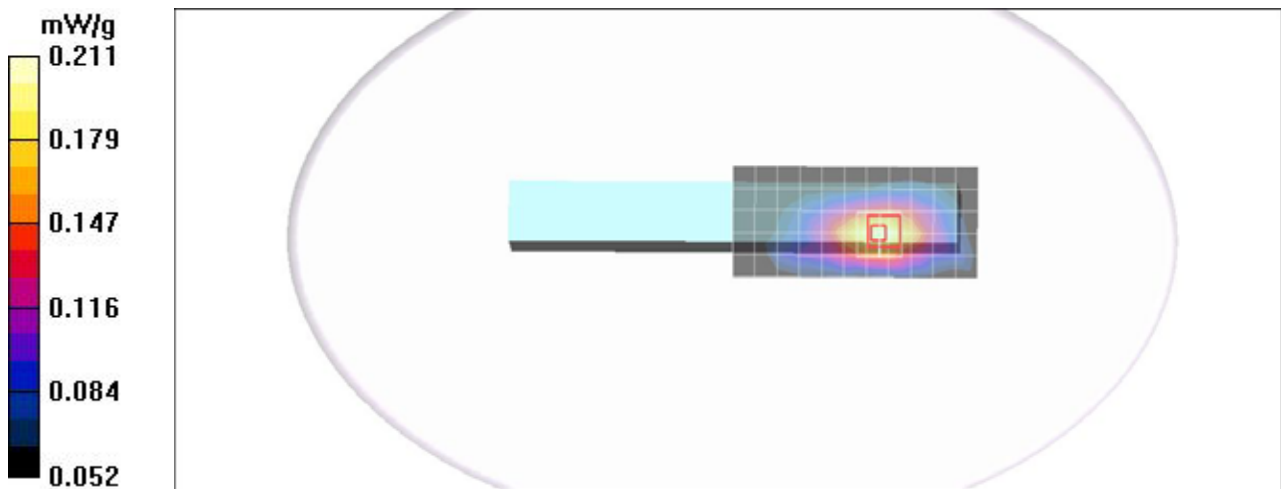

Test Laboratory: Compliance Certification Services Inc.

HSDPA BAND II - Tablet 5SL 25mm CM Battery2 65wh

DUT: CM; Type: CM; Serial: N/A

Communication System: HSDPA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Air Temperature: 24.6 deg C; Liquid Temperature: 23.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.10, 6.10, 6.10);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn558; Calibrated: 2010/7/14
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN: 1052
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

HSDPA BAND II Body Tablet SL CH9400/Area Scan (6x12x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.456 mW/g

HSDPA BAND II Body Tablet SL CH9400/Zoom Scan (7x7x9)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=3mm
Reference Value = 7.95 V/m; Power Drift = -0.102 dB
Peak SAR (extrapolated) = 0.691 W/kg
SAR(1 g) = 0.407 mW/g; SAR(10 g) = 0.255 mW/g
Maximum value of SAR (measured) = 0.524 mW/g

