

# RF TEST REPORT



Report No.: 17020852-FCC-R1  
Supersede Report No.: N/A

Applicant	Beijing Jia An Electronics Technology Co., Ltd.	
Product Name	Bluetooth Module	
Main Model	WB822D	
Serial Model	N/A	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	August 21 to August 23, 2017	
Issue Date	August 23, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
<i>Amos Xia</i>	<i>Deon Dai</i>	
Amos Xia Test Engineer	Deon Dai Engineer Reviewer	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:  
**SIEMIC (Nanjing-China) Laboratories**  
2-1 Longcang Avenue Yuhua Economic and  
Technology Development Park, Nanjing, China  
Tel: +86(25)86730128/86730129 Fax: +86(25)86730127 Email: China@siemic.com.cn

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	17020852-FCC-R1
Page	3 of 42

---

This page has been left blank intentionally.

## CONTENTS

<b>1. REPORT REVISION HISTORY.....</b>	<b>5</b>
<b>2. CUSTOMER INFORMATION .....</b>	<b>5</b>
<b>3. TEST SITE INFORMATION.....</b>	<b>5</b>
<b>4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....</b>	<b>6</b>
<b>5. TEST SUMMARY .....</b>	<b>8</b>
<b>6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....</b>	<b>9</b>
6.1 RF EXPOSURE.....	9
6.2 ANTENNA REQUIREMENT.....	10
6.3 DTS (6 DB) CHANNEL BANDWIDTH .....	11
6.4 MAXIMUM OUTPUT POWER .....	13
6.5 POWER SPECTRAL DENSITY .....	15
6.6 BAND-EDGE & UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS.....	17
6.7 POWER LINE CONDUCTED EMISSIONS .....	22
6.8 RADIATED EMISSIONS.....	26
<b>ANNEX A. TEST INSTRUMENT.....</b>	<b>33</b>
<b>ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS .....</b>	<b>34</b>
<b>ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....</b>	<b>38</b>
<b>ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....</b>	<b>41</b>
<b>ANNEX E. DECLARATION OF SIMILARITY .....</b>	<b>42</b>

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
17020852-FCC-R1	NONE	Original	August 23, 2017

## 2. Customer information

Applicant Name	Beijing Jia An Electronics Technology Co., Ltd.
Applicant Add	Main building, No.19, Gucheng West Street, Shijingshan District, Beijing, 100043, China
Manufacturer	Beijing Jia An Electronics Technology Co., Ltd.
Manufacturer Add	Main building, No.19, Gucheng West Street, Shijingshan District, Beijing, 100043, China

## 3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ_EMG

#### 4. Equipment under Test (EUT) Information

Description of EUT:	Bluetooth Module
Main Model:	WB822D
Serial Model:	N/A
Date EUT received:	August 10, 2017
Test Date(s):	August 21 to August 23, 2017
Output Max power	2.556dBm
Antenna Gain:	BLE: 0.5 dBi
Type of Modulation:	BLE: GFSK
RF Operating Frequency (ies):	BLE: 2402-2480 MHz
Number of Channels:	BLE: 40CH
Port:	N/A
Input Power:	DC3.3V
Trade Name :	N/A
FCC ID:	VVJ-WB822D

**Operating channel list**

Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

## 5. Test Summary

The product was tested in accordance with the following specifications.  
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.247 (i), §2.1091	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§15.207 (a),	Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

### Measurement Uncertainty

Test Item	Description	Uncertainty
Radiated Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	3.952dB



## **6. Measurements, Examination And Derived Results**

### 6.1 RF Exposure

The EUT is a portable device, thus requires RF exposure evaluation;  
Please refer to SIEMIC RF Exposure Report: 17020852-FCC-H1.

## 6.2 Antenna Requirement

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules.

§15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit. And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has 1 antennas:


A permanently attached PIFA antenna for BLE, the gain is 0.5 dBi.

**Antenna must be permanently attached to the unit, it meets up with the ANTENNA REQUIREMENT.**

**Result:** Compliant.

### 6.3 DTS (6 dB) Channel Bandwidth

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	August 22, 2017
Tested By :	Amos Xia

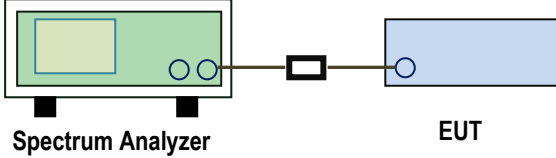Spec	Item	Requirement	Applicable
§ 15.247(a)(2) RSS Gen (4.6.1)	a)	6dB BW $\geq$ 500kHz;	<input checked="" type="checkbox"/>
	b)	20dB BW: For FCC reference only; required by IC.	<input type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>558074 D01 DTS Meas Guidance V04, 8.1 DTS bandwidth</p> <p><u>6dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Set RBW = 100 kHz.</li> <li>- Set the video bandwidth (VBW) <math>\geq</math> 3 x RBW.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- Sweep = auto couple.</li> <li>- Allow the trace to stabilize.</li> </ul> <p>Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</p>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A		
Test Plot	<input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A		

### 6dB Bandwidth measurement result

Type	Test mode	CH	Freq (MHz)	Result (MHz)	Limit (MHz)	Result
6dB BW	BLE	Low	2402	0.6468	≥0.5	Pass
		Mid	2440	0.6642	≥0.5	Pass
		High	2480	0.658	≥0.5	Pass


### Test Plots

#### 6dB Bandwidth measurement result



6dB Bandwidth - Low CH 2402

6dB Bandwidth - Mid CH 2440

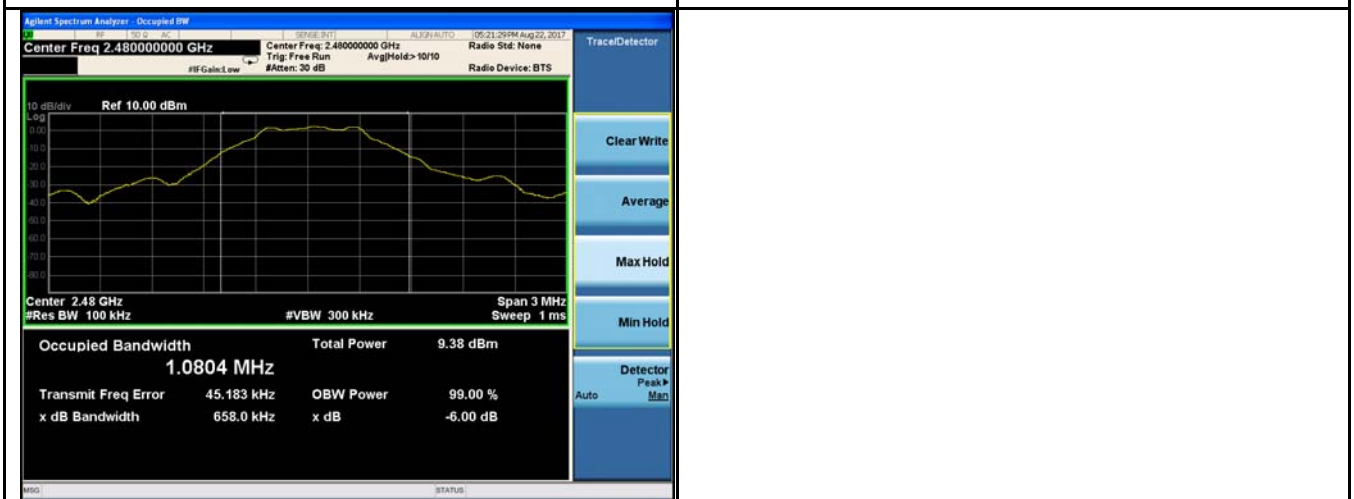


6dB Bandwidth - High CH 2480

## 6.4 Maximum Output Power

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	August 22, 2017
Tested By :	Amos Xia

### Requirement(s):

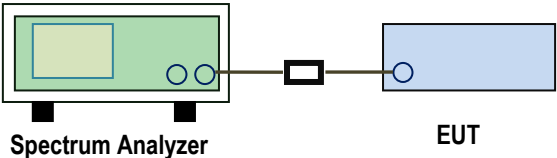
Spec	Item	Requirement	Applicable
§15.247(b) (2),RSS210 (A8.4)	a)	FHSS in 2400-2483.5MHz with $\geq 75$ channels: $\leq 1$ Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: $\leq 1$ Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: $\leq 0.125$ Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with $\geq 50$ channels: $\leq 1$ Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with $\geq 25$ & $< 50$ channels: $\leq 0.25$ Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: $\leq 1$ Watt	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	558074 D01 DTS Meas Guidance V04, 9.1.2 Integrated band power method Maximum output power measurement procedure a) Set the RBW $\geq$ DTS bandwidth. b) Set VBW $\geq 3 \times$ RBW. c) Set span $\geq 3 \times$ RBW d) Sweep time = auto couple. e) Detector = peak. f) Trace mode = max hold. g) Allow trace to fully stabilize. h) Use peak marker function to determine the peak amplitude level.		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A		
Test Plot	<input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A		

### Output Power measurement result

Type	Test mode	CH	Freq (MHz)	Conducted Power (dBm)	Limit (dBm)	Result
Output power	BLE	Low	2402	2.556	30	Pass
		Mid	2440	2.315	30	Pass
		High	2480	1.754	30	Pass


### Test Plots

#### Output Power measurement result

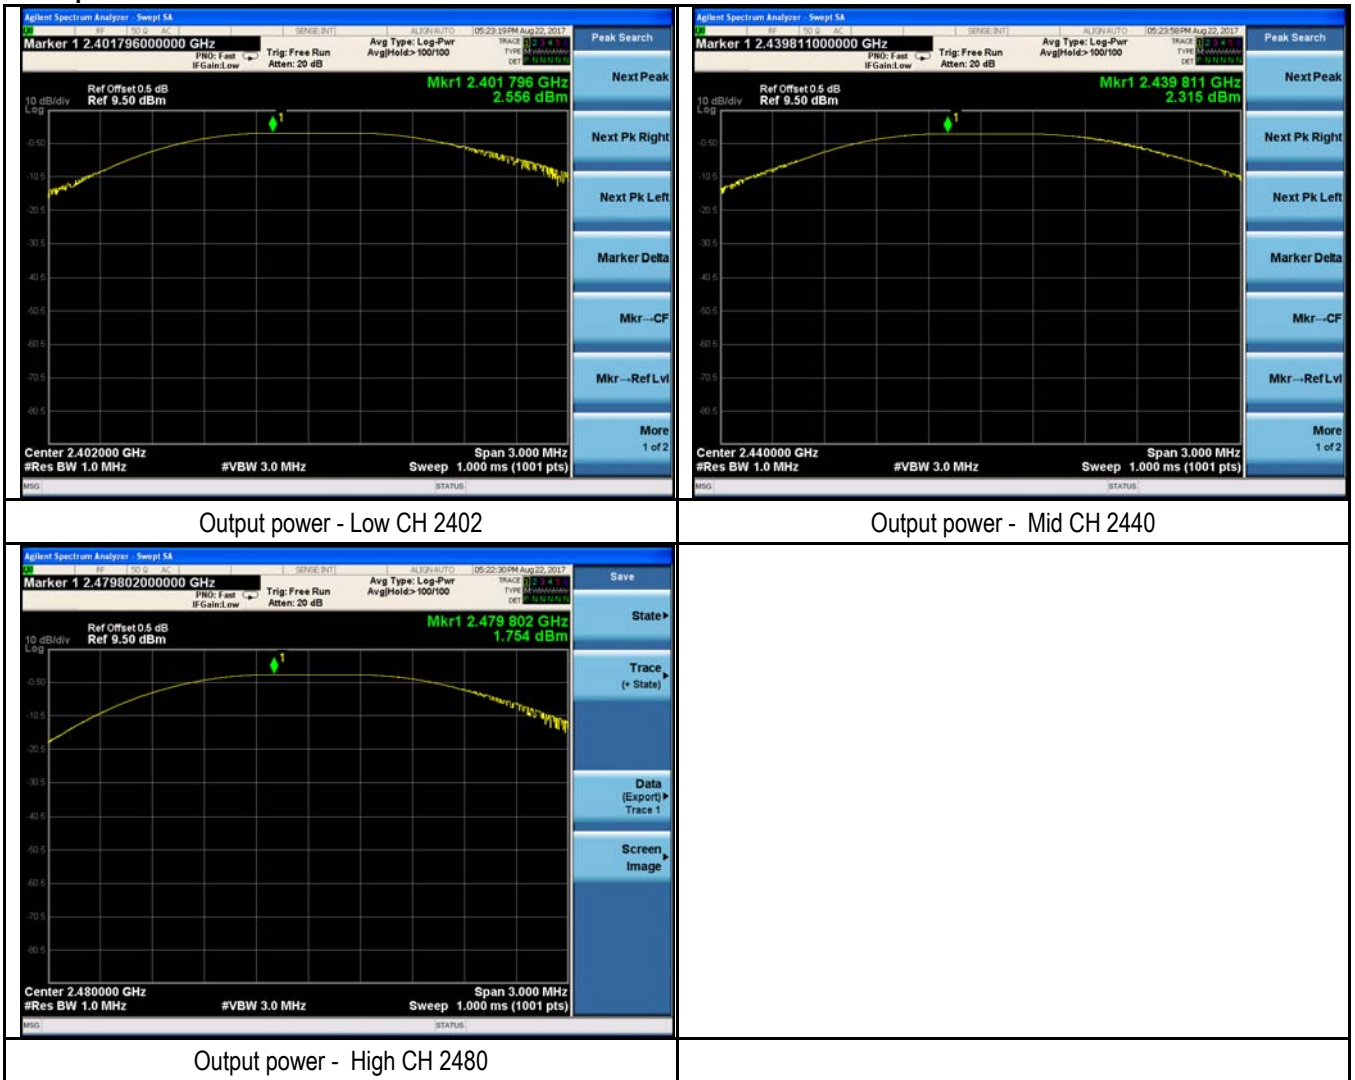

## 6.5 Power Spectral Density

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	August 22, 2017
Tested By :	Amos Xia

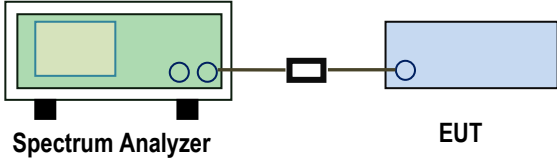
Spec	Item	Requirement	Applicable
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer                      EUT</p>		
Test Procedure	<p>558074 D01 DTS MEAS Guidance V04 10.2 power spectral density method power spectral density measurement procedure</p> <p>a) Set analyzer center frequency to DTS channel center frequency. b) Set the span to 1.5 times the DTS bandwidth. c) Set the RBW to: <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>. d) Set the VBW <math>\geq 3 \times \text{RBW}</math>. e) Detector = peak. f) Sweep time = auto couple. g) Trace mode = max hold. h) Allow trace to fully stabilize. i) Use the peak marker function to determine the maximum amplitude level within the RBW. j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.</p>		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A		

### Power Spectral Density measurement result

Type	Test mode	CH	Freq (MHz)	PSD (dBm)	Limit (dBm)	Result
PSD	BLE	Low	2402	0.897	8	Pass
		Mid	2440	1.182	8	Pass
		High	2480	-0.012	8	Pass

### Test Plots

#### Power Spectral Density measurement result

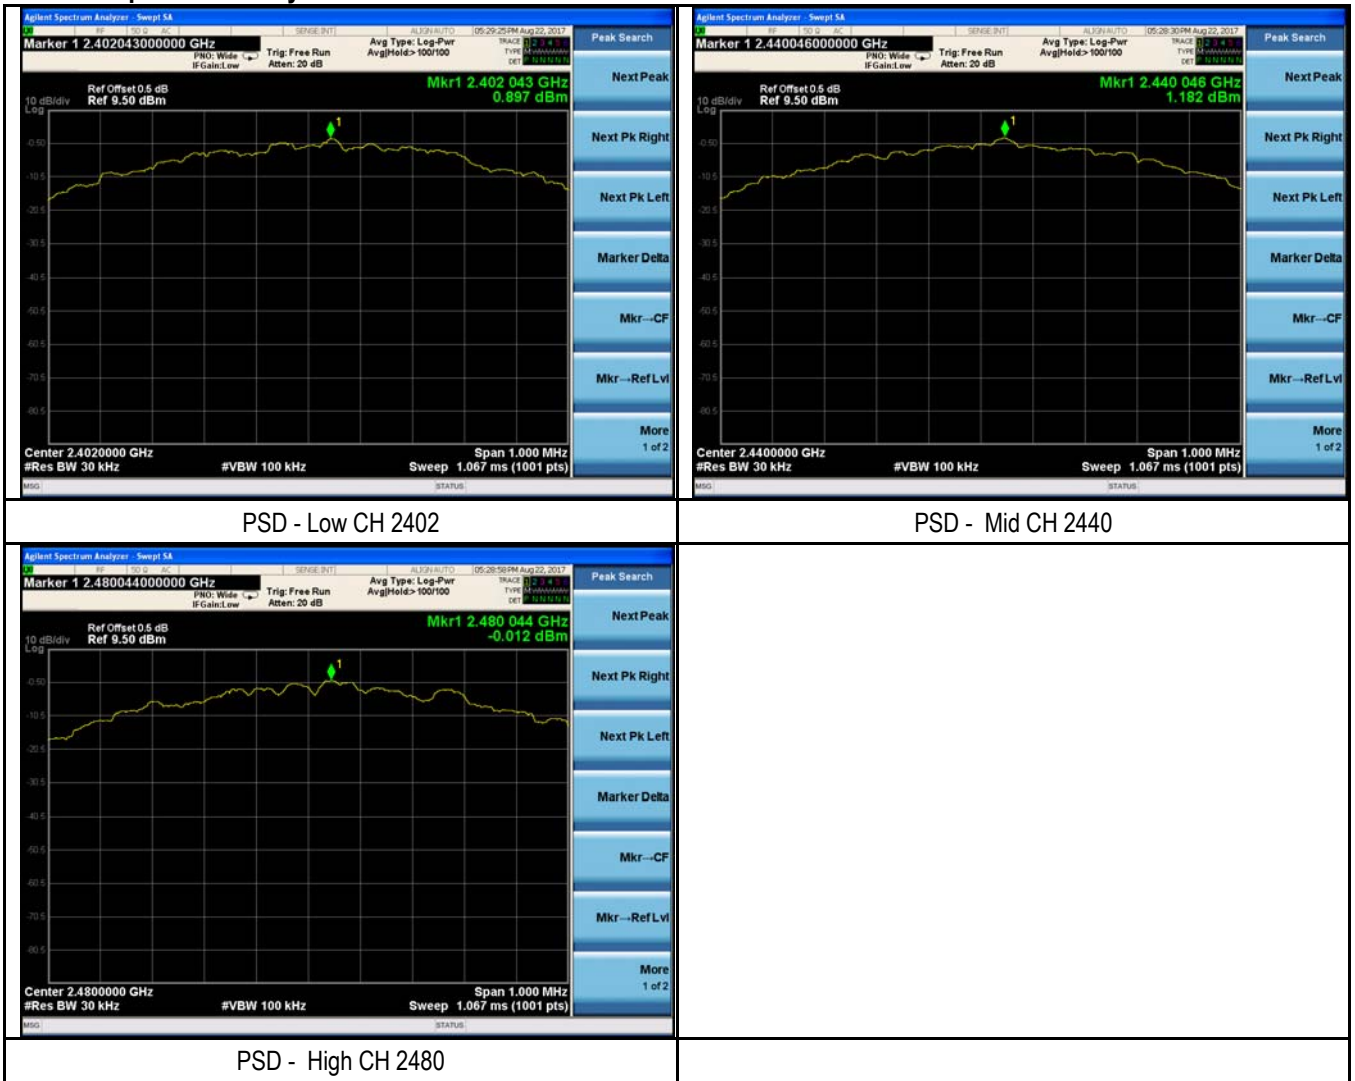




## 6.6 Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	August 23, 2017
Tested By :	Amos Xia

### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>

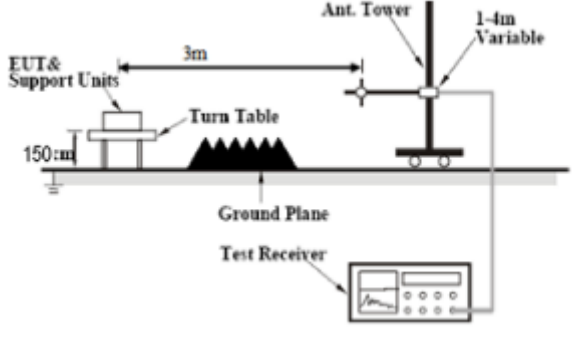
Test Setup	
------------	---

Test Procedure	<p>Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.</li> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth for Average detection (AV) as below at frequency above 1GHz. <ul style="list-style-type: none"> <li>■ 1/T kHz (Duty cycle &lt; 98%) □ 10 Hz (Duty cycle &gt; 98%)</li> </ul> </li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul>
----------------	---

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A

**Test Plots**  
**Band Edge measurement result**

<b>Test Mode:</b>	<b>Transmitting BLE Mode</b>
-------------------	------------------------------

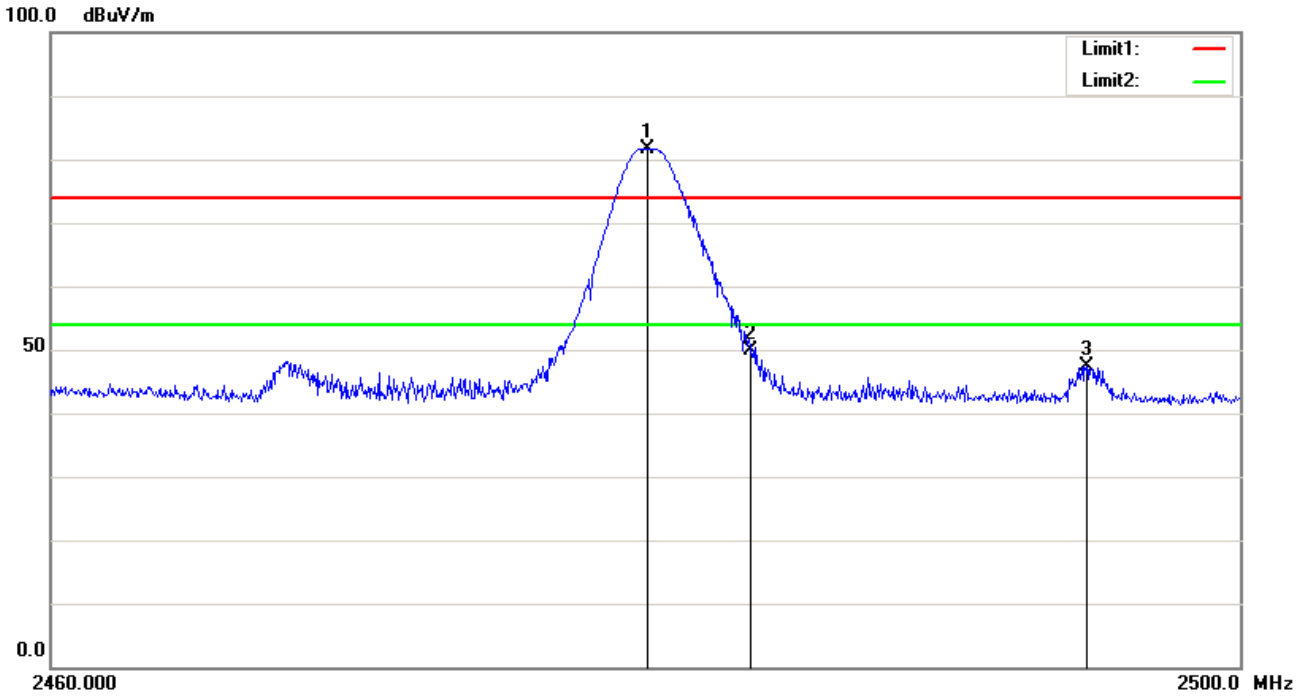


**Test Data**

**GFSK-Right Side-V**

No.	Frequency (MHz)	Reading (dBμV/m)	Detector	Ant F (dB/m)	PA G (dB)	Cab L (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Degree (°)
1	2480.000	98.49	peak	31.59	52.62	4.06	81.52	74.00	7.52	100	29
2	2483.500	66.74	peak	31.59	52.63	4.06	49.76	74.00	-24.24	100	330
3	2494.840	64.44	peak	31.60	52.64	4.07	47.47	74.00	-26.53	100	2224

<b>Test Mode:</b>	<b>Transmitting BLE Mode</b>
-------------------	------------------------------

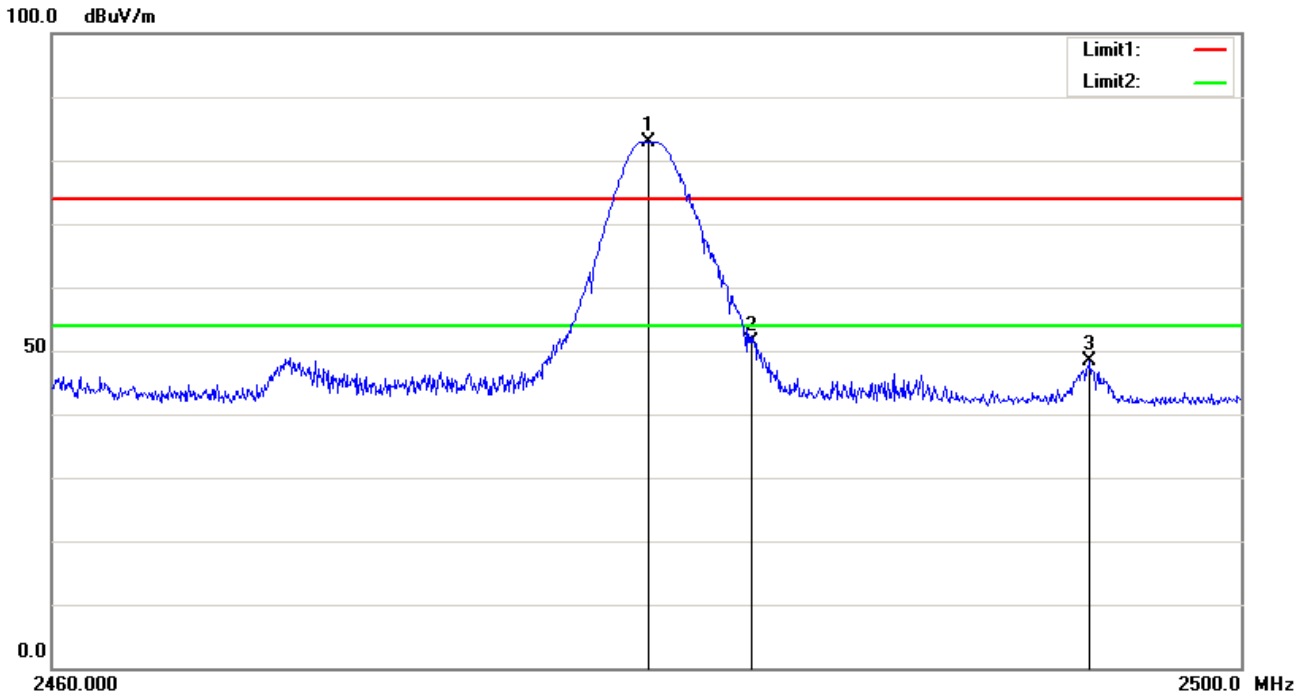


**Test Data**

**GFSK-Right Side-H**

No.	Frequency (MHz)	Reading (dBµV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Degree (°)
1	2480.000	99.79	peak	31.59	52.62	4.06	82.82	74.00	8.82	100	254
2	2483.500	68.28	peak	31.59	52.63	4.06	51.30	74.00	-22.70	100	330
3	2494.920	65.33	peak	31.60	52.64	4.07	48.36	74.00	-25.64	100	133

<b>Test Mode:</b>	<b>Transmitting BLE Mode</b>
-------------------	------------------------------

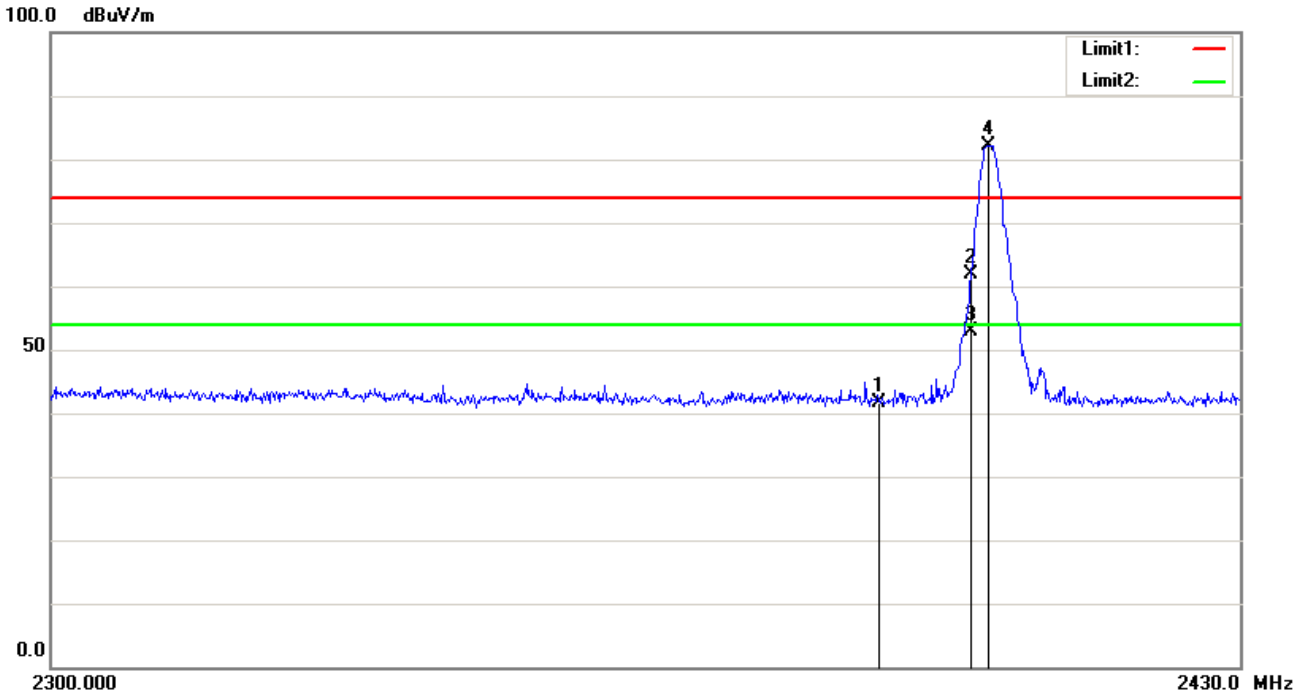


**Test Data**

**GFSK-Left Side-V**

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant F (dB/m)	PA G (dB)	Cab L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	2390.000	58.63	peak	31.53	52.55	4.02	41.63	74.00	-32.37	100	354
2	2400.000	78.90	peak	31.54	52.56	4.01	61.89	74.00	-12.11	100	359
3	2400.000	69.87	AVG	31.54	52.56	4.01	52.86	54.00	-1.14	100	359
4	2402.000	99.06	peak	31.54	52.56	4.01	82.05	74.00	8.05	200	156

<b>Test Mode:</b>	<b>Transmitting BLE Mode</b>
-------------------	------------------------------

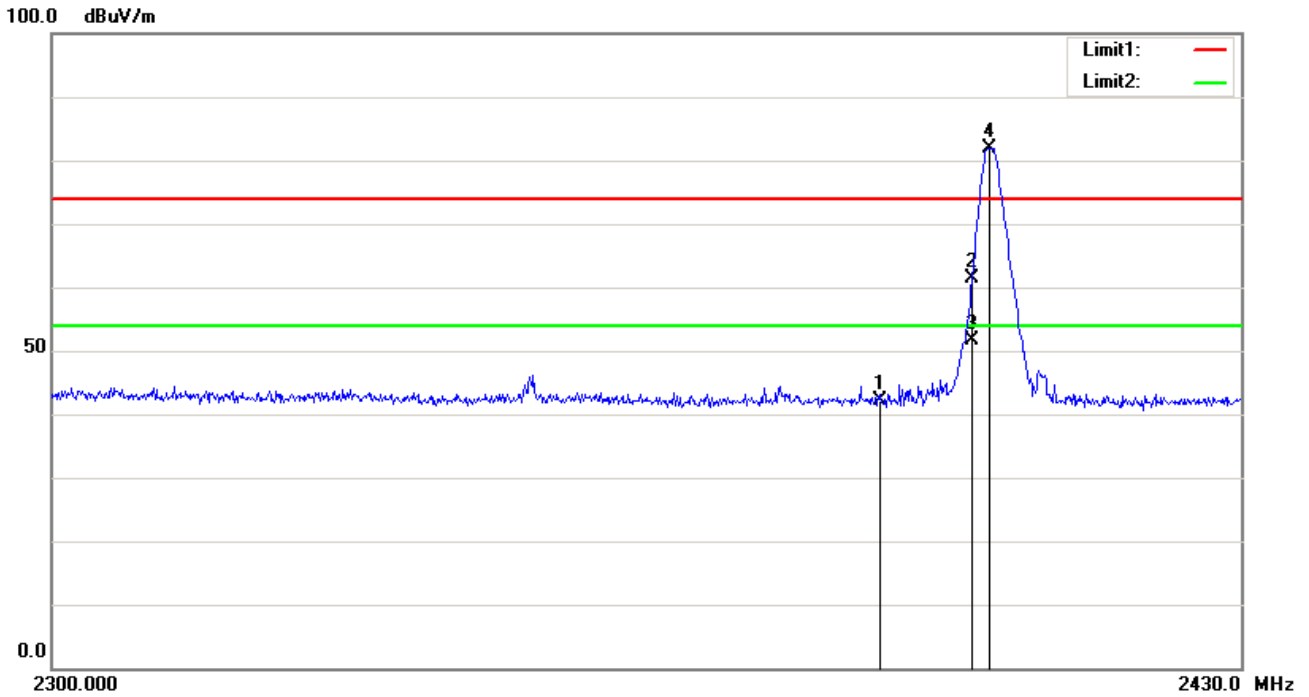

**Test Data**

**GFSK-Left Side-H**


No.	Frequency (MHz)	Reading (dBµV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Degree (°)
1	2390.000	59.18	peak	31.53	52.55	4.02	42.18	74.00	-31.82	100	342
2	2400.000	78.45	peak	31.54	52.56	4.01	61.44	74.00	-12.56	100	342
3	2400.000	68.75	AVG	31.54	52.56	4.01	51.74	54.00	-2.26	100	342
4	2402.000	98.81	peak	31.54	52.56	4.01	81.80	74.00	7.80	100	148

## 6.7 Power Line Conducted Emissions

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	August 21, 2017
Tested By :	Amos Xia

### Requirement(s):

Spec	Item	Requirement	Applicable																									
47CFR§15.207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <p style="text-align: center;"><b>Class A Limit</b></p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>79</td> <td>66</td> </tr> <tr> <td>0.5 ~ 30</td> <td>73</td> <td>60</td> </tr> </tbody> </table> <p style="text-align: center;"><b>Class B Limit</b></p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	79	66	0.5 ~ 30	73	60	Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	☒
Frequency ranges (MHz)	Limit (dBµV)																											
	QP	Average																										
0.15 ~ 0.5	79	66																										
0.5 ~ 30	73	60																										
Frequency ranges (MHz)	Limit (dBµV)																											
	QP	Average																										
0.15 ~ 0.5	66 – 56	56 – 46																										
0.5 ~ 5	56	46																										
5 ~ 30	60	50																										

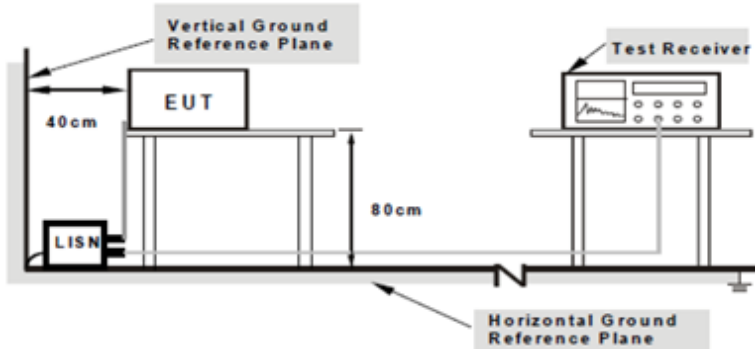Test Setup	 <p style="text-align: center;"> <b>Note: 1. Support units were connected to second LISN.</b>  <b>2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</b> </p>
------------	--

Procedure	<ol style="list-style-type: none"> <li>1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol>
-----------	---

Remark	
--------	--

Result	☒ Pass                      ☐ Fail
--------	------------------------------------

Test Data	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes (See below)	<input type="checkbox"/> N/A

**Data sample**

No.	Frequency (MHz)	Reading (dBμV)	Detector	Lisn/Isn (dB)	Ps_Lmt (dB)	Cab_L (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)
-----	--------------------	-------------------	----------	------------------	----------------	---------------	------------------	-----------------	----------------

Frequency (MHz) = Emission frequency in MHz

Reading (dBμV) = Receiver Reading Value

Detector=Quasi Peak Detector or Average Detector

Lisn/Isn= Insertion loss of LISN

Ps\_Lmt= Insertion loss of transient limiter (The transient limiter included 10dB attenuation)

Cab\_L= cable loss


Result (dBμV) = Reading Value + Corrected Value

Limit (dBμV) = Limit stated in standard

**Calculation Formula:**

Margin (dB) = Result (dBμV) – limit (dBμV)

**Test Mode:** Transmitting BLE Mode

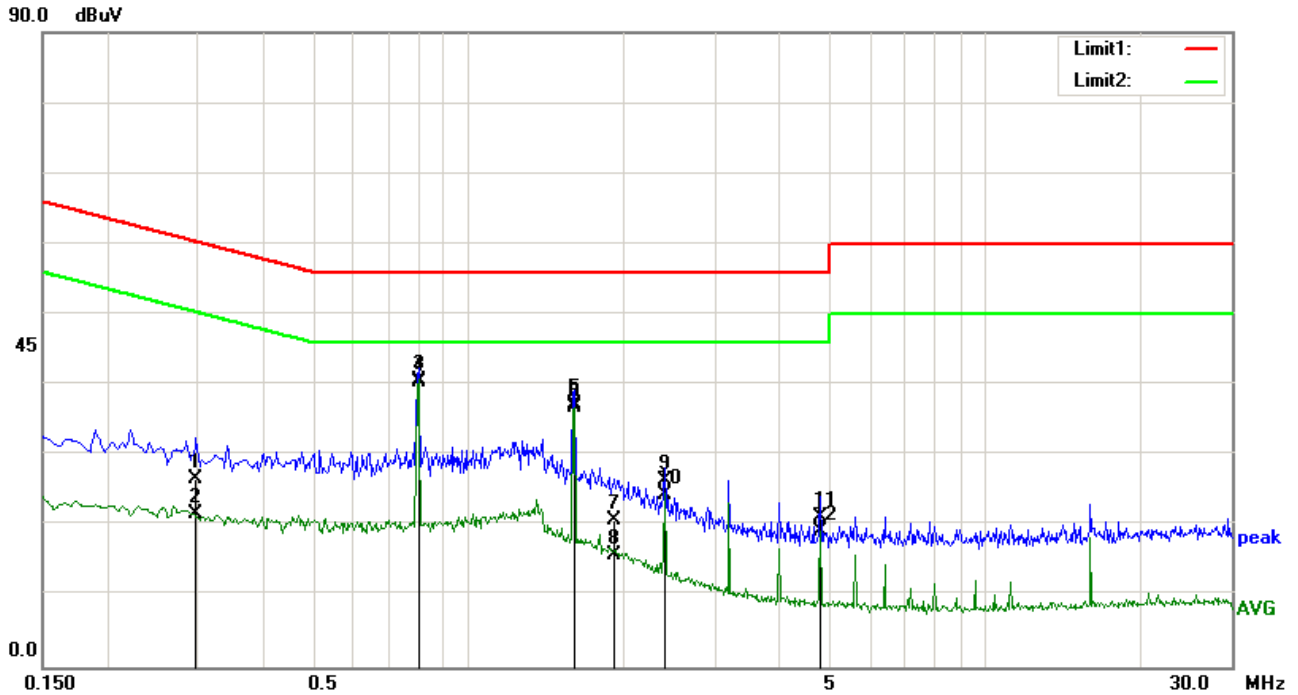


**Test Data**

**Positive Plot at DC 3.3V**

No.	Frequency (MHz)	Reading (dBuV)	Detector	Lisn/Isn (dB)	Ps_Lmt (dB)	Cab_L (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.2980	16.36	QP	0.11	-10.00	0.20	26.67	60.30	-33.63
2	0.2980	11.35	AVG	0.11	-10.00	0.20	21.66	50.30	-28.64
3	0.8020	30.28	QP	0.13	-10.00	0.20	40.61	56.00	-15.39
4	0.8020	29.96	AVG	0.13	-10.00	0.20	40.29	46.00	-5.71
5	1.6020	26.82	QP	0.15	-10.00	0.20	37.17	56.00	-18.83
6	1.6020	26.35	AVG	0.15	-10.00	0.20	36.70	46.00	-9.30
7	1.9220	10.43	QP	0.16	-10.00	0.19	20.78	56.00	-35.22
8	1.9220	5.59	AVG	0.16	-10.00	0.19	15.94	46.00	-30.06
9	2.4020	15.98	QP	0.17	-10.00	0.23	26.38	56.00	-29.62
10	2.4020	14.12	AVG	0.17	-10.00	0.23	24.52	46.00	-21.48
11	4.8020	10.63	QP	0.26	-10.00	0.28	21.17	56.00	-34.83
12	4.8020	8.77	AVG	0.26	-10.00	0.28	19.31	46.00	-26.69



**Test Mode:** Transmitting BLE Mode

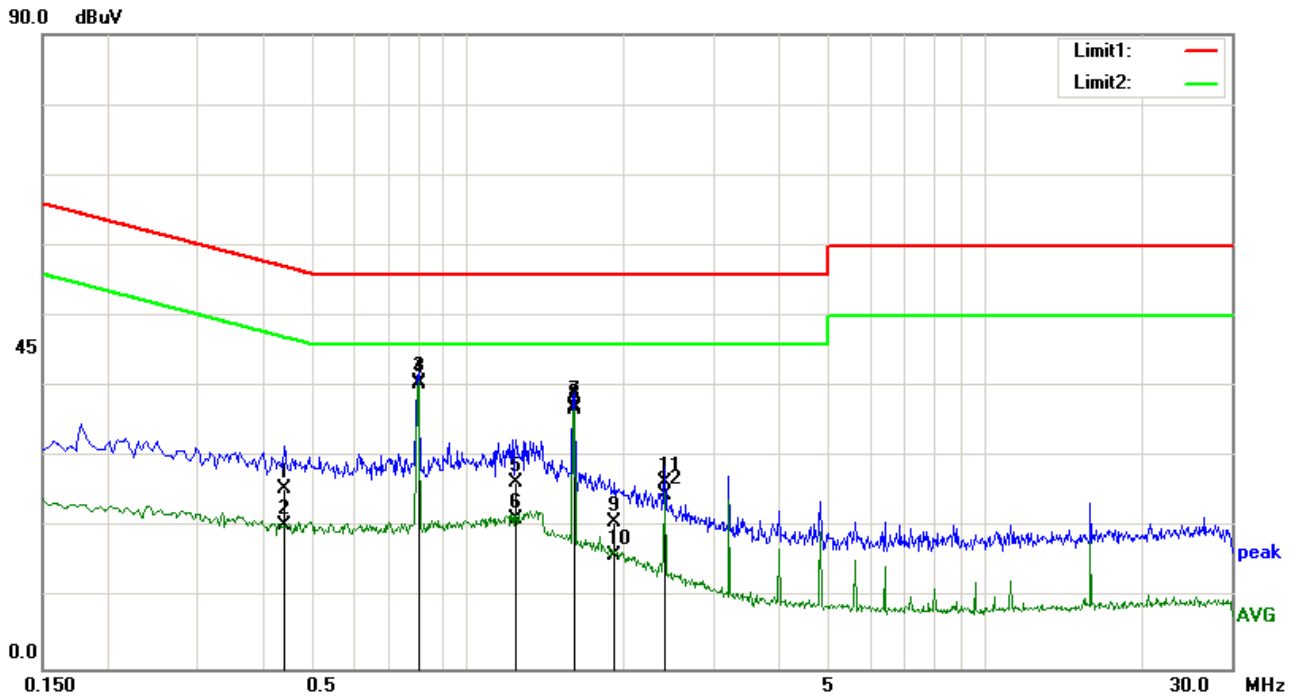

**Test Datau**

**Negative Plot at DC 3.3V**


No.	Frequency (MHz)	Reading (dBuV)	Detector	Lisn/Isn (dB)	Ps_Lmt (dB)	Cab_L (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.4420	15.23	QP	0.11	-10.00	0.21	25.55	57.02	-31.47
2	0.4420	10.12	AVG	0.11	-10.00	0.21	20.44	47.02	-26.58
3	0.8020	30.37	QP	0.12	-10.00	0.20	40.69	56.00	-15.31
4	0.8020	30.05	AVG	0.12	-10.00	0.20	40.37	46.00	-5.63
5	1.2420	16.07	QP	0.14	-10.00	0.21	26.42	56.00	-29.58
6	1.2420	10.99	AVG	0.14	-10.00	0.21	21.34	46.00	-24.66
7	1.6020	26.92	QP	0.15	-10.00	0.20	37.27	56.00	-18.73
8	1.6020	26.46	AVG	0.15	-10.00	0.20	36.81	46.00	-9.19
9	1.9220	10.38	QP	0.17	-10.00	0.19	20.74	56.00	-35.26
10	1.9220	5.62	AVG	0.17	-10.00	0.19	15.98	46.00	-30.02
11	2.4020	16.08	QP	0.18	-10.00	0.23	26.49	56.00	-29.51
12	2.4020	14.23	AVG	0.18	-10.00	0.23	24.64	46.00	-21.36

## 6.8 Radiated Emissions

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	August 210, 2017
Tested By :	Amos Xia

### Requirement(s):

Spec	Item	Requirement	Applicable																				
47CFR§15.24 7(d), RSS210 (A8.5)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <p style="text-align: center;"><b>Class A Limit</b></p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu\text{V/m}</math>)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>90</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>210</td> </tr> <tr> <td>Above 960</td> <td>300</td> </tr> </tbody> </table> <p style="text-align: center;"><b>Class B Limit</b></p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu\text{V/m}</math>)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength ( $\mu\text{V/m}$ )	30 – 88	90	88 – 216	150	216 – 960	210	Above 960	300	Frequency range (MHz)	Field Strength ( $\mu\text{V/m}$ )	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength ( $\mu\text{V/m}$ )																						
30 – 88	90																						
88 – 216	150																						
216 – 960	210																						
Above 960	300																						
Frequency range (MHz)	Field Strength ( $\mu\text{V/m}$ )																						
30 – 88	100																						
88 – 216	150																						
216 – 960	200																						
Above 960	500																						

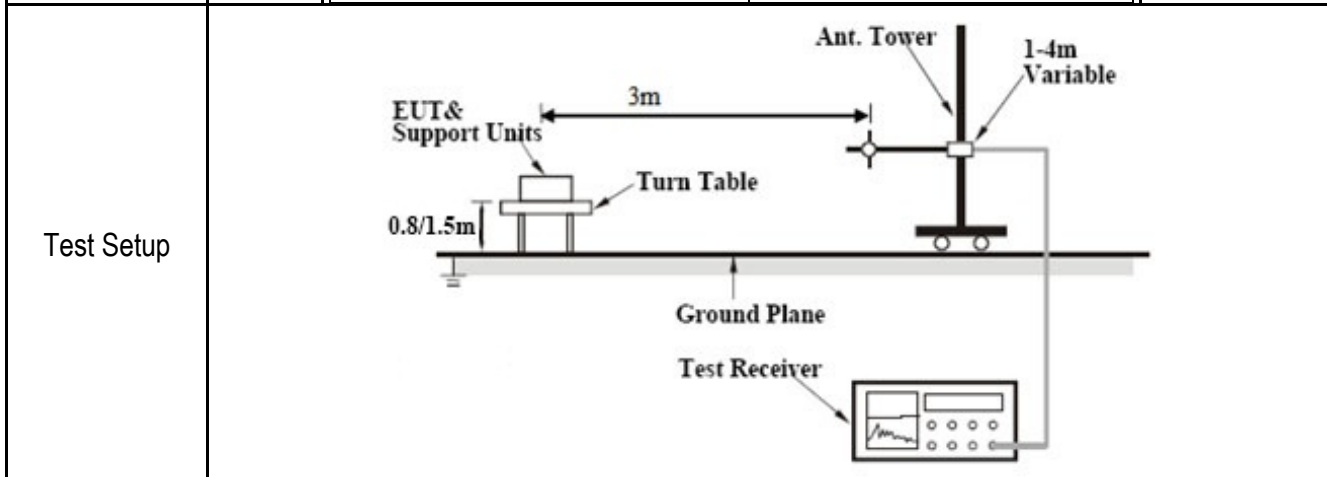

Procedure	Steps
	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.</li> <li>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> </ol>

	<p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>■ 1/T kHz (Duty cycle &lt; 98%) □ 10 Hz (Duty cycle &gt; 98%)</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A

### Data sample

No.	Frequency (MHz)	Reading (dB $\mu$ V/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree ( $^{\circ}$ )
-----	--------------------	---------------------------	----------	-----------------	--------------	---------------	--------------------------	-------------------------	----------------	----------------	--------------------------

Frequency (MHz) = Emission frequency in MHz

Reading (dB $\mu$ V/m) = Receiver Reading Value

Detector= Peak Detector or Quasi Peak Detector

Ant\_F=Antenna Factor

PA\_G=Pre-Amplifier Gain

Cab\_L=Cable Loss

Result (dB $\mu$ V/m) = Reading Value + Corrected Value

Limit (dB $\mu$ V/m) = Limit stated in standard

Height (cm) = Height of Receiver antenna


Degree = Turn table degree

### Calculation Formula:

Margin (dB) = Result (dB $\mu$ V/m) – limit (dB $\mu$ V/m)

<b>Test Mode:</b>	<b>Transmitting BLE Mode</b>
-------------------	------------------------------

**Below 1GHz**

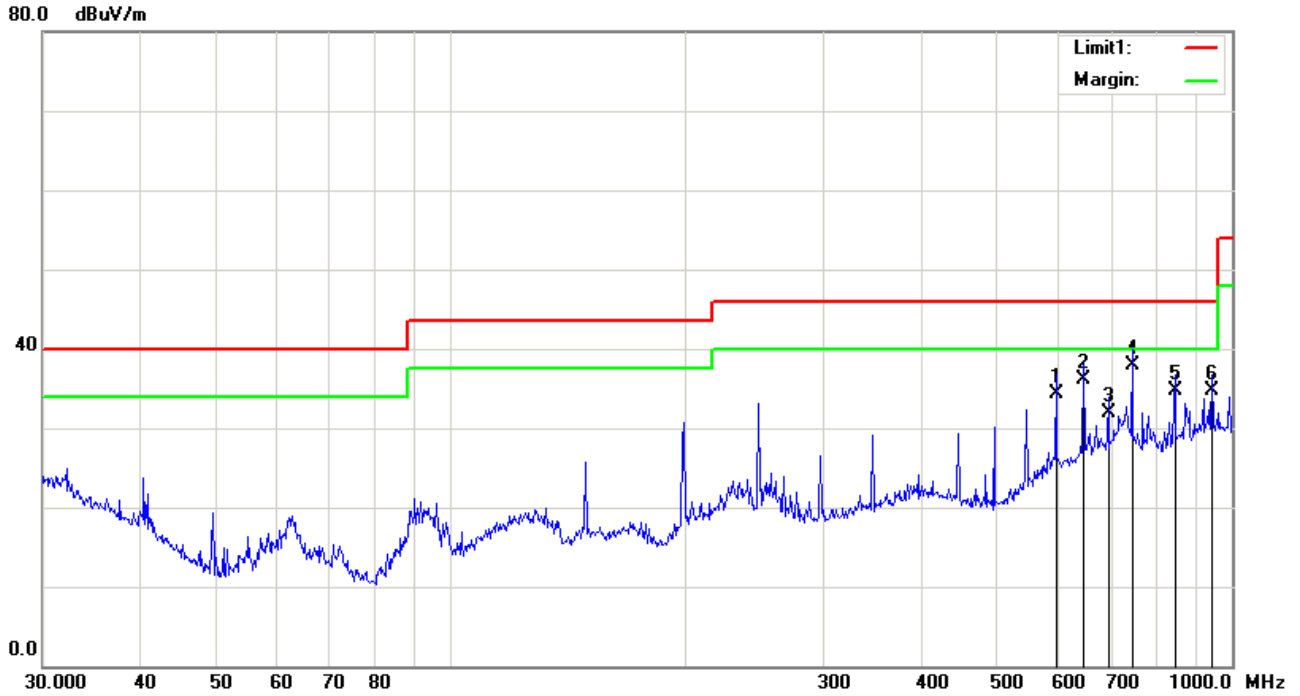


**Test Data**

**Vertical Polarity Plot @3m**

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	595.1329	59.08	QP	20.02	48.69	3.92	34.33	46.00	-11.67	100	76
2	645.1195	58.19	QP	21.31	47.47	4.08	36.11	46.00	-9.89	100	209
3	694.4174	50.94	QP	22.46	45.77	4.24	31.87	46.00	-14.13	100	353
4	744.8661	56.42	QP	22.12	45.07	4.38	37.85	46.00	-8.15	100	173
5	845.0878	53.70	QP	22.51	46.21	4.68	34.68	46.00	-11.32	200	149
6	942.1305	51.94	QP	23.65	45.88	4.94	34.65	46.00	-11.35	100	158

<b>Test Mode:</b>	<b>Transmitting BLE Mode</b>
-------------------	------------------------------

### Below 1GHz

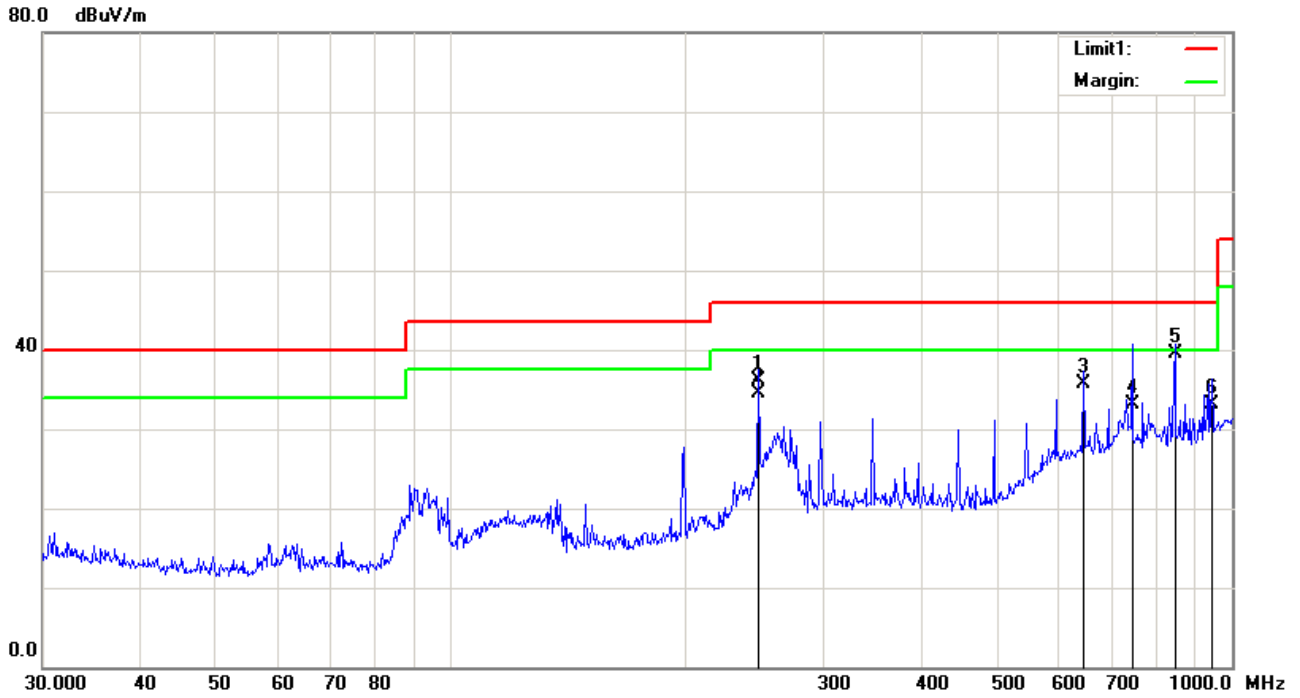

**Horizontal Polarity Plot @3m**

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	247.6819	66.26	QP	15.06	47.64	2.50	36.18	46.00	-9.82	100	119
2	247.6819	64.62	QP	15.06	47.64	2.50	34.54	46.00	-11.46	100	119
3	645.1195	57.31	QP	21.77	47.47	4.08	35.69	46.00	-10.31	200	289
4	744.8661	51.10	QP	22.67	45.07	4.38	33.08	46.00	-12.92	100	214
5	845.0878	58.20	QP	22.86	46.21	4.68	39.53	46.00	-6.47	100	40
6	942.1305	50.24	QP	23.71	45.88	4.94	33.01	46.00	-12.99	100	39

<b>Test Mode:</b>	<b>Transmitting BLE Mode-Low Channel</b>
-------------------	--

**Above 1GHz  
Horizontal**

No.	Frequency (MHz)	Reading (dB $\mu$ V/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree ( $^{\circ}$ )
1	1816.000	61.16	peak	30.23	51.36	4.01	44.04	74.00	-29.96	200	358
2	4804.000	66.13	peak	33.17	53.34	6.10	52.06	74.00	-21.94	200	329
3	5981.000	56.08	peak	33.40	51.36	5.87	43.99	74.00	-30.01	100	45
4	7970.000	56.87	peak	36.51	54.74	7.82	46.46	74.00	-27.54	200	235
5	9823.000	54.87	peak	38.28	53.97	9.11	48.29	74.00	-25.71	100	83
6	11659.000	55.41	peak	38.57	53.42	10.04	50.60	74.00	-23.40	100	339

**Vertical**

No.	Frequency (MHz)	Reading (dB $\mu$ V/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Degree ( $^{\circ}$ )
1	1901.000	61.26	peak	30.73	51.77	3.98	44.20	74.00	-29.80	200	280
2	4196.000	58.26	peak	31.83	52.59	6.11	43.61	74.00	-30.39	200	39
3	4804.000	65.68	peak	33.17	53.34	6.10	51.61	74.00	-22.39	200	227
4	5981.000	56.12	peak	33.40	51.36	5.87	44.03	74.00	-29.97	200	83
5	7987.000	56.28	peak	36.56	54.74	7.84	45.94	74.00	-28.06	200	286
6	10350.000	55.09	peak	38.63	53.35	9.32	49.69	74.00	-24.31	200	34

<b>Test Mode:</b>	<b>Transmitting BLE Mode-Middle Channel</b>
-------------------	---

**Above 1GHz  
Horizontal**

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	4349.000	57.61	peak	32.17	52.28	5.88	43.38	74.00	-30.62	200	131
2	4880.000	64.16	peak	33.34	53.67	6.00	49.83	74.00	-24.17	200	48
3	7936.000	55.70	peak	36.41	54.75	7.79	45.15	74.00	-28.85	200	357
4	10520.000	54.53	peak	38.59	53.04	9.36	49.44	74.00	-24.56	200	44
5	11591.000	54.94	peak	38.58	53.30	10.07	50.29	74.00	-23.71	200	349
6	13087.000	54.41	peak	40.69	51.83	9.61	52.88	74.00	-21.12	200	254

**Vertical**

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	2003.000	60.91	peak	31.30	52.24	3.94	43.91	74.00	-30.09	100	146
2	4880.000	65.96	peak	33.34	53.67	6.00	51.63	74.00	-22.37	200	263
3	5981.000	55.61	peak	33.40	51.36	5.87	43.52	74.00	-30.48	200	297
4	8089.000	55.92	peak	36.16	54.56	7.95	45.47	74.00	-28.53	100	137
5	10384.000	55.43	peak	38.62	53.28	9.32	50.09	74.00	-23.91	179	360
6	11523.000	55.25	peak	38.60	53.18	10.09	50.76	74.00	-23.24	100	60

<b>Test Mode:</b>	<b>Transmitting BLE Mode-High Channel</b>
-------------------	---

**Above 1GHz  
Horizontal**

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	2020.000	60.77	peak	31.31	52.26	3.97	43.79	74.00	-30.21	100	194
2	4960.000	66.57	peak	33.51	54.03	5.89	51.94	74.00	-22.06	200	21
3	6151.000	55.60	peak	33.64	51.75	5.85	43.34	74.00	-30.66	100	54
4	7579.000	56.09	peak	35.34	54.78	7.49	44.14	74.00	-29.86	200	104
5	9908.000	54.83	peak	38.48	54.03	9.17	48.45	74.00	-25.55	200	281
6	11557.000	55.13	peak	38.59	53.24	10.08	50.56	74.00	-23.44	100	336

**Vertical**

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	2020.000	60.60	peak	31.31	52.26	3.97	43.62	74.00	-30.38	200	8
2	4960.000	65.14	peak	33.51	54.03	5.89	50.51	74.00	-23.49	200	295
3	6015.000	55.28	peak	33.42	51.33	5.85	43.22	74.00	-30.78	200	21
4	8225.000	56.06	peak	35.48	54.29	8.09	45.34	74.00	-28.66	200	86
5	9874.000	54.55	peak	38.40	54.01	9.14	48.08	74.00	-25.92	200	150
6	10843.000	55.02	peak	38.46	53.17	9.45	49.76	74.00	-24.24	200	166




## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted Emissions</b>					
R&S EMI Test Receiver	ESPI3	101216	05/03/2017	05/02/2018	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531021	10/30/2016	10/29/2017	<input checked="" type="checkbox"/>
V-LISN	ESH3-Z5	838979/005	03/30/2017	03/29/2018	<input checked="" type="checkbox"/>
SIEMIC EZ_EMC Conducted Emissions software	Ver.ICP-03A1	N/A	N/A	N/A	<input checked="" type="checkbox"/>
<b>RF conducted test</b>					
R&S EMI Receiver	ESPI3	101216	05/03/2017	05/02/2018	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	02/02/2017	02/01/2018	<input checked="" type="checkbox"/>
Spectrum Analyzer	N9010A	MY47191130	03/30/2017	03/29/2018	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
Spectrum Analyzer	N9010A	MY47191130	05/03/2017	05/02/2018	<input checked="" type="checkbox"/>
R&S EMI Receiver	ESPI3	101216	05/03/2017	05/02/2018	<input checked="" type="checkbox"/>
Antenna (30MHz~6GHz)	JB6	A121411	10/31/2016	10/31/2017	<input checked="" type="checkbox"/>
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	11/15/2016	11/14/2017	<input checked="" type="checkbox"/>
Hp Pre-Amplifier	8447F	1937A01160	10/31/2016	10/30/2017	<input checked="" type="checkbox"/>
Agilent Pre-Amplifier	8449B	N/A	10/31/2016	10/30/2017	<input checked="" type="checkbox"/>
SIEMIC EZ_EMC Radiated Emissions software	Ver.ICP-03A1	N/A	N/A	N/A	<input checked="" type="checkbox"/>


**Annex B. EUT And Test Setup Photographs**

**Annex B.i. Photograph: EUT External and Internal Photos**

Antenna

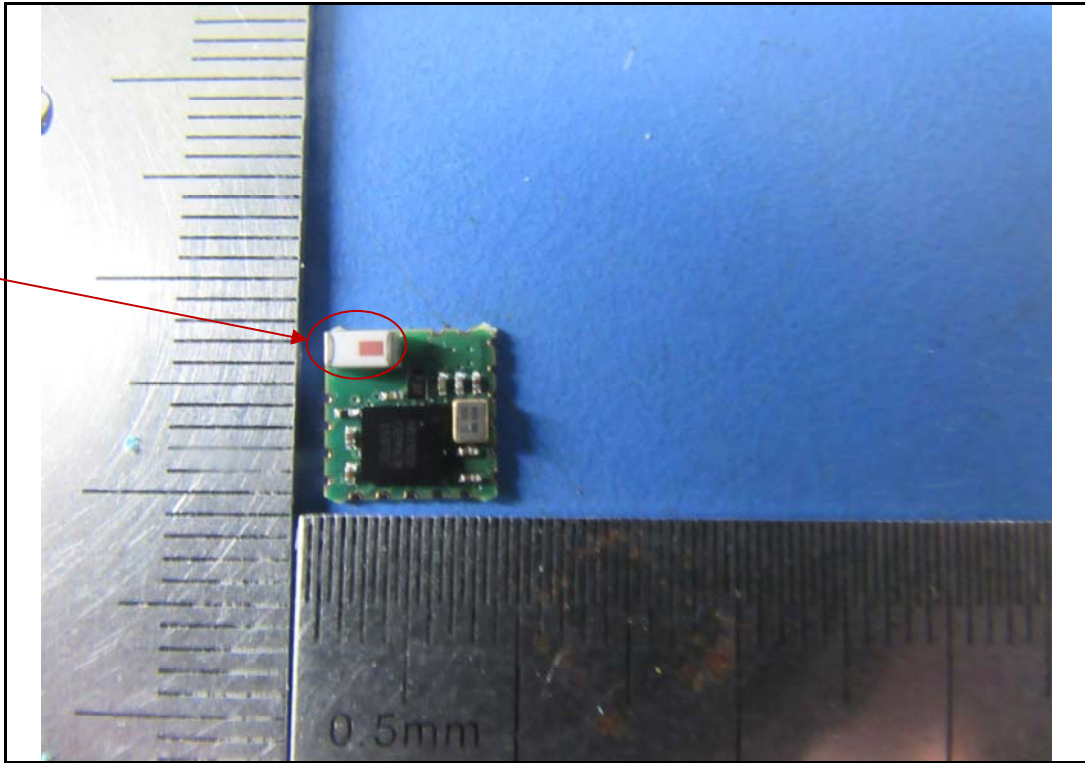

EUT - Front View

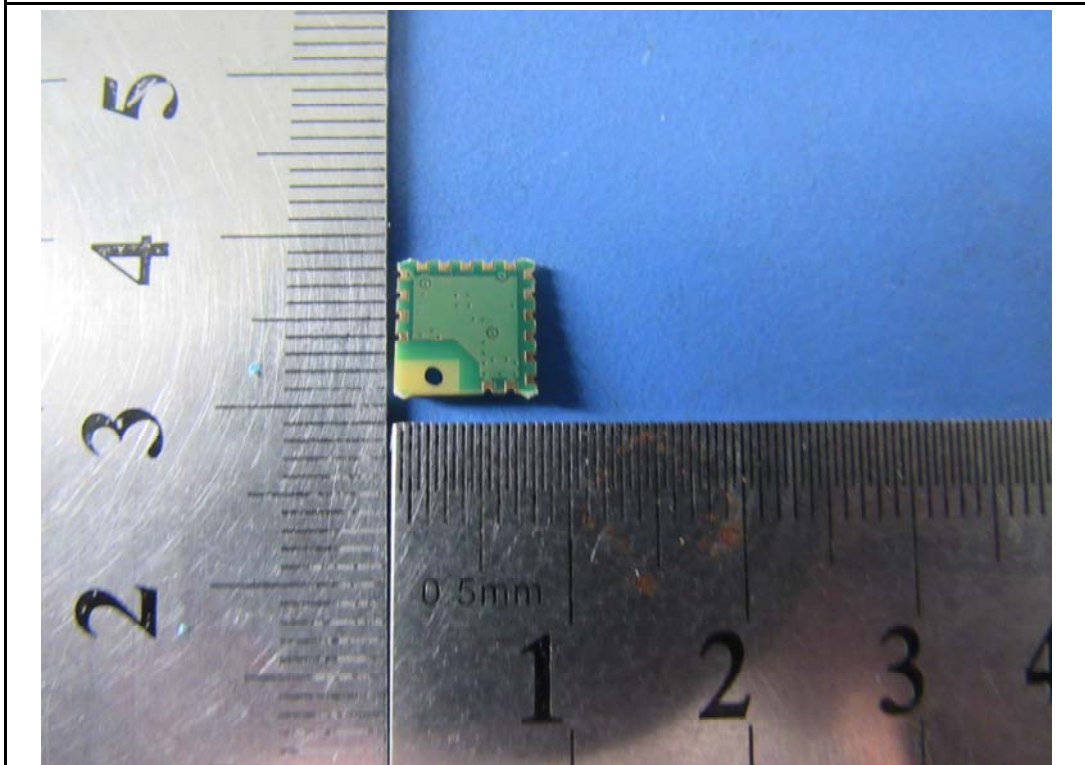

EUT - Rear View

**Annex B.iii. Photograph: Test Setup Photo**




Conducted Emissions Test Setup Front View




Conducted Emissions Test Setup Side View



Radiated Spurious Emissions Test Setup Below 1GHz Front View

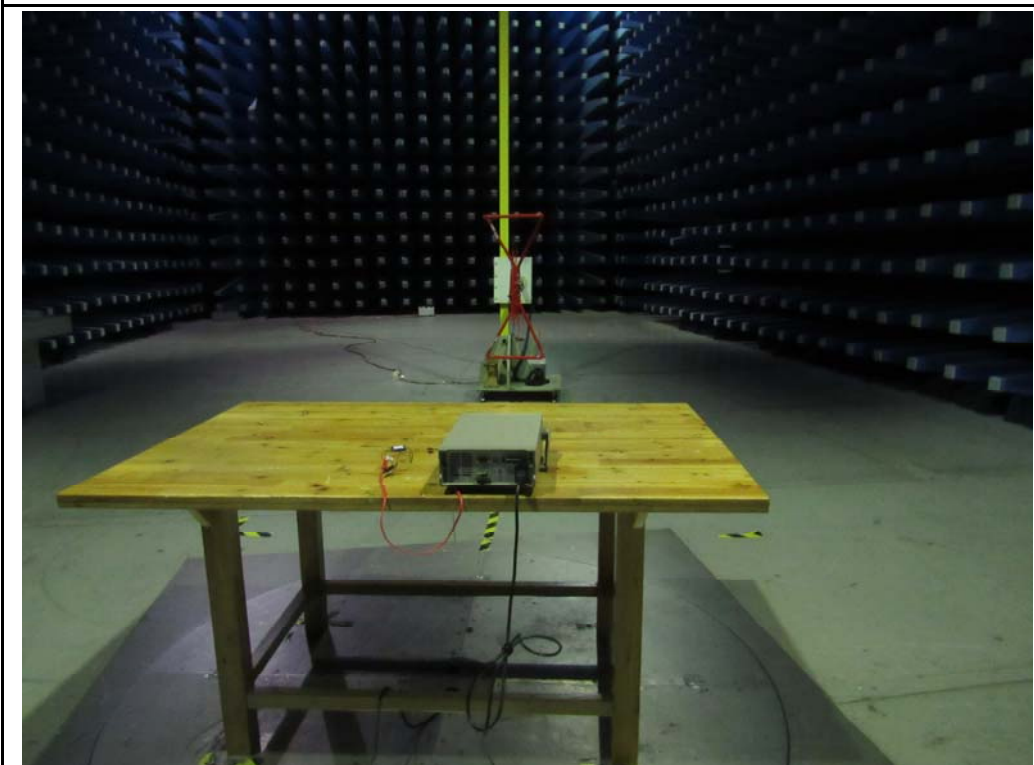

Radiated Spurious Emissions Test Setup Below 1GHz Rear View

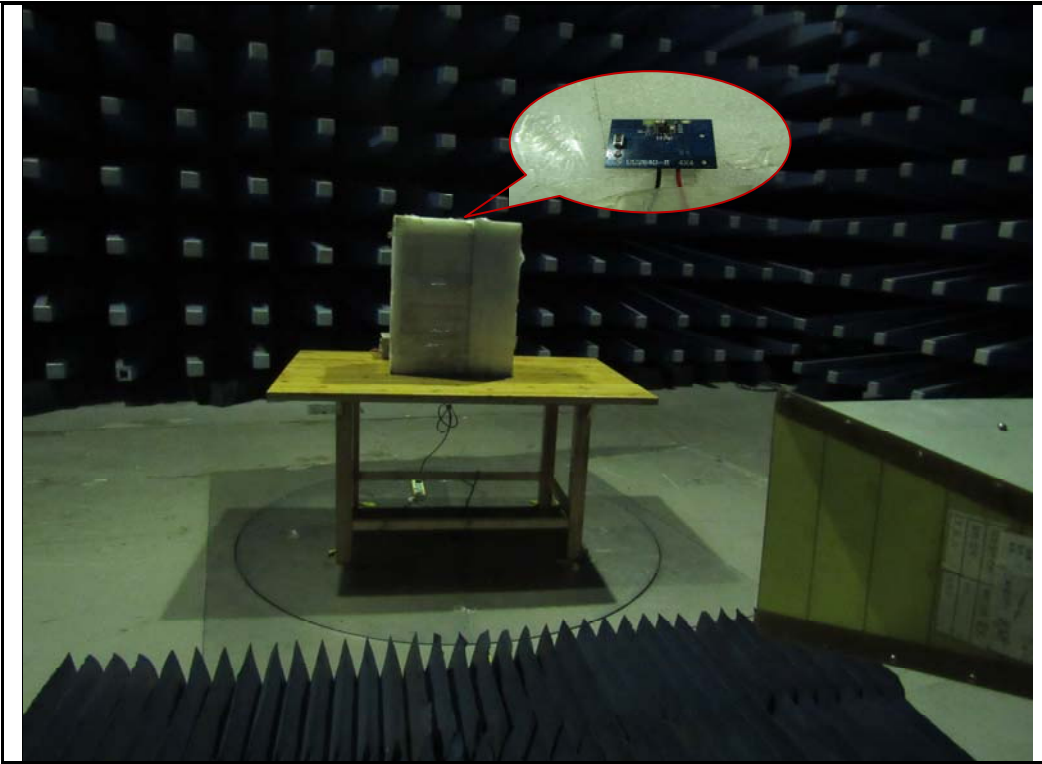


Radiated Spurious Emissions Test Setup Above 1GHz


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.i. TEST SET UP BLOCK

#### Block Configuration Diagram for DC Line Conducted Emissions

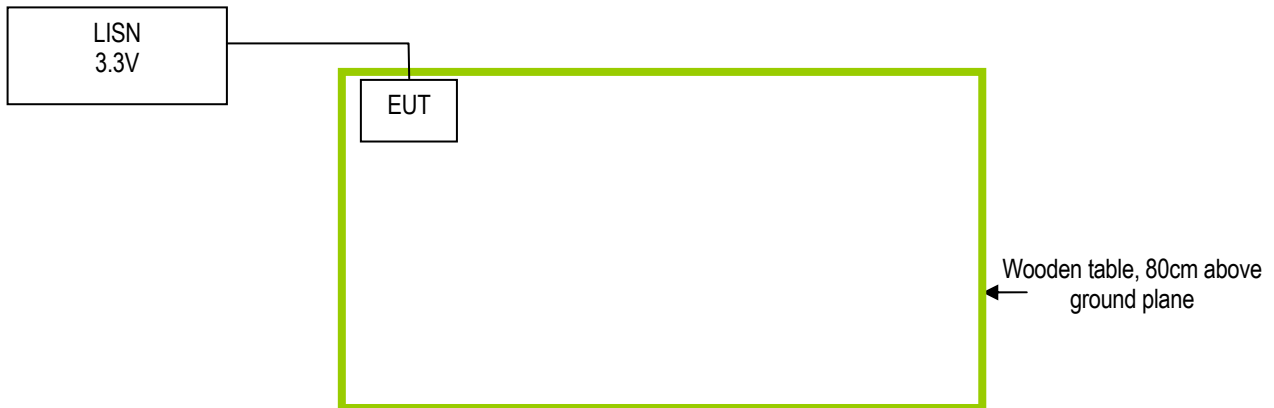

### Block Configuration Diagram for Radiated Emissions

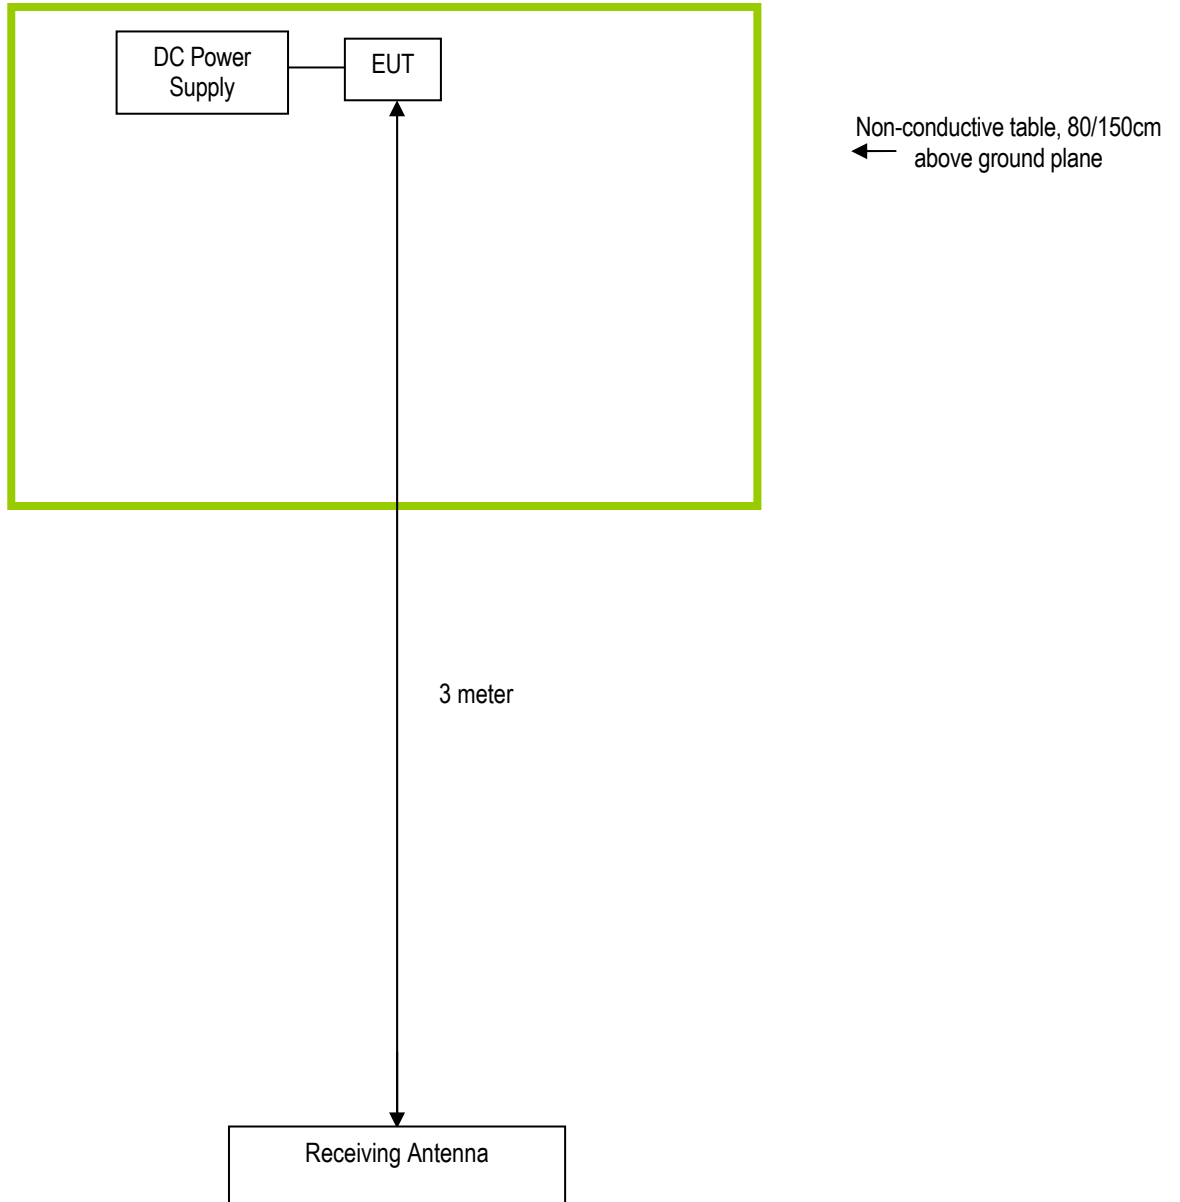

**Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

<b>Manufacturer</b>	<b>Equipment Description</b>	<b>Model</b>
ITECH	DC Power Supply	IT6861B



Test Report No.	17020852-FCC-R1
Page	41 of 42

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report No.	17020852-FCC-R1
Page	42 of 42

## Annex E. DECLARATION OF SIMILARITY

N/A