

FCC Part 15B Measurement and Test Report




For

LM Technologies Ltd.

Unit19, Spectrum House, 32-34, Gordon House Road, London, NW5 1LP,

United Kingdom

FCC ID:VVX-LM817-0655

Test Rule(s):	<u>FCC Part 15 Subpart B</u>
	<u>LM817 WiFi & Bluetooth HCI Combination USB</u>
Product Description:	<u>Adapter</u>
Tested Model:	<u>LM817-</u>
Report No.:	<u>STR16068311I-4</u>
Tested Date:	<u>2016-06-23 to 2016-07-14</u>
Issued Date:	<u>2016-07-14</u>
Tested By:	<u>Jason Su / Engineer</u> 
Reviewed By:	<u>Silin Chen / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> 
Prepared By:	
	Shenzhen SEM.Test Technology Co., Ltd.
	1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)
	Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND OPERATION MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
2. SUMMARY OF TEST RESULTS	7
3. CONDUCTED EMISSIONS	8
3.1 TEST PROCEDURE.....	8
3.2 BASIC TEST SETUP BLOCK DIAGRAM.....	8
3.3 ENVIRONMENTAL CONDITIONS.....	8
3.4 SUMMARY OF TEST RESULTS/PLOTS.....	8
3.5 CONDUCTED EMISSIONS TEST DATA.....	9
4. RADIATED EMISSIONS	11
4.1 TEST PROCEDURE.....	11
4.2 TEST RECEIVER SETUP.....	12
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.4 ENVIRONMENTAL CONDITIONS.....	12
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	12

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: LM Technologies Ltd.
Address of applicant: Unit19, Spectrum House, 32-34, Gordon House Road, London, NW5 1LP, United Kingdom
Manufacturer: LM Technologies Ltd.
Address of manufacturer: Unit19, Spectrum House, 32-34, Gordon House Road, London, NW5 1LP, United Kingdom

General Description of EUT	
Product Name:	LM817 WiFi & Bluetooth HCI Combination USB Adapter
Trade Name:	LM
Model No.:	LM817-
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	USB 5V
Rated Current:	168mA
Rated Power:	/
Highest Internal Frequency:	40MHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the LM Technologies Ltd in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Operating	for EMI testing

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	LR-63C8R

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	ETS	3116B	00088203	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant


N/A: not applicable

3. Conducted Emissions

3.1 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.2 Basic Test Setup Block Diagram

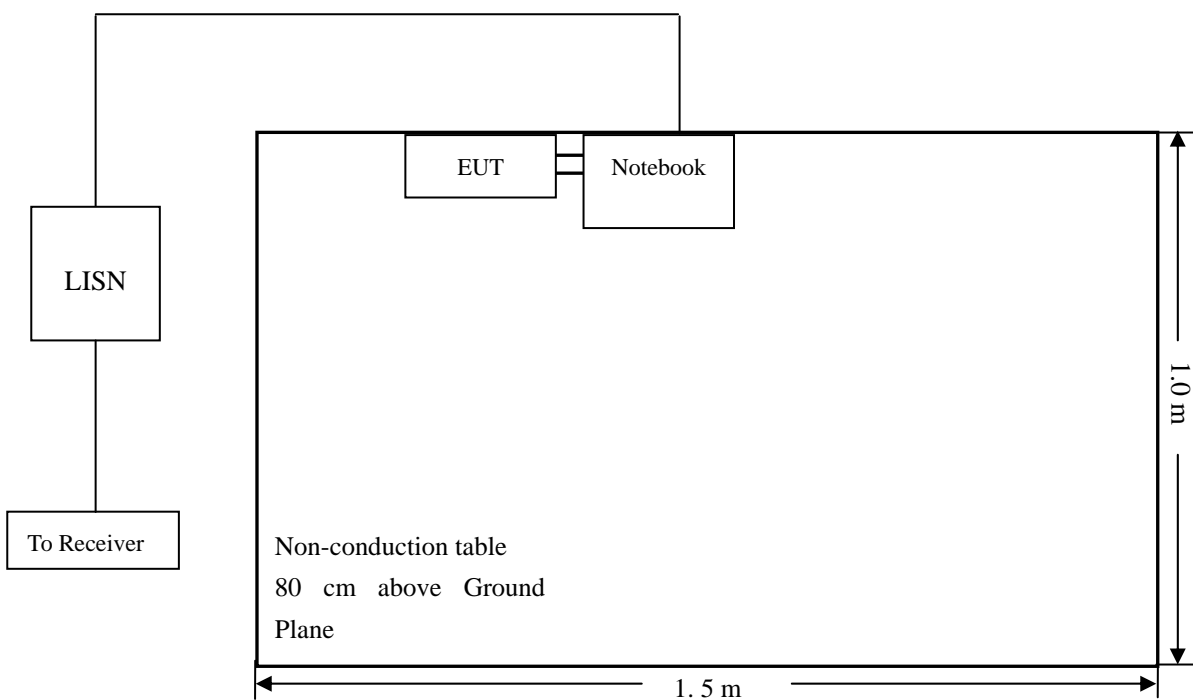

3.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.4 Summary of Test Results/Plots

According to the data in section 3.5, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


-14.17 dB at 0.1780 MHz in the **Line, Peak** detector, 0.15-30MHz

3.5 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: LM817 WiFi & Bluetooth HCI Combination USB Adapter
 Tested Model: LM817-
 Operating Condition: Operating
 Comment: AC 120V/60Hz; Notebook USB 5V

Test Specification: Neutral

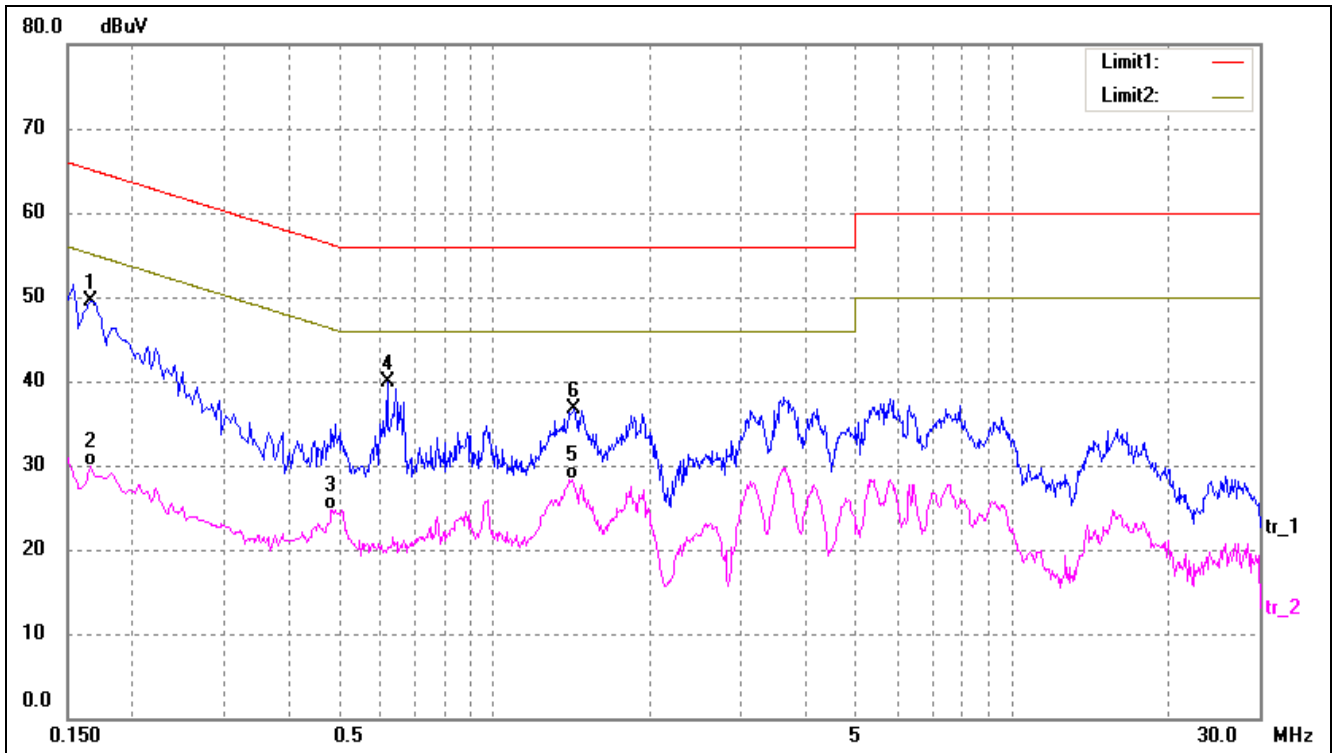

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	40.07	9.50	49.57	65.16	-15.59	peak
2	0.1660	20.32	9.50	29.82	55.16	-25.34	AVG
3	0.4860	15.18	9.55	24.73	46.24	-21.51	AVG
4	0.6220	30.26	9.59	39.85	56.00	-16.15	peak
5	1.4180	18.59	9.74	28.33	46.00	-17.67	AVG
6	1.4260	26.91	9.74	36.65	56.00	-19.35	peak

Test Specification: Line

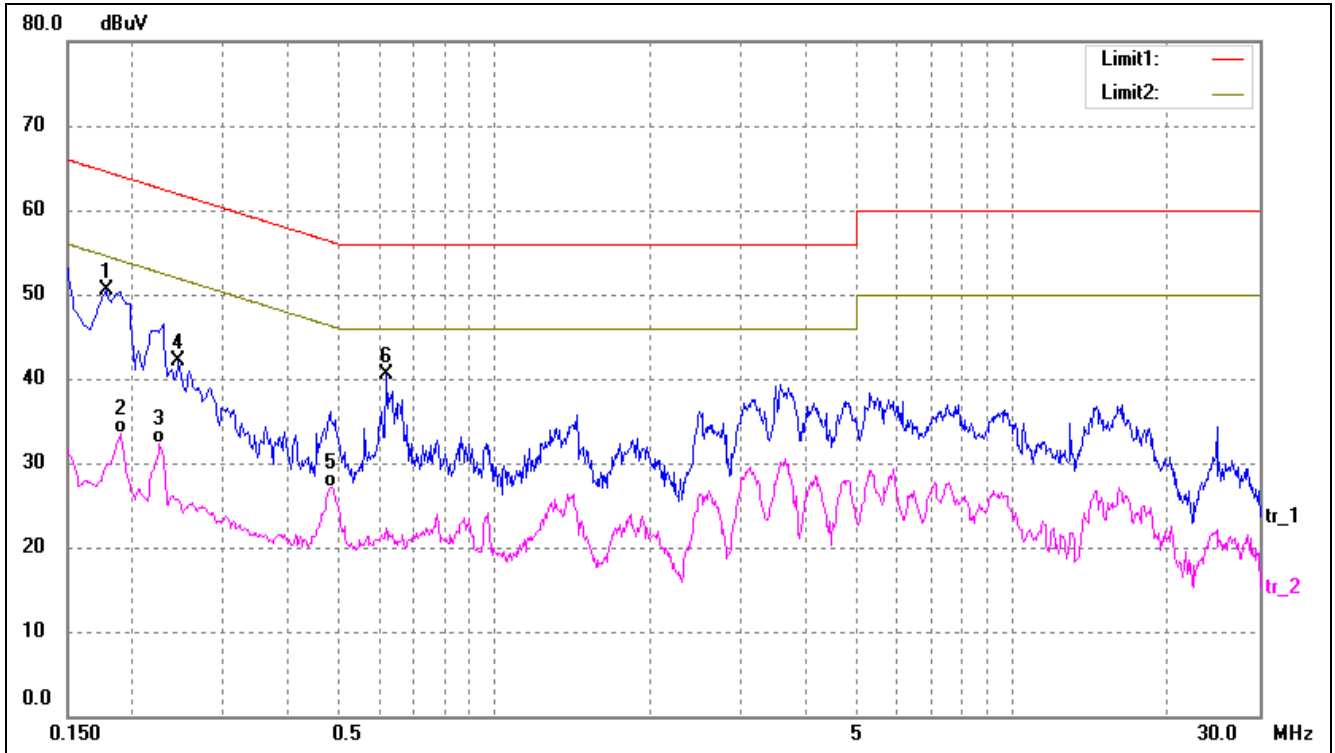

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1780	40.91	9.50	50.41	64.58	-14.17	peak
2	0.1900	24.10	9.50	33.60	54.04	-20.44	AVG
3	0.2260	22.73	9.50	32.23	52.60	-20.37	AVG
4	0.2460	32.60	9.50	42.10	61.89	-19.79	peak
5	0.4860	17.60	9.55	27.15	46.24	-19.09	AVG
6	0.6180	30.98	9.59	40.57	56.00	-15.43	peak


4. Radiated Emissions

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

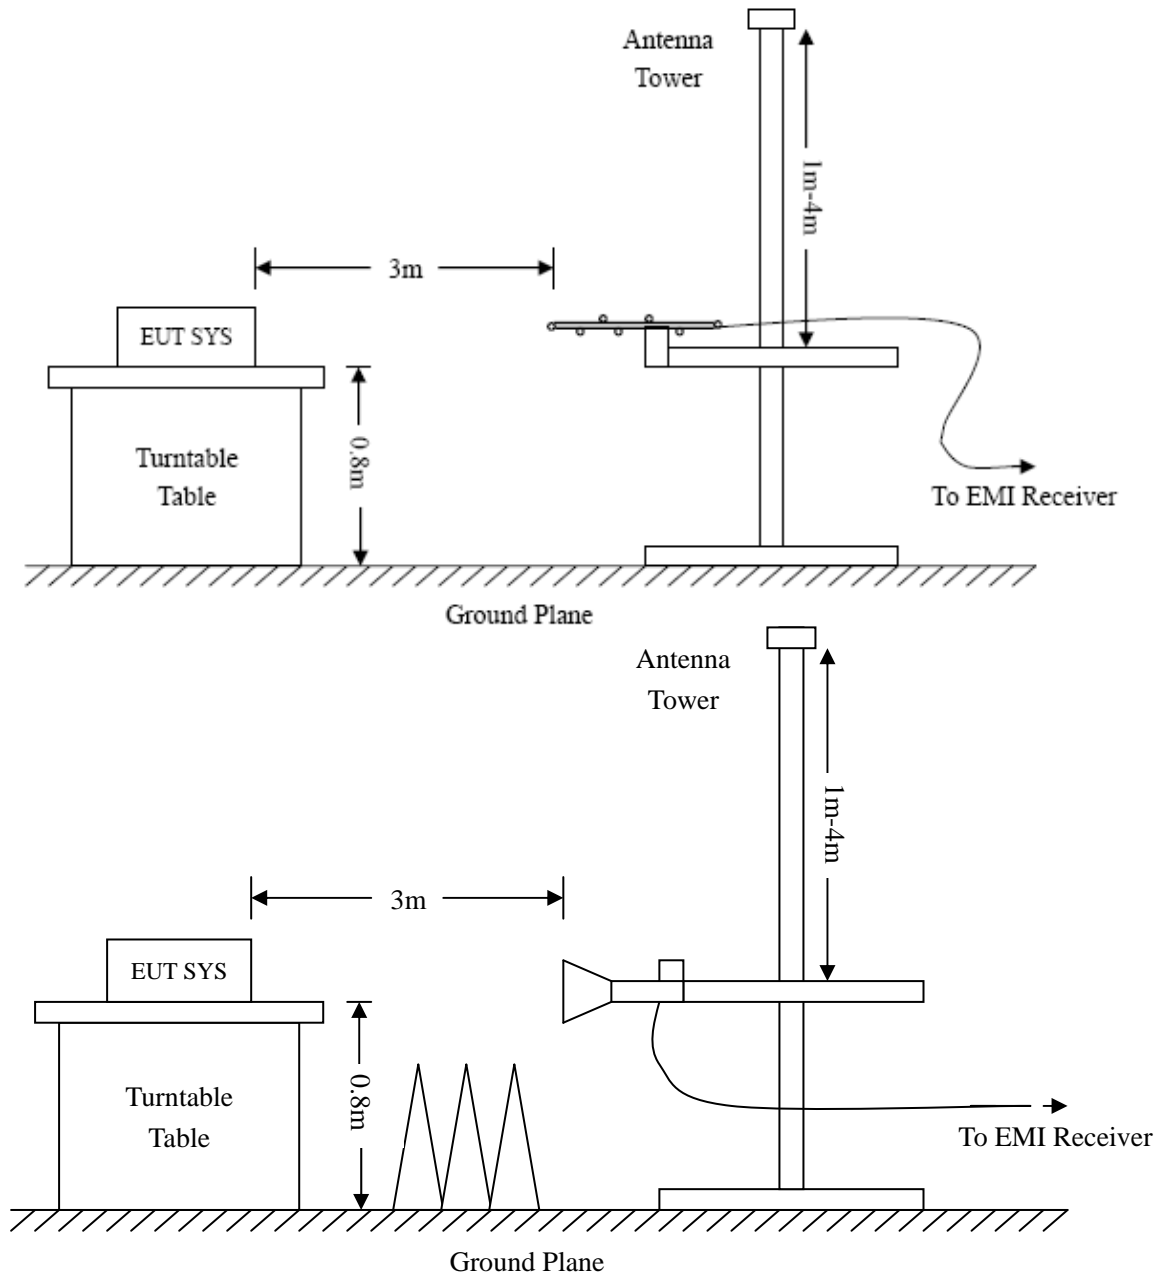

4.2 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.4 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-11.22 dB at 642.8613 MHz in the Horizontal polarization, 30MHz to 1 GHz, 3Meters

Plot of Radiated Emissions Test Data


EUT: LM817 WiFi & Bluetooth HCI Combination USB Adapter
 Tested Model: LM817-
 Operating Condition: Operating
 Comment: AC 120V/60Hz; Notebook USB 5V

Test Specification: Horizontal

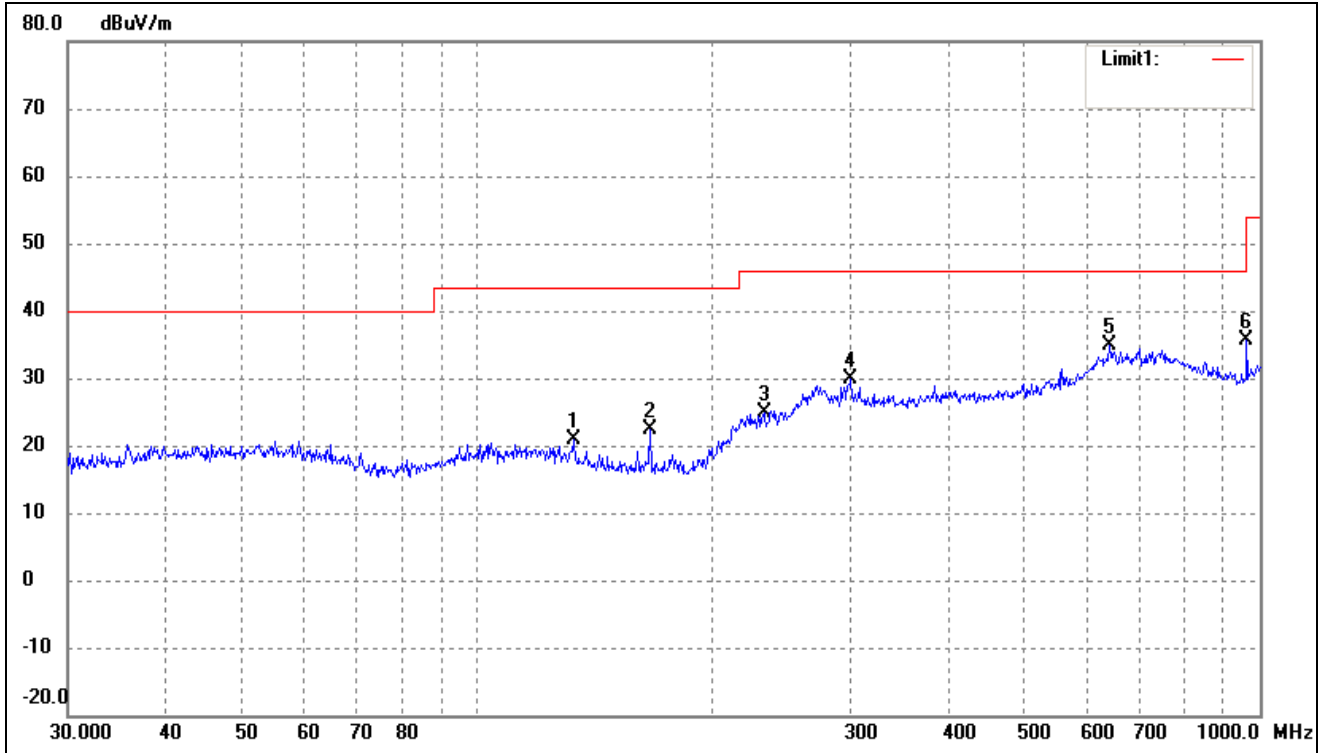

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	132.6850	17.07	3.76	20.83	43.50	-22.67	58	100	peak
2	166.0680	19.99	2.45	22.44	43.50	-21.06	32	100	peak
3	232.5318	16.32	8.45	24.77	46.00	-21.23	21	100	peak
4	300.3672	17.96	11.95	29.91	46.00	-16.09	259	100	peak
5	642.8613	16.78	18.00	34.78	46.00	-11.22	315	100	peak
6	962.1623	20.88	14.67	35.55	54.00	-18.45	321	100	peak

Test Specification: Vertical

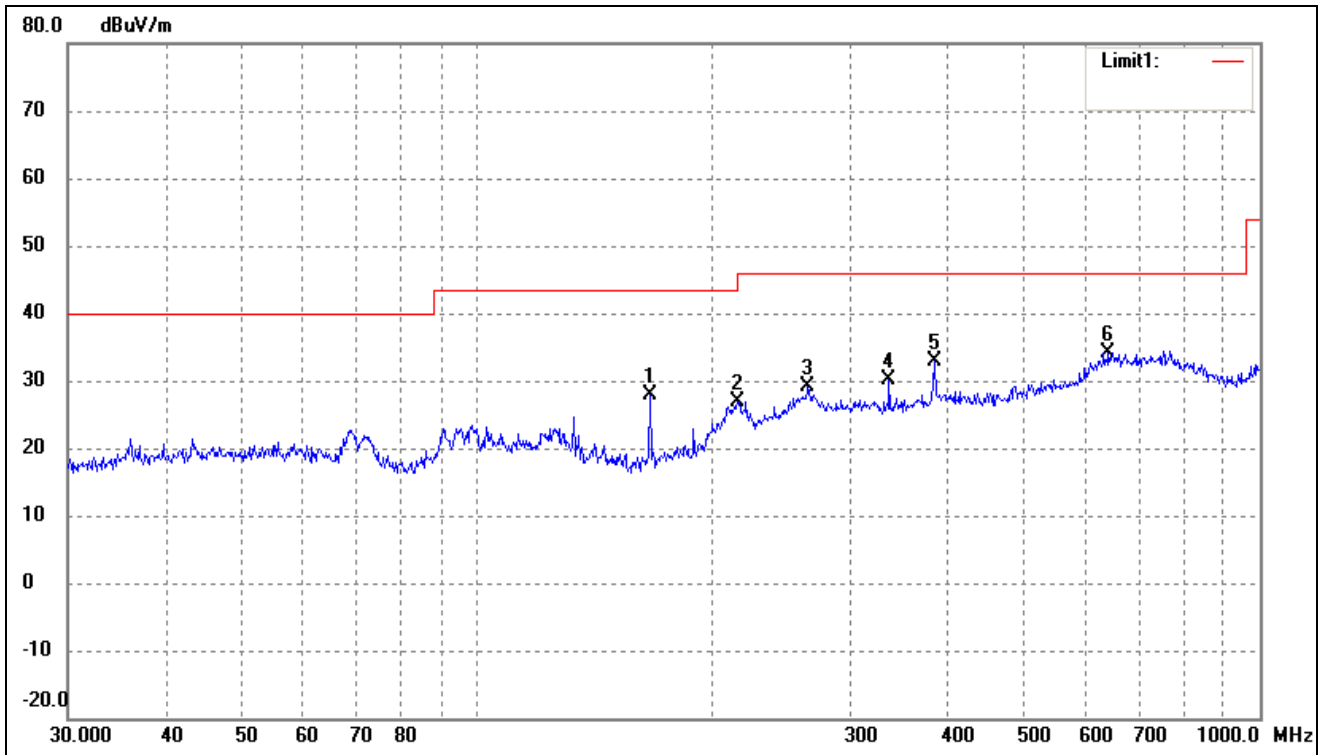

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	166.6514	25.50	2.46	27.96	43.50	-15.54	155	100	peak
2	215.2678	20.34	6.65	26.99	43.50	-16.51	29	100	peak
3	264.7457	19.05	10.03	29.08	46.00	-16.92	116	100	peak
4	336.0352	18.57	11.48	30.05	46.00	-15.95	256	100	peak
5	383.9318	20.88	11.97	32.85	46.00	-13.15	98	100	peak
6	640.6110	16.11	18.05	34.16	46.00	-11.84	210	100	peak

***** END OF REPORT *****